
FED. SUP CLASS
6610

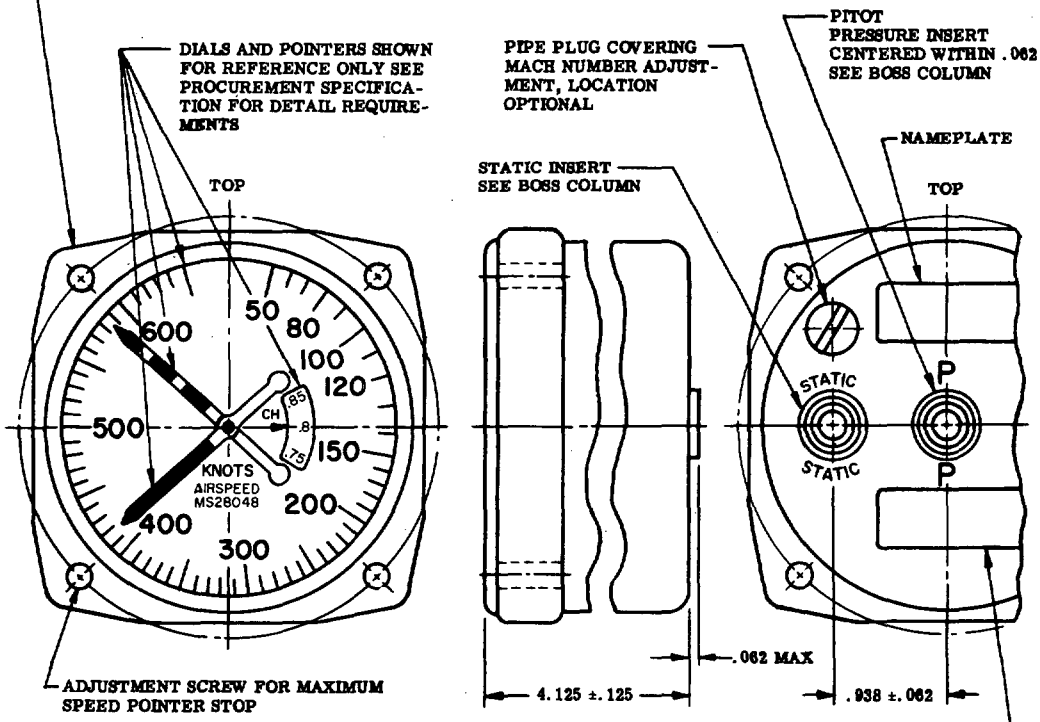

DASH NO.	DIAL MARKINGS	SCALE	BOSSES	PACKING
-1	FLUORESCENT	LINEAR	MS33649-4	MS28778-4
-2		NONLINEAR		
-3	LUSTERLESS WHITE	LINEAR		
-4		NONLINEAR		

NOTES:

1. DIMENSIONS IN INCHES.
2. DASH NUMBERS SHOWN ARE FOR INDICATORS WITH REMOVABLE SPRING NUTS.
3. MS28048-1, -2, -T1, -T2, -W1, -W2 ARE NO LONGER REQUIRED FOR NAVY PROCUREMENT BUT SHALL BE ISSUED UNTIL THE NAVY STOCK IS EXHAUSTED.
4. INTERCHANGEABILITY RELATIONSHIP: MS28048-1 THRU -4 CAN REPLACE THE CANCELLED MS28048-T1 THRU -T4.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(B) ENTIRE STANDARD REVISED AND REDRAWN

P.A. NAVY - AS Other Cust AIR FORCE - 71 ARMY - AV	TITLE INDICATOR, INDICATED AIRSPEED, PITOT STATIC MAXIMUM ALLOWABLE SPEED, 50-650 KNOTS	MILITARY STANDARD MS28048
PROCUREMENT SPECIFICATION MIL-I-5419	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-517/A-4918

APPROVED 8 AUG 55 REVISED (A) 1 MAR 60 (B) 27 Feb 69

USER SYMBOLS:

REVIEWER SYMBOLS: AF-71

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:56Z
Check the source to verify that this is the current version before use.