NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP. CLASS. 5935

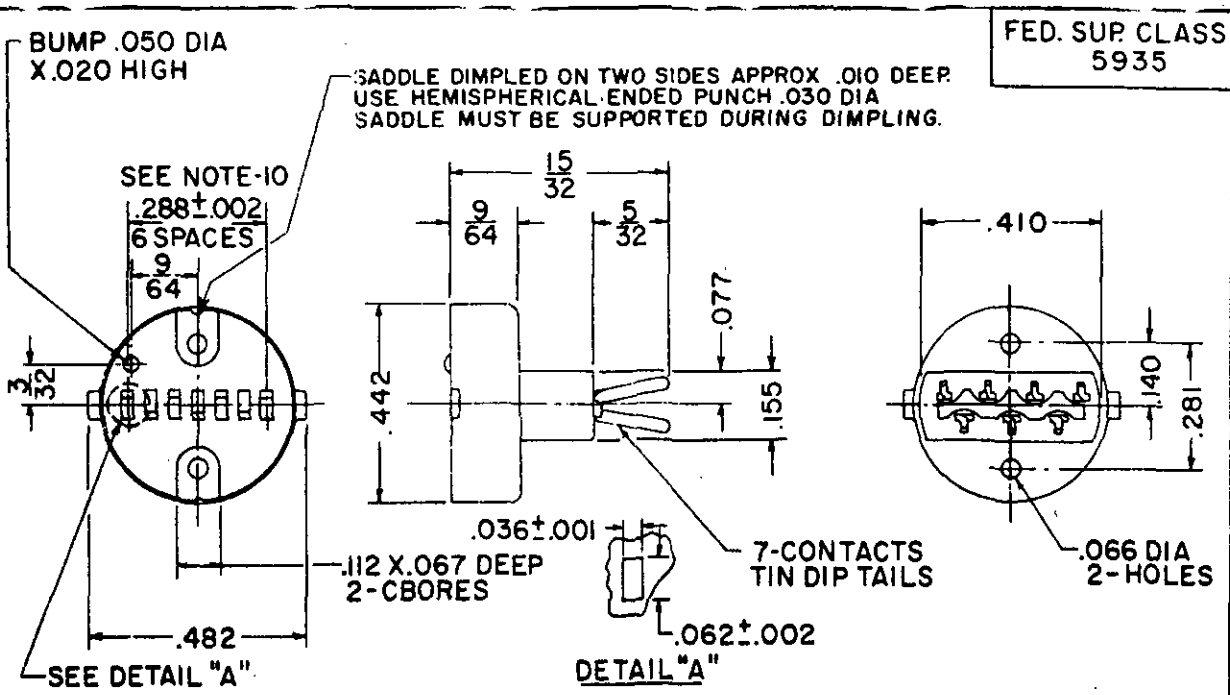


TABLE I

CLASSIFICATION BY OPERATING TEMPERATURE

DASH NO.	INSULATOR	OPERATING TEMPERATURE
-1	GLASS-FILLED DIALLYL PHTHALATE RESIN THERMOSETTING PLASTIC TYPE SDG MIL-M-14	100° TO 160° C
-2	MOLDED THERMOSETTING PLASTIC TYPE MFE MIL-M-14	100°

NOTES:

1. REFERENCED SPECIFICATIONS OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.
2. PLASTIC PARTS SHALL MEET THE REQUIREMENTS OF SPECIFICATION MIL-M-14.
3. SADDLE SHALL BE BRASS PER SPECIFICATION QQ-B-611, COMPOSITION D.
4. CONTACTS SHALL BE BERYLLIUM COPPER PER SPECIFICATION QQ-C-530.
5. *FINISHES: SADDLE SHALL BE BRIGHT NICKEL COATED. CONTACTS SHALL BE SILVER COATED.* TERMINALS, TIN DIPPED. ALL FINISHES SHALL COMPLY WITH SPECIFICATION MIL-P-14072.
6. METAL PARTS SHALL BE FREE FROM CHIPS, BURRS, AND SCRATCHES, IN ACCORDANCE WITH GOOD COMMERCIAL PRACTICE.
7. ELECTRICAL RATINGS (ABSOLUTE MAXIMUM), UNDER THE CONDITIONS SPECIFIED IN TABLE 2. VOLTAGE: SEA LEVEL 350 VOLTS AC RMS. 60,000 FEET, 150 VOLTS RMS. CURRENT: 1 AMPERE.
8. SADDLE SOCKET IS TOP MOUNTING. CHASSIS MOUNTING HOLE: .420 x .165.
9. TOLERANCES UNLESS OTHERWISE SPECIFIED SHALL BE HELD TO 1/64 ON FRACTIONS: .005 ON DECIMALS.
10. PIN CONTACTS SPACED EQUALLY AT .048 AND EACH CONTACT LOCATED WITHIN .001 INCHES OF TRUE POSITION.

SUPERSEDED AFTER 1 OCT 1973, USE MIL-S-12883/34

ALL DIMENSIONS IN INCHES

APPROVED 1 OCT 54 REVISED (A) 7 DEC 60 (B) 24 JAN 61 (C) 8 NOV 73

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS 35408 (SIG C)
SIG C	A- N- AF-	SOCKET, ELECTRON TUBE, SUB-MINIATURE, IN-LINE, 7 CONTACT	
PROCUREMENT SPECIFICATION: MIL-S-12883	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 OCT 52 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.