
FED. SUP CLASS
6640

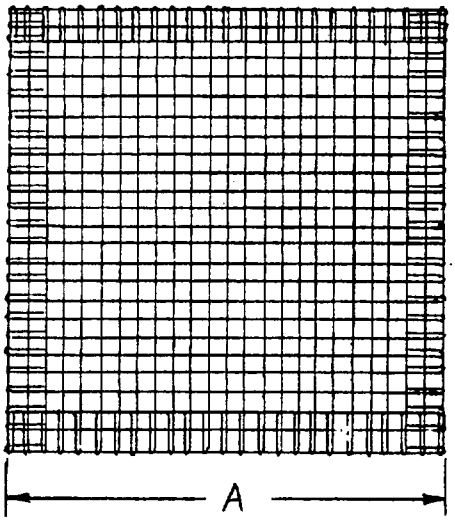

PART NUMBER	A LENGTH OF GRID SIDE (IN.)	WIRE DIAMETER (IN.)	MESH PER LINEAR INCH
MS36015-1	4 ± 0.12	0.020 ± 0.001	16
MS36015-3	6 ± 0.12	0.020 ± 0.001	16
MS36015-4	5 ± 0.12	0.020 ± 0.001	16
MS26015-2	Canceled; Replaced by MS36015-3		

MATERIAL: Grids shall be of nickel-chromium alloy wire, 80 percent nickel and 20 percent chromium. Wire shall be iron free.

DESIGN: Wire grid shall be square. All edges of grid shall be turned under 1/4 ± 1/16 inch to prevent fraying and to increase rigidity.

NOTES:

1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. For design feature purposes, this standard takes precedence over procurement document referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. FSCM: 22527, 64484, 87664.

APPROVED 23 Dec 1959 REVISED (A) 15 Dec 1967 (B) 9 Oct 1975 (C) 4 Dec 1985

USER ACTIVITIES: ARMY - ME, NAVY - MS, AIR FORCE - 03

REVIEWER ACTIVITIES: ARMY - MD, NAVY - AS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

©ENTIRE STANDARD REVISED

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		GRID, WIRE GAUZE, LABORATORY, PLAIN	MS 36015
Procurement Specifications NNN-G-698	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NUMBER 6640-1312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.