

FED. SUP. CLASS
4730

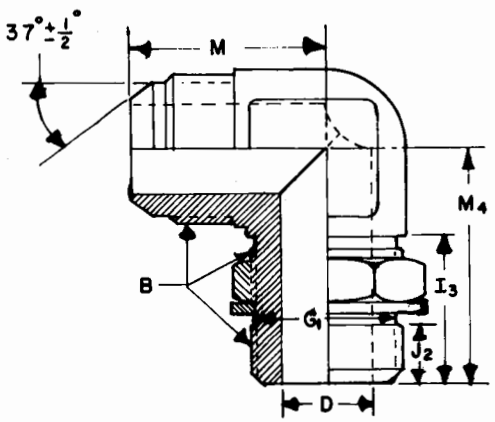

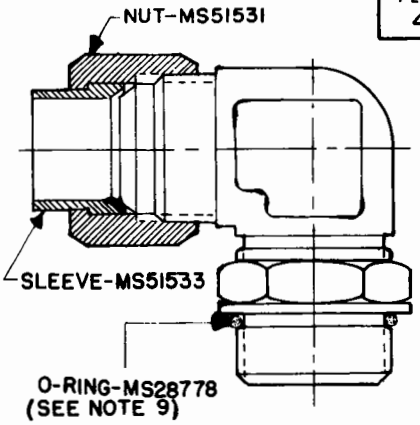

DASH NUMBER		TUBE OD	B	D		G_1	I_3	J_2	M	M_4
			STRAIGHT THREAD	DIAMETER				FULL THREAD		
BODY	*ASSY	NOM		BASIC	TOLERANCE	+.002 −.003	±.020	±.005	±.030	±.030
B2	A2	1/8	5/16-24 UNF-2A	.062	±.003	.250	.610	.234	.770	.910
B3	A3	3/16	3/8 -24 UNF-2A	.125		.313	.610	.234	.830	.940
B4	A4	1/4	7/16-20 UNF-2A	.172		.364	.700	.281	.890	1.030
B5	A5	5/16	1/2 -20 UNF-2A	.234		.427	.700	.281	.950	1.090
B6	A6	3/8	9/16-18 UNF-2A	.297	±.004	.482	.770	.312	1.060	1.250
B8	A8	1/2	3/4 -16 UNF-2A	.391		.660	.880	.344	1.250	1.450
B10	A10	5/8	7/8 -14 UNF-2A	.484		.773	1.020	.391	1.450	1.700
B12	A12	3/4	1-1/16-12 UN-2A	.609	±.005	.945	1.160	.469	1.660	1.940
B14	A14	7/8	1-3/16-12 UN-2A	.718		1.070	1.160	.469	1.730	2.000
B16	A16	1	1-5/16-12 UN-2A	.844	+.007-.005	1.195	1.160	.469	1.810	2.050
B20	A20	1-1/4	1-5/8 -12 UN-2A	1.078	+.008-.005	1.507	1.160	.469	2.060	2.250
B24	A24	1-1/2	1-7/8 -12 UN-2A	1.312		1.756	1.160	.469	2.330	2.390
B32	A32	2	2-1/2 -12 UN-2A	1.781	+.010-.005	2.381	1.160	.469	3.060	2.890

NOTES:

1. MATERIAL: Steel, carbon in accordance with procurement specification.
   Steel, corrosion-resisting in accordance with procurement specification.
   Ⓡ Monel in accordance with Federal Specification QQ-N-281.
   Ⓡ Copper-nickel in accordance with Military Specification MIL-C-15726, composition 70-30.
2. PROTECTIVE COATING: Cadmium plated in accordance with procurement specification.
   Zinc plated in accordance with procurement specification.
   Phosphate coating in accordance with procurement specification.
   Passivation treatment in accordance with procurement specification.
3. DIMENSIONS AND TOLERANCES: Dimensions and tolerances not shown shall be in accordance with the SAE Standard for 37 Degree Flared Fittings (SAE J514).
4. THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, FED-STD-H28.
5. PART NUMBER: The MS part number consists of the MS number plus the dash number.
   A. For body only, cadmium plated, use the MS number, plus the body dash number. Example: MS51527B2.
   B. For complete assembly (with nut and sleeve), cadmium plated, use the MS number, plus the assembly dash number. Example: MS51527A2.
   C. For zinc coating add (Z) to the dash number. Example: MS51527B2Z or MS51527A2Z.
   D. For phosphate coating add (P) to the dash number. Example: MS51527B2P or MS51527A2P.
   E. For corrosion-resisting steel add (S) to the dash number. Example: MS51527B2S or MS51527A2S.
   Ⓡ F. For monel add (M) to the dash number. Example: MS51527B2M or MS51527A2M.
   Ⓡ G. For copper-nickel add (CN) to the dash number. Example: MS51527A2CN.

Ⓡ denotes changes

REVISED Ⓐ 17 JANUARY 1979 Ⓑ 20 SEPTEMBER 1982
APPROVED 20 DEC 1971

P.A. AR Other Cust OS	International interest	TITLE ELBOW, TUBE TO BOSS, 90°, O-RING, 37°FLARED	MILITARY STANDARD MS51527
PROCUREMENT SPECIFICATION MIL-F-18866		SUPERSEDES:	PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2025-10-23T18:06Z
Check the source to verify that this is the current version before use.

6. For design feature purpose, this standard takes precedence over procurement documents referenced herein.
7. Reference documents shall be of the issue in effect on date of invitations for bid.
8. The illustration is for identification purpose only and is not intended to restrict designs or shapes not dimensioned.
*9. Procure the O-ring separately and install immediately before installation of fitting.
10. After 17 January 1979 bodies will be used for production only and SHALL NOT be stocked for maintenance. Existing stock of bodies should be used until depleted.

APPROVED 20 DEC 1971
REVISED (B) For changes see page 1.

Source: https://assist.dla.mil -- Downloaded: 2025-10-23T18:06Z
Check the source to verify that this is the current version before use.