
FED. SUP CLASS
4730

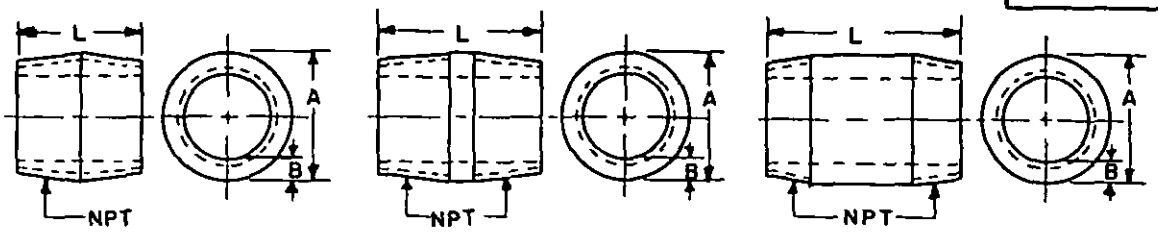


* CLOSE TYPE ▲ SHORT TYPE LONG TYPE

| NOMINAL PIPE SIZE | 1/8 | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1-1/4 | 1-1/2 | -2, | 2-1/2 | 3 | 4 | 5 | 6 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| A OUTSIDE DIA. | .405 | .540 | .675 | .840 | 1.050 | 1.315 | 1.660 | 1.900 | 2.375 | 2.875 | 3.500 | 4.500 | 5.563 | 6.625 |
| B THICKNESS | .068 | .088 | .091 | .109 | .113 | .133 | .140 | .145 | .154 | .203 | .216 | .237 | .258 | .280 |
| L LENGTH ±1/16 | DASH NUMBERS | | | | | | | | | | | | | |
| 3/4 | *1 | | | | | | | | | | | | | |
| 7/8 | | *25 | | | | | | | | | | | | |
| 1 | | | *49 | | | | | | | | | | | |
| 1-1/8 | | | | *73 | | | | | | | | | | |
| 1-3/8 | | | | | *97 | | | | | | | | | |
| 1-1/2 | ▲6 | ▲29 | ▲52 | ▲75 | | *121 | | | | | | | | |
| 1-5/8 | | | | | | | *145 | | | | | | | |
| 1-3/4 | | | | | | | | *169 | | | | | | |
| 2 | 9 | 32 | 55 | 78 | ▲101 | ▲124 | | | *193 | | | | | |
| 2-1/2 | 10 | 33 | 56 | 79 | 102 | 125 | ▲148 | ▲171 | ▲194 | *217 | | | | |
| 3 | 11 | 34 | 57 | 80 | 103 | 126 | 149 | 172 | 195 | ▲218 | ▲241 | | | |
| 3-1/2 | 12 | 35 | 58 | 81 | 104 | 127 | 150 | 173 | 196 | 219 | 242 | | | |
| 4 | 13 | 36 | 59 | 82 | 105 | 128 | 151 | 174 | 197 | 220 | 243 | | | |
| 4-1/2 | 14 | 37 | 60 | 83 | 106 | 129 | 152 | 175 | 198 | 221 | 244 | | ▲290 | ▲313 |
| 5 | 15 | 38 | 61 | 84 | 107 | 130 | 153 | 176 | 199 | 222 | 245 | | | |
| 5-1/2 | 16 | 39 | 62 | 85 | 108 | 131 | 154 | 177 | 200 | 223 | 246 | | | |
| 6 | 17 | 40 | 63 | 86 | 109 | 132 | 155 | 178 | 201 | 224 | 247 | 270 | | 316 |
| 7 | 18 | 41 | 64 | 87 | 110 | 133 | 156 | 179 | 202 | 225 | 248 | | | |
| 8 | 19 | 42 | 65 | 88 | 111 | 134 | 157 | 180 | 203 | 226 | 249 | | | |
| 9 | 20 | 43 | 66 | 89 | 112 | 135 | 158 | 181 | 204 | 227 | 250 | | | |
| 10 | 21 | 44 | 67 | 90 | 113 | 136 | 159 | 182 | 205 | 228 | 251 | | | |
| 11 | 22 | 45 | 68 | 91 | 114 | 137 | 160 | 183 | 206 | 229 | 252 | | | |
| 12 | 23 | 46 | 69 | 92 | 115 | 138 | 161 | 184 | 207 | 230 | 253 | | | |

NOTES:

1. MATERIAL: Steel shall be in accordance with procurement specification.
2. PROTECTIVE COATING: Black or zinc coating in accordance with procurement specification.
3. THREADS: Nipples shall be threaded with American Standard Taper Pipe Threads (NPT) in accordance with Screw-Thread Standard for Federal Services, FED-STD-H28. ©
4. DIMENSIONS: All dimensions are in inches unless otherwise specified.
5. PART NUMBER: The MS part number consists of the MS number plus the dash number.
   A. For nipples, zinc coated, use the MS number plus the dash number.
      Example: MS51953-1
   B. For nipples, black coated, add (B) to the dash number.
      Example: MS51953-1B
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Reference documents shall be of the issue in effect on date of invitations for bid.
8. * These nipples are close type. } All others are long type.
9. ▲ These nipples are short type. }
10. For nipple, pipe, extra strong, steel see MS51873.

© Denotes changes

APPROVED 9 OCT 63 REVISED (A) 23 MAR 71 (B) 12 DEC 72 © 6 Dec 82

User Activities: Army - AT, CL, ME, MI Navy - MC

Review Activities: Army - AV Air Force - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

| P.A. AR<br>Other Cust 11 | TITLE<br>NIPPLE, PIPE, STANDARD, STEEL | MILITARY STANDARD<br>MS51953 |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>© ASTM A 733 | SUPERSEDES:<br>CPNX1, CPNX1.1 | SHEET 1 OF 1 |

DD FORM 672-1 (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:142
Check the source to verify that this is the current version before use.

4730-0458