7355 4

# MS9895

FED. SUP CLASS
5306

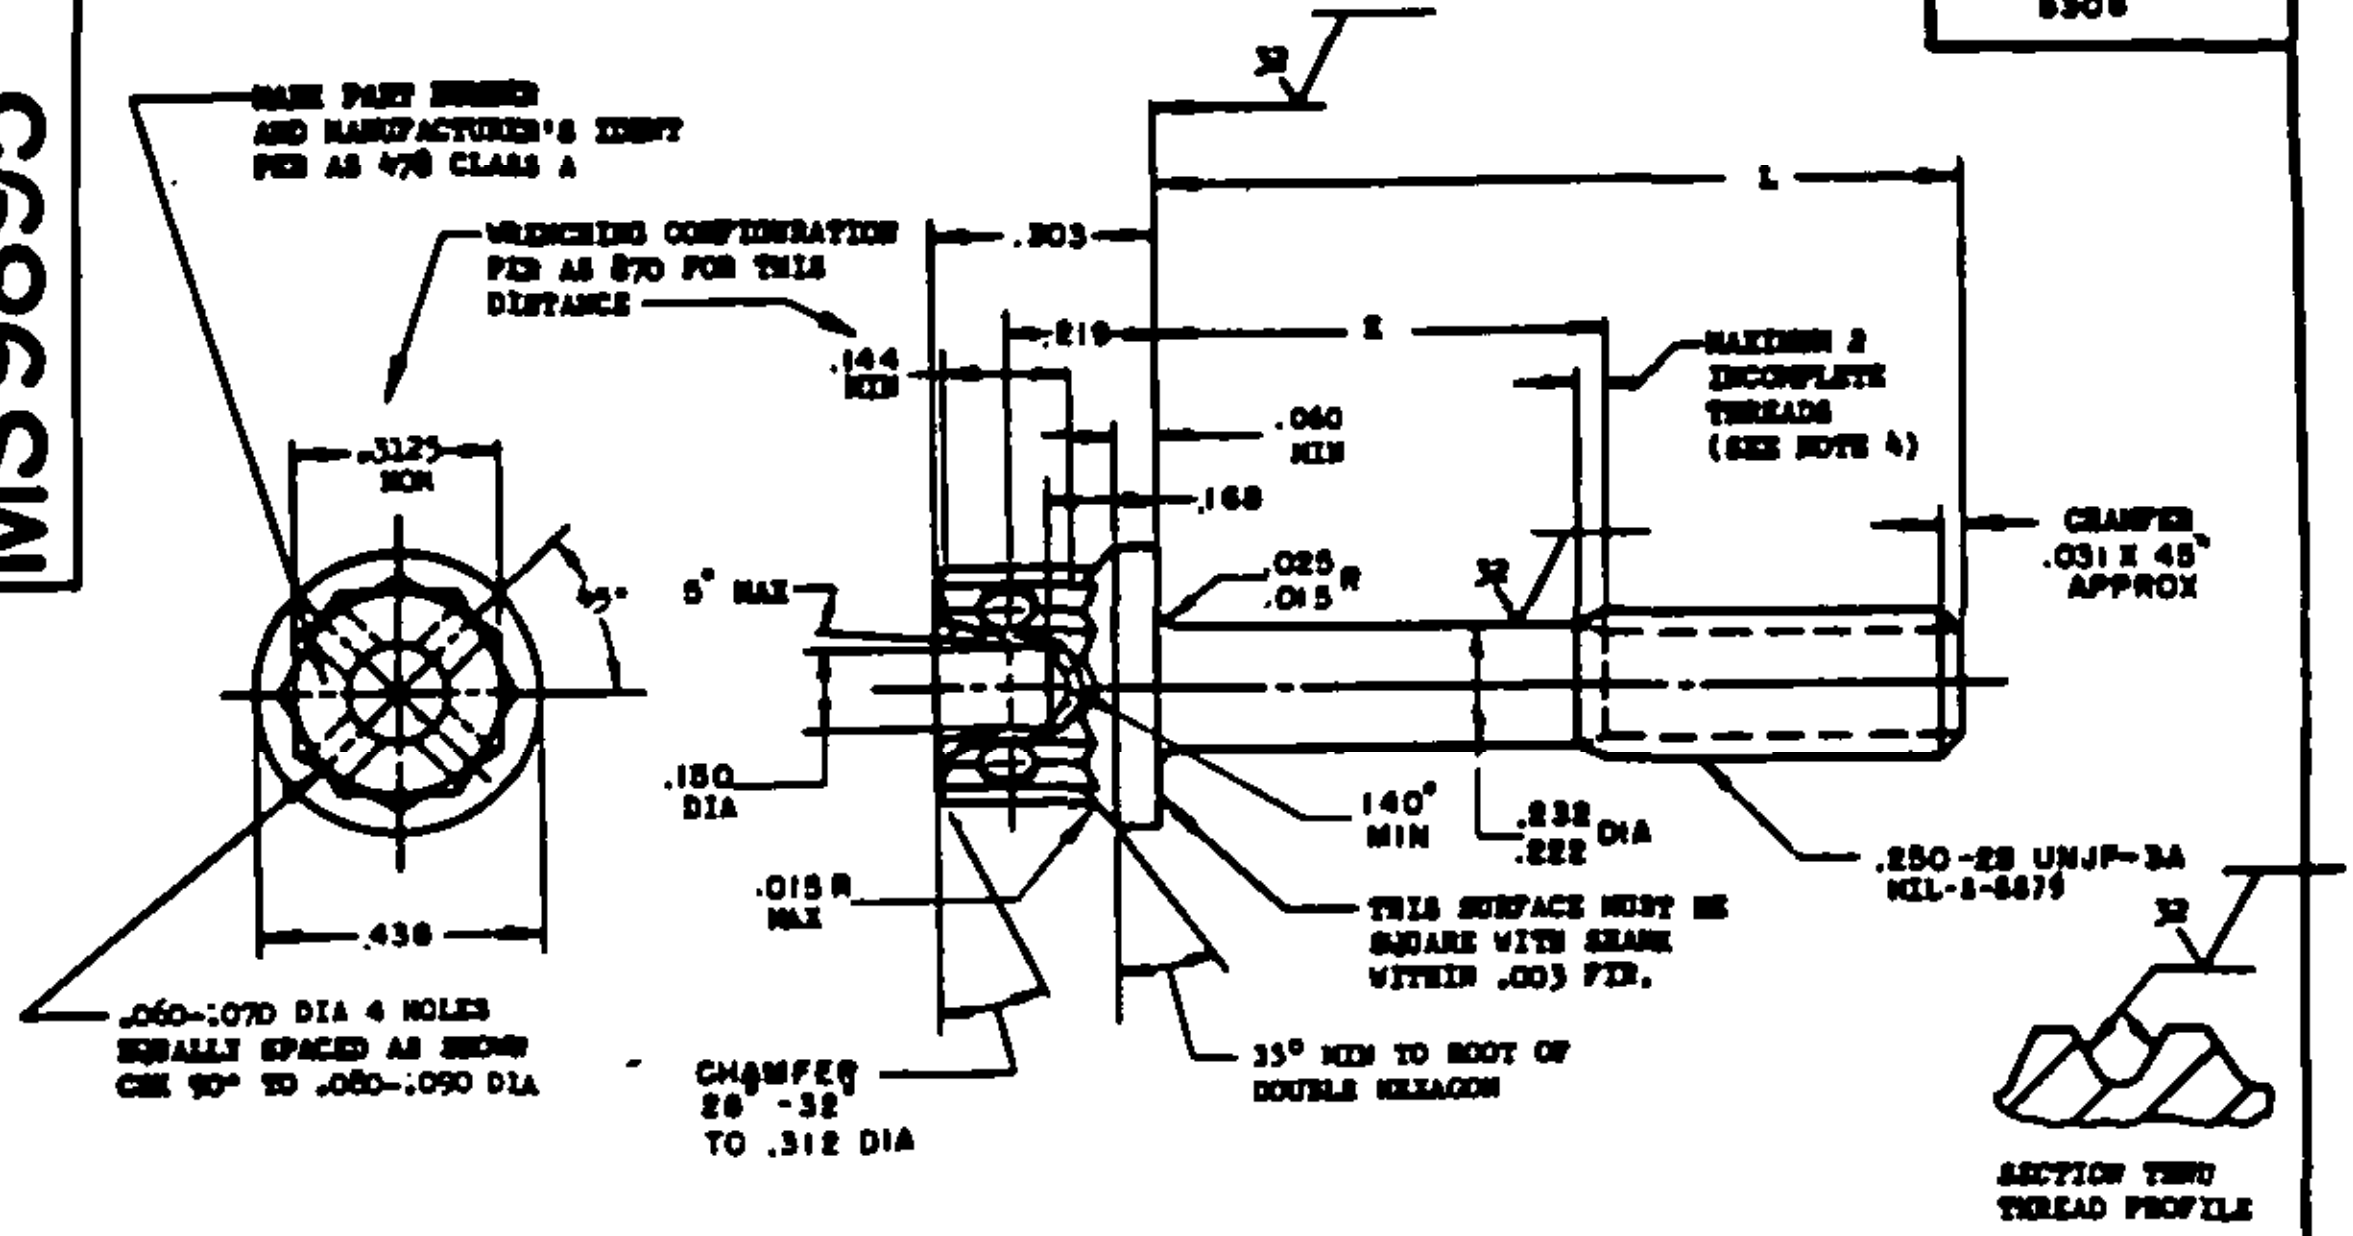
MARK PART NUMBER AND MANUFACTURER'S IDENT PER AS 478 CLASS A
WRENCHING CONFIGURATION PER AS 870 FOR THIS DISTANCE
.3125 NOM
45°
.438
.060-.070 DIA 4 HOLES EQUALLY SPACED AS SHOWN CSK 90° TO .080-.090 DIA
.303
.144 MIN
.219
K
L
32
.060 MIN
.168
.025 .015 R
5° MAX
.180 DIA
.015 R MAX
CHAMFER 28° -32° TO .312 DIA
140° MIN
.232 .222 DIA
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FIR.
35° MIN TO ROOT OF DOUBLE HEXAGON
MAXIMUM 2 INCOMPLETE THREADS (SEE NOTE 4)
CHAMFER .031 X 45° APPROX
.250-28 UNJF-3A MIL-S-8879
SECTION THRU THREAD PROFILE

| PART NO. | L | K | APPROX WEIGHT LB/100 |
|---|---|---|---|
| MS9895-04 | .375 | .079- .099 | 1.26 |
| MS9895-05 | .438 | .079- .099 | 1.33 |
| MS9895-06 | .500 | .079- .099 | 1.41 |
| MS9895-07 | .562 | .079- .099 | 1.49 |
| MS9895-08 | .625 | .079- .099 | 1.56 |
| MS9895-09 | .688 | .079- .099 | 1.63 |
| MS9895-10 | .750 | .079- .099 | 1.70 |
| MS9895-11 | .812 | .079- .099 | 1.77 |
| MS9895-12 | .875 | .079- .125 | 1.84 |
| MS9895-13 | .938 | .128- .188 | 1.91 |
| MS9895-14 | 1.000 | .190- .250 | 1.98 |
| MS9895-15 | 1.062 | .252- .312 | 2.05 |
| MS9895-16 | 1.125 | .315- .375 | 2.12 |
| MS9895-17 | 1.188 | .378- .438 | 2.19 |
| MS9895-18 | 1.250 | .440- .500 | 2.27 |
| MS9895-19 | 1.312 | .502- .562 | 2.33 |
| MS9895-20 | 1.375 | .565- .625 | 2.41 |
| MS9895-21 | 1.438 | .628- .688 | 2.49 |
| MS9895-22 | 1.500 | .690- .750 | 2.56 |
| MS9895-23 | 1.562 | .752- .812 | 2.63 |

| PART NO. | L | K | APPROX WEIGHT LB/100 |
|---|---|---|---|
| MS9895-24 | 1.625 | .815- .875 | 2.70 |
| MS9895-25 | 1.688 | .878- .938 | 2.77 |
| MS9895-26 | 1.750 | .940-1.000 | 2.84 |
| MS9895-27 | 1.812 | 1.002-1.062 | 2.91 |
| MS9895-28 | 1.875 | 1.065-1.125 | 2.98 |
| MS9895-29 | 1.938 | 1.128-1.188 | 3.05 |
| MS9895-30 | 2.000 | 1.190-1.250 | 3.12 |
| MS9895-31 | 2.125 | 1.315-1.375 | 3.27 |
| MS9895-32 | 2.250 | 1.440-1.500 | 3.41 |
| MS9895-33 | 2.375 | 1.565-1.625 | 3.56 |
| MS9895-34 | 2.500 | 1.690-1.750 | 3.70 |
| MS9895-35 | 2.625 | 1.815-1.875 | 3.85 |
| MS9895-36 | 2.750 | 1.940-2.000 | 3.98 |
| MS9895-37 | 2.875 | 2.065-2.125 | 4.14 |
| MS9895-38 | 3.000 | 2.190-2.250 | 4.28 |
| MS9895-39 | 3.125 | 2.315-2.375 | 4.42 |
| MS9895-40 | 3.250 | 2.440-2.500 | 4.56 |
| MS9895-41 | 3.375 | 2.565-2.625 | 4.71 |
| MS9895-42 | 3.500 | 2.690-2.750 | 4.84 |
| MS9895-43 | 3.625 | 2.815-2.875 | 4.98 |

| PART NO. | L | K | APPROX WEIGHT LB/100 |
|---|---|---|---|
| MS9895-44 | 3.750 | 2.940-3.000 | 5.13 |
| MS9895-45 | 3.875 | 3.065-3.125 | 5.28 |
| MS9895-46 | 4.000 | 3.190-3.250 | 5.42 |
| MS9895-47 | 4.125 | 3.315-3.375 | 5.55 |
| MS9895-48 | 4.250 | 3.440-3.500 | 5.70 |
| MS9895-49 | 4.375 | 3.565-3.625 | 5.85 |
| MS9895-50 | 4.500 | 3.690-3.750 | 6.00 |
| MS9895-51 | 4.625 | 3.815-3.875 | 6.13 |
| MS9895-52 | 4.750 | 3.940-4.000 | 6.28 |
| MS9895-53 | 4.875 | 4.065-4.125 | 6.43 |
| MS9895-54 | 5.000 | 4.190-4.250 | 6.57 |
| MS9895-55 | 5.125 | 4.315-4.375 | 6.71 |
| MS9895-56 | 5.250 | 4.440-4.500 | 6.86 |
| MS9895-57 | 5.375 | 4.565-4.625 | 7.00 |
| MS9895-58 | 5.500 | 4.690-4.750 | 7.13 |
| MS9895-59 | 5.625 | 4.815-4.875 | 7.28 |
| MS9895-60 | 5.750 | 4.940-5.000 | 7.43 |
| MS9895-61 | 5.875 | 5.065-5.125 | 7.57 |
| MS9895-62 | 6.000 | 5.190-5.250 | 7.72 |

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .007 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5616.
6. MANUFACTURING SPECIFICATION: AMS 7470 EXCEPT HEAD SHALL BE UPSET.
7. HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS.
8. HARDNESS: ROCKWELL C32-38.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
11. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 1°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 21 Apr 69 REVISED

T[illegible]ry standard is approved by the Department of the Air Force a[illegible]val Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activiti[illegible]
USA[illegible]2, 05

| | | |
|---|---|---|
| P.A. NAF - 11<br>Other Cust<br>Navy - AS | TITLE<br>BOLT, MACHINE-DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, AMS 5616, .250-28 UNJF-3A | MILITARY STANDARD<br>MS9895 |
| PROCUREMENT SPECIFICATION | SUPERSEDES | SHEET 1 OF 1 |

5306-F029

DD FORM 1 SEP 67 672-1 (Limited coordination)
AMB use only

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.