
AN03701 THRU AN03800

FED. SUP. CLASS. 5306

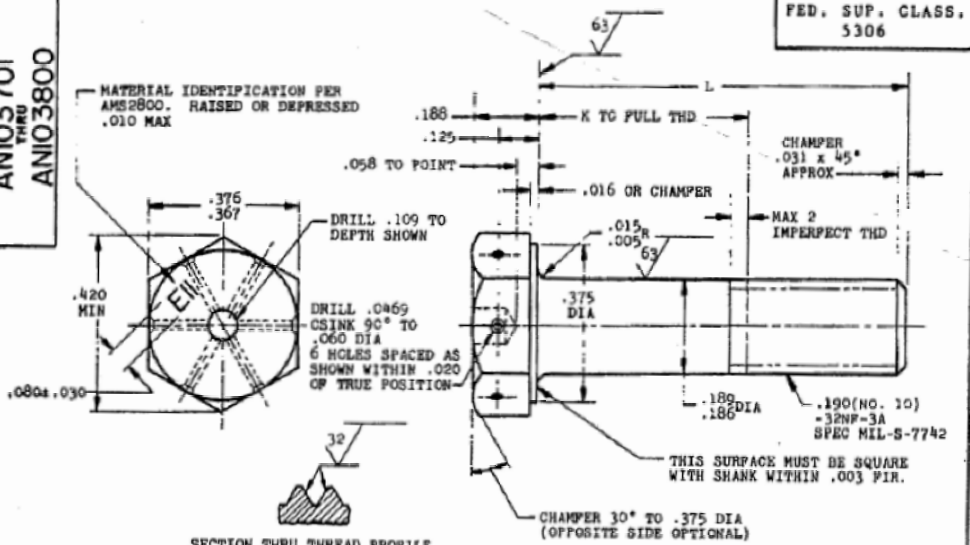

SECTION THRU THREAD PROFILE

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.188	.562	AN103719	2.625	2.000	AN103733			
.375	(a)	AN103706	1.250	.625	AN103720	2.750	2.125	AN103734			
.438	(a)	AN103707	1.312	.688	AN103721	2.875	2.250	AN103735			
.500	(a)	AN103708	1.375	.750	AN103722	3.000	2.375	AN103736			
.562	(a)	AN103709	1.438	.812	AN103723	3.125	2.500	AN103737			
.625	(a)	AN103710	1.500	.875	AN103724	3.250	2.625	AN103738			
.688	(a)	AN103711	1.625	1.000	AN103725	3.375	2.750	AN103739			
.750	.125	AN103712	1.750	1.125	AN103726	3.500	2.875	AN103740			
.812	.188	AN103713	1.875	1.250	AN103727	3.625	3.000	AN103741			
.875	.250	AN103714	2.000	1.375	AN103728	3.750	3.125	AN103742			
.938	.312	AN103715	2.125	1.500	AN103729	3.875	3.250	AN103743			
1.000	.375	AN103716	2.250	1.625	AN103730						
1.062	.438	AN103717	2.375	1.750	AN103731						
1.125	.500	AN103718	2.500	1.875	AN103732						

(a) THREAD TO HEAD. MAXIMUM TWO INPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .004 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .011 FIR.

MATERIAL: STEEL AMS6322

HARDNESS: ROCKWELL C26 - 32

FINISH: CADMIUM PLATE AMS2400

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATIONS: AMS7432

(3) INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. INLESS OTHERWISE SPECIFIED: TOLERENCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969 NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY BY THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

AMENDED 8 JUNE 69 (3) 30 June 66 (2) 3 May 66 (1) 31 Aug 65

P.A. AF-11 CUST. NAVY-AS ARMY-AV	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN03701 THRU AN03800
	BOLT - DRILLED HEX HEAD, 6 HOLES, .190-32	

Source: https://assist.dla.mil - Downloaded: 2026
Check the source to verify that this is the current version