INCH-POUND
MIL-DTL-2726/14C
20 February 2007
SUPERSEDING
MIL-R-2726/14B(SH)
3 July 1986

DETAIL SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, ENCLOSED, 3 - PIN GROUNDED, 40 - AMPERE, 450-VOLT, ALTERNATING CURRENT (SYMBOL NOS. 1145.1, 1145.2 AND 1145.3)

Reinstatement after 8 June 2005 and may be used for acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL- DTL-2726.

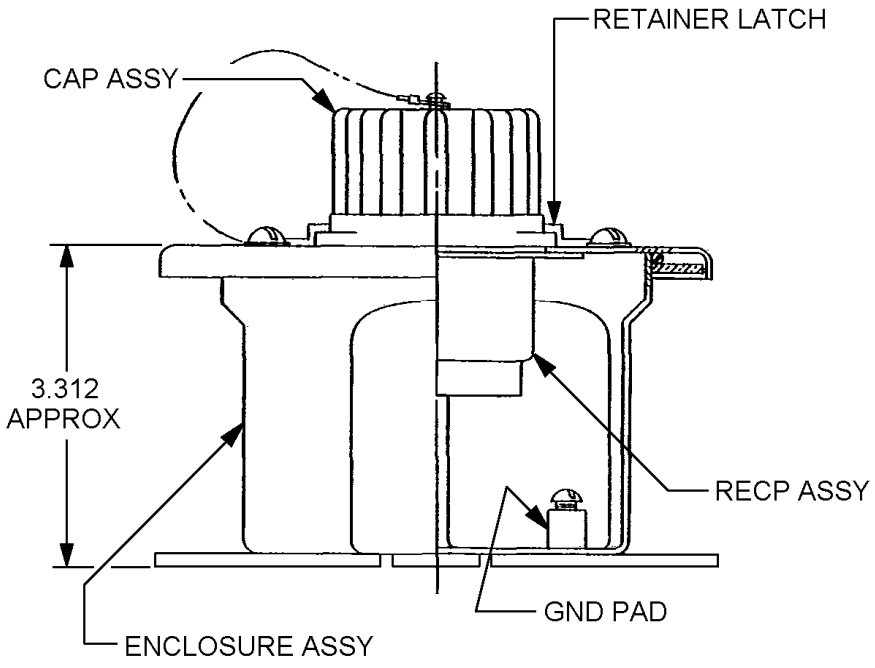
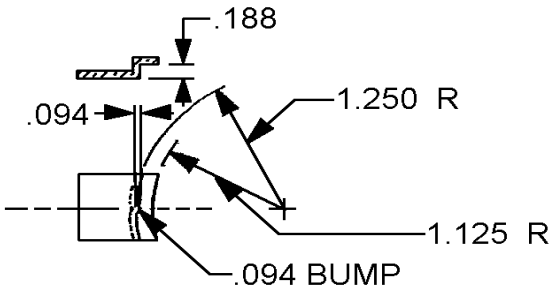


FIGURE 1. Receptacle (symbol 1145.1).

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:22Z
Check the source to verify that this is the current version before use.




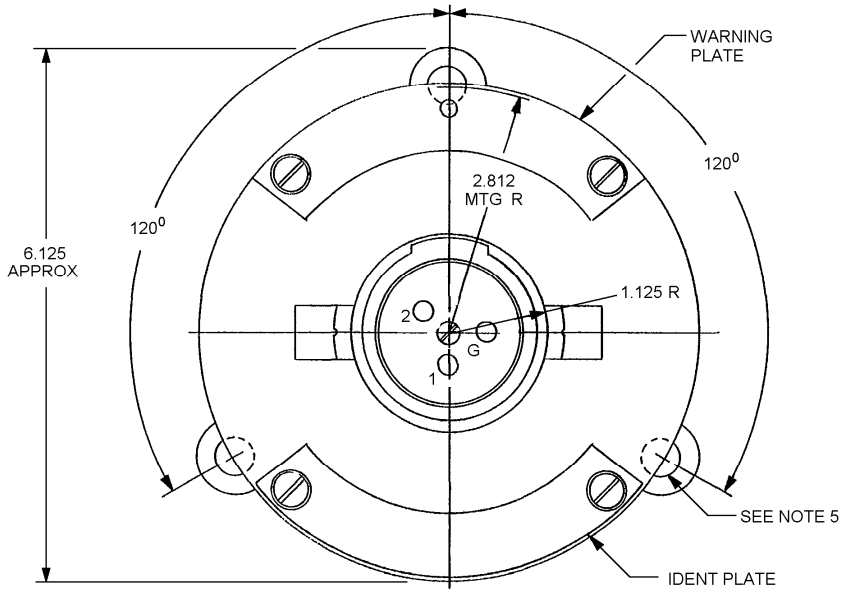


FIGURE 1. Receptacle (symbol 1145.1) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:22Z
Check the source to verify that this is the current version before use.

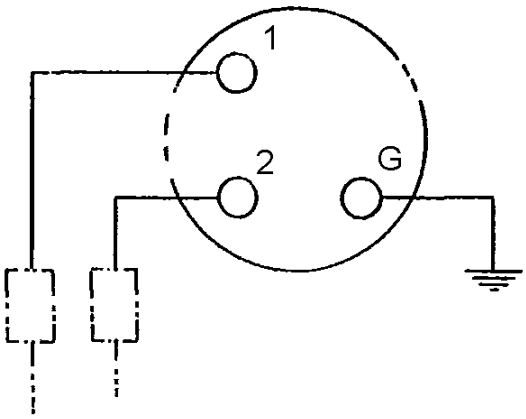


WIRING DIAGRAM

Inches	mm
.094	2.39
.188	4.77
.38	9.6
1.125	28.57
1.250	31.75
2.938	74.62
3.312	84.12
6.125	155.57

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± .5° on angles.
4. Supersedes: Drawing 815-1197213, symbol 1145.
5. Mounting bolts .38-16 HEX HD.

FIGURE 1. Receptacle (symbol 1145.1) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:22Z
Check the source to verify that this is the current version before use.

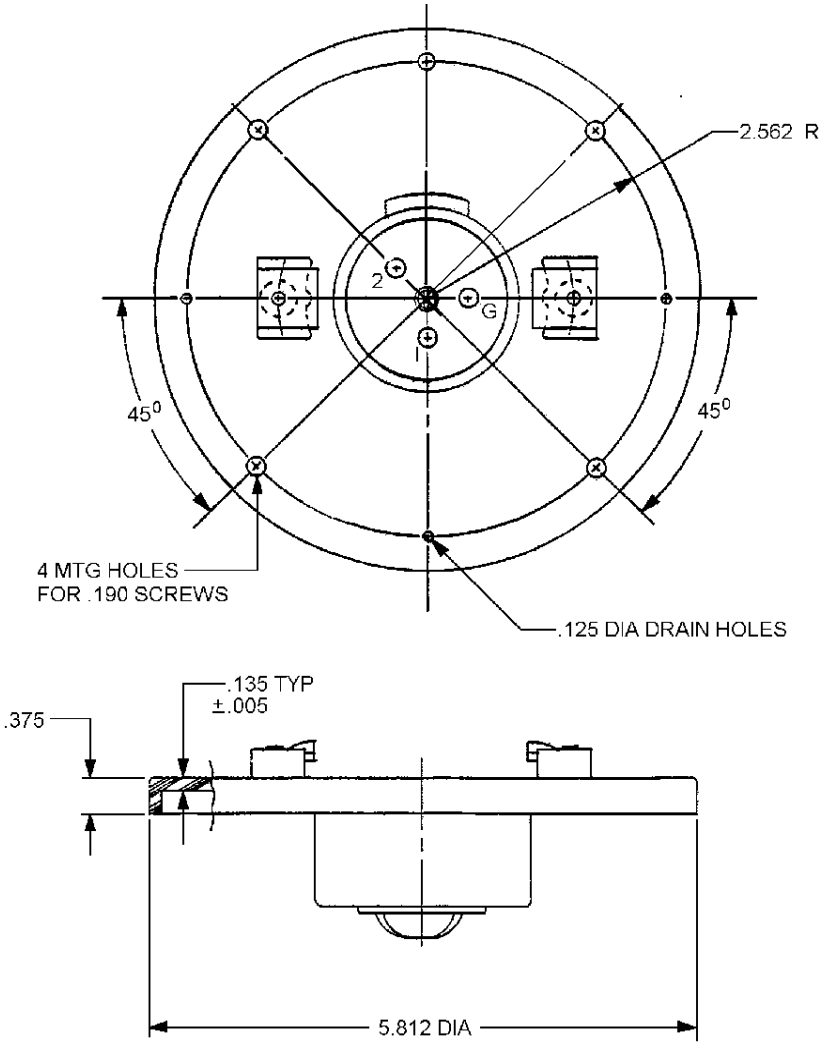

Inches	mm
.125	3.17
.135	3.43
.190	4.83
.357	9.52
2.562	65.07
5.812	147.62

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± .5° degree on angles.
4. Molded plastic receptacle (SAME AS FIGURE 1 EXCEPT AS SHOWN).

FIGURE 2. Cover and receptacle integral (plastic).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figures 1 and 2.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108.

Enclosure assembly: See table I.

Receptacle unit: See table I.

Cap assembly: MIL-DTL-2726/13, Part or Identifying Number (PIN): M2726/13-001.

Material: For symbol number 1145.3, box and cover with receptacle unit, integral, shall be of molded plastic in accordance with ASTM-D5948 type MAI-60.

Mating plug: MIL-DTL-2726/5, PIN M2726/5-001 (not furnished).

Electrical rating: 40 ampere, 450 volt, alternating current, 60-hertz.

PIN: See table I.

TABLE I. Assembly parts,

PIN	Symbol number	Box	Cover	Receptacle unit
M2726/14-001	1145.1	M24142/5 (metal)	M24142/5-002 (metal)	M2726/11-001 (metal housing)
M2726/14-002	1145.2	M24142/5-002 (metal)	M24142/5-002 (metal)	M2726/11-002 (plastic)
M2726/14-003	1145.3	Molded plastic (see requirement 6)	(see requirement 6)	M2726/11-002 (integral with cover)
M2726/14-004	———	———		See figure 2

VERIFICATION

Verification shall be as specified in MIL-DTL-2726 and table II herein. The first article and quality conformance inspections shall consist of the inspections as specified in table II, in the order shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:22Z
Check the source to verify that this is the current version before use.

TABLE II. First article and quality conformance inspection.

Inspection	First article	Quality conformance
Examination	X	X
Vibration	X	
Shock	X	
Salt spray	X	
Effectiveness of enclosure	X	X

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

ASTM-D5948
MIL-DTL-2726/5
MIL-DTL-2726/13
MIL-STD-108

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-2007-054)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:22Z
Check the source to verify that this is the current version before use.