INCH-POUND
MIL-DTL-2726/15C
01 September 2006
SUPERSEDING
MIL-R-2726/15B(SH)
3 July 1986

DETAIL SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, ENCLOSED, 3 - PIN GROUNDED, 50 - AMPERE, 250-VOLT, DIRECT CURRENT (SYMBOL NOS. 1146.1, 1146.2 AND 1146.3)

Inactive for new design after 28 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL- DTL-2726.

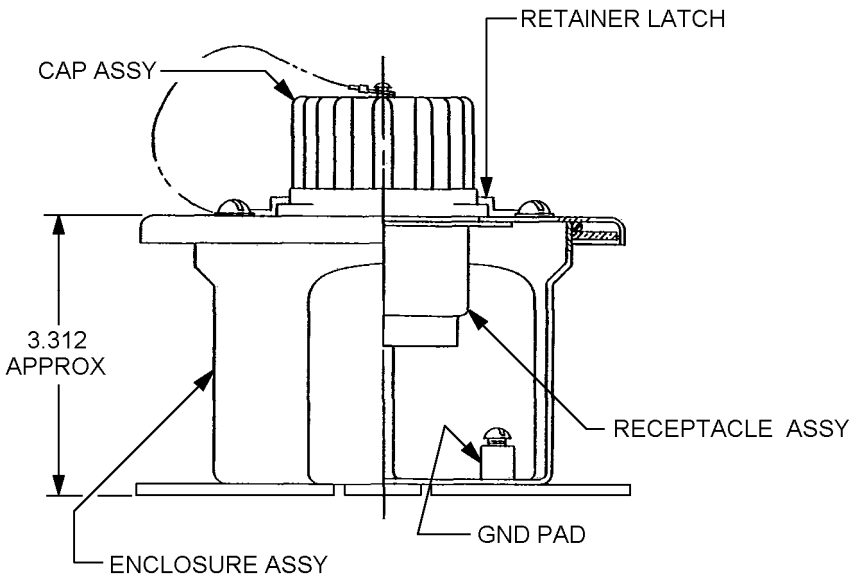
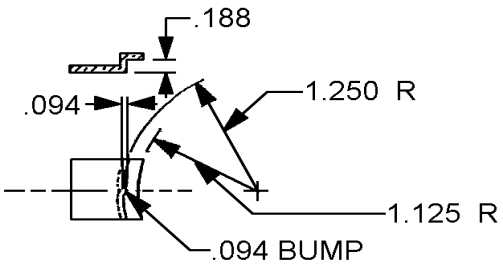


FIGURE 1. Receptacle (symbol 1146.1 shown).

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:23Z
Check the source to verify that this is the current version before use.




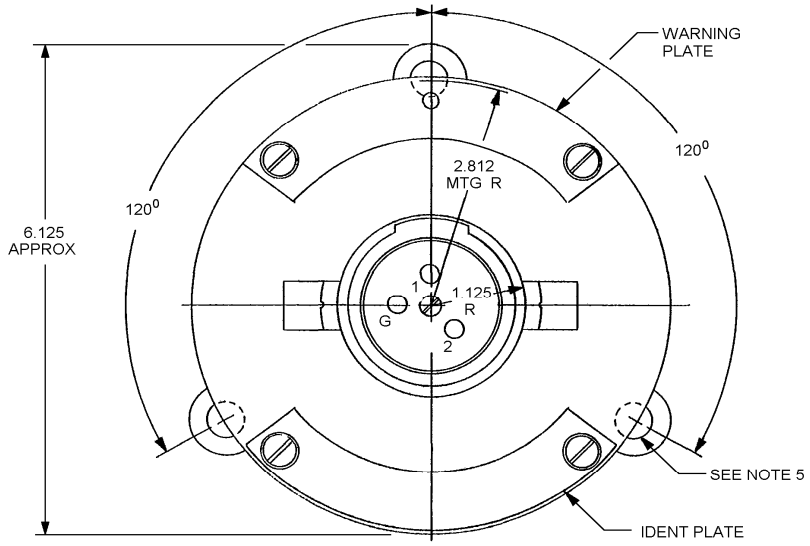


FIGURE 1. Receptacle (symbol 1146.1 shown) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:23Z
Check the source to verify that this is the current version before use.

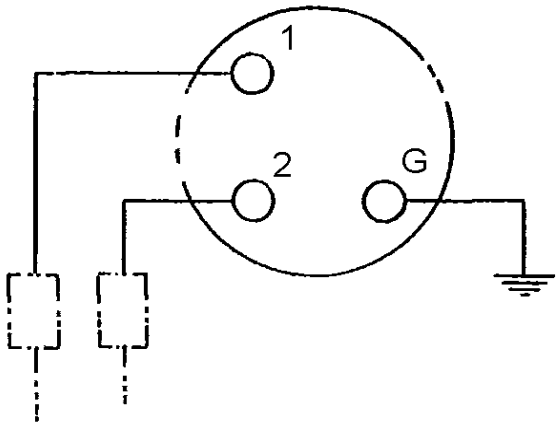


WIRING DIAGRAM

Inches	mm
.094	2.39
.188	4.77
.38	9.6
1.125	28.57
1.250	31.75
2.938	74.62
3.312	84.12
6.125	155.57

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± .5° on angles.
4. Supersedes: Drawing 815-1197312, symbol 1146.
5. Mounting bolts: .38 - 16 HEX HD.

FIGURE 1. Receptacle (symbol 1146.1 shown) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:23Z
Check the source to verify that this is the current version before use.

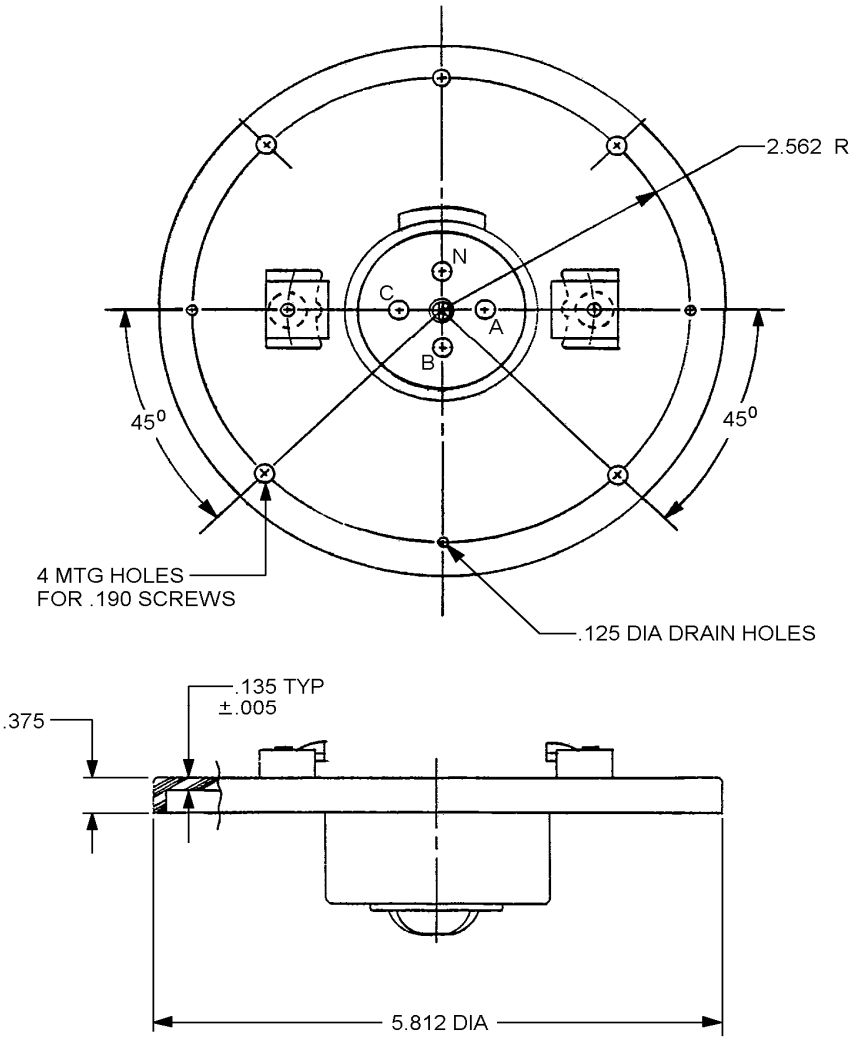

Inches	mm
.125	3.17
.135	3.43
.190	4.83
.357	9.52
2.562	65.07
5.812	147.62

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± .5° degree on angles.

FIGURE 2. Cover and receptacle integral (plastic).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figures 1 and 2.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108.

Enclosure assembly: See table I.

Receptacle unit: See table l.

Material: For symbol number 1146.3, box and cover with receptacle unit, integral, shall be of molded plastic in accordance with ASTM-D5948 type MAI-60.

Cap assembly: MIL-DTL-2726/13, Part or Identifying Number (PIN): M2726/13 - 001.

Mating plug: MIL-DTL-2726/2, PIN M2726/2 - 001.

Electrical rating: 50 ampere, 250 volt, direct current.

PIN: See table I.

TABLE I. Assembly parts.

PIN	Symbol number	Box	Cover	Receptacle unit
M2726/15-001	1146.1	M24142/5-002 (metal)	M24142/5-0O2 (metal)	M2726/8-001 (metal housing)
M2726/15-002	1146.2	M24142/5-002 (metal)	M24142/5-002 (metal)	M2726/8-002 (plastic)
M2726/15-003	1146.3	Molded plastic (see ASTM-D5948, MAI-60)	(see ASTM-D5948, MAI-60)	M2726/18-002 (integral with cover)
M2726/15-004	———	———	———	See figure 2

Verification

Verification shall be as specified in MIL-DTL-2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table II, in the order shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:23Z
Check the source to verify that this is the current version before use.

TABLE II. First article and quality conformance inspection.

Inspection	First article	Conformance
Examination	X	X
Vibration	X	
Shock	X	
Salt spray	X	
Effectiveness of enclosure	X	X

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

ASTM-D5948
MIL-DTL-2726/2
MIL-DTL-2726/13
MIL-STD-108

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-4617-012)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:23Z
Check the source to verify that this is the current version before use.