INCH-POUND
MIL-DTL-2726/19D
w/AMENDMENT 1
05 June 2019
SUPERSEDING
MIL-DTL-2726/19D
22 April 2014

DETAIL SPECIFICATION SHEET

RECEPTACLE WITH SWITCH, ELECTRICAL, 30 - AMPERE, 450 - VOLT, ALTERNATING CURRENT, 60-HERTZ, 3 - PHASE, INTERLOCKING, GROUND (SYMBOL NO. 915.1)

Reactivated after 27 November 2002 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-2726.


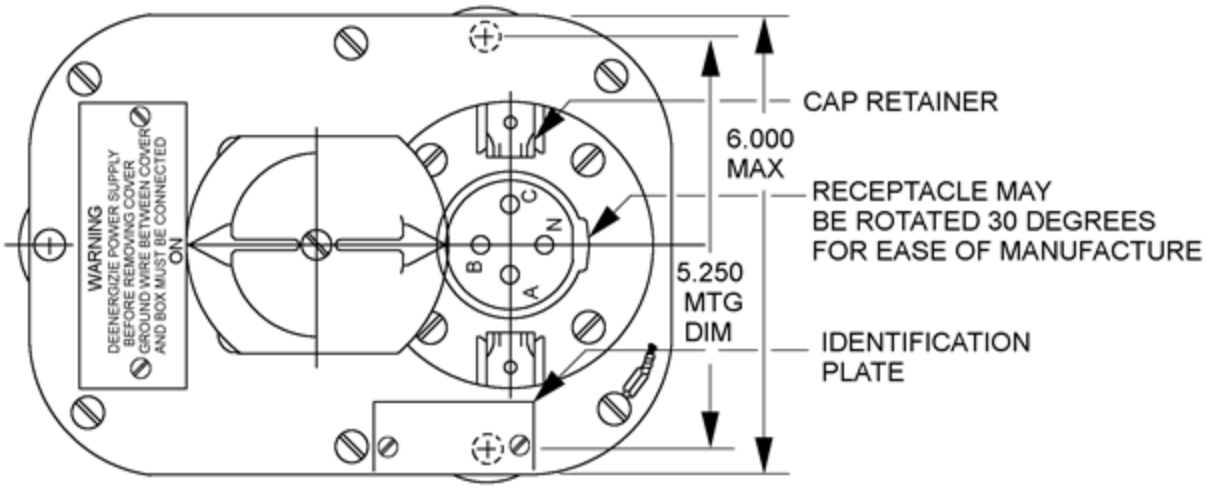


FIGURE 1. Dimensions and configurations.


AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.

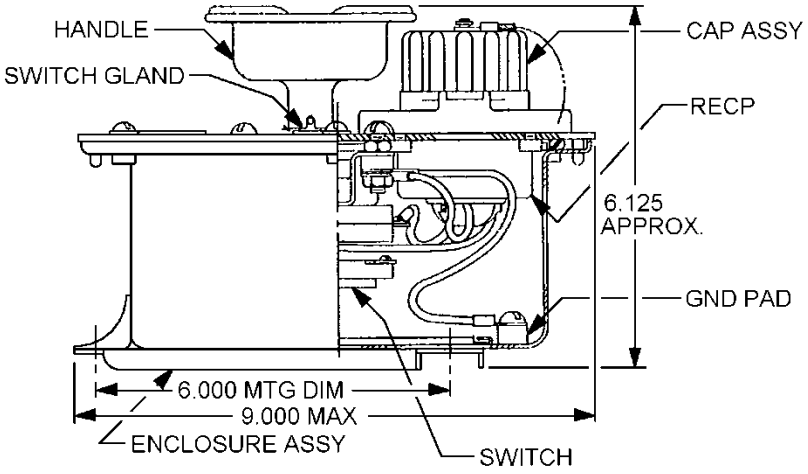

Inches	mm
5.250	133.35
6.000	152.40
6.125	155.57
9.000	228.60

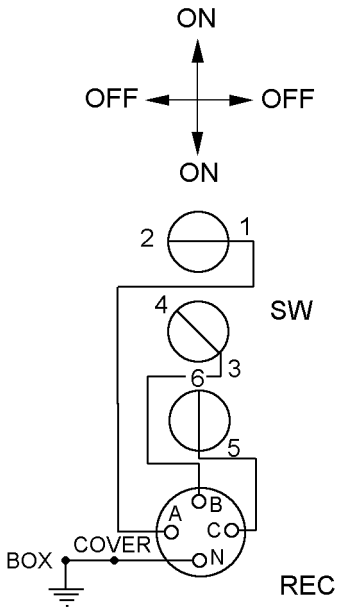

WIRING DIAGRAM SYSM 915.1

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± .5° on angles.
3. Supersedes: Drawing 815-1197066, symbol 915.
4. Switch may be base mounted as an option.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108.

Receptacle: MIL-DTL-2726/9, Part or Identifying Number (PIN): M2726/9-001 or PIN M2726/9-002.

Cap assembly: MIL-DTL-2726/13, PIN M2726/13-001.

Cap and plug retainer: Equivalent retainer latch in accordance with MIL-DTL-2726/16 (May be modified as required, provided the function is not impaired).

Switch: Rotary, type 3SR3A4 in accordance with MIL-DTL-15291/7, PIN M15291/7-005.

Design: Switch and receptacle interlock required.

Mating plug: MIL-DTL-2726/3, PIN M2726/3-001 (not furnished).

Intended use: Watertight applications.

Enclosure assembly: In accordance with MIL-E-24142/4, PIN M24142/4-001.

Switch gland: Metal.

Electrical rating: 30 ampere, 450 volt, alternating current, 60 hertz.

Handle: The handle shall be of nonconducting material and designed to turn the switch on and off and also to serve as an interlock to prevent removal or insertion of the plug and cap while the switch is in the “ON” position.

PIN: M2726/19-001.

Internal wiring shall be furnished.

VERIFICATION

Quality assurance shall be as specified in MIL-DTL-2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table I, in the order shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.

TABLE I. First article and conformance inspection.

Inspection	First article	Quality conformance
Examination	X	X
Insulation resistance	X	X
Dielectric withstanding voltage	X	X
Operation	X	X
Vibration	X	
Shock	X	
Salt spray	X	
Effectiveness of enclosure	X	X
Dielectric withstanding voltage	X	

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

MIL-DTL-15291/7
MIL-DTL-2726/3
MIL-DTL-2726/9
MIL-DTL-2726/13
MIL-DTL-2726/16
MIL-E-24142/4
MIL-STD-108

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-2019-065)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.