INCH - POUND

MIL-DTL-2726/19E
18 November 2019
SUPERSEDING
MIL-DTL-2726/19D
W/Amendment 1
05 June 2019

DETAIL SPECIFICATION SHEET

RECEPTACLE WITH SWITCH, ELECTRICAL, 30 - AMPERE, 450 - VOLT, ALTERNATING CURRENT, 60-HERTZ, 3 - PHASE, INTERLOCKING, GROUND (SYMBOL NO. 915.1)

Reactivated after 27 November 2002 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-2726.



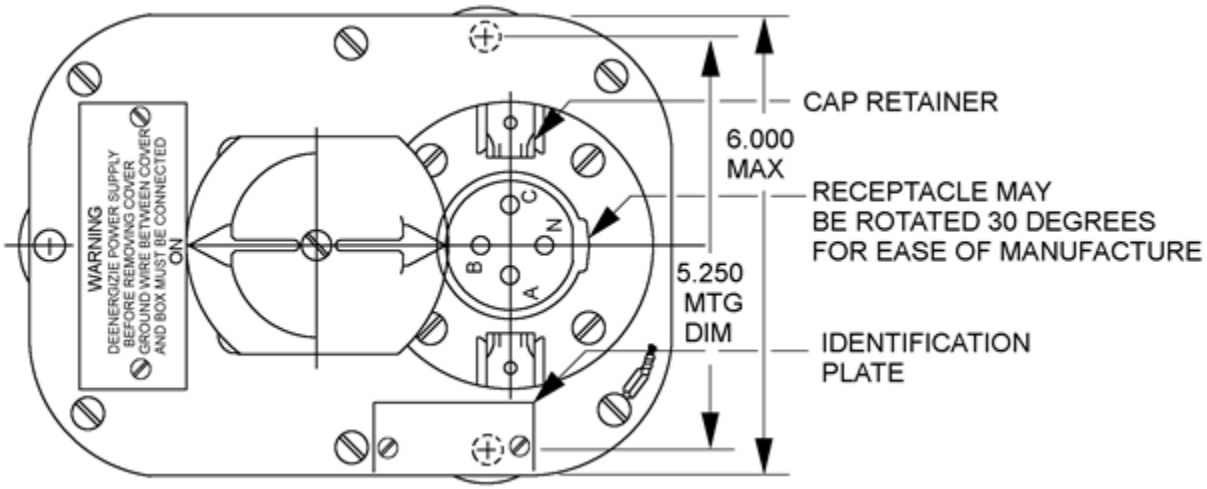


FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.

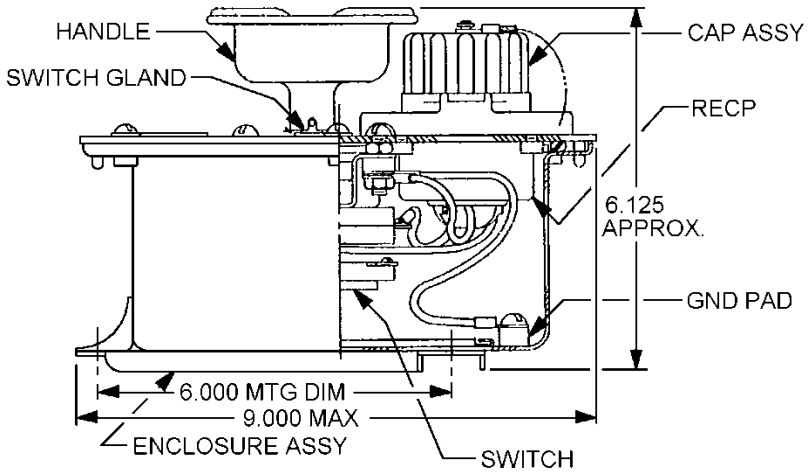

Inches	mm
5.250	133.35
6.000	152.40
6.125	155.57
9.000	228.60

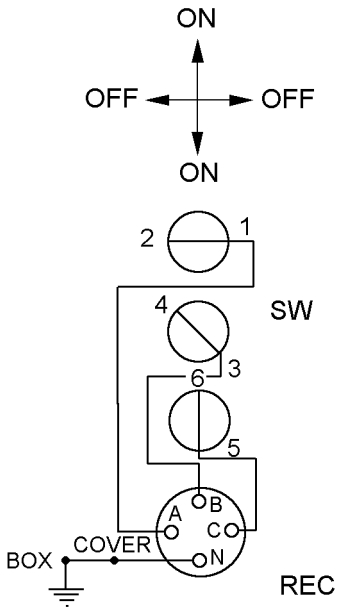

WIRING DIAGRAM SYSM 915.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± .5° on angles.
4. Tolerances are ± .031 on dimensions that are controlled by welding. Welds shall not interfere with the interchangeability of assemblies or parts.
5. Supersedes: Drawing 815-1197066, symbol 915.
6. Switch may be base mounted as an option.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108.

Receptacle: MIL-DTL-2726/9, Part or Identifying Number (PIN): M2726/9-001 or PIN M2726/9-002.

Cap assembly: MIL-DTL-2726/13, PIN M2726/13-001.

Cap and plug retainer: Equivalent retainer latch in accordance with MIL-DTL-2726/16
(May be modified as required, provided the function is not impaired).

Switch: Rotary, base mounted, type 3SR3A4 in accordance with MIL-DTL-15291/7, PIN M15291/7-005, or,front mounted, type 3SR3A2 in accordance with MIL-DTL-15291/6, PIN M15291/6-003.

Design: Switch and receptacle interlock required.

Mating plug: MIL-DTL-2726/3, PIN M2726/3-001 (not furnished).

Intended use: Watertight applications.

Enclosure:
Box assembly: In accordance with MIL-E-24142/4, PIN M24142/4-001.
Box depth: Depth dimension shall be 3.5 ±.031 inches.

Cover assembly:
Material may be molded plastic type MAI-60 in accordance with ASTM-D5948, with a copper conductive coating applied to the inside surface a minimum of .002 inches thick.

The enclosure shall pass the inspections and tests as specified in the verification section and in table I.

Switch gland: Metal.

Electrical rating: 30 ampere, 450 volt, alternating current, 60 hertz.

Handle: The handle shall be of non-conducting material and designed to turn the switch on and off and also to serve as an interlock to prevent removal or insertion of the plug and cap while the switch is in the “ON” position.

PIN: M2726/19-001.

Internal wiring shall be furnished.

VERIFICATION

Requirements for first article and quality conformance, as shown below, shall be in accordance with MIL-DTL-2726. Examinations and tests shall be performed in the order shown (see table I).

Examination: Visual and dimensional examination shall meet the requirements for materials, design and construction, performance, marking and workmanship indicated in MIL-DTL-2726.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.

TABLE I. First article and conformance inspection.

Inspection	Requirement Paragraph	Test Paragraph	First article	Quality conformance
Examination	3.1, 3.3, 3.4, 3.3.6 and 3.7	4.5.1	X	X
Insulation resistance	3.5.1	4.6.1	X	X
Dielectric withstanding voltage	3.5.2	4.6.2	X	X
Operation	3.5.13	4.6.13	X	X
Vibration	3.5.9	4.6.9	X	
Shock	3.5.10	4.6.10	X	
Salt spray	3.5.11	4.6.11	X	
Effectiveness of enclosure	3.5.4	4.6.4	X	X
Insulation resistance	3.5.1	4.6.1	X	
Dielectric withstanding voltage	3.5.2	4.6.2	X	

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

MIL-DTL-15291/7
MIL-DTL-2726/3
MIL-DTL-2726/9
MIL-DTL-2726/13
MIL-DTL-2726/16
MIL-E-24142/4
MIL-STD-108
ASTM-D5948
MIL-DTL-15291/6

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-2019-119)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.