INCH-POUND
MIL-DTL-2726/20B
13 May 2005
SUPERSEDING
MIL-R-2726/20A(SH)
3 July 1986

DETAIL SPECIFICATION SHEET

# RECEPTACLE WITH SWITCH, ELECTRICAL, 30 - AMPERE, 450 - VOLT, 1 - PHASE, INTERLOCKING, GROUNDED (SYMBOL NO. 916.1)

Reactivated after 13 May 2005 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-2726.




SH 9098

FIGURE 1. Dimensions and configurations.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.

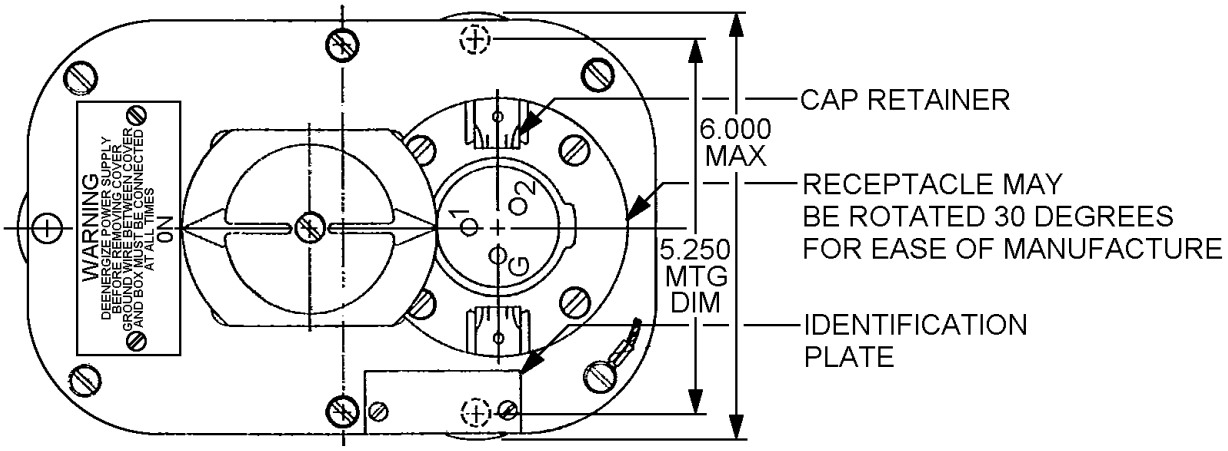


| Inches | mm |
|---|---|
| 5.250 | 133.35 |
| 6.000 | 152.40 |
| 6.125 | 155.57 |
| 9.000 | 228.60 |




WIRING DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm) and ± .5° on angles.
4. Supersedes: Drawing 815-1197066, symbol 916.
5. Switch may be base mounted as an option.

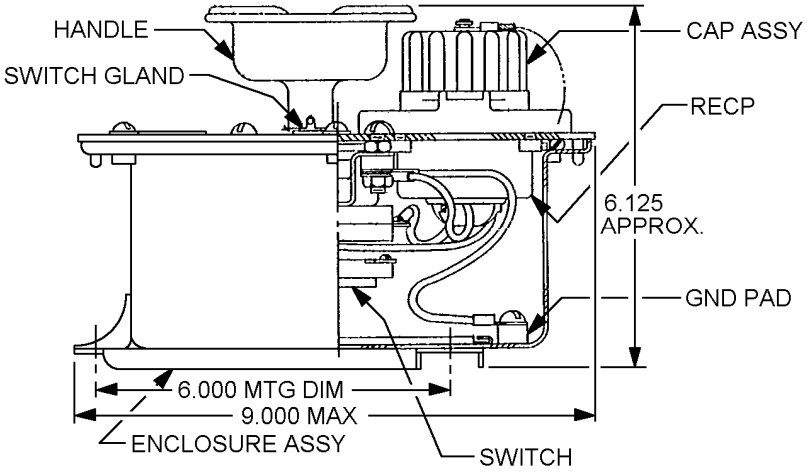FIGURE 1. Dimensions and configurations - Continued.

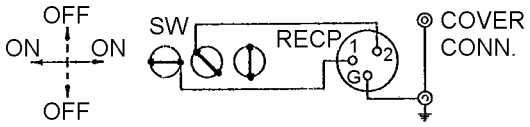

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Effectiveness of enclosure: Watertight in accordance with MIL-STD - 108.

Receptacle: MIL-DTL-2726/11, Part or Identifying Number (PIN): M2726/11 - 001 or PIN M2726/11 - 002.

Cap assembly: MIL-DTL-2726/13, PIN M2726/13 - 001.

Cap and plug retainer: Equivalent retainer latch of MIL-DTL-2726/15 (may be modified as required, provided the function is not impaired).

Switch: Rotary, type 3SR3A4 in accordance with MIL-S-15291/7, PIN M15291/7 - 005.

Design: Switch and receptacle interlock required.

Mating plug: MIL-DTL-2726/5, PIN M2726/5-001 (not furnished).

Enclosure assembly: In accordance with MIL-E-24142/4, PIN M24142/4-001.
Switch gland: Metal.

PIN: MS2726/20-001.

Electrical rating: 30 ampere, 450 volt, alternating current, 60 hertz.

Handle: The handle shall be of nonconducting material and designed to turn the switch and off and also to serve as an interlock to prevent removal or insertion of the plug and cap while the switch in the “ON position.

Intended use: Watertight applications.

Internal wiring shall be furnished.

QUALITY ASSURANCE

Quality assurance shall be as specified in MIL-DTL-2726 and table I herein. The first article and quality conformance inspections shall consist of the inspections as specified in table I, in the order shown.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.

TABLE I. First article and quality conformance inspection.

| Inspection | First article | Quality conformance |
|---|---|---|
| Examination | X | X |
| Insulation resistance | X | X |
| Dielectric withstanding voltage | X | X |
| Operation | X | X |
| Vibration | X | |
| Shock | X | |
| Salt spray | X | |
| Effectiveness of enclosure | X | X |
| Dielectric withstanding voltage | X | |

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

MIL-DTL-2726/5
MIL-DTL-2726/11
MIL-DTL-2726/13
MIL-E-24142/4
MIL-S-15291/7
MIL-STD-108

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-4617-015)

NOTES: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:24Z
Check the source to verify that this is the current version before use.