INCH-POUND
MIL DTL-2726/23B
01 September 2006
SUPERSEDING
MIL-R-2726/23A(SH)
3 July 1986

DETAIL SPECIFICATION SHEET

RECEPTACLE, ELECTRICAL, ENCLOSED, 100 - AMPERE, 250 - VOLT, DIRECT CURRENT, BULKHEAD MOUNTED (SYMBOL NO. 726.1)

Inactive for new design after 28 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL- 2726.


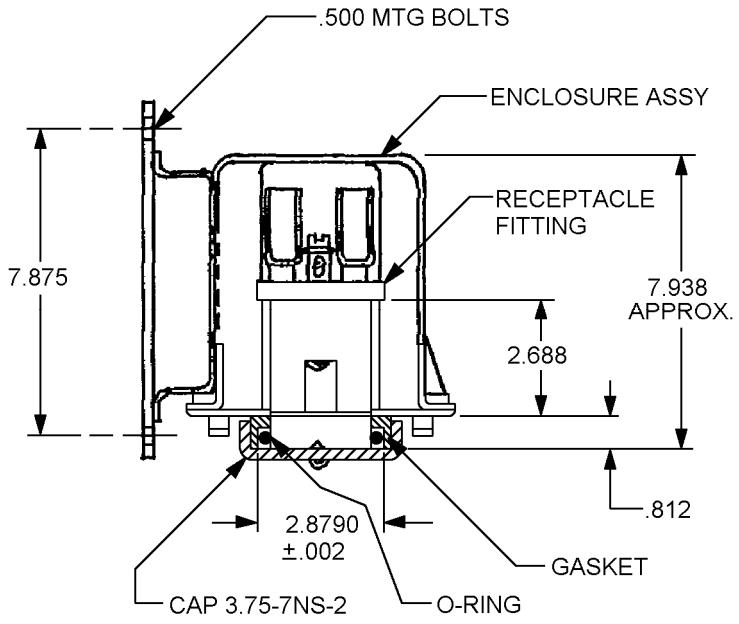


FIGURE 1. Receptacle enclosed.

AMSC N/A

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:25Z
Check the source to verify that this is the current version before use.

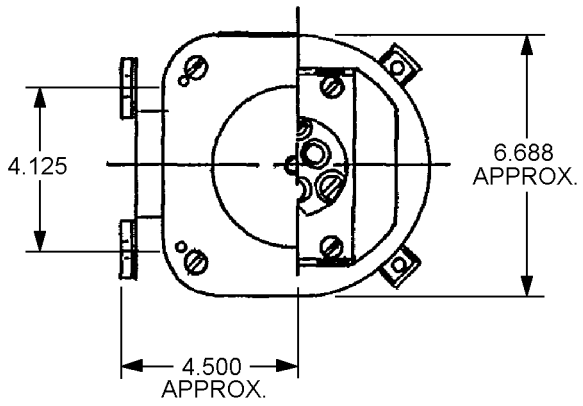

Inches	mm
.002	0.05
.500	12.70
.812	20.62
2.688	68.27
2.875	73.02
2.879	73.13
3.75	95.2
4.125	104.77
4.500	114.30
6.688	169.87
7.875	200.02
7.938	201.60

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ± .016 (0.41mm).
4. Supersedes: Drawing 900-S6202-73966, symbol 726.
5. Part or Identifying Number (PIN) M2726/23-001 used for replacement only.

FIGURE 1. Receptacle enclosed - Continued.

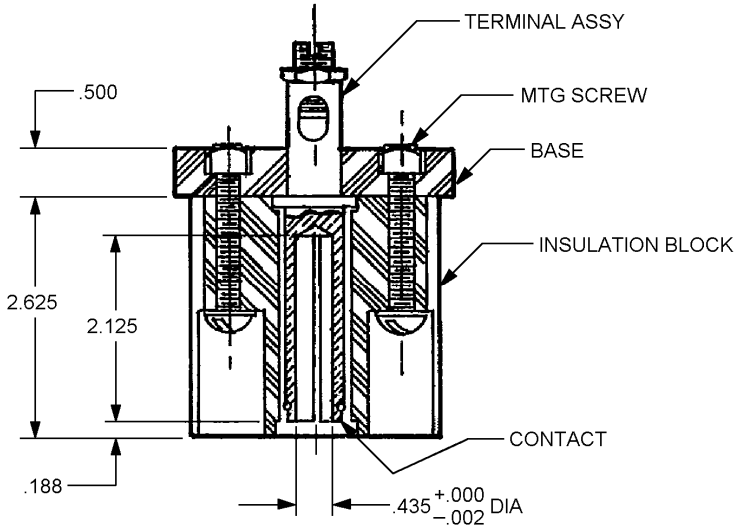


SECTION A - A

Inches	mm
.002	0.05
.125	3.17
.188	4.77
.312	7.93
.435	11.05
.500	12.70
.562	14.27
.625	15.87
.687	17.45
1.750	44.45
2.125	53.97
2.625	66.67
3.000	76.20
4.250	107.95
4.875	123.82

FIGURE 2. Receptacle fitting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:25Z
Check the source to verify that this is the current version before use.

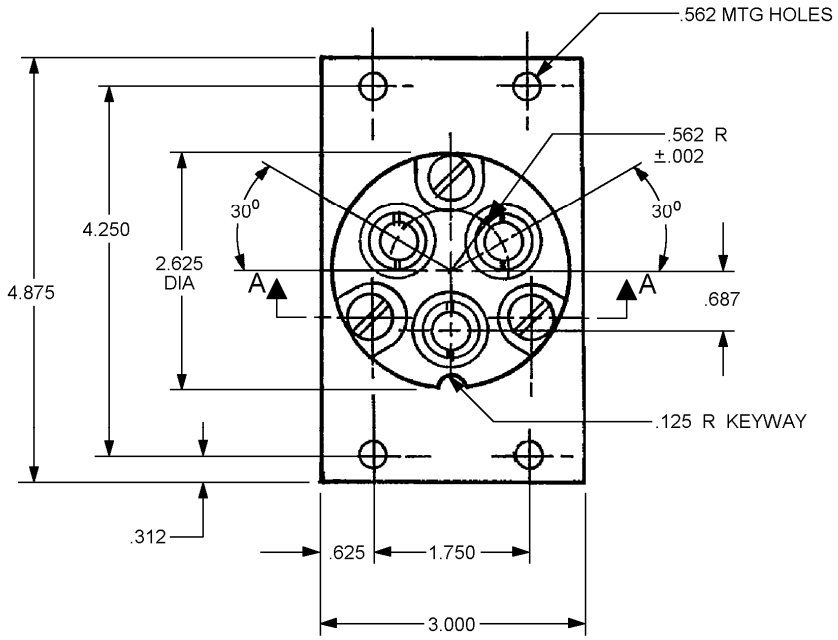

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. PIN: M2726/23-002 unless otherwise specified, tolerances are ± .016 (0.41mm).

FIGURE 2. Receptacle fitting - Continued.

REQUIREMENTS

Dimensions and configurations: See figures 1 and 2.

Effectiveness of enclosure: Watertight in accordance with MIL-STD-108.

Contact hardness: Minimum of Rockwell 60B.

Mating plug: MIL-DTL-2726/46, PIN: M2726/46-001.

Gasket: Rubber in accordance with MIL-PRF-900.

O-RING: As specified in SAE-AS28775.

Cap: Brass.

Enclosure assembly: Steel.

Base: In accordance with MIL-I-24768/1 type GME.

Insulation block: In accordance with ASTM-D5948 type MAI-60.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:25Z
Check the source to verify that this is the current version before use.

Electrical rating: 100-ampere, 250-volt, direct current.

PIN: M2726/23-001 (assembly), M2726/23-002 (receptacle fitting).

VERIFICATION

Verification shall be as specified in MIL-DTL-2726 and table I herein. The first article and conformance inspections shall consist of the inspections as specified in table I, in the order shown.

TABLE I. First article and quality conformance inspection.

Inspection	First article	Conformance
Examination	X	X
Insulation resistance	X	X
Dielectric withstanding voltage	X	X
Contact resistance	X	X
Current load	X	
Endurance	X	
Salt spray	X	
Contact resistance	X	
Vibration	X	
Shock	X	
Effectiveness of enclosure	X	X
Dielectric withstanding voltage	X	

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-2726, this document references the following:

ASTM-D5948
MIL-I-24768/1
MIL-PRF-900
MIL-DTL-2726/46
MIL-STD-108
SAE-AS28775

CONCLUDING MATERIAL

Custodians:
Navy - SH
DLA - CC

Preparing activity
DLA - CC

(Project 5935-4617-016)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T15:25Z
Check the source to verify that this is the current version before use.