INCH-POUND
MIL-PRF-32383/5
29 February 2020

PERFORMANCE SPECIFICATION SHEET
BATTERY, RECHARGEABLE, SEALED, BB-2590B/U

The requirements for acquiring the product herein shall consist of this specification sheet and MIL-PRF-32383.

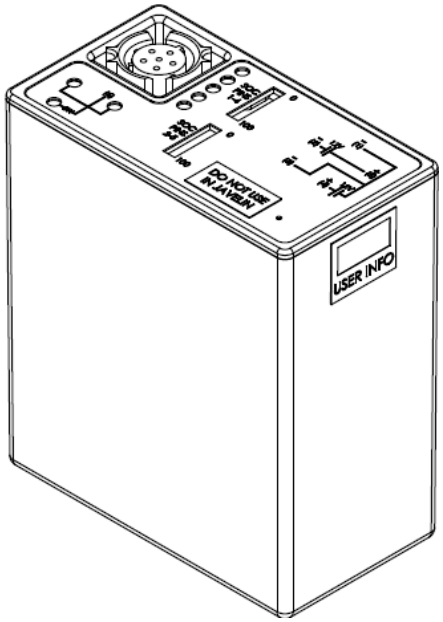


FIGURE 1. BB-2590B/U

FIGURE 1 NOTE:
Approximate size: 5in x 2.5in x 4.4in. See FIGURE 2 for exact dimensions.

REQUIREMENTS
BB-2590B/U Type – III (see 1.2 of MIL-PRF-32383 for classification) PIN – M32383/5-3 (see 1.2of MIL-PRF for PIN)

AMSC N/A FSC 6140
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

Specification requirements and test methods: The following requirements and test methods of MIL-PRF-32383, identified therein as “when specified”, are applicable as indicated below:

Inspection	Requirement Paragraph	Test Method Paragraph	Applicability BB-2590B/U
Mulitlayer finish	3.4.4.1.3	Certification	Yes
Gold plating	*3.4.4.1.4*	*Certification*	*No*
Motor inrush current	3.5.5	4.7.2.12	Yes
Charge enable 1/	3.5.6	4.7.2.6	Yes
SMBus 1/	3.5.9	4.7.2.14, 4.7.2.15	Yes
Immersion, shallow 1/	3.6.6	4.7.3.8.1	Yes
Immersion, deep	*3.6.6*	*4.7.3.8.2*	*No*
Transit drop, normal	3.6.7	4.7.3.9.1	*No*
Transit drop, severe	3.6.7	4.7.3.9.2	Yes
Drop while mated	*3.6.7*	*4.7.3.9.2*	*No*
Nail penetration, cell	3.7.1.2	4.7.4.4	Yes
Crush, cell	3.7.1.3	4.7.4.5	Yes
Projectile	3.7.2.6	4.7.4.11	Yes
Lithium Battery Safety Program (US Navy) Tests (Group 4)	3.7.2.7	4.7.5	Yes
Electromagnetic interference (Group 2)	*3.8*	*4.7.7*	*No*

1/ As modified herein

Details: The following are details specific to M32383/5-3 including those referenced in MIL-PRF- 32383 as “specified”.

1. Dimensions and weight (3.4.3)
   Dimensions: See FIGURE 2
   Maximum weight: 3.25lb

2. Battery connector and electrical interfaces (3.4.4)
   Connector: SC-C-179495 (or equivalent).
   The face of connector shall be flush to .031 inch below top of battery
   Mating connector: N/A
   Multilayer finish: Flat contacts shall be brass with multilayer finish
   Gold plating: N/A
   Battery charger adapter: J-6538B/P

3. Battery case vent (3.4.5.3)
   See FIGURE 2 for location.

4. Markings (3.4.6)
   See FIGURE 2 for the location of required markings as indicated. The locations for other required markings from MIL-PRF-32383 are optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

5. Instructions / notes (3.4.6.5)
   See FIGURE 2

6. Simplified battery label (3.4.6.6)
   The simplified battery label location is optional. It shall be sized to remain legible.

7. Battery condition for shipping (3.4.8)
   The instruction card shall at a minimum contain operation, storage, handling, maintenance, and warranty (if applicable) information.

8. Battery voltage (3.5.2)
   Battery open circuit voltage:

Battery	Minimum		Maximum	
	Single / Parallel	Series	Single / Parallel	Series
BB-2590B/U	10V	20V	16.8V	33.6V

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

9. Capacity (3.5.3)

Minimum final voltage: 20 volts (series mode)
Each battery, discharged at the specified rate to minimal final voltage, shall have the following minimum capacity:

Test	Requirement Paragraph	Test Method Paragraph	Discharge Rate (A)	Minimum Capacity (Ah)
				16.8V
Capacity discharge	3.5.3	4.7.2.3	2	9.8
Cycle life (224th cycle)	3.5.4	4.7.2.4	2	9.3
High rate discharge	3.5.3	4.7.2.5	10	9.8
Low temperature discharge	3.5.3	4.7.2.7	2	8.9
High temperature discharge	3.5.3	4.7.2.8	2	9.8
Motor inrush current	3.5.5	4.7.2.12	See detail 10	9.7
Charge acceptance	3.5.10.1	4.7.2.9	2	5.1
Retention of charge	3.5.10.2	4.7.2.10	2	9.7
Pulse discharge 1/	3.5.3	4.7.2.11	See detail 20	19.5
Extreme low temperature discharge	3.6.1	4.7.3.2	2	8.6
Extreme high temperature discharge	3.6.1	4.7.3.3	2	9.8
Thermal shock (post-test)	3.6.3	4.7.3.5	2	9.8
Mechanical shock (post-test)	3.6.4	4.7.3.6	2	9.8
Vibration (during test)	3.6.5	4.7.3.7	0.8	9.7
Battery storage life	3.6.8	4.7.3.10	2	9.3
Overcharge/electric leakage (post-test)	3.7.2.2	4.7.4.7	2	9.8
Short circuit protection (post-test)	3.7.2.3	4.7.4.8	2	9.7
High temperature temporary cut off	3.7.2.4	4.7.4.9	2	9.7

1/ Parallel mode; minimum final voltage is 10V

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

10. Motor inrush current (3.5.5)
The discharge profile shall be no less than as follows.

Step	Start time (minute:second:millisecond)	End time (minute:second:millisecond)	Current (A)
1	00:00:000	**05**:00:000	5
1a	**05**:00:000	05:00:**000.2**	60
2	05:00:**000.2**	05:00:**010**	22.5
3	05:00:**010**	05:00:**020**	20
4	05:00:**020**	05:00:**030**	19
5	05:00:**030**	05:00:**040**	18
6	05:00:**040**	05:00:**060**	17
7	05:00:**060**	05:00:**100**	16
8	05:00:**100**	05:00:**175**	15
9	05:00:**175**	05:00:**325**	14
10	05:00:**325**	05:00:**575**	13
11	05:00:**575**	05:00:**850**	12
12	05:00:**850**	05:**01**:000	11
13	05:**01**:000	**10**:00:000	10
14	Repeat steps 1 through 13		
15	**20**:00:010	Until cutoff voltage	5

11. Charge enable (3.5.6)
For BB-2590B/U batteries, the charge enable terminal shall comply with the following:
    a. Maximum charge without enable: 400 mA
    b. Equivalent resistor: 235 Ω
    c. Equivalent diode V_F: 1.3 V
    d. Approximate activation current: 7 mA

12. High temperature temporary cut off devices (3.7.2.4).
There shall be not less than four temporary cut off devices complying with 3.7.5.

13. High temperature permanent cut off devices (3.7.2.5).
For BB-2590B/U batteries, batteries there shall be not less than two permanent cut off devices complying with 3.7.6.

14. Electromagnetic compatibility (3.8):
N/A

15. Constant potential, current limited (4.6.1).
A constant potential of 16.8 volts shall be applied to each battery section independently with current limited to 3 amperes, to a charge cut off of 100 milliamperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

16. Constant current (4.6.2).
    Constant current charging is divided into two stages as follows:
    a. Fast-charge each battery section independently at 4.3 ± 0.3 amperes until either the battery reaches 16.8 volts or a negative voltage drop is detected;
    b. Topping charge is in two parts: (1) continue charge at 480 ± 5 milliamperes for not greater than 2 hours, then (2) charge at 230 ± 5 milliamperes until the total charge capacity reaches 6.9 amp-hours.
    c. Rest periods during charge are permitted but not required, provided the total charge time is not more than 5 hours.

17. Alternate charging (4.6.3).
    The following methods may be used whenever the general specification allows use of alternate charging:
    a. BB-2590B/U:
       Charge each section independently with a constant potential of 16.8 volts and current limit of 3 amperes max.

18. Capacity discharge (4.7.2.3).
    Discharge at 2A in series mode.

19. Cycle life test (4.7.2.4).
    All cycles shall be at a 2A discharge rate.

20. Pulse discharge (4.7.2.11).
    Discharge with the battery sections connected in parallel with 36 amperes for 5 seconds followed by 25 seconds off load.

21. Overcharge/electric leakage (4.7.4.7).
    Charge in parallel mode at 4.0 amperes with a charge voltage limit of 40 volts during the 21-hour overcharge period of 4.7.4.7b. Discharge batteries at a constant 2A load to final voltage in step 4.7.4.7e.

22. Electromagnetic interference (4.7.7).
    N/A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

VARIANCES: BB-2590B/U shall comply with MIL-PRF-32383 except as follows:

For the BB-2590B/U batteries, modify as follows:

A. From:

3.5.7 Power consumption. The power consumption for all electronics within the battery shall be less than 350µA, per battery or independent section where applicable, at 20°C. (See 4.7.2.13)

To:

3.5.7 Power consumption. The power consumption for all electronics within the battery shall be less than 350µA average, per battery or independent section where applicable, at 20°C. (See 4.7.2.13)

B. From:

3.6.7 Transit drop. Batteries shall be capable of withstanding drops at severe temperature conditions without sustaining physical or electrical damage. When tested as specified in 4.7.3.9.1 or 4.7.3.9.2, batteries shall meet the capacity requirements of 3.5.3 and the requirements of 3.6 (with the exception of defects in 106 of TABLE VIII).

To:

3.6.7 Transit drop. Batteries shall be capable of withstanding drops at severe temperature conditions without sustaining physical or electrical damage. When tested as specified in 4.7.3.9.1 or 4.7.3.9.2, batteries shall meet the capacity requirements of 3.5.3 and the requirements of 3.6 (with the exception of defects in 106 of TABLE VIII, and minor reworkable deformations beyond specification limits).

C. From

3.7.1.2 Nail penetration, cell. When specified (see 3.1), cells shall not react violently when cell containers are penetrated by sharp objects. Cells tested in accordance with 4.7.4.4 shall not burn or explode, and the external temperature of each test sample shall be not greater than 170°C (338ºF).

To:

3.7.1.2 Nail penetration, cell. When specified (see 3.1), cells shall not react violently when cell containers are penetrated by sharp objects. Cells tested in accordance with 4.7.4.4 shall not burn or explode, and the external temperature of each test sample shall be not greater than 170°C (338ºF). The results of this test shall be evaluated and the battery hazard shall not produce greater than a MEDIUM risk in accordance with MIL-STD-882E.

D. From:

3.7.2.6 Projectile. When specified (see 3.1), batteries shall not produce shrapnel when subjected to a flame. When tested as specified in 4.7.4.11, no part of a battery under test shall penetrate the wire screen such that some or all of the battery passes through the screen. When tested, the production of smoke and flames and the passing of small particles through the wire mesh are permitted; heat damage to the wire mesh is also permitted.

To:

3.7.2.6 Projectile. When tested, the production of smoke and flames and the passing of small particles through the wire mesh are permitted; heat damage to the wire mesh is also permitted. Test must be set up in accordance to UL1642 20 Projectile Test. During test, batteries must be secured to the screen with a single wire tied around the sample. Video of the test is required from start of testing to end of testing for each battery. Pictures are to be taken and to include but are not limited to: pre-test apparatus (including all equipment), pre-test battery, post-test battery, post-test apparatus (including all equipment), post-test

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

room, and any post-test shrapnel found with reference object. The results of this test shall be evaluated and the battery hazard shall not produce greater than a MEDIUM risk in accordance with MIL-STD-882E.

E. From:

3.7.2.7 Lithium Battery Safety Program (US Navy). When specified (see 3.1), Types III and IV batteries shall be designed and built in a manner that provides protection from bulging, leaking, venting, rupturing, burning and exploding under conditions of extreme electrical abuse. Additionally, batteries shall be designed in a manner that prevents the production of shrapnel in the event of failure of internal protection devices under extreme conditions.

To:

3.7.2.7 Lithium Battery Safety Program (US Navy). When specified (see 3.1), Types III and IV batteries shall be designed and built in a manner that provides protection from bulging, leaking, venting, rupturing, burning and exploding under conditions of extreme electrical abuse. Additionally, batteries shall be designed in a manner that prevents the production of shrapnel in the event of failure of internal protection devices under extreme conditions. The results of this test shall be evaluated and the battery hazard shall not produce greater than a MEDIUM risk in accordance with MIL-STD-882E.

F. From:

3.7.2.7.1 Destructive Lithium Battery Safety Program tests. When tested in accordance with 4.7.5.1 through 4.7.5.3, the battery case shall not fragment. Case distortion, cracking, or bulging, and venting of gases or liquids through purposely designed cell vents, are permitted.

To:

3.7.2.7.1 Destructive Lithium Battery Safety Program tests. When tested in accordance with 4.7.5.1 through 4.7.5.3, the battery case shall not fragment. Case distortion, cracking, or bulging, and venting of gases or liquids through purposely designed cell vents, are permitted. The results of this test shall be evaluated and the battery hazard shall not produce greater than a MEDIUM risk in accordance with MIL-STD-882E.

G. From:

3.7.2.7.2 Non-destructive Lithium Battery Safety Program tests. When tested in accordance with 4.7.5.4 through 4.7.5.5, no battery shall bulge, leak, vent, rupture, burn, or explode.

To:

3.7.2.7.2 Non-destructive Lithium Battery Safety Program tests. When tested in accordance with 4.7.5.4 through 4.7.5.5, no battery shall bulge, leak, vent, rupture, burn, or explode. The results of this test shall be evaluated and the battery hazard shall not produce greater than a MEDIUM risk in accordance with MIL-STD-882E.

H. From:

4.6.1 Constant potential, current limited. Where specified herein, Type III (Li-ion) and Type IV (Li-Po) batteries shall be charged by a constant potential (voltage) method with limited current at normal conditions in accordance with 4.3.1 at a rate not less than specified (see 3.1) and for not greater than three hours. Voltages, current limits, and cut-off parameters are specified in the applicable specification sheet (see 3.1).

To:

4.6.1 Constant potential, current limited. Where specified herein, Type III (Li-ion) and Type IV (Li-Po) batteries shall be charged by a constant potential (voltage) method with limited current at normal

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

conditions in accordance with 4.3.1 at a rate not less than specified (see 3.1). Voltages, current limits, and cut-off parameters are specified in the applicable specification sheet (see 3.1).

I. From:

4.7.2.13 Power consumption. The following test shall be performed. Connect an ammeter between the ECA for the battery and the full CCA for the battery. Verify the current draw is in accordance with paragraph 3.5.7.

To:

4.7.2.13 Power consumption. The following test shall be performed. Record the current between the ECA for the battery and the full CCA for the battery over a one hour period. Verify the average current draw is in accordance with paragraph 3.5.7.

J. From:

4.7.3.3 Extreme high temperature discharge. For Type III (Li-ion) and Type IV (Li-Po) batteries the following test shall be performed. Charge batteries in accordance with 4.6; use of 4.6.3 is not permitted. Store the batteries at 55°C (140°F) ± 1.1°C (± 2°F) for a minimum of 4 hours. Discharge under these conditions at the rate specified to the specified final voltage (see 3.1). After testing, batteries shall meet the requirements of 3.5.3, 3.6, and 3.6.1.

To:

4.7.3.3 Extreme high temperature discharge. For Type III (Li-ion) and Type IV (Li-Po) batteries the following test shall be performed. Charge batteries in accordance with 4.6; use of 4.6.3 is not permitted. Store the batteries at 55°C (131°F) ± 1.1°C (± 2°F) for a minimum of 4 hours. Discharge under these conditions at the rate specified to the specified final voltage (see 3.1). After testing, batteries shall meet the requirements of 3.5.3, 3.6, and 3.6.1.

K. From:

4.7.3.5 Thermal shock. The following test shall be performed. Charge batteries in accordance with 4.6; use of 4.6.3 is permitted. Subject batteries to temperature shock per Method 503, Procedure 1-B of MIL-STD-810 at the temperature extremes of not less than 75°C (167°F) and not greater than -59°C (-75°F), except that the time at the temperature extremes shall be not less than 2 hours and diurnal cycling not required. Perform the capacity discharge test of 4.7.2.3. Batteries shall meet the requirements of 3.5.3, 3.6, and 3.6.3.

To:

4.7.3.5 Thermal shock. The following test shall be performed. Charge batteries in accordance with 4.6; use of 4.6.3 is permitted. Subject batteries to temperature shock per Method 503, Procedure 1-B of MIL-STD-810. The low temperature extreme (T1) shall be not greater than -59°C (-75°F) and the high temperature extreme (T2) shall be not less than 75°C (167°F). The stabilization periods shall be not less than 2 hours. Perform the capacity discharge test of 4.7.2.3. Batteries shall meet the requirements of 3.5.3, 3.6, and 3.6.3.

L. From:

4.7.4.4 Nail Penetration, cell. When specified (see 3.1), the following test shall be performed on cells between 50% and 71% state of charge. Insert a 2.5 mm DIA stainless steel nail with a length that exceeds the width or diameter of the cell to be tested into each cell at right-angles to the electrode surface close to the center of the cell. Drive the nail completely through on one of the samples; Drive the nail to a depth of 2/3 of the width of the cell for the other. Leave the nail in both cells for 24 hours. Monitor the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

voltage and external temperature of the cell for the duration of the test. Cells shall meet the requirements of 3.7.1.2.

To:

4.7.4.4 Nail Penetration, cell. When specified (see 3.1), the following test shall be performed on cells between 50% and 71% state of charge. Insert a 2.5 mm DIA stainless steel nail with a length that exceeds the width or diameter of the cell to be tested into each cell at right-angles to the electrode surface close to the center of the cell. Drive the nail completely through on one of the samples; Drive the nail to a depth of 2/3 of the width of the cell for the other. Leave the nail in both cells for 24 hours. Monitor the voltage and external temperature of the cell for the duration of the test. Cells shall meet the requirements of 3.7.1.2 and shall be evaluated as part of the Safety Assessment Report.

M. From:

4.7.4.11 Projectile. The following test shall be performed. Subject each battery designated for the projectile test to the projectile test of UL 1642. Batteries shall meet the requirements of 3.7.2.6.

To:

4.7.4.11 Projectile. The following test shall be performed. Subject each battery designated for the projectile test to the projectile test of UL 1642. Batteries shall meet the requirements of 3.7.2.6 and shall be evaluated as part of the Safety Assessment Report.

N. From:

4.7.5.1 Short circuit test. When specified (see 3.1), the short circuit test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.1.

To:

4.7.5.1 Short circuit test. When specified (see 3.1), the short circuit test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.1 and shall be evaluated as part of the Safety Assessment Report.

O. From:

4.7.5.2 Overcharge/discharge test. When specified (see 3.1), the overcharge/discharge test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.1.

To:

4.7.5.2 Overcharge/discharge test. When specified (see 3.1), the overcharge/discharge test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.1 and shall be evaluated as part of the Safety Assessment Report.

P. From:

4.7.5.3 Overcharge/charge test. When specified (see 3.1), the overcharge/charge test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.1.

To:

4.7.5.3 Overcharge/charge test. When specified (see 3.1), the overcharge/charge test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.1. and shall be evaluated as part of the Safety Assessment Report.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

Q. From:

4.7.5.4 Electrical safety device test. When specified (see 3.1), the electrical safety device test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.2.

To:

4.7.5.4 Electrical safety device test. When specified (see 3.1), the electrical safety device test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.2 and shall be evaluated as part of the Safety Assessment Report.

R. From:

4.7.5.5 Aging safety test. When specified (see 3.1), the aging safety test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.2.

To:

4.7.5.5 Aging safety test. When specified (see 3.1), the aging safety test for rechargeable batteries of NAVSEA S9310-AQ-SAF-010 shall be performed. Batteries shall meet the requirements of 3.7.2.7.2 and shall be evaluated as part of the Safety Assessment Report.

S. From:

TABLE II. Cell electrical safety tests

Tests	Req't Paragraph	Test Paragraph
Cell overcharge	3.7.1.1.1	4.7.3.4
Cell short circuit	3.7.1.1.2	4.7.3.5
Cell forced discharge	3.7.1.1.2	4.7.3.6


To:

TABLE II. Cell electrical safety tests

Tests	Req't Paragraph	Test Paragraph
Cell overcharge	3.7.1.1.1	4.7.4.1
Cell short circuit	3.7.1.1.2	4.7.4.2
Cell forced discharge	3.7.1.1.2	4.7.4.3

ADDITIONAL FIGURES

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

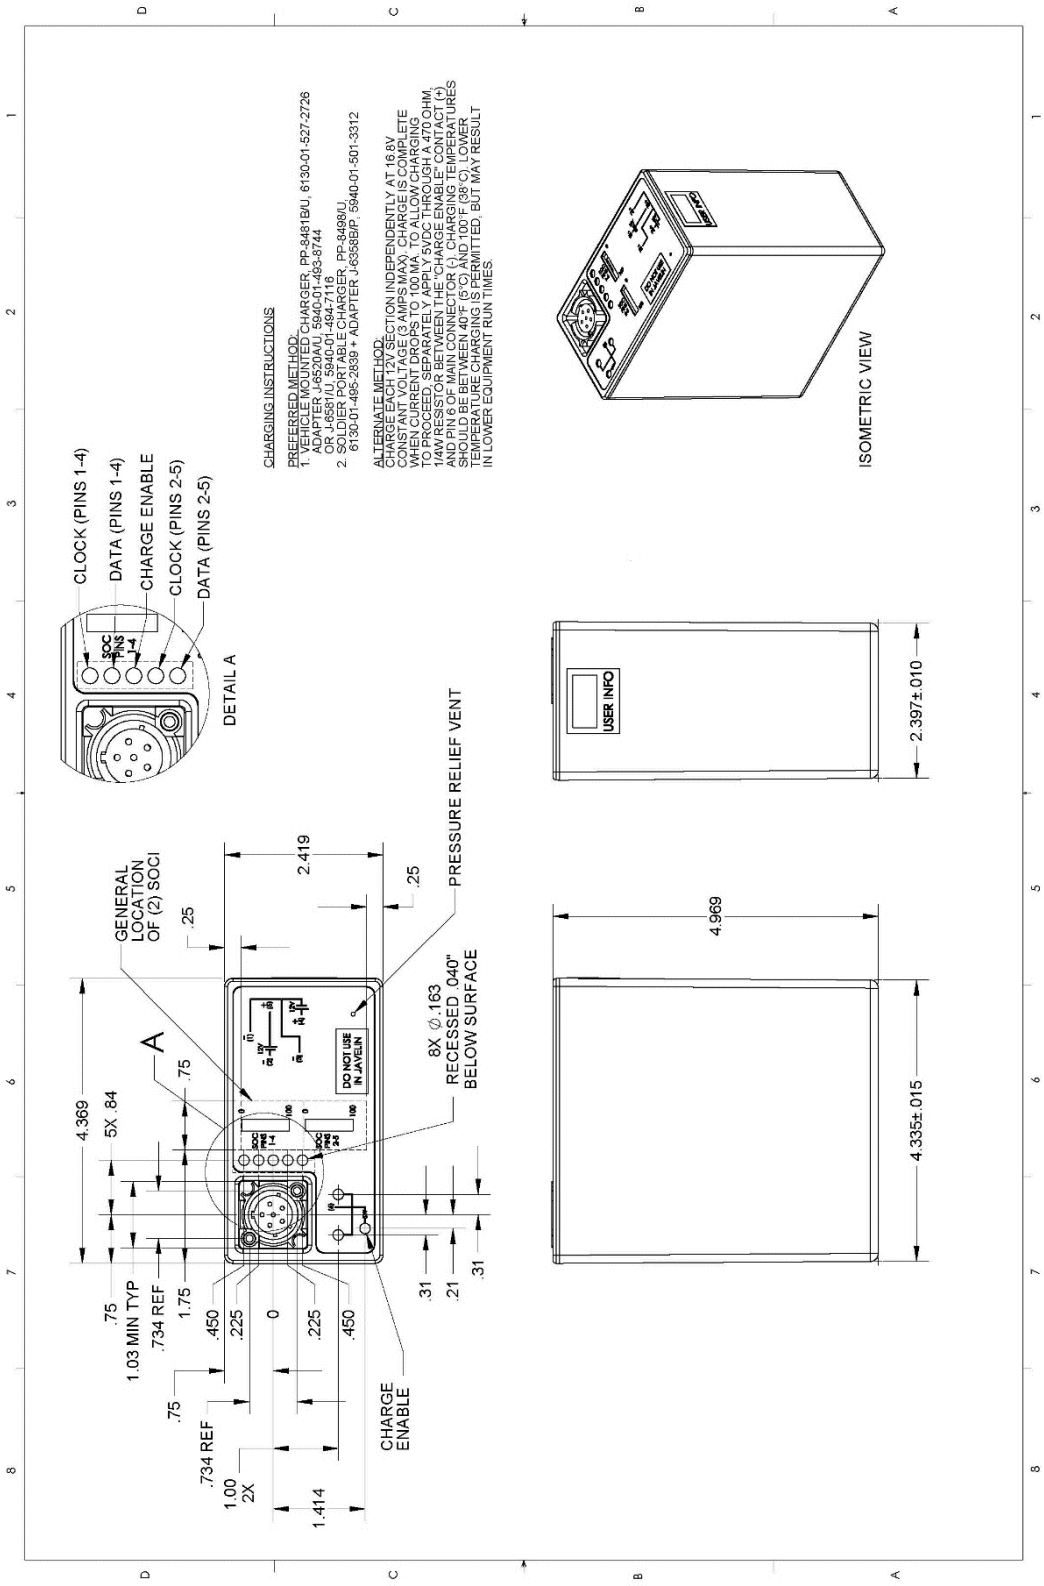

Note: Dimensions are in inches. Tolerance is ± 0.031 inches unless stated otherwise.

FIGURE 2. BB-2590B/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

NOTES: (This section contains information of a general nature which may be helpful, but is not mandatory)

Nominal ratings: The following are the nominal ratings for the battery described by this specification sheet. They are provided for information purposes.

Battery PIN: M32383/3	**-3**
Type Classification:	BB-2590B/U
Chemistry:	Li-Ion
Color:	"Desert tan"
Weight (max):	3.25 lbs
Voltage Range:	20-33(20-33.6*)
Nominal Voltage:	28.8
Nominal Capacity:	9.6 (9.8*) Ah
Nominal Energy (new battery):	275 (280*) Wh
Rated power output:	≤ 280 W
Battery Life:	≥ 224 cycles, ≥ 3 years
Continuous load rating:	≤ 10 A
Pulse load rating:	≤ 36 A (5 SEC)
Charge temperature range:	-4 to 122ºF (-20 to 50ºC)
Operating temperature range:	-22 to 140ºF (-30 to 55ºC)
Storage temperature range:	-4 to 122ºF (-20 to 50ºC)
MAX abusive temperature: (non-operating):	199ºF (93ºC)
Connector:	SC-C-179495
Overall Dimensions:	~ 5 in. x 2.5 in. x 4.4 in.
Non-rechargeable equivalent / Specification:	BA-5590B/U and BA-5390B/U / MIL-PRF-32271/1
Note 1: * When Charged to 16.8V	

Other data:

Navy safety tests of NAVSEA S9310-AQ-SAF-010 are required for the BB-2590B/U batteries during first article testing. The test data provided from the testing will be used to evaluate applications for specific using devices and Navy platforms. Devices using this battery will require US Navy Safety Approval prior to use by Department of Navy users unless such approval has already been granted. Please consult with NAVSEA Instruction 9310.1 for further information.

Expected performance with Legacy Chargers:

Test	Requirement Paragraph	Test Method Paragraph	Discharge Rate (A)	Minimum Capacity (Ah)
				16.5V
Capacity discharge	3.5.3	4.7.2.3	2	9.5
Cycle life (224th cycle)	3.5.4	4.7.2.4	2	8.5
High rate discharge	3.5.3	4.7.2.5	10	9.3
Low temperature discharge	3.5.3	4.7.2.7	2	8.4
High temperature discharge	3.5.3	4.7.2.8	2	9.5
Motor inrush current	3.5.5	4.7.2.12	See detail 2	9
Charge acceptance	3.5.10.1	4.7.2.9	2	4.8
Retention of charge	3.5.10.2	4.7.2.10	2	9

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.

Pulse discharge 1/	3.5.3	4.7.2.11	See detail 12	18.5
Extreme low temperature discharge	3.6.1	4.7.3.2	2	8.4
Extreme high temperature discharge	3.6.1	4.7.3.3	2	9.5
Thermal shock (post-test)	3.6.3	4.7.3.5	2	9.5
Mechanical shock (post-test)	3.6.4	4.7.3.6	2	9.5
Vibration (during test)	3.6.5	4.7.3.7	0.8	9.5
Battery storage life	3.6.8	4.7.3.10	2	8.9
Overcharge/electric leakage (post-test)	3.7.2.2	4.7.4.7	2	9.5
Short circuit protection (post-test)	3.7.2.3	4.7.4.8	2	9
High temperature temporary cut off	3.7.2.4	4.7.4.9	2	9

Custodians:
Army – CR
Navy – MC
Air Force – 71

Preparing activity:
Army – CR
(Project Number 6140-2020-002)

Review activities:
Navy – AS, SH
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T06:07Z
Check the source to verify that this is the current version before use.