INCH-POUND
MIL-C-18312/2D
28 February 2013
SUPERSEDING
MIL-C-18312/2C
27 August 2001


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, METALLIZED (PAPER-PLASTIC, OR PLASTIC FILM) DIELECTRIC, DIRECT CURRENT (HERMETICALLY SEALED IN METAL CASES), STYLE CH09

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-18312.

INACTIVE FOR NEW DESIGN, AFTER 8 JANUARY 1970. USE MIL-PRF-39022/1.

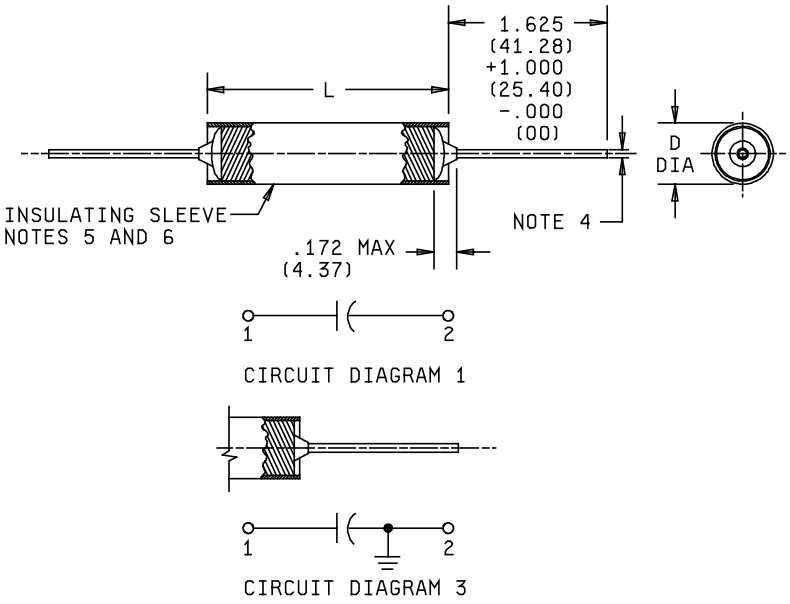

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See table I for additional dimensions.
4. Number 24 AWG wire for case diameters of .227 inch (5.77 mm) and under. Number 22 AWG for case diameters .267 inch (6.78 mm) thru .344 inch (8.74 mm) and 20 AWG wire for case diameters .432 inch (10.97 mm) and over.
5. Plastic insulating sleeve shall be transparent. Marking shall be applied to the capacitor case.
6. Plastic insulating sleeve shall extend beyond the capacitor body, but shall not exceed .062 inch (0.79 mm) on either end. Insulating sleeve thickness shall not exceed .016 inch (0.41 mm).

FIGURE 1. Style CH09 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:14Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See and table I.

TABLE I. Characteristics.

Part or Identifying Number (PIN) 1/	DC rated voltage (volts)	Capacitance value (µF)	Circuit diagram	Dimensions, nominal (inches) 2/ 3/		Superseded MIL-C-18312/1A and MIL-C-18312/2A Capacitance tolerance	
				L ±.062	D +.031 -.051	±5%	±10%
CH09A1RA183-	50	0.018	1	.750	.175	0301	0302
CH09A3RA183-	50	0.018	3	.688	.175	0303	0304
CH09A1RA223-	50	0.022	1	.750	.175	0305	0306
CH09A3RA223-	50	0.022	3	.688	.175	0307	0308
CH09A1RA273-	50	0.027	1	.750	.175	0309	0310
CH09A3RA273-	50	0.027	3	.688	.175	0311	0312
CH09A1RA333-	50	0.033	1	.750	.175	0313	0314
CH09A3RA333-	50	0.033	3	.688	.175	0315	0316
CH09A1RA393-	50	0.039	1	.750	.195	0317	0318
CH09A3RA393-	50	0.039	3	.688	.195	0319	0320
CH09A1RA473-	50	0.047	1	.750	.195	0321	0322
CH09A3RA473-	50	0.047	3	.688	.195	0323	0324
CH09A1RA563-	50	0.056	1	.750	.235	0325	0326
CH09A3RA563-	50	0.056	3	.688	.235	0327	0328
CH09A1RA683-	50	0.068	1	.750	.235	0329	0330
CH09A3RA683-	50	0.068	3	.688	.235	0331	0332
CH09A1RA823-	50	0.082	1	.750	.235	0333	0334
CH09A3RA823-	50	0.082	3	.688	.235	0335	0336
CH09A1RA104-	50	0.100	1	.750	.235	0337	0338
CH09A3RA104-	50	0.100	3	.688	.235	0339	0340
CH09A1RA184-	50	0.180	1	.874	.312	0341	0342
CH09A3RA184-	50	0.180	3	.812	.312	0343	0344
CH09A1RA224-	50	0.220	1	.874	.312	0345	0346
CH09A3RA224-	50	0.220	3	.812	.312	0347	0348
CH09A1RA274-	50	0.270	1	.874	.312	0349	0350
CH09A3RA274-	50	0.270	3	.812	.312	0351	0352
CH09A1RA334-	50	0.330	1	.874	.312	0353	0354
CH09A3RA334-	50	0.330	3	.812	.312	0355	0356
CH09A1RA394-	50	0.390	1	1.125	.312	0357	0358
CH09A3RA394-	50	0.390	3	1.062	.312	0359	0360
CH09A1RA474-	50	0.470	1	1.125	.312	0361	0362
CH09A3RA474-	50	0.470	3	1.062	.312	0363	0364
CH09A1RA564-	50	0.560	1	1.125	.400	0365	0366
CH09A3RA564-	50	0.560	3	1.062	.400	0367	0368
CH09A1RA684-	50	0.680	1	1.125	.400	0369	0370
CH09A3RA684-	50	0.680	3	1.062	.400	0371	0372
CH09A1RA824-	50	0.820	1	1.125	.400	0373	0374
CH09A3RA824-	50	0.820	3	1.062	.400	0375	0376
CH09A1RA105-	50	1.0	1	1.125	.400	0377	0378
CH09A3RA105-	50	1.0	3	1.062	.400	0379	0380
CH09A1RA155-	50	1.5	1	1.125	.500	0381	0382
CH09A3RA155-	50	1.5	3	1.062	.500	0383	0384
CH09A1RA225-	50	2.2	1	1.125	.562	0385	0386

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:14Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics - Continued.

PIN 1/	DC rated voltage (volts)	Capacitance value (µF)	Circuit diagram	Dimensions, nominal (inches) 2/ 3/		Superseded MIL-C-18312/1A and MIL-C-18312/2A Capacitance tolerance	
				L ±.062	D +.031 -.051	±5%	±10%
CH09A3RA225-	50	2.2	3	1.062	.562	0387	0388
CH09A1RA275-	50	2.7	1	1.375	.562	0389	0390
CH09A3RA275-	50	2.7	3	1.312	.562	0391	0392
CH09A1RA335-	50	3.3	1	1.375	.562	0393	0394
CH09A3RA335-	50	3.3	3	1.312	.562	0395	0396
CH09A1RA395-	50	3.9	1	1.625	.562	0397	0398
CH09A3RA395-	50	3.9	3	1.562	.562	0399	0400
CH09A1RA475-	50	4.7	1	1.875	.562	0401	0402
CH09A3RA475-	50	4.7	3	1.812	.562	0403	0404
CH09A1RA565-	50	5.6	1	1.625	.670	0405	0406
CH09A3RA565-	50	5.6	3	1.562	.670	0407	0408
CH09A1RA685-	50	6.8	1	1.875	.670	0409	0410
CH09A3RA685-	50	6.8	3	1.812	.670	0411	0412
CH09A1RA106-	50	10.0	1	1.875	.750	0413	0414
CH09A3RA106-	50	10.0	3	1.812	.750	0415	0416
CH09A1RA126-	50	12.0	1	2.375	.750	0417	0418
CH09A3RA126-	50	12.0	3	2.312	.750	0419	0420
						±10%	±20%
CH09A1NC104-	200	0.10	1	.844	.312	0421	0422
CH09A3NC104-	200	0.10	3	.781	.312	0423	0424
CH09A1NC224-	200	0.22	1	1.125	.312	0425	0426
CH09A3NC224-	200	0.22	3	1.062	.312	0427	0428
CH09A1NC474-	200	0.47	1	1.125	.400	0429	0430
CH09A3NC474-	200	0.47	3	1.062	.400	0431	0432
CH09A1NC105-	200	1.0	1	1.125	.562	0433	0434
CH09A3NC105-	200	1.0	3	1.062	.562	0435	0436
CH09A1NC155-	200	1.5	1	1.844	.562	0437	0438
CH09A3NC155-	200	1.5	3	1.781	.562	0439	0440
CH09A1NC225-	200	2.2	1	1.844	.562	0441	0442
CH09A3NC225-	200	2.2	3	1.781	.562	0443	0444
CH09A1NC335-	200	3.3	1	1.875	.670	0445	0446
CH09A3NC335-	200	3.3	3	1.812	.670	0447	0448
CH09A1NC475-	200	4.7	1	1.875	1.000	0449	0450
CH09A3NC475-	200	4.7	3	1.812	1.000	0451	0452
CH09A1NC685-	200	6.8	1	1.875	1.000	0453	0454
CH09A3NC685-	200	6.8	3	1.812	1.000	0455	0456
CH09A1NC106-	200	10.0	1	2.375	1.000	0457	0458
CH09A3NC106-	200	10.0	3	2.312	1.000	0459	0460
CH09A1NC126-	200	12.0	1	2.625	1.000	0461	0462
CH09A3NC126-	200	12.0	3	2.562	1.000	0463	0464
CH09A1NE473-	400	0.047	1	1.125	.312	0465	0466
CH09A3NE473-	400	0.047	3	1.062	.312	0467	0468
CH09A1NE104-	400	0.10	1	1.125	.400	0469	0470
CH09A3NE104-	400	0.10	3	1.062	.400	0471	0472
CH09A1NE224-	400	0.22	1	1.125	.562	0473	0474
CH09A3NE224-	400	0.22	3	1.062	.562	0475	0476
CH09A1NE474-	400	0.47	1	1.625	.562	0477	0478

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:14Z
Check the source to verify that this is the current version before use.

TABLE I. Characteristics - Continued.

PIN 1/	DC rated voltage (volts)	Capacitance value (µF)	Circuit diagram	Dimensions, nominal (inches) 2/ 3/		Superseded MIL-C-18312/1A and MIL-C-18312/2A Capacitance tolerance	
				L ±.062	D +.031 -.051	±10%	±20%
CH09A3NE474-	400	0.47	3	1.562	.562	0479	0480
CH09A1NE105-	400	1.0	1	1.875	.750	0481	0482
CH09A3NE105-	400	1.0	3	1.812	.750	0483	0484
CH09A1NE225-	400	2.2	1	1.875	1.000	0485	0486
CH09A3NE225-	400	2.2	3	1.812	1.000	0487	0488
CH09A1NE335-	400	3.3	1	2.625	1.000	0489	0490
CH09A3NE335-	400	3.3	3	2.562	1.000	0491	0492
CH09A1NF103-	600	0.01	1	.812	.312	0493	0494
CH09A3NF103-	600	0.01	3	.750	.312	0495	0496
CH09A1NF223-	600	0.022	1	.812	.312	0497	0498
CH09A3NE155-	400	0.022	3	.750	.312	0499	0500
CH09A1NF473-	600	0.047	1	1.125	.400	0501	0502
CH09A3NF473-	600	0.047	3	1.062	.400	0503	0504
CH09A1NF104-	600	0.10	1	1.125	.500	0505	0506
CH09A3NF104-	600	0.10	3	1.062	.500	0507	0508
CH09A1NF224-	600	0.22	1	1.375	.562	0509	0510
CH09A3NF224-	600	0.22	3	1.312	.562	0511	0512
CH09A1NF474-	600	0.47	1	1.625	.670	0513	0514
CH09A3NF474-	600	0.47	3	1.562	.670	0515	0516
CH09A1NF105-	600	1.0	1	1.844	1.000	0517	0518
CH09A3NF105-	600	1.0	3	1.781	1.000	0519	0520
CH09A1NF155-	600	1.5	1	1.875	1.000	0521	0522
CH09A3NF155-	600	1.5	3	1.812	1.000	0523	0524
CH09A1NF225-	600	2.2	1	2.625	1.000	0525	0526
CH09A3NF225-	600	2.2	3	2.562	1.000	0527	0528

1/ Complete PIN will include an additional symbol for capacitance tolerance.
2/ Dimensions shown are for bare case. (see).
3/ See table II for metric equivalents.

TABLE II. Millimeter equivalents of decimal inches.

Inches	mm	Inches	mm	Inches	mm
.031	0.79	.688	17.48	1.562	39.67
.051	1.30	.750	19.05	1.625	41.28
.062	1.57	.781	19.84	1.781	45.24
.175	4.45	.812	20.62	1.812	46.02
.195	4.95	.844	21.44	1.844	46.84
.235	5.97	.874	22.20	1.875	47.63
.312	7.92	1.000	25.40	2.312	58.72
.400	10.16	1.062	26.97	2.375	60.33
.500	12.70	1.125	28.58	2.562	65.07
.562	14.27	1.312	33.32	2.625	66.68
.670	17.02	1.375	34.93		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:14Z
Check the source to verify that this is the current version before use.

Case material: Nonmagnetic (end seals may be of magnetic material).

Capacitance value: See table I.

Capacitance tolerance: See table I.

DC rated voltage: See table I.

Seal: Method 112 of MIL-STD-202, condition A. Liquid-filled capacitors: One hour at applicable high ambient temperature ±3°C with no evidence of leakage.

Dielectric withstanding voltage: Method 301 of MIL-STD-202.

Terminal to terminal: 200 percent of rated dc voltage.

Terminal to case (where case not a terminal): 200 percent of rated dc voltage.

Capacitance: Method 305 of MIL-STD-202 (for value and tolerance see table I).

Dissipation factor:

At ±25°C: 1.0 percent.

At high test temperature: 2.0 percent.

Insulation resistance:

Terminal to terminal: See table III.

Terminal to case (case not a terminal): 10,000 megohms.

Barometric pressure: Method 105 of MIL-STD-202. Test condition: .82 inches of mercury (80,000 ft).

Vibration, low frequency: Method 204 of MIL-STD-202, condition B.

Thermal shock: Method 107 of MIL-STD-202, condition A, except the high temperature shall be +125°C for capacitors rated at 200, 400, and 600 volts dc.

Immersion: Method 104 of MIL-STD-202, condition C.

Insulation resistance:

Terminal to terminal: Not less than 1/3 the value specified in table III.

Terminal to case (case not a terminal): 5,000 megohms, minimum.

Dielectric withstanding voltage:

Insulating sleeve: 4,000 volts minimum.

Terminal to terminal: 150 percent of rated dc voltage.

Terminal to case (case not a terminal): 200 percent of rated dc voltage.

Capacitance change: Not to exceed 10 percent of initial value.

Dissipation factor: Not to exceed 110 percent of initial requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:14Z
Check the source to verify that this is the current version before use.

Solderability: Method 208 of MIL-STD-202.

Terminal strength: Method 211 of MIL-STD-202, conditions A and D.

Condition A: Applied force 4 1/2 pounds.

Condition D: 3 twists of 360 degrees.

Low temperature and capacitance change with temperature:

Conditions: 48 hours with rated voltage applied.

Capacitance change: See table III.

Life:

Qualification: Test voltage 140 percent of rated voltage, 1,000 hours at high ambient temperature.

Conformance: 250 hours at conditions specified for 1,000-hour test.

Dissipation factor:

At high ambient test temperature (any time 24 to 48 hours from start of test): Not greater than 2.0 percent.

At high ambient test temperature (any time during last 48 hours of test): Not greater than 2.5 percent.

At +25°C (after life test): Not greater than 1.25 percent.

Capacitance:

At +25°C (after life test): Within 10 percent of initial value.

Insulation resistance: At +25°C (after life test).

Terminal to terminal: Not less than 1/3 of value specified in table III.

Terminal to case (case not a terminal): Not less than 5,000 megohms.

Supersession information: See table I.

TABLE III. Characteristic.

Operating temperature range	-55 to +125°C		-55 to +85°C
DC voltage rating (volts)	200	400, 600	50
High ambient test temperature	+125°C	+125°C	+85°C
Low ambient test temperature	-55°C	-55° C	-55°C
Megohms x microfarads:			
At +25°C	2,000 min	2,000 min	25,000 min
At high ambient test temperature	10 min	40 min	500 min
Insulation resistance (megohms):			
At +25°C 1/	12,000	12,000	50,000
At high ambient test temperature 1/	150	600	5,000
Capacitance change at low temperature	-15% max	-15% max	-8% max
Life test voltage (% rated voltage)	140 %	140 %	140 %

1/ Need not exceed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:14Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-C-18312, this document references MIL-STD-202.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2013-002)

Review activities:
Army - AR
Navy - AS, MC, OS
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:14Z
Check the source to verify that this is the current version before use.