
MILITARY SPECIFICATION SHEET

FILTER, LOW PASS, TYPE FR6QX11YY1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

Ⓑ THIS SPECIFICATION IS INACTIVE FOR NEW DESIGN AFTER THE DATE OF THIS SPECIFICATION

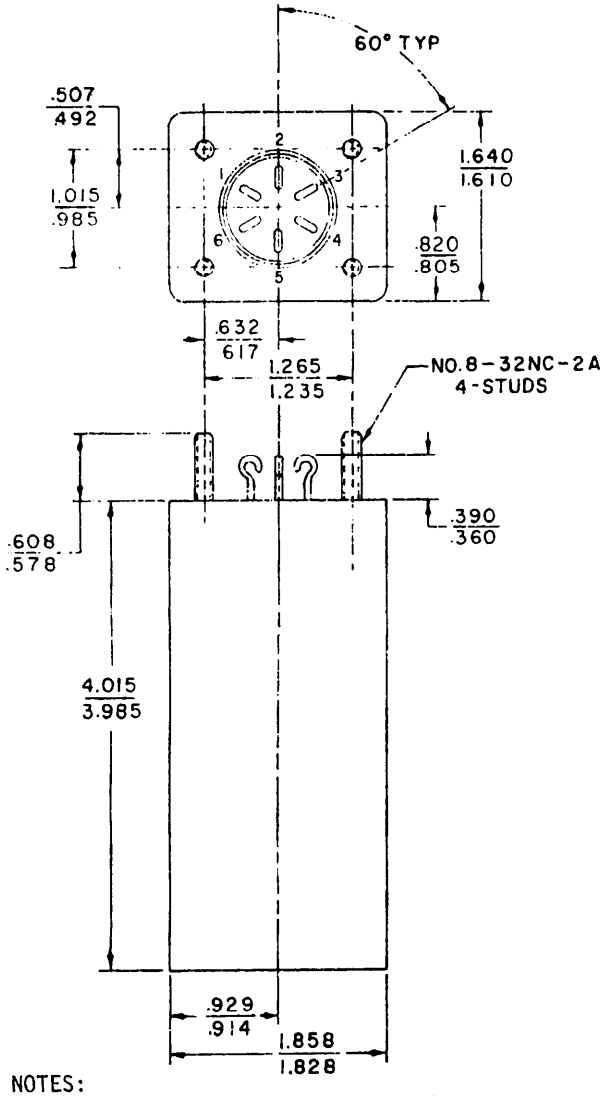

INCHES	MM
.360	9.14
.390	9.91
.492	12.50
.507	12.88
.578	14.68
.608	15.44
.617	15.67
.632	16.05
.805	20.45
.820	20.83
.914	23.22
.929	23.60
.985	25.02
1.015	25.78
1.235	31.37
1.265	32.13
1.610	40.89
1.640	41.66
1.828	46.43
1.858	47.19
3.985	101.22
4.015	101.98

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Terminal identification: Input - 1, 4; Output - 3, 6; Common - 2, 5.

FIGURE 1. Case and mounting dimensions.

Ⓑ denotes changes

Downloaded from http://www.everyspec.com -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable.

Terminal strength: Method 211, MIL-STD-202.

Test condition A - Pull test.

Test condition D - Twist test.

Test condition E - Torque test.

Solderability: Method 208, MIL-STD-202. All terminations, of each filter, to be tested.

Solder dip dwell time: 5 ±1/2 seconds.

Examination of terminations: At 10X magnification.

Dielectric withstanding voltage: Method 301, MIL-STD-202. Test potential 500 Vrms between terminal and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 1,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

4 hours at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

4 hours at +85°C. Electrical measurements to be made in accordance with table I.

Electrical characteristics: See table I.

TABLE I. Electrical characteristics.

Dual section	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB)	Frequency range (Hz)	Discrimination (dB)		DC operating voltage
	Input	Output				Min	Max	
A	100K	100K	140	8 max	80-140 240	40	3	100V
B	100K	100K	300	8 max	80-300 500	40	3	100V

Life: Method 108, test condition F, MIL-STD-202. Test potential 100 Vdc.

Signal input level - 60 Vrms.

Temperature rise: Not applicable.

Vibration: Method 204, test condition B, MIL-STD-202. 10-2,000 Hz. Electrical load not applicable.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202. 100G, 6 milliseconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

Thermal shock: Method 107, test condition A, MIL-STD-202.

Immersion: Method 104, test condition B, MIL-STD-202. Immerse for 15 minutes in saturated solution of sodium chloride and water.

Moisture resistance: Method 106, MIL-STD-202.

Type designation: FR6QX11YY1.

Part number: M18327/010-001.

Ⓑ Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B tests of MIL-F-18327 shall be applicable.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0232-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-18327/10B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.