
MILITARY SPECIFICATION SHEET

FILTERS, BAND PASS, TYPES FR6PX22PB1 AND FR6PX22PC1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

Ⓑ THIS SPECIFICATION IS INACTIVE FOR NEW DESIGN AFTER DATE OF THIS SPECIFICATION

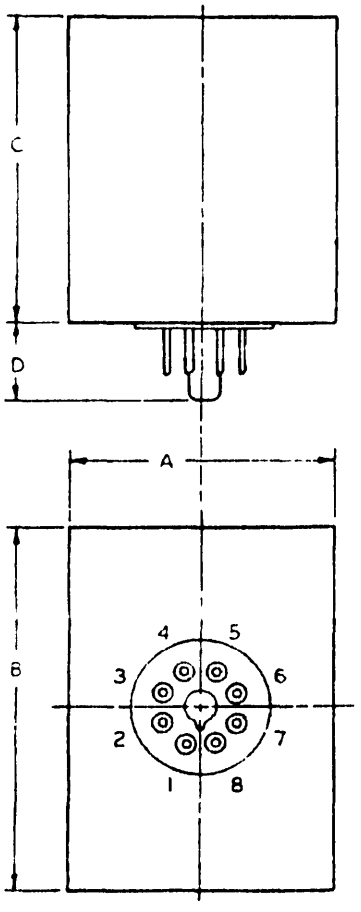

Type designation	Part number	Ltr	Inches	
			Min	Max
FR6PX22PB1	M18327/007-001 thru M18327/007-023	A	2.000 (50.80)	2.124 (53.95)
		B	2.875 (73.03)	2.999 (76.17)
		C	2.500 (63.50)	2.624 (66.65)
		D	.610 (15.49)	.640 (16.26)
FR6PX22PC1	M18327/007-024 thru M18327/007-046	A	2.500 (63.50)	2.624 (66.65)
		B	4.875 (123.83)	4.999 (126.97)
		C	2.500 (63.50)	2.624 (66.65)
		D	.610 (15.49)	.640 (16.26)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. External mounting support required for plug in type filters having no means of support other than socket.
4. Terminal identification: 1 Ground
   2-3 Input
   7-8 Output

FIGURE 1. Case and mounting dimensions.

Ⓑ denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms) Input	Impedance (ohms) Output	Reference frequency (Hz)	Insertion loss (dB) max	Frequency range (Hz)	Discrimination (dB) Min	Discrimination (dB) Max	DC operating voltage
FR6PX22PB1	-001	600	600	425	5	297.5	15		100V
						382.5		3	
						467.5		3	
						552.5	15		
FR6PX22PB1	-002	600	600	595	5	467.5	15		100V
						552.5		3	
						637.5		3	
						722.5	15		
FR6PX22PB1	-003	600	600	765	5	637.5	15		100V
						722.5		3	
						807.5		3	
						892.5	15		
FR6PX22PB1	-004	600	600	935	5	807.5	15		100V
						892.5		3	
						977.5		3	
						1062.5	15		
FR6PX22PB1	-005	600	600	1105	5	977.5	15		100V
						1062.5		3	
						1147.5		3	
						1232.5	15		
FR6PX22PB1	-006	600	600	1275	5	1147.5	15		100V
						1232.5		3	
						1317.5		3	
						1402.5	15		
FR6PX22PB1	-007	600	600	1445	5	1317.5	15		100V
						1402.5		3	
						1487.5		3	
						1572.5	15		
FR6PX22PB1	-008	600	600	1615	5	1487.5	15		100V
						1572.5		3	
						1657.5		3	
						1742.5	15		
FR6PX22PB1	-009	600	600	1785	5	1657.5	15		100V
						1742.5		3	
						1827.5		3	
						1912.5	15		
FR6PX22PB1	-010	600	600	1955	5	1827.5	15		100V
						1912.5		3	
						1997.5		3	
						2082.5	15		
FR6PX22PB1	-011	600	600	2125	5	1997.5	15		100V
						2082.5		3	
						2167.5		3	
						2252.5	15		
FR6PX22PB1	-012	600	600	2295	5	2167.5	15		100V
						2252.5		3	
						2337.5		3	
						2422.5	15		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB) max	Frequency range (Hz)	Discrimination (dB)		DC operating voltage
		Input	Output				Min	Max	
FR6PX22PB1	-013	600	600	2380	5	2252.5	15		100V
						2337.5		3	
						2422.5		3	
						2507.5	15		
FR6PX22PB1	-014	600	600	2465	5	2337.5	15		100V
						2422.5		3	
						2507.5		3	
						2592.5	15		
FR6PX22PB1	-015	600	600	2635	5	2507.5	15		100V
						2592.5		3	
						2677.5		3	
						2762.5	15		
FR6PX22PB1	-016	600	600	2805	5	2677.5	15		100V
						2762.5		3	
						2847.5		3	
						2932.5	15		
FR6PX22PB1	-017	600	600	2975	5	2847.5	15		100V
						2932.5		3	
						3017.5		3	
						3102.5	15		
FR6PX22PB1	-018	600	600	3145	5	3017.5	15		100V
						3103.0		3	
						3187.0		3	
						3272.5	15		
FR6PX22PB1	-019	600	600	3230	5	3102.5	15		100V
						3187.5		3	
						3272.5		3	
						3357.5	15		
FR6PX22PB1	-020	600	600	3315	5	3187.5	15		100V
						3272.5		3	
						3357.5		3	
						3442.5	15		
FR6PX22PB1	-021	600	600	3485	5	3357.5	15		100V
						3442.5		3	
						3527.5		3	
						3612.5	15		
FR6PX22PB1	-022	600	600	3655	5	3527.5	15		100V
						3612.5		3	
						3697.5		3	
						3782.5	15		
FR6PX22PB1	-023	600	600	3825	5	3697.5	15		100V
						3782.5		3	
						3867.5		3	
						3952.5	15		
FR6PX22PC1	-024	600	600	425	8	297.5	35		100V
						382.5		3	
						467.5		3	
						552.5	35		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB) max	Frequency range (Hz)	Discrimination (dB)		DC operating voltage
		Input	Output				Min	Max	
FR6PX22PC1	-025	600	600	595	8	467.5	35		100V
						552.5		3	
						637.5		3	
						722.5	35		
FR6PX22PC1	-026	600	600	765	8	637.5	35		100V
						772.5		3	
						807.5		3	
						892.5	35		
FR6PX22PC1	-027	600	600	935	8	807.5	35		100V
						892.5		3	
						977.5		3	
						1062.5	35		
FR6PX22PC1	-028	600	600	1105	8	977.5	35		100V
						1062.5		3	
						1147.5		3	
						1232.5	35		
FR6PX22PC1	-029	600	600	1275	8	1147.5	35		100V
						1232.5		3	
						1317.5		3	
						1402.5	35		
FR6PX22PC1	-030	600	600	1445	8	1317.5	35		100V
						1402.5		3	
						1487.5		3	
						1572.5	35		
FR6PX22PC1	-031	600	600	1615	8	1487.5	35		100V
						1572.5		3	
						1657.5		3	
						1742.5	35		
FR6PX22PC1	-032	600	600	1785	8	1657.5	35		100V
						1742.5		3	
						1827.5		3	
						1912.5	35		
FR6PX22PC1	-033	600	600	1955	8	1827.5	35		100V
						1912.5		3	
						1997.5		3	
						2082.5	35		
FR6PX22PC1	-034	600	600	2125	8	1997.5	35		100V
						2082.5		3	
						2167.5		3	
						2252.5	35		
FR6PX22PC1	-035	600	600	2295	8	2167.5	35		100V
						2252.5		3	
						2337.5		3	
						2422.5	35		
FR6PX22PC1	-036	600	600	2380	8	2252.5	35		100V
						2337.5		3	
						2422.5		3	
						2507.5	35		

Source: https://assist.dla.mil -- Downloaded: 20260-18T11:18Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB) max	Frequency range (Hz)	Discrimination (dB)		DC operating voltage
		Input	Output				Min	Max	
FR6PX22PC1	-037	600	600	2465	8	2337.5	35		100V
						2422.5		3	
						2507.5		3	
						2592.5	35		
FR6PX22PC1	-038	600	600	2635	8	2507.5	35		100V
						2592.5		3	
						2677.5		3	
						2762.5	35		
FR6PX22PC1	-039	600	600	2805	8	2677.5	35		100V
						2762.5		3	
						2847.5		3	
						2932.5	35		
FR6PX22PC1	-040	600	600	2975	8	2847.5	35		100V
						2932.5		3	
						3017.5		3	
						3102.5	35		
FR6PX22PC1	-041	600	600	3145	8	3017.5	35		100V
						3103.0		3	
						3187.0		3	
						3272.5	35		
FR6PX22PC1	-042	600	600	3230	8	3102.5	35		100V
						3187.5		3	
						3272.5		3	
						3357.5	35		
FR6PX22PC1	-043	600	600	3315	8	3187.5	35		100V
						3272.5		3	
						3357.5		3	
						3442.5	35		
FR6PX22PC1	-044	600	600	3485	8	3357.5	35		100V
						3442.5		3	
						3527.5		3	
						3612.5	35		
FR6PX22PC1	-045	600	600	3655	8	3527.5	35		100V
						3612.5		3	
						3697.5		3	
						3782.5	35		
FR6PX22PC1	-046	600	600	3825	8	3697.5	35		100V
						3782.5		3	
						3867.5		3	
						3952.5	35		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Pin.

Terminal strength: Method 211, MIL-STD-202.

Test condition A - Pull test.

Test condition E - Torque test.

Dielectric withstanding voltage: Method 301, MIL-STD-202. Test potential 500 Vrms between input terminal and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

4 hours at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

4 hours at +65°C. Electrical measurements made in accordance with table I.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202. Rated voltage potential 100 Vdc. Rated input signal level +6 dBm maximum.

Temperature rise: Not applicable.

Vibration: Method 204, test condition B, MIL-STD-202. 10-2,000 Hz. Electrical load not applicable.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202. 100G, 6 milliseconds.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that step 3 shall be +65°C.

Immersion: Method 104, test condition B, MIL-STD-202. Immerse for 15 minutes in saturated solution of sodium chloride and water.

Moisture resistance: Method 106, MIL-STD-202.

Part number: M18327/007 - (dash number from table I).

(P) Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B tests of MIL-F-18327 shall be applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0232-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-18327/7B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy, Code 81112
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.