
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR6QX22AH1


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

Ⓑ THIS SPECIFICATION IS INACTIVE FOR NEW DESIGN AFTER DATE OF THIS SPECIFICATION

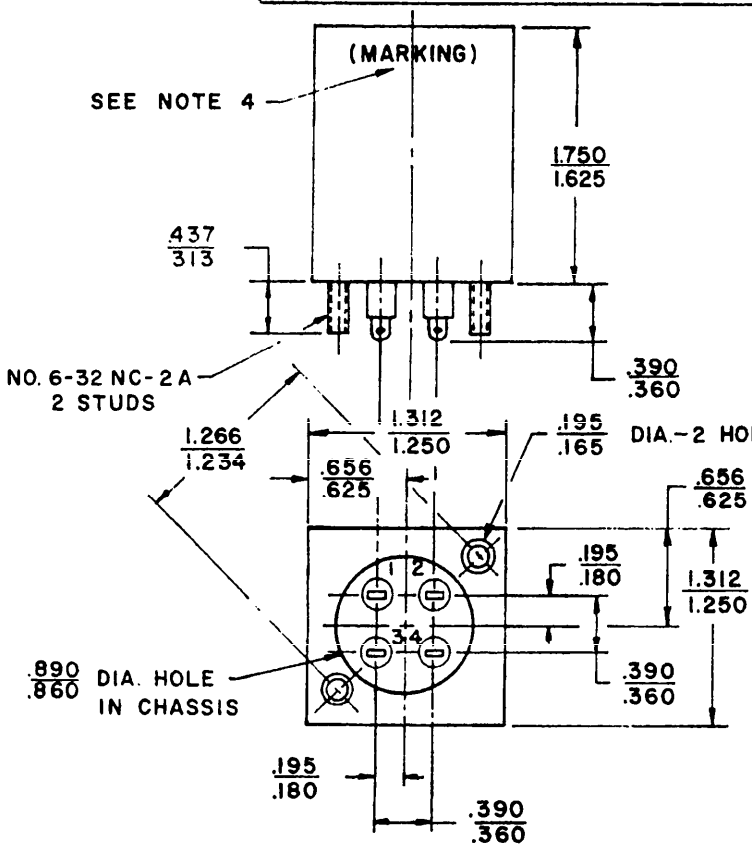

INCHES	MM
.165	4.19
.180	4.57
.195	4.95
.313	7.95
.360	9.14
.390	9.91
.437	11.10
.625	15.88
.656	16.66
.860	21.84
.890	22.61
1.234	31.34
1.250	31.75
1.266	32.16
1.312	33.32
1.625	41.28
1.750	44.45



CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Terminal identification numbers: 1-3 Input
   2-4 Output
4. Marking shall be readable with filter in the position shown.

FIGURE 1. Case and mounting dimensions.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/5965

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

FSC 5915

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable tab.

Rated dc current, terminals 1 to 3: 6 milliamperes.

Terminal strength: Method 211, test condition A, MIL-STD-202.

Applied force - 5 pounds.

Test condition B - 5 bends.

Solderability: Method 208, MIL-STD-202. All terminations, of each filter, to be tested.

Solder dip dwell time: 5 ±1/2 seconds.

Examination of terminations: At 10X magnification.

Dielectric withstanding voltage: Method 301, MIL-STD-202.

At atmospheric pressure: 500 Vrms between each terminal and case.

At reduced pressure: Method 301, MIL-STD-202, and method 105, test condition B, MIL-STD-202. 450 Vrms between each terminal and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 1,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

4 hours at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$C.

4 hours at $+85^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$C.

Electrical characteristics - As specified in table I.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics: As specified in table I.

Life: Method 108, test condition F, MIL-STD-202.

Test temperature $+85^{\circ}\ ^{+10^{\circ}}_{-5^{\circ}}$C.

Signal input level - 1 Vrms at the reference frequency.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Electrical characteristics - As specified in table I.

Temperature rise: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Electrical load not applicable.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202.

Exposure time at temperature extremes: 2 hours.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Immersion: Method 104, test condition B, MIL-STD-202. Filters shall be immersed for 15 minutes in saturated solution of sodium chloride and water.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Part number: M18327/008-001.

TABLE I. Electrical characteristics.

Impedance (ohms)		Reference frequency (kHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB)		DC operating voltage
Input	Output				Min	Max	
10K	10K	75	2 max at reference frequency	15	20		100V
				40		3	
				50 to 100		0.5	
				110		3	
				150	30		
				200	15		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

Ⓡ Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B tests of MIL-F-18327 shall be applicable.

Custodians:
Army - ER
Navy - EC
Air Force - 99

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0232-8)

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-18327/8B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:18Z
Check the source to verify that this is the current version before use.