MIL-STD-242G(NAVY), PART 11
30 September 1983
SUPERSEDING
MIL-STD-242F(NAVY), PART I
SECTION 400, 500, 600, 700,
1000, and 1200

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS

RADIO FREQUENCY COMPONENTS

FSC 59GP

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D. C. 20363

ELECTRONIC EQUIPMENT PARTS, SELECTED STANDARDS, RADIO FREQUENCY COMPONENTS

MIL-STD-242G(NAVY), PART 11
30 September 1983

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to: Commander, Naval Electronic Systems Command, Department of the Navy, Attn: ELEX-8111, Washington, D. C. 20363.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FOREWORD

This Military Standard part provides equipment designers and manufacturers with a list of RF Components having quality levels most acceptable in the design and construction of military systems and equipments. It also will aid to control and minimize the life cycle cost, improve reliability of equipment and minimize logistic support. The criteria used in selecting parts are as follows:

1. Application need. Parts must satisfy the widest range of design requiring reliable parts.

2. Technological maturity. The design of the part must be final and must use proven materials and technologies. It must have been in production for a period sufficient to ensure that the design and process parameters have been identified and adequate quality controls have been developed.

3. Availability. The part must be in production by at least one manufacturer whose previous performance indicates ability to qualify to specifications of this standard. There must also be reasonable expectation that the part will not be obsolescent for at least seven years. Microcircuits are excluded from this requirement because of rapid technological changes.

4. Test or usage history. Sufficient test or usage data to predict part reliability must be available.

In the event of conflict between the technical description of standard parts in this standard and the applicable specification, the applicable specification shall govern.

Technical information included in this standard was obtained from military specifications and standards; no warranty is made of data accuracy, or that inclusion of these parts will assure equipment/systems will meet performance requirements of any contracts. The contractor is responsible for conducting necessary tests and inspections of selected parts to ensure that contract requirements are met.

Review activities:
Navy - AS, SH

User activity:
Navy - MC

Preparing activity:
Navy - EC

(Project Number 59GP-N031-11)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

RADIO FREQUENCY COMPONENTS

1. SCOPE.

1.1 Scope. This standard establishes the requirements for the selection of radio frequency (RF) components used in the design and manufacture of Navy equipment.

1.2 Purpose. The purpose of this standard is to control and minimize the variety of RF components in Navy equipment in order to facilitate effective logistic support, improve quality, and reduce cost.

2. REFERENCED DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-W-85	Waveguides, Rigid, Rectangular General Specification For
MIL-F-3922	Flanges, Waveguide General Specification For
MIL-S-3928	Switches (Coaxial) Radio Frequency, Transmission Line General Specification For
MIL-A-3933	Attenuators, Fixed General Specification For
MIL-D-3954	Dummy Loads, Electrical Waveguide General Specification For
MIL-C-15370	Couplers, Directional (Coaxial Or Waveguide) General Specification For
MIL-W-23068	Waveguides, Rigid, Circular General Specification For
MIL-W-23351	Waveguides, Single Ridge And Double Ridge General Specification For
MIL-P-23971	Power Dividers, Power Combiners, And Power Divider/Combiners General Specification For

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-F-24044	Flanges, Coaxial Line, Rigid, Air, Dielectric General Specification For
MIL-A-24215	Attenuators, Variable (Coaxial And Waveguide) General Specification For
MIL-C-28790	Circulators, Radio Frequency, General Specification For
MIL-I-28791	Isolators, Radio Frequency General Specification For
MIL-L-28796	Line Assemblies, Radio Frequency Transmission General Specification For
MIL-M-28837	Mixer Stages, Radio Frequency General Specification For
MIL-F-39000	Flanges, Waveguide, Ridge General Specification For
MIL-D-39030	Dummy Loads, Electrical, Waveguide General Specification For

STANDARDS

MILITARY

MIL-STD-1327	Flanges, Coaxial And Waveguide; And Coupling Assemblies, Selection Of
MIL-STD-1328	Couplers, Directional (Coaxial Line, Waveguide, And Printed Circuit), Selection Of
MIL-STD-1352	Attenuators, Fixed And Variable, Selection Of
MIL-STD-1358	Waveguides, Rectangular, Ridge And Circular, Selection Of
MIL-STD-1637	Dummy Loads, Electrical, Waveguide, Coaxial, And Stripline, Selection Of
MIL-STD-1639	Power Dividers, Power Combiners, And Power Dividers/Combiners, Selection Of
MIL-STD-1640	Mixer Stages, Frequency, Selection Of

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Scope. The terms used in this standard are defined in referenced documents.

4. GENERAL REQUIREMENTS

4.1 Selection of devices. Selection of devices shall be made from types listed in this standard. The variety of types used in any Navy equipment shall be the minimum necessary to provide satisfactory performance and the contractor (hardware designer builder) shall exercise all reasonable design choice to achieve this objective.

4.2 Criteria. Criteria for inclusion in this standard are as in a through c:

a. The device must satisfy a wide range of design requirements.

b. At least one manufacturer is qualified to the applicable detail specification

c. There is reasonable assurance that the device will be available for at least seven years.

4.3 Characteristics. The characteristics listed herein are for reference only and are intended as an aid in selecting devices. The applicable detail specification shall be used for all final design criteria.

4.4 Conflict of data. In the event of conflict between the technical description of devices in this standard and the applicable detail specification, the detail specification shall govern.

5. IDENTIFICATION

5.1 Component identification. Component identification is the part number or type designator as listed in this standard.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

RADIO FREQUENCY COMPONENTS

TABLE OF CONTENTS

SUBJECT/SECTION		PAGE NUMBER
100	ATTENUATORS	
	102 MIL-A-3933	102.1 - 102.20
	104 MIL-A-24215	104.1 - 104.20
150	CIRCULATORS	
	152 MIL-C-28790	152.1 - 152.8
200	COUPLERS	
	202 MIL-C-15370	202.1 - 202.22
250	DUMMY LOADS	
	252 MIL-D-3954	252.1 - 252.12
	254 MIL-D-39030	254.1 - 254.26
300	FLANGES	
	302 MIL-F-24044	302.1 - 302.6
	304 MIL-F-3922	304.1 - 304.42
	306 MIL-F-39000	306.1 - 306.10
350	ISOLATORS	
	352 MIL-I-28791	352.1 - 352.8
400	LINE ASSEMBLIES	
	402 MIL-L-28796	402.1 - 402.14
450	MIXER STAGES	
	452 MIL-M-28837	452.1 - 452.6
500	POWER DIVIDERS	
	502 MIL-P-23971	502.1 - 502.30
550	SWITCHES	
	552 MIL-S-3928	552.1 - 552.12
600	WAVEGUIDES	
	602 MIL-W-23068	602.1 - 602.2
	604 MIL-W-85	604.1 - 604.14
	606 MIL-W-23351	606.1 - 606.12

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED

SCOPE: THIS SECTION COVERS FIXED ATTENUATORS FOR USE AS ATTENUATING ELEMENTS IN COAXIAL LINES AND WAVEGUIDES. THESE ATTENUATORS ARE USED IN TRANSMISSION LINES OF RADAR, RADIO AND ASSOCIATED EQUIPMENT.

OPERATING TEMPERATURE RANGE: -55°C TO +85°C UNLESS OTHERWISE NOTED ON SLASH SHEET.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 3 GHz, CLASS IIA

MIL-A-3933/1

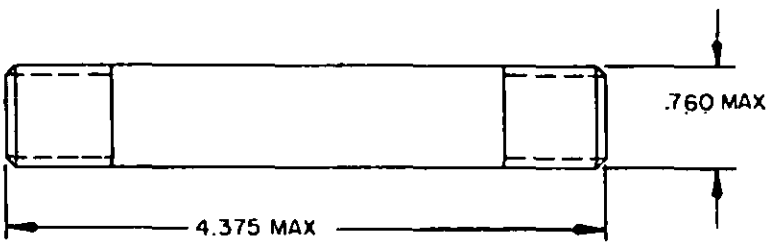


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/1-	ATTENUATION dB		MAX POWER INPUT		VSWR MAX DC TO 3 GHz
	NOMINAL	DEVIATION ± DC TO 3 GHz	AV (W)	PEAK (KW)	
04	40	0.4	1	1	1.20:1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 1.5 GHz, CLASS IIA

MIL-A-3933/6

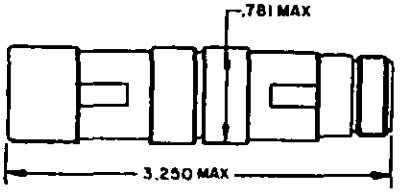


FIGURE 1

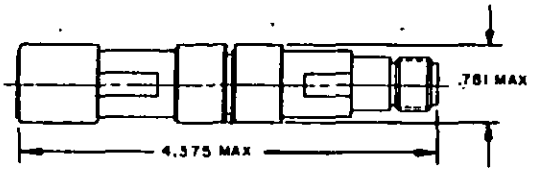


FIGURE 2

TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/6-	FIGURE	ATTENUATION dB		MIN POWER INPUT		VSWR MAX DC TO 1.5 GHz
		NOMINAL	DEVIATION ± DC TO 1.5 GHz	AV (W) (CONT.)	PEAK (KW)	
1	1	10	0.1	1	1	1.15:1
3	1	6	0.1	1	1	1.15:1
5	1	12	0.1	1	1	1.15:1
9	2	20	0.2	1	1	1.15:1
10	2	30	0.3	1	1	1.15:1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: 1 TO 4 GHz, CLASS IIB

MIL-A-3933/2

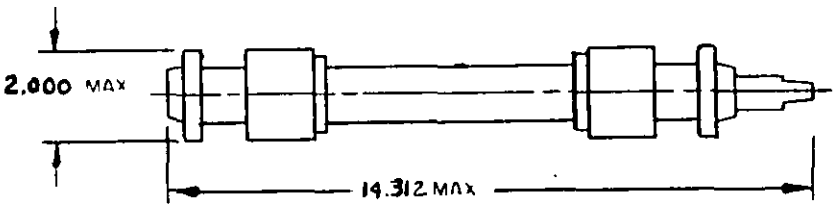


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/2-	ATTENUATION dB		MIN POWER INPUT		VSWR MAX 1 TO 4 GHz
	NOMINAL	DEVIATION ± 1 TO 4 GHz	AV (W) (CONT.)	PEAK (KW)	
2	3	0.1	10	20	1.30:1
3	6	0.1	5	10	1.30:1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: 2 TO 10 GHz, CLASS IIB

MIL-A-3933/4

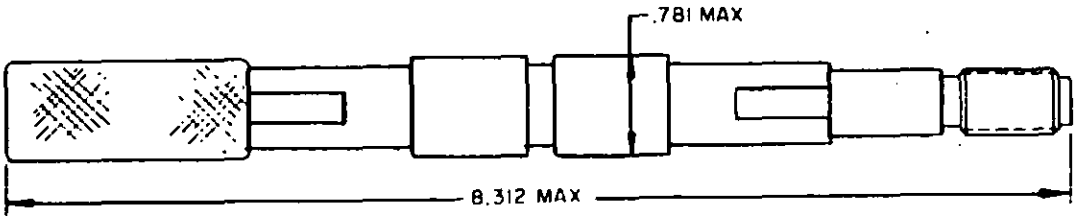


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/4-	ATTENUATION dB		MIN POWER INPUT		VSWR MAX 1 TO 4 GHz
	NOMINAL	DEVIATION ± 2 TO 10 GHz	AV (W) (CONT.)	PEAK (KW)	
1	20	0.2	1	1	1.30:1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: 1 TO 10 GHz, CLASS IIB

MIL-A-3933/5

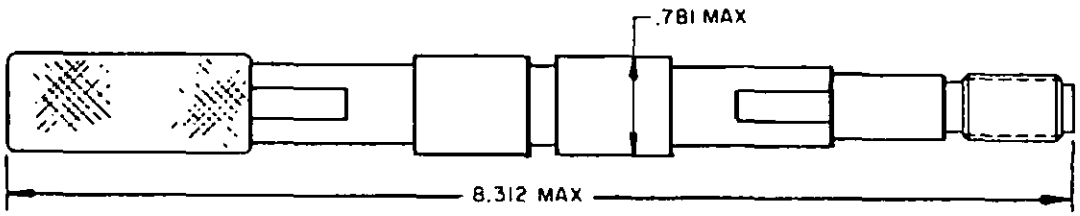


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/5-	ATTENUATION dB		MIN POWER INPUT		VSWR MAX
	NOMINAL	DEVIATION ± 1 TO 10 GHz	AV (W) (CONT.)	PEAK (KW)	1 TO 10 GHz
1	3	0.1	5	10	1.30:1
2	6	0.1	3	6	1.30:1
3	10	0.1	1	2	1.30:1
4	7	0.1	3	6	1.30:1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 4 GHz, CLASS IIB

MIL-A-3933/8

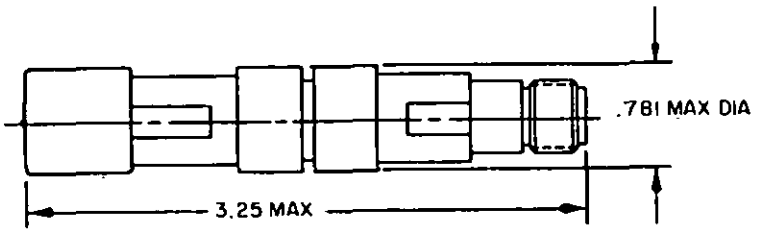



TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/8-	ATTENUATION dB		MIN POWER INPUT		VSWR MAX DC TO 4 GHz
	NOMINAL	DEVIATION ± DC TO 4 GHz	AV (W) (CONT.)	PEAK (KW)	
1	3	0.1	1	1	1.30:1
2	6	0.1	1	1	1.30:1
3	10	0.1	1	1	1.30:1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 2.0 GHz, SMA CONNECTORS, CLASS IIB

MIL-A-3933/25

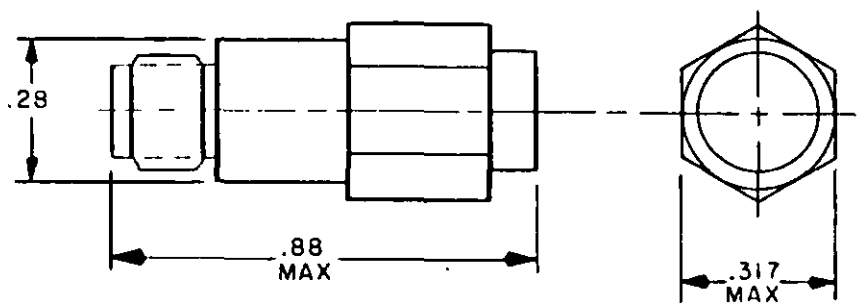

OPERATING TEMPERATURE RANGE: -55°C TO +125°C

POWER INPUT IS DERATED LINEARLY TO 0.5 WATT AT +125°C.

TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/25-	ATTENUATION dB		MAX POWER INPUT		VSWR MAX
	NOMINAL	DEVIATION ± DC TO 2.0GHz	AV (W) AT 25°C	PEAK (W)	
01	1	0.3	2	500	1.05:1MAX AT DC
02	2	0.3	2	500	1.20:1MAX OVER
03	3	0.3	2	500	FREQUENCY RANGE
04	4	0.3	2	500	
05	5	0.3	2	500	
06	6	0.3	2	500	
07	7	0.3	2	500	
08	8	0.3	2	500	
09	9	0.3	2	500	
10	10	0.3	2	500	

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 1 GHz, CLASS III

MIL-A-3933/3

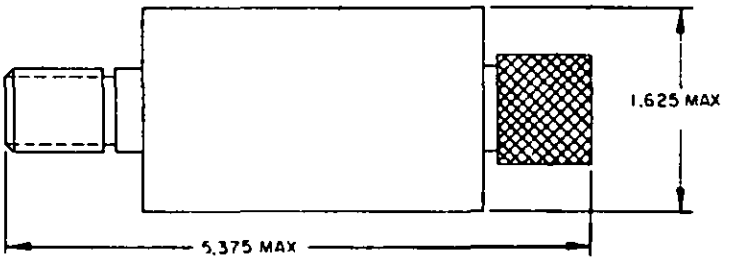


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/3-	ATTENUATION dB		MIN POWER INPUT		VSWR MAX DC TO 1 GHz
	NOMINAL	DEVIATION ± DC TO 1 GHz	AV (W) (CONT.)	PEAK (KW)	
5	3	0.2	10	10	1.30:1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 2 GHz, CLASS III

MIL-A-3933/9

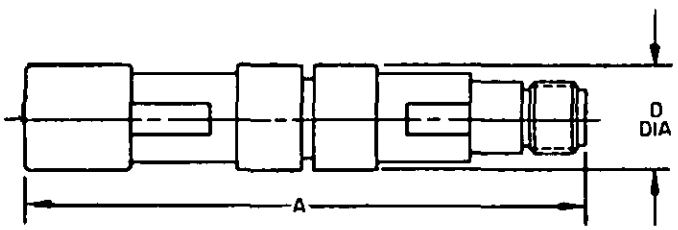


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/9-	ATTENUATION dB		MIN POWER INPUT		VSWR MAX DC TO 2 GHz	DIMENSIONS	
	NOMINAL	DEVIATION ± DC TO 2 GHz	AV (W) (CONT.)	PEAK (KW)		A	D
1	3	0.2	2	2	1.30:1	2.75	.875
2	30	0.6	2	2	1.30:1	3.00	.875
3	50	1.0	2	2	1.30:1	3.80	.875

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 4 GHz, CLASS III

MIL-A-3933/10


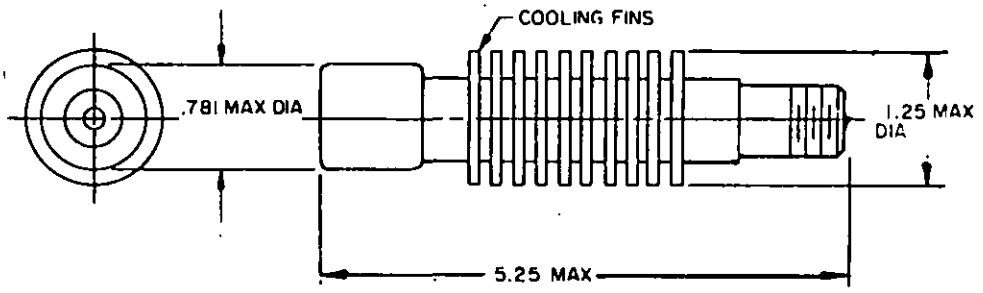


FIGURE 1 M3933/10-1

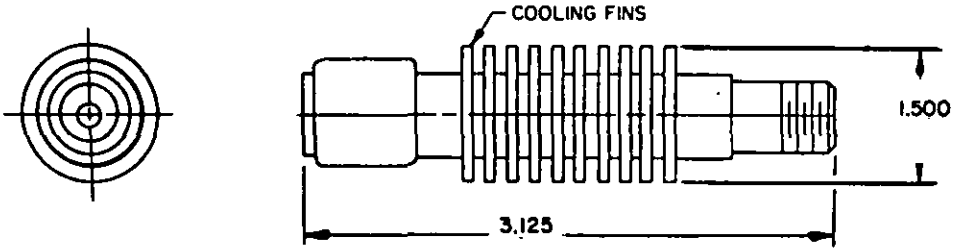

OPERATING TEMPERATURE RANGE: -55°C TO +125°C
FIGURE 2 M3933/10-2 THRU -5

TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/10-	FIGURE	ATTENUATION dB		MAX POWER INPUT		VSWR MAX DC TO 4 GHz
		NOMINAL	DEVIATION + DC TO 4 GHz	AV (W) (CONT.)	PEAK (KW)	
1	1	6	0.2	15	3	1.30:1
2	2	3	0.5	20	1	1.15:1
3	2	10	0.5	20	1	1.15:1
4	2	20	0.5	20	1	1.15:1
5	2	30	0.75	20	1	1.35:1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 3 GHz, AND DC TO 12.4 GHz, CLASS III

MIL-A-3933/18

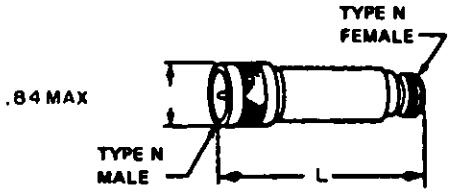


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS


PART NO. M3933/18-	ATTENUATION dB			MAX POWER INPUT		VSWR MAX		DIMENSION L MAX
	NOMINAL	DEVIATION ±		AV (W)	PEAK (KW)			
		DC TO 3GHz	DC TO 12.4GHz			DC TO 3GHz	DC TO 12.4GHz	
01	3	---	0.2	2.0	1.0	---	1.25:1	2.75
02	6	---	0.2	2.0	1.0	---	1.25:1	2.75
03	10	---	0.4	2.0	1.0	---	1.25:1	2.75
04	20	---	0.4	2.0	1.0	---	1.25:1	2.75
05	30	0.3	1.0#	2.0	1.0	1.20:1	1.35:1	2.89
06	40	0.5	1.0#	2.0	1.0	1.20:1	1.35:1	3.06
07	50	0.5	2.0#	2.0	1.0	1.20:1	1.35:1	3.7
08	60	0.5	2.0#	2.0	1.0	1.20:1	1.35:1	3.7


FREQUENCY RANGE IS 3 GHz TO 12.4 GHz

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, STRIPLINE
FREQUENCY RANGE: DC TO 12 GHz, CLASS III

MIL-A-3933/22

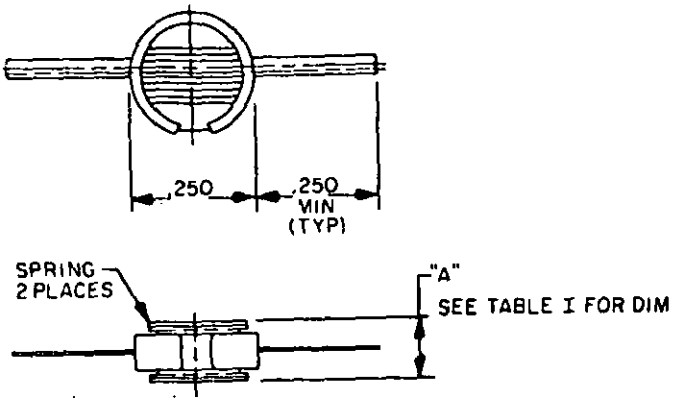



SCHEMATIC
BALANCED TO GROUND

OPERATING TEMPERATURE RANGE: -55°C TO +125°C

TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/22-	ATTENUATION dB		MAX POWER INPUT		VSWR MAX	DIMENSION A
	NOMINAL	DEVIATION DC TO 12 GHz	AV (W) AT 25°C	PEAK (W)	DC TO 12 GHz	
01	3	+5%	1	100	1.2:1	.125
02	6	+5%	1	100	1.2:1	.125
03	10	+5%	1	100	1.2:1	.125
04	20	+5%	1	100	1.2:1	.250

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, TO-5 CONFIGURATION
FREQUENCY RANGE: DC TO 1 GHz, CLASS III

MIL-A-3933/23

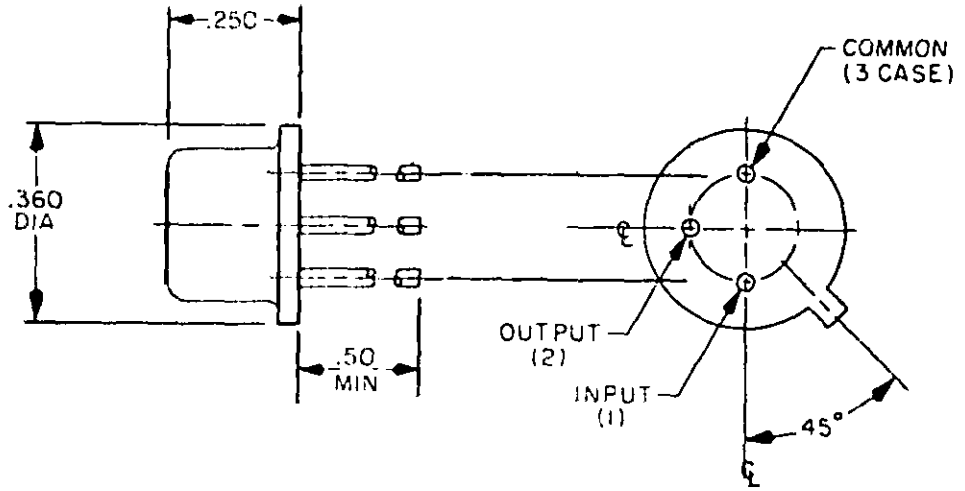


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/23-	ATTENUATION dB DC TO 1 GHz	PART NO. M3933/23-	ATTENUATION dB DC TO 1 GHz
01	3	21	19
02	6	22	21
03	10	23	22
04	13	24	23
05	15	25	24
06	20	26	25
07	30	27	26
08	1	28	27
09	2	29	28
10	4	30	29
11	5	31	31
12	7	32	32
13	8	33	33
14	9	34	34
15	11	35	35
16	12	36	36
17	14	37	37
18	16	38	38
19	17	39	39
20	18	40	40
		41	100

OPERATING TEMPERATURE RANGE: -55°C TO +71°C
VSWR: 1.35:1 MAX
AVERAGE POWER INPUT: 100 mW MAX

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 1.5 GHz, CLASS IV
PART NUMBERS M3933/11-1 THROUGH -4

MIL-A-3933/11

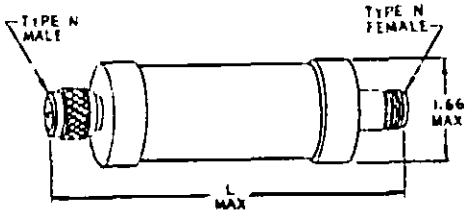



TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/11-	ATTENUATION dB			MIN POWER INPUT		VSWR MAX		DIMENSION L MAX
	NOMINAL	DEVIATION ±		AV (W)	PEAK (KW)			
		DC TO 1.0GHz	1.0 TO 1.5GHz			DC TO 1.0GHz	1.0 TO 1.5GHz	
1	3	0.2	0.5	15	10	1.15	1.30	5.38
2	6	0.2	0.5	10	10	1.15	1.30	5.38
3	10	0.2	0.5	10	10	1.15	1.30	5.38
4	20	0.5	1.0	10	10	1.15	1.30	6.82

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 12.4 GHz, SMA CONNECTORS, CLASS IV

MIL-A-3933/14

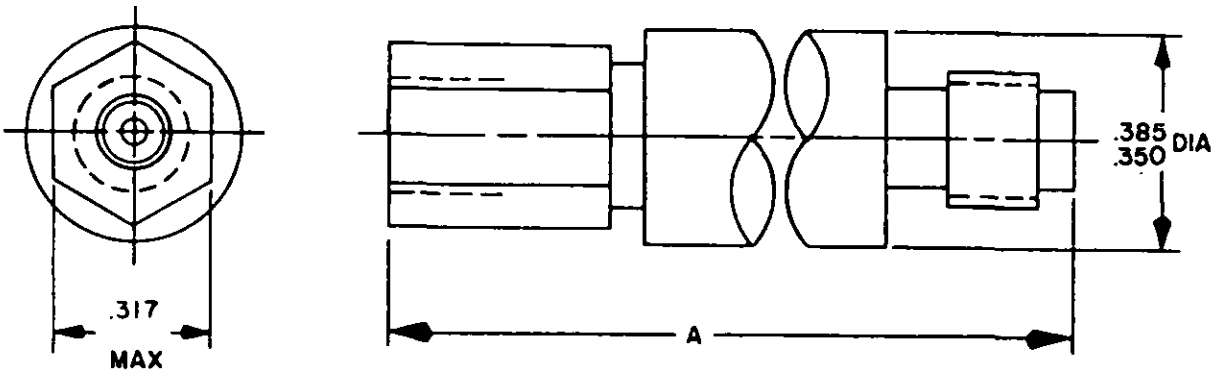

POWER INPUT IS DERATED LINEARLY TO 1 WATT AT +75°C AND TO 10% AT +125°C


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/14-	ATTENUATION dB		MAX POWER INPUT 25°C		VSWR MAX		DIMENSION A MAX
	NOMINAL	DEVIATION ± DC TO 12.4 GHz	AV (W)	PEAK (KW)	DC TO 4 GHz	4 TO 12.4GHz	
01	3	0.3	2	0.2	1.15:1	1.30:1	1.240
02	6	0.3	2	0.2	1.15:1	1.30:1	1.240
03	10	0.3	2	0.2	1.15:1	1.30:1	1.240
04	20	0.5	2	0.2	1.15:1	1.30:1	1.240
13	30	0.8	2	0.2	1.35:1	1.35:1	1.850
14	40	0.8	2	0.2	1.35:1	1.35:1	1.850

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 18.0 GHz, SMA CONNECTORS, CLASS IV

MIL-A-3933/16

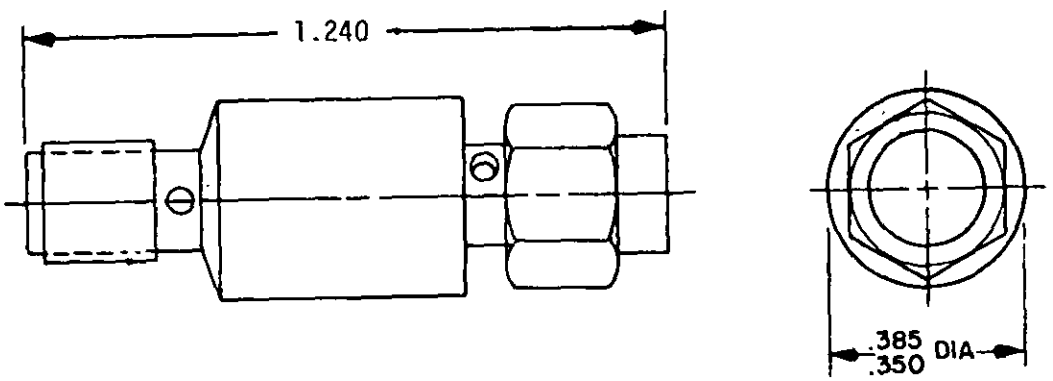

OPERATING TEMPERATURE RANGE: -65°C TO +105°C
POWER INPUT IS DERATED LINEARLY TO 1 WATT AT +75°C AND TO 0 WATT AT +125°C


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/16-	ATTENUATION dB		MAX POWER INPUT 25°C		VSWR MAX			
	NOMINAL	DEVIATION ± DC TO 18.0 GHz	AV (W)	PEAK (KW)	DC TO 4.0 GHz	4.0 TO 8.0 GHz	8.0 TO 12.4GHz	12.4 TO 18.0GHz
01	3	0.3	2	0.5	1.15:1	1.20:1	1.25:1	1.35:1
01S	3	0.3	2	0.5	1.15:1	1.20:1	1.25:1	1.35:1
02	6	0.3	2	0.5	1.15:1	1.20:1	1.25:1	1.35:1
02S	6	0.3	2	0.5	1.15:1	1.20:1	1.25:1	1.35:1
03	10	0.5	2	0.5	1.15:1	1.20:1	1.25:1	1.35:1
03S	10	0.5	2	0.5	1.15:1	1.20:1	1.25:1	1.35:1
04	20	0.7	2	0.5	1.15:1	1.20:1	1.25:1	1.35:1
04S	20	0.7	2	0.5	1.15:1	1.20:1	1.25:1	1.35:1

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: DC TO 1 AND 2 GHz, CLASS IV
PART NUMBERS M3933/17-01 THROUGH -08

MIL-A-3933/17

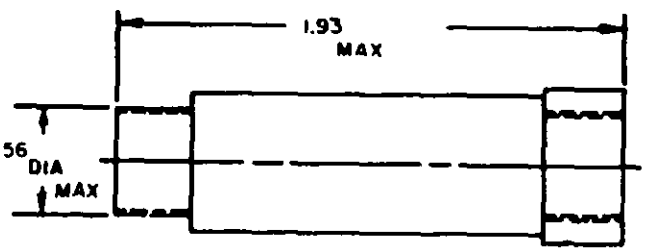

OPERATING TEMPERATURE RANGE: -20°C TO +125°C


TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/17-	ATTENUATION dB			MAX POWER INPUT		VSWR MAX	
	NOMINAL	DEVIATION ±		AV (W)	PEAK (KW)		
		DC TO 1 GHz	DC TO 2 GHz			DC TO 1 GHz	DC TO 2 GHz
01	1	0.3	0.6	1	1	1.2:1	1.5:1
02	2	0.3	0.6	1	1	1.2:1	1.5:1
03	3	0.3	0.6	1	1	1.2:1	1.5:1
04	4	0.3	0.6	1	1	1.2:1	1.5:1
05	5	0.3	0.6	1	1	1.2:1	1.5:1
06	6	0.3	0.6	1	1	1.2:1	1.5:1
07	20	0.3	0.6	1	1	1.2:1	1.5:1
08	30	0.3	0.6	1	1	1.2:1	1.5:1

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, FIXED, COAXIAL LINE
FREQUENCY RANGE: 2 TO 12.4 GHz, BULKHEAD, SMA CONNECTORS, CLASS IV

MIL-A-3933/24

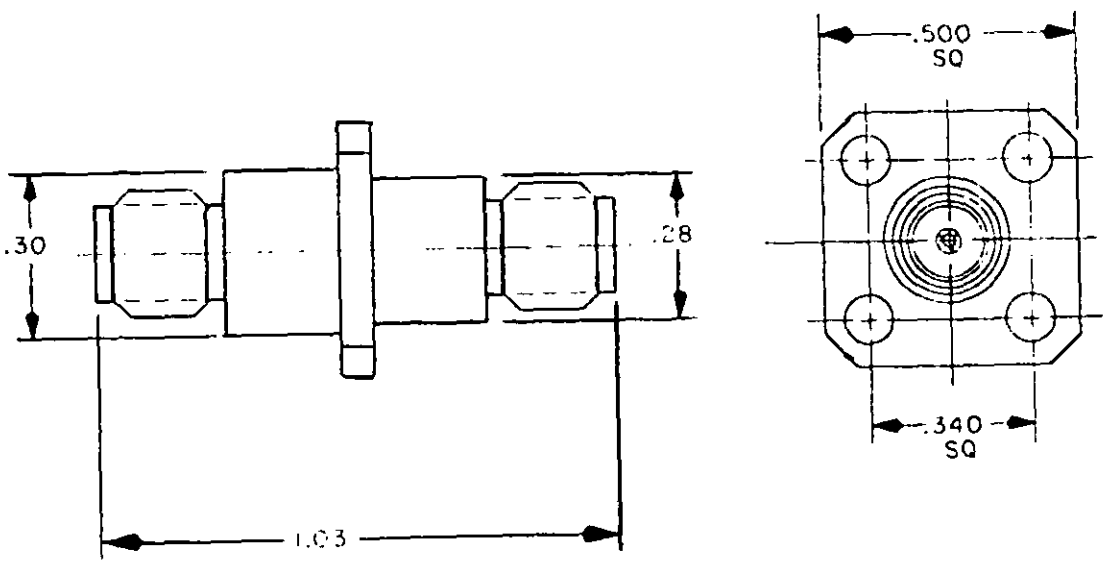

OPERATING TEMPERATURE RANGE: -55°C TO +125°C

POWER INPUT IS DERATED LINEARLY FROM +25°C TO 0.2 WATT AT +125°C.

TABLE I. ELECTRICAL AND PHYSICAL CHARACTERISTICS

PART NO. M3933/24-	ATTENUATION dB		MAX POWER INPUT		VSWR MAX 2 TO 12.4 GHz
	NOMINAL	DEVIATION ± 2 TO 12.4GHz	AV (W) AT 25°C	PEAK (W)	
01	10	0.3	2	100	1.07+.015
02	15	0.5	2	100	1.07+.015
03	20	0.5	2	100	1.07+.015

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL AND WAVEGUIDE)
MIL-A-24215

SCOPE: THIS SECTION COVERS VARIABLE ATTENUATORS FOR USE AS ATTENUATING ELEMENTS IN COAXIAL LINES AND WAVEGUIDES. THESE ATTENUATORS ARE INTENDED FOR USE IN MICROWAVE SYSTEMS TO REDUCE RADIO FREQUENCY POWER BY A KNOWN AMOUNT OR TO A REQUIRED LEVEL. CALIBRATED PRECISION ATTENUATORS MAY ALSO BE USED TO CALIBRATE OTHER ATTENUATORS HAVING A LOWER ORDER OF ACCURACY.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 1 (N)

MIL-A-24215/12

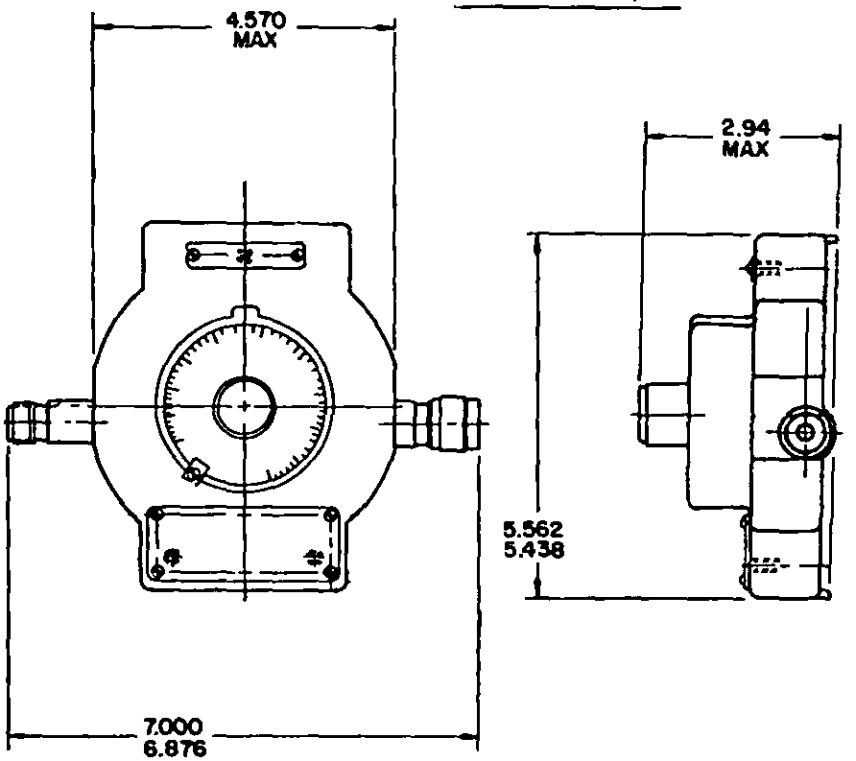
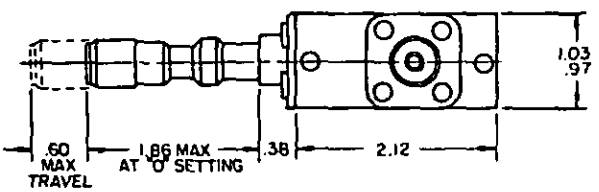


FIGURE 1. M24215/12-001



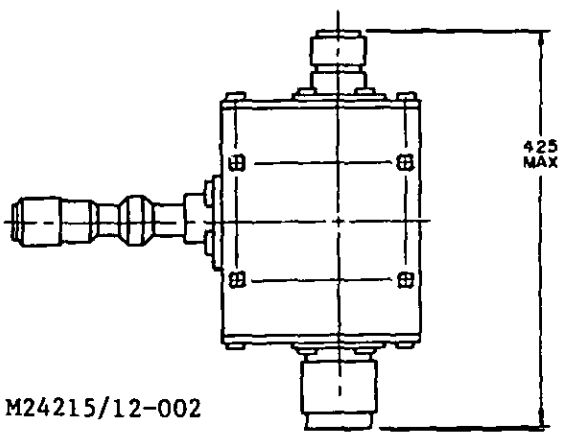


FIGURE 2. M24215/12-002

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 1 (N)

MIL-A-24215/12

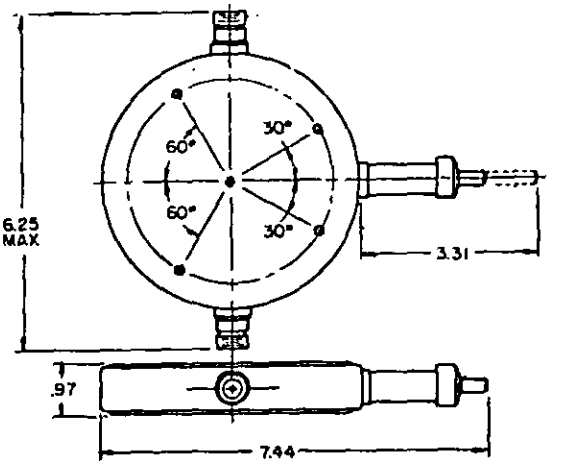


FIGURE 3. M24215/12-003

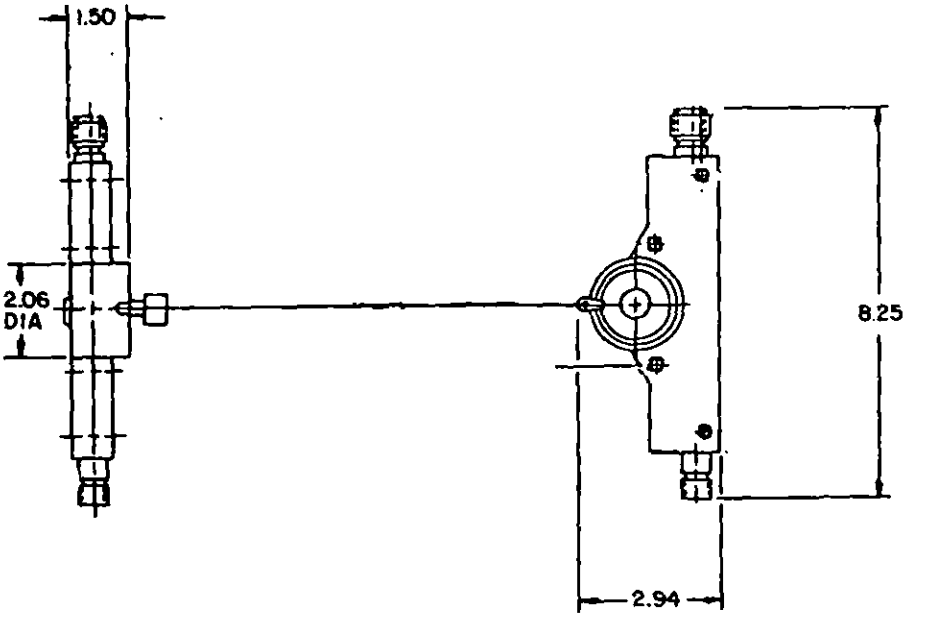


FIGURE 4. M24215/12-004

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS I (N)

MIL-A-24215/12

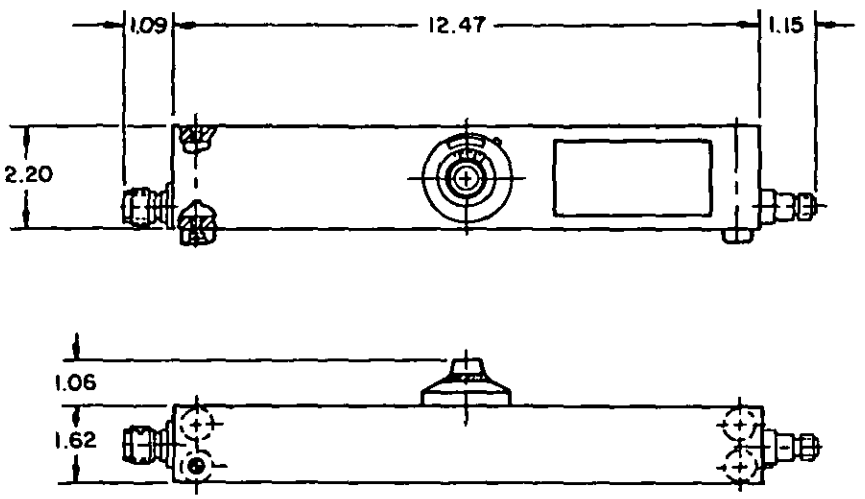


FIGURE 5. M24215/12-005

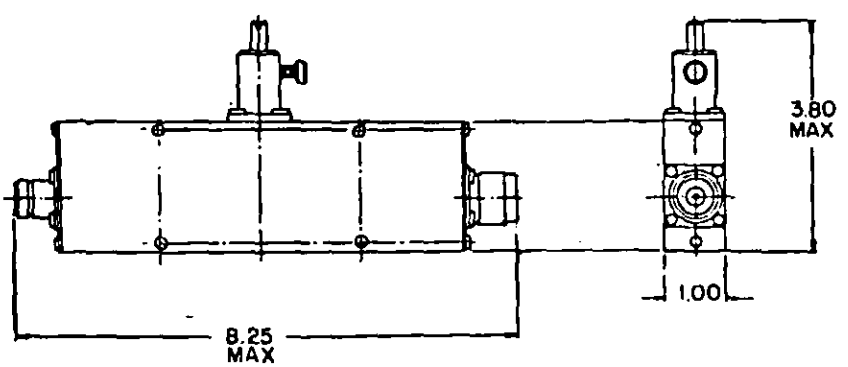


FIGURE 6. M24215/12-006

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 1 (N)

MIL-A-24215/12

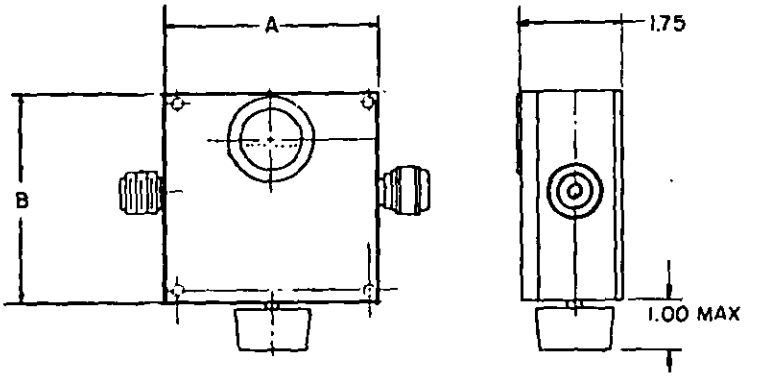


FIGURE 7. M24215/12-007, 008, AND 009

PART NO. M24215/12-	DIMENSIONS	
	A	B
007	4.83	4.28
008	8.50	5.23
009	6.75	4.61

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 1 (N)

MIL-A-24215/12

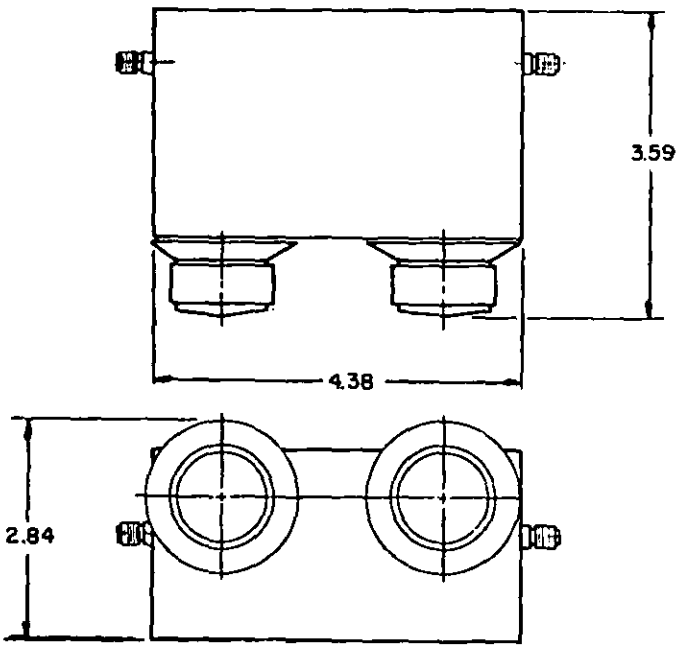


FIGURE 8. M24215/12-010

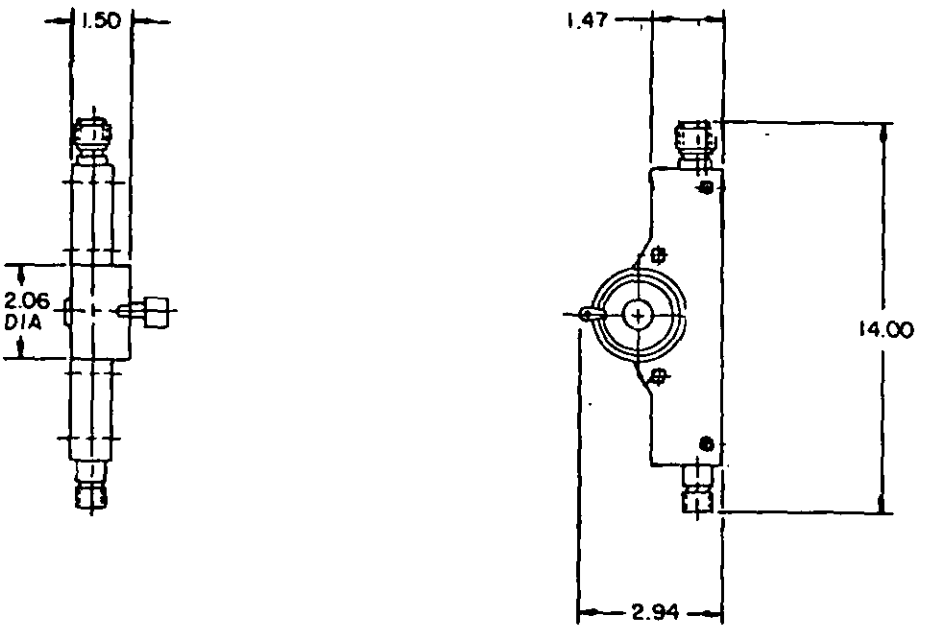


FIGURE 9. M24215/12-011

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 1 (N)

MIL-A-24215/12

NOMINAL IMPEDANCE: 50 OHMS
NOMINAL OPERATING TEMPERATURE RANGE: 0°C TO +65°C

PART NO. M24215/12-	FIG.	FREQ. RANGE GHz	ATTEN. RANGE dB	VSWR MAX	INSERTION LOSS (MAX AT MIN. ATTEN. SETTING) dB	FREQUENCY SENSITIVITY dB	MAX INPUT WATTS	
							AVG.	PEAK
001	1	DC-1.0	0-10	1.5:1	0.8	1.0	2	60
002	2	0.5-1.0	0-10	1.5:1	0.5	---	2	60
003	3	0.8-2.5	0-30	1.5:1	0.2	---	10	5KW
004	4	3.0-3.7	0-10	1.5:1	0.5	-0.4	1	1KW
005	5	2.0-5.0	0-20	1.5:1	0.5	0.2 OR 5%	2	2KW
006	6	0.3-8.0	0-25 @0.3GHz TO 8.0GHz	1.5:1	0.7	---	10	---
007	7	4.0-8.0	0-20	1.25:1	1.0	---	10	5KW
008	7	4.0-8.0	0-40	1.25:1	1.5	---	10	5KW
009	7	7.0-11.0	0-40	1.25:1	1.5	---	10	5KW
010	8	DC-12.4	0-99	1.50:1	0.8	---	2	200
011	9	2.5-11.0	0-20	1.60:1 @2.5-4.0 GHz 1.50:1 @4-11GHz	1.0	0.5	1	1KW

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 4 (TNC)

MIL-A-24215/14

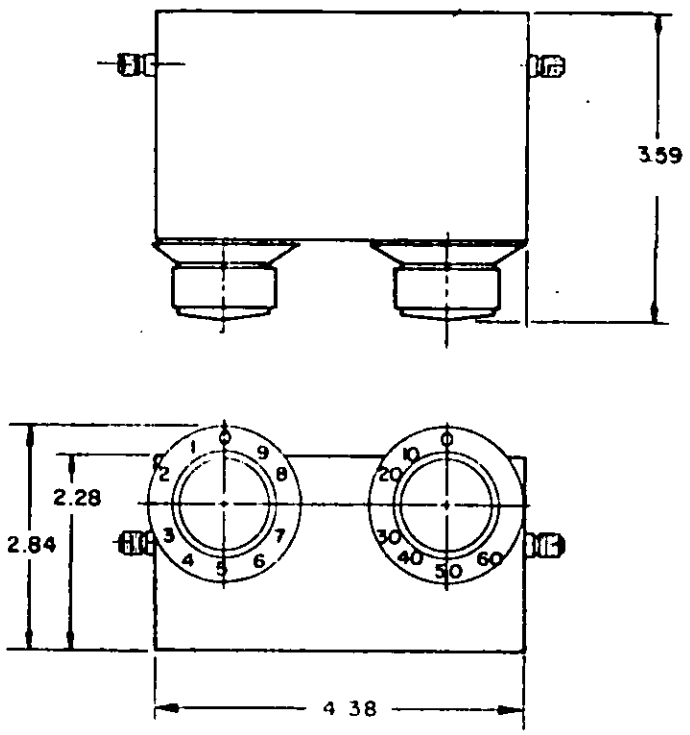


FIGURE 1. M24215/14-01.

NOMINAL IMPEDANCE: 50 OHMS

PART NO. M24215/14-	FIG.	FREQ. RANGE GHz	ATTEN. RANGE dB	VSWR MAX	INSERTION LOSS (MAX) dB	ACCURACY dB	FREQUENCY SENSITIVITY dB	MIN INPUT WATTS	
								AVG.	PEAK
01	1	DC-12.4	0-69	1.50:1	0.8	+1.8	---	2	200

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 5 (SMA)

MIL-A-24215/8

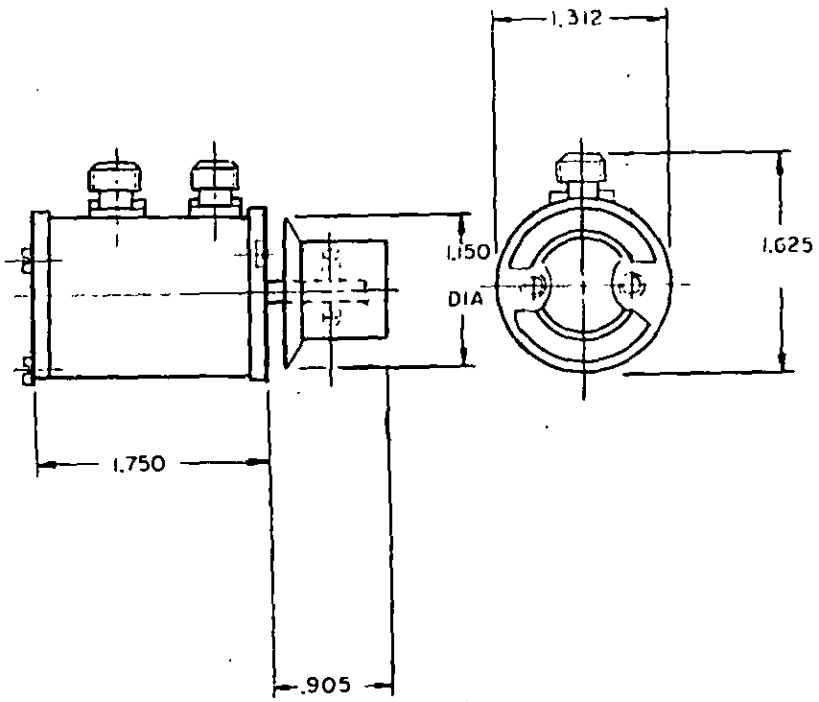


FIGURE 1. M24215/8-01 AND -02.

INPUT AND OUTPUT IMPEDANCE: 50 OHMS

OPERATING AMBIENT TEMPERATURE RANGE: -20°C TO +125°C

PART NO. M24215/8-	FIG.	FREQ. RANGE GHz	ATTEN. RANGE dB	VSWR MAX	INSERTION LOSS (MAX) dB	ACCURACY dB	MAX INPUT WATTS AVERAGE
001	1	DC - 2	0-10	1.25:1 AT 2GHz	0.5	+0.5 AT 2GHz	0.5
002	1	DC - 1	0-1	1.20:1 AT 1GHz	1.0	+0.05 AT 1GHz	0.5

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 5 (SMA)

MIL-A-24215/9

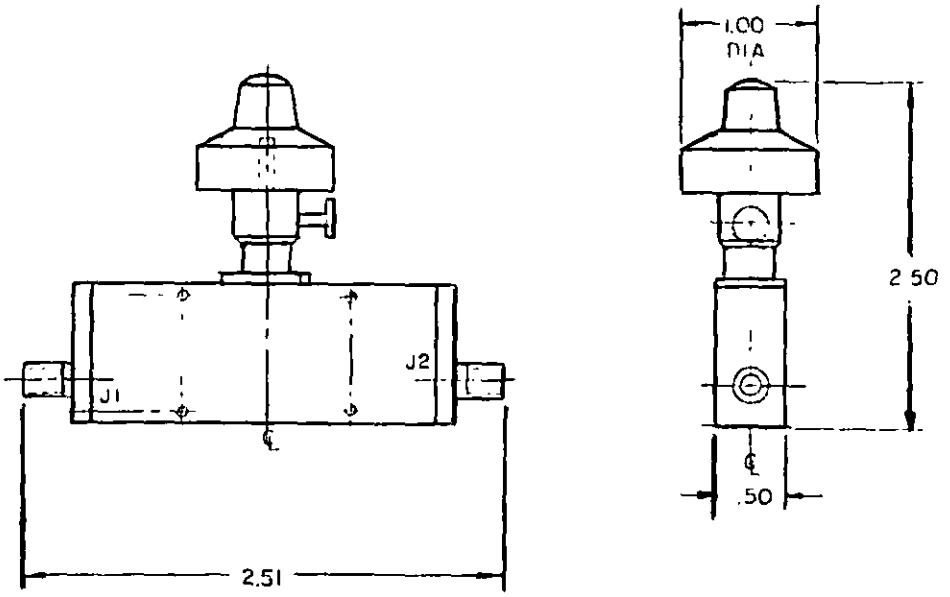


FIGURE 1. M24215/9-001.

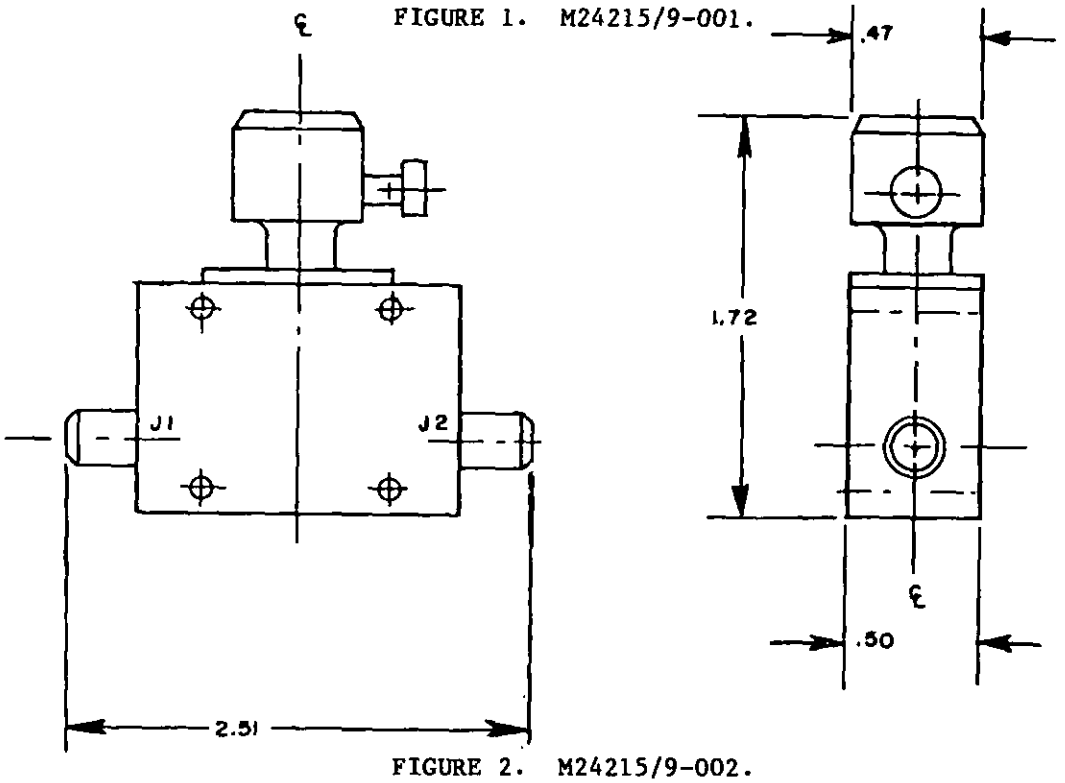


FIGURE 2. M24215/9-002.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 5 (SMA)

MIL-A-24215/9

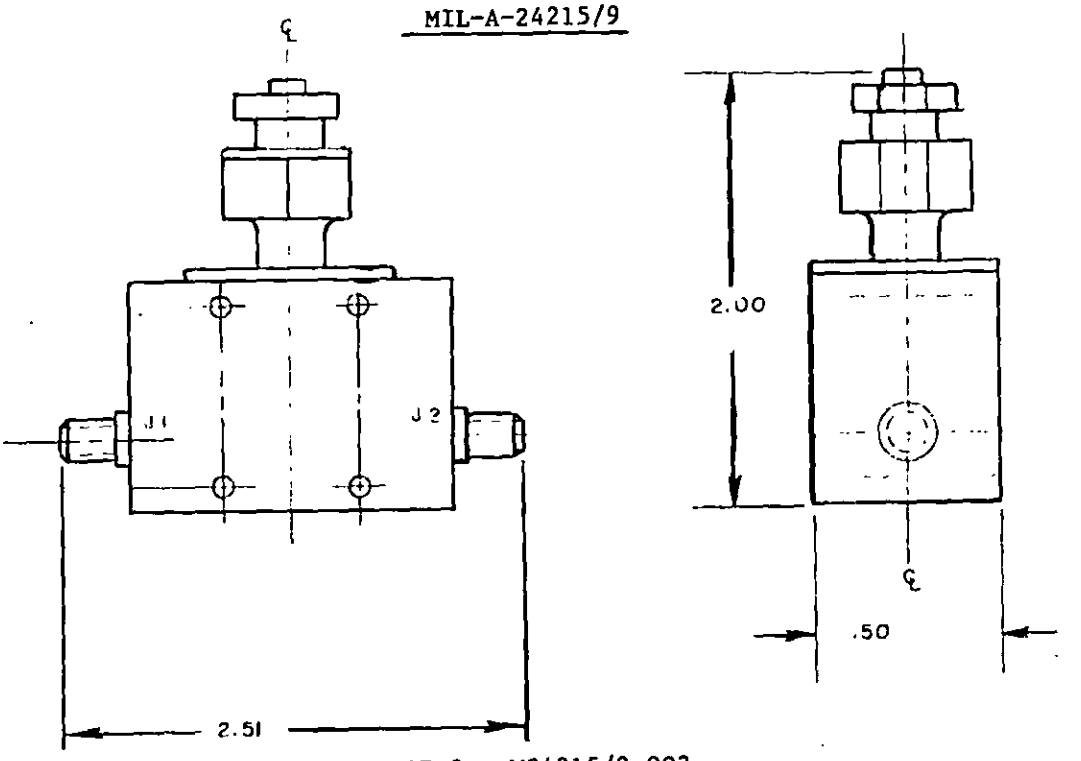


FIGURE 3. M24215/9-003.

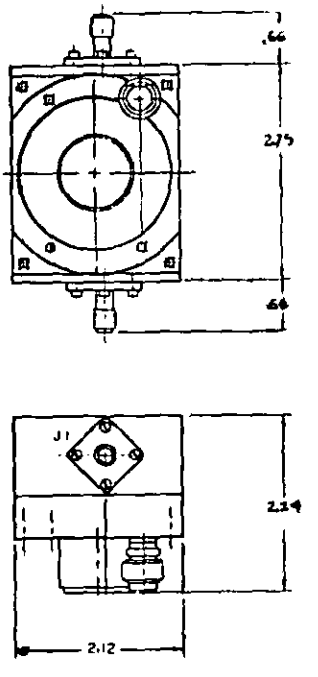


FIGURE 4. M24215/9-005.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL), CLASS 5 (SMA)

MIL-A-24215/9

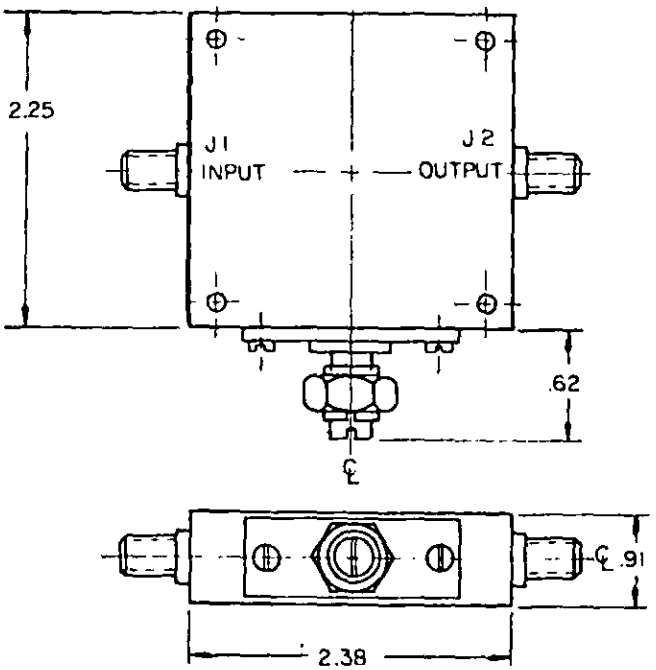


FIGURE 5. M24215/9-004.
NOMINAL IMPEDANCE: 50 OHMS
VSWR MAX: 1.50:1
NOMINAL OPERATING TEMPERATURE RANGE: DASH NO. 001, 002, 003: -45°C TO +110;
DASH NO. 004: -18°C TO +70°C; DASH NO. 005 -30°C TO +105°C

PART NO. M24215/9-	FIG.	FREQ. RANGE GHz	ATTEN. RANGE dB	INSERTION LOSS (MAX AT MIN. ATTEN. SETTING) dB	CALIBRATION ACCURACY dB	FREQ SNSTVTY dB	MIN INPUT WATTS	
							AVG.	PEAK
001	1	2-8	0-15 AT 2GHz 0-20 AT 4-8GHz	0.5	N/A	+1	2	---
002	2	2-8		0.5	N/A	+1	2	---
003	3	7-11	0-20	0.5	N/A	+1.5	2	---
004	5	9.0-9.2	0-30	0.7	±0.5	+0.3	2	200
005	4	4.0-18	0-15	1.0	N/A	+2	5	3000

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL, STEP), CLASS 5 (SMA)

MIL-A-24215/13

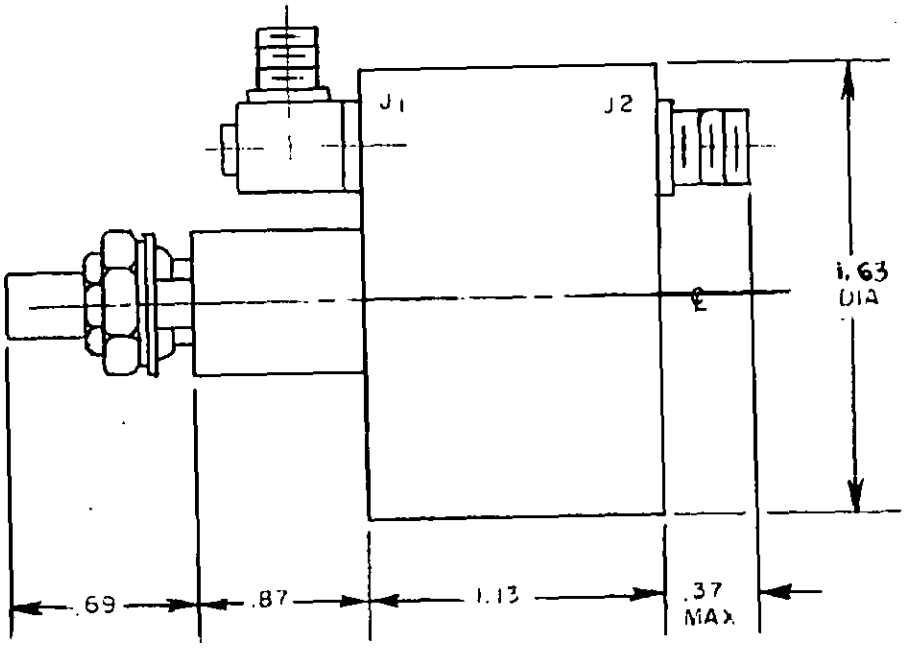


FIGURE 1. M24215/13-01.


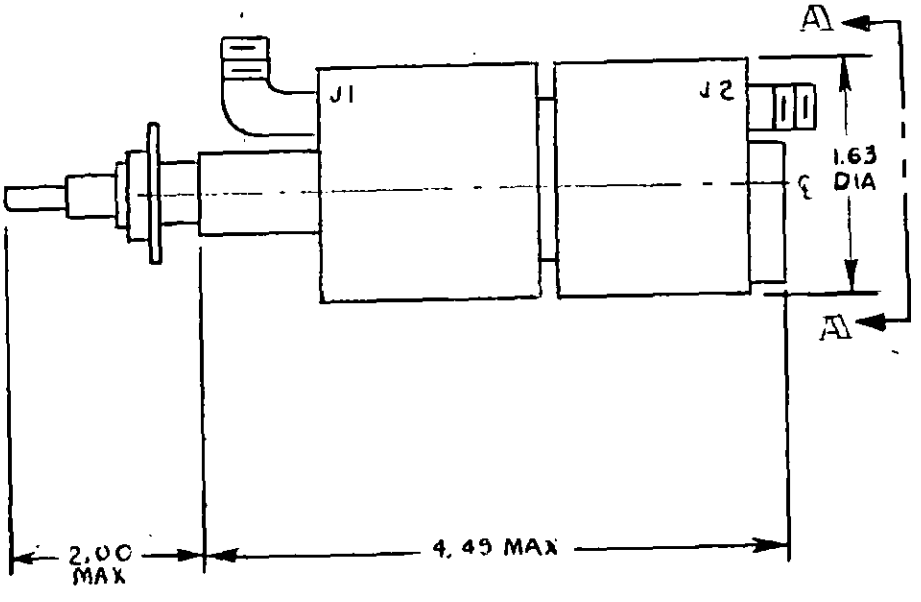


FIGURE 2. M24215/13-02.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL, STEP), CLASS 5 (SMA)

MIL-A-24215/13

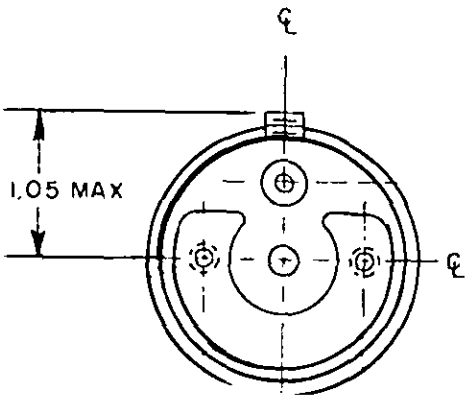

VIEW A-A

FIGURE 3. M24215/13-02 (CONT.)

INPUT AND OUTPUT IMPEDANCE: 50 ±2 OHMS

OPERATING TEMPERATURE RANGE: 0 TO 70°C

PART NO. M24215/13-	FIG.	FREQ. RANGE GHz	ATTEN. RANGE dB	VSWR MAX	INSERTION LOSS (MAX) dB	ACCURACY dB	FREQUENCY SENSITIVITY dB	MIN INPUT WATTS	
								AVG.	PEAK
01	1	DC-18	0-9	1.5:1	1.0	±0.5	+0.05	2	200
02	2,3	DC-4	0-99	1.35:1	0.6	±1.6 FOR 90-99	+0.05	2	200

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL, STEP), CLASS 7

MIL-A-24215/6

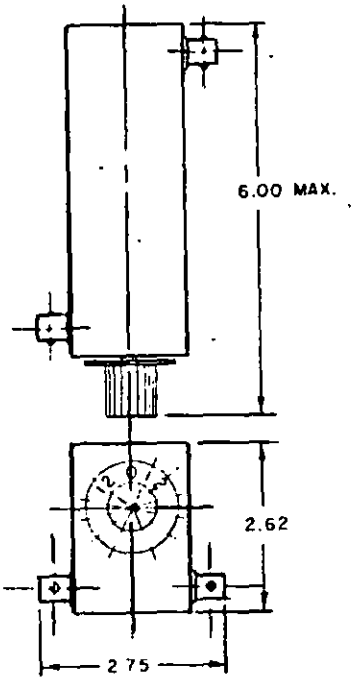


FIGURE 1. M24215/6-001 AND -002.

NOMINAL IMPEDANCE: 50 OHMS

PART NO. M24215/6-	FIG.	FREQ. RANGE GHz	ATTEN. RANGE dB	VSWR MAX	INSERTION LOSS (MAX) dB	ACCURACY dB	MAX INPUT WATTS	
							AVG.	PEAK
001	1	DC-1	0-12	1.5:1	1.50	±0.35	0.5	350
002	1	DC-1	0-120	1.5:1	1.50	±3.0	0.5	350

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (COAXIAL, STEP), CLASS 7 (BNC)

MIL-A-24215/10

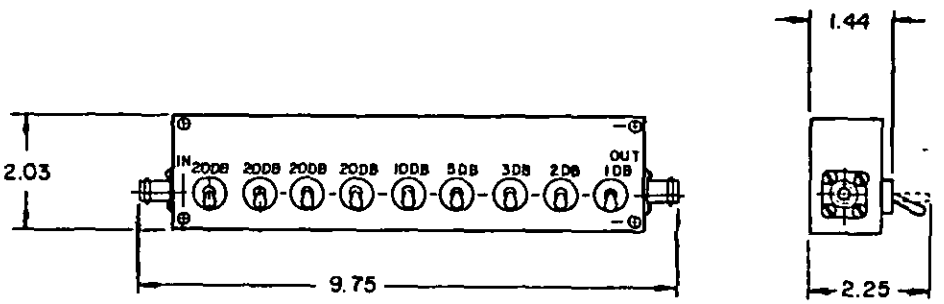


FIGURE 1. M24215/10-001 AND -002.

NOMINAL IMPEDANCE: 50 OHMS FOR -001; AND 75 OHMS FOR -002.
VSWR MAX: 1.41:1

OPERATING AMBIENT TEMPERATURE RANGE: 0°C TO +65°C

PART NO. M24215/10-	FIG.	FREQ. RANGE GHz	ATTEN. RANGE dB	INSERTION LOSS (MAX) dB	ACCURACY dB	MAX INPUT WATTS AVERAGE
001	1	DC - 1	0-101	0.6	±2 OR 2%	1.0
002	1	DC-0.5	0-101	0.2	±2 OR 2%	0.5

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (WAVEGUIDE), CLASS 14

MIL-A-24215/4


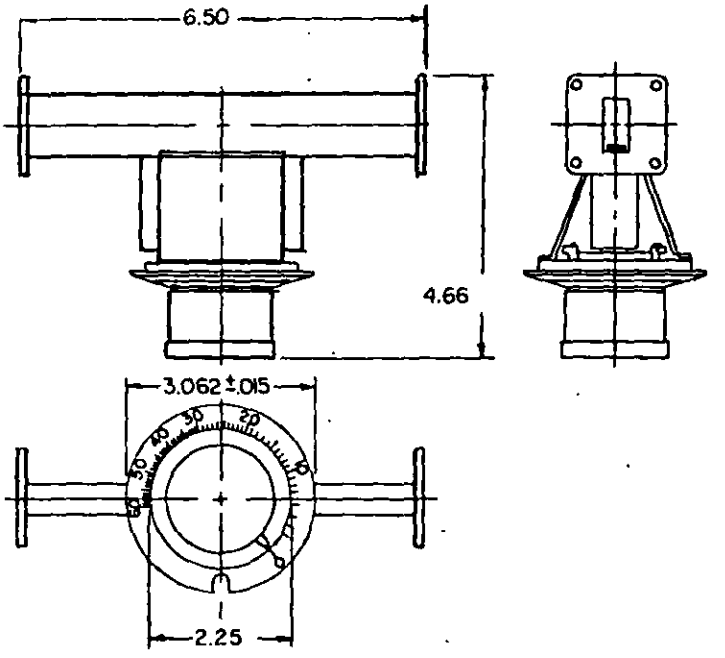


FIGURE 1. M24215/4-001.

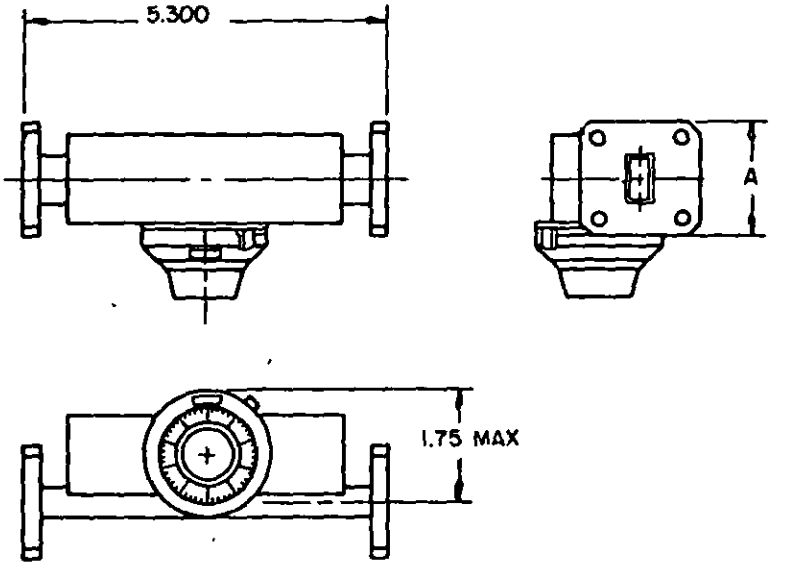

PART NO.	DIMENSION "A"
M24215/4-002	1.69
M24215/4-003	1.31

FIGURE 2. M24215/4-002 AND -003

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (WAVEGUIDE), CLASS 14

MIL-A-24215/4

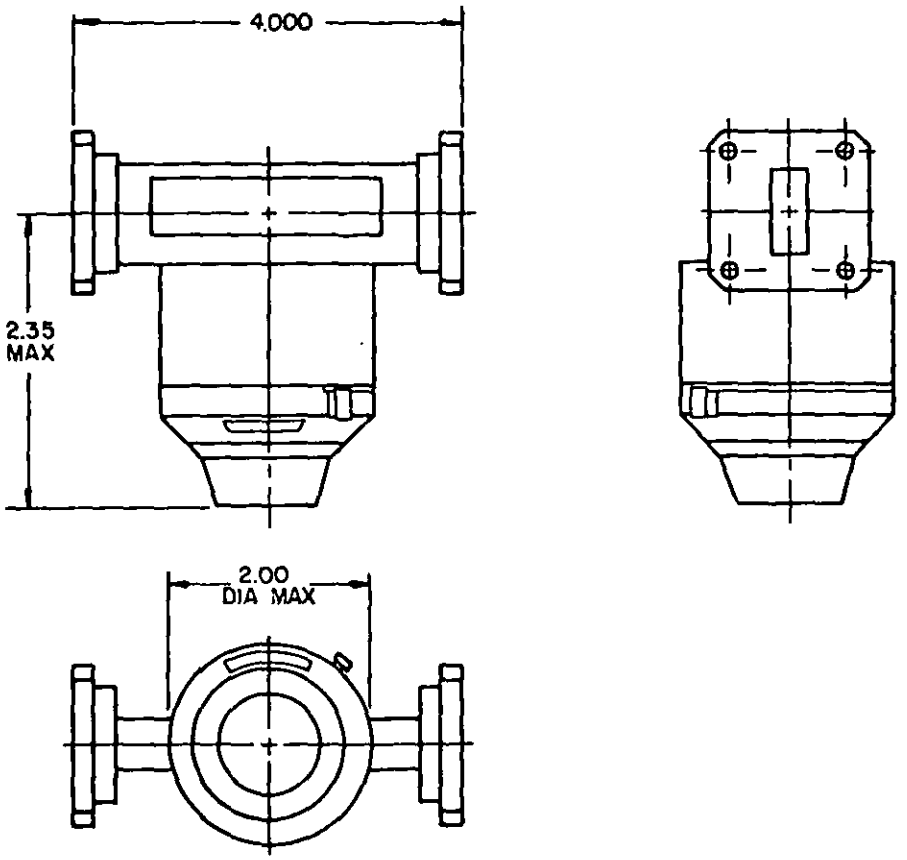


FIGURE 3. M24215/4-004, -005, -006.


NOMINAL OPERATING TEMPERATURE RANGE: 0°C TO +65°C

PART NO. M24215/4-	FIG.	FREQ. RANGE GHz	ATTEN. RANGE dB	VSWR MAX	INSER-TION LOSS dB	DIAL BACK-LASH	FREQUENCY SENSITIVITY dB	MAX INPUT WATTS AVG.	MAX INPUT WATTS PEAK	FLANGE M3922/53-
001	1	8.5-9.6	0-60	1.15:1	1.0	---	±2	1	---	001 (UG-39/U)
002	2	7.0-11.0	0-20	1.25:1	0.3	0.1	0.1 OR 2%	5	100	UG-1493/U
003	2	10.8-18.0	0-20	1.25:1	0.3	0.1	0.1 OR 2%	5	100	005 (UG-419/U)
004	3	11.0-17.0	0-30	1.4:1	0.5	FIG3	±2	1	100	006 (UG-1665/U)
005	3	12.4-18.0	0-30	1.15:1	0.5	FIG3	±2	1	100	006 (UG-1665/U)
006	3	12.4-18.0	0-30	1.15:1	0.5	FIG3	±2	1	100	005 (UG-419/U)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

ATTENUATORS, VARIABLE, (WAVEGUIDE, ROTATING VANE), CLASS 14

MIL-A-24215/5

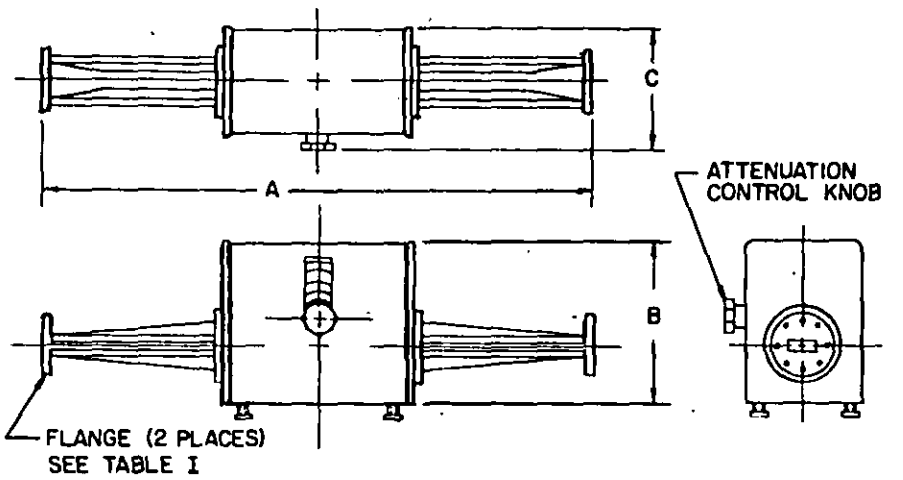

PART NO. M24215/5-	DIMENSIONS		
	A	B	C
001	31.62	9.62	7.75
002	25.12	7.94	6.50
003	15.62	7.62	4.69
004	12.52	7.75	4.75

FIGURE 1. M24215/5-001, -002, -003, AND -004

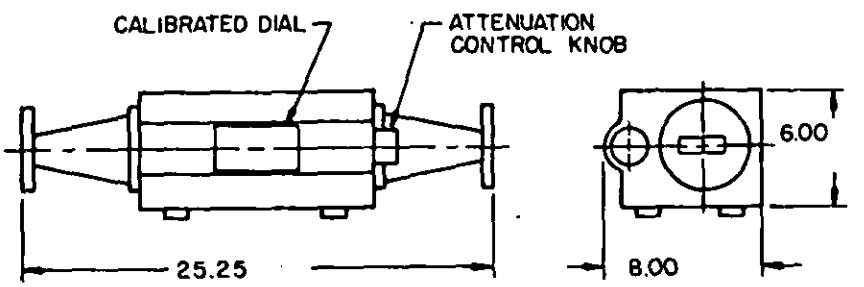


FIGURE 2. M24215/5-005

NOMINAL OPERATING TEMPERATURE RANGE: 0°C TO +65°C

PART NO. M24215/5-	FIG.	FREQ. RANGE GHz	ATTEN. RANGE dB	VSWR MAX	INSERTION LOSS dB	CALIBRATION ACCURACY dB	MAX INPUT WATTS AVERAGE	FLANGE M3922/
001	1	3.95-5.85	0-50	1.15:1	<1	±2% OR 0.1	15	57-001 (UG-407/U)
002	1	5.3-8.2	0-50	1.15:1	<1	±2% OR 0.1	10	55-002 (UG-441/U)
003	1	8.2-12.4	0-50	1.15:1	<1	±2% OR 0.1	10	53-003 (UG-135/U)
004	1	12.4-18.0	0-50	1.15:1	<1	±2% OR 0.1	5	53-006 (UG-1665/U)
005	2	02.6-3.95	0-60	1.15:1	<1	±1% OR 0.1	10	56-001 (UG-53/U)

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

ATTENUATORS, VARIABLE, (COAXIAL), LOW FREQUENCY, PLUG-IN

MIL-A-24215/11

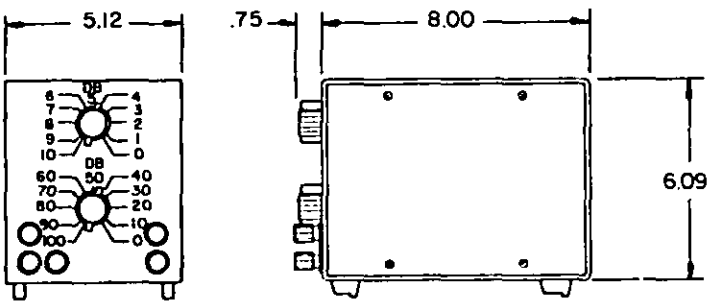


FIGURE 1. M24215/11-001.

INPUT AND OUTPUT IMPEDANCE: 600 OHMS

DC ISOLATION: SIGNAL GROUND MAY BE +500 VDC ABOVE CHASSIS.

OPERATING AMBIENT TEMPERATURE RANGE: -20°C TO +65°C

PART NO. M24215/11-	FIG.	FREQ. RANGE MHz	ATTEN. RANGE dB	INSERTION LOSS (MAX) dB	ACCURACY dB	MAX INPUT WATTS AVERAGE
001	1	DC - 1	0-100	---	±0.25 FOR 10dB ±0.75 FOR 100dB	5

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.


CIRCULATORS, RADIO FREQUENCY

MIL-C-28790

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR CIRCULATORS, COAXIAL, WAVEGUIDE, AND STRIP-LINE RADIO FREQUENCY FOR USE IN ARMED-SERVICE RADAR AND RADIO APPLICATION. CIRCULATORS ARE INTENDED FOR USE IN MILITARY EQUIPMENT IN THE FREQUENCY RANGE SPECIFIED.

CIRCULATORS, RADIO FREQUENCY, COAXIAL (SERIES SMA), THREE PORTS

MIL-C-28790/1

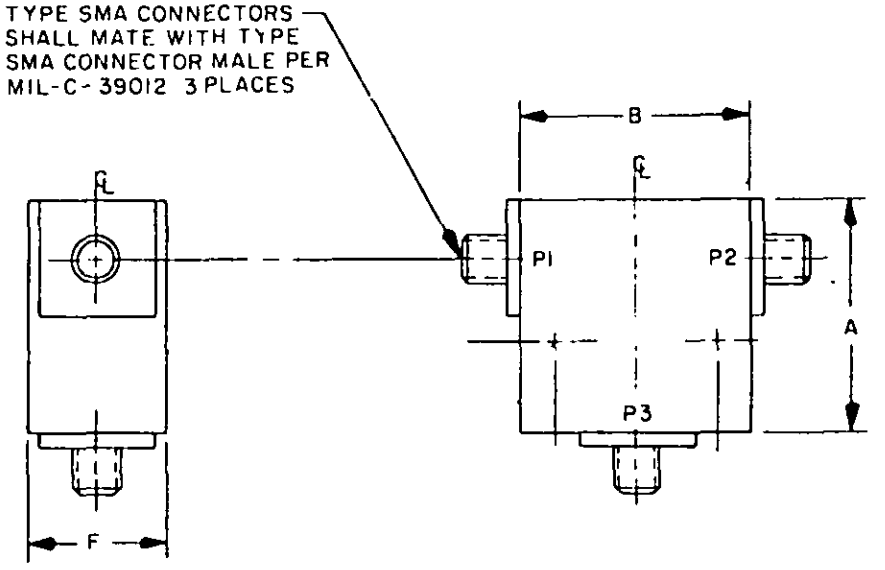


M28790/1-001-005

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCULATORS, RADIO FREQUENCY, COAXIAL (SERIES SMA), THREE PORTS

MIL-C-28790/1

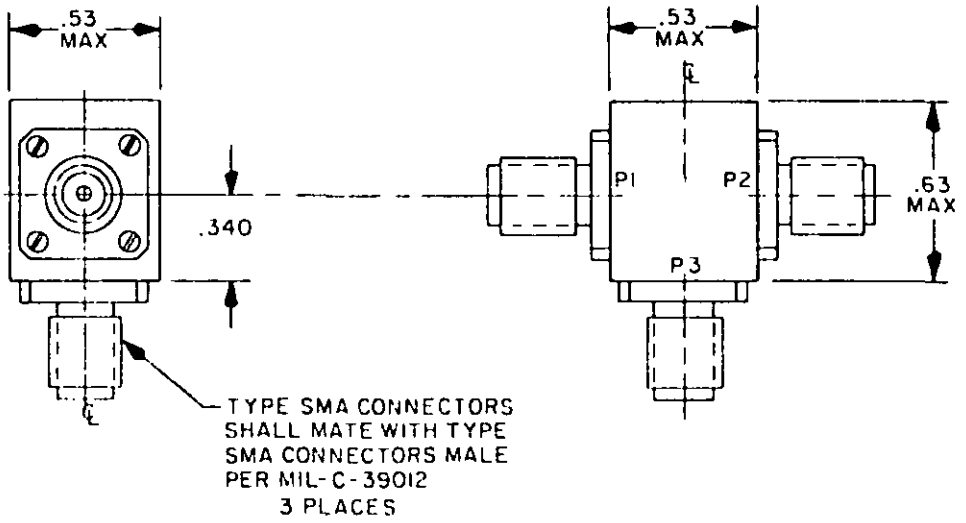

M28790/1-006

TABLE I. ELECTRICAL REQUIREMENTS AND DIMENSIONS.

PART NO. M28790/1-	OPERATING FREQUENCY GHz	VSWR MAX	INSERTION LOSS MAX (dB)	POWER RATING WATTS MAX	DIMENSIONS A	B	F
001	9.5 - 10.0	1.25:1	.3	10.0	.66	.53	.53
002	12.5 - 13.5						
003	7.0 - 11.0	1.30:1	.5		1.055	.955	.65
004	11.0 - 18.0						
005	.95 - 1.225	1.25:1		50	1.23	1.23	.78
006	9.0 - 9.2		.3	1			

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCULATOR, RADIO FREQUENCY, COAXIAL, 3 PORTS

MIL-C-28790/2

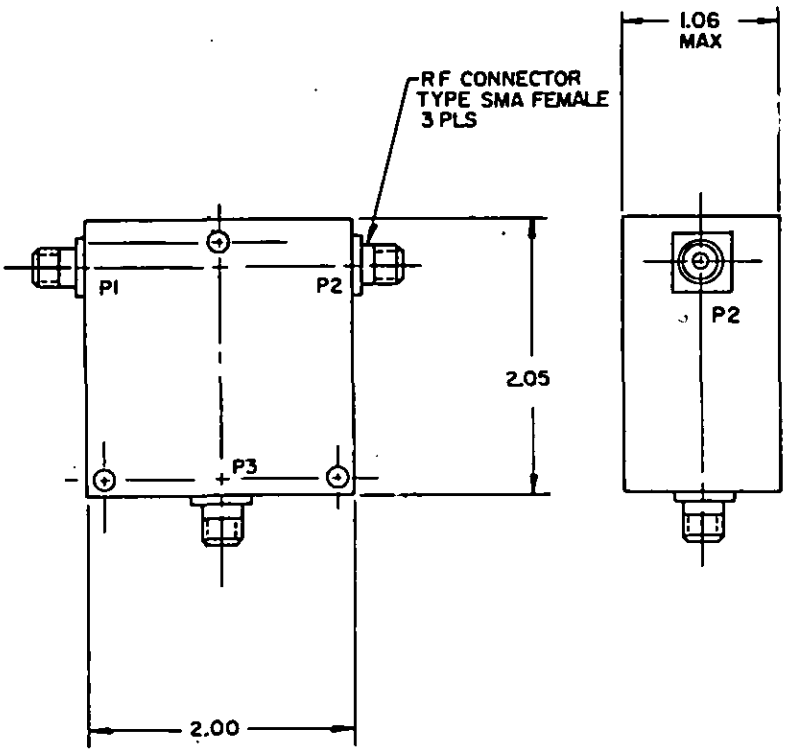


TABLE I. ELECTRICAL REQUIREMENTS.

PART NO. M28790/2-	OPERATING FREQUENCY GHz	VSWR MAX (dB)	INSERTION LOSS MAX	POWER RATING WATTS
001	.15 - .18	-50°C TO 0°C - 2.2:1 +5°C TO +70°C - 1.4:1 +75°C TO +100°C - 1.5:1	2 1 1.5	10 1 KILO

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCULATOR, RADIO FREQUENCY, COAXIAL, 4 PORTS

MIL-C-28790/3

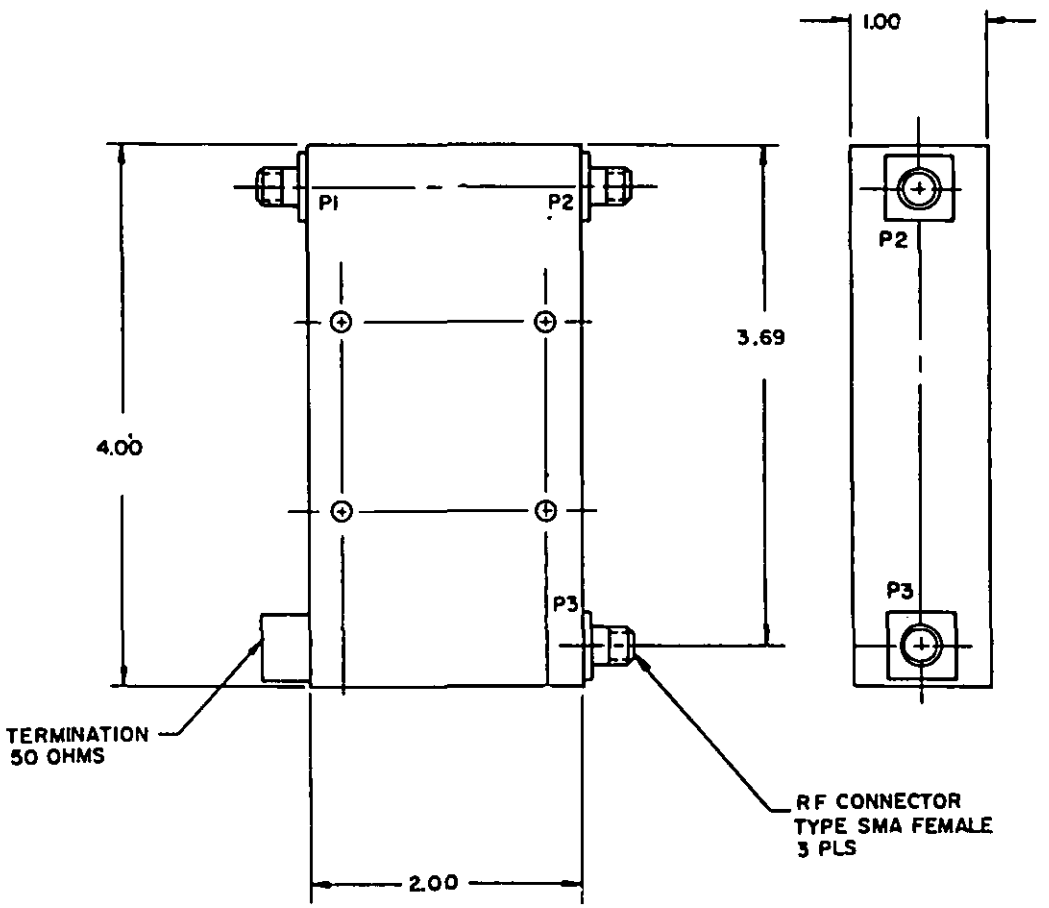



TABLE I. ELECTRICAL REQUIREMENTS.

PART NO. M28790/3-	OPERATING FREQUENCY GHz	VSWR MAX (dB)	INSERTION LOSS MAX	POWER RATING WATTS
001	.60 - .80	1.3:1	P1 TO P2 .5 P2 TO P3 1	20 10 KILO


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCULATOR, RADIO FREQUENCY, COAXIAL, 3 PORTS

MIL-C-28790/4

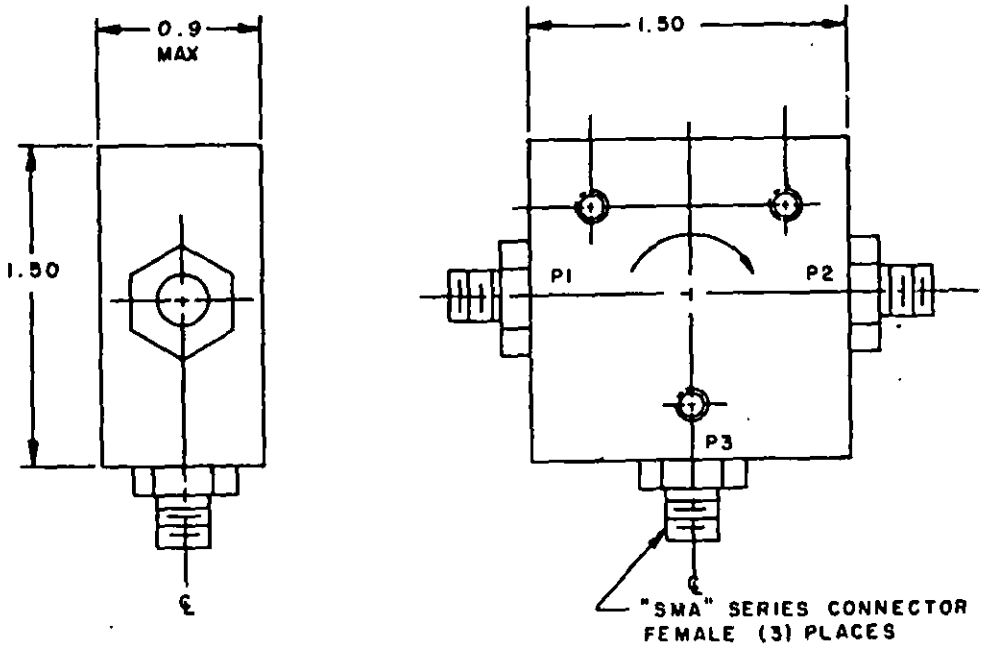

M28790/4-01

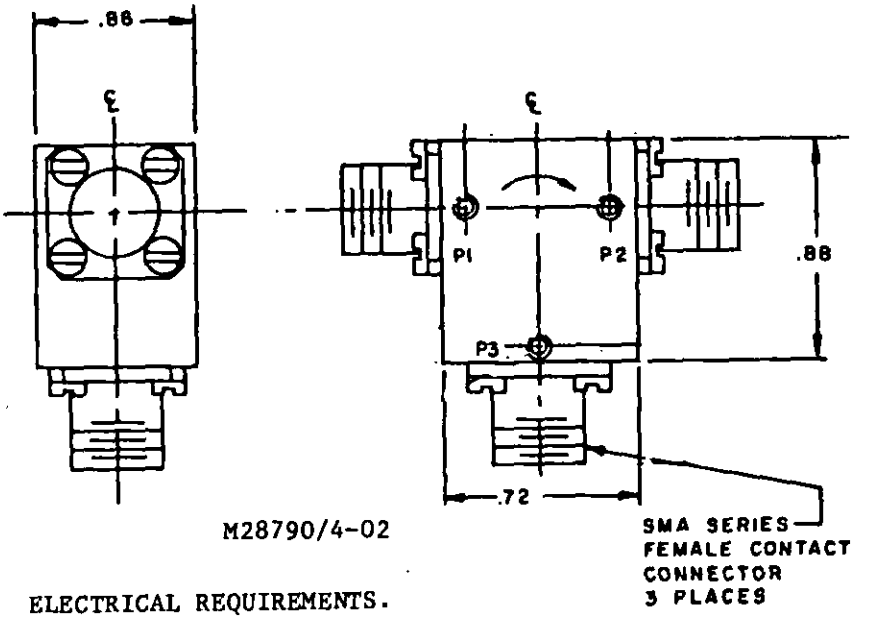

M28790/4-02

TABLE I. ELECTRICAL REQUIREMENTS.

PART NO. M28790/4-	OPERATING FREQUENCY GHz	VSWR MAX (dB)	INSERTION LOSS MAX	POWER RATING WATTS
01 02	4.4 - 5.0 7.125 - 8.4	1.2:1	.2	2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCULATOR, RADIO FREQUENCY, WAVEGUIDE

MIL-C-28790/5

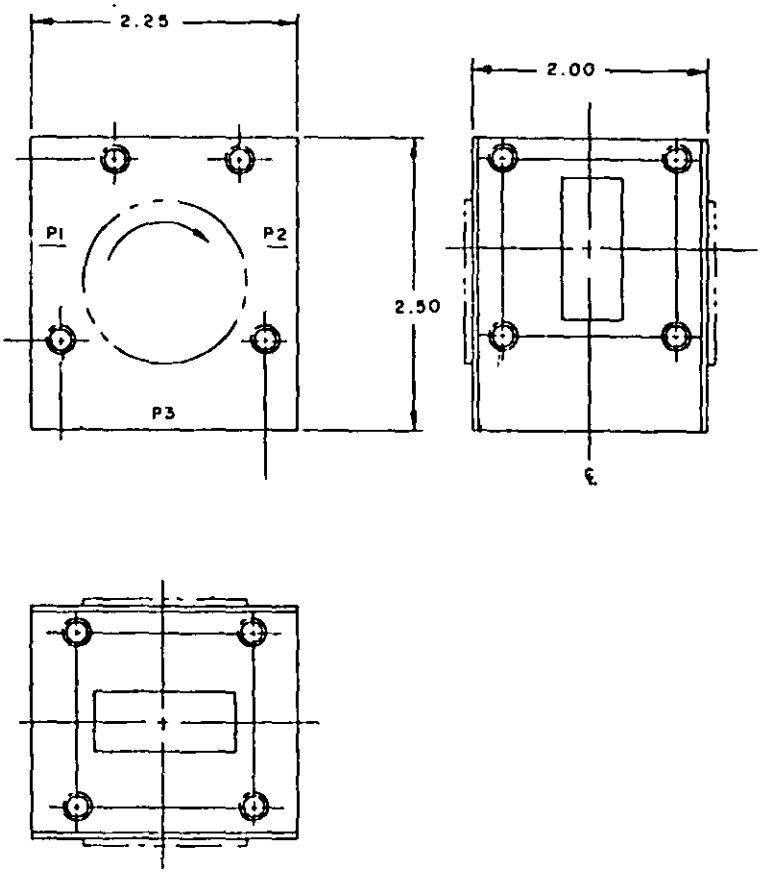



TABLE I. ELECTRICAL REQUIREMENTS.

PART NO. M28790/5-	OPERATING FREQUENCY GHz	VSWR MAX (dB)	INSERTION LOSS MAX	POWER RATING WATTS
01	7.125 - 8.4	1.2:1	.2	2


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCULATORS, RADIO FREQUENCY, WAVEGUIDE, THREE PORTS

MIL-C-28790/6

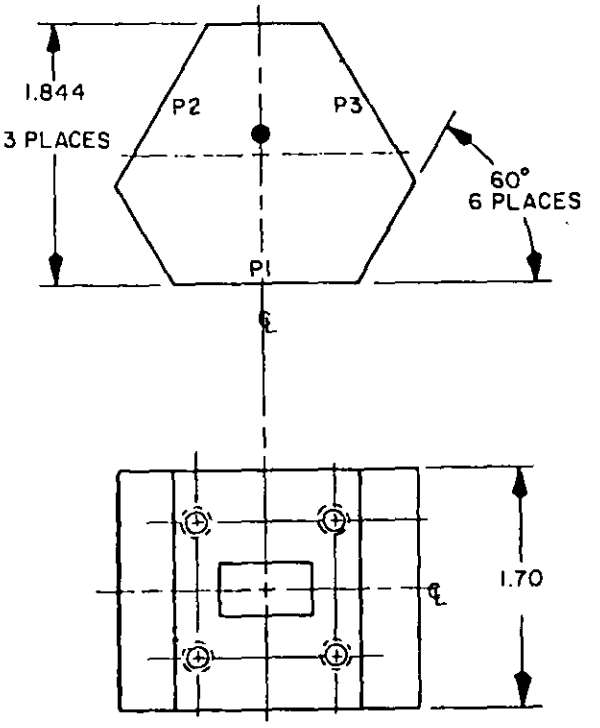

M28790/6-001 AND M28790/6-002

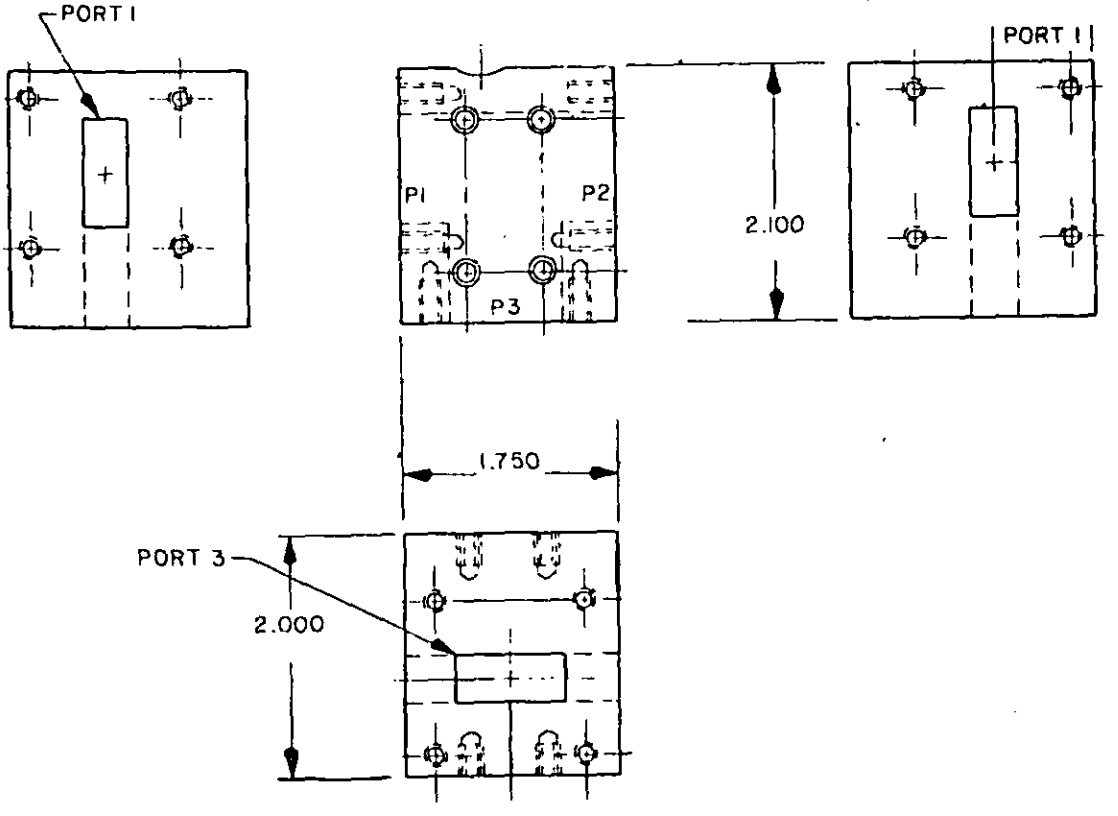

M28790/6-003

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCULATORS, RADIO FREQUENCY, WAVEGUIDE, THREE PORTS

MIL-C-28790/6

TABLE I. ELECTRICAL REQUIREMENTS.

PART NO. M28790/6-	OPERATING FREQUENCY GHz	VSWR MAX		INSERTION LOSS MAX (dB)	POWER RATING WATTS
001	10.8 - 18.0	10.8 - 12.4	2.0:1	1	100
002		12.4 - 18.0	1.3:1	.5	
003	9.5 - 10.6	1.2:1		.3	225

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL

MIL-C-15370

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR DIRECTIONAL COUPLERS FOR USE WITH COAXIAL LINES OR WAVEGUIDES. THE COUPLERS SPECIFIED HEREIN ARE USED FOR ARMED-SERVICES APPLICATION IN THE TRANSMISSION LINES OF RADAR AND RADIO EQUIPMENT TO INJECT OR SAMPLE, AT ATTENUATED LEVELS, THE RADIO FREQUENCY ENERGY TRANSMITTED THEREIN, AND ARE SUITABLE FOR OPERATION OVER A TEMPERATURE RANGE OF -65°C TO +110°C.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (7/8 COAXIAL)

MIL-C-15370/1

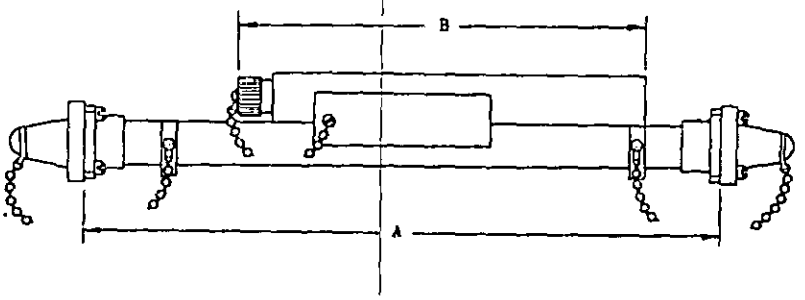


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/1-	DIMENSIONS A MIN	DIMENSIONS A MAX	DIMENSIONS B MIN	DIMENSIONS B MAX	FREQUENCY RANGE GHz	COUPLING FACTOR dB	VSWR (MAX) LINE PRIMARY	VSWR (MAX) LINE SECONDARY
001	26.188	26.438	22.031	22.157	.120 - .240	20	1.15	1.50
002	18.125	18.375	13.937	14.063	.240 - .480	20	1.15	1.50
003	14.063	14.188	9.750	9.875	.480 - .960	20	1.15	1.50
004	11.688	11.928	7.220	7.342	.960 -1.990	20	1.15	1.50
005	14.500	14.625	7.562	7.688	1.990 -4.000	20	1.15	1.50

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (COAXIAL, SERIES N CONNECTORS)

MIL-C-15370/3

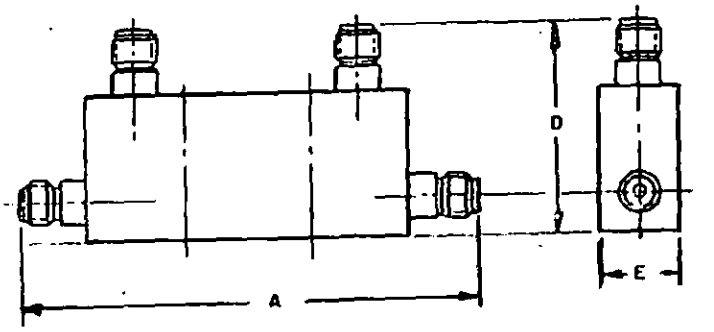


FIGURE 1.

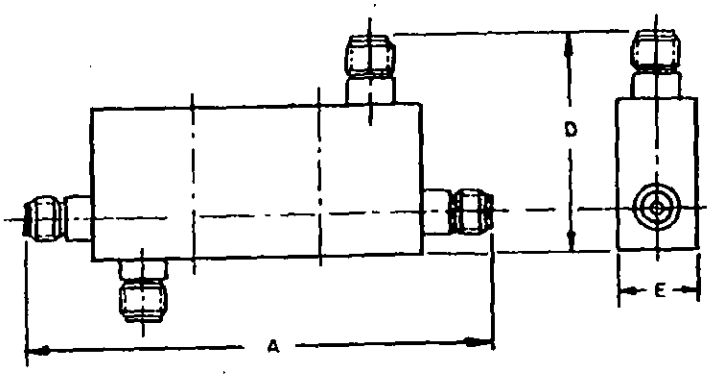


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (COAXIAL, SERIES N CONNECTORS)

MIL-C-15370/3

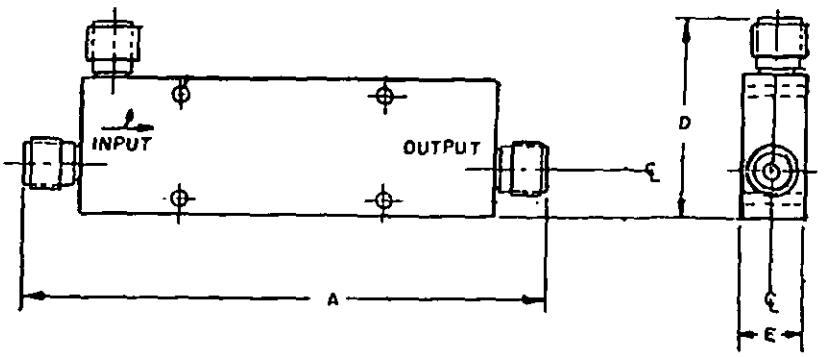


FIGURE 3.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/3-	FIG.	DIMENSIONS A MAX	D MAX	E MAX	FREQUENCY RANGE GHz	COUPLING (MID-FREQ) dB	VSWR (MAX) LINE PRIMARY	SECONDARY
001	3	12.250	2.938	0.938	.225 - .460	10	1.15	1.25
002	3	5.688	2.938	0.938	.950 - 2.0	10	1.15	1.15
003	3	5.688	2.938	0.938	2 - 4	10	1.15	1.25
004	3	6.563	2.938	0.938	4 - 10	10	1.20	1.30
005	2	9.063	3.063	1.938	.216 - .450	20	1.10	1.20
006	3	12.250	2.938	0.938	.225 - .460	20	1.15	1.25
007	1	9.125	2.563	1.938	.940 - 1.975	20	1.20	1.30
008	3	5.688	2.938	0.938	.950 - 2.0	20	1.15	1.15
009	1	9.063	2.563	1.938	1.9 - 4.0	20	1.25	1.35
010	3	6.563	2.938	0.938	4 - 10	20	1.20	1.30
011	3	12.313	2.938	0.938	.225 - .460	30	1.15	1.25
012	3	5.688	2.938	0.938	.950 - 2.0	30	1.15	1.15
013	3	5.688	2.938	0.938	2 - 4	30	1.15	1.25
014	3	6.563	2.938	0.938	4 - 10	30	1.20	1.30
015	1	5.188	3.250	1.188	.030 - .960	#	1.15	1.25
016	1	5.188	3.250	1.313	.1 - 1.2	*	1.15	1.25

\# 60 dB AT 30 MHz, 54 dB AT 60 MHz, 48 dB AT 120 MHz, 42 dB AT 240 MHz, 36 dB AT 480 MHz, 30 dB AT 960 MHz.
* 62 dB AT 100 MHz, 56 dB AT 200 MHz, 50 dB AT 400 MHz, 44 dB AT 800 MHz, 41 dB AT 1200 MHz.

POWER (AVG WATTS)	FOR DASH NUMBERS:
50	005, 007, 009
100	006
200	001, 002
1000	003, 004, 008, 010, 011, 012, 013, 014, 015, 016

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currenversion before use.

COUPLERS, DIRECTIONAL, DUAL, (COAXIAL, SERIES N CONNECTORS)

MIL-C-15370/11

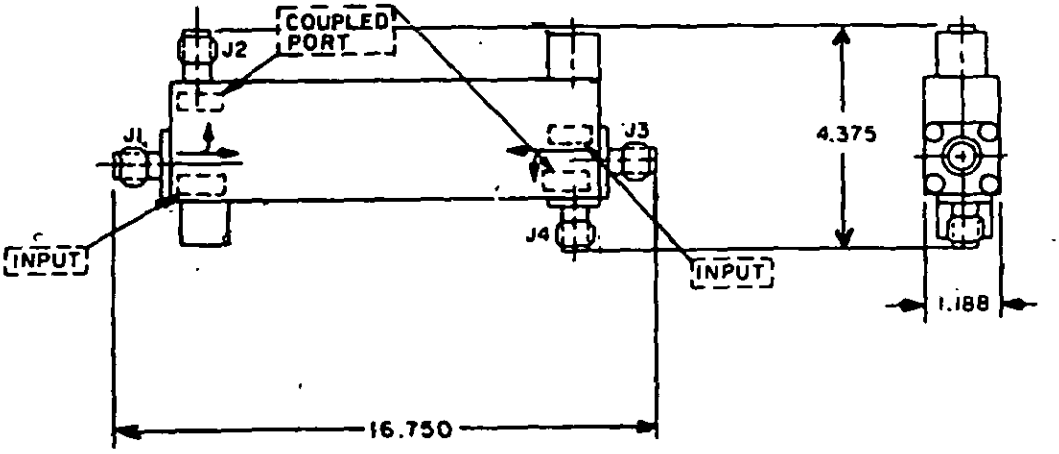


FIGURE 1.

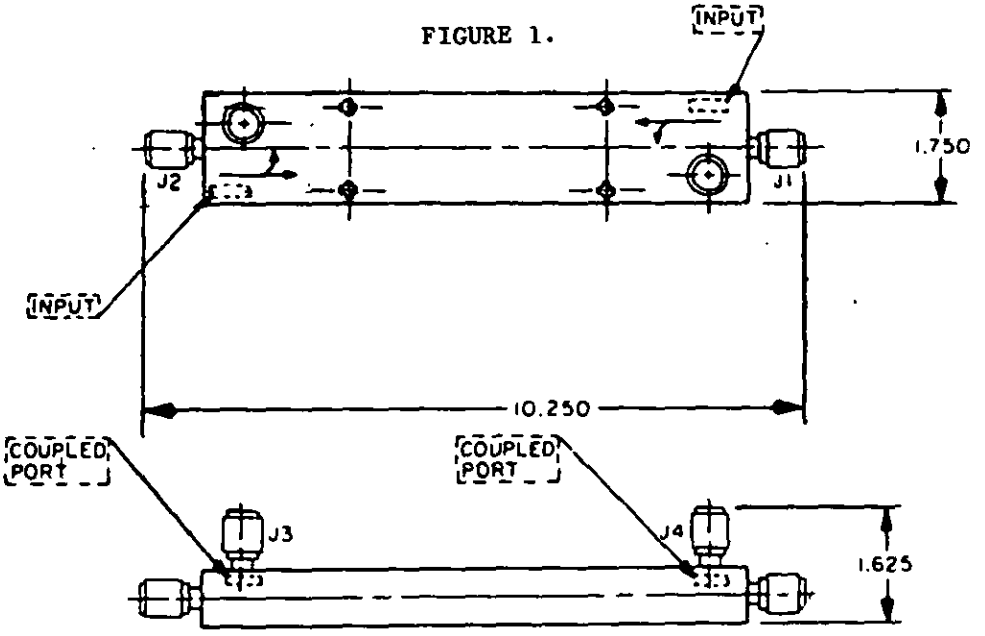


FIGURE 2.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/11-	FIG.	REFLECTED AVG POWER MAX WATTS	FREQUENCY RANGE GHz	COUPLING (MID-FREQ) dB	VSWR (MAX) LINE	
					PRIMARY	SECONDARY
001	1	---	0.1 - 2.0	20	1.1	1.1
002	2	500	4.0 - 8.0	20	1.15	1.20

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (COAXIAL, SERIES N AND C CONNECTORS)

MIL-C-15370/14

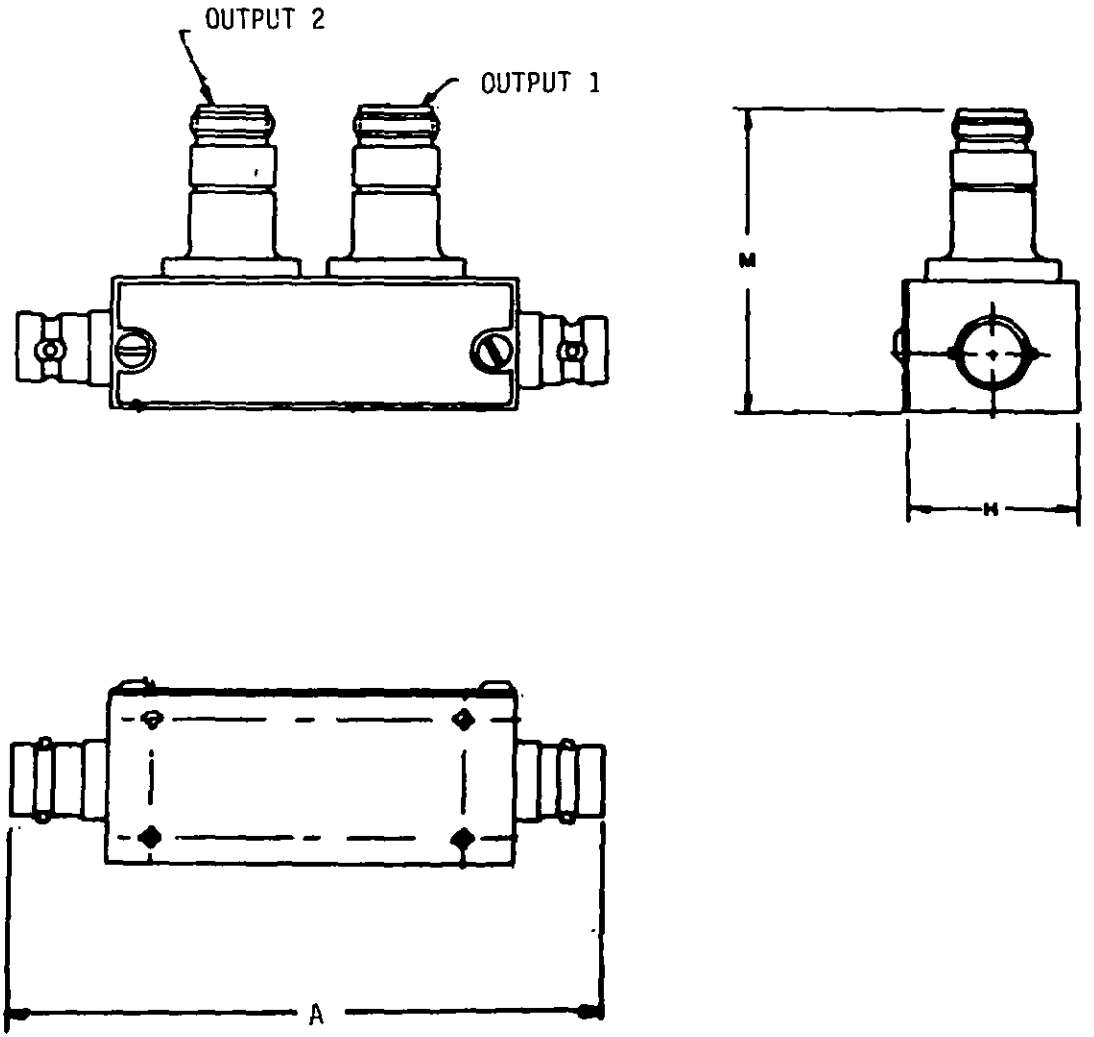


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/14-	DIMENSIONS				FREQUENCY RANGE GHz	COUPLING (MID-FREQ) dB	VSWR (MAX) LINE	
	A	H		M				
	MIN	MIN	MAX	MAX			PRIMARY	SECONDARY
001	4.250	1.188	1.312	2.500	.025 - 8	40	1.20	1.20

POWER (AVG WATTS):
800 W AT .1 GHz; 500 W AT .2 GHz; 300 W AT .5 GHz; 180 W AT 1.0 GHz; 120 W AT 2.0 GHz.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currenversion before use.

COUPLERS, DIRECTIONAL, (COAXIAL, SMA CONNECTORS, 1 TO 18 GHz)

MIL-C-15370/9

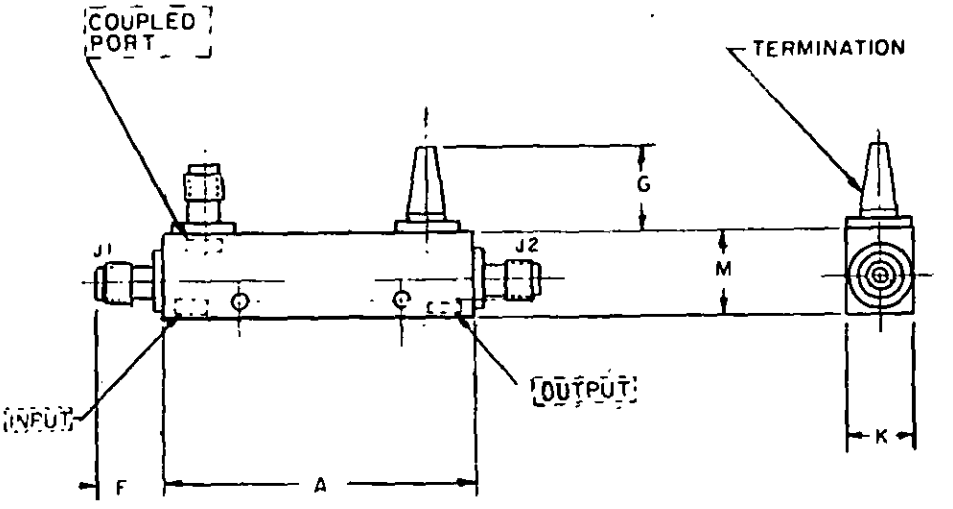


FIGURE 1.

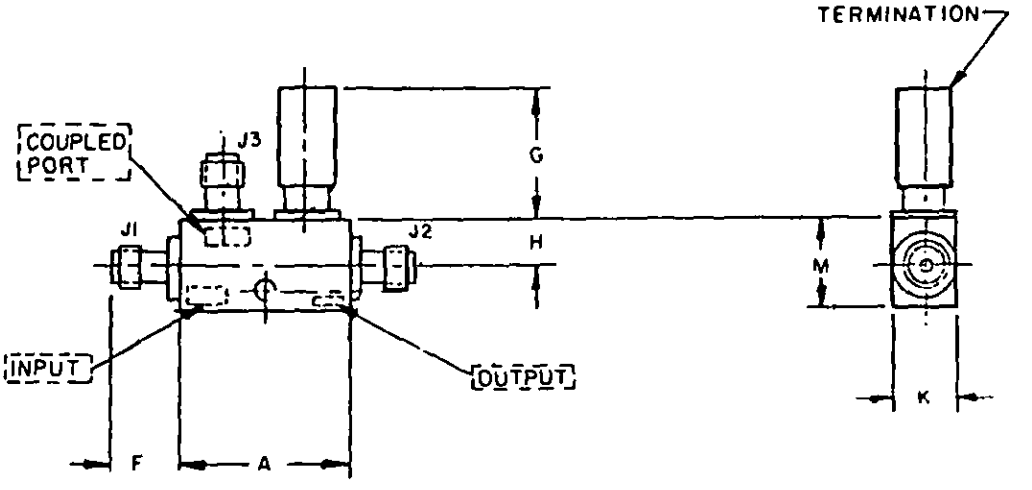


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (COAXIAL, SMA CONNECTORS, 1 TO 18 GHz)

MIL-C-15370/9

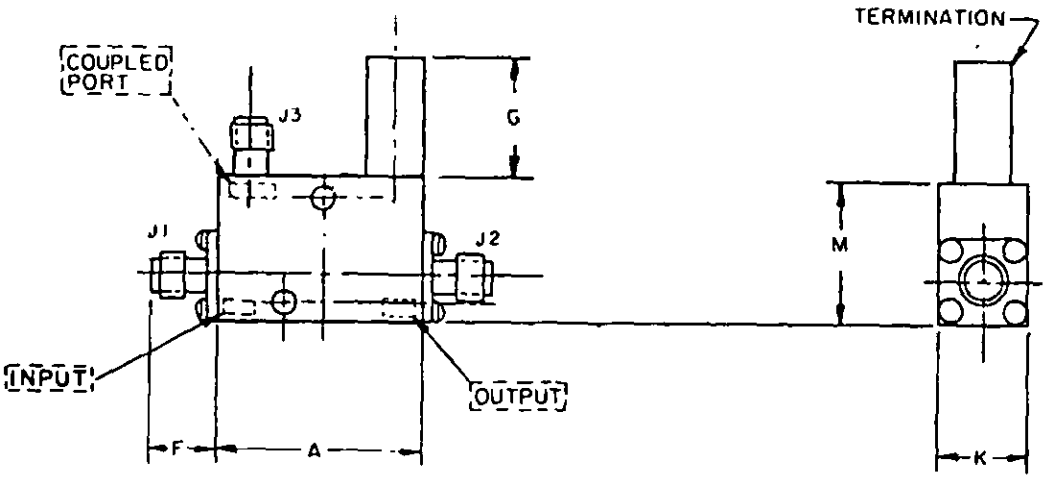


FIGURE 3.

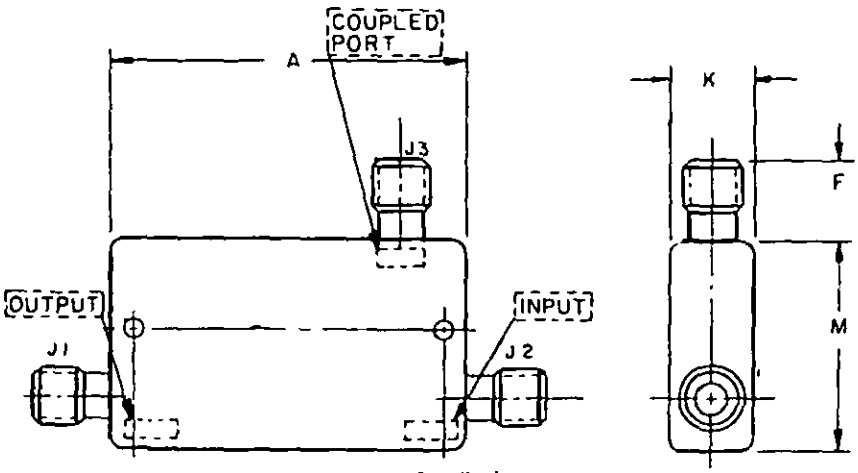


FIGURE 4.

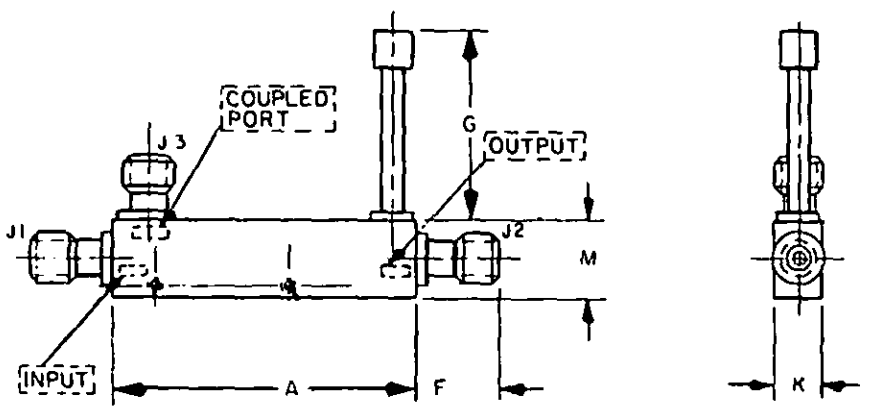


FIGURE 5.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-15370/9

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/9-	FIG.	DIMENSIONS				
		A MAX	F MAX	G MAX	K MAX	M MAX
004	1	1.83	0.39	0.47	0.40	0.59
006	1	1.20	0.39	0.47	0.40	0.54
007	1	1.20	0.39	0.47	0.40	0.54
008	1	1.20	0.39	0.75	0.40	0.59
010	2	1.04	0.39	0.75	0.40	0.54
011	2	1.04	0.39	0.75	0.40	0.54
012	2	1.04	0.39	0.75	0.40	0.54
013	2	1.04	0.39	0.75	0.40	0.54
014	2	1.04	0.39	0.75	0.40	0.54
016	3	1.27	0.39	0.75	0.52	0.83
017	3	1.04	0.39	0.75	0.40	0.66
018	2	1.04	0.39	0.75	0.40	0.66
019	4	2.00	0.31	---	0.44	1.25
020	4	2.00	0.31	---	0.44	1.25
021	4	2.00	0.31	---	0.44	1.25
022	2	1.04	0.39	0.75	0.40	0.54
023	2	1.04	0.39	0.75	0.40	0.54
024	2	1.04	0.39	0.75	0.40	0.66
025	2	1.04	0.39	0.75	0.40	0.66
026	5	3.50	0.39	0.89	0.53	0.72

PART NO. M15370/9-	FREQUENCY RANGE GHz	COUPLING (MID-FREQ) dB	VSWR (MAX) LINE		REFLECTED AVG POWER WATTS
			PRIMARY	SECONDARY	
004	1 - 2	30	1.10:1	1.10:1	50
006	2 - 4	10	1.15:1	1.15:1	5
007	2 - 4	20	1.15:1	1.15:1	50
008	2 - 4	30	1.15:1	1.15:1	50
010	4 - 8	10	1.20:1	1.20:1	5
011	4 - 8	20	1.20:1	1.20:1	50
012	7 -12.4	6	1.30:1	1.30:1	2
013	7 -12.4	10	1.30:1	1.30:1	5
014	7 -12.4	20	1.25:1	1.25:1	50
016	12.4-18	10	1.30:1	1.40:1	5
017	12.4-18	20	1.30:1	1.40:1	50
018	7 -12.4	30	1.25:1	1.25:1	50
019	11 -17	10	1.30:1	1.30:1	---
020	11 -17	20	1.30:1	1.30:1	---
021	11 -17	30	1.30:1	1.30:1	---
022	7.5-16	6	1.35:1	1.40:1	2
023	7.5-16	10	1.35:1	1.40:1	5
024	7.5-16	20	1.35:1	1.40:1	50
025	7.5-16	30	1.35:1	1.40:1	50
026	1 -18	16	1.40:1	1.50:1	---

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

COUPLERS, DIRECTIONAL, (COAXIAL, SMA CONNECTORS, .50 TO 18 GHz)

MIL-C-15370/10

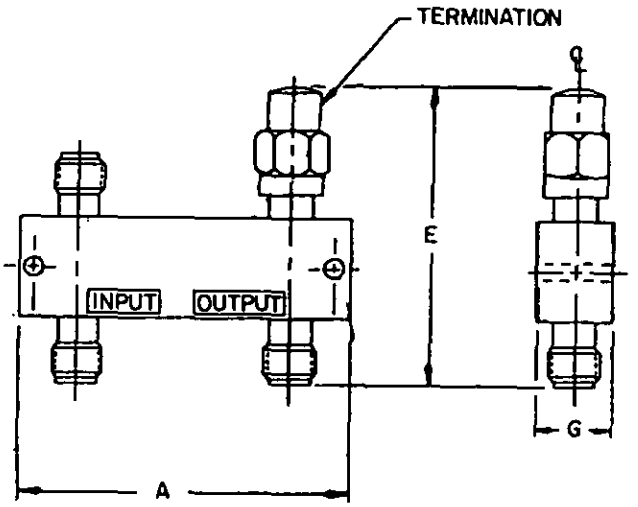


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/10-	DIMENSIONS A MAX	DIMENSIONS E	DIMENSIONS G MAX	FREQUENCY RANGE GHz	COUPLING (MID-FREQ) dB	VSWR (MAX) LINE PRIMARY	VSWR (MAX) LINE SECONDARY	REFLECTED AVG POWER WATTS
001	3.320	1.495	0.405	.5 - 1.0	6	1.25:1	1.25:1	2
002	3.320	1.495	0.405	.5 - 1.0	10	1.25:1	1.25:1	5
003	3.320	1.495	0.405	.5 - 1.0	20	1.25:1	1.25:1	50
004	2.563	1.495	0.405	1.0 - 2.0	6	1.25:1	1.25:1	2
005	2.563	1.495	0.405	1.0 - 2.0	10	1.25:1	1.25:1	5
006	2.563	1.495	0.405	1.0 - 2.0	20	1.20:1	1.20:1	50
007	1.715	1.495	0.405	2.0 - 4.0	6	1.20:1	1.20:1	2
008	1.210	1.495	0.405	4.0 - 8.0	6	1.20:1	1.20:1	2
009	1.100	1.620	0.405	8.0 -12.4	10	1.30:1	1.30:1	2
010	1.100	1.620	0.405	8.0 -12.4	20	1.30:1	1.30:1	2
011	1.100	1.620	0.405	12.4-18.0	6	1.35:1	1.35:1	2

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (COAXIAL, SMA CONNECTORS, 25 TO 500 MHz)

MIL-C-15370/16

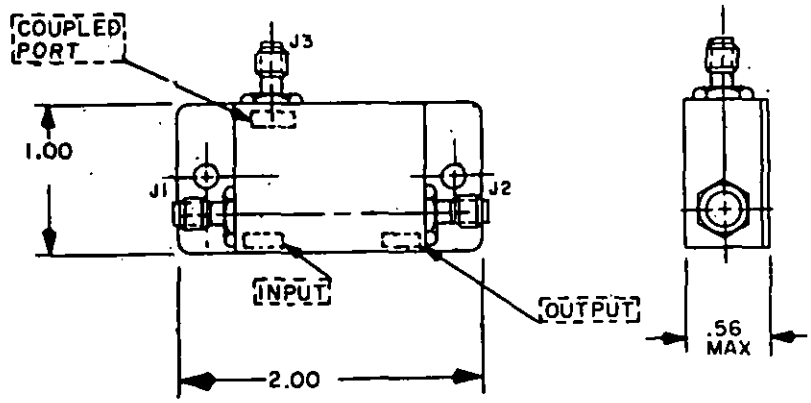


FIGURE 1.

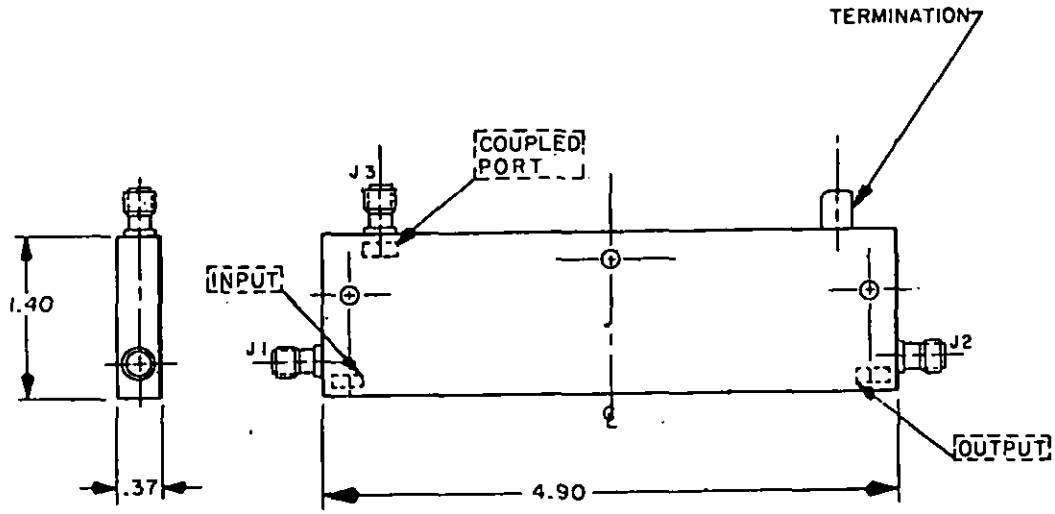


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (COAXIAL, SMA CONNECTORS, 25 TO 500 MHz)

MIL-C-15370/16

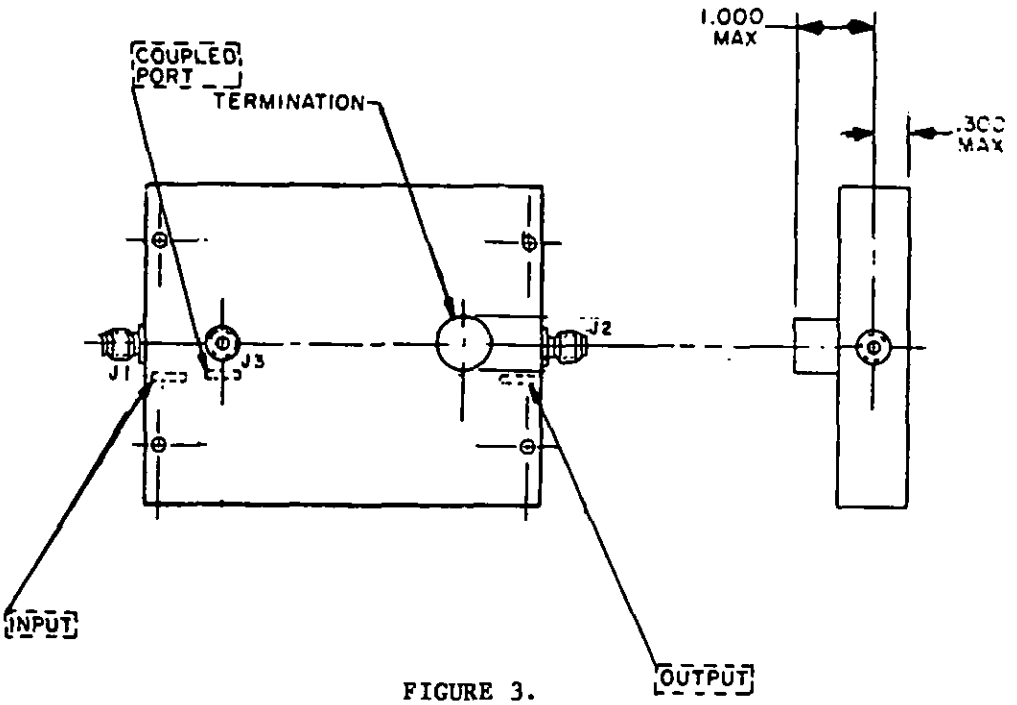


FIGURE 3.

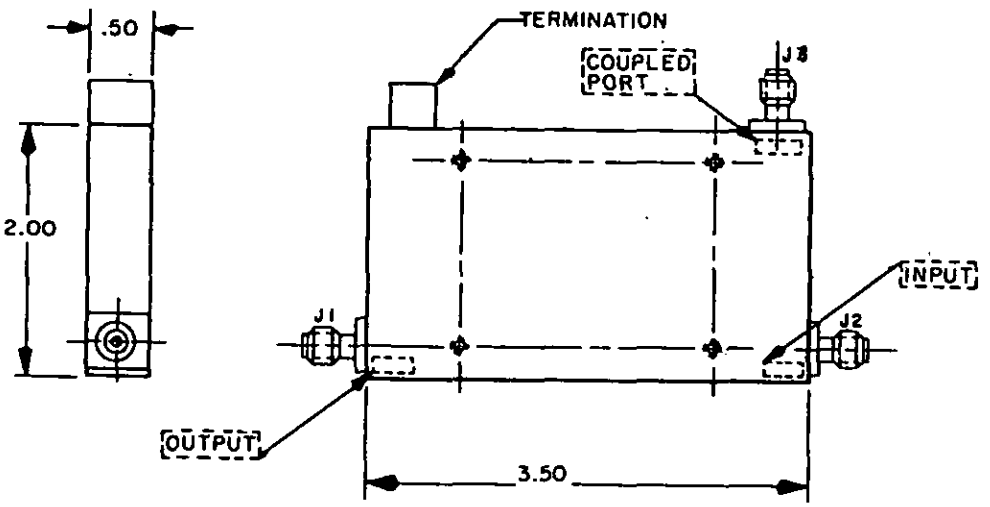


FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currenversion before use.

COUPLERS, DIRECTIONAL, (COAXIAL, SMA CONNECTORS, 25 TO 500 MHz)

MIL-C-15370/16

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/16-	FREQUENCY RANGE MHz	COUPLING (MID-FREQ) dB	VSWR (NMAX) LINE		INPUT AVG POWER WATTS
			PRIMARY	SECONDARY	
001	25 - 35	25	1.20	1.20	5
002	125 - 250	30	1.15	---	50
003	190 - 210	10	1.15	1.10	50
004	250 - 500	6	1.10	1.25	100
005	250 - 500	10	1.10	1.25	100
006	250 - 500	20	1.10	1.25	100
007	250 - 500	30	1.10	1.25	100
008	285 - 315	25	1.20	1.20	5

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, DUAL, (COAXIAL, SMA CONNECTORS)

MIL-C-15370/17

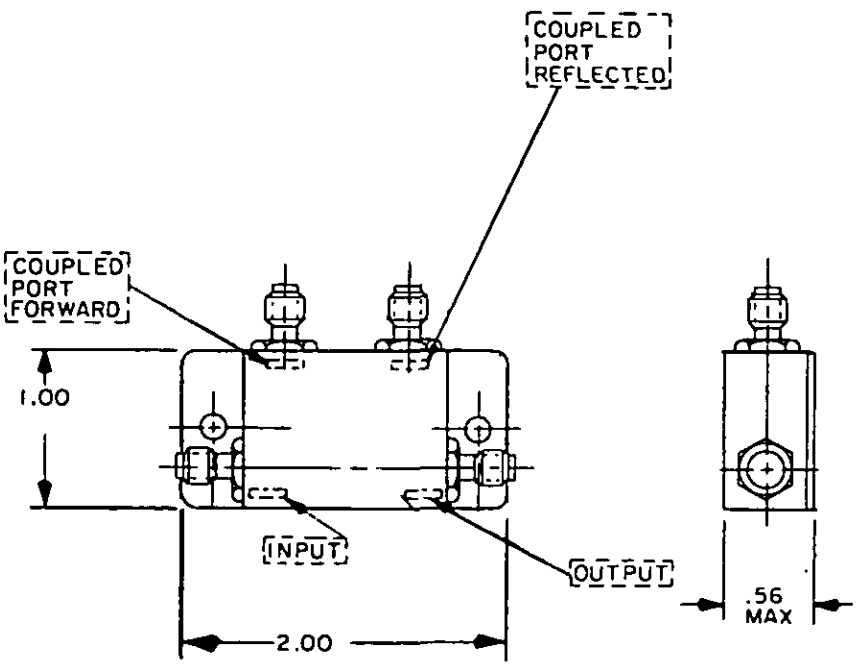


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/17-	AVG POWER MAX WATTS	FREQUENCY RANGE MHz	COUPLING (MID-FREQ) dB	VSWR (MAX)
001	5	60 - 80	10	1.3:1

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (WAVEGUIDE, CROSSGUIDE, COAXIAL OUTPUT)

MIL-C-15370/2

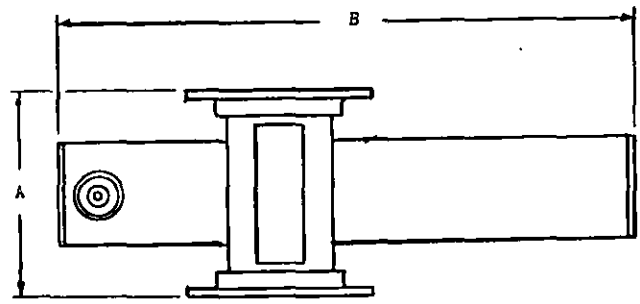


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/2-	DIMENSIONS A MIN	DIMENSIONS A MAX	DIMENSIONS B MIN	DIMENSIONS B MAX	FREQUENCY RANGE GHz	COUPLING FACTOR dB	VSWR (MAX) LINE PRIMARY	VSWR (MAX) LINE SECONDARY
001	5.937	6.063	18.500	18.625	2.650 - 3.350	20	1.15	1.50
002	5.937	6.063	18.500	18.625	3.350 - 4.000	20	1.15	1.50
003	4.937	5.063	10.625	10.750	3.950 - 5.000	20	1.15	1.50
004	4.937	5.063	10.625	10.750	5.000 - 6.000	20	1.15	1.50
005	4.187	4.313	9.500	9.625	5.300 - 7.000	20	1.15	1.50
006	4.187	4.313	9.500	9.625	7.000 - 8.200	20	1.15	1.50
007	3.938	4.063	7.843	7.969	7.000 - 8.500	20	1.15	1.50
008	3.938	4.063	7.843	7.969	8.500 -10.000	20	1.15	1.50
009	3.187	3.313	5.188	5.313	12.400-15.200	20	1.15	1.50
010	1.750	1.875	4.343	4.469	18.000-22.200	20	1.15	1.50
011	1.750	1.875	4.375	4.500	22.000-26.500	20	1.15	1.50
012	1.750	1.875	3.875	4.000	26.500-31.500	20	1.15	1.50
013	1.625	1.875	3.875	4.000	31.500-36.000	20	1.15	1.50

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

COUPLERS, DIRECTIONAL, (WAVEGUIDE, COAXIAL OUTPUT)

MIL-C-15370/6

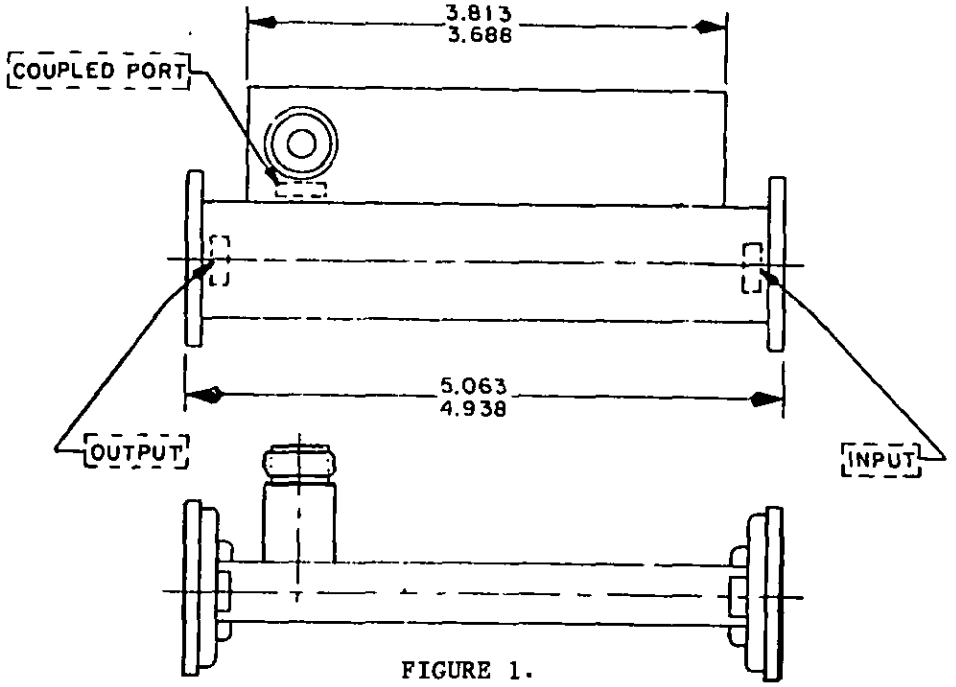


FIGURE 1.

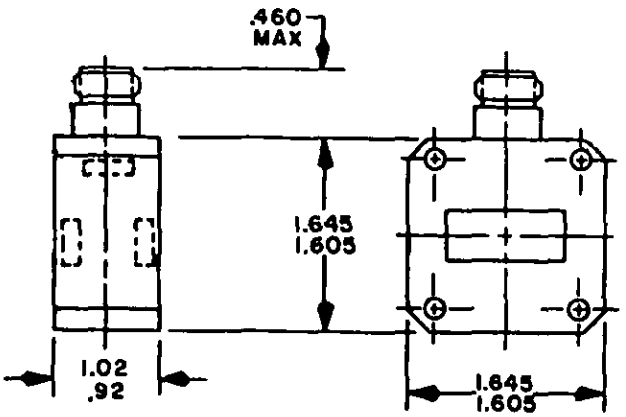


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (WAVEGUIDE, COAXIAL OUTPUT)

MIL-C-15370/6

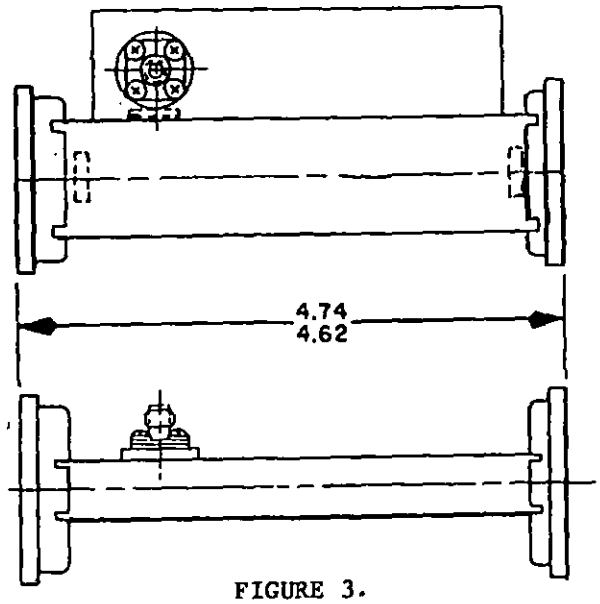


FIGURE 3.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/6-	FREQUENCY RANGE GHz	COUPLING (MID-FREQ) dB	VSWR (NMAX) LINE		INPUT AVG POWER WATTS
			PRIMARY	SECONDARY	
001	8.5 - 9.6	20	1.20	1.30	1
002	8.2 - 12.4	40	1.10	2.0	.125
003	9.0 - 9.2	40	1.05	---	45

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (WAVEGUIDE-CROSSGUIDE)

MIL-C-15370/5

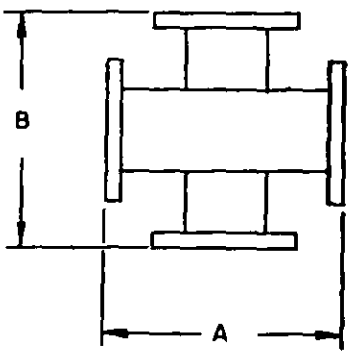



TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.


PART NO. M15370/5-	DIMENSIONS A MIN	DIMENSIONS A MAX	DIMENSIONS B MIN	DIMENSIONS B MAX	FREQUENCY RANGE GHz	COUPLING FACTOR dB	VSWR MAX
001	5.938	6.063	5.938	6.063	3.95 - 5.85	20	1.05
002	2.938	3.063	2.938	3.063	8.2 - 12.4	20	1.05

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currenversion before use.

COUPLERS, DIRECTIONAL, (WAVEGUIDE, MULTIHOLE)

MIL-C-15370/4

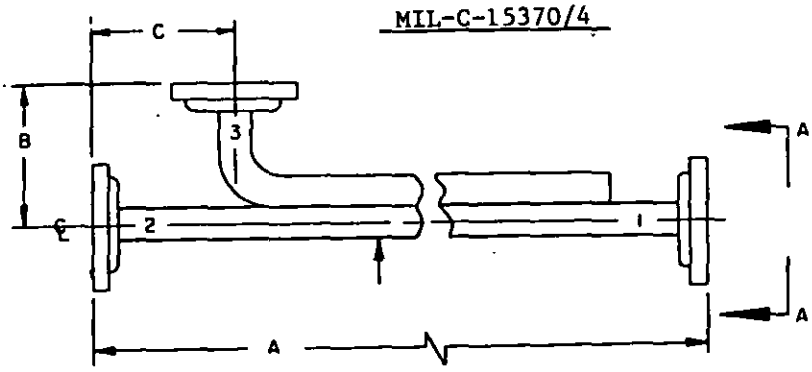



VIEW A-A

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/4-	DIMENSIONS A MIN	DIMENSIONS A MAX	DIMENSIONS B MIN	DIMENSIONS B MAX	FREQUENCY RANGE GHz	COUPLING FACTOR dB	VSWR (MAX) LINE PRIMARY	VSWR (MAX) LINE SECONDARY
001	26.437	26.563	4.500	4.625	5.85 - 8.2	3	1.10	1.20
002	25.500	26.625	4.500	4.625	5.85 - 8.2	10	1.05	1.15
003	25.500	26.625	4.500	4.625	5.85 - 8.2	20	1.05	1.15
004	18.563	19.188	2.938	3.063	7.05 - 10.0	3	1.10	1.20
005	17.438	17.563	2.938	3.063	7.05 - 10.0	10	1.05	1.15
006	17.438	17.563	2.938	3.063	7.05 - 10.0	20	1.05	1.15
007	16.625	16.750	2.938	3.063	8.2 - 12.4	3	1.10	1.20
008	15.625	15.750	2.938	3.063	8.2 - 12.4	10	1.05	1.15
009	15.625	15.750	2.938	3.063	8.2 - 12.4	20	1.05	1.15
010	12.188	12.313	1.968	2.094	12.4 - 18.0	20	1.05	1.15
011	9.313	10.656	1.937	3.000	18.0 - 26.5	3	1.10	1.20
012	9.313	9.968	1.937	3.000	18.0 - 26.5	10	1.05	1.15
013	7.562	9.968	1.937	3.000	18.0 - 26.5	20	1.05	1.15

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

COUPLERS, DIRECTIONAL, DUAL (WAVEGUIDE)

MIL-C-15370/15

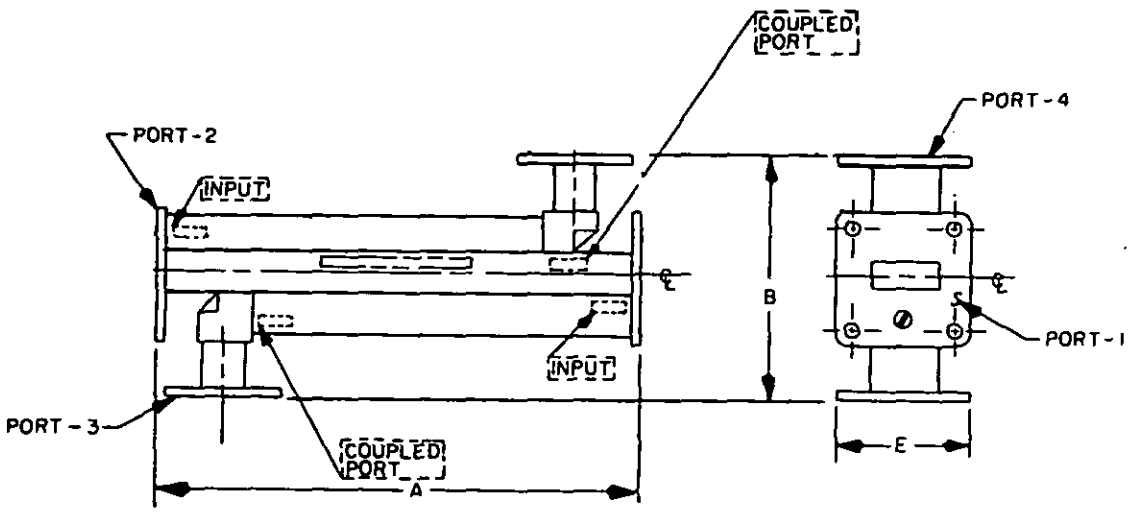


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/15-	DIMENSIONS			FREQUENCY RANGE GHz	COUPLING DB PORT TO PORT		VSWR (MAX) PORT		INPUT AVG POWER WATTS
	A	B	E		1 TO 3	2 TO 4	1 & 2	3 & 4	
001	15.50	3.56	1.68	7.0 - 11.0	50	30	1.10	1.20	1200
002	8.00	2.40	1.31	10.8 - 18.0	50	30	1.10	1.20	200

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (PIN PLUG-IN TERMINATION)

MIL-C-15370/18

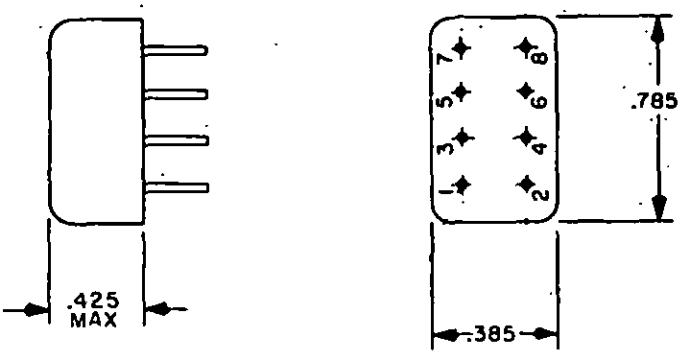


FIGURE 1.

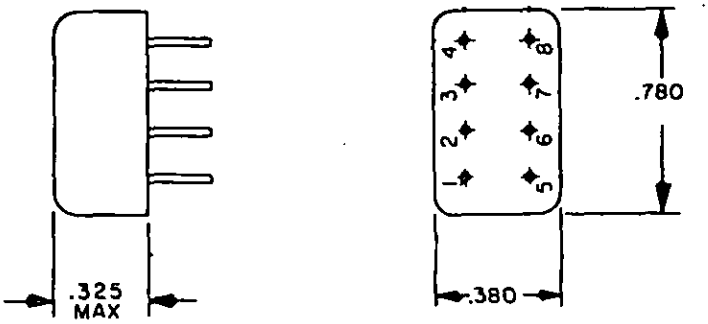


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

COUPLERS, DIRECTIONAL, (PIN PLUG-IN TERMINATION)

MIL-C-15370/18

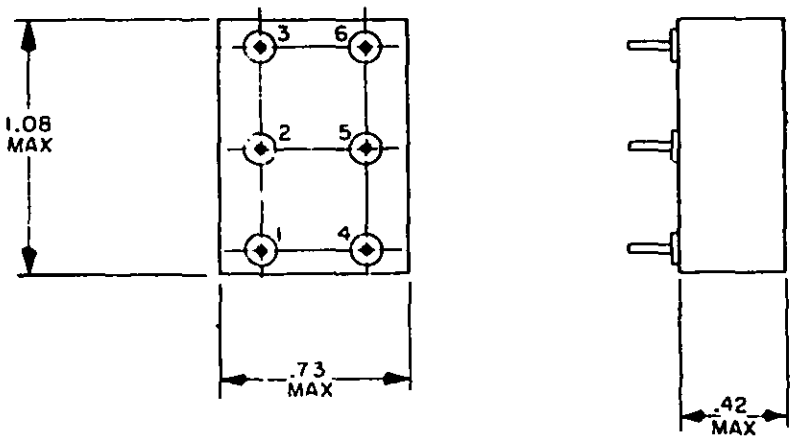


FIGURE 3.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M15370/18-	FREQUENCY RANGE MHz	COUPLING (MID-FREQ) dB	VSWR (MAX) LINE	
			PRIMARY	SECONDARY
001	0.2 - 250	19.5	1.3	1.5
002	0.5 - 500	11.5	1.3	1.7
003	1 -1000	11.0	1.5	1.5
004	10 - 400	10.0	1.1	1.1
005	50 - 400	10.0	1.3	1.3
006	50 - 400	15.0	1.3	1.3
007	50 - 400	20.0	1.3	1.3
008	250-1000	10.0	1.8	1.8

INPUT POWER AVG WATTS	DASH NUMBER
1.5 AT 0.2 - 2.0 MHz	001
4.0 AT 2.0 - 250 MHz	001
1.5 AT 0.5 - 5.0 MHz	002
3.0 AT 5.0 - 500 MHz	002
1.0 AT 1.0 -10.0 MHz	003
2.0 AT 10.0-1000 MHz	003
10.0 AT 10 - 400 MHz	004
--- AT 50 - 400 MHz	005, 006,007
5.0 AT 250 -1000 MHz	008

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL WAVEGUIDE

MIL-D-3954

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR WAVEGUIDE ELECTRICAL DUMMY LOADS FOR USE IN TERMINATING RADIO FREQUENCY TRANSMISSION LINES, TO PREVENT RADIATION DURING TESTING OF THE EQUIPMENT BY ABSORBING THE POWER.

CODE	MATERIAL
A	ALUMIMUM
C	COPPER
CRS	CORROSION RESISTANT STEEL

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 1.12 TO 1.70 GHz)

MIL-D-3954/15

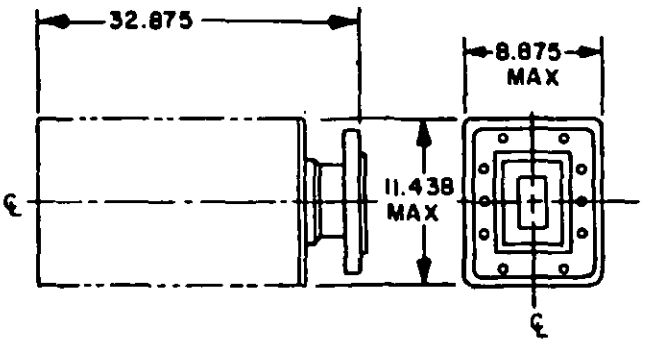


FIGURE 1.

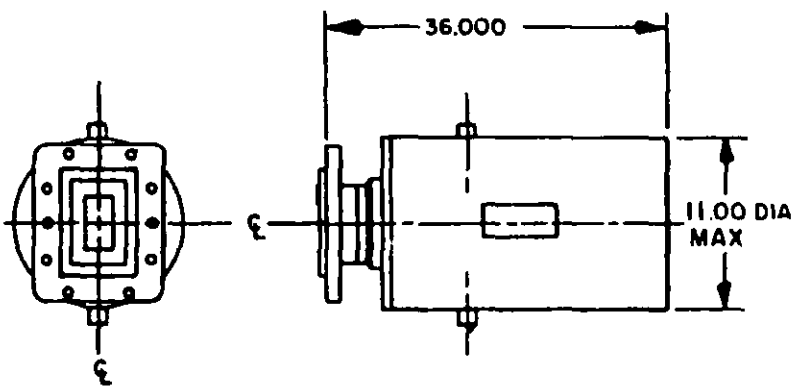


FIGURE 2.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/15-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER AVG WATT	POWER PEAK KW	PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
01	I	A	M3922/58-008 (UG-418B/U)	1.10	2200	2200	23	1	---
02	II	A	M3922/58-008 (UG-418B/U)	1.10	15000	17200	30	2	5
03	II	C	M3922/58-007 (UG-417B/U)	1.10	15000	17200	30	2	5
04	II	CRS	M3922/58-007 (UG-417B/U)	1.10	15000	17200	30	2	5

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 2.6 TO 3.95 GHz)

MIL-D-3954/18

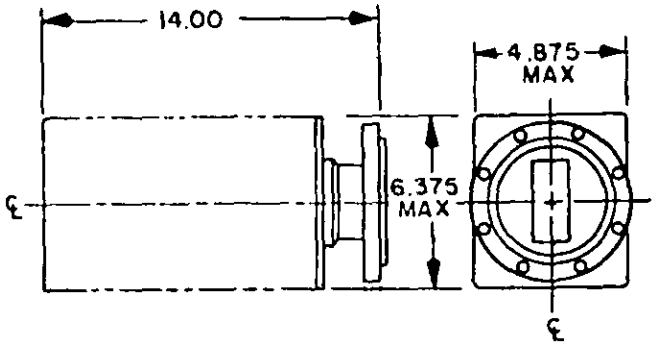


FIGURE 1.

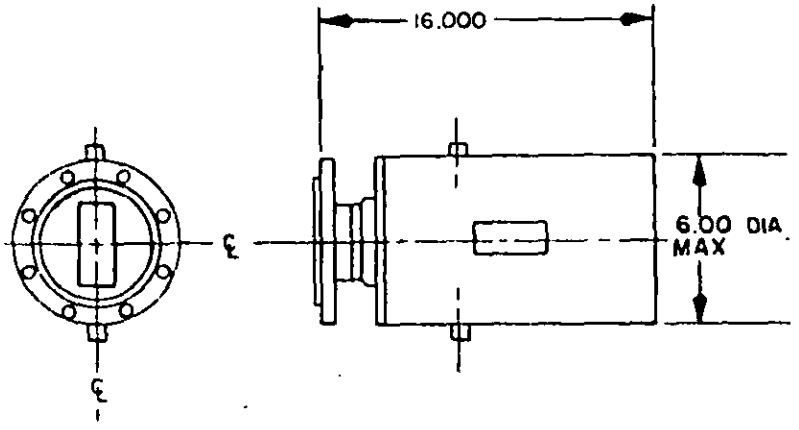


FIGURE 2.

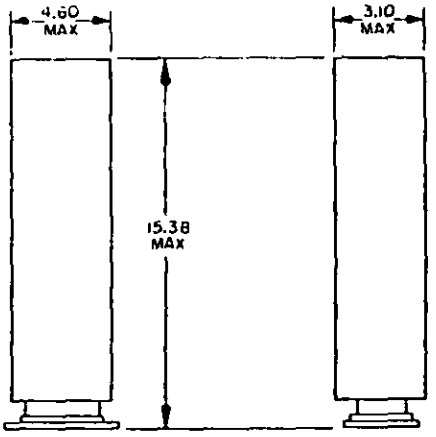


FIGURE 3.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/18-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER AVG WATT	POWER PEAK KW	PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
01	I	A	M3922/56-002 (UG-584/U)	1.10	2000	3200	30	1	---
02	II	A	M3922/56-002 (UG-584/U)	1.10	7500	3200	30	2	2.25
03	II	C	M3922/56-001 (UG-53/U)	1.10	7500	3200	30	2	2.25
04	II	CRS	M3922/56-001 (UG-53/U)	1.10	7500	3200	30	2	2.25
05	III	A	M3922/52-010 (UG-1725/U)	1.10	750	4000	10	3	---

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 3.95 TO 5.85 GHz)

MIL-D-3954/17

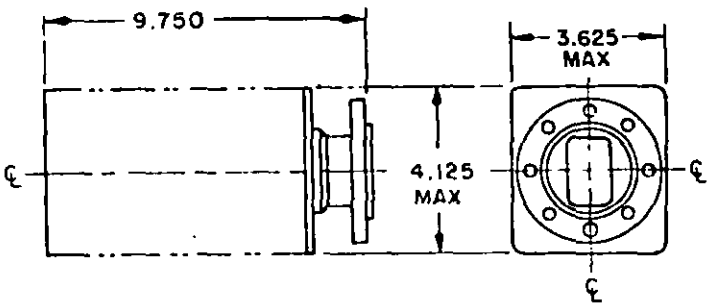


FIGURE 1.

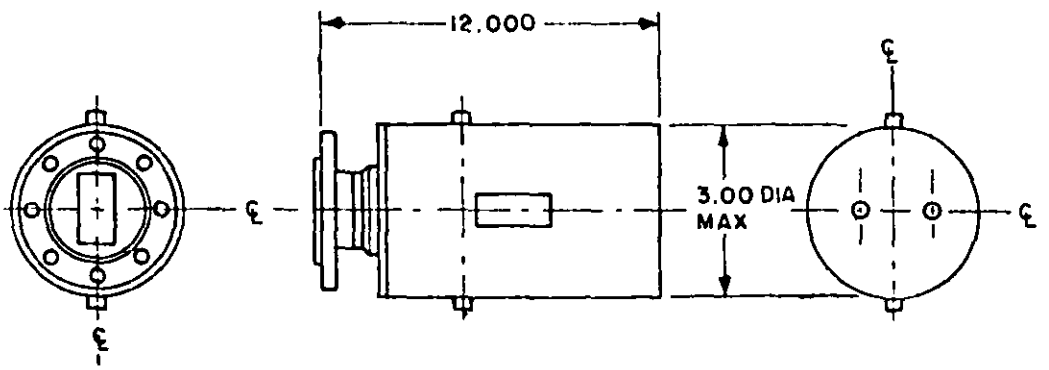


FIGURE 2.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/17-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER AVG WATT	POWER PEAK KW	PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
01	I	A	M3922/57-001 (UG-407/U)	1.10	1000	1000	17.2	1	---
02	II	A	M3922/57-001 (UG-407/U)	1.10	4000	1300	30	2	1.25
03	II	C	M3922/57-002 (UG-417/U)	1.10	4000	1300	30	2	1.25
04	II	CRS	M3922/57-002 (UG-149/U)	1.10	4000	1300	39	2	1.25

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 5.85 TO 8.20 GHz)

MIL-D-3954/16

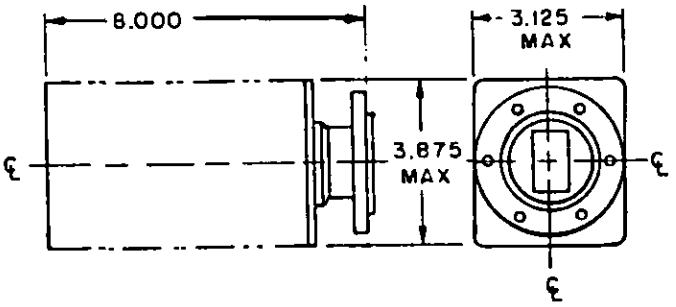


FIGURE 1.

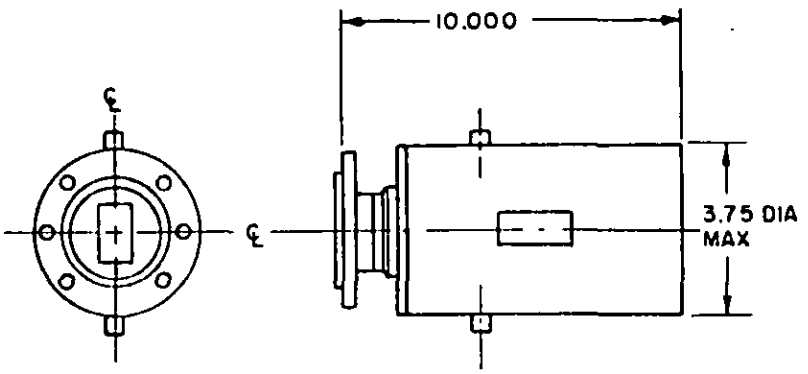


FIGURE 2.

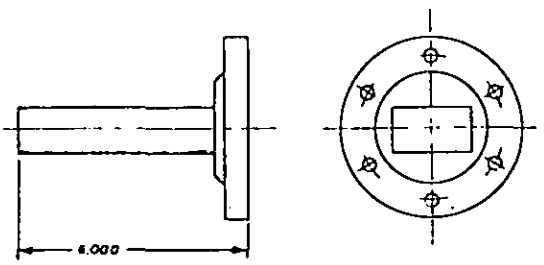


FIGURE 3.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/16-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER		PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
					AVG WATT	PEAK KW			
01	I	A	M3922/55-002 (UG-441/U)	1.10	800	710	30	1	---
02	II	A	M3922/55-002 (UG-441/U)	1.10	2000	710	30	2	0.667
03	II	C	M3922/55-001 (UG-344/U)	1.10	2000	710	30	2	0.667
04	II	CRS	M3922/55-001 (UG-344/U)	1.10	2000	710	30	2	0.667
05	III	C	M3922/55-001 (UG-344/U)	1.10	2	2	---	3	---

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 7.05 TO 10.0 GHz)

MIL-D-3954/11

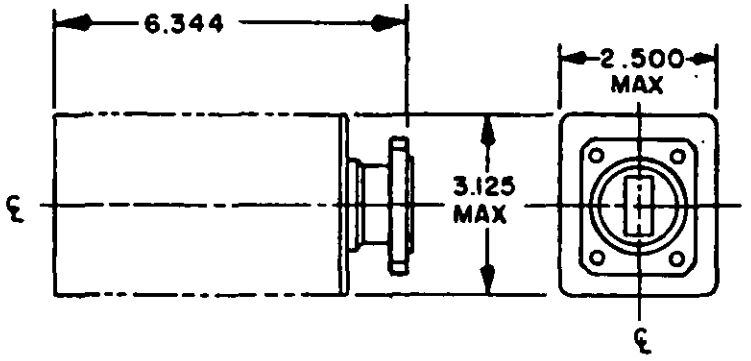


FIGURE 1.

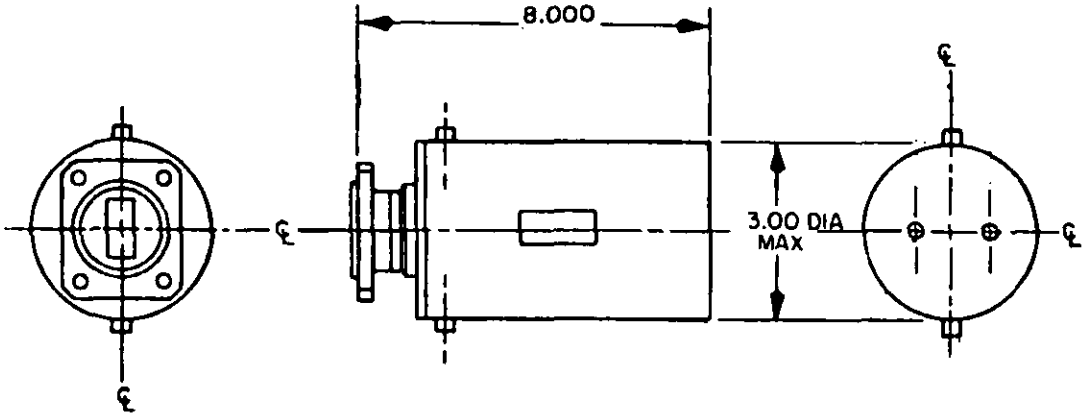


FIGURE 2.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/11-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER AVG WATT	POWER PEAK KW	PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
01	I	A	M3922/53-004 (UG-138/U)	1.10	500	460	30	1	---
02	II	A	M3922/53-004 (UG-138/U)	1.10	1500	460	30	2	0.5
03	II	C	M3922/53-002 (UG-51/U)	1.10	1500	460	30	2	0.5
04	II	CRS	M3922/53-002 (UG-51/U)	1.10	1500	460	30	2	0.5

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 8.2 TO 12.4 GHz)

MIL-D-3954/19

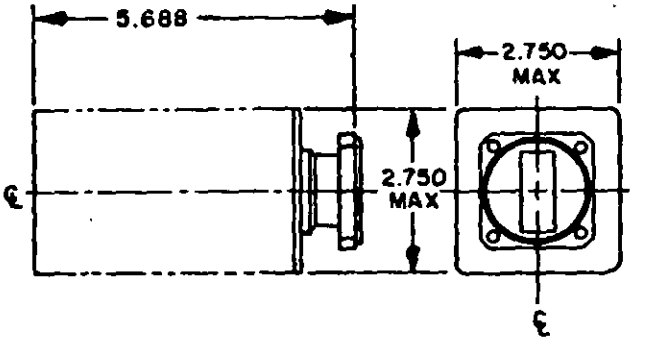


FIGURE 1.

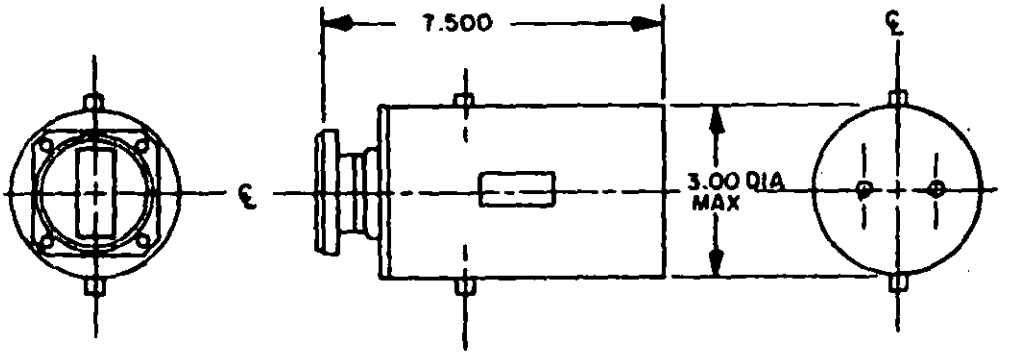


FIGURE 2.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/19-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER AVG WATT	POWER PEAK KW	PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
01	I	A	M3922/53-003 (UG-135/U)	1.10	400	290	30	1	---
02	II	C	M3922/53-001 (UG-39/U)	1.10	400	290	30	2	---
03	II	A	M3922/53-003 (UG-135/U)	1.10	1000	290	30	2	0.30
04	II	C	M3922/53-001 (UG-39/U)	1.10	1000	290	30	2	0.30
05	II	CRS	M3922/53-001 (UG-39/U)	1.10	1000	290	30	2	0.30

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 12.4 TO 18.0 GHz)

MIL-D-3954/13

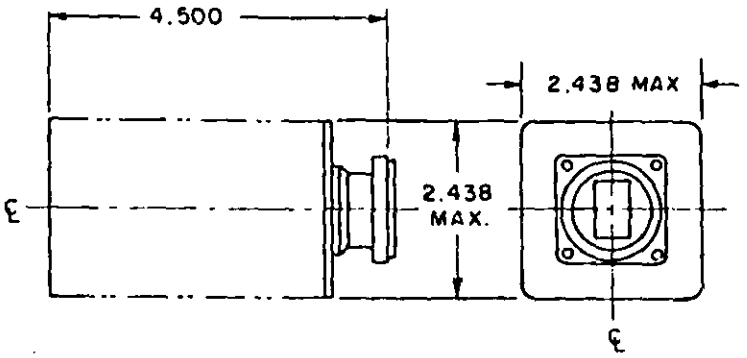


FIGURE 1.

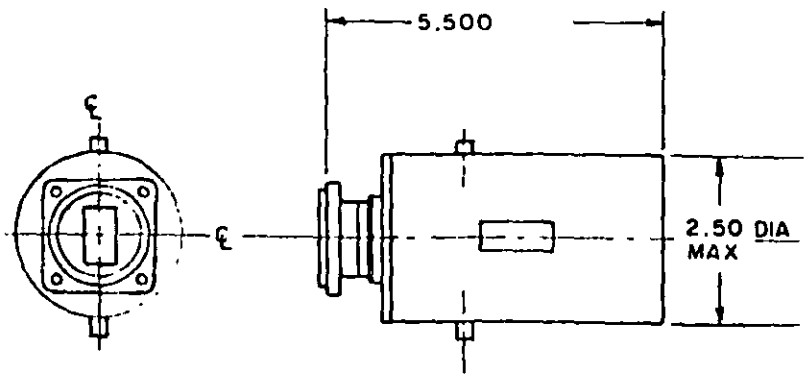


FIGURE 2.

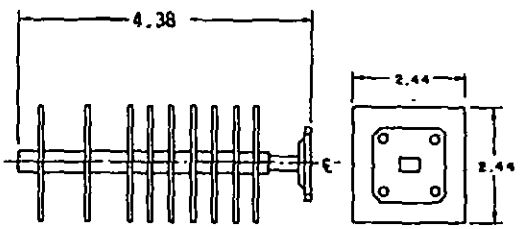


FIGURE 3.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/13-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER AVG WATT	POWER PEAK KW	PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
01	I	A	M3922/53-006 (UG-1665/U)	1.15	70	160	30	1	---
02	II	A	M3922/53-006 (UG-1665/U)	1.15	500	160	30	2	0.15
03	II	C	M3922/53-005 (UG-419/U)	1.15	500	160	30	2	0.15
04	II	CRS	M3922/53-005 (UG-419/U)	1.15	500	160	30	2	0.15
05	I	A	M3922/53-006 (UG-1665/U)	1.10	200	10	30	3	---

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 18.0 TO 26.5 GHz)

MIL-D-3954/14

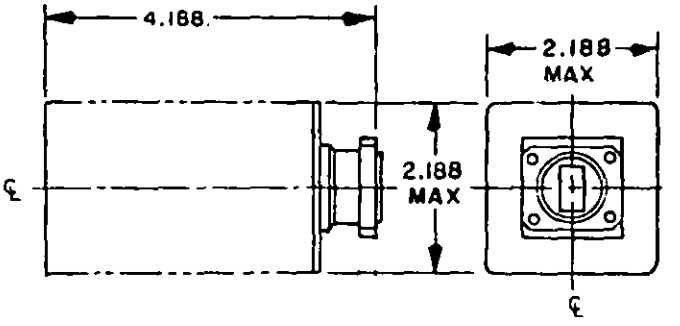


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/14-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER		PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
					AVG WATT	PEAK KW			
01	I	A	M3922/54-002 (UG-597/U)	1.15	50	80	21.3	---	---

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 26.5 TO 40.0 GHz)

MIL-D-3954/12

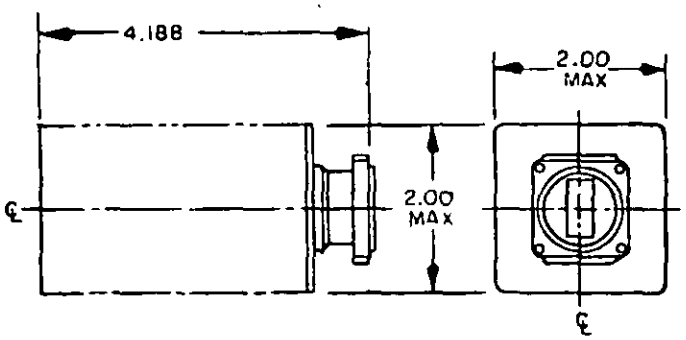


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/12-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER		PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
					AVG WATT	PEAK KW			
01	I	A	M3922/54-003 (UG-599/U)	1.15	35	100	30	---	---

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 5.4 TO 5.9 GHz)

MIL-D-3954/20

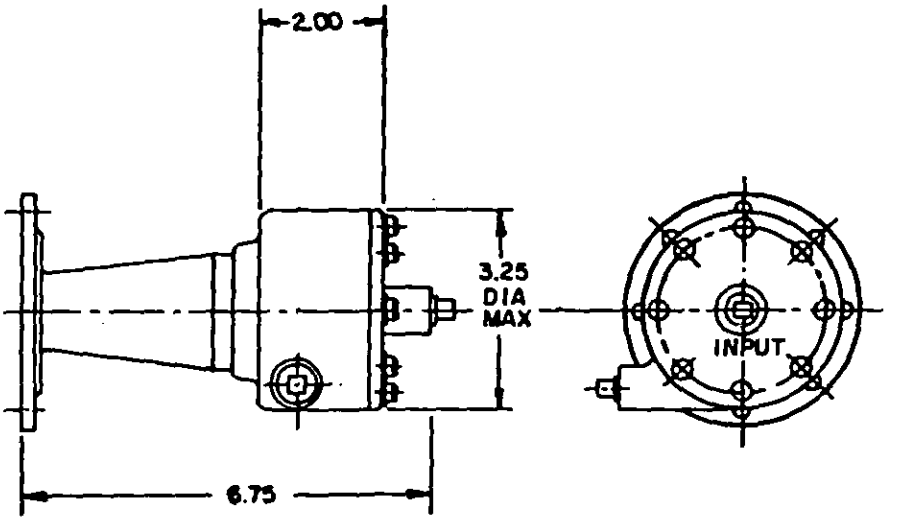


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.


PART NO. M3954/20-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER AVG KW	POWER PEAK mW	PRESSURE INTERNAL PSIG	FLOW RATE GPM
01	II	A	M3922/57-001 (UG-407/U)	1.12:1* 1.20:1**	7.5	5.0	30	1.3

* WITH DISTILLED WATER COOLANT
** WITH 40% ETHYLENE GLYCOL 60% WATER BY VOLUME

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, WAVEGUIDE (FREQUENCY RANGE 8.2 TO 12.4 GHz)

MIL-D-3954/22

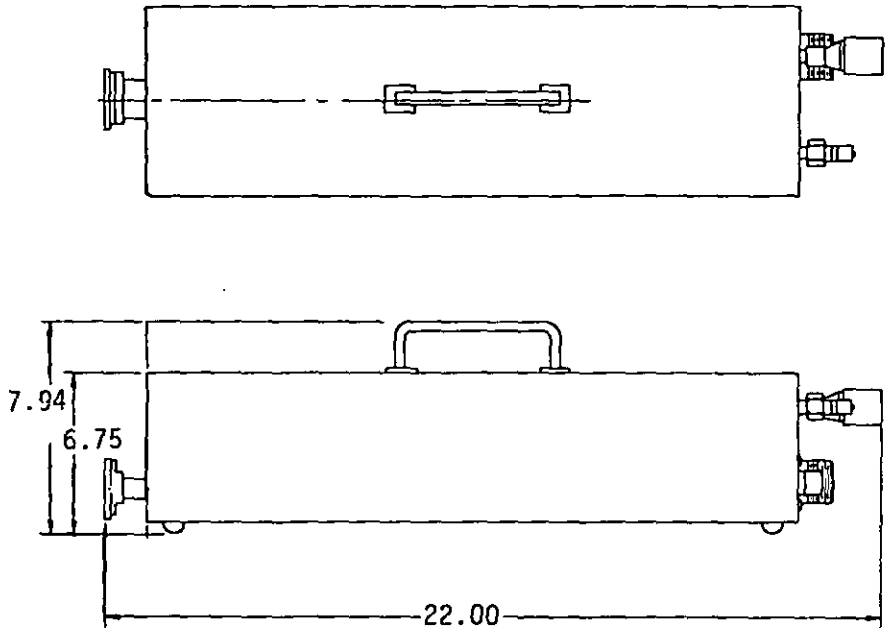

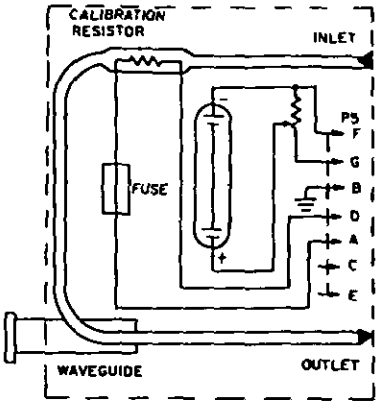


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M3954/22-	CLASS	MATERIAL	FLANGE EQUAL TO	VSWR MAX	POWER AVG KW	POWER PEAK KW	PRESSURE INTERNAL PSIG	FIG.	FLOW RATE GPM
001	II	A	---	1.15	2	---	4	---	0.2
002	II	A	---	1.15	2	---	4	---	0.2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL COAXIAL

MIL-D-39030

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR COAXIAL AND STRIPLINE ELECTRICAL DUMMY LOADS INTENDED FOR TERMINATING COAXIAL AND STRIPLINES.

MATERIAL GUIDE	
MATERIAL FOR BODY, CONNECTOR, FINISH	CODE
ALUMINUM ALLOY (ANNODIZED)	AA
BRASS	B
BERYLLIUM COPPER	BC
CHEMICAL COVERSION COATING	CCC
CORROSION-RESISTANT STEEL	CRS
GOLD PLATED	GP
NICKEL PLATED	NP
PASSIVATED	P

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL FREQUENCY RANGE, DC TO 5 GHz

MIL-D-39030/1

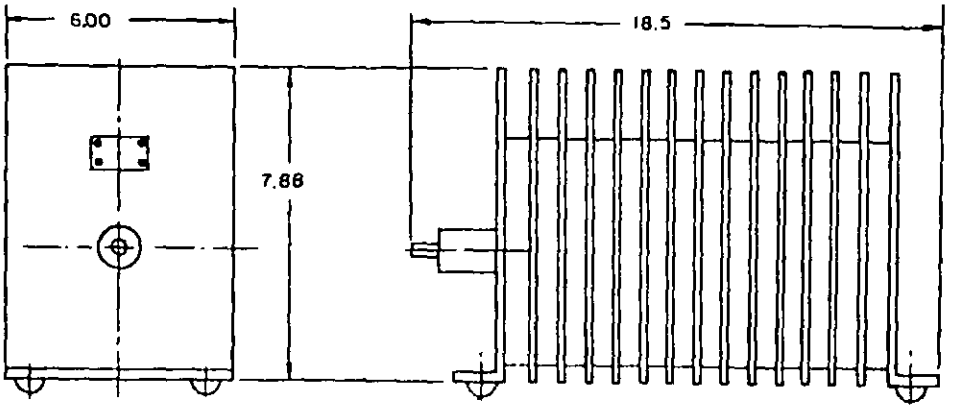


TABLE I. CHARACTERISTICS

PART NO. M39030/1-	OPERATING FREQUENCY GHz	VSWR DC TO 5 GHz	POWER (MAX) AVG. WATTS	POWER (MAX) PEAK KW	CONNECTOR
01	---	1.5 MAX	600	10	N MALE
02	---	1.5 MAX	600	10	N FEMALE
03	---	1.5 MAX	600	2.5	BNC MALE
04	---	1.5 MAX	600	2.5	BNC FEMALE
05	---	1.5 MAX	600	2.5	TNC MALE
06	---	1.5 MAX	600	2.5	TNC FEMALE
07	---	1.5 MAX	600	250	LC MALE
08	---	1.5 MAX	600	250	LC FEMALE
09	---	1.5 MAX	600	10	C MALE
10	---	1.5 MAX	600	10	C FEMALE
11	---	1.5 MAX	600	250	1 5/8 IN COAXIAL

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE I (SMA), LOW POWER

MIL-D-39030/3

DASH NO.	DIMENSION A MAX
01, 02	.73
09	.84
11	.43
10,12,14	.55
15	.56

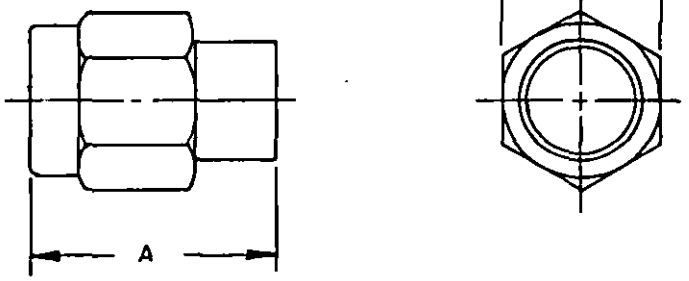


FIGURE 1.

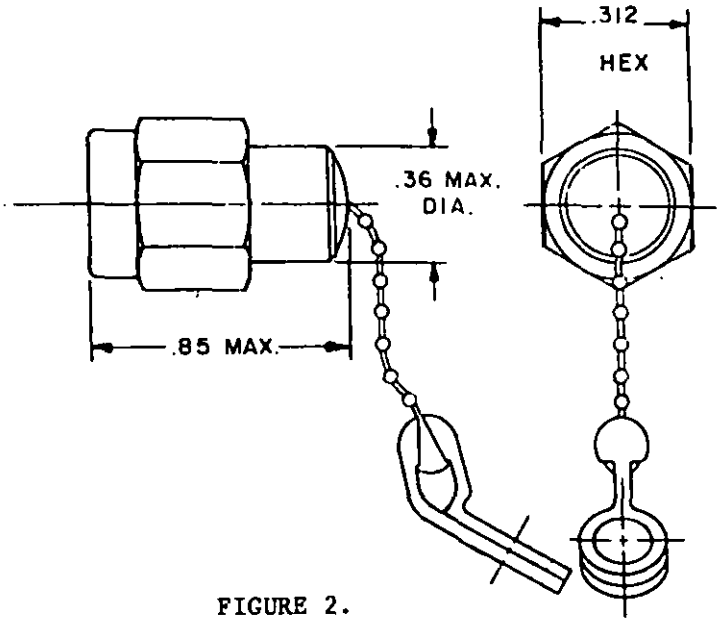


FIGURE 2.

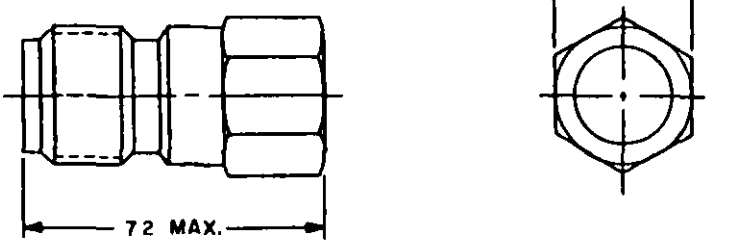


FIGURE 3.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE I (SMA), LOW POWER

MIL-D-39030/3

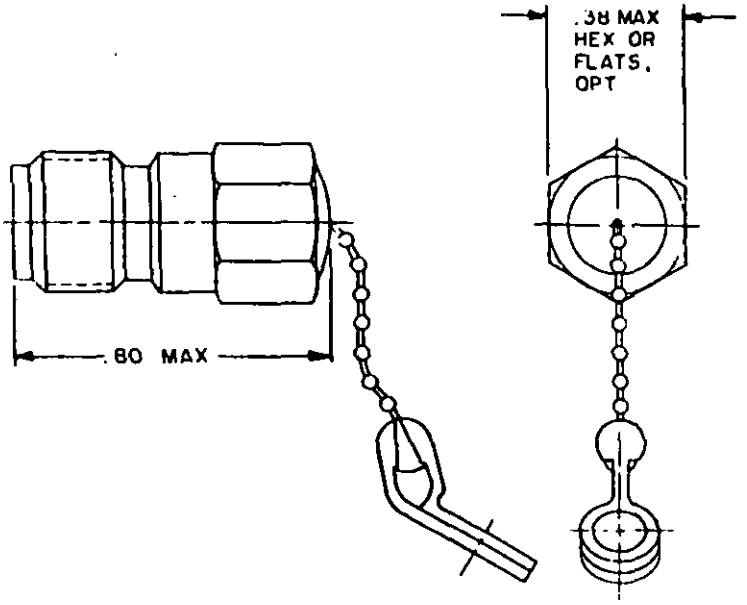


FIGURE 4.

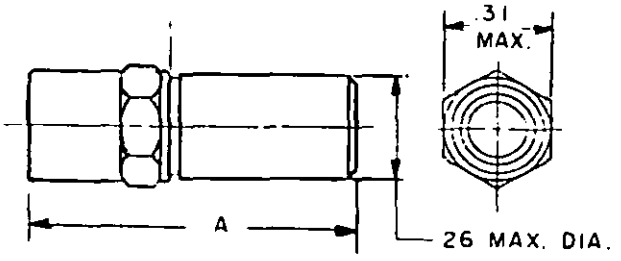


FIGURE 5.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE I (SMA), LOW POWER

MIL-D-39030/3

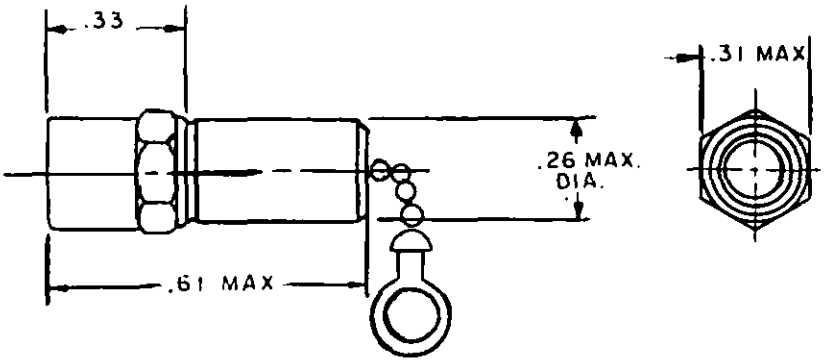


FIGURE 6.

TABLE I. CHARACTERISTICS

PART NO. M39030/3-	OPERATING FREQUENCY GHz	VSWR MAX	POWER WATTS (MAX)		MATERIAL		FIG.
			AVG.	PEAK	BODY AND CONNECTOR	FINISH	
01	DC TO 18	1.05:1	.5	50	CRS	GP	1
02	DC TO 18	1.05:1	.5	50	CRS	P	1
03	DC TO 18	1.05:1	.5	50	CRS	GP	2
04	DC TO 18	1.05:1	.5	50	CRS	P	2
05	DC TO 18	1.05:1	.5	50	CRS	GP	3
06	DC TO 18	1.05:1	.5	50	CRS	P	3
07	DC TO 18	1.05:1	.5	50	CRS	GP	4
08	DC TO 18	1.05:1	.5	50	CRS	P	4
09	DC TO 10	1.10:1	1.0	100	CRS	GP	5
10	DC TO 10	2.10:1	2.0	200	CRS	GP	5
11	DC TO 18	1.15:1	1.0	100	CRS	GP	1
12	2 TO 19	1.30:1	1.0	100	CRS	GP	5
13	2 TO 19	1.30:1	.5	50	CRS	GP	6
14	2 TO 19	1.30:1	1.0	100	CRS	GP	5
15	4.4 TO 5.0	1.025:1	.5	50	CRS	GP	1

OPERATING TEMPERATURE: -55°C TO +125°C FOR DASH NO. 01 THRU 08, 11, 15;
-65°C TO +125°C FOR DASH NO. 09, 10, 12, 13, 14.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE I (SMA), MEDIUM POWER

MIL-D-39030/4

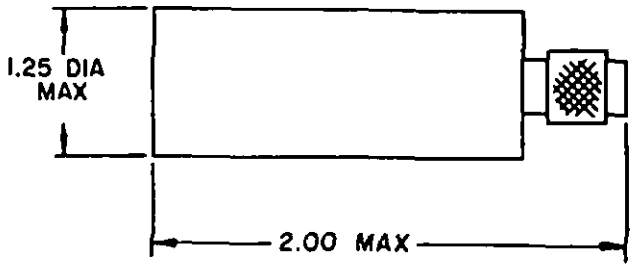


TABLE I. CHARACTERISTICS

PART NO. M39030/4-	OPERATING FREQUENCY GHz	VSWR GHz	POWER (MAX) AVG. WATTS	POWER (MAX) PEAK KW	CONNECTOR
01	DC TO 12.4	1.30	10	3	CRS
02	DC TO 12.4	1.30	10	3	BC

OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE III (BNC), LOW POWER

MIL-D-39030/7

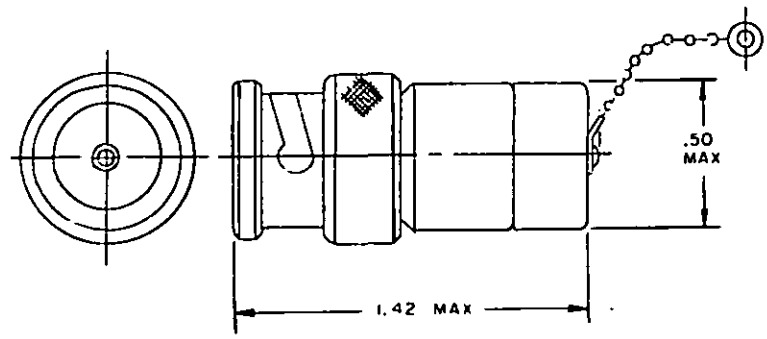


FIGURE 1.

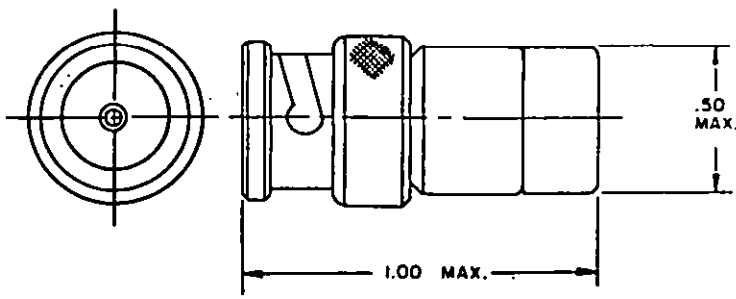


FIGURE 2.

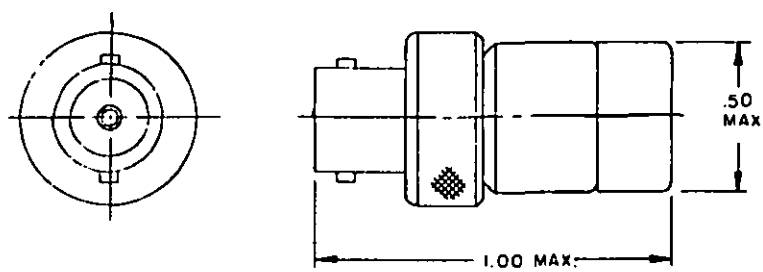


FIGURE 3.

TABLE I. CHARACTERISTICS

PART NO. M39030/7-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL		FIGURE
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH	
01,02,03,04	DC TO .25	1.10:1	.5	1.0	CRS	GP	1
05,06	DC TO 2.5	1.15:1	2.0	1.0	B	NP	2,3 RESP

OPERATING TEMPERATURE: -25° C TO +105° C FOR DASH NO. 01 THRU 04
-55° C TO +125° C FOR DASH NO. 05 THRU 06

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE IV (TNC), LOW POWER

MIL-D-39030/5

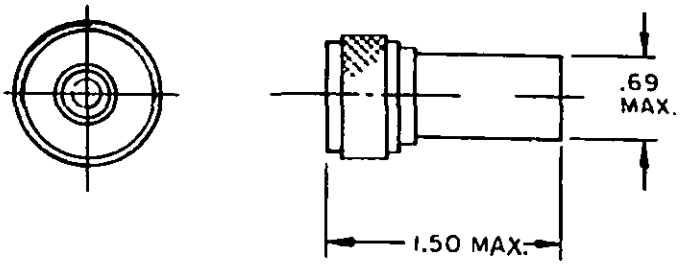


FIGURE 4.

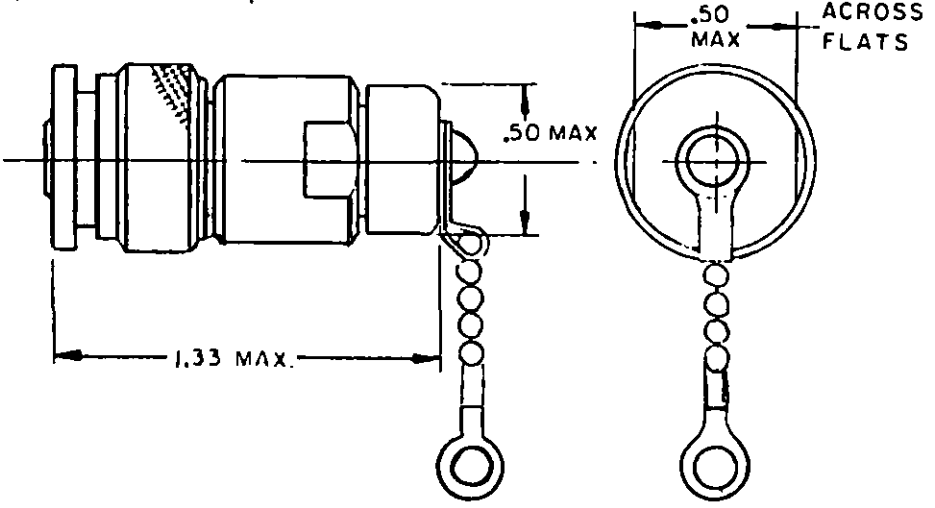


FIGURE 5.

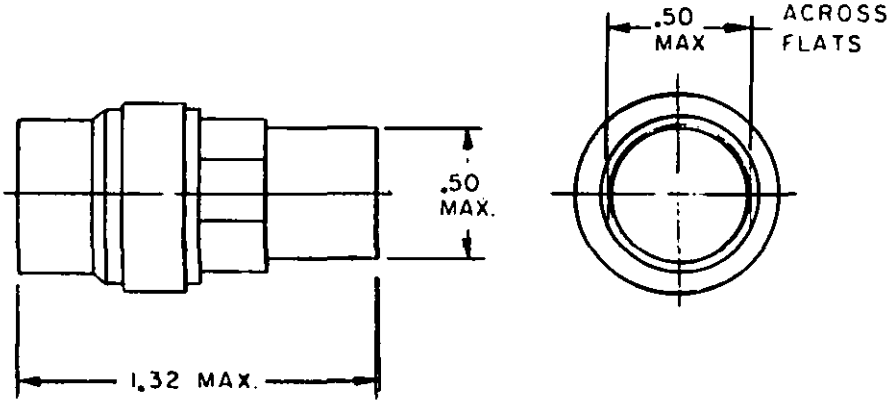


FIGURE 6.

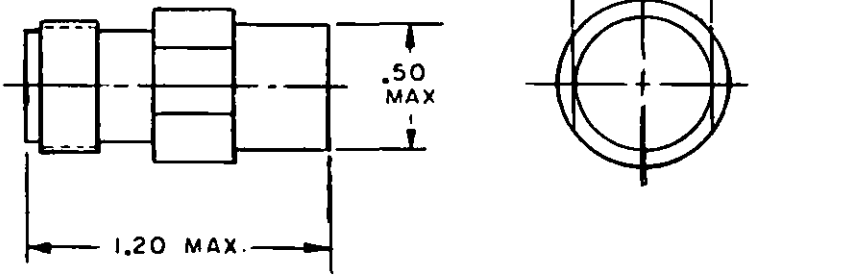


FIGURE 7.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE IV (TNC), LOW POWER

MIL-D-39030/5

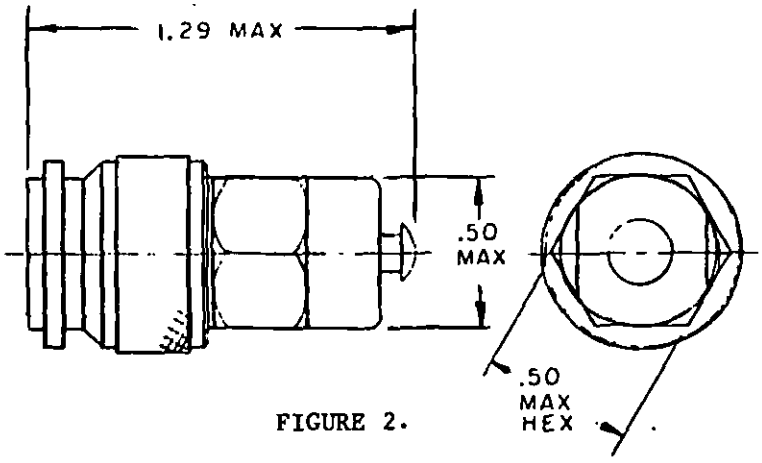


FIGURE 2.

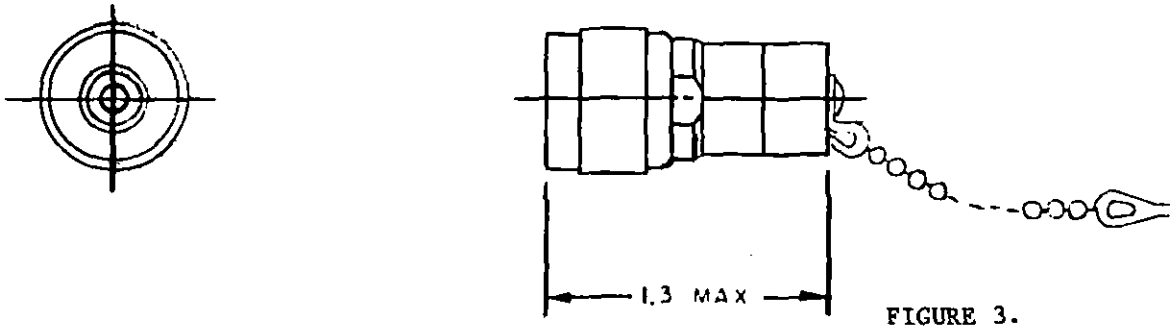


FIGURE 3.

TABLE I. CHARACTERISTICS

PART NO. M39030/5-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL		FIG.
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH	
02	.06 TO .08	1.12:1	.5	.6	CRS	GP	2
03	DC TO 10.0	1.15:1	2.0	2.5	CRS	GP	3
04	DC TO 10.0	1.05:1 (DC TO 2.4) 1.20:1 (2.4 TO 10.0)	5.0	6.0	CRS	GP	4
05	DC TO 11.0	1.10:1	3	1	CRS	P	5
06	.03 TO 12.4	1.10:1	1.0	1.2	CRS	NP	6
07	.03 TO 12.4	1.10:1	1.0	1.2	CRS	NP	7

OPERATING TEMPERATURE: -55°C TO +125°C FOR DASH NO. 03, 06, 07;
-46°C TO +71°C FOR DASH NO. 02; -62°C TO +71°C FOR DASH NO. 04;
-54°C TO +125°C FOR DASH NO. 05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE IV (TNC), MEDIUM POWER

MIL-D-39030/8

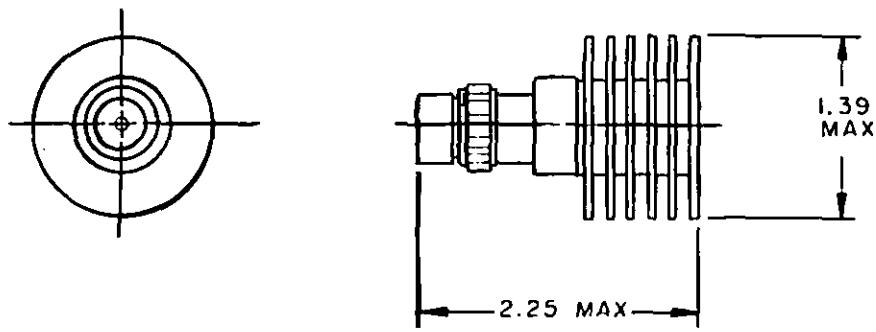


TABLE I. CHARACTERISTICS

PART NO. M39030/8-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH
01	DC TO 6.0	1.20:1 (DC TO 4.0) 1.30:1 (4.0 TO 6.0)	10	5	AA,CRS	AA,GP

OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE IV (TNC), HIGH POWER

MIL-D-39030/9

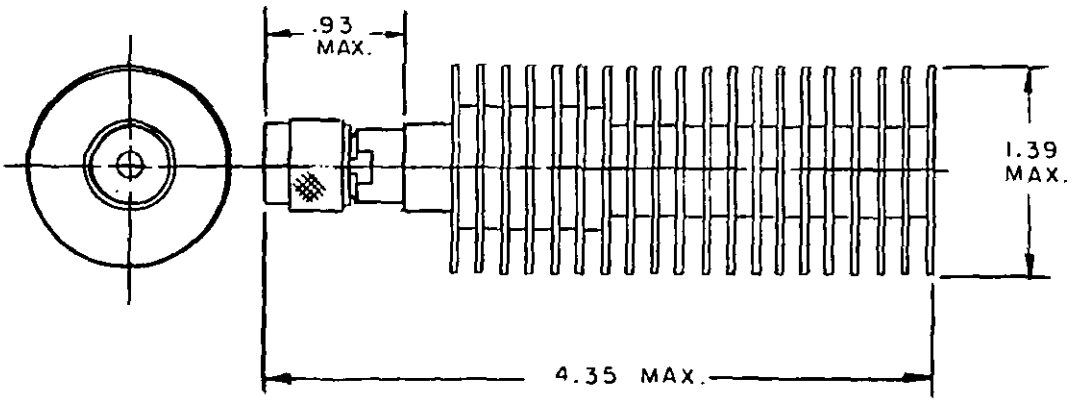


TABLE I. CHARACTERISTICS

PART NO. M39030/9-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH
01	DC TO 8.0	1.10:1 (DC TO 1.0) 1.25:1 (1.0 TO 4.0) 1.40:1 (4.0 TO 8.0)	25	5	AA,CRS	AA,GP

OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE V (N), LOW POWER

MIL-D-39030/6

DASH NO.	DIMENSIONS (MAX)	
	A	B
03	1.51	.38
05	1.64	.70
06	1.28	.81




FIGURE 1.

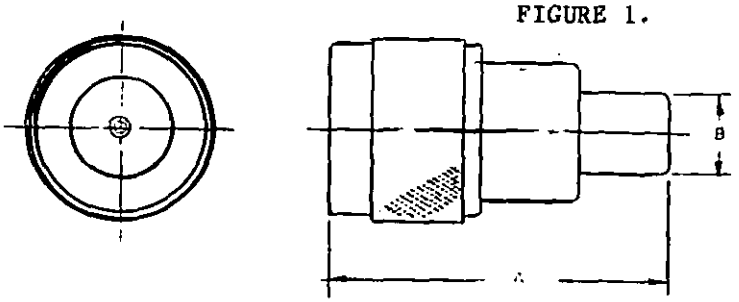


FIGURE 2.

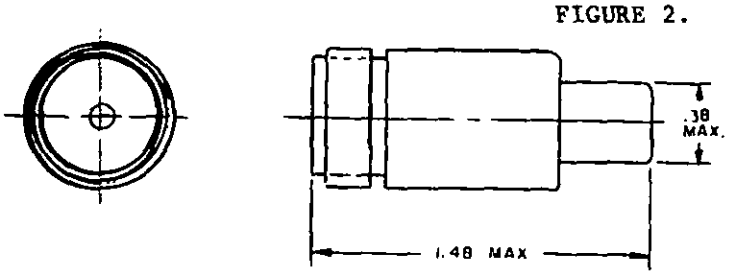


FIGURE 3.

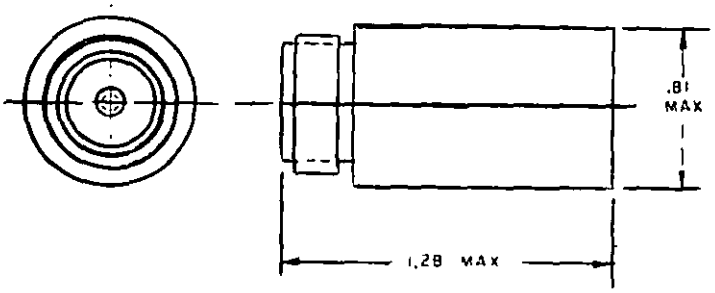


FIGURE 4.

TABLE I. CHARACTERISTICS

PART NO. M39030/6-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL		FIGURE
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH	
03,04	.03 TO 12.4	1.10:1	1	0.5	CRS	NP	2,3 RESP
05	DC TO 12.4	1.15:1	5	2.0	CRS	AA	2
06	DC TO 18.0	1.025:1	2	1.0	CRS	P	1
07	DC TO 18.0	1.025:1	2	1.0	CRS	P	4

OPERATING TEMPERATURE: -55°C TO +125°C FOR DASH NO. 03, 04, 06, 07
-55°C TO +105°C FOR DASH NO. 05

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE V (N), MEDIUM POWER

MIL-D-39030/10

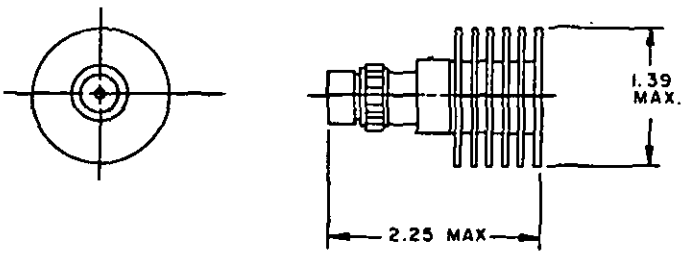


FIGURE 1.

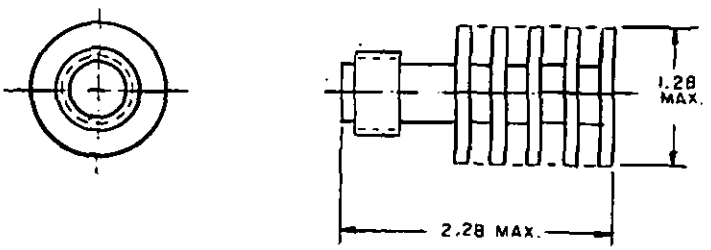


FIGURE 2.

TABLE I. CHARACTERISTICS

PART NO. M39030/10-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL		FIG
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH	
01	DC TO 6.0	1.20:1 (DC TO 4.0) 1.30:1 (4.0 TO 6.0)	10	5	CRS	AA,GP	1
02	DC TO 18.0	1.10:1 (DC TO 8.0) 1.20:1 (8.0 TO 12.4) 1.30:1 (12.4 TO 18.0)	20	5	CRS	AA,P	2

OPERATING TEMPERATURE: -55°C TO +125°C FOR DASH NO. 01
-55°C TO +105°C FOR DASH NO. 02

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE V (N), HIGH POWER

MIL-D-39030/11

DASH NO.	DIMENSIONS	
	A	B
01	4.61	1.63
02	5.06	1.63

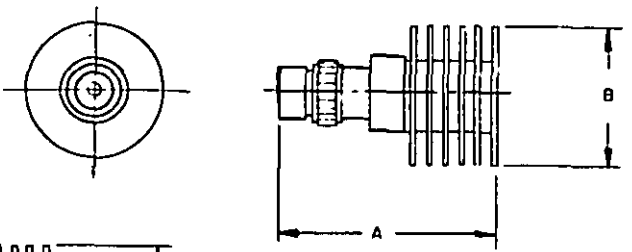


FIGURE 1.

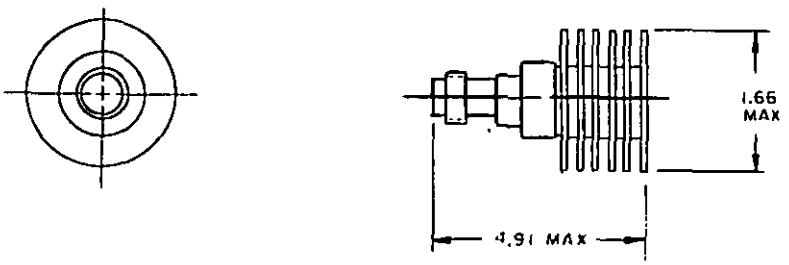


FIGURE 2.

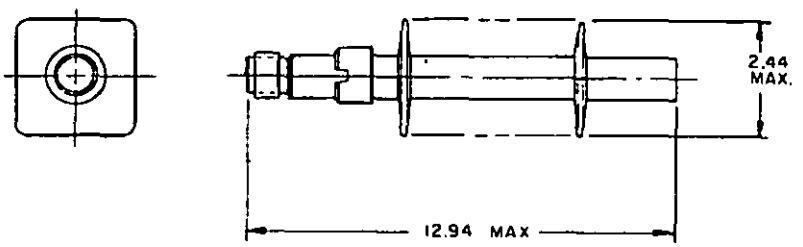


FIGURE 3.

TABLE I. CHARACTERISTICS

PART NO. M39030/11-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL		FIGURE
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH	
01	DC TO 8.0	1.10:1 (DC TO 1.0) 1.20:1 (1.0 TO 4.0) 1.40:1 (4.0 TO 8.0)	50	5.0	CRS	AA,GP	1
02	DC TO 10.0	1.10:1 (DC TO 4.0) 1.30:1 (4.0 TO 10.0)	40	7.5	CRS	AA,GP	1
03	DC TO 10.0	1.10:1 (DC TO 4.0) 1.30:1 (4.0 TO 10.0)	40	7.5	CRS	AA,GP	2
04	.7 TO 18.0	1.20:1	175	10	CRS	AA,GP	3

OPERATING TEMPERATURE: -55°C TO +125°C FOR DASH NO. 01 THRU 03
-55°C TO +160°C FOR DASH NO. 04

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, COAXIAL TYPE VI (C), MEDIUM POWER

MIL-D-39030/12

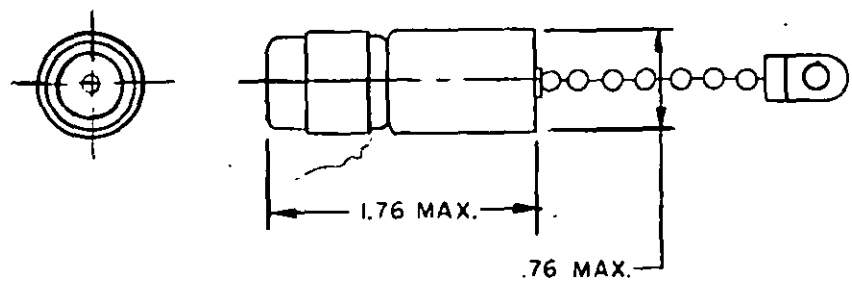


TABLE I. CHARACTERISTICS

PART NO. M39030/12-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH
01	DC TO 12.4	1.10:1 (DC TO 4.0) 1.20:1 (4.0 TO 10.0) 1.30:1 (10.0 TO 12.4)	10	5	CRS	GP

OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE TYPE XIV (SOCKET CONTACT), LOW POWER

MIL-D-39030/13

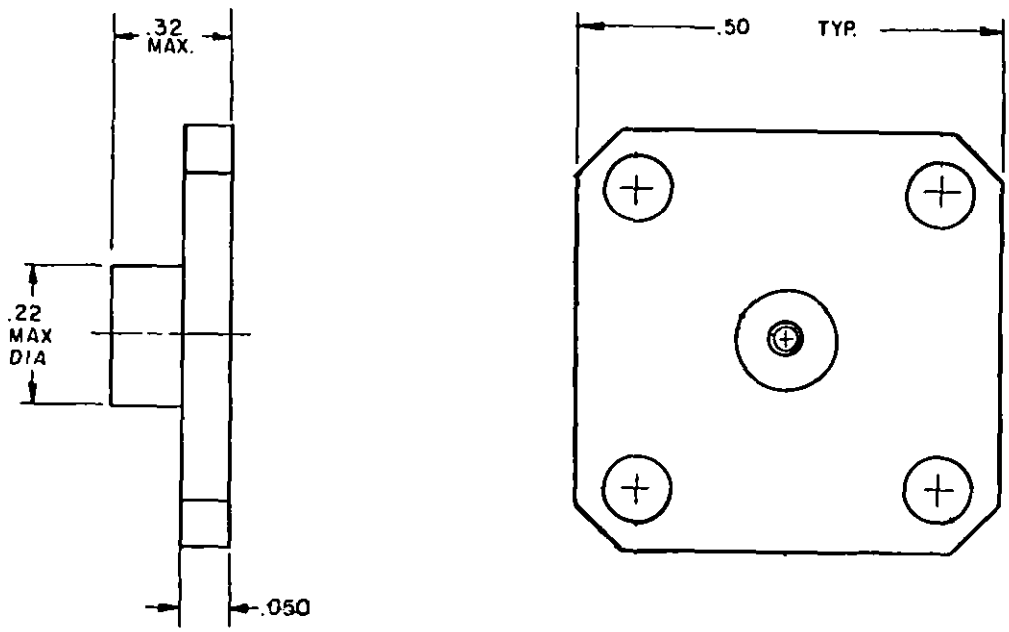


TABLE I. CHARACTERISTICS

PART NO. M39030/13-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK WATTS	BODY AND CONNECTOR	FINISH
01	DC TO 12.4	1.25:1	1	200	AA	GP

OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE, TYPE XVI (BIFURCATED CONTACT), LOW POWER

MIL-D-39030/14

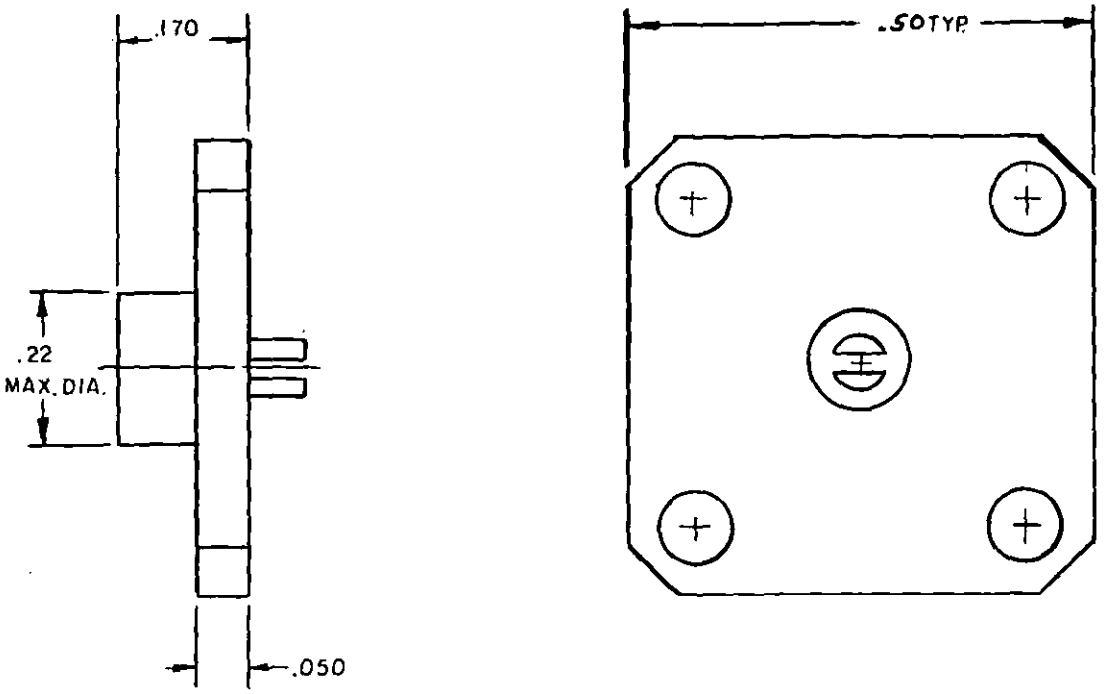


TABLE I. CHARACTERISTICS

PART NO. M39030/14-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK WATTS	BODY AND CONNECTOR	FINISH
01	DC TO 18.0	1.15:1 (DC TO 4.0) 1.20:1 (4.0 TO 8.0) 1.25:1 (8.0 TO 12.0) 1.40:1 (12.0 TO 18.0)	1	200	AA	CCC

OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE, TYPE XVI (BIFURCATED CONTACT), LOW POWER

MIL-D-39030/16

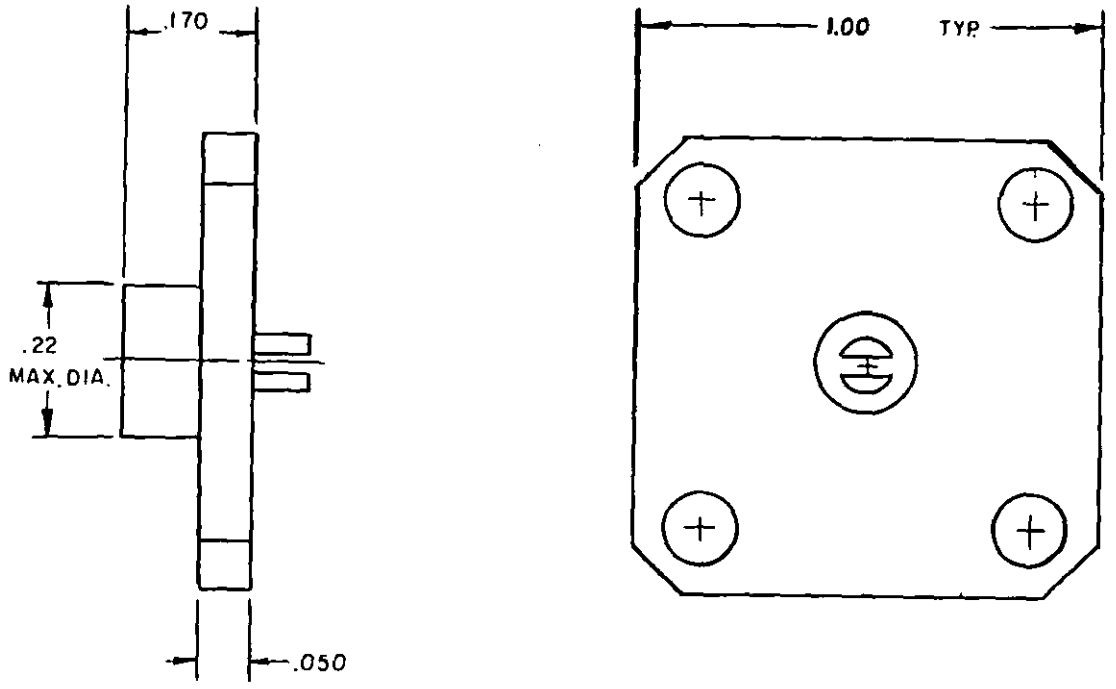


TABLE I. CHARACTERISTICS


PART NO. M39030/16-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK WATTS	BODY AND CONNECTOR	FINISH
01	DC TO 18.0	1.15:1 (DC TO 4.0) 1.20:1 (4.0 TO 8.0) 1.25:1 (8.0 TO 12.0) 1.40:1 (12.0 TO 18.0)	1	200	AA	CCC

OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE, TYPE XIV (TAB CENTER CONTACT), LOW POWER

MIL-D-39030/17

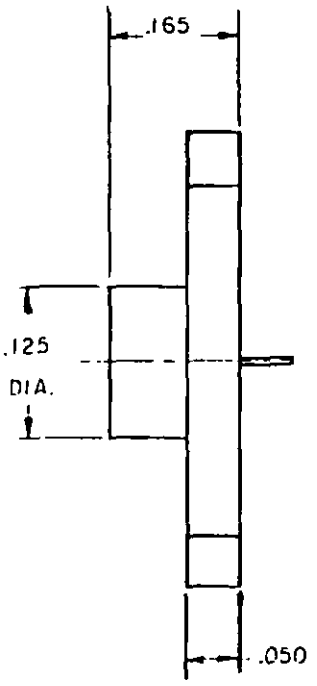

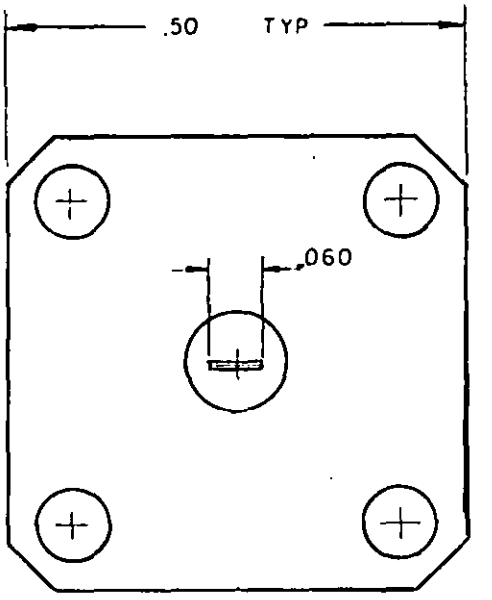


TABLE I. CHARACTERISTICS

PART NO. M39030/17-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH
01	DC TO 12.4	1.10:1 (DC TO 4.0) 1.20:1 (4.0 TO 8.0) 1.30:1 (8.0 TO 12.4)	1	1	B	GP

OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE, TYPE XIV (TAB CONTACT), LOW POWER

MIL-D-39030/20

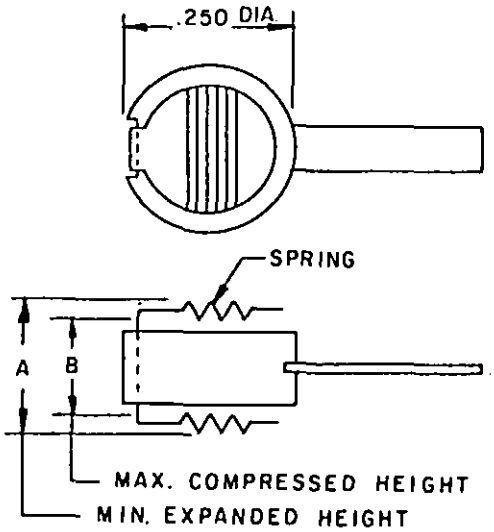


FIGURE 1.

DASH NO.	DIMENSIONS	
	A	B
01	.265	.246
04	.140	.121

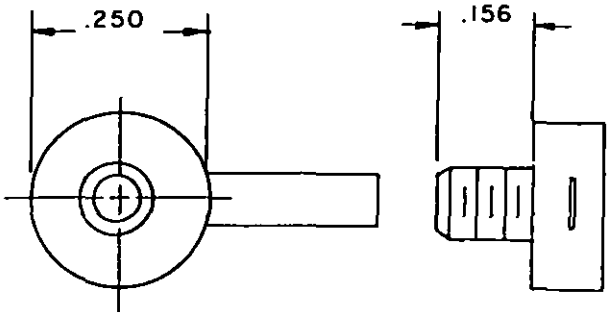


FIGURE 2.

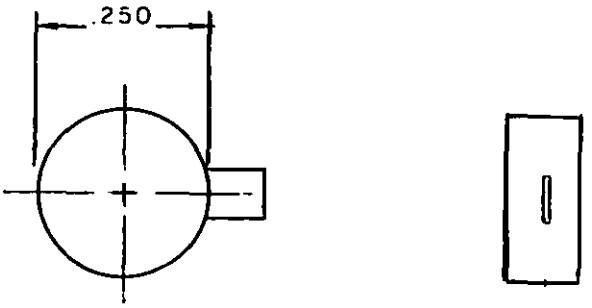
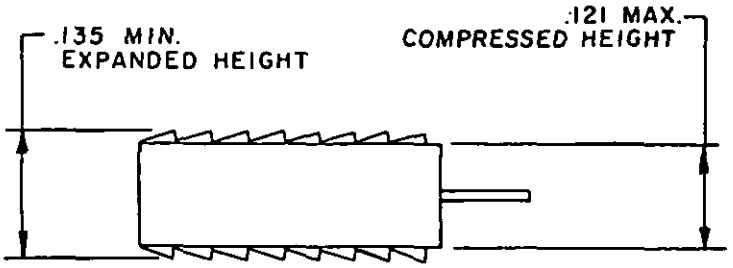


FIGURE 3.



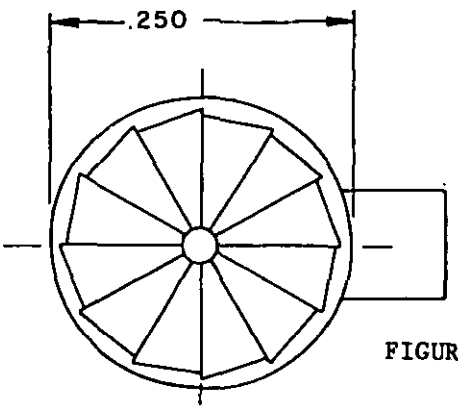


FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE, TYPE XIV (TAB CONTACT), LOW POWER

MIL-D-39030/20

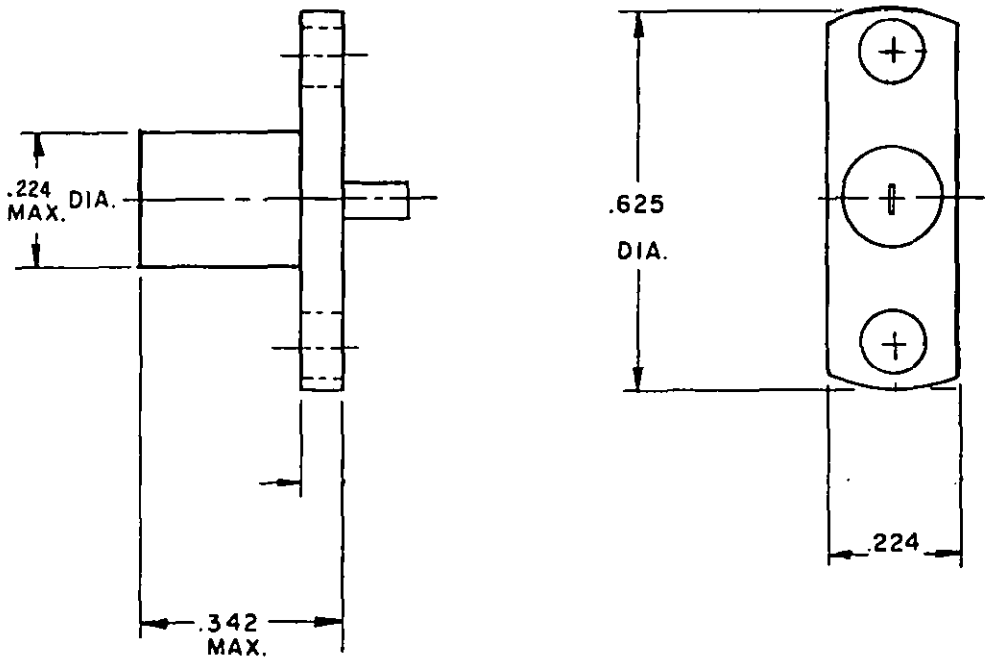


FIGURE 5.

TABLE I. CHARACTERISTICS

PART NO. M39030/20-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL		FIGURE
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH	
01	DC TO 6.0	1.20:1	1.0	0.1	B	GP	1
02,03	DC TO 12.0	1.10:1	1.0	0.1	B	GP	2,3 RESP
04	DC TO 12.4	1.10:1 (DC TO 4.0) 1.25:1 (4.0 TO 8.0) 1.35:1 (8.0 TO 12.4)	1.0	0.1	B	GP	1
05	DC TO 12.4	1.20:1 (DC TO 8.0) 1.35:1 (8.0 TO 12.4)	0.5	0.5	B	GP	4
06	DC TO 18.0	1.25:1	1.0	1.0	B	NP	5

OPERATING TEMPERATURE: -55°C TO +125°C FOR DASH NO. 01 THRU 04;
-55°C TO +85°C FOR DASH NO. 05; -55°C TO +71°C FOR DASH NO. 06

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE TYPE XIV (PIN CONTACT), LOW POWER

MIL-D-39030/18

DASH NO.	DIMENSIONS A
01	.380
02	.390

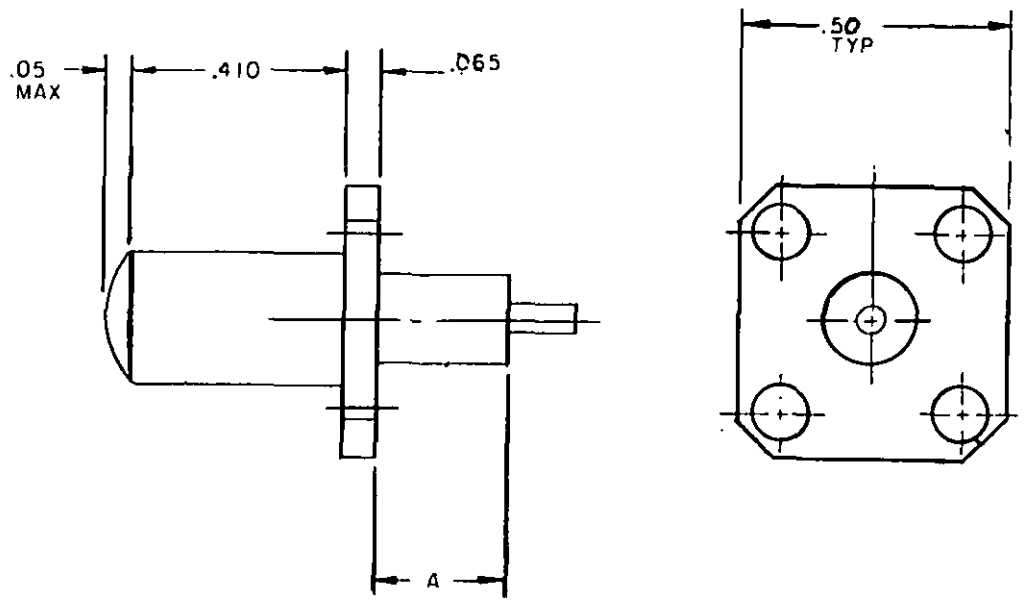


TABLE I. CHARACTERISTICS

PART NO. M39030/18-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH
01	4.400 TO 5.000	1.05:1	.5	.5	CRS	P
02	7.125 TO 8.400	1.05:1	.5	.5	CRS	P

OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currenversion before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE TYPE XIV (TAB CONTACT) MEDIUM POWER

MIL-D-39030/21

DASH NO.	DIMENSIONS A
01,03	.265
02	.140

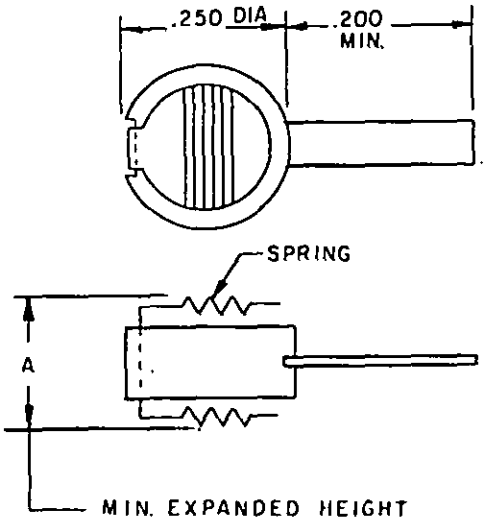


FIGURE 1.

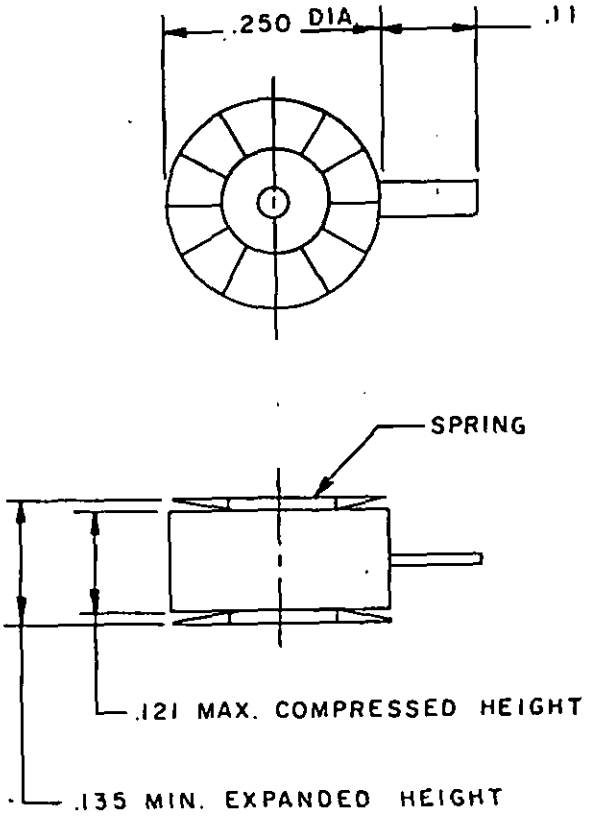


FIGURE 2.

TABLE I. CHARACTERISTICS

PART NO. M39030/21-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX) AVG. WATTS	POWER (MAX) PEAK KW	MATERIAL BODY AND CONNECTOR	MATERIAL FINISH	FIGURE
01	DC TO 3.0	1.15:1	3	.1	B	GP	1
02	DC TO 6.0	1.20:1	3	.1	B	GP	1
03	DC TO 12.0	1.10:1	3	.1	B	GP	1
04	DC TO 12.4	1.10:1 (DC TO 10.0) 1.25:1 (10.1 TO 12.4)	3	3	B	GP	2


OPERATING TEMPERATURE: -55°C TO +125°C FOR DASH NO. 01, 04
-65°C TO +150°C FOR DASH NO. 02, 03

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE TYPE XIV (BIFURCATED CONTACT), HIGH POWER

MIL-D-39030/15

DASH NO.	DIMENSIONS A
01	.028
02	.013
03	.023

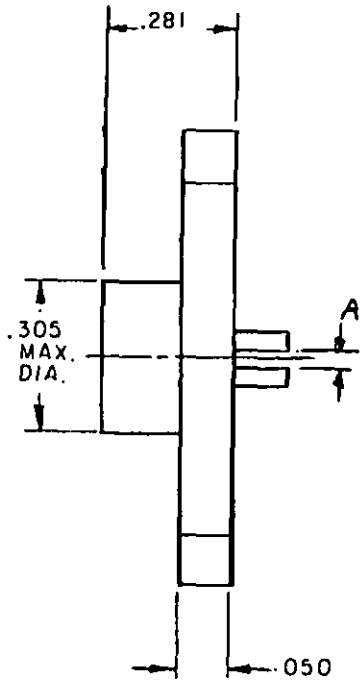

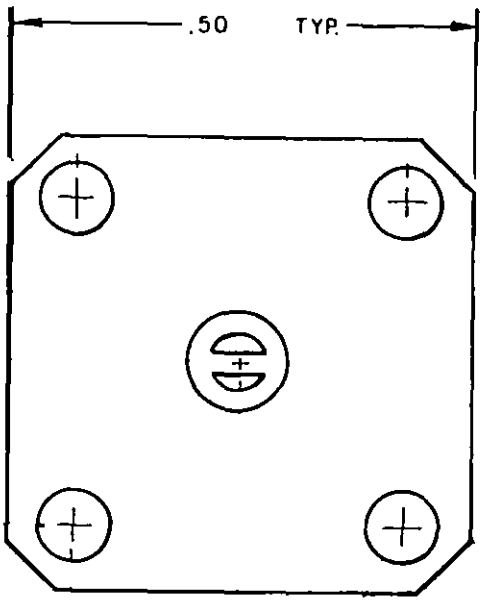


TABLE I. CHARACTERISTICS

PART NO. M39030/15-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH
01	DC TO 12.0	1.15:1 (DC TO 4.0)	20	.5	AA	CCC
02	DC TO 12.0	1.35:1 (4.0 TO 8.0) 1.50:1 (8.0 TO 12.0)	20	.5	AA	CCC


OPERATING TEMPERATURE: -55°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE TYPE XIV (TAB CENTER CONTACT) HIGH POWER

MIL-D-39030/19

DASH NO.	DIMENSIONS A
01	.025
02	.050

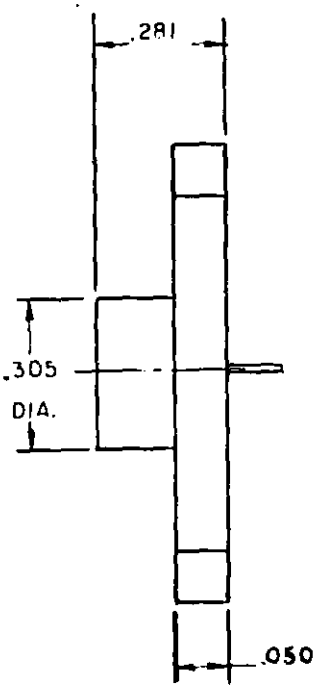

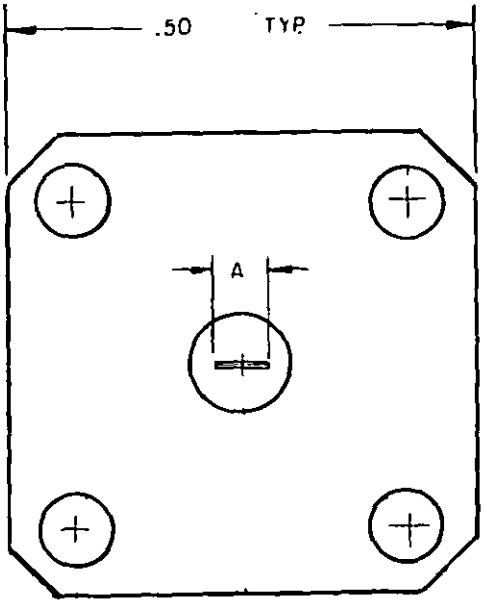


TABLE I. CHARACTERISTICS

PART NO. M39030/19-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH
01	DC TO 12.0	1.15:1 (DC TO 4.0)	20	.5	AA	CCC
02	DC TO 12.0	1.35:1 (4.0 TO 8.0) 1.50:1 (8.0 TO 12.0)	20	.5	AA	CCC

OPERATING TEMPERATURE: -65°C TO +125°C

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

DUMMY LOADS, ELECTRICAL, STRIPLINE TYPE XIV (TAB CONTACT), HIGH POWER

MIL-D-39030/22

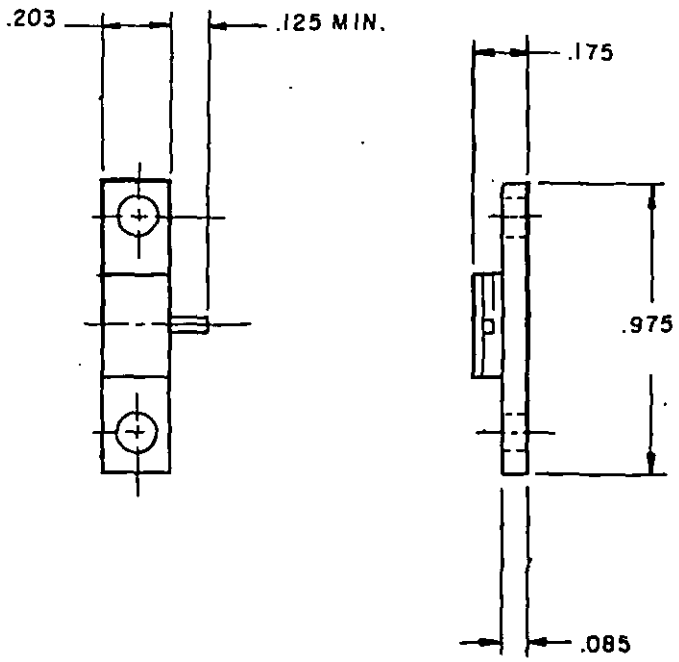


TABLE I. CHARACTERISTICS

PART NO. M39030/22-	OPERATING FREQUENCY GHz	VSWR (MAX) GHz	POWER (MAX)		MATERIAL	
			AVG. WATTS	PEAK KW	BODY AND CONNECTOR	FINISH
01	DC TO 4.0	1.25:1	40	.3	CRS	GP

OPERATING TEMPERATURE: -0° C TO +65° C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, COAXIAL LINE, RIGID, AIR DIELECTRIC

MIL-F-24044

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR FLANGES WHICH ARE USED AS A MEANS OF MECHANICALLY AND ELECTRICALLY CONNECTING 50 AND 75 OHMS, RIGID, AIR DIELECTRIC, COAXIAL TRANSMISSION LINES AND PARTS.

MATERIAL	CODE
ALUMINUM ALLOY	A
COPPER ALLOY	C

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, FIXED, COAXIAL LINE, RIGID

MIL-F-24044/1

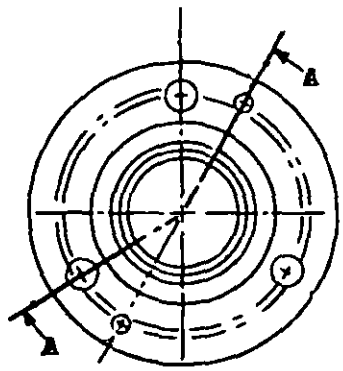


Figure 1. 7/8 Flange.

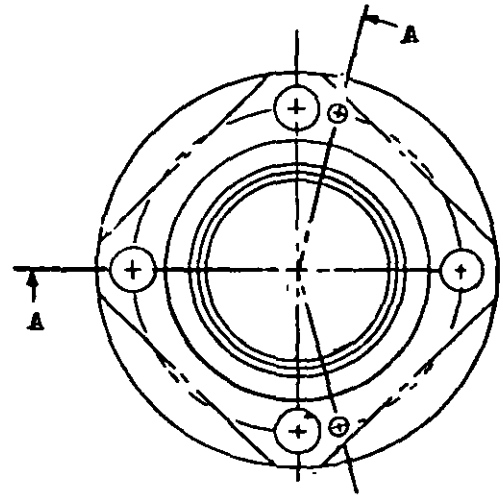


Figure 2. 1-5/8 Flange.

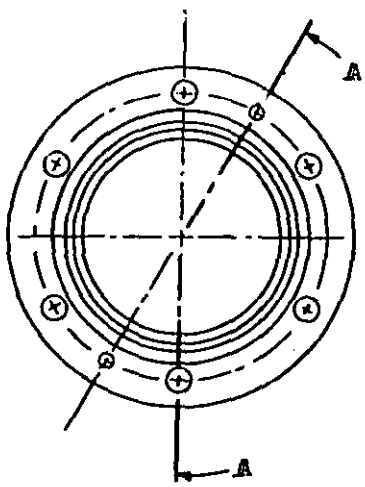


Figure 3. 3-1/8 Flange.

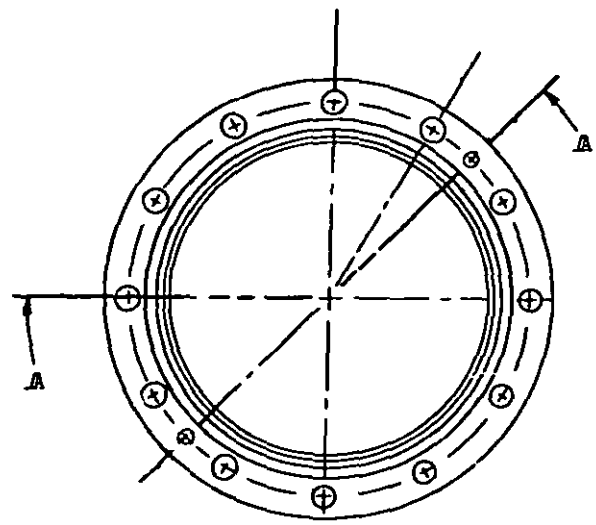


Figure 4. 6-1/8 Flange.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

FLANGES, FIXED, COAXIAL LINE, RIGID

MIL-F-24044/1

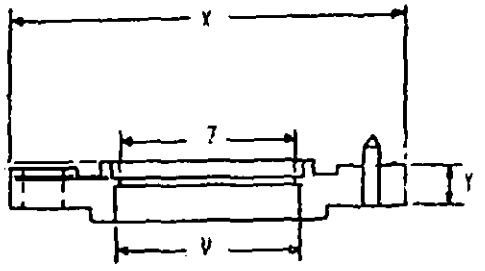


Figure 5. Section A-A.

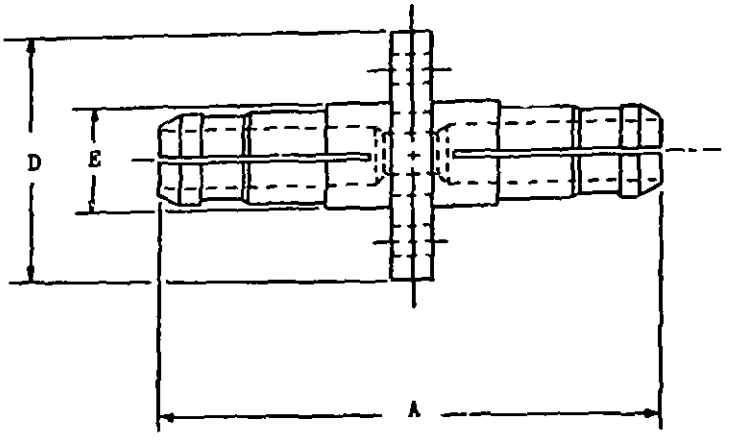


Figure 6. Inner connector.

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M24044/1-	MTL.	NOMINAL IMPEDANCE (OHMS)	FIGURE & 5 & 6	MATES WITH SELF AND M24044/2-
01	C	50	1	01
02	A	50	1	02
03	C	75	1	03
04	A	75	1	04
05	C	50	2	05
06	A	50	2	06
07	C	75	2	07
08	A	75	2	08
09	C	50	3	09
10	A	50	3	10
11	C	75	3	11
12	A	75	3	12
13	C	50	4	13
14	A	50	4	14

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M24044/1-		DIMENSIONS						
		FIG. 5				FIG. 6		
		Z	V	X	Y	A	D	E
01	02	.785	.878	2.250	.3125	2.688	.812	.341
03	04	.785	.878	2.250	.3125	2.688	.812	.226
05	06	1.527	1.628	3.5	.375	3.250	1.645	.6640
07	08	1.527	1.628	3.5	.375	3.250	1.645	.438
09	10	3.027	3.130	5.1875	.4375	4.250	3.198	1.315
11	12	3.027	3.130	5.1875	.4375	4.250	3.198	.8690
13	14	5.981	6.133	8.125	.531	5.50	6.072	.2600

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, ROTATABLE, COAXIAL LINE, RIGID

MIL-F-24044/2

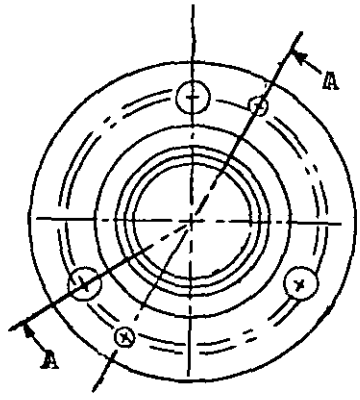


Figure 1. 7/8 flange.

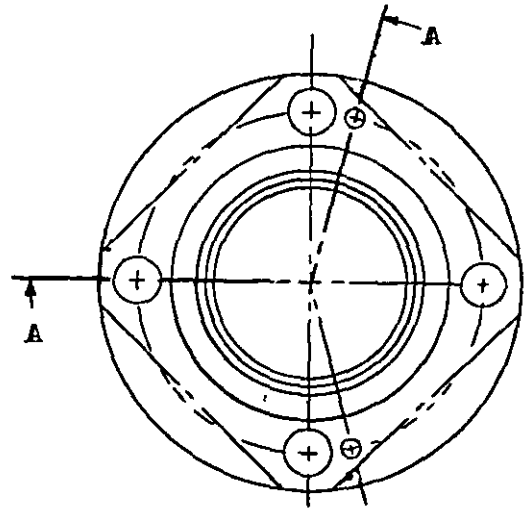


Figure 2. 1-5/8 flange.

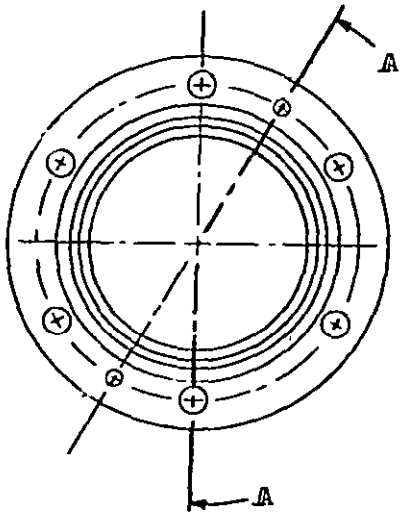


Figure 3. 3-1/8 flange.

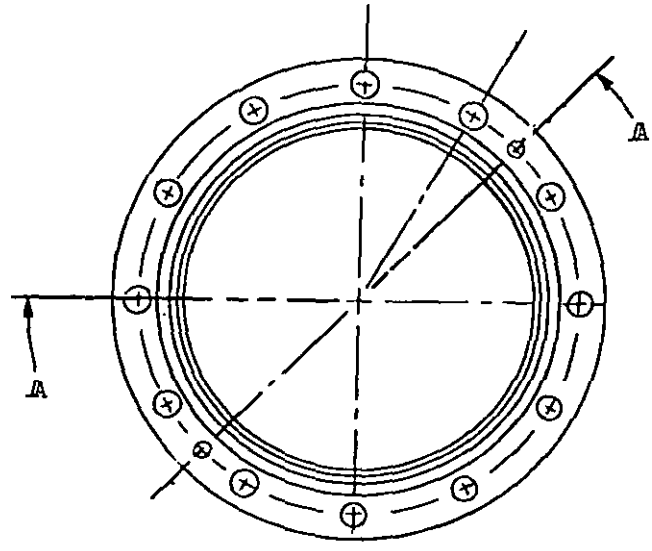


Figure 4. 6-1/8 flange.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

FLANGES, ROTATABLE, COAXIAL LINE, RIGID

MIL-F-24044/2




Figure 5A.

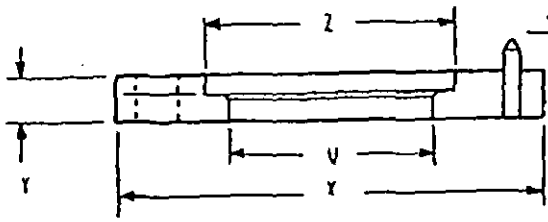


Figure 5B. Section A-A.

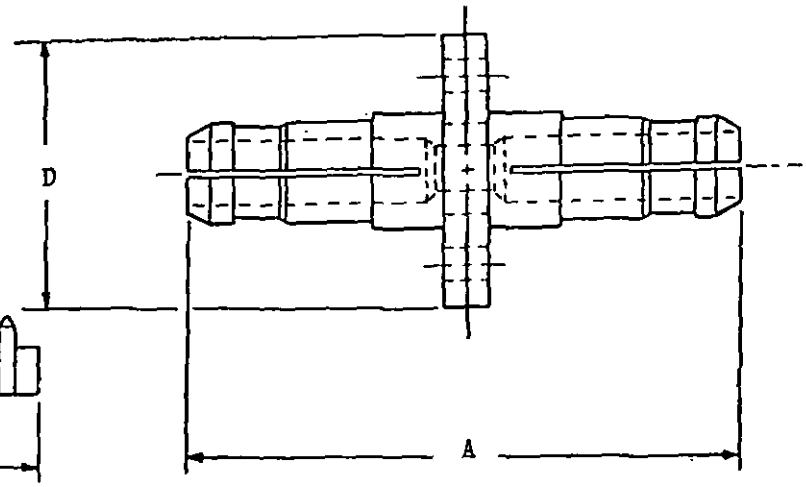


Figure 6. Inner connector.

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M24044/2-	MTL.	NOMINAL IMPEDANCE (OHMS)	FIGURE & 5 & 6	MATES WITH SELF AND M24044/1-
01	C	50	1	01
02	A	50	1	02
03	C	75	1	03
04	A	75	1	04
05	C	50	2	05
06	A	50	2	06
07	C	75	2	07
08	A	75	2	08
09	C	50	3	09
10	A	50	3	10
11	C	75	3	11
12	A	75	3	12
13	C	50	4	13
14	A	50	4	14

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M24044/2-		DIMENSIONS						
		FIG.5A		FIG. 5B			FIG. 6	
		J	L	V	X	Y	A	D
01	02	.176	1.343	1.145	2.250	.3125	2.688	.810
03	04	.176	1.343	1.145	2.250	.3125	2.688	.810
05	06	.230	2.305	2.020	3.500	.375	3.250	1.645
07	08	.230	2.305	2.020	3.500	.375	3.250	1.645
09	10	.235	3.800	3.400	5.188	.438	4.250	3.198
11	12	.235	3.800	3.400	5.188	.438	4.250	3.198
13	14	.328	6.780	6.400	8.125	.513	5.50	6.072

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, GENERAL PURPOSE

MIL-F-3922


SCOPE: THIS SECTION COVERS GENERAL PURPOSE WAVEGUIDE FLANGES, WHICH ARE USED TO COUPLE MECHANICALLY AND ELECTRICALLY TWO SECTIONS OF WAVEGUIDES OR WAVEGUIDE PARTS.

MATERIAL	CODE
ALUMINUM ALLOY	A
COPPER ALLOY	C

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (COVER, SQUARE, 4 HOLES, CIRCULAR BACK)

MIL-F-3922/53

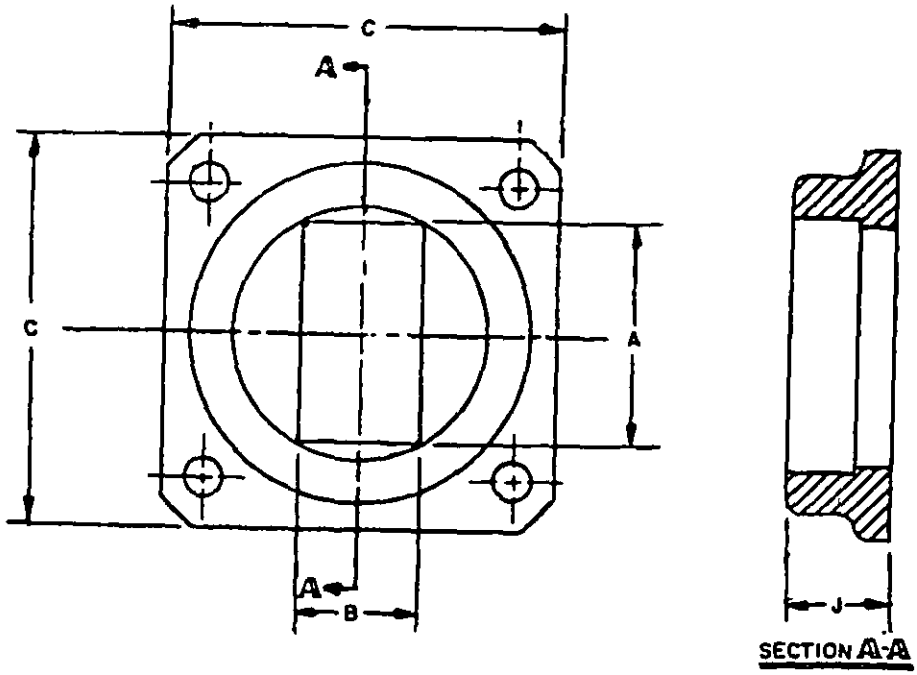

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

FLANGES, WAVEGUIDE, (COVER, SQUARE, 4 HOLES, CIRCULAR BACK)

MIL-F-3922/53

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/53-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/59-	PART NO. M3922/53-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/59-
001	C	079, 075	006	003	A	077, 078, 178	008
002	C	073, 069	007	004	A	071, 072, 177	009
005	C	089,093,087	001	006	A	090, 091, 180	002
007	C	081, 085	010	008	A	083, 084, 179	011
009	C	079, 075	006	010	A	077, 078, 178	008
011	C	089, 093	001	012	A	090, 091, 180	002
013	C	081, 085	010	014	A	083, 084, 179	011

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/53-		DIMENSIONS A	B	C	J	FREQUENCY RANGE (GHz)
001	003	1.003	0.503	1.625	0.438	8.20 - 12.40
002	004	1.253	0.628	1.875	0.438	7.05 - 10.00
005	006	0.705	0.394	1.313	0.313	12.40 - 18.00
007	008	1.003	0.503	1.500	0.391	10.00 - 15.00
009	010	0.705	0.394	1.625	0.438	8.20 - 12.40
011	012	1.003	0.503	1.313	0.313	12.40 - 18.00
013	014	0.854	0.479	1.500	0.391	10.00 - 15.00

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (COVER, SQUARE, 4 HOLES)

MIL-F-3922/54

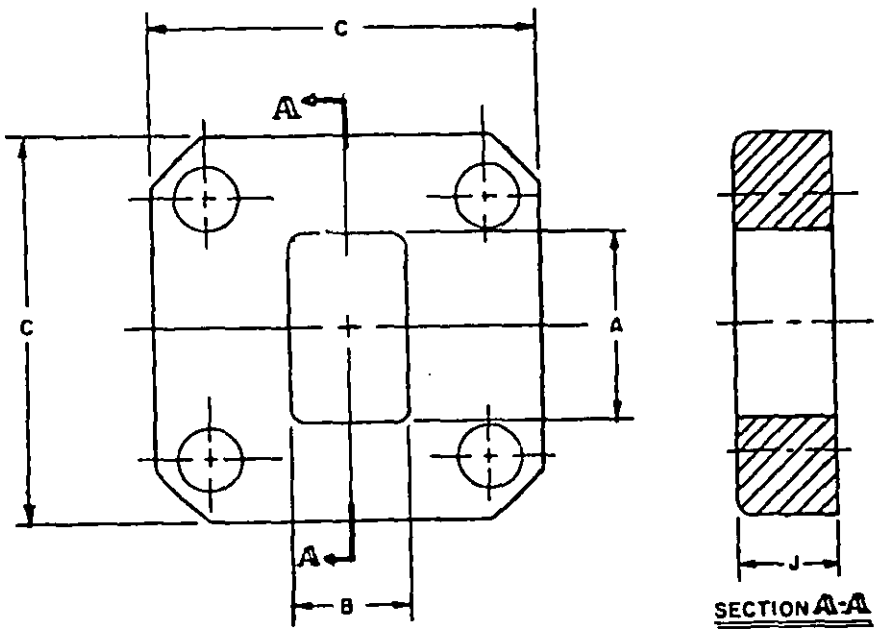


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/54-	MTL.	USED WITH		PART NO. M3922/54-	MTL.	USED WITH	
		WAVEGUIDE M85/	MATING M3922/59-			WAVEGUIDE M85/1-	MATING M3922/59-
001	C	1-102,106	003	002	A	103	004
003	C	3-006	005				


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/54-	DIMENSIONS				FREQUENCY RANGE (GHz)
	A	B	C	J	
001 002	0.504	0.254	0.875	0.188	18.0 - 26.5
003	0.362	0.222	0.750	0.187	26.5 - 40.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (COVER, SQUARE, BUTT MOUNT, 4 HOLES)

MIL-F-3922/68

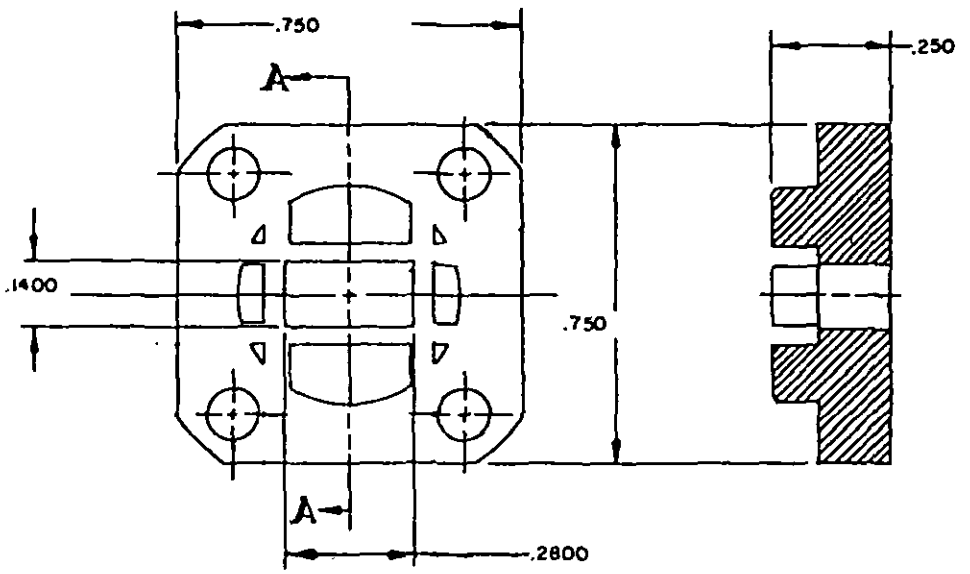

SECTION A-A

TABLE 1. PART NUMBER CHARACTERISTICS

PART NO. M3922/68-	MTL.	USED WITH WAVEGUIDE M85/3-	FREQUENCY RANGE (GHz)
001	C	006,007,008	26.5 - 40.0
002	C	006,007,008	26.5 - 40.0
003	C	006,007,008	26.5 - 40.0

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (COVER, SQUARE, BUTT MOUNT, 4 HOLES)

MIL-F-3922/70

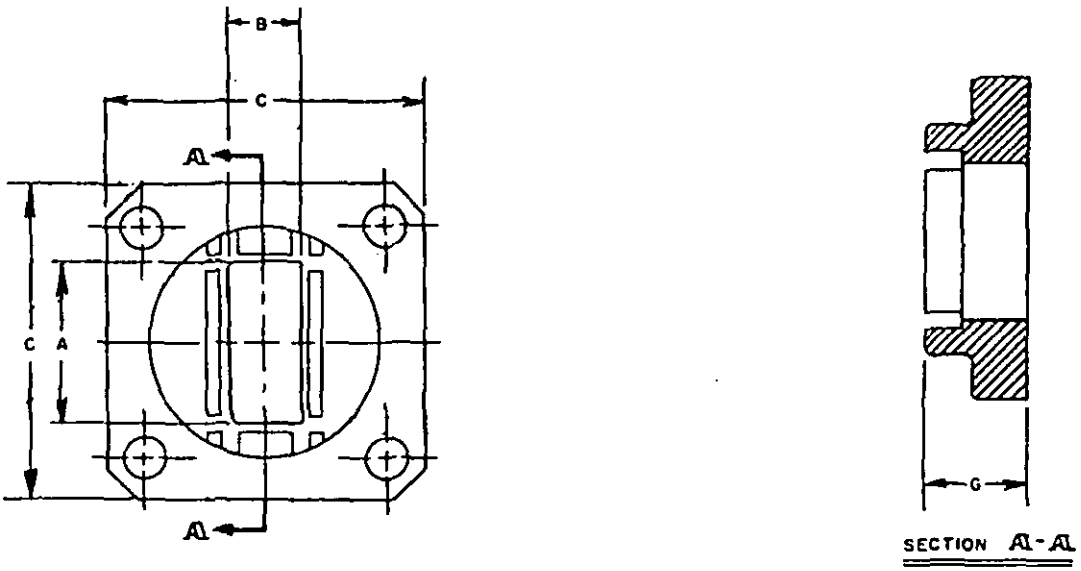


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/70-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/	PART NO. M3922/70-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/
001	C	155, 156	69-001	002	A	157, 158, 160	69-002,003
004	C	081, 085	59-010	005	A	083, 084, 179	59-011
007	C	087,089,093	59-001	008	A	090, 091, 180	59-002
010	C	094, 076	69-004	011	A	097, 098, 181	69-005,006
013	C	155, 156	69-001	014	A	157, 158, 160	69-002,003
016	C	081, 085	59-010	017	A	083, 084, 179	59-011
019	C	087,089,093	59-001	020	A	090, 091, 180	59-002
022	C	094, 096	69-004	023	A	097, 098, 181	69-005,006
025	C	081, 085	59-010	026	A	083, 084, 179	59-011
027	C	100,102,106	59-003	028	A	103, 104, 182	59-004

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/70-		DIMENSIONS A	B	C	G	FREQUENCY RANGE (GHz)
001	002	1.020	0.510	1.687	0.500	7.0 - 11.0
004	005	0.750	0.375	1.500	0.500	10.0 - 15.0
007	008	0.622	0.311	1.312	0.375	12.4 - 18.0
010	011	0.510	0.255	1.312	0.375	15.0 - 22.0
013	014	1.020	0.510	1.687	0.500	7.0 - 11.0
016	017	0.750	0.375	1.500	0.500	10.0 - 15.0
019	020	0.622	0.311	1.312	0.375	12.4 - 18.0
022	023	0.510	0.255	1.312	0.375	15.0 - 22.0
025	026	0.750	0.375	1.500	0.406	10.0 - 15.0
027	028	0.420	0.170	0.875	0.285	18.0 - 26.5

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (COVER, ROUND, 6 HOLES)

MIL-F-3922/55

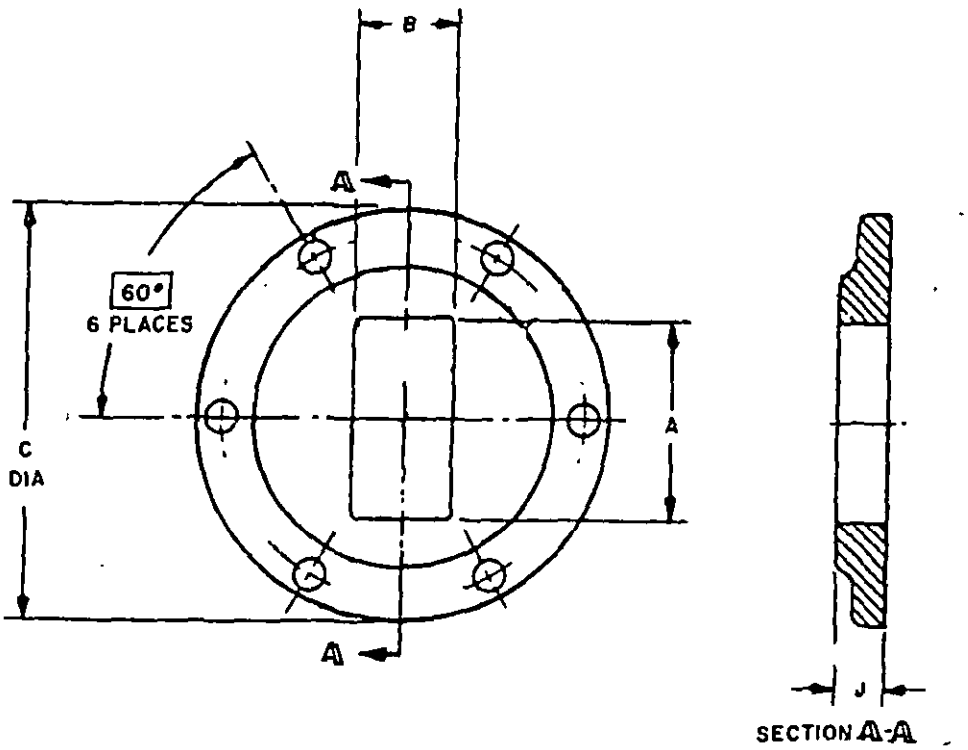


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/55-	MTL.	USED WITH		DIMENSIONS				FREQUENCY RANGE (GHz)
		WAVEGUIDE M85/1-	MATING M3922/60-	A	B	C	J	
001	C	067	001	1.503	0.753	3.125	0.375	5.85 - 8.20
002	A	065	002	1.503	0.753	3.125	0.375	5.85 - 8.20

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (COVER, ROUND, 8 HOLES)

MIL-F-3922/56

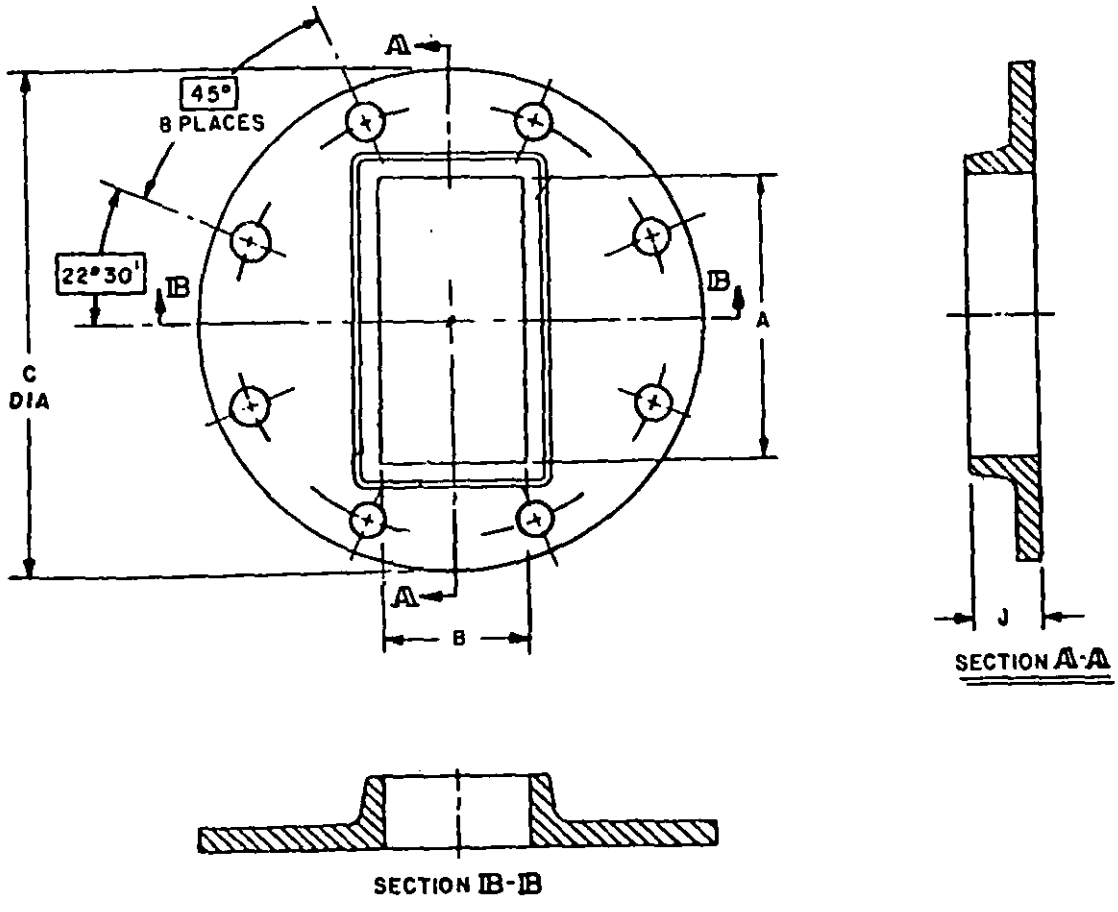


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/56-	MTL.	USED WITH		DIMENSIONS				FREQUENCY RANGE (GHz)
		WAVEGUIDE M85/1-	MATING . M3922/61-	A	B	C	J	
001	C	043	002	3.002	1.502	5.313	0.750	2.60 - 3.95
002	A	041	001	3.002	1.502	5.313	0.750	2.60 - 3.95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (COVER, ROUND, 8 HOLES)
(2 HOLES CENTERED HORIZONTALLY, 2 HOLES CENTERED VERTICALLY)

MIL-F-3922/57

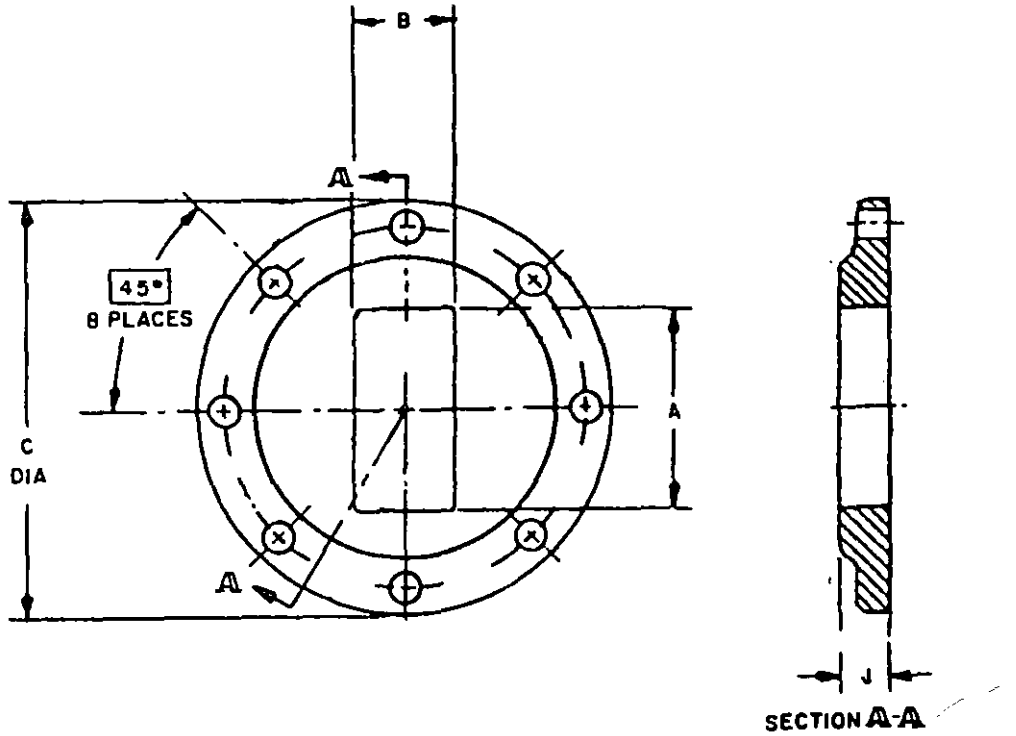


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/57-	MTL.	USED WITH		DIMENSIONS				FREQUENCY RANGE (GHz)
		WAVEGUIDE M85/1-	MATING M3922/62-	A	B	C	J	
001	A	053	001	2.002	1.002	3.625	0.375	3.95 - 5.85
002	C	055	002	2.002	1.002	3.625	0.375	3.95 - 5.85

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CONTACT, ROUND, MILLIMETER, 4 HOLES)

MIL-F-3922/67

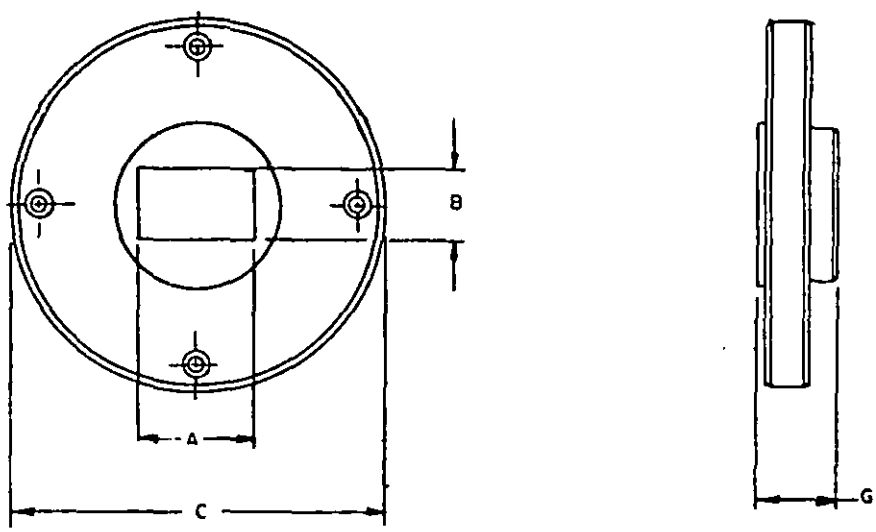


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/67-	MTL.	USED WITH		DIMENSIONS				FREQUENCY RANGE (GHz)
		WAVEGUIDE M85/3-	MATING M3922/67-	A	B	C	G	
001	C	010,011,012	001	0.309	0.197	1.125	0.268	33.0 - 50.0
002	C	017,018,019	002	0.233	0.159	0.750	0.268	50.0 - 75.0
003	C	020,021,022	003	0.207	0.146	0.750	0.268	60.0 - 90.0

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CONTACT, ROUND, SUBMILLIMETER, 4 HOLES)

MIL-F-3922/74

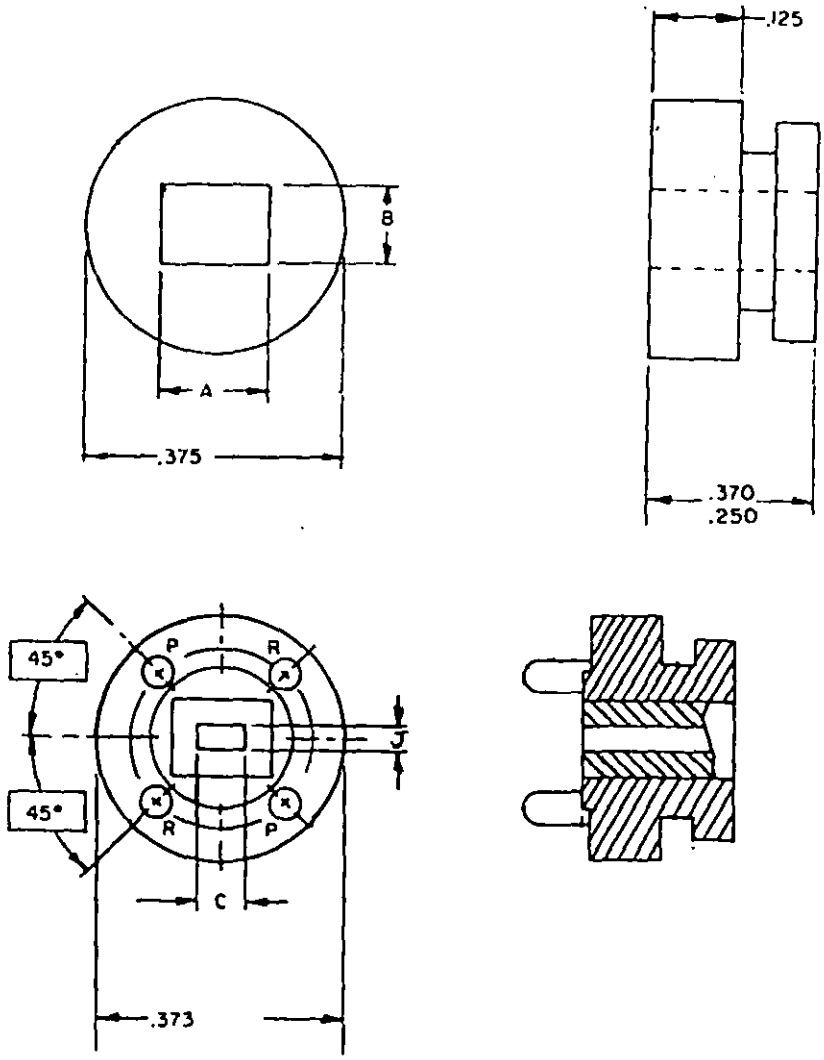


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/74-	MTL.	USED WITH		DIMENSIONS				FREQUENCY RANGE (GHz)
		WAVEGUIDE M85/3-	MATING M3922/74-	A	B	C	J	
001	C	026,027,028	001	.161	.1210	.0800	.0400	90.0 - 140.0
002	C	029,030,031	002	.146	.1135	.0650	.0325	110.0 - 170.0
003	C	032,033,034	003	.132	.1065	.0510	.0255	140.0 - 220.0
004	C	035,036,037	004	.124	.1025	.0430	.0215	170.0 - 260.0
005	C	038,039,040	005	.115	.0980	.0340	.0170	220.0 - 325.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CONTACT, ROUND, 8 HOLES)

MIL-F-3922/66

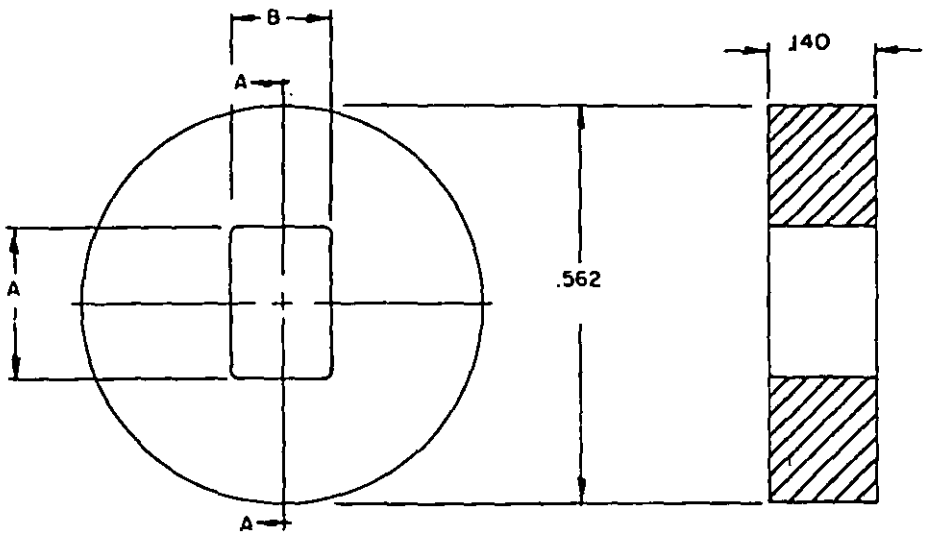



TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/66-	MTL.	USED WITH		DIMENSIONS		FREQUENCY RANGE (GHz)
		WAVEGUIDE M85/3-	MATING M3922/66-	A	B	
001	C	020,021,022	001	.2050	.1440	60.0 - 90.0
002	C	017,018,019	002	.2310	.1570	50.0 - 75.0
003	C	047,048,049	003	.0930	.0680	140.0 - 220.0
004	C	044,045,046	004	.1070	.0750	110.0 - 170.0
005	C	050,051,052	005	.0850	.0640	170.0 - 260.0
006	C	041,042,043	006	.1220	.0820	90.0 - 140.0
007	C	023,024,025	007	.1830	.1330	75.0 - 110.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CONTACT, RECTANGULAR, 10 HOLES)

MIL-F-3922/58

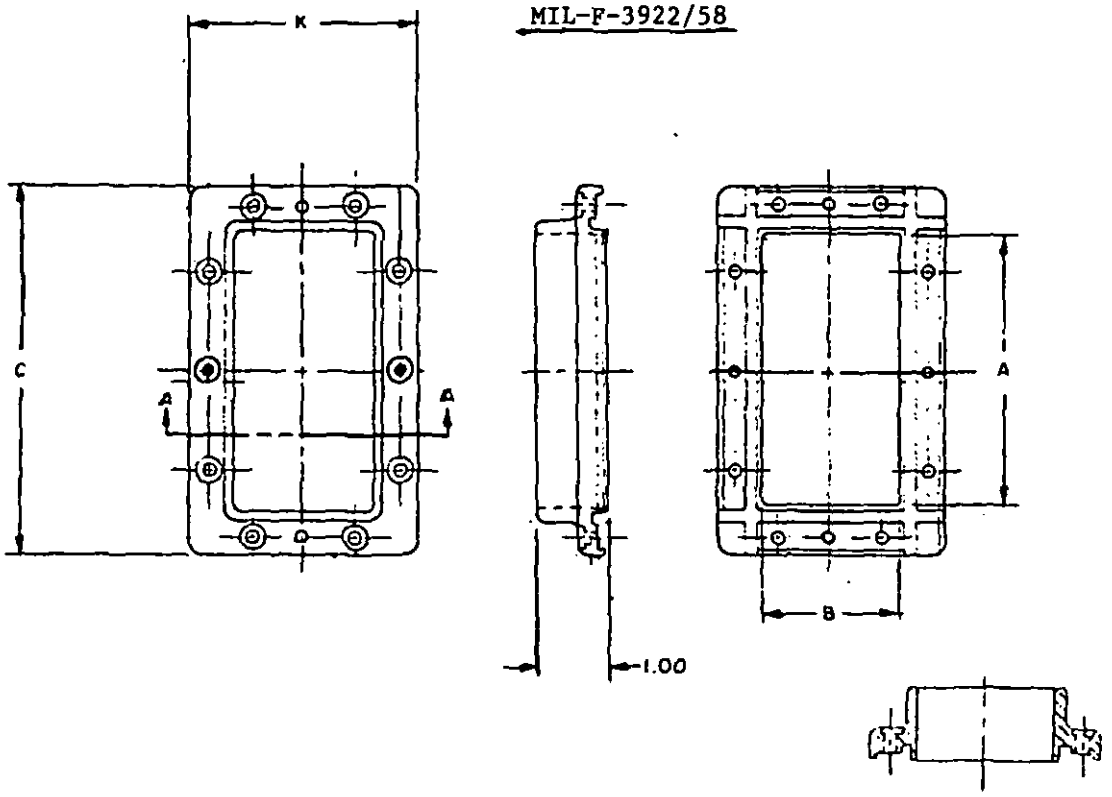

SECTION - A-A

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/58-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/58-	PART NO. M3922/58-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/58-
007	C	015, 017	007	008	A	018,019,168	008
009	C	027, 031	009	010	A	029,030,170	010
011	C	033, 037	011	012	A	035,036,171	012

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/58-		DIMENSIONS A	B	C	K	FREQUENCY RANGE (GHz)
007	008	6.670	3.420	8.688	5.438	1.12 - 1.70
009	010	4.470	2.320	6.344	4.188	1.70 - 2.60
011	012	3.570	1.870	5.438	3.750	2.20 - 3.30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (MINIATURE, UNPRESSURIZED CONTACT, 6 THROUGH HOLE, 6 TAPPED HOLE)

MIL-F-3922/64

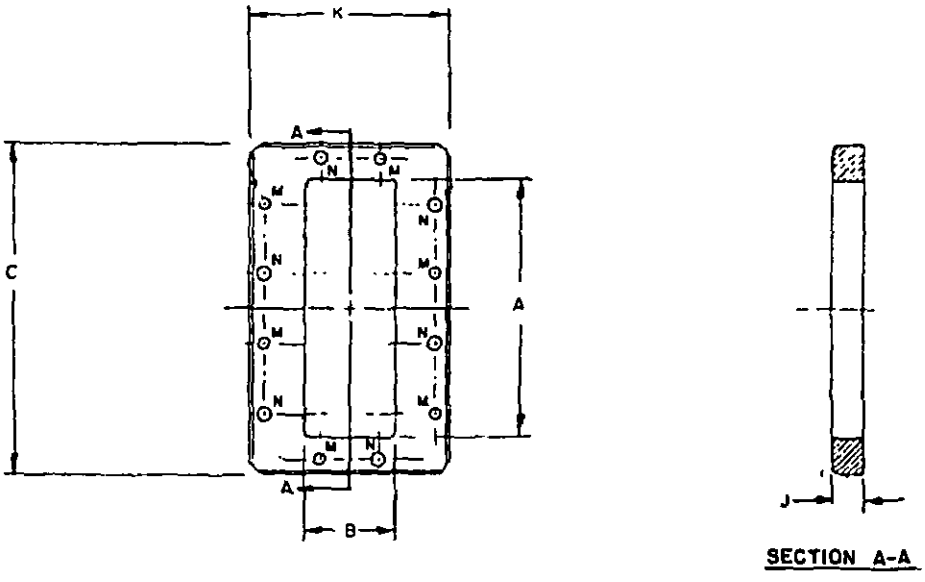


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/64-	MTL.	USED WITH	
		WAVEGUIDE M85/1-	MATING M3922/64-
001	C	043	001
002	A	041	002

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/64-	DIMENSIONS					FREQUENCY RANGE (GHz)
	A	B	C	J	K	
001, 002	3.002	1.502	3.844	0.350	2.344	2.60 - 3.95

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (MINIATURE, UNPRESSURIZED CONTACT, 4 AND 8 HOLE)

MIL-F-3922/63

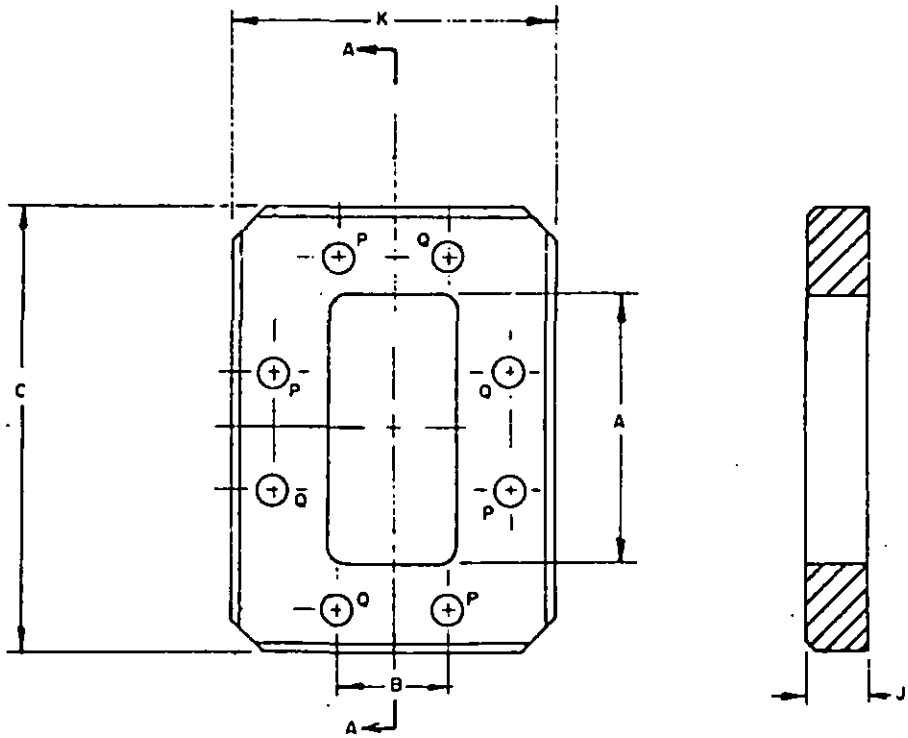


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/63-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/63-	PART NO. M3922/63-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/63-
001	C	051, 055	001	005	A	053, 054, 174	005
002	C	063, 067	002	006	A	065, 066, 176	006
003	C	069, 073	003	007	A	071, 072, 177	007
004	C	075, 079	004	008	A	077, 078, 178	008

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/53-		DIMENSIONS A	B	C	J	K	FREQUENCY RANGE (GHz)
001	005	2.002	1.002	2.781	0.225	1.781	3.95 - 5.85
002	006	1.503	0.753	2.281	0.225	1.531	5.85 - 8.20
003	007	1.253	0.628	2.016	0.225	1.375	7.05 - 10.0
004	008	1.003	0.502	1.766	0.225	1.266	8.20 - 12.40

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CHOKE, SQUARE, 4 HOLE)

MIL-F-3922/59

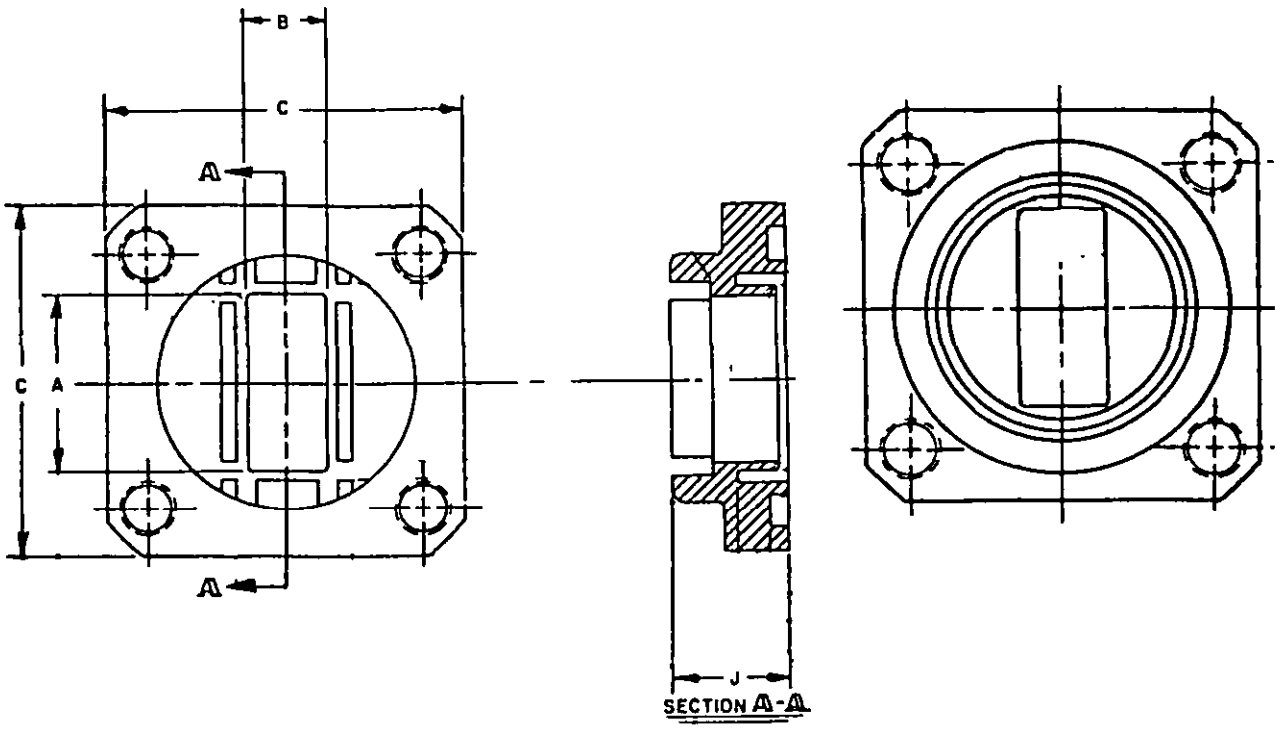


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/59-	MTL.	USED WITH WAVEGUIDE M85/	USED WITH MATING M3922/	PART NO. M3922/59-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/
001	C	1-039,093	53-005	002	A	090, 091, 180	53-006
003	C	1-102,106	54-001	004	A	103	54-002
005	C	3-006	54-003	---	-	---	---
006	C	1-079,075	53-001	008	A	077, 078, 178	53-003
007	C	1-073,069	53-002	009	A	071, 072, 177	53-004
010	C	1-081,085	53-007	011	A	083, 084	53-008
012	C	3-006	54-003	---	-	---	---

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/59-		DIMENSIONS A	B	C	J	FREQUENCY RANGE (GHz)
001	002	0.622	0.311	1.312	0.375	12.4 - 18.0
003	004	0.420	0.170	0.875	0.285	18.0 - 26.5
005	---	0.2800	0.1400	0.750	0.210	26.5 - 40.0
006	008	0.900	0.400	1.625	0.438	8.20 - 12.4
007	009	1.122	0.497	1.875	0.625	7.05 - 10.0
010	011	0.750	0.375	1.500	0.500	10.0 - 15.0
012	---	0.2800	0.1400	0.750	0.250	26.5 - 40.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CHOKE, SQUARE, 4 HOLE)

MIL-F-3922/69

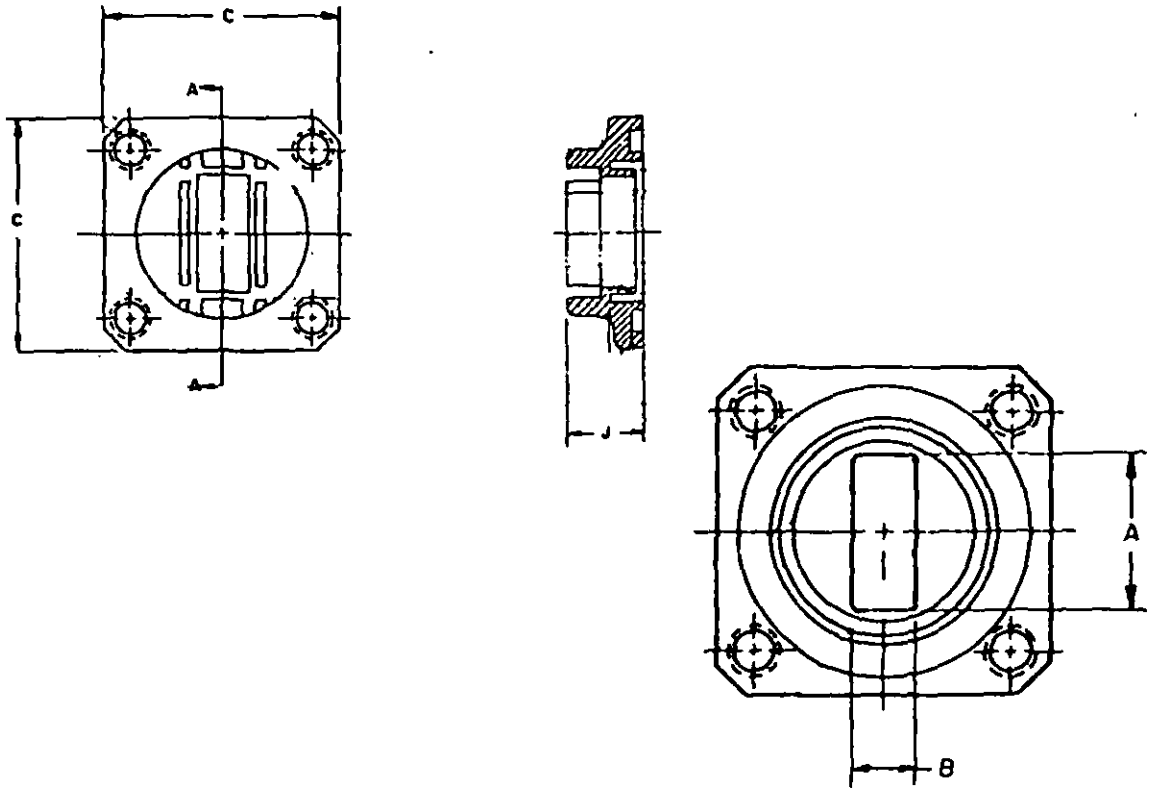


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/69-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/70-	PART NO. M3922/69-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/70-
001	C	155,156	001	002 003	A6061 A6063	157, 158, 160	002,003
004	C	094,096	010	005 006	A6061 A6063	097, 098	011,012


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/69-			DIMENSIONS A	B	C	J	FREQUENCY RANGE (GHz)
001	002	003	1.020	0.510	1.687	0.500	7.0 - 11.0
004	005	006	0.510	0.255	1.312	0.375	15.0 - 22.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CHOKE, ROUND, 6 HOLES)

MIL-F-3922/60

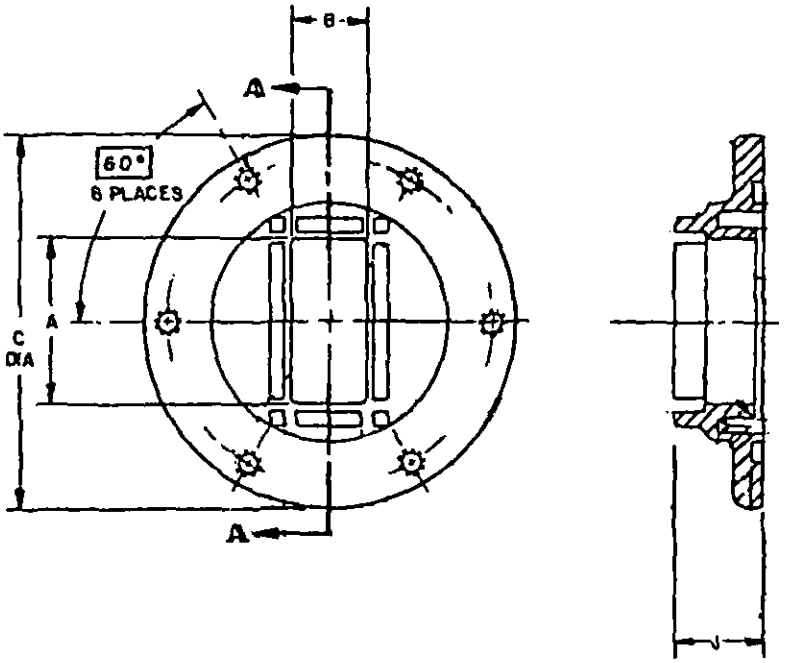

SECTION A-A


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/60-	MTL.	USED WITH		DIMENSIONS				FREQUENCY RANGE (GHz)
		WAVEGUIDE M85/1-	MATING M3922/55-	A	B	C	J	
001	C	067	001	1.372	0.622	3.125	0.750	5.85 - 8.20
002	A	065	002	1.372	0.622	3.125	0.750	5.85 - 8.20

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CHOKE, ROUND, 8 HOLES)

MIL-F-3922/61

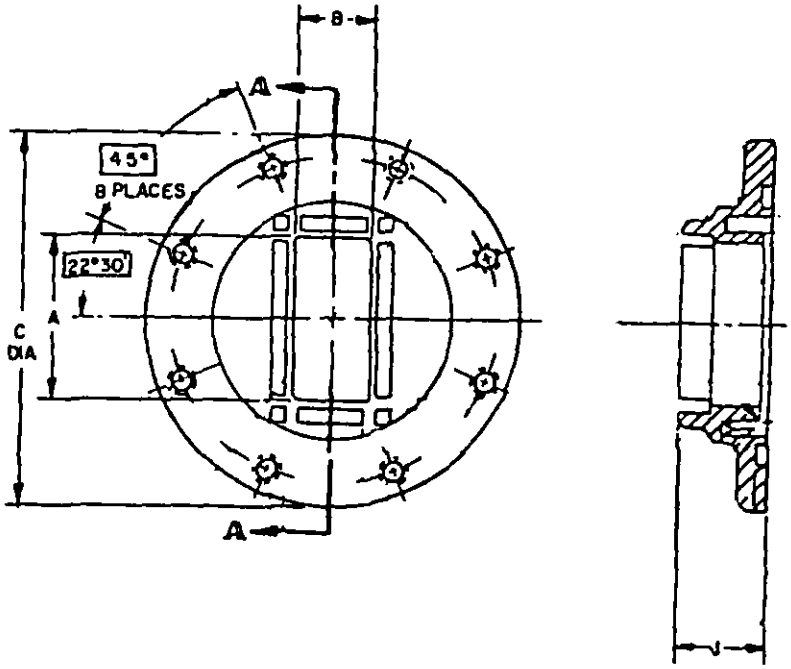

SECTION A-A


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/61-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/56-	DIMENSIONS A	B	C	J	FREQUENCY RANGE (GHz)
001	A	041	002	2.840	1.340	5.313	1.250	2.60 - 3.95
002	C	043	001	2.840	1.340	5.313	1.250	2.60 - 3.95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CHOKE, ROUND, 8 HOLES)
(2 HOLES CENTERED HORIZONTALLY, 2 HOLES CENTERED VERTICALLY)

MIL-F-3922/62

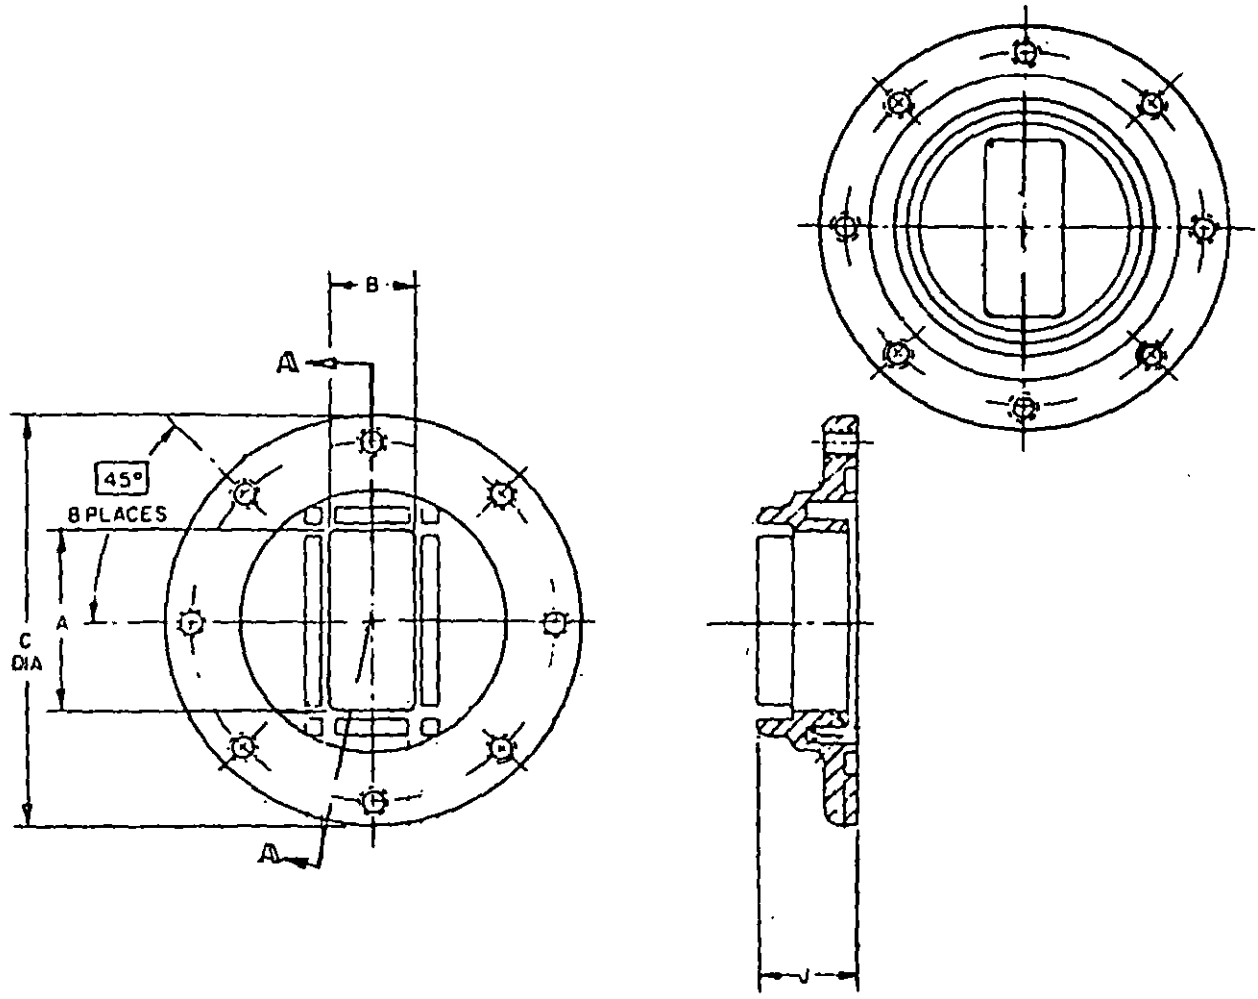

SECTION A-A


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/62-	MTL.	USED WITH		DIMENSIONS				FREQUENCY RANGE (GHz)
		WAVEGUIDE M85/1-	MATING M3922/57-	A	B	C	J	
001	A	053	001	1.872	0.872	3.625	0.938	3.95 - 5.85
002	C	055	002	1.872	0.872	3.625	0.938	3.95 - 5.85


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (PRESSURIZED CONTACT)

MIL-F-3922/52

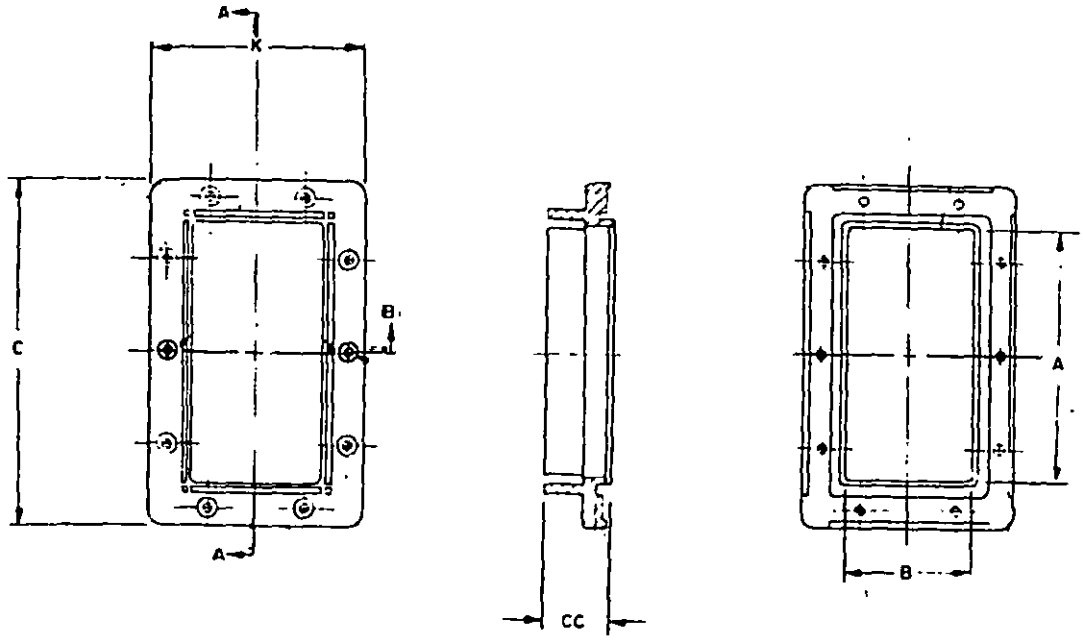

GROOVED FLANGE
SECTION A-A



SECTION B-B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (PRESSURIZED CONTACT)

MIL-F-3922/52

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/52-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING FLANGE	PART NO. M3922/52-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING FLANGE
001,023	C	015,017	EACH	002,024	A	018,019,168	EACH
003,025	C	021,023	MATES	004,026	A	025,026,169	MATES
005,027	C	027,031	WITH	006,028	A	029,030,170	WITH
007,029	C	033,037	IDEN-	008,030	A	035,036,171	IDEN-
009,031	C	039,043	TICAL	010,032	A	41,042,172	TICAL
011,033	C	045,049	PART	012,034	A	047,048,173	PART
013,035	C	051,055	NUMBER	014,036	A	053,054,174	NUMBER
015,037	C	057,061		016,038	A	059,060,175	
017,039	C	063,067		018,040	A	065,066,176	
019,041	C	069,073		020,042	A	071,072,177	
021,043	C	075,079		022,044	A	077,078,178	

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/52-	DIMENSIONS A	B	C	K	CC	FREQUENCY RANGE (GHz)
001,002,023,024	6.500	3.250	8.69	5.44	0.88	1.12 - 1.70
003,004,025,026	5.100	2.550	7.16	4.62	0.88	1.45 - 2.20
005,006,027,028	4.300	2.150	6.34	4.19	0.88	1.70 - 2.60
007,008,029,030	3.400	1.700	5.44	3.75	0.88	2.20 - 3.30
009,010,031,032	2.840	1.340	4.50	3.00	0.69	2.60 - 3.95
011,012,033,034	2.290	1.145	3.88	2.75	0.69	3.30 - 4.90
013,014,035,036	1.872	0.872	3.50	2.50	0.69	3.95 - 5.85
015,016,037,038	1.590	0.795	3.19	2.44	0.69	4.90 - 7.05
017,018,039,040	1.372	0.622	2.69	1.94	0.50	5.85 - 8.20
019,020,041,042	1.122	0.497	2.50	1.75	0.50	7.05 - 10.0
021,022,043,044	0.900	0.400	2.09	1.59	0.50	8.20 - 12.40

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CONTACT, WITH PRESSURIZATION FITTING)

MIL-F-3922/71

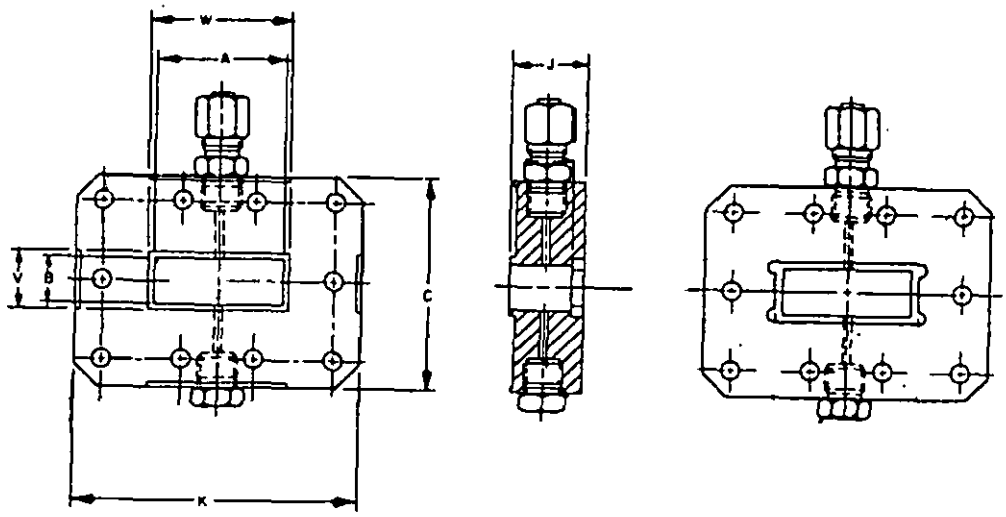


FIGURE 1.

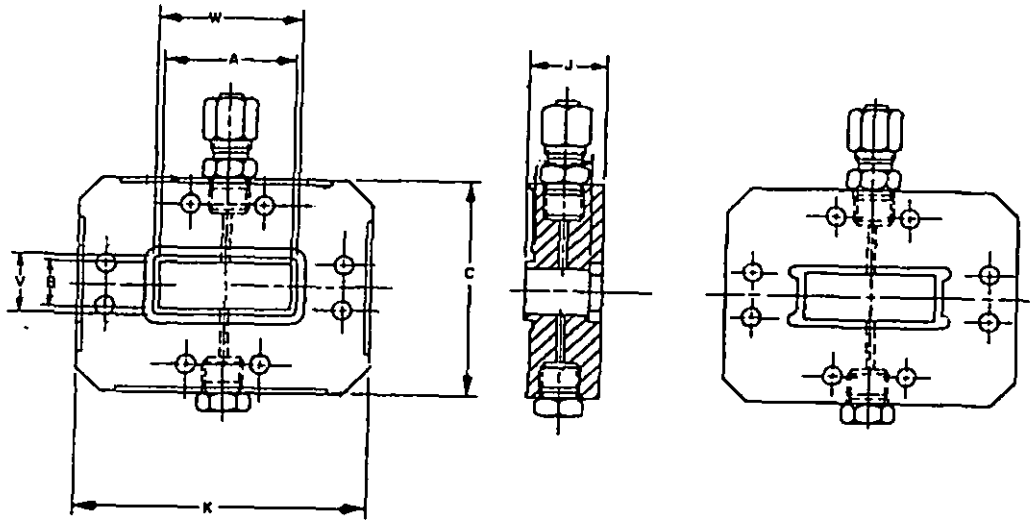


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CONTACT, WITH PRESSURIZATION FITTING)

MIL-F-3922/71

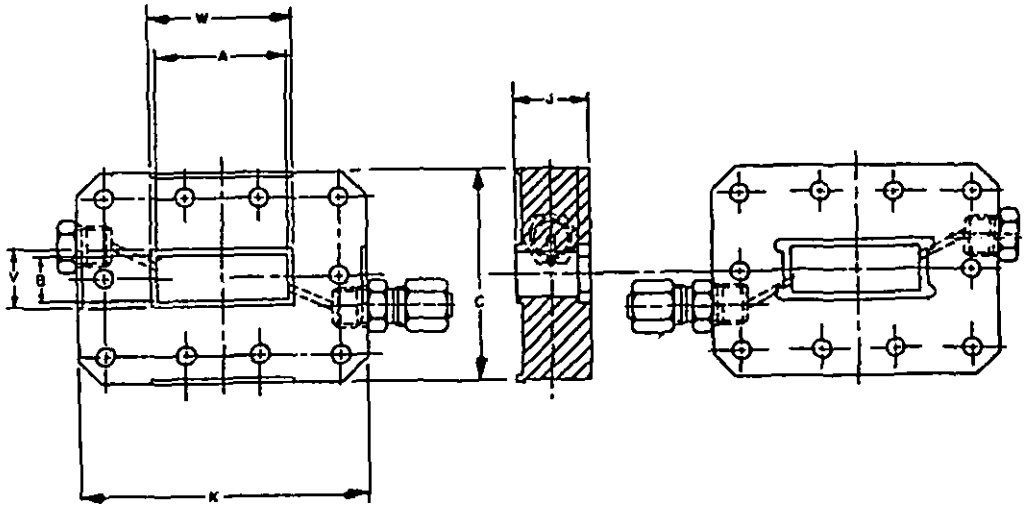


FIGURE 3.

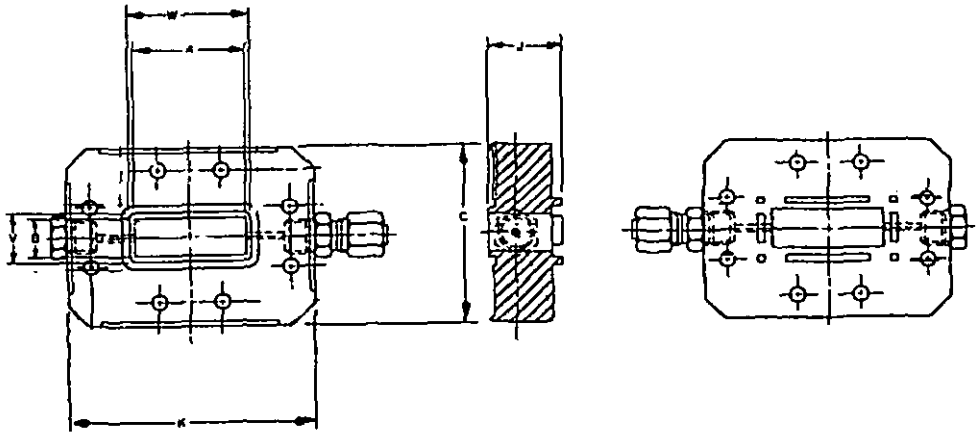


FIGURE 4.

Source: https://assist.dla.mil/ - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CONTACT, WITH PRESSURIZATION FITTING)

MIL-F-3922/71

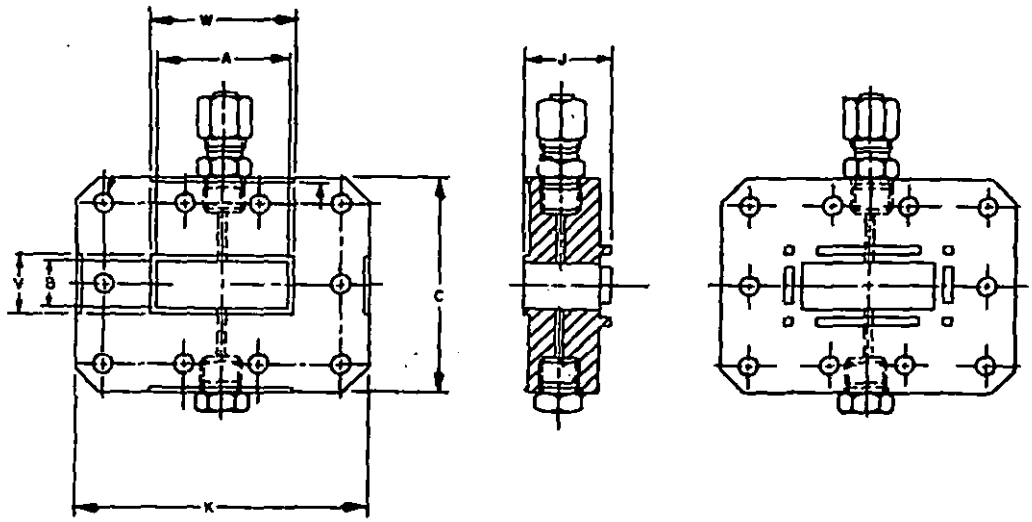


FIGURE 5.

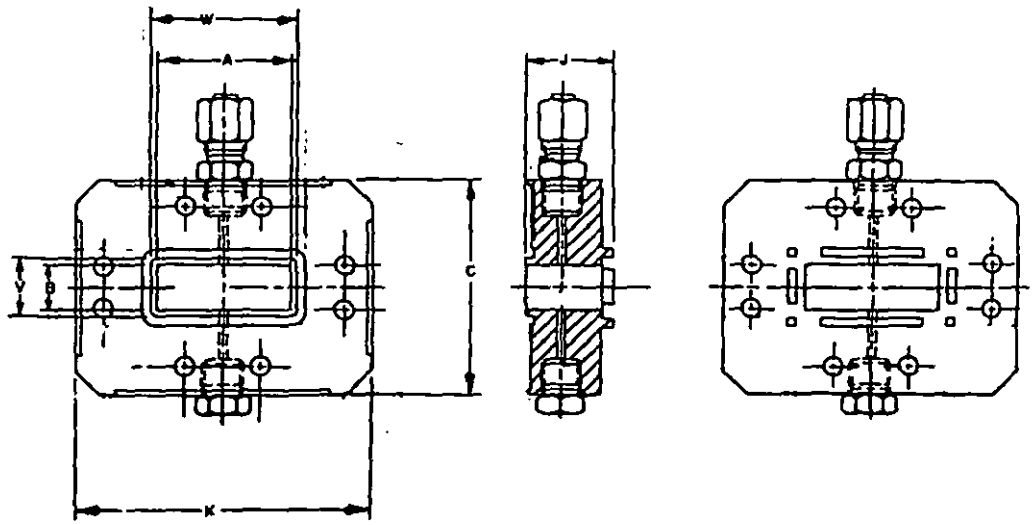


FIGURE 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CONTACT, WITH PRESSURIZATION FITTING)

MIL-F-3922/71

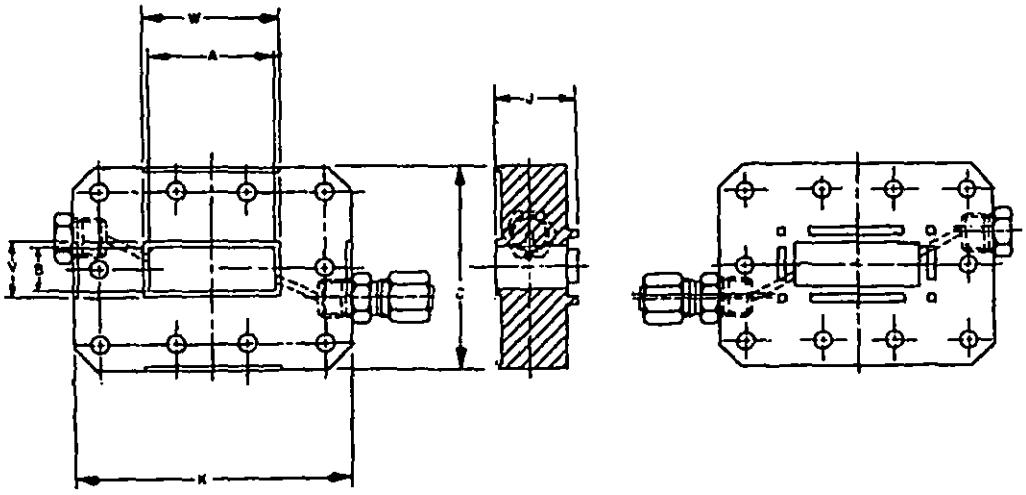


FIGURE 7.

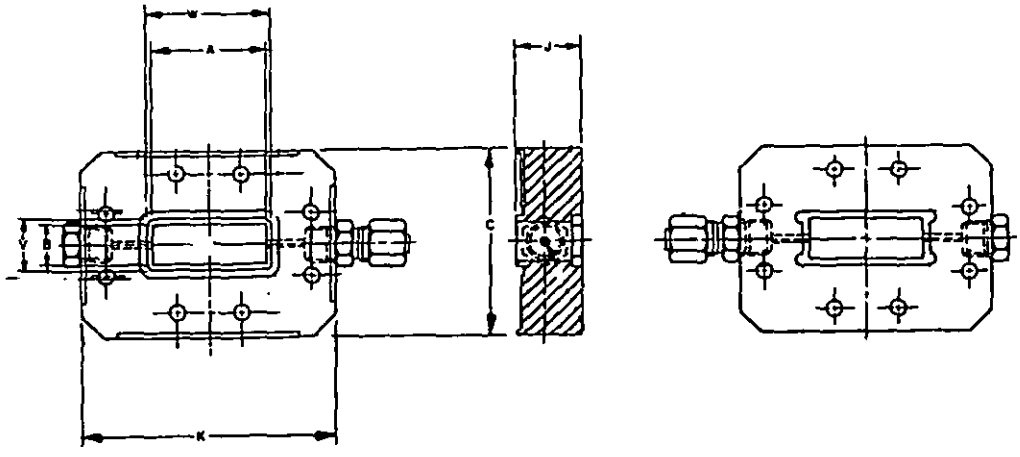


FIGURE 8.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

FLANGES, WAVEGUIDE, (CONTACT, WITH PRESSURIZATION FITTING)

MIL-F-3922/71

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/71-	MTL.	USED WITH		PART NO. M3922/71-	MTL.	USED WITH		FIG.
		WAVEGUIDE M85/	MATING FLANGE			WAVE GUIDE M85/	MATING M3922/52-	
01	C	4-001	UG-509/U	02	A	4-002	---	1
03	C	4-003	UG-511/U	04	A	4-004	---	1
05	C	1-057,061	M3922/52-037	06	A	1-059,060,175	038	2
07	C	4-001	UG-509/U	08	A	4-002	---	3
09	C	4-003	UG-511/U	10	A	4-004	---	3
11	C	1-057,061	M3922/52-037	12	A	1-059,060,175	038	4
13	C	4-001	UG-509/U	14	A	4-002	---	5
15	C	4-003	UG-511/U	16	A	4-004	---	5
17	C	1-057,061	M3922/52-037	18	A	1-059,060,175	038	6
19	C	4-001	UG-509/U	20	A	4-002	---	7
21	C	4-003	UG-511/U	22	A	4-004	---	7
23	C	1-057,061	M3922/52-037	24	A	1-059,060,175	038	8

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/71-		DIMENSIONS							FREQUENCY RANGE (GHz)
		A	B	C	J	K	V	W	
01	02	2.840	1.004	4.000	0.812	5.500	1.419	3.255	2.60 - 5.85
03	04	1.372	0.487	2.187	0.750	2.937	0.875	1.750	5.85 - 12.40
05	06	1.590	0.795	2.437	0.750	3.187	1.045	1.840	4.90 - 7.05
07	08	2.840	1.004	4.000	0.812	5.500	1.419	3.255	2.60 - 5.85
09	10	1.372	0.487	2.187	0.750	2.937	0.875	1.750	5.85 - 12.40
11	12	1.590	0.795	2.437	0.750	3.187	1.045	1.840	4.90 - 7.05
13	14	2.840	1.004	4.000	1.000	5.500	1.419	3.255	2.60 - 5.85
15	16	1.372	0.487	2.187	0.875	2.937	0.875	1.750	5.85 - 12.40
17	18	1.590	0.795	2.437	0.875	3.187	1.045	1.840	4.90 - 7.05
19	20	2.840	1.004	4.000	1.000	5.500	1.419	3.255	2.3 - 4.4
21	22	1.372	0.487	2.187	0.875	2.937	0.875	1.750	5.0 - 10.75
23	24	1.590	0.795	2.437	0.875	3.187	1.045	1.840	4.33 - 7.35

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (COVER, WITH PRESSURIZATION FITTING)

MIL-F-3922/72

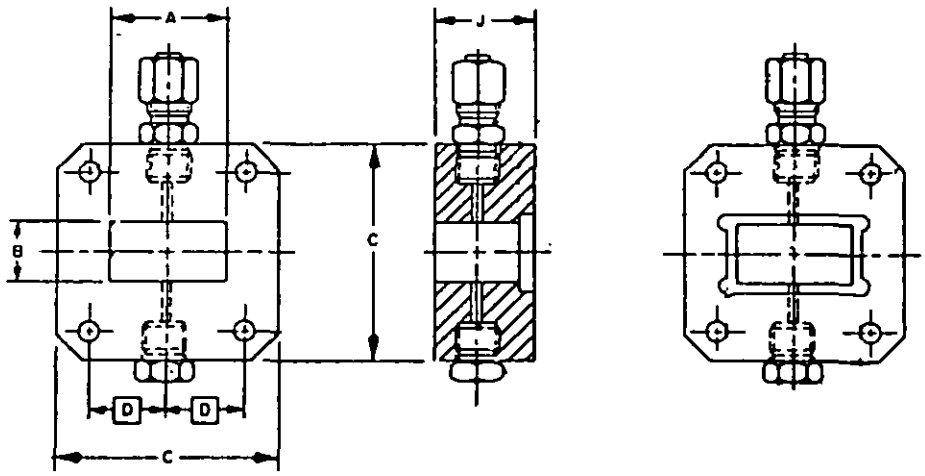


FIGURE 1.

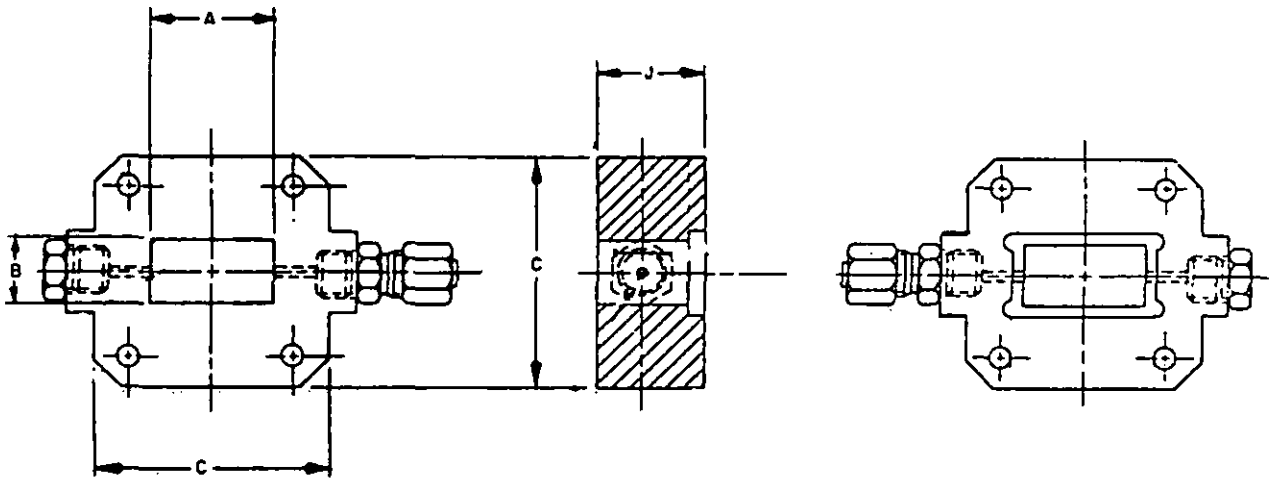


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

FLANGES, WAVEGUIDE, (COVER, WITH PRESSURIZATION FITTING)

MIL-F-3922/72

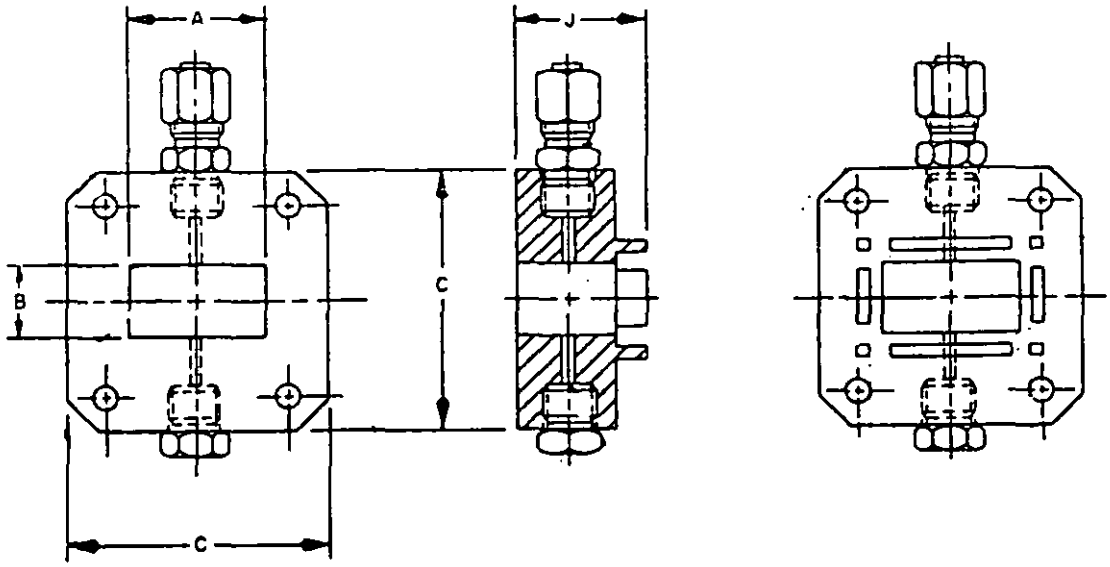


FIGURE 3.

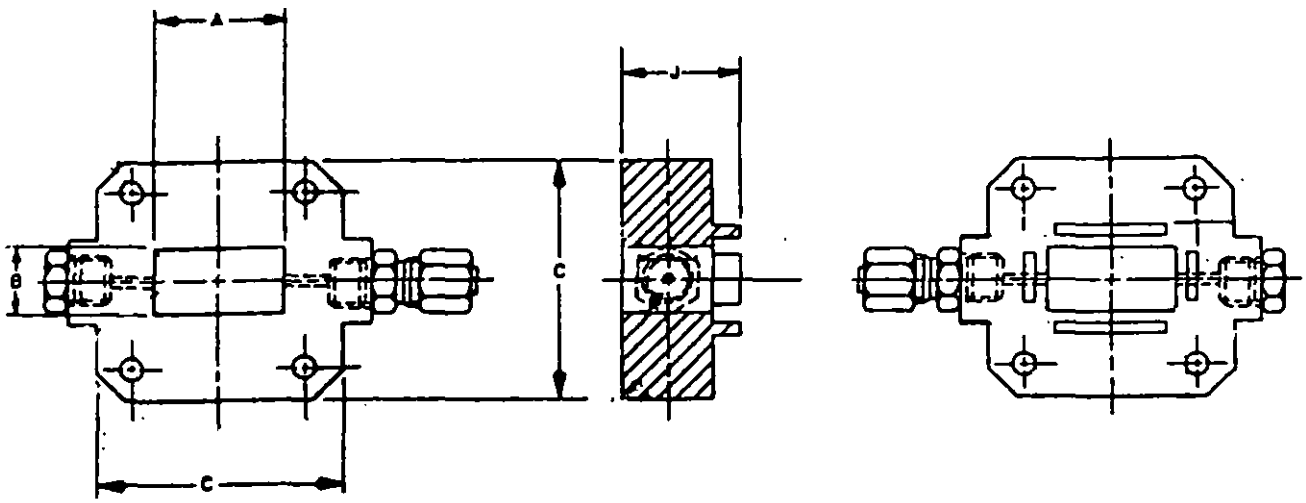


FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (COVER, WITH PRESSURIZATION FITTING)

MIL-F-3922/72

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/72-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/69-	PART NO. M3922/72-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/69-	FIG.
01	C	155, 156	001	02	A	157, 158, 160	002	1
03	C	155, 156	001	04	A	157, 158, 160	001, 002	2
05	C	155, 156	001	06	A	157, 158, 160	002	3
07	C	155, 156	001	08	A	157, 158, 160	001, 002	4

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/72-		DIMENSIONS A	B	C	J	FREQUENCY RANGE (GHz)
01	02	1.020	0.510	1.687	0.750	7.0 - 11.0
03	04	1.020	0.510	1.687	0.750	7.0 - 11.0
05	06	1.020	0.510	1.687	0.875	7.0 - 11.0
07	08	1.020	0.510	1.687	0.875	7.0 - 11.0

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

FLANGES, WAVEGUIDE, (CHOKE, WITH PRESSURIZATION FITTING)

MIL-F-3922/73

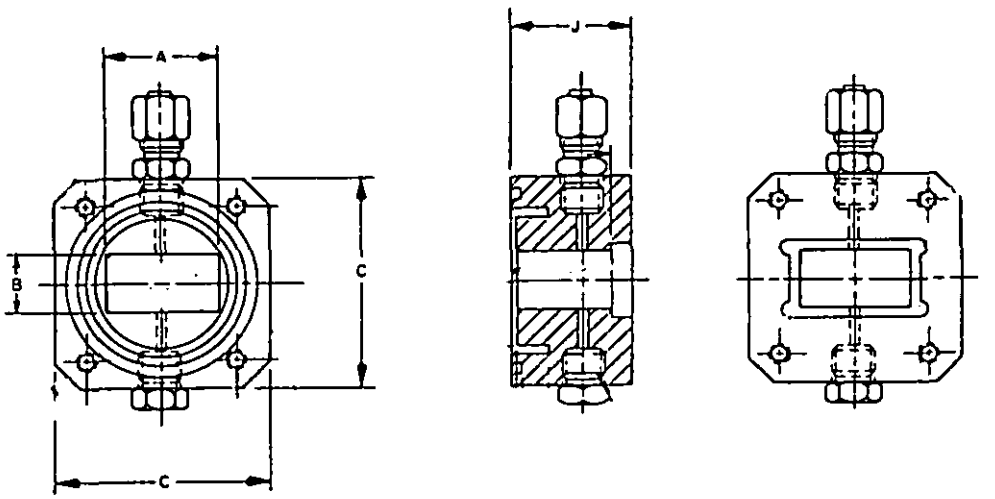


FIGURE 1.

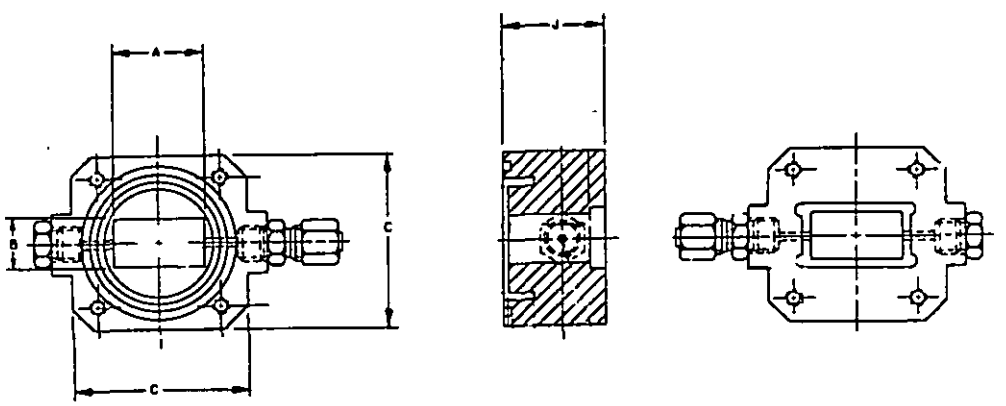


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CHOKE, WITH PRESSURIZATION FITTING)

MIL-F-3922/73

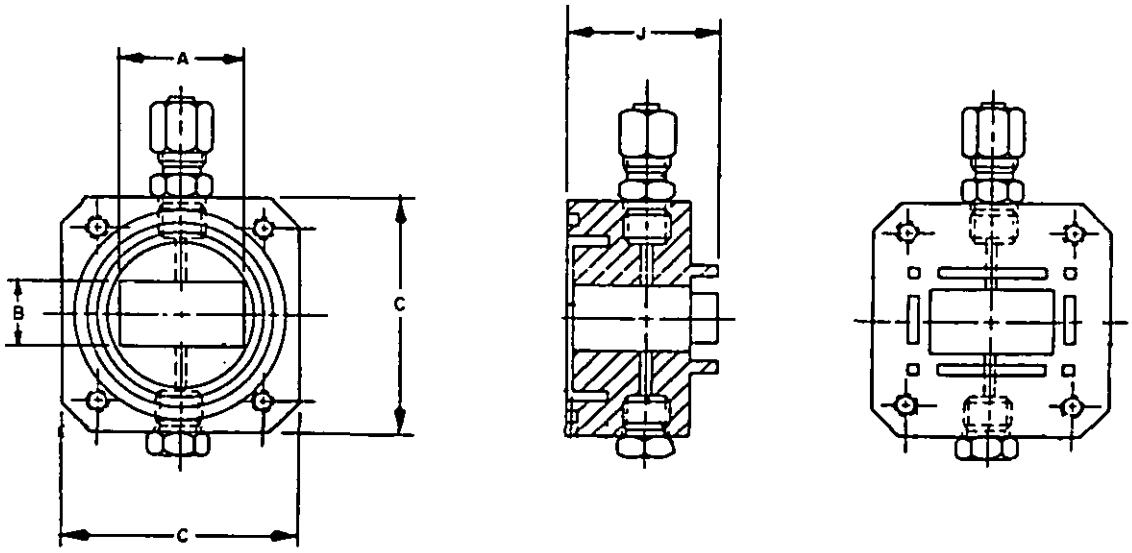


FIGURE 3.

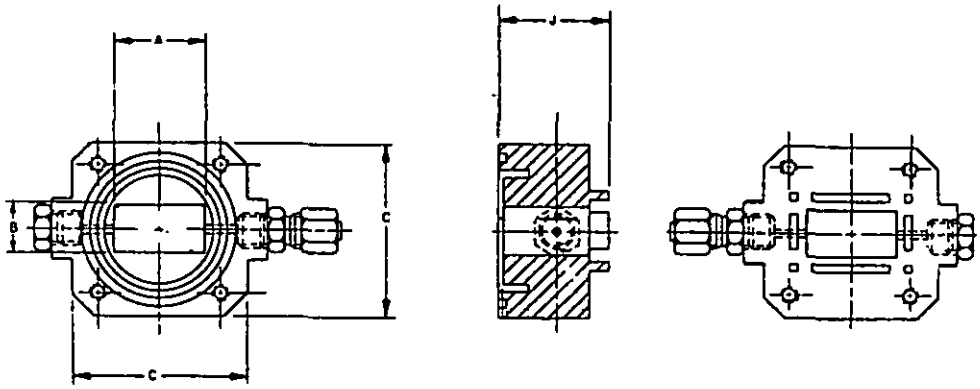


FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, (CHOKE, WITH PRESSURIZATION FITTING)

MIL-F-3922/73

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/73-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/70-	PART NO. M3922/73-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/70-	FIG.
01	C	155, 156	001, 013	02	A	157, 158, 160	002, 014	1
03	C	155, 156	001, 013	04	A	157, 158, 160	002, 014	2
05	C	155, 156	001, 013	06	A	157, 158, 160	002, 014	3
07	C	155, 156	001, 013	08	A	157, 158, 160	002, 014	4

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/73-		DIMENSIONS A	B	C	J	FREQUENCY RANGE (GHz)
01	02	1.020	0.510	1.687	1.000	7.0 - 11.0
03	04	1.020	0.510	1.687	1.000	7.0 - 11.0
05	06	1.020	0.510	1.687	1.125	7.0 - 11.0
07	08	1.020	0.510	1.687	1.125	7.0 - 11.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, REDUCED HEIGHT

MIL-F-3922/75


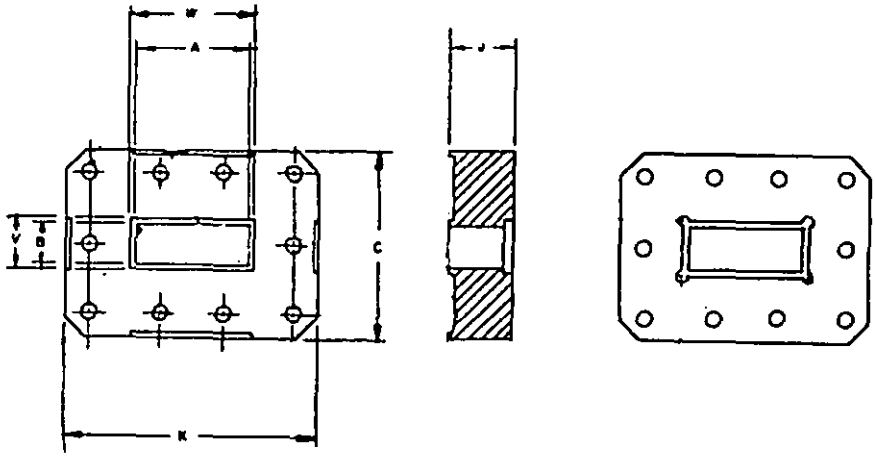


FIGURE 1.

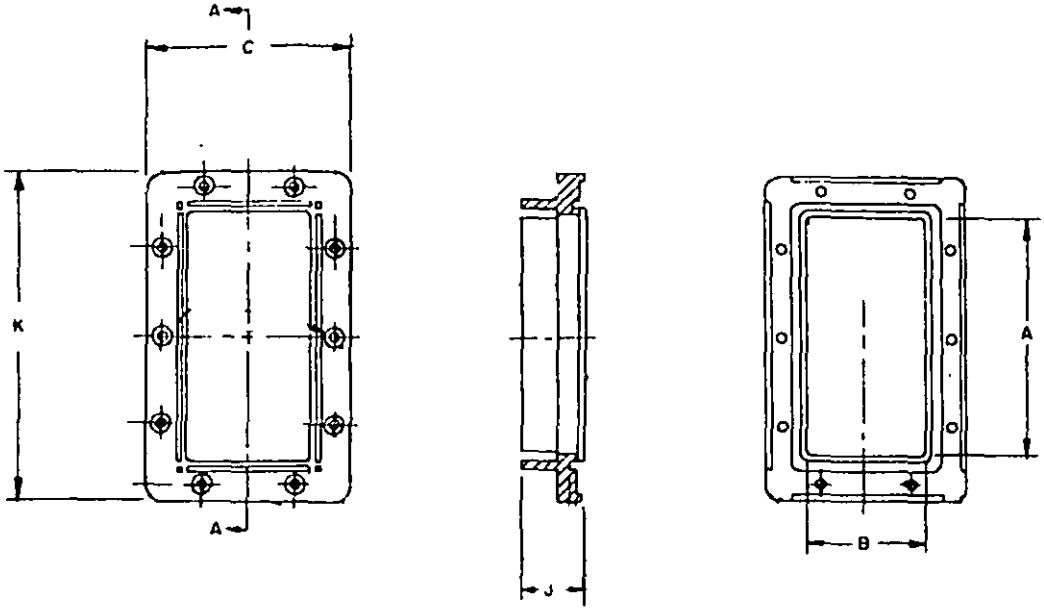

SECTION A-A

FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, REDUCED HEIGHT

MIL-F-3922/75

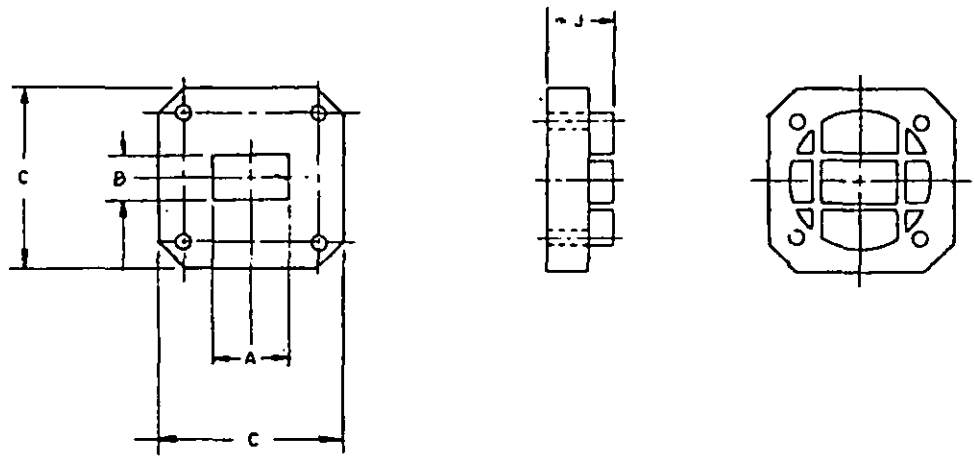


FIGURE 3.

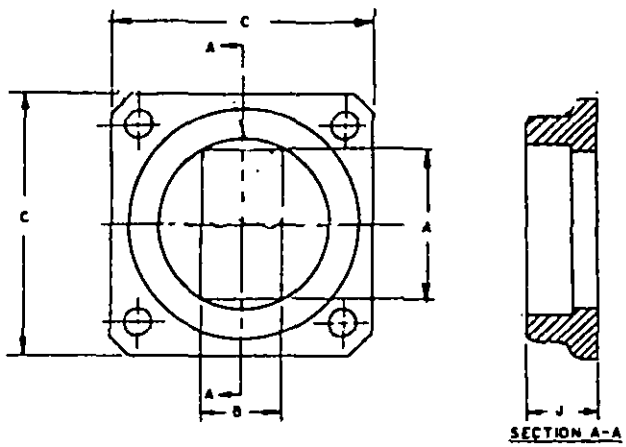


FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, REDUCED HEIGHT

MIL-F-3922/75

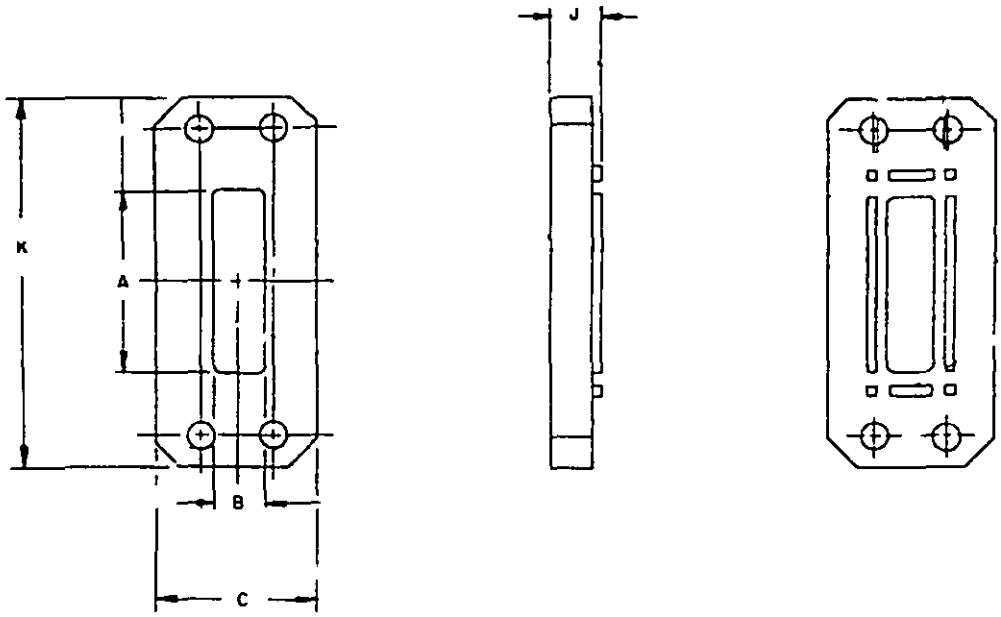


FIGURE 5.

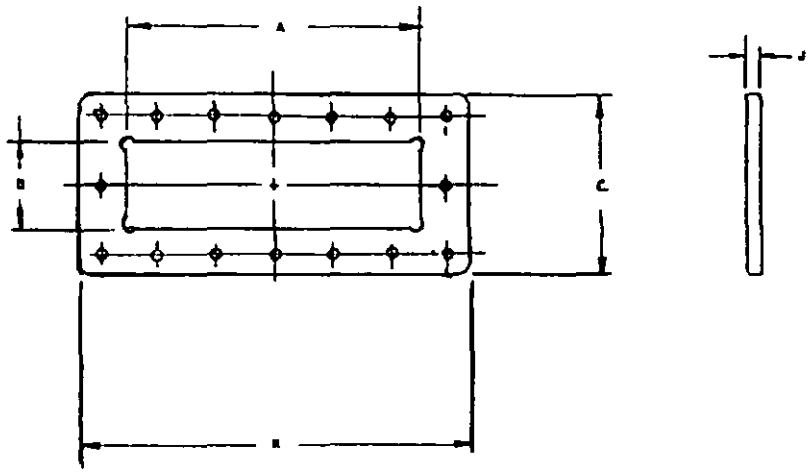


FIGURE 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

PLANGES, WAVEGUIDE, REDUCED HEIGHT

MIL-F-3922/75

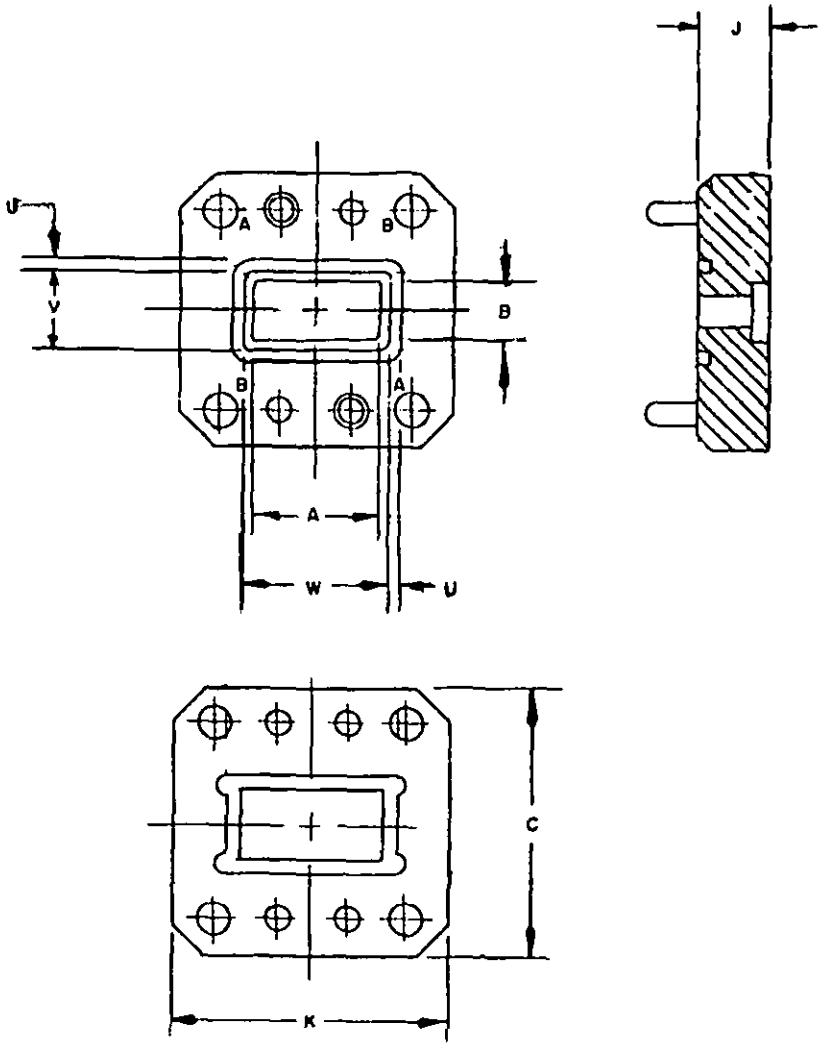


FIGURE 7.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, REDUCED HEIGHT

MIL-F-3922/75

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/75-	MTL.	USED WITH WAVEGUIDE M85/4-	USED WITH MATING M3922/	PART NO. M3922/75-	MTL.	USED WITH WAVEGUIDE M85/	USED WITH MATING M3922/	FIG.
01	C	001	UG509/U UG510/U 71-01,13 75-01	02	A	4-002,007	71-02,14 75-02	1
03	C	003	UG511/U UG512/U 71-03,15 75-03	04	A	4-004,008	71-04,16 75-04	1
05	C	015	75-05	06	A	4-016,017	75-06	2
07	C	018	75-07	08	A	4-019,020	75-08	2
				09	A	1-157,158,160	75-09	3
				10	A	1-071,072,177	75-10	4
				11	A	1-077,078,178	75-12	5
				12	A	1-077,078,178	75-11	5
				13	A	1-077	75-14	5
				14	A	1-077	75-13	5
				15	A	4-013,014	75-15	6
				16	A	4-010,011	75-16	6
				17	A		75-17	7

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M3922/71-		DIMENSIONS A	B	C	J	K	U	V	W	FREQUENCY RANGE (GHz)
01	02	2.840	1.004	4.000	0.750	5.500	---	1.419	3.255	2.60 - 5.85
03	04	1.372	0.487	2.187	0.625	2.937	---	0.875	1.750	5.85 - 12.4
05	06	2.840	0.670	3.000	0.690	4.50	3.500	1.624	3.124	2.60 - 3.95
07	08	1.872	0.372	2.500	0.690	3.500	2.498	1.122	2.122	3.95 - 5.85
09		1.020	0.255	1.687	0.500	---	---	---	---	7.00 - 11.0
10		1.255	0.315	1.875	0.438	---	---	---	---	7.05 - 10.0
11		0.900	0.200	0.676	0.190	1.800	---	---	---	8.20 - 12.4
12		0.900	0.200	0.676	0.156	1.800	---	---	---	8.20 - 12.4
13		0.900	0.200	0.676	0.190	1.800	---	---	---	8.20 - 12.4
14		0.900	0.200	0.676	0.156	1.800	---	---	---	8.20 - 12.4
15		10.250	2.937	5.930	0.500	13.250	---	---	---	0.75 - 1.12
16		10.250	2.937	5.930	0.500	13.250	---	---	---	0.75 - 1.12
17		0.847	0.312	1.375	0.250	1.375	0.094	0.437	0.967	7.5 - 18.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, GENERAL PURPOSE, LARGE, (UNPRESSURIZED CONTACT)

MIL-F-3922/76

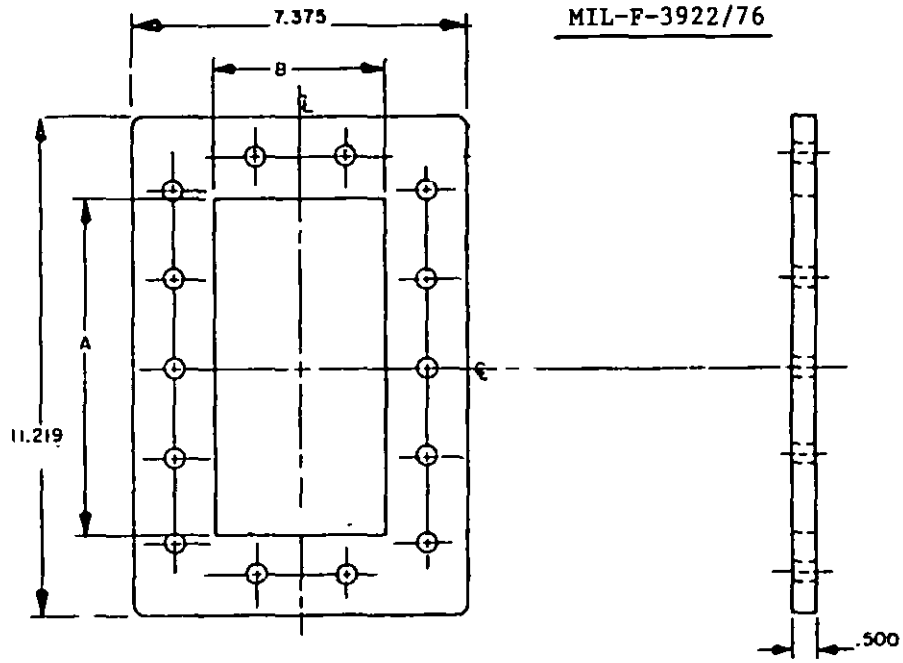


FIGURE 1.

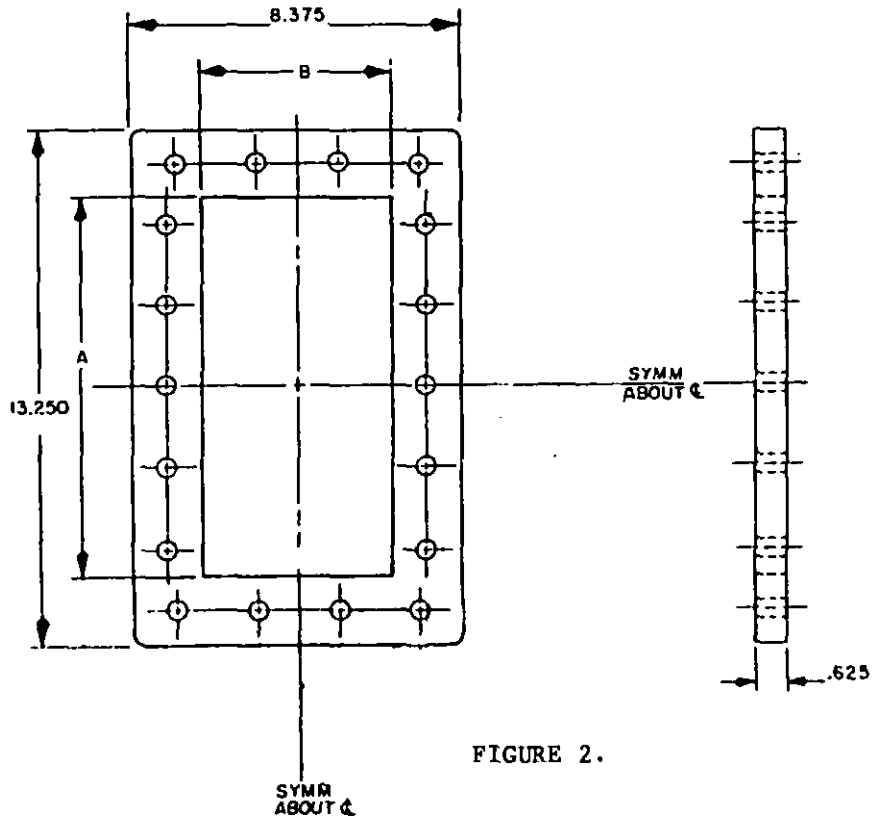


FIGURE 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, GENERAL PURPOSE, LARGE, (UNPRESSURIZED CONTACT)

MIL-F-3922/76

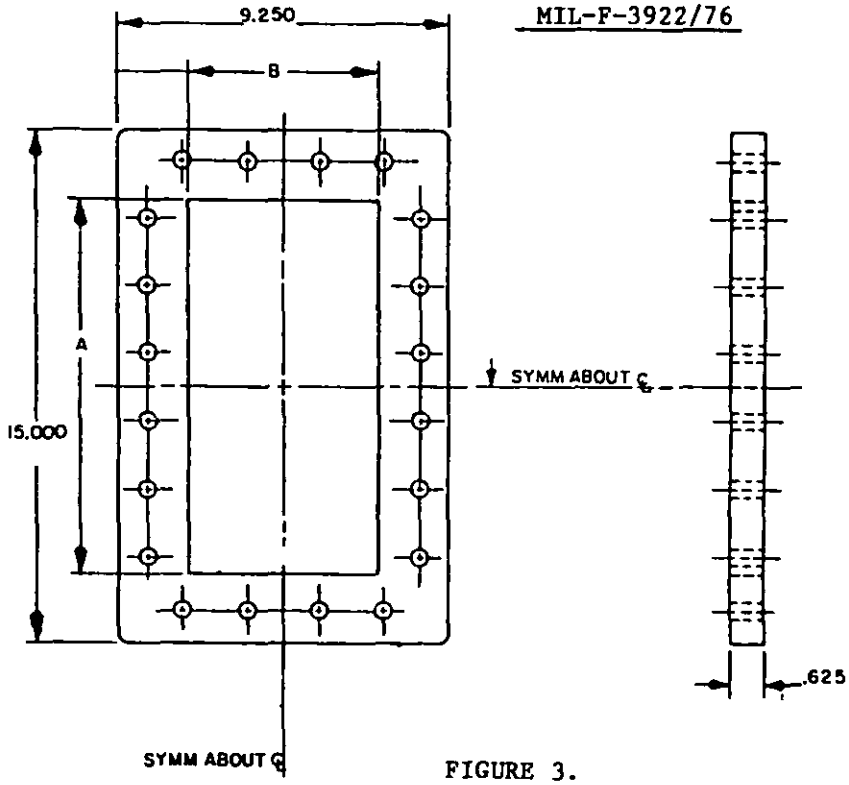


FIGURE 3.

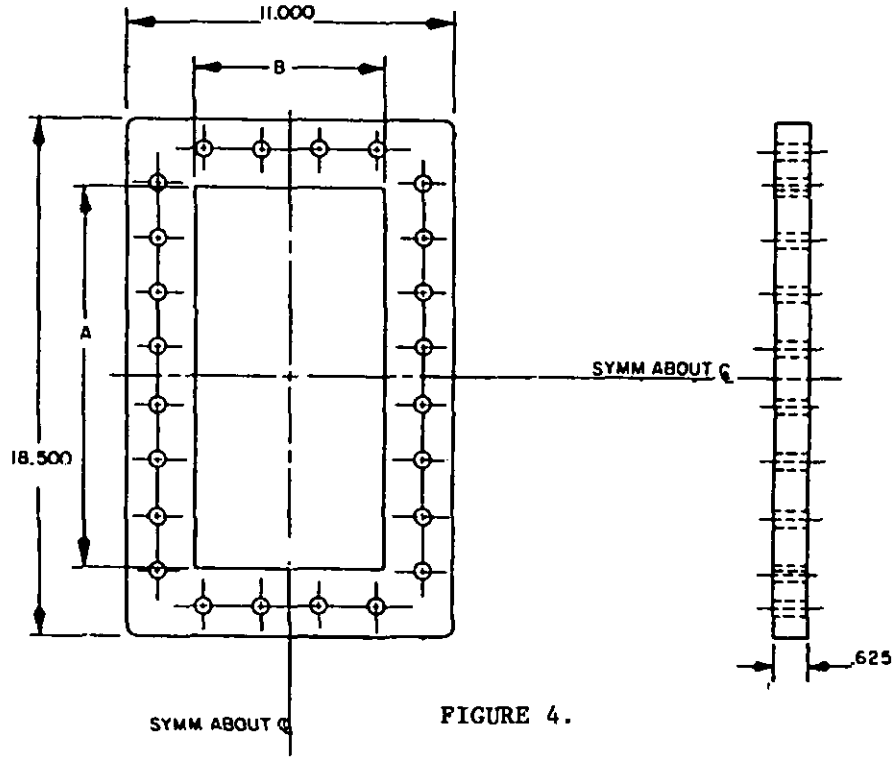


FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, GENERAL PURPOSE, LARGE, (UNPRESSURIZED CONTACT)

MIL-F-3922/76

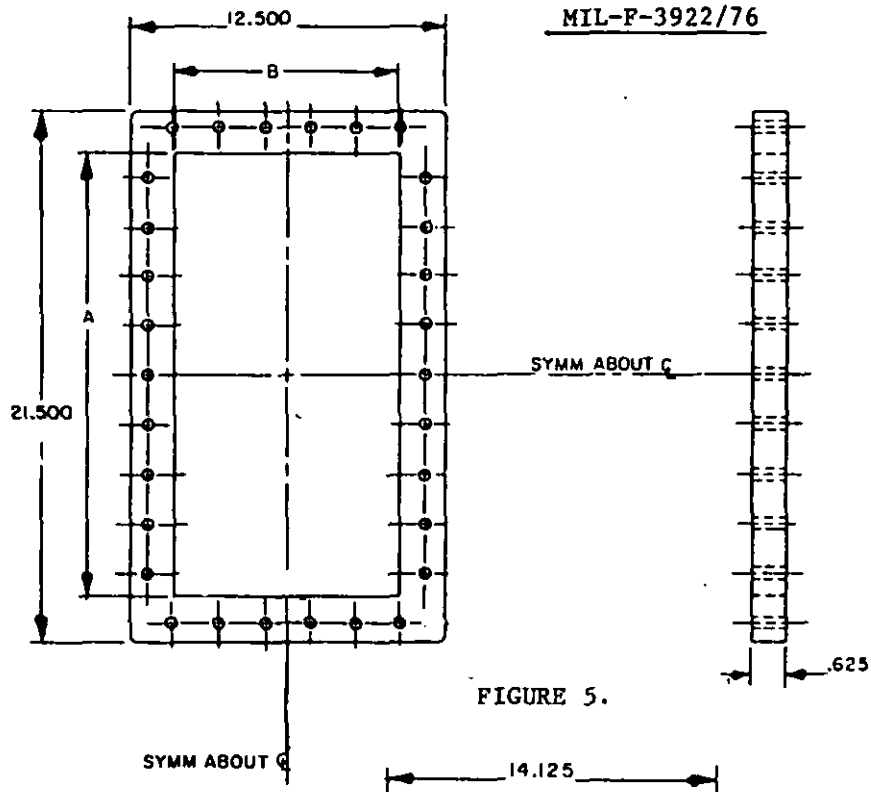


FIGURE 5.

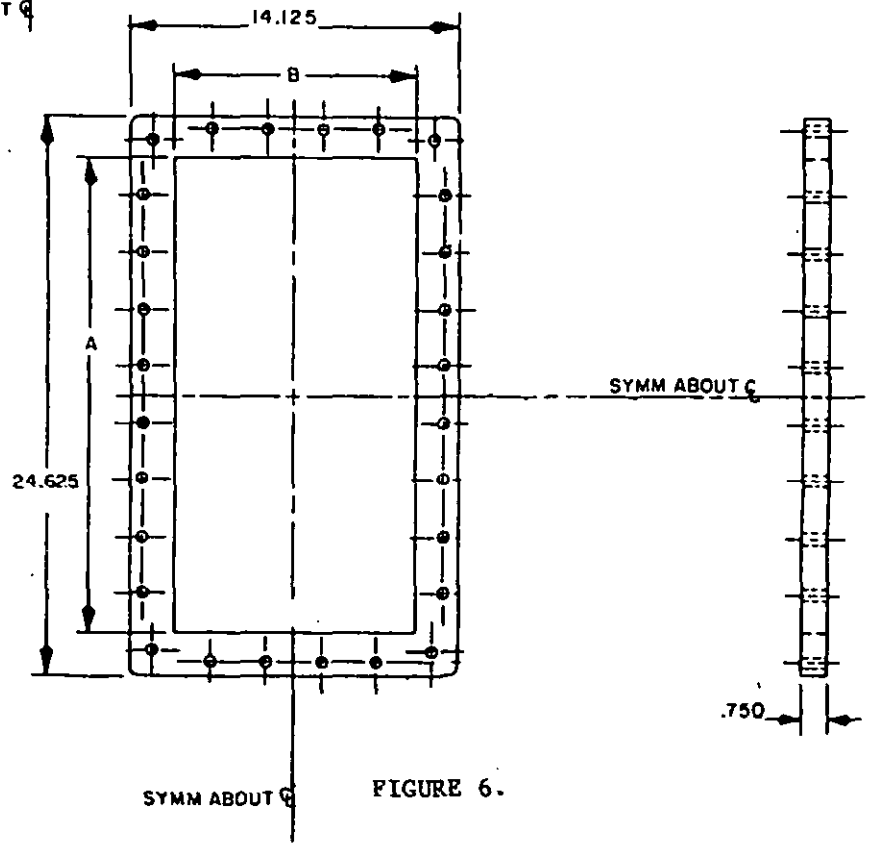


FIGURE 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, GENERAL PURPOSE, LARGE, (UNPRESSURIZED CONTACT)

MIL-F-3922/76

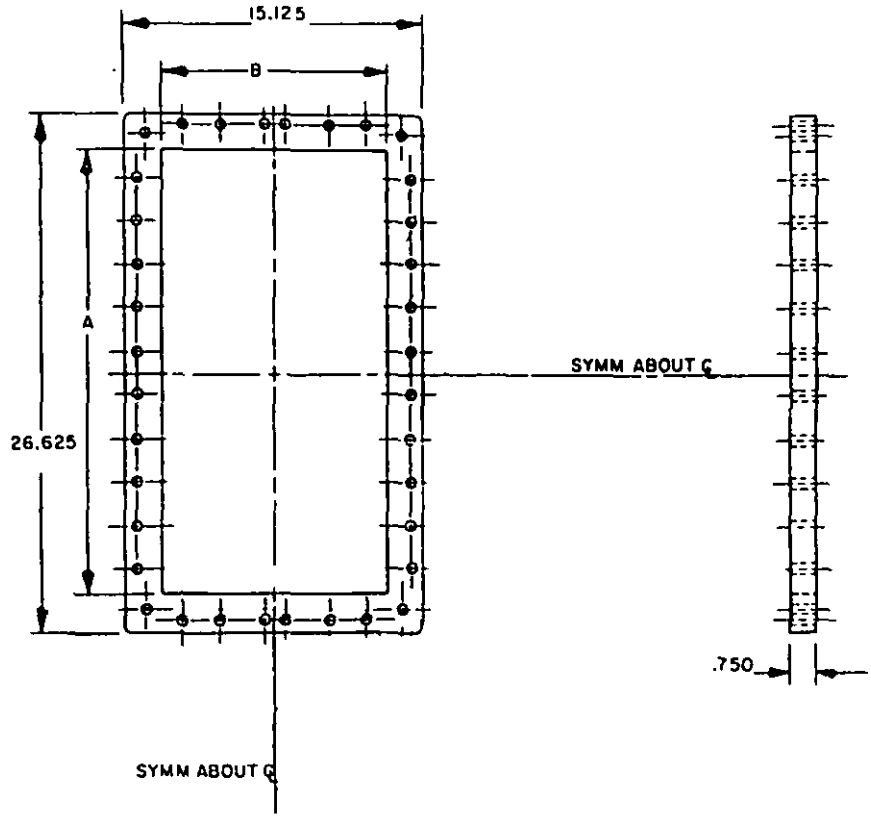


FIGURE 7.

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M3922/76-	MTL.	USED WITH WAVEGUIDE M85/1-	USED WITH MATING M3922/76-	DIMENSIONS A	DIMENSIONS B	FREQUENCY RANGE (GHz)	FIG.
01	A	013,014,167	01	7.961	4.111	.960 - 1.45	1
02	A	011,012,166	02	10.011	5.136	.750 - 1.12	2
03	A	009,010,165	03	11.766	6.016	.640 - .960	3
04	A	007,008,164	04	15.266	7.766	.490 - .750	4
05	A	005,006,163	05	18.271	9.271	.410 - .625	5
06	A	003,004,162	06	21.397	10.897	.350 - .530	6
07	A	001,002,161	07	23.397	11.897	.320 - .490	7


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.


FLANGES, WAVEGUIDE, RIDGE

MIL-F-39000

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR RIDGE-WAVEGUIDE FLANGES THAT ARE USED TO COUPLE MECHANICALLY AND ELECTRICALLY TWO SECTIONS OF RIDGE-WAVEGUIDES OR RIDGE-WAVEGUIDE UNITS.

MATERIAL	CODE
ALUMINUM ALLOY	A
COPPER ALLOY	C

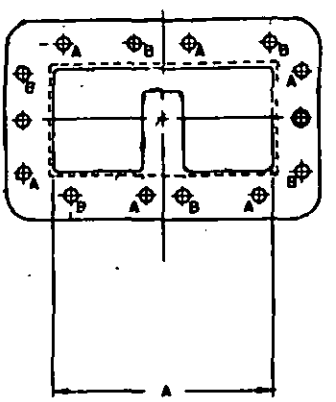



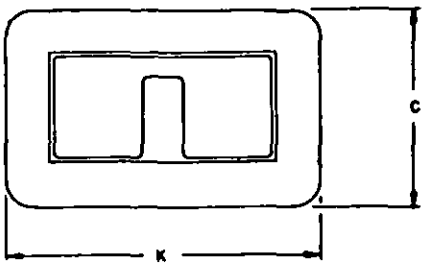
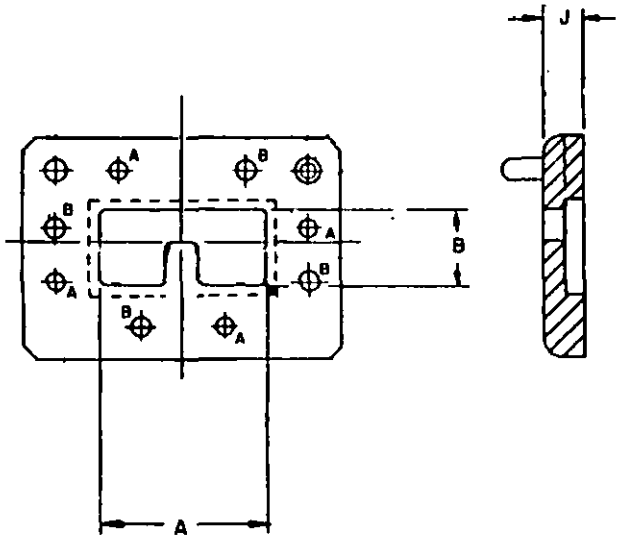


FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, SINGLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 2.4:1)

MIL-F-39000/1



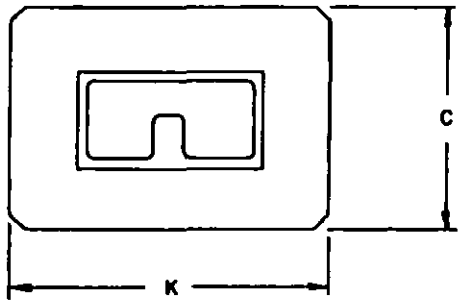


FIGURE 2.

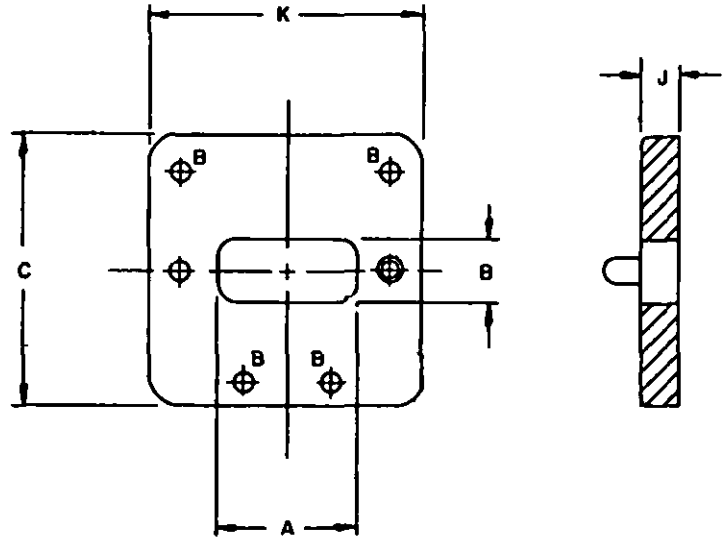


FIGURE 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, SINGLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 2.4:1)

MIL-F-39000/1

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M39000/1-	MTL.	USED WITH WAVEGUIDE M23351/3-	USED WITH MATING M39000/1-	PART NO. M39000/1-	MTL.	USED WITH WAVEGUIDE M23351/3-	USED WITH MATING M39000/1-	FIG.
001	A	017	001	002	C	018, 019, 020	002	1
004	A	021	004	005	C	022, 023, 024	005	1
007	A	025	007	008	C	026, 027, 028	008	2
010	A	029	010	011	C	030, 031, 032	011	2
013	A	033	013	014	C	034, 035, 036	014	2
016	A	037	016	017	C	038, 039, 040	017	3
019	A	041	019	020	C	042, 0143 044	020	3
022	A	045	022	023	C	046, 047, 048	023	3


TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M39000/1-		DIMENSIONS A	B	C	J	K	FREQUENCY RANGE (GHz)
001	002	5.847	2.631	4.656	0.500	7.875	0.84 - 2.00
004	005	3.276	1.474	3.625	0.500	5.250	1.50 - 3.60
007	008	2.456	1.105	2.062	0.438	3.438	2.00 - 4.80
010	011	1.404	0.632	1.562	0.438	2.312	3.50 - 8.20
013	014	1.034	0.465	1.312	0.250	1.875	4.75 - 11.00
016	017	0.7655	0.4055	1.375	0.188	1.375	7.50 - 18.00
019	020	0.537	0.291	1.000	0.188	1.000	11.00 - 26.50
022	023	0.362	0.212	0.875	0.188	0.875	18.00 - 40.00

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, SINGLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 3.6:1)

MIL-F-39000/2

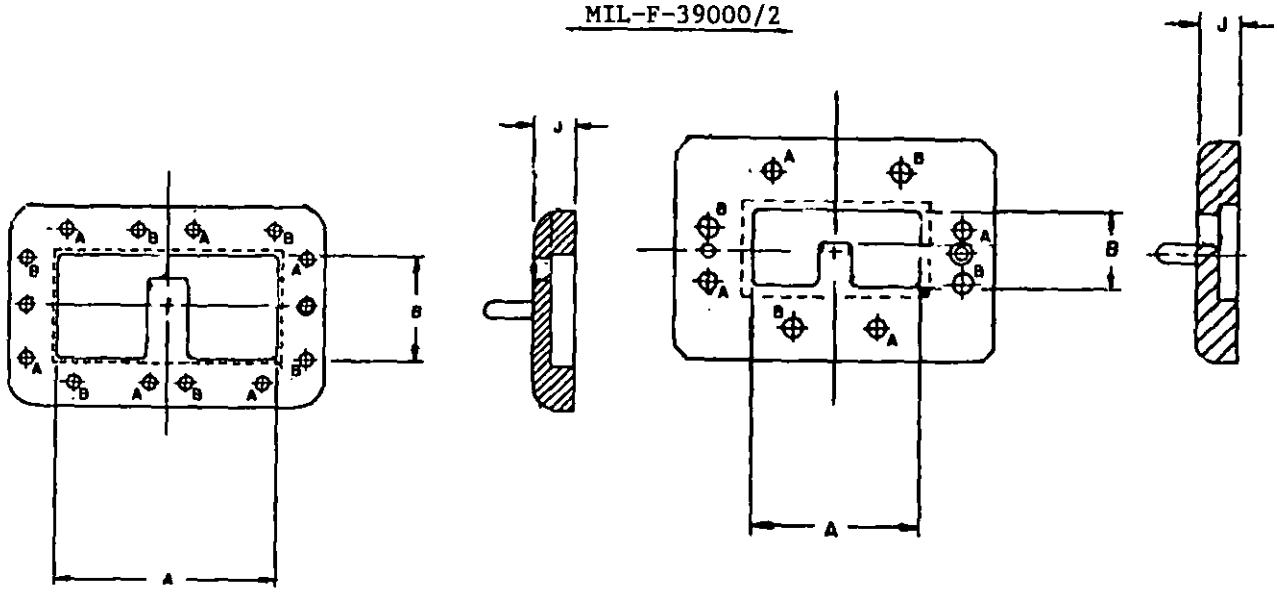

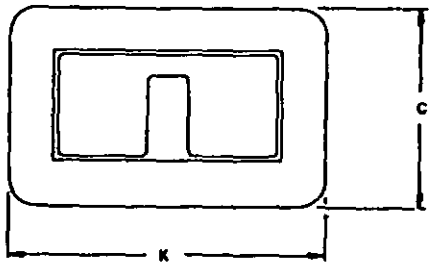


FIGURE 1.

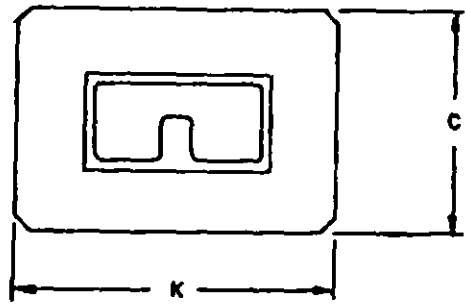


FIGURE 2.

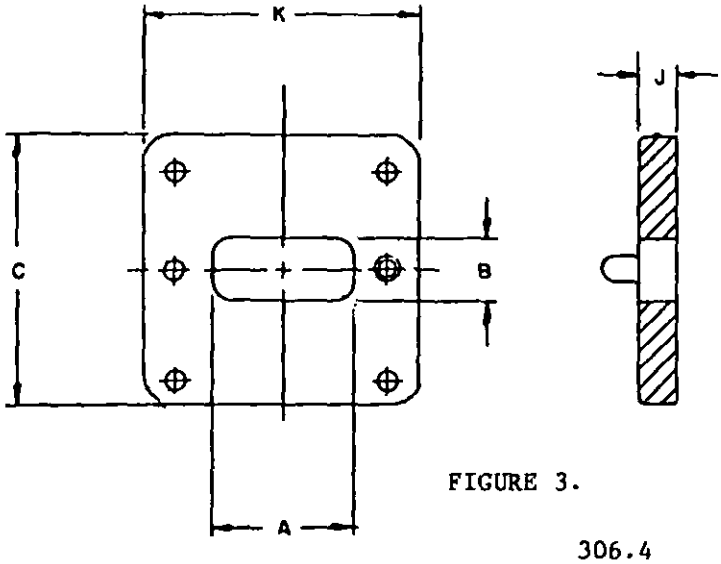


FIGURE 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, SINGLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 3.6:1)

MIL-F-39000/2

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M39000/2-	MTL.	USED WITH WAVEGUIDE M23351/1-	USED WITH MATING M39000/2-	PART NO. M39000/2-	MTL.	USED WITH WAVEGUIDE M23351/1-	USED WITH MATING M39000/2-	FIG.
001	A	013	001	002	C	014, 015, 016	002	1
004	A	017	004	005	C	018, 019, 020	005	2
007	A	021	007	008	C	022, 023, 024	008	2
010	A	025	010	011	C	026, 027, 028	011	3
013	A	029	013	014	C	030, 031, 032	014	3

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M39000/2-		DIMENSIONS A	B	C	J	K	FREQUENCY RANGE (GHz)
001	002	3.494	1.572	3.125	0.625	4.875	0.97 - 3.50
004	005	2.422	1.090	2.062	0.438	3.4238	1.40 - 5.00
007	008	0.968	0.436	1.312	0.250	1.875	3.50 - 12.40
010	011	0.788	0.415	1.375	0.188	1.375	5.00 - 18.00
013	014	0.362	0.212	0.875	0.188	0.875	12.40 - 40.00

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

FLANGES, WAVEGUIDE, DOUBLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 2.4:1)

MIL-F-39000/3

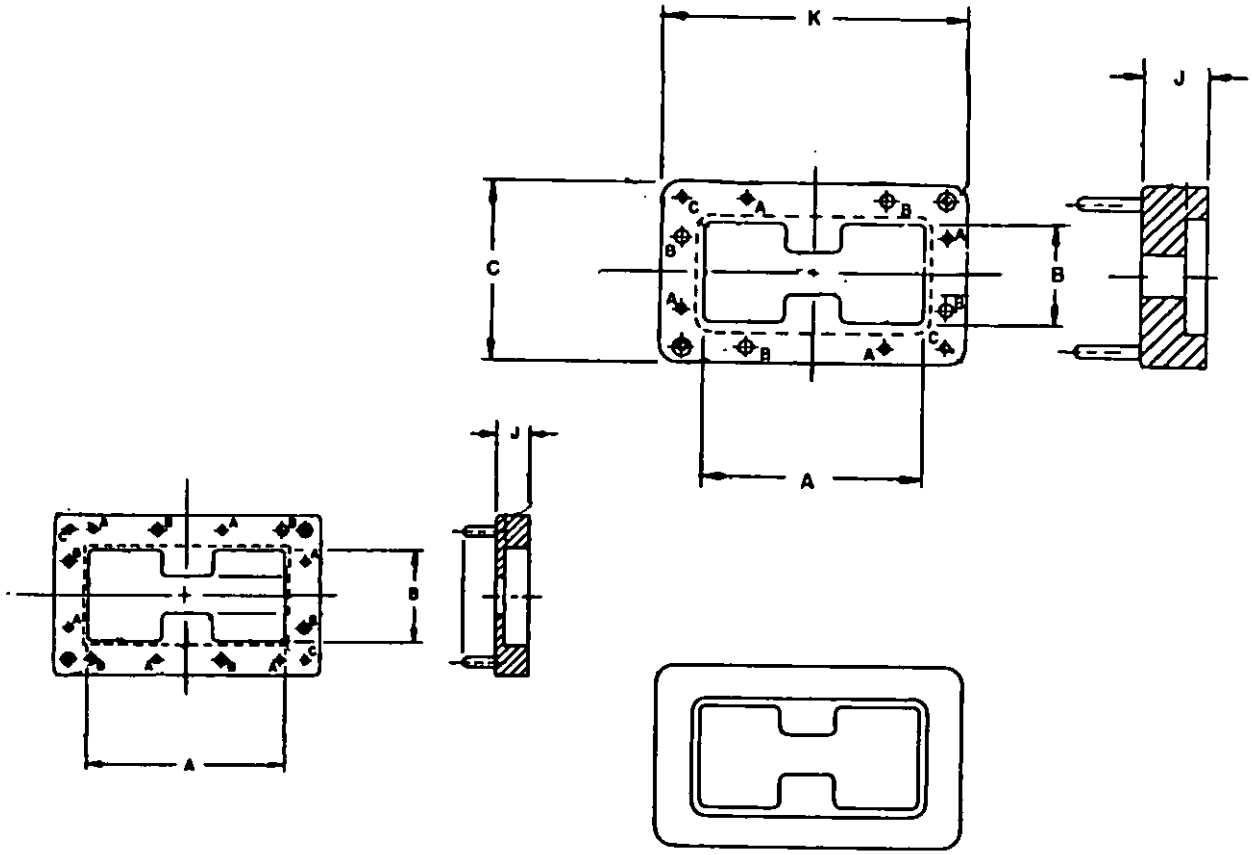


FIGURE 2.

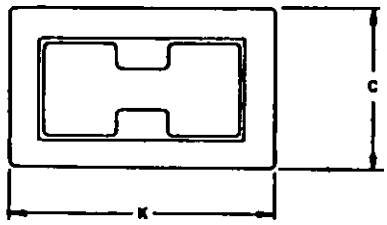


FIGURE 1.

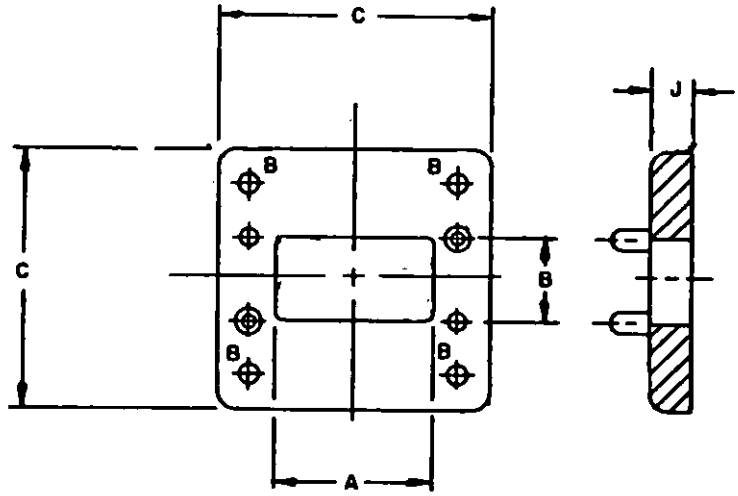


FIGURE 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, DOUBLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 2.4:1)

MIL-F-39000/3

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M39000/3-	MTL.	USED WITH WAVEGUIDE M23351/4-	USED WITH MATING M39000/3-	PART NO. M39000/3-	MTL.	USED WITH WAVEGUIDE M23351/4-	USED WITH MATING M39000/3-	FIG.
001	A	017	001	002	C	018, 019, 020	002	1
004	A	021	004	005	C	022, 023, 024	005	1
007	A	025	007	008	C	026, 027, 028	008	2
010	A	029	010	011	C	030, 031, 032	011	2
013	A	033	013	014	C	034, 035, 036	014	2
016	A	037	016	017	C	038, 039, 040	017	3
019	A	041	019	020	C	042, 0143 044	020	3
022	A	045	022	023	C	046, 047, 048	023	3

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M39000/3-		DIMENSIONS A	B	C	J	K	FREQUENCY RANGE (GHz)
001	002	6.167	2.868	5.000	1.000	8.428	0.84 - 2.00
004	005	3.455	1.607	3.750	0.750	5.438	1.50 - 3.60
007	008	2.590	1.205	2.156	0.750	3.547	2.00 - 4.80
010	011	1.480	0.688	1.594	0.500	2.391	3.50 - 8.20
013	014	1.090	0.506	1.391	0.500	1.969	4.75 - 11.00
016	017	0.797	0.427	1.375	0.188	1.375	7.50 - 18.00
019	020	0.557	0.305	1.000	0.188	1.000	11.00 - 26.50
022	023	0.373	0.219	0.875	0.188	0.875	18.00 - 40.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, DOUBLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 3.6:1)

MIL-F-39000/4

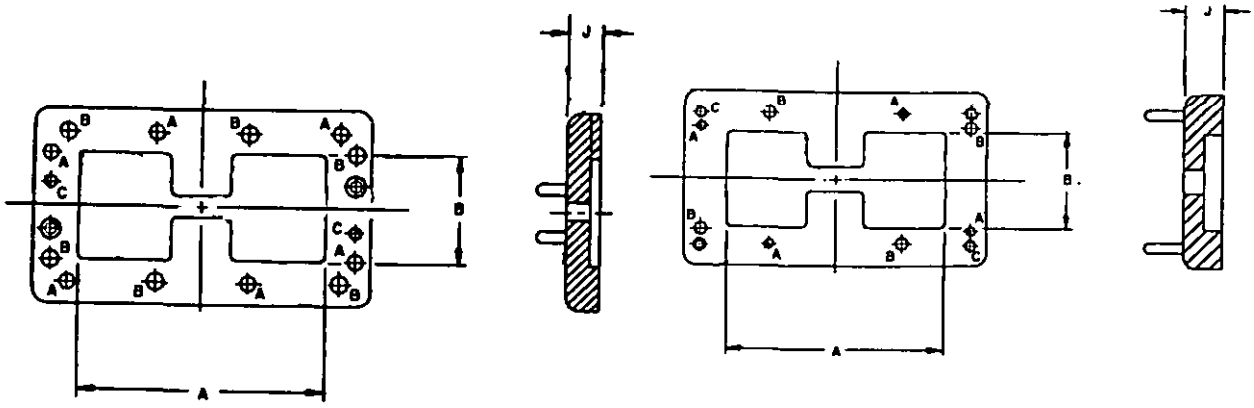


FIGURE 1.

FIGURE 2.

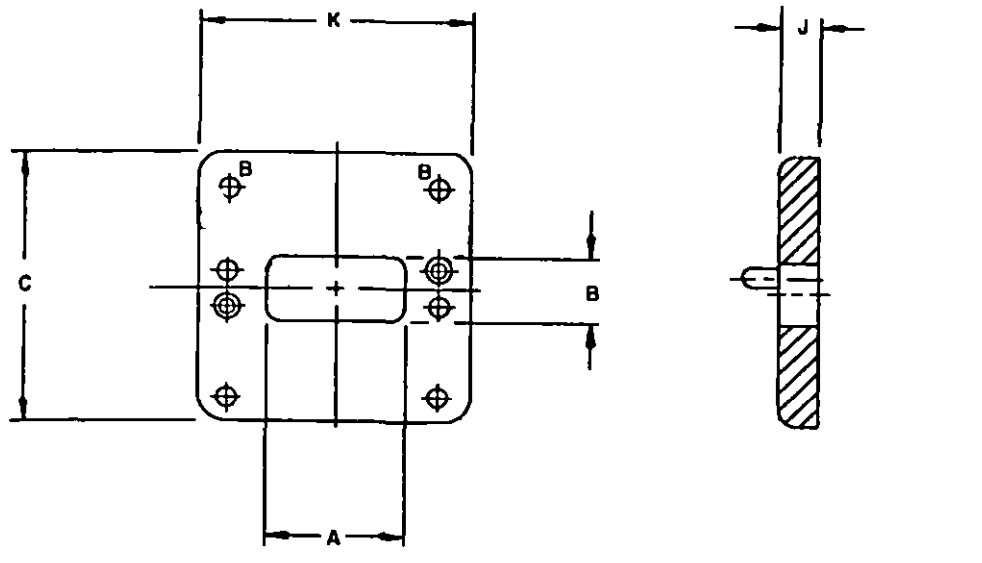


FIGURE 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FLANGES, WAVEGUIDE, DOUBLE RIDGE, SOCKET MOUNT (BANDWIDTH RATIO 3.6:1)

MIL-F-39000/4

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS.

PART NO. M39000/4-	MTL.	USED WITH		PART NO. M39000/4-	MTL.	USED WITH		FIG.
		WAVEGUIDE M23351/2-	MATING M39000/4-			WAVEGUIDE — M23351/2-	MATING M39000/4-	
001	A	013	001, 016	002	C	014, 015, 016	002, 017	1
004	A	017	004, 018	005	C	018, 019, 020	005, 019	2
007	A	021	007, 020	008	C	022, 023, 024	008, 021	2
010	A	025	010, 022	011	C	026, 027, 028	011, 023	3
013	A	029	013, 024	014	C	030, 031, 032	014, 025	3

TABLE 1. PART NUMBER CHARACTERISTICS AND DIMENSIONS. (CONT.)

PART NO. M39000/4-		DIMENSIONS					FREQUENCY RANGE (GHz)
		A	B	C	J	K	
001	002	3.877	1.667	2.552	0.500	5.281	0.97 - 3.50
004	005	2.687	1.155	2.156	0.438	3.687	1.40 - 5.00
007	008	1.074	0.462	1.312	0.250	1.938	3.50 - 12.40
010	011	0.859	0.430	1.250	0.250	1.688	5.00 - 18.00
013	014	0.382	0.216	1.000	0.125	1.188	12.40 - 40.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

ISOLATORS, RADIO FREQUENCY

MIL-I-28791

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR ISOLATORS, COAXIAL, WAVEGUIDE, AND STRIP-LINE RADIO FREQUENCY FOR USE IN ARMED-SERVICE RADAR AND RADIO APPLICATION. ISOLATORS ARE INTENDED FOR USE IN MILITARY EQUIPMENT IN THE FREQUENCY RANGE SPECIFIED.

ISOLATORS, RADIO FREQUENCY, COAXIAL

MIL-I-28791/1

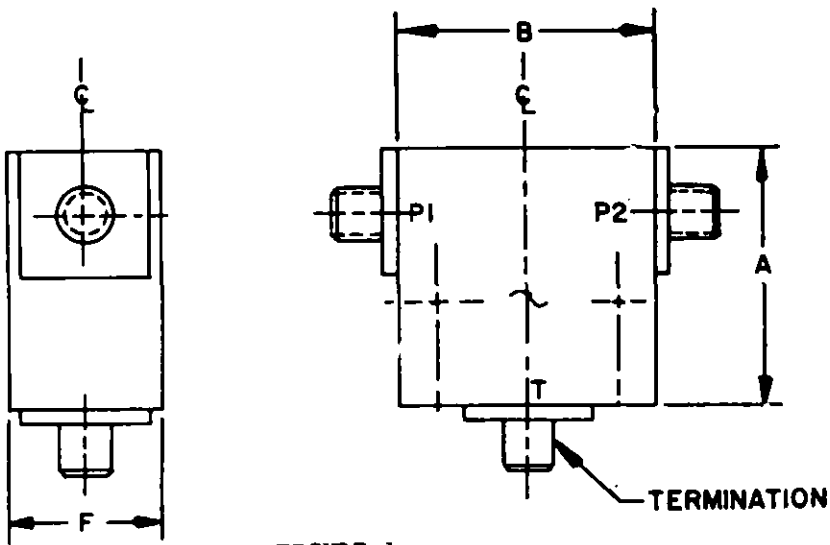
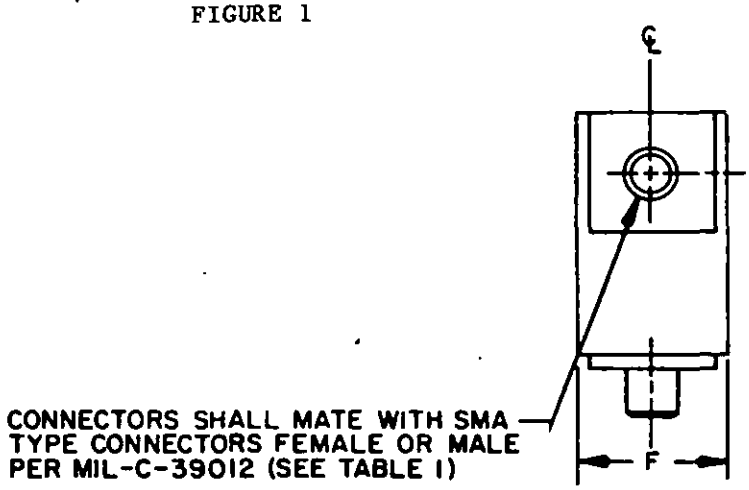


FIGURE 1



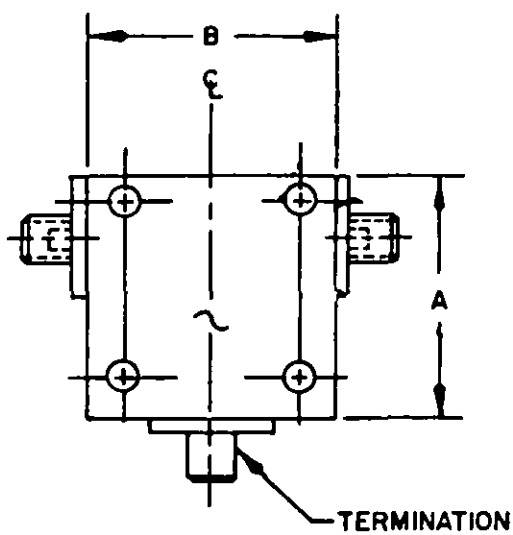


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

ISOLATORS, RADIO FREQUENCY, COAXIAL

MIL-I-28791/1

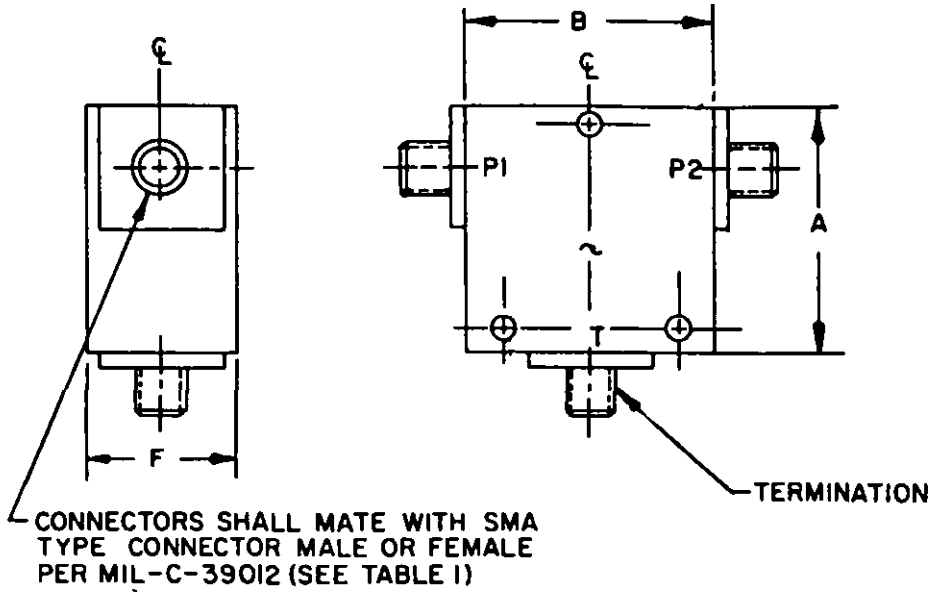


FIGURE 3

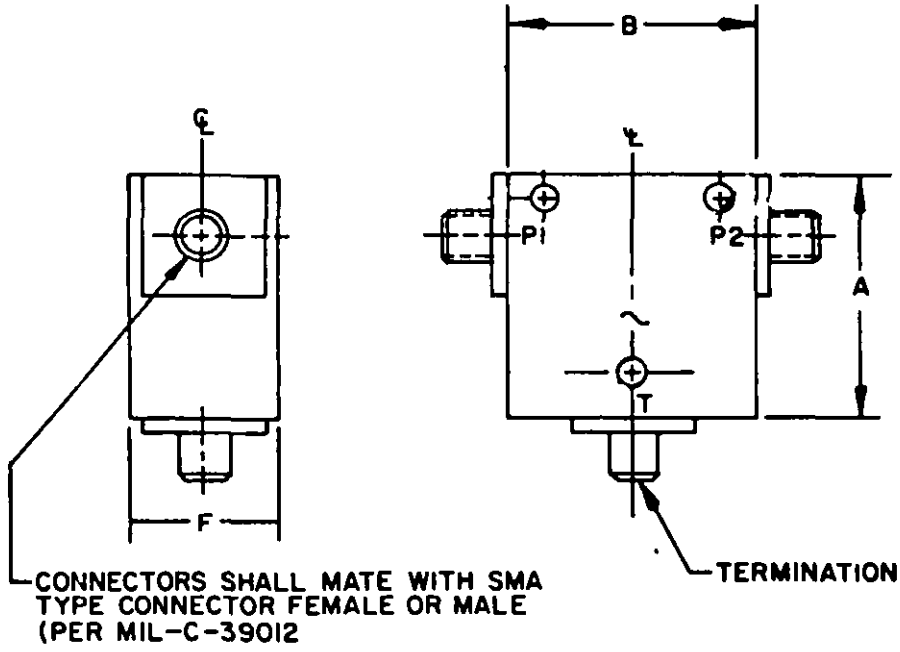


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

ISOLATORS, RADIO FREQUENCY, COAXIAL

MIL-I-28791/1

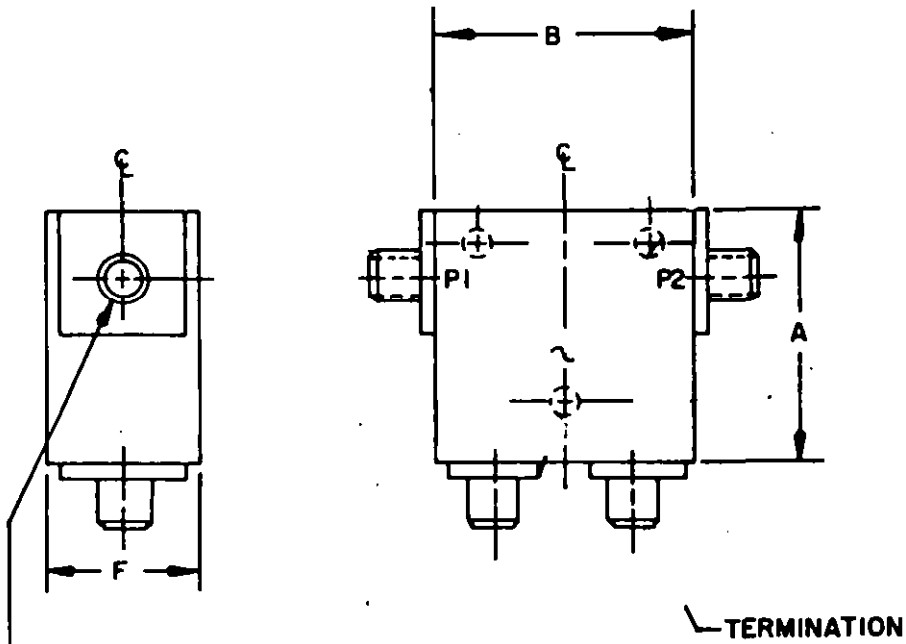


FIGURE 5

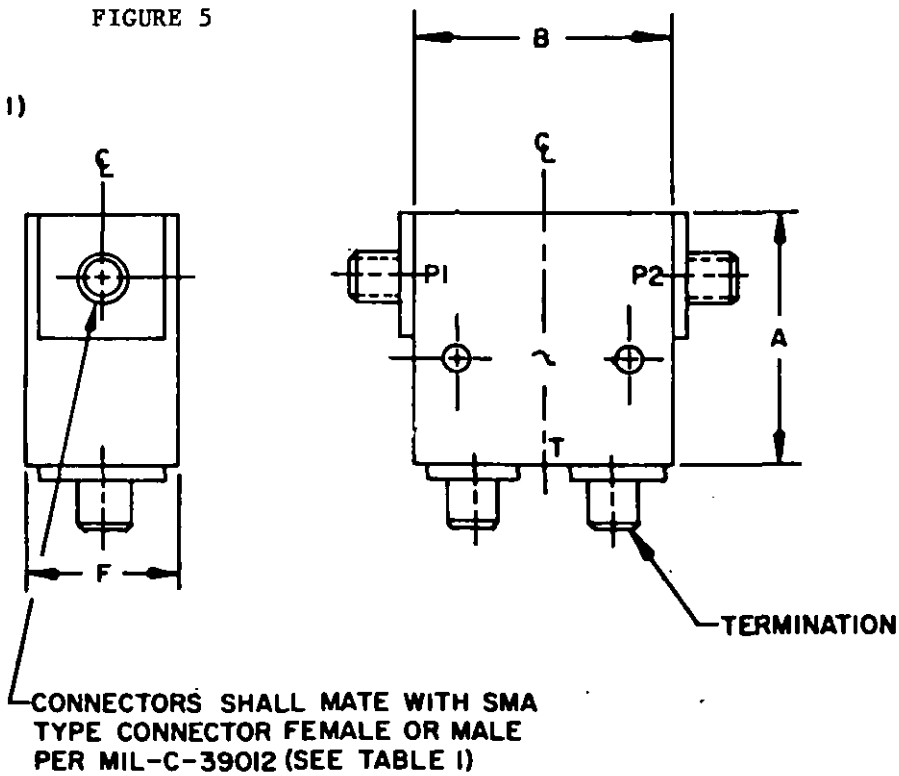


FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

ISOLATORS, RADIO FREQUENCY, COAXIAL

MIL-I-28791/1

TABLE I. ELECTRICAL REQUIREMENTS AND DIMENSIONS.

PART NO. M28791/1-	OPERATING FREQUENCY GHz	VSWR MAX	INSERTION LOSS MAX (dB)	POWER RATING WATTS MAX	DIMENSIONS A	DIMENSIONS B	DIMENSIONS F	FIG
001	9.5 - 10.0	1.25:1	.3	10.0	.66	.53	.53	1
002	12.5 - 13.5							
003	7.0 - 11.0	1.30:1	.5		1.055	.955	.65	
004	11.0 - 18.0							
005	.95 - 1.225	1.25:1		2	1.20	1.20	.75	
006	.95 - 1.225		.4		1.25	1.25		2
007	.96 - 1.215				1.50	1.50	.63	3
008	1 - 2	1.30:1		2	2.75	2.75	.89	4
009	1.255 - 1.41	1.25:1	.4	5	1.25	1.25	.63	3
010	1.26 - 1.666		.5	.03	1.50	1.49	.65	2
011	1.495 - 1.65		.3	5	1.25	1.25	.63	3
012	1.53 - 1.87		.5	2	2.00	2.00	1.00	
013	1.8 - 4.2	1.50:1	.8		1.70	1.63	.75	4
014	2 - 4	1.25:1	.4	1	1.72	1.65		2
015				2	2.08	1.77	.99	4
016	2.16 - 4.16	1.35:1	.5		1.625	1.625	.75	1
017	2.2 - 4.2							
018	2.7 - 2.9	1.25:1	.4		1.00	1.00	.5	4
019	3.6 - 8.4	1.50:1	.5		1.06	1.00	.75	
020	4.0 - 8.0	1.30:1		1	1.03	1.00	.63	1
021		1.25:1	.4	2	1.30	1.15	.63	4
022	4.16 - 8.16	1.35:1	.5		1.03	1.00	.63	1
023	4.2 - 8.2				1.00	1.00	.50	
024	4.35 - 4.85	1.18:1			1.12	.91	.90	
025	7.0 - 11.0	1.22:1	.4	10	.85	.75	.60	
026	7.55 - 12.85	1.35:1	1.2	2		1.60		5
027	8.0 - 12.0	1.25:1	.4	1	1.06	.87	.81	3
028				2	1.08	.94	.56	4
029			.8		1.00	1.80	.63	6
030	8.16 - 12.56	1.35:1	.5		.77	.63	.50	1
031	8.0 - 16.0		.7		.84	.63	.62	
032	12.0 - 18.5		1.2		.68	1.02	.56	5
033	12.0 - 18.0	1.30:1	.6		.83	.67	.62	4
034	12.4 - 18.0	1.25:1	.8		.78	1.20	.63	6
035	12.56 - 18.16	1.45:1	1.0		.77	.63	.80	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

ISOLATOR, RADIO FREQUENCY, COAXIAL

MIL-I-28791/2

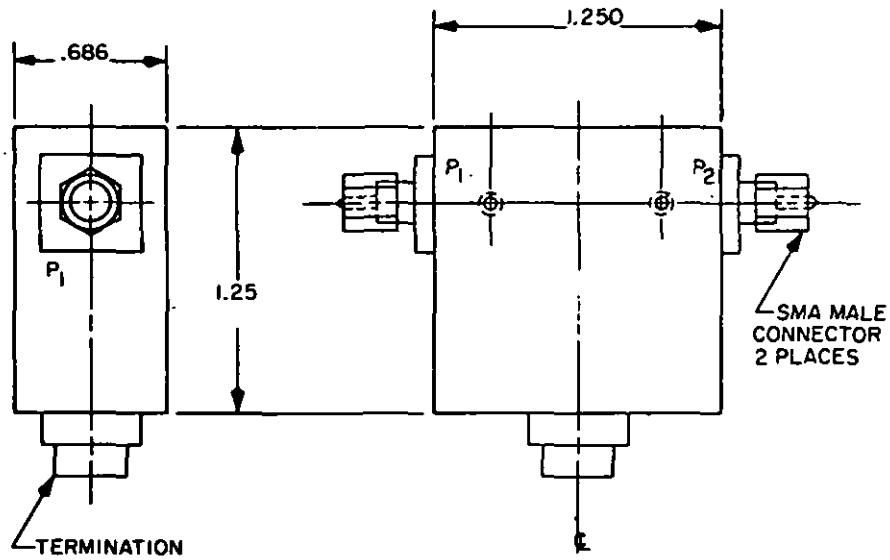


TABLE I. ELECTRICAL REQUIREMENTS.

PART NO. M28791/2-	OPERATING FREQUENCY GHz	VSWR MAX (dB)	INSERTION LOSS MAX	POWER RATING MILLIWATTS
01	4.4 - 5.0 7.125 - 8.4	1.25:1 0°C TO +40°C 1.30:1-40°C TO 0°C AND +40°C TO 70°C	.7	20

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

ISOLATOR, RADIO FREQUENCY, COAXIAL

MIL-I-28791/3

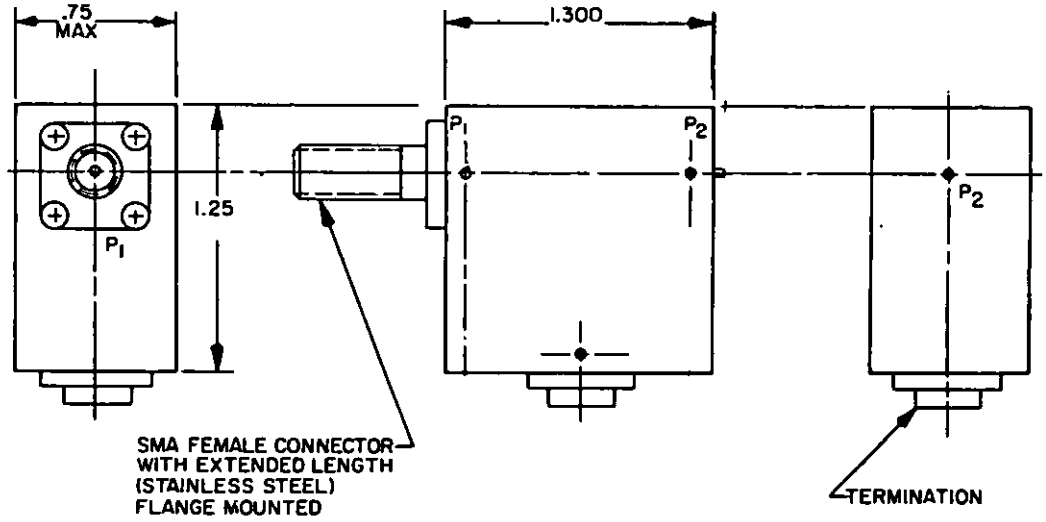


TABLE I. ELECTRICAL REQUIREMENTS.

PART NO. M28791/3-	OPERATING FREQUENCY GHz	VSWR MAX (dB)	INSERTION LOSS MAX	POWER RATING MILLIWATTS
01	4.4 - 5.0	1.25:1 0°C TO 65°C MAX AT -40°C	.2 .3	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

ISOLATOR, RADIO FREQUENCY, COAXIAL

MIL-I-28791/4

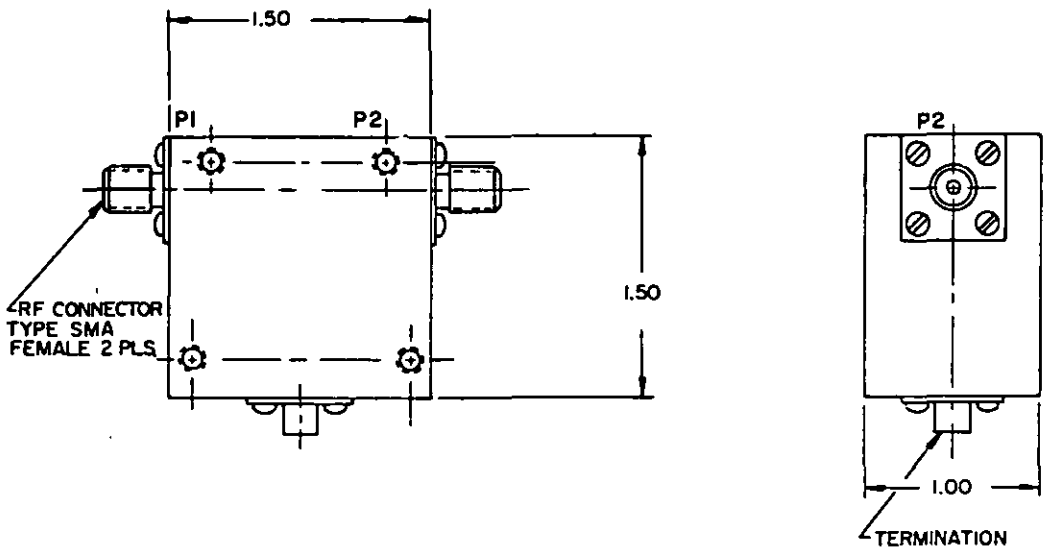



TABLE I. ELECTRICAL REQUIREMENTS.

PART NO. M28791/4-	OPERATING FREQUENCY GHz	VSWR MAX (dB)	INSERTION LOSS MAX	POWER RATING WATTS
01	.85 - 1.05	1.25:1 AT 25°C OVER TEMPERATURE RANGE	.4 .5	1000


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

ISOLATOR, RADIO FREQUENCY, STRIPLINE

MIL-I-28791/5

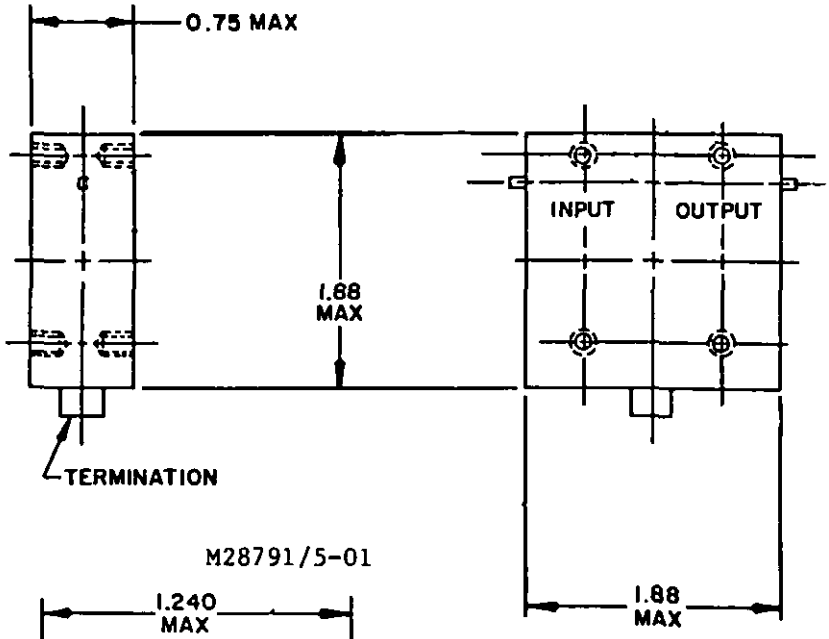

M28791/5-01

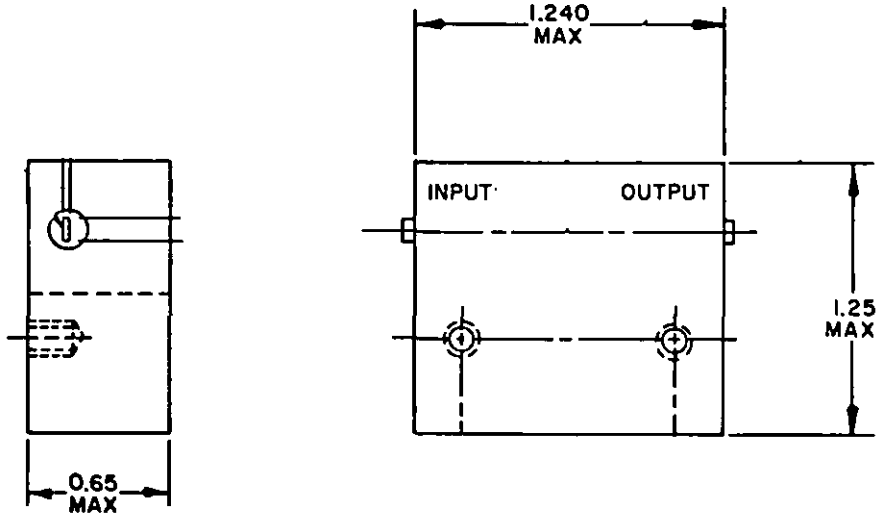

M28791/5-02

TABLE I. ELECTRICAL REQUIREMENTS.

PART NO. M28791/5-	OPERATING FREQUENCY GHz	VSWR MAX (dB)	INSERTION LOSS MAX	POWER RATING WATTS
01	.95 - 1.215	1.20:1 -54°C TO 71°C	.3	50
02	.96 - 1.215	1.25:1 -10°C TO +71°C	.6	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION

MIL-L-28796

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR ASSEMBLIES USED WITH STANDARD SIZE, RADIO FREQUENCY TRANSMISSION LINES, FOR GENERAL APPLICATION BY THE ARMED SERVICES. THE LINES ARE DESIGNED TO HAVE A NOMINAL IMPEDANCE OF 50 OHMS OR 75 OHMS. TRANSMISSION LINES ASSEMBLIES ARE INTENDED FOR OPERATION IN THE MICROWAVE REGION OF THE SPECTRUM.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 1-5/8 INCH ELBOWS

MIL-L-28796/1

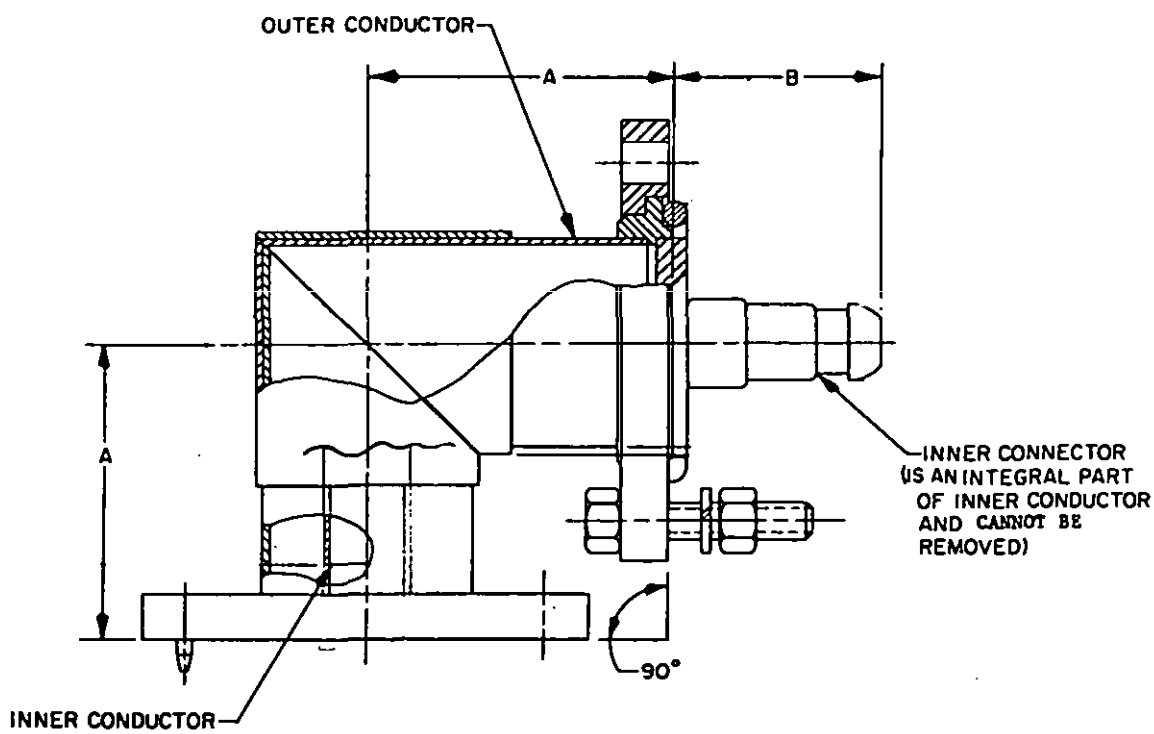


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 1-5/8 INCH ELBOWS

MIL-L-28796/1

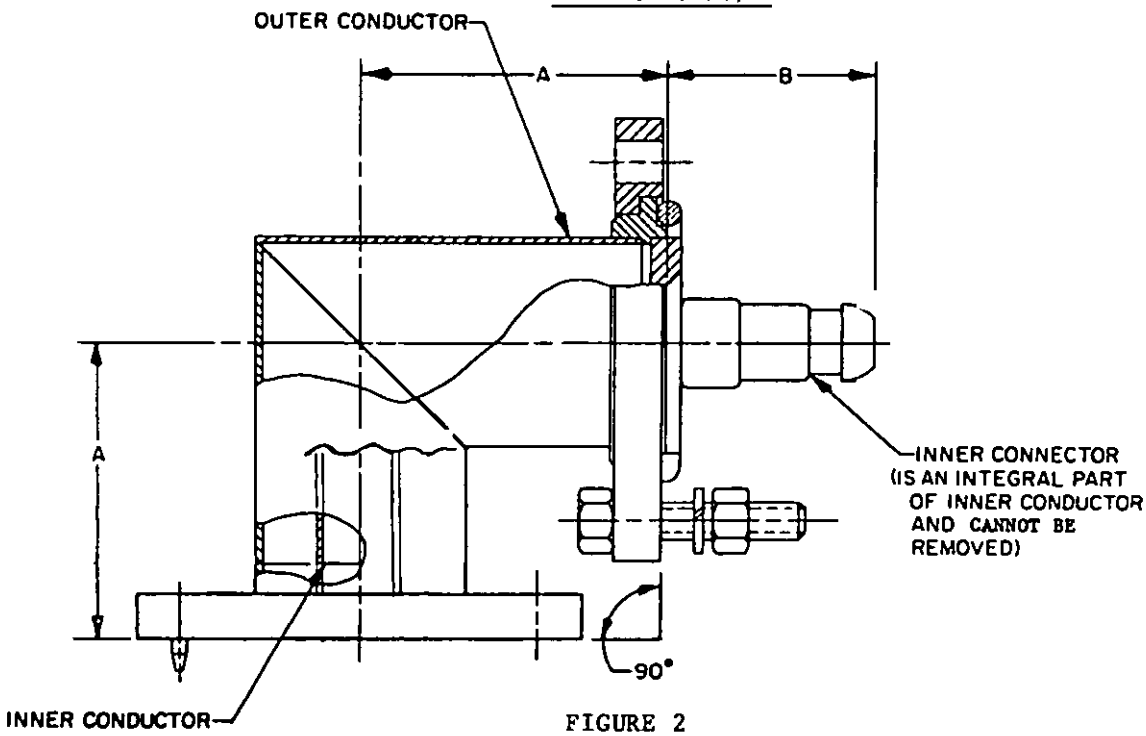


FIGURE 2

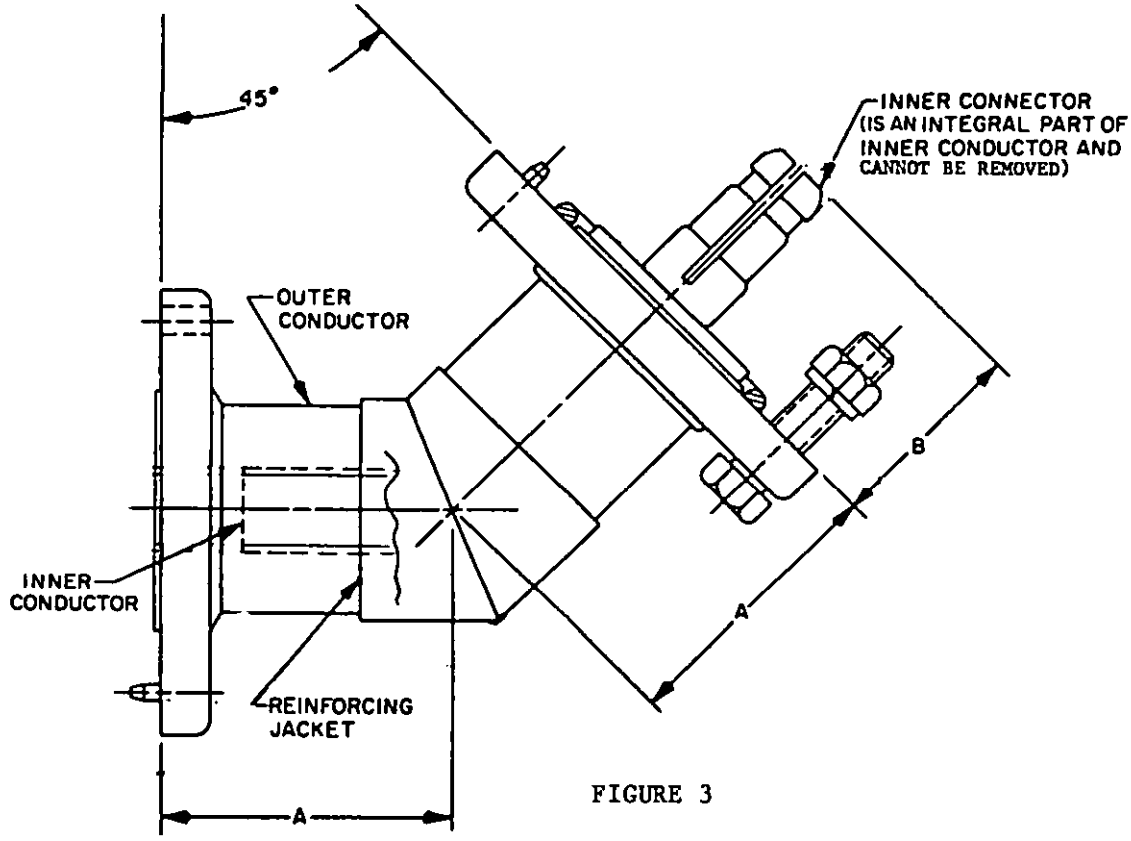


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 1-5/8 INCH ELBOWS

MIL-L-28796/1

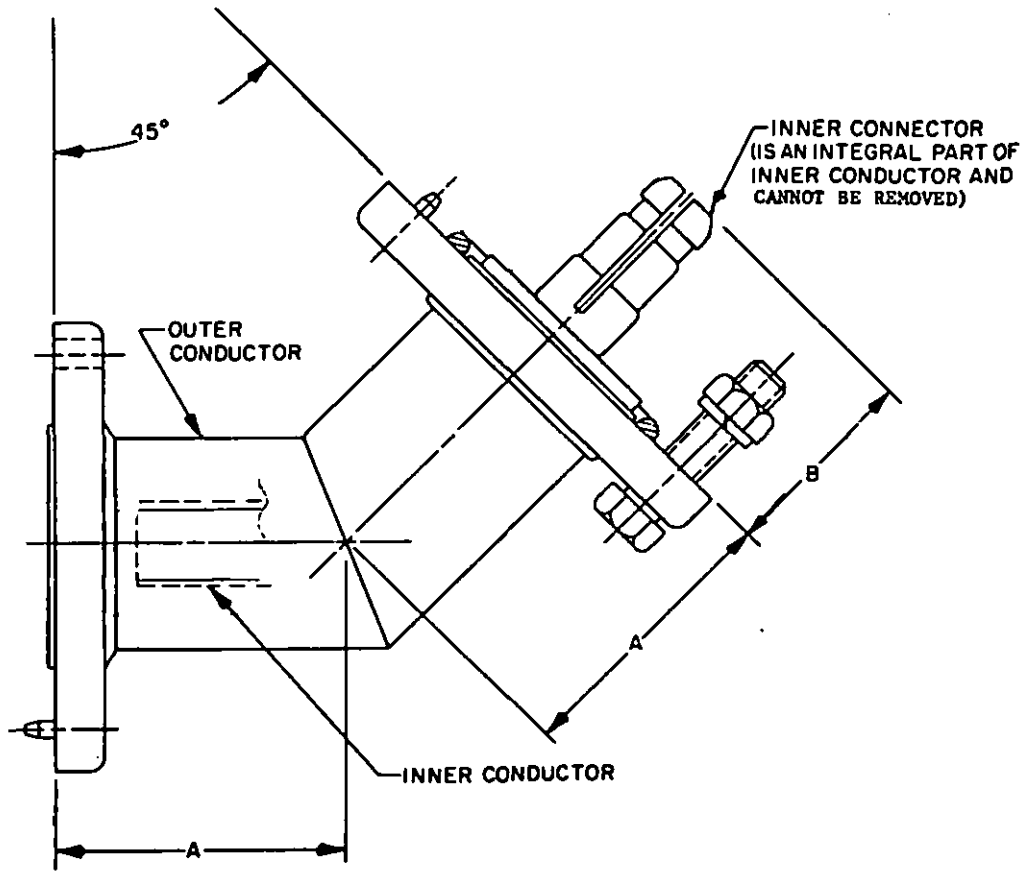


FIGURE 4

TABLE I. PHYSICAL, ELECTRICAL REQUIREMENTS AND DIMENSIONS.

PART NO. M28796/1-	OPERATING FREQUENCY MHz	VSWR MAX	INSERTION LOSS MAX (dB)	R. F. POWER CAPABILITY KILOWATTS AVG	R. F. POWER CAPABILITY KILOWATTS PK	DIMENSIONS A	DIMENSIONS B	FIG
001	400 - 450	1.02:1	.1	10.0	136	2.375	1.625	1
002								2
003								
004								3
005								
006								4
007								
008								

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 3-1/8 INCH ELBOWS

MIL-L-28796/2

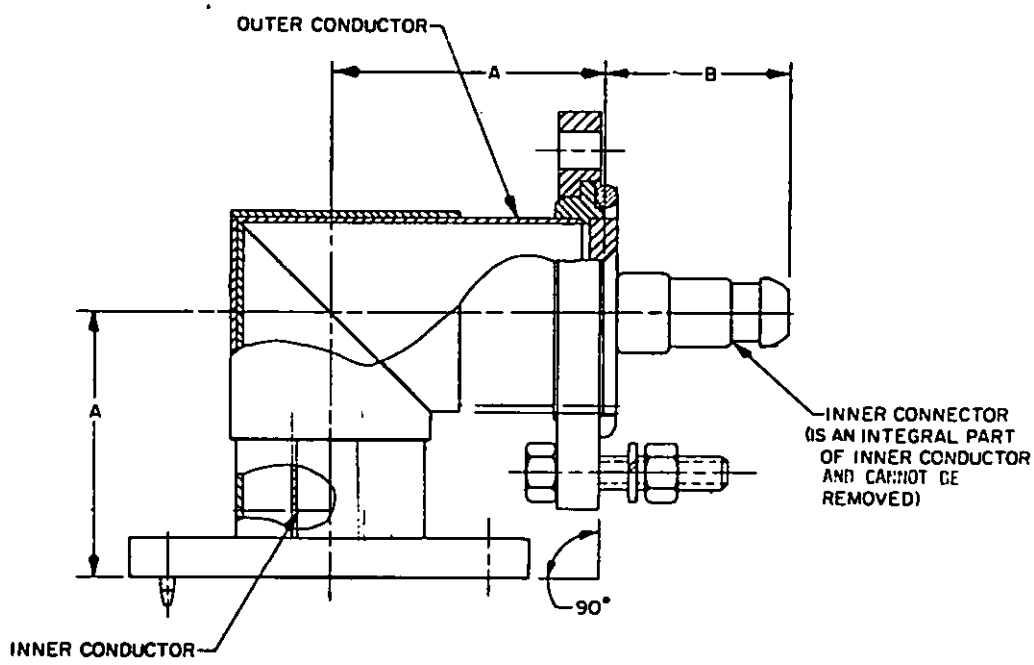


FIGURE 1

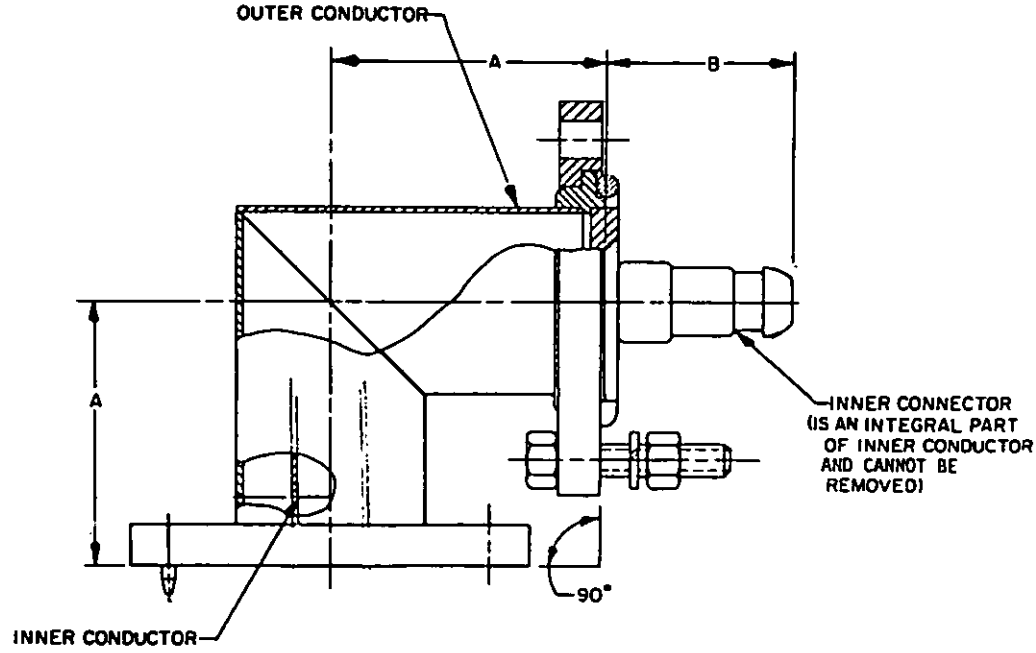


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 3-1/8 INCH ELBOWS

MIL-L-28796/2

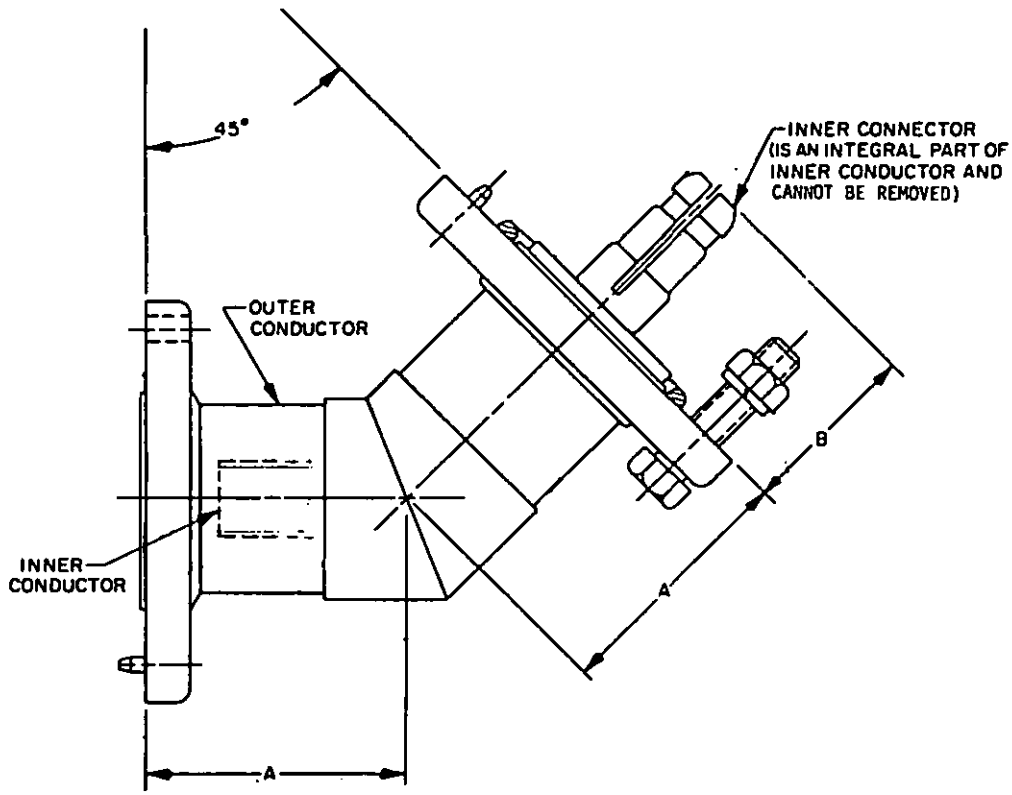


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 3-1/8 INCH ELBOWS

MIL-L-28796/2

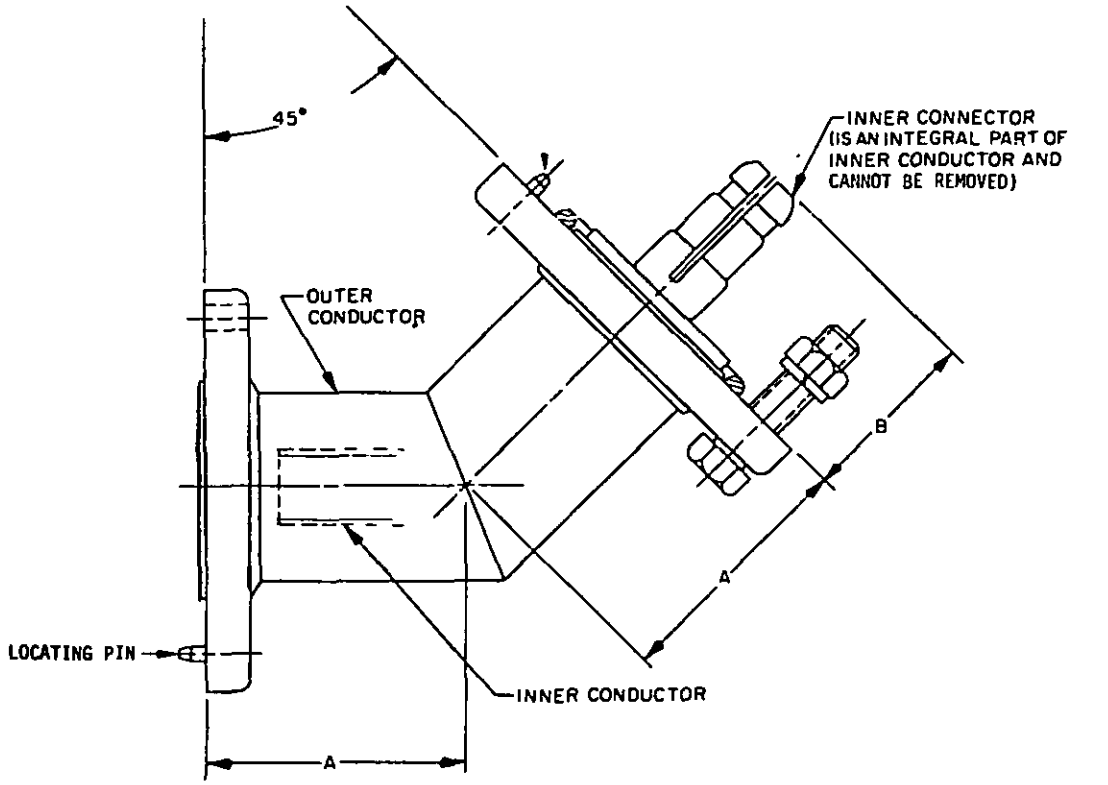


FIGURE 4

TABLE I. PHYSICAL, ELECTRICAL REQUIREMENTS AND DIMENSIONS.

PART NO. M28796/2-	OPERATING FREQUENCY MHz	VSWR MAX	INSERTION LOSS MAX (dB)	R. F. POWER CAPABILITY KILOWATTS AVG	R. F. POWER CAPABILITY KILOWATTS PK	DIMENSIONS A	DIMENSIONS B	FIG
001	400 - 450	1.02:1	.05	40	390	3.812	2.125	1
002								
003								2
004								
005								3
006								
007								4
008								

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 1-5/8 INCH GAS BARRIER

MIL-L-28796/3

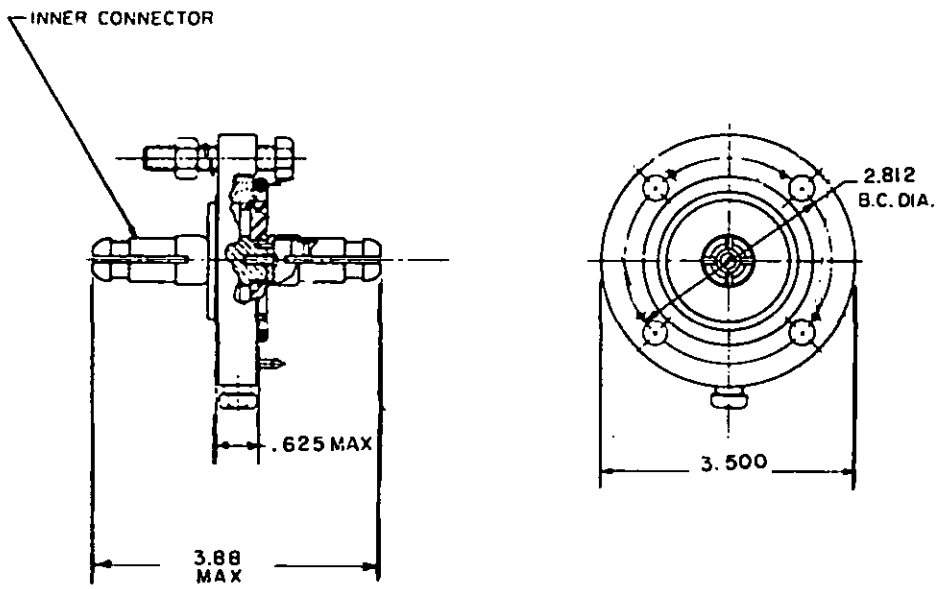


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M28796/3-	OPERATING FREQUENCY MHz	VSWR MAX	INSERTION LOSS MAX (dB)	R. F. POWER CAPABILITY KILOWATTS AVG	R. F. POWER CAPABILITY KILOWATTS PK	FLANGE PER MIL-F-24044/
001 002	400 - 450	1.02:1	.1	10.0	136	2-05 2-06

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 3-1/8 INCH GAS BARRIER

MIL-L-28796/4

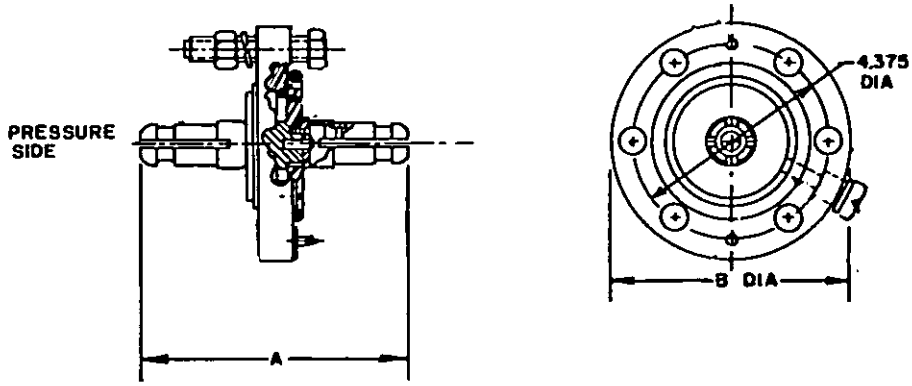


TABLE I. PHYSICAL, ELECTRICAL REQUIREMENTS AND DIMENSIONS.

PART NO. M28796/4-	OPERATING FREQUENCY MHz	VSWR MAX	INSERTION LOSS MAX (dB)	R. F. POWER CAPABILITY KILOWATTS AVG	R. F. POWER CAPABILITY KILOWATTS PK	DIMENSIONS A	DIMENSIONS B
001	400 - 450	1.02:1	.05	24.0	390	5.07	5.188
002							
003	200 - 230					5.75	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 1-5/8 INCH STRAIGHT SECTIONS, FLANGED

MIL-L-28796/5

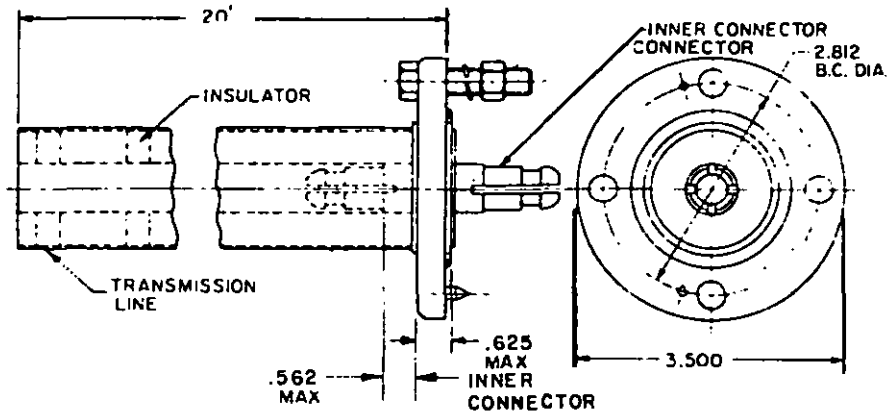


FIGURE 1

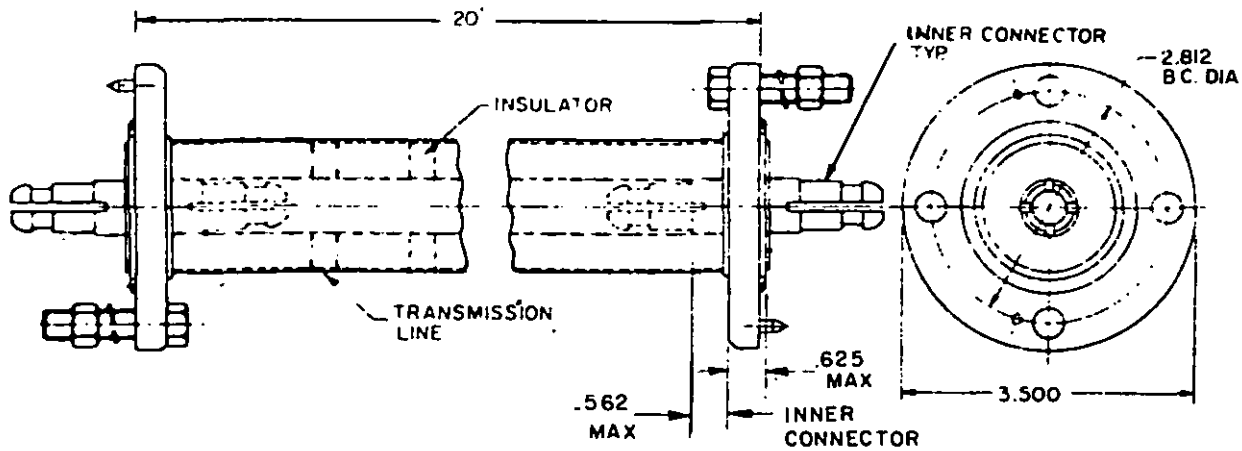


FIGURE 2

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M28796/5-	R. F. POWER CAPABILITY KILOWATTS AVG	R. F. POWER CAPABILITY KILOWATTS PK	FLANGE PER MIL-F-24044/	FIGURE NUMBER
001	10.0	136	2-05	1
002			2-06	
003			2-05	2
004			2-06	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 3-1/8 INCH STRAIGHT SECTIONS, FLANGED

MIL-L-28796/6

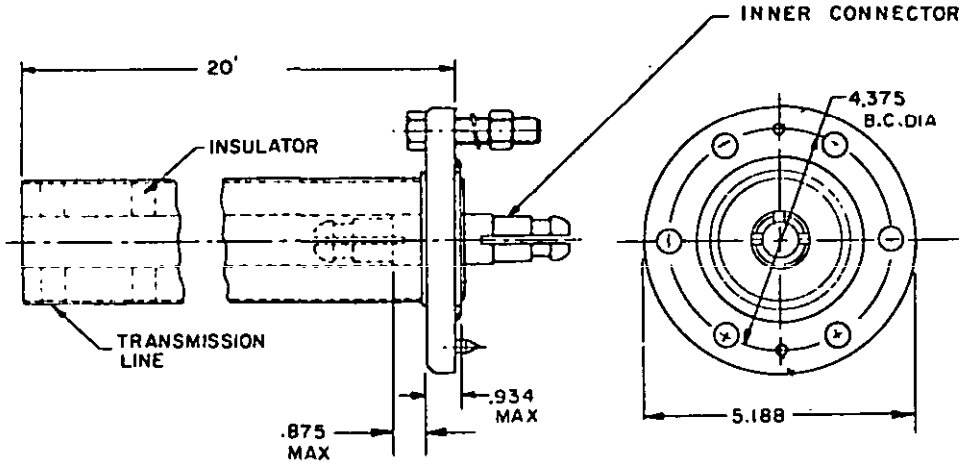


FIGURE 1

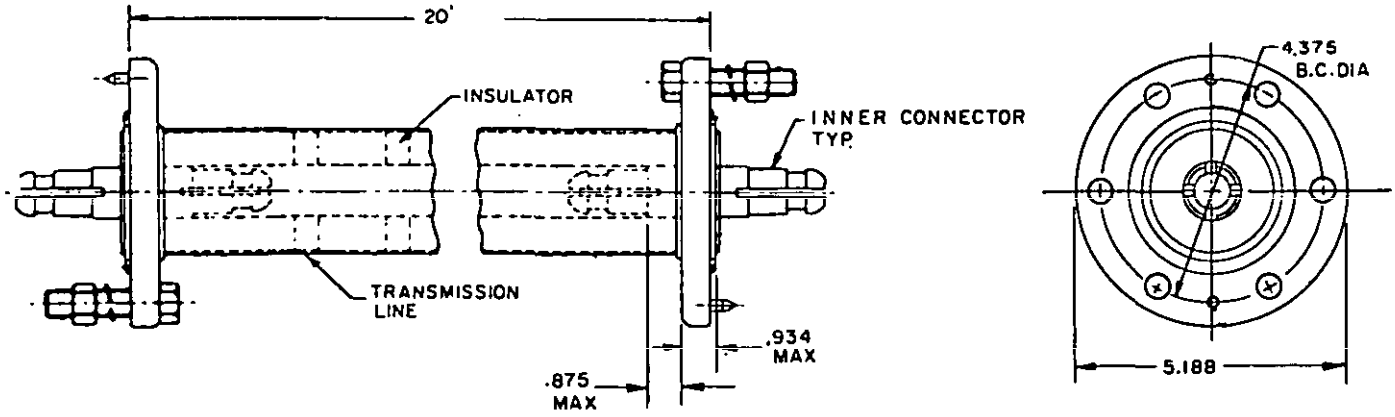


FIGURE 2

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M28796/6-	OPERATING FREQUENCY H Hz	VSWR MAX	R. F. POWER CAPABILITY KILOWATTS AVG	R. F. POWER CAPABILITY KILOWATTS PK	FLANGE PER MIL-F-24044/	FIGURE NUMBER
001	.5 - 1300	1.10:1	40.0	390	2-09	1
002					2-10	
003					2-09	2
004					2-10	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 1-5/8 INCH STRAIGHT FLEXIBLE SECTIONS, FLANGED

MIL-L-28796/7

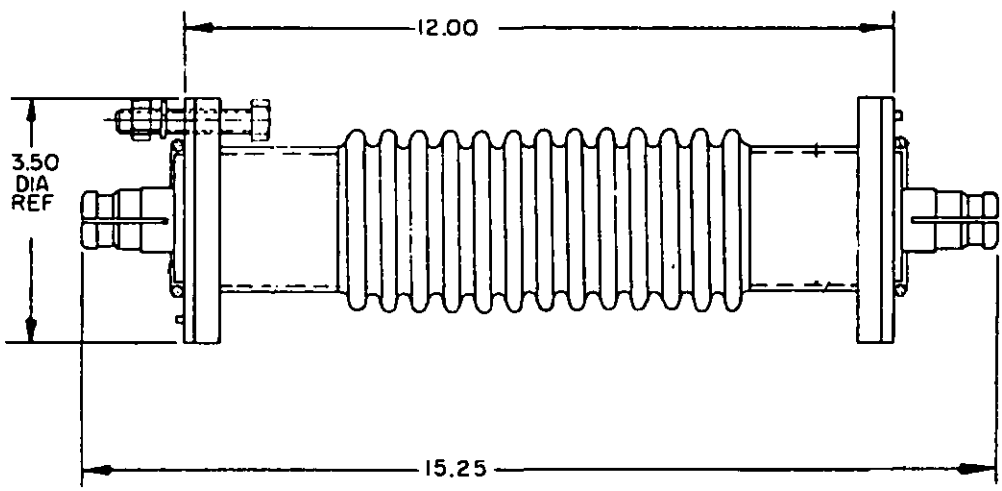


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M28796/7-	OPERATING FREQUENCY MHz	VSWR MAX	INSERTION LOSS MAX (dB)	R. F. POWER CAPABILITY KILOWATTS	
				AVG	PK
001	10 - 1600	1.08:1 @ 100 TO 880 1.10:1 @ 880 TO 1600	.02	1.53	140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION 3-1/8 INCH STRAIGHT FLEXIBLE SECTIONS, FLANGED

MIL-L-28796/8

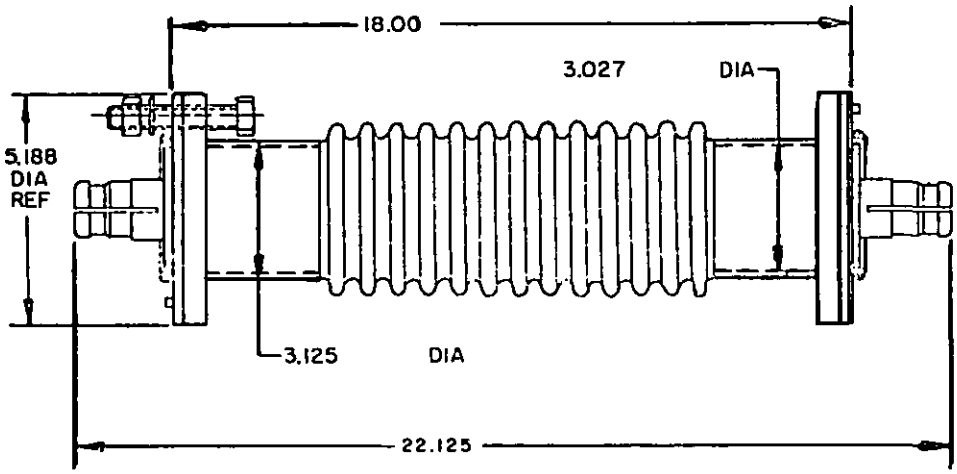



TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M28796/8-	OPERATING FREQUENCY MHz	VSWR MAX	INSERTION LOSS MAX (dB)	R. F. POWER CAPABILITY KILOWATTS	
				AVG	PK
001	0 - 1700	1.04:1 @ 0 TO 500 1.06:1 @ 500 TO 1000 1.10:1 @ 1000 TO 1700	.01	1.53	140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LINE ASSEMBLIES, RADIO FREQUENCY TRANSMISSION REDUCER, FLANGED TYPE,
3-1/8 TO 1-5/8 INCH 50 OHM

MIL-L-28796/9

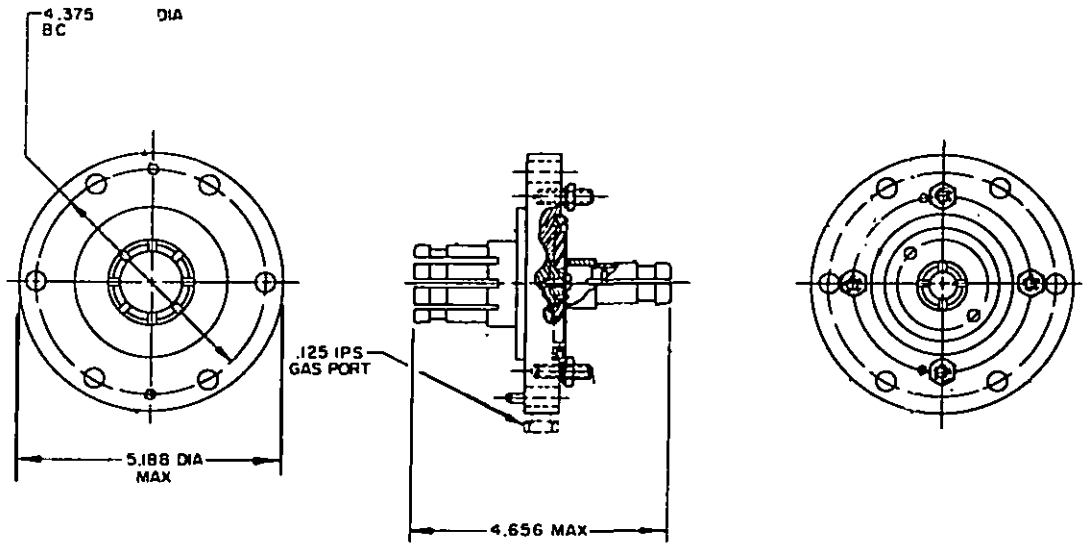

NOTE :
M28796/9-001 AND 002 DO NOT HAVE GAS PORT
M28796/9-003 AND 004 HAVE THE GAS PORT AS SHOWN.

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M28796/9-	OPERATING FREQUENCY MHz	VSWR MAX	INSERTION LOSS MAX (dB)	R. F. POWER CAPABILITY KILOWATTS AVG	R. F. POWER CAPABILITY KILOWATTS PK	MATERIAL
001	400 - 450	1.02:1	.5	6.3	136	CU OR CU ALLOY
002						AL OR AL ALLOY
003						CU OR CU ALLOY
004						AL OR AL ALLOY


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIXER STAGES, RADIO FREQUENCY

MIL-M-28837

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR MIXER STAGES, RADIO FREQUENCY FOR USE IN MILITARY SYSTEMS AS BALANCED MIXERS, PHASE DETECTORS, BALANCED MODULATORS, AMPTITUDE MODULATORS, PULSE MODULATORS AND CURRENT CONTROLLED ATTENUATORS.


PART NUMBER: M28837/1-01N OR S

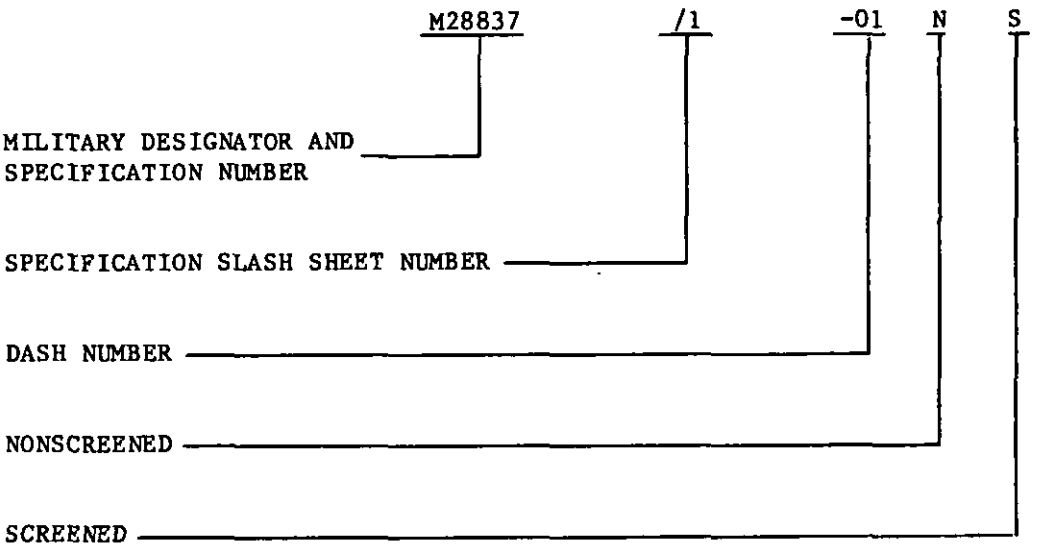


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

MIXER STAGES, RADIO FREQUENCY, DOUBLE BALANCED, PIN PLUG-IN TERMINATION


MIL-M-28837/1

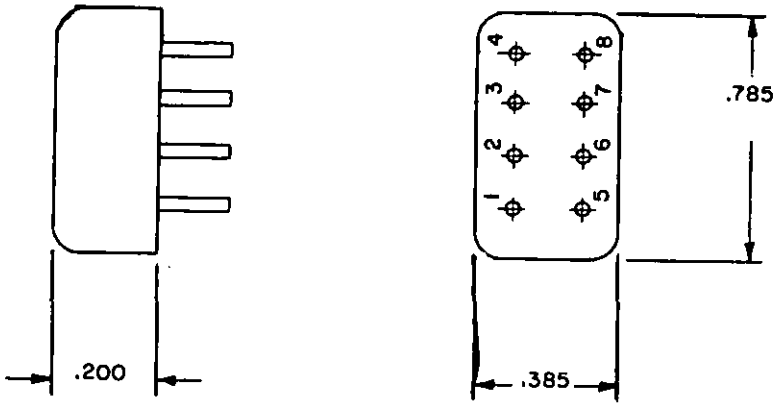

M28837/1-01N, 01S, 02N AND 02S

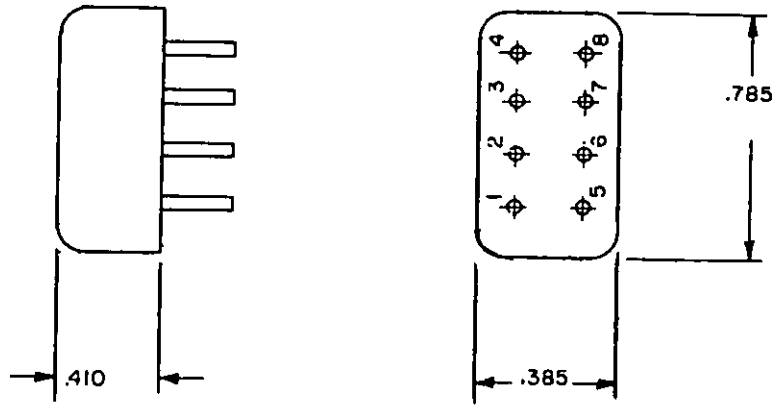

M28837/1-04N AND 04S

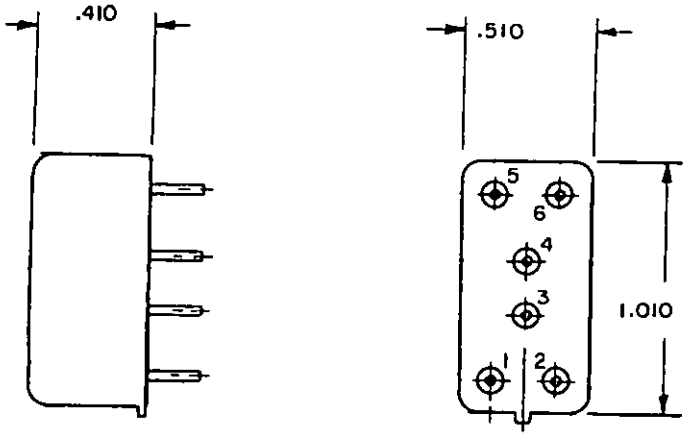

M28837/1-05N, 05S, 06N, 06S, 10N AND 10S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIXER STAGES, RADIO FREQUENCY, DOUBLE BALANCED, PIN PLUG-IN TERMINATION

MIL-M-28837/1

TABLE I. ELECTRICAL CHARACTERISTICS.

PART NUMBER M28837/1-	FREQUENCY RANGE (MHz)	LO POWER INPUT (dBm)	MAXIMUM CONVERSION LOSS (SSB) (dB) (MHz)	NOISE FIGURE (SSB) (dB) (MHz)
01N 01S	LO .05 - 200 RF .05 - 200 IF DC - 200	+7	6.5 AT fL AND fR 0.2 - 50 fI DC - 50	6.5 AT fL AND fR 1 - 50 fI 0.4 - 50
			8.0 AT fL AND fR 50 - 200 fI DC - 200	8.0 AT fL AND fR 50 - 200 fI 0.4 - 200
			8.5 AT fL AND fR 0.05 - 0.2 fI DC - 0.4	
02N 02S	LO 5 - 500 RF 5 - 500 IF DC - 500		7.0 AT fL AND fR 5 - 150 fI 0.4 - 150	7.0 AT fL AND fR 10 - 100 fI 0.4 - 100
			9.0 AT fL AND fR 150 - 500 fI 0.4 - 500	9.0 AT fL AND fR 100 - 500 fI 0.4 - 500
04N 04S	LO 2 - 500 RF 2 - 400 IF DC - 800	+20	fL 5 - 200 fR 20 - 80 6.5 AT fI 5 - 80 7.0 AT fI .4 - 120	fL 5 - 200 fR 20 - 80 6.5 AT fI 5 - 80 7.0 AT fI DC - 120
			fL 5 - 300 fR 5 - 300 7.0 AT fI 5 - 80 8.0 AT fI DC - 300	fL 5 - 300 fR 5 - 300 7.0 AT fI 5 - 80 8.0 AT fI 2 - 120
			fR 5 - 470 fR 5 - 400 7.5 AT fI 5 - 80 fL 2 - 500 fR 2 - 400 9.0 AT fI DC - 800	fL 5 - 470 fR 5 - 400 8.0 AT fI 5 - 80 fL 2 - 500 fR 2 - 400 9.5 AT fI 2 - 800
05N 05S	LO .05 - 200 RF .05 - 200 IF DC - 200	+13	7.5 AT fL AND fR 0.2 - 50 fI DC - 50	7.5 AT fL AND fR 1 - 50 fI 0.4 - 50
			9.0 AT fL AND fR .05 - 200 fI DC - 200	9.0 AT fL AND fR 50 - 200 fI 0.4 - 200
06N 06S	LO 5 - 500 RF 5 - 500 IF DC - 500	+17	7.0 AT fL AND fR 0.5 - 30 fI DC - 30	7.0 AT fL AND fR 1 - 30 fI 0.4 - 30
			7.5 AT fL AND fR 30 - 100 fI DC - 100	7.5 AT fL AND fR 30 - 100 fI 0.4 - 100
			9.0 AT fL AND fR 100 - 500 fI DC - 500	9.0 AT fL AND fR 100 - 500 fI 0.4 - 500
10N 10S	LO .4 - 500 RF .4 - 500 IF DC - 500	+13	7.5 AT fL AND fR 1 - 50 fI 0.4 - 50	7.5 AT fL AND fR 1 - 50 fI 0.4 - 50
			9.0 AT fL AND fR 0.4 - 500 fI 0.4 - 500	9.0 AT fL AND fR 50 - 500 fI 0.4 - 500

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

MIXER STAGES, RADIO FREQUENCY, DOUBLE BALANCED, SOLDER LEADS

MIL-M-28837/2

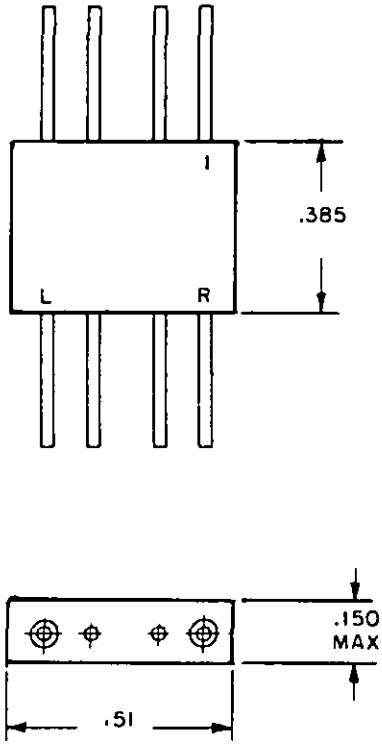



TABLE I. ELECTRICAL CHARACTERISTICS.


PART NUMBER M28837/2-	FREQUENCY RANGE (MHz)	LO POWER INPUT (dBm)	MAXIMUM CONVERSION LOSS (SSB) (dB)	(MHz)	NOISE FIGURE (SSB) (dB)	(MHz)
02N 02S	RF 10 - 1500 LO 10 - 1500 IF DC - 1000	+7	7.0 AT	fR 20 - 600 fL 10 - 800 fI DC - 200	7.0 AT	fR 20 - 600 fL 10 - 800 fI 0.4 - 200
			8.0 AT	fR 10 - 1200 fL 10 -1400 fI DC - 200	8.0 AT	fR 10 - 1200 fL 10 - 1400 fI 0.4 - 200
			8.5 AT 9.5 AT	fR 10 - 1500 fL 10 - 1500 fI DC -200 fI DC - 1000	8.5 AT 9.5 AT	fR 10 - 1500 fL 10 - 1500 fI 0.4 - 200 fI 0.4 - 1000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIXER STAGES, RADIO FREQUENCY, DOUBLE BALANCED, TO-5 CONFIGURATION


MIL-M-28837/7

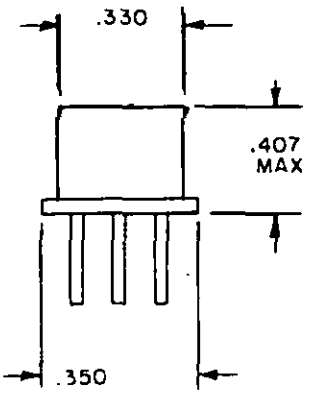



M28837/7-01N AND 01S

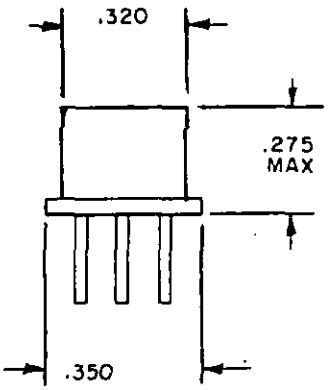



M28837/7-03N AND 03S

TABLE I. ELECTRICAL CHARACTERISTICS.

PART NUMBER M28837/7-	FREQUENCY RANGE (MHz)	LO POWER INPUT (dBm)	MAXIMUM CONVERSION LOSS (SSB) (dB) (MHz)	NOISE FIGURE (SSB) (dB) (MHz)
01N 01S	RF 10 - 500 LO 10 - 500 IF DC - 500	+7	7 AT fL AND fR 10 - 200 fI DC - 200 8.0 AT fL AND fR 200 - 350 fI DC - 350 9.0 AT fL AND fR 350 - 500 fI DC - 500	7 AT fL AND fR 10 - 200 fI 0.4 - 200 8.0 AT fL AND fR 200 - 350 fI 0.4 - 350 9.0 AT fL AND fR 350 - 500 fI 0.4 - 500
03N 03S	RF 0.4 - 500 LO 0.4 - 500 IF DC - 500		6.5 AT fL AND fR 1 - 200 fI DC - 200 7.5 AT fL AND fR 0.4 - 500 fI DC - 500	6.5 AT fL AND fR 2 - 200 fI 2 - 200 7.5 AT fL AND fR 2 - 500 fI 2 - 500

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDERS, POWER COMBINERS, AND POWER/COMBINERS

MIL-P-23971

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR POWER DIVIDERS, POWER COMBINERS, AND DIVIDER/COMBINERS. THESE ITEMS ARE INTENDED FOR USE IN MILITARY SYSTEMS FOR SIGNAL SPLITTERS, SIGNAL COMBINERS, POWER ADDERS, HOMING SYSTEMS RADIO DIRECTION FINDING, PHASE NETWORKS AND COMMUNICATION SYSTEMS, ETC.

MIL-P-23971/1

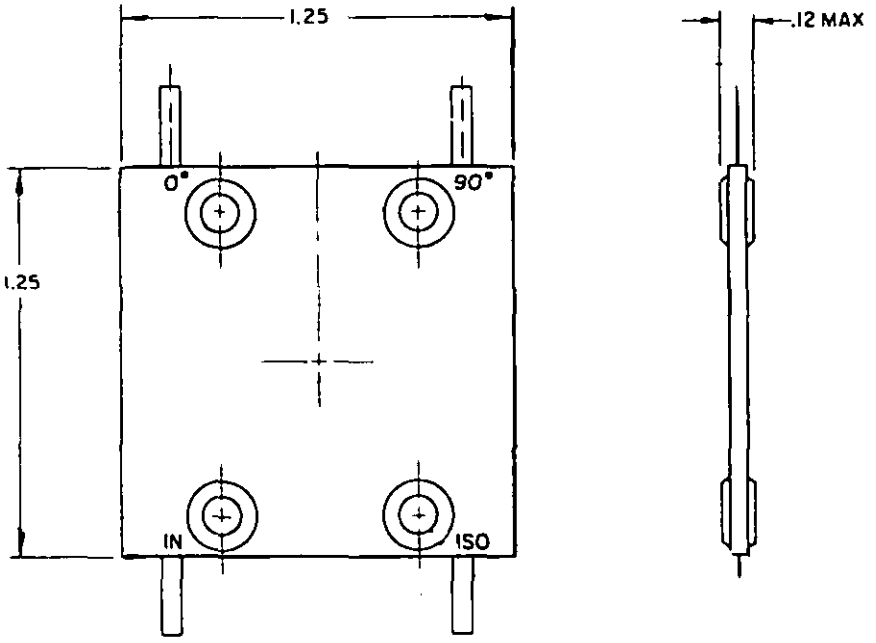


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDERS, POWER COMBINERS, AND POWER/COMBINERS

MIL-P-23971/1

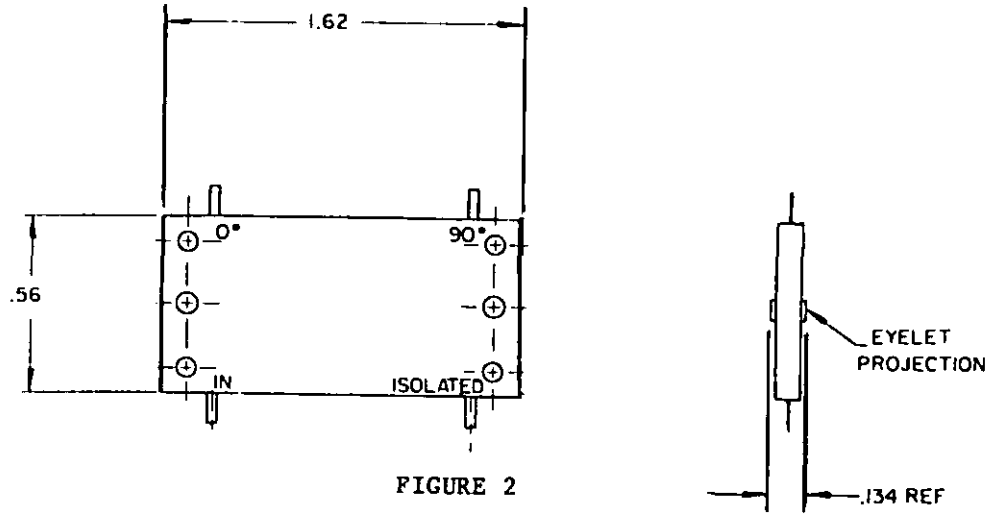


FIGURE 2

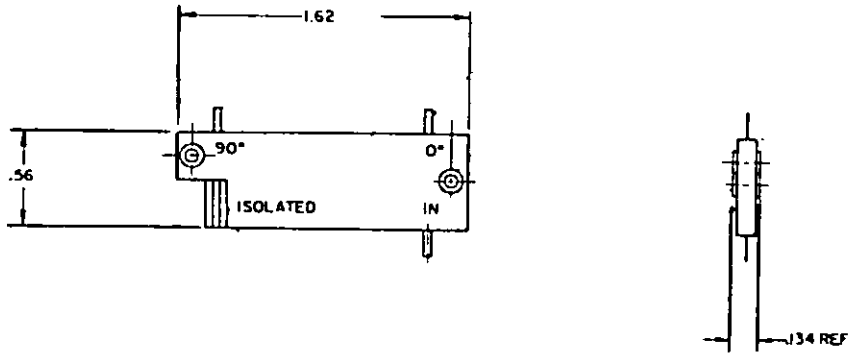


FIGURE 3

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/1-	FREQUENCY RANGE MHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL AVG W	POWER LEVEL PK W	FIG
01	225 - 400	3+.2 -0	1.2:1	.3	± 1.5	60	300	1
02	250 - 500			.25				1
03	225 - 400					100	200	2
04								3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDERS, 4 PORT QUADRATURE SMA CONNECTORS

MIL-P-23971/2

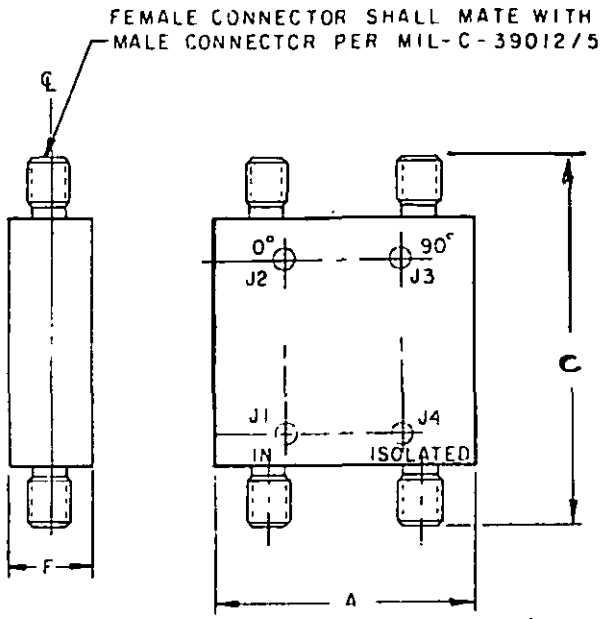



FIGURE 1



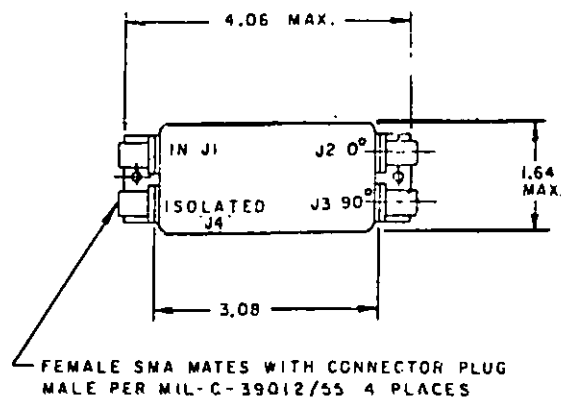


FIGURE 2

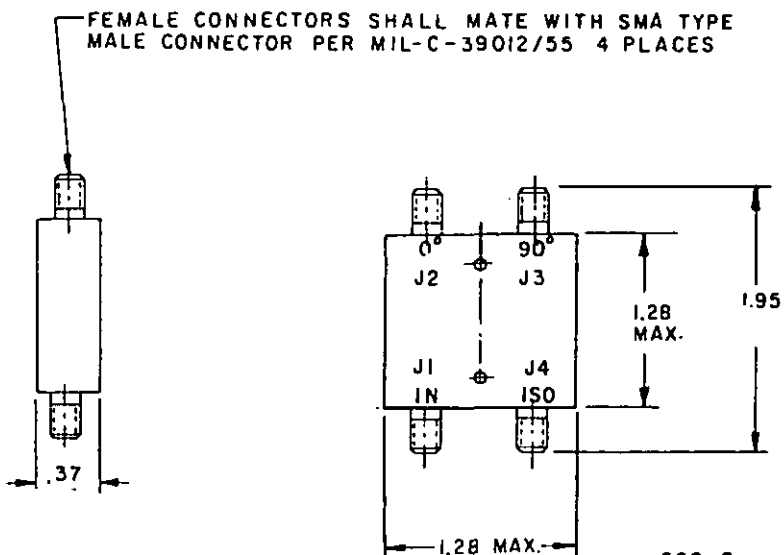


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDERS, 4 PORT QUADRATURE SMA CONNECTORS

MIL-P-23971/2

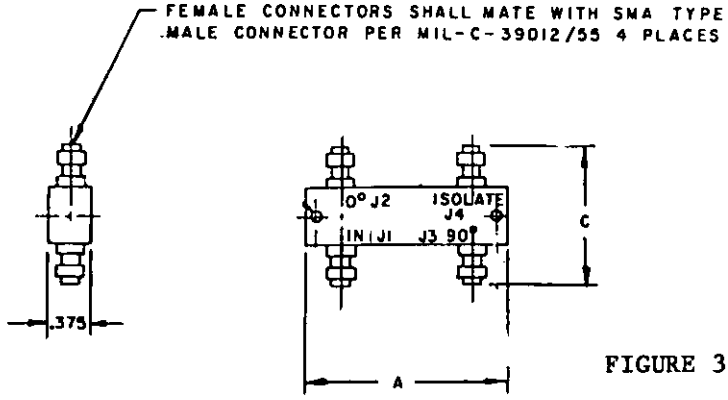


FIGURE 3

TABLE I. DIMENSIONS

PART NO. M23971/2-	A	C	F	FIGURE
01	4.000	3.500	.37	1
02	1.650	2.375	.50	
03	1.250	2.000		
04	1.250	2.000		
06	3.320	1.160	-	3
07	2.582		-	
08	1.718		-	
09	1.160		-	
11	1.108	1.285	-	
12	1.108	1.285	-	

TABLE II. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/2-	FREQUENCY RANGE GHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL AVG W	POWER LEVEL PK W	FIG
01	.25 - 1.0	3+.2 -0	1.3:1	.5	± 1.5	100	5K	1
02	1.0 - 2.0			.25				
03	2.0 - 4.0							
04	4.0 - 8.0		1.35:1	.35				
05	.02 - 200	3+.5 -0	1.3:1	1.3	± 5	1	-	2
06	.5 - 1.0	3+.2 -0	1.25:1	.25	± 1.5	50	250	3
07	1.0 - 2.0							
08	2.0 - 4.0				± 2.0			
09	4.0 - 8.0			.35				
10	7.0 - 11.0	3+.5 -0	1.45:1	.50		100	5K	4
11	8.0 - 12.4	3+.2 -0	1.30:1	.40	±3.0	50	250	3
12	12.4 - 18.0		1.35:1	.50	±5.0			3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER, 4 PORT QUADRATURE, PLUG-IN TERMINALS

MIL-P-23971/3

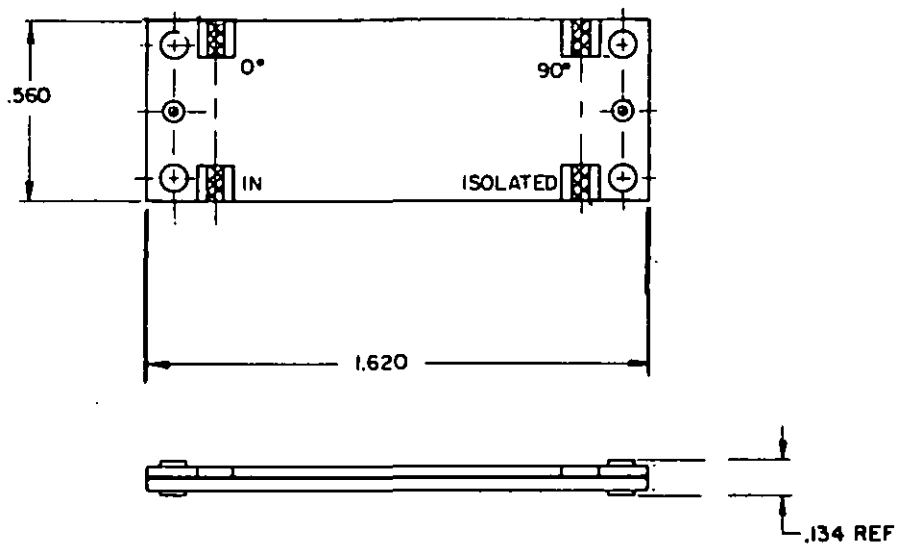


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/3-	FREQUENCY RANGE GHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL	
						AVG W	PK W
01	225 - 400	3+.5 -0	1.2:1	.25	± 1.5	100	200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER, 3 PORT QUADRATURE, SOLDER TERMINALS

MIL-P-23971/4

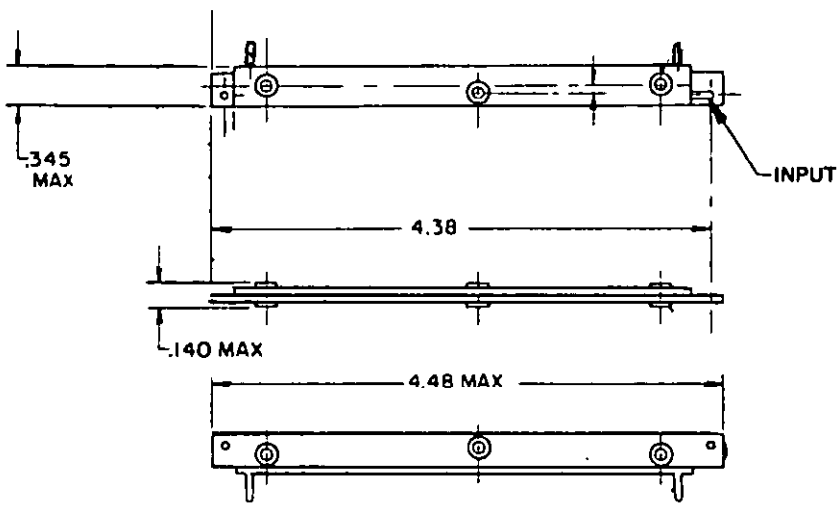


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/4-	FREQUENCY RANGE GHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL	
						AVG W	PK W
01	225 - 400	3+.2 -0	1.2:1	.25	± 1.5	100	200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDERS, N-WAY, 0 DEGREES, FLAT PACK

MIL-P-23971/5

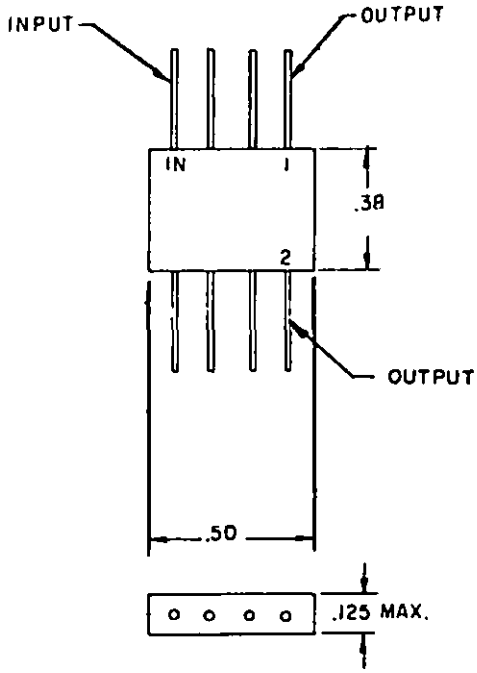


FIGURE 1

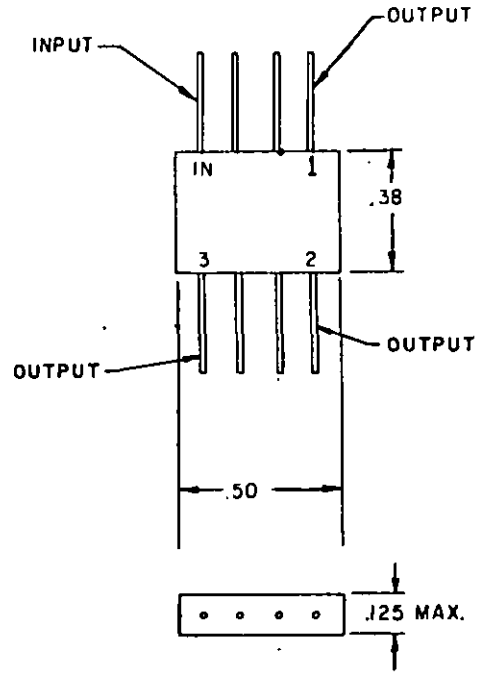


FIGURE 2

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/5-	FREQUENCY RANGE MHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL		FIG
						AVG W	PK W	
01	5 - 25	3+.2 -0	1.3:1	.3	± 1.0	.5	1.0	1
02	.2 - 200	4.8+.5 -0		.5	± 2.0	.5	.5	2
03	10 - 500	3+.2 -0			± 1.0	1	-	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, TO-5

MIL-P-23971/6

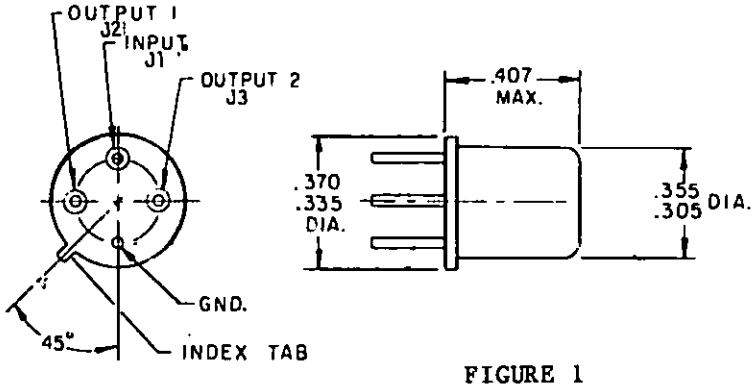


FIGURE 1

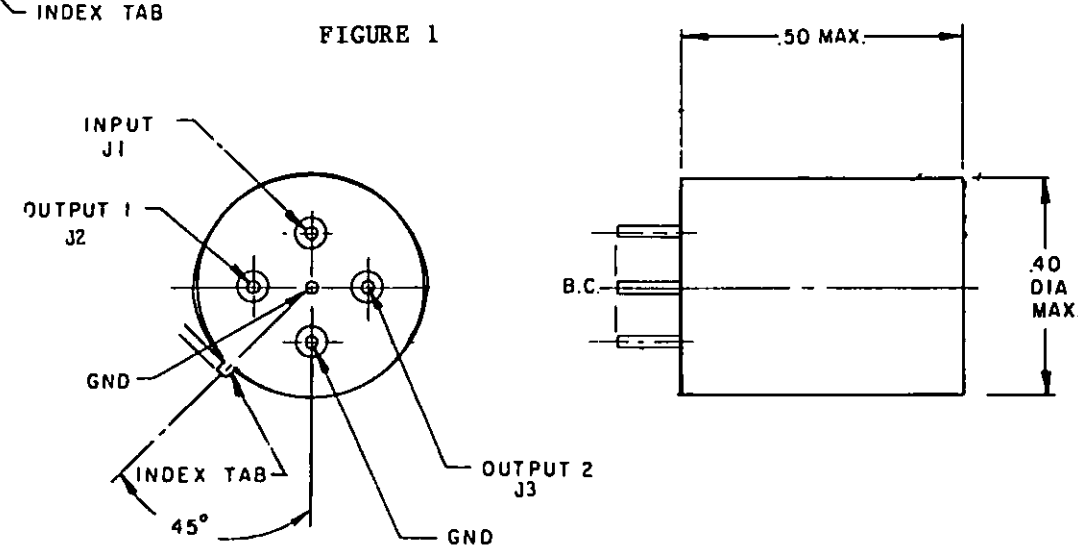


FIGURE 2

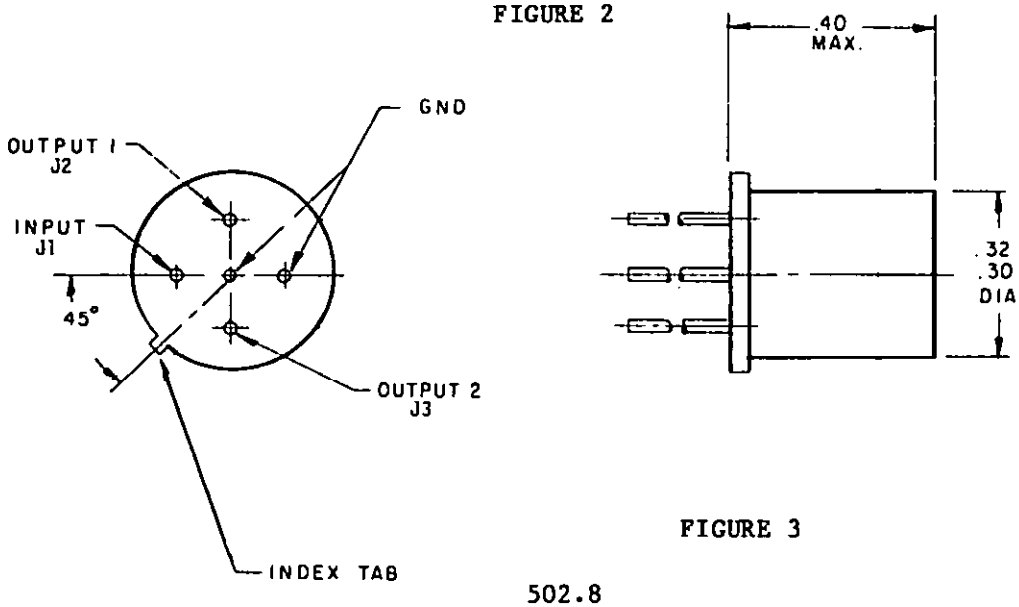


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, TO-5

MIL-P-23971/6

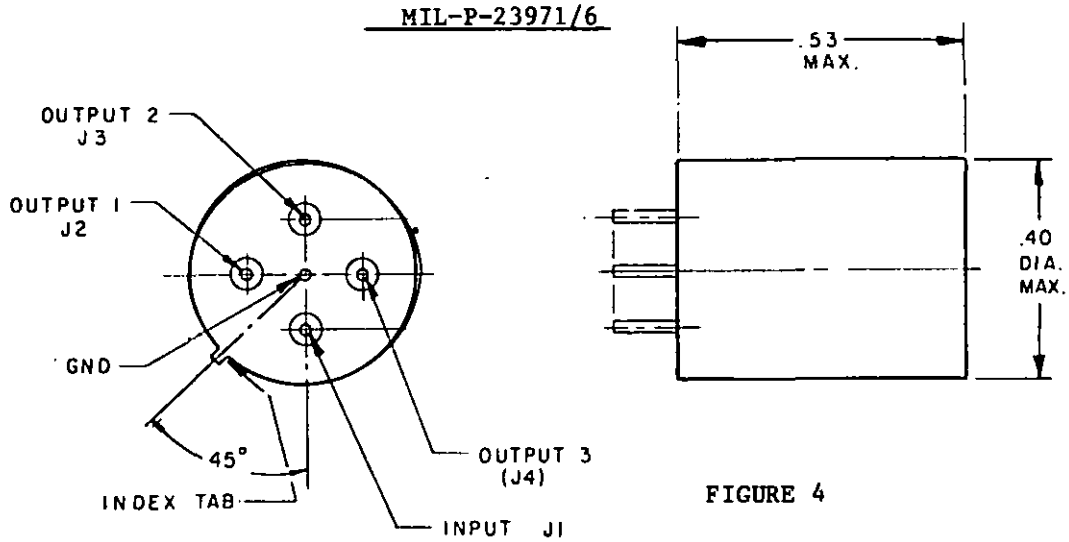


FIGURE 4

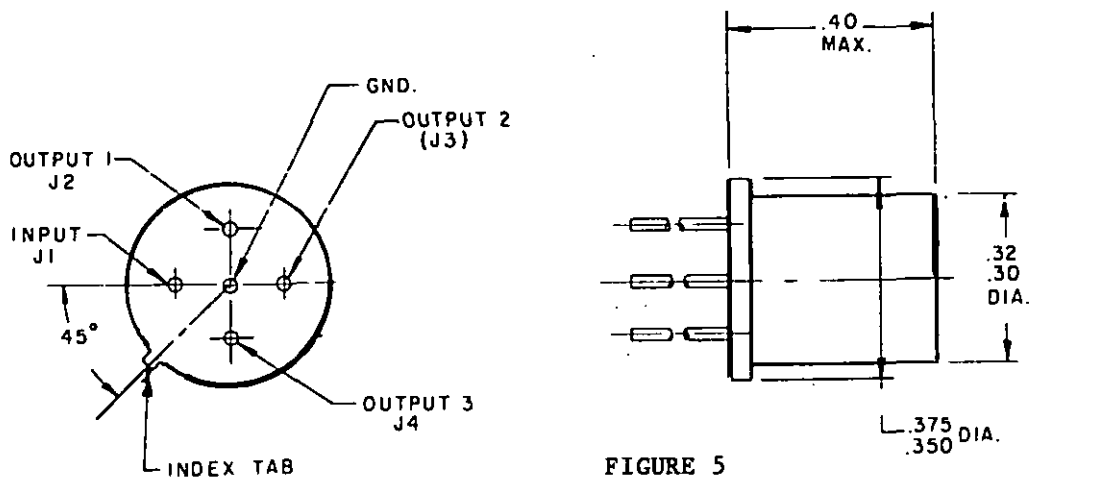


FIGURE 5

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/6-	FREQUENCY RANGE MHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL AVG W	POWER LEVEL PK W	FIG
01	1 - 100	3+.5 -0	1.3:1	.6	± 1.0	.50		1
02	2 - 32	3+.2 -0		.5		-	.1	3
03	2 - 100		1.2:1	.25		-	3.	2
04	10 - 100		1.3:1	.5		-	.1	3
05	20 - 200					-	.1	
06	100 - 300					-	.1	
07	200 - 400							
08	10 - 100	4.8+.3 -0				1.	-	4
09	10 - 200				± 2.0	-	3	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER, 4 PORT QUADRATURE, N CONNECTORS

MIL-P-23971/7

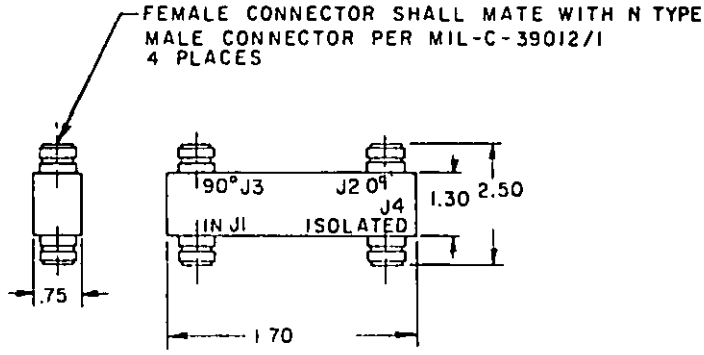



TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/7-	FREQUENCY RANGE GHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL	
						AVG W	PK W
01	7.0 - 12.4	3+.2 −0	1.35:1	1.0	± 1.5	100	3K


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDERS, QUADRATURE, FLAT PACK

MIL-P-23971/8

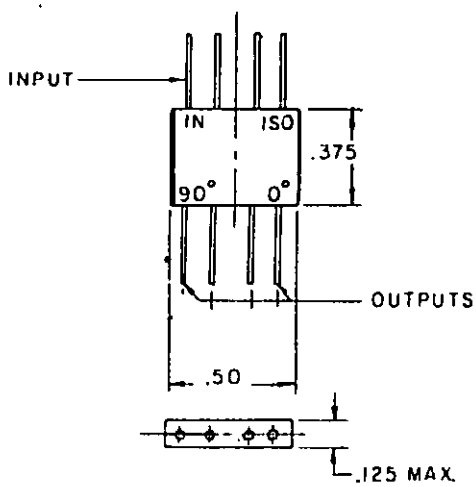

M23971/8-01

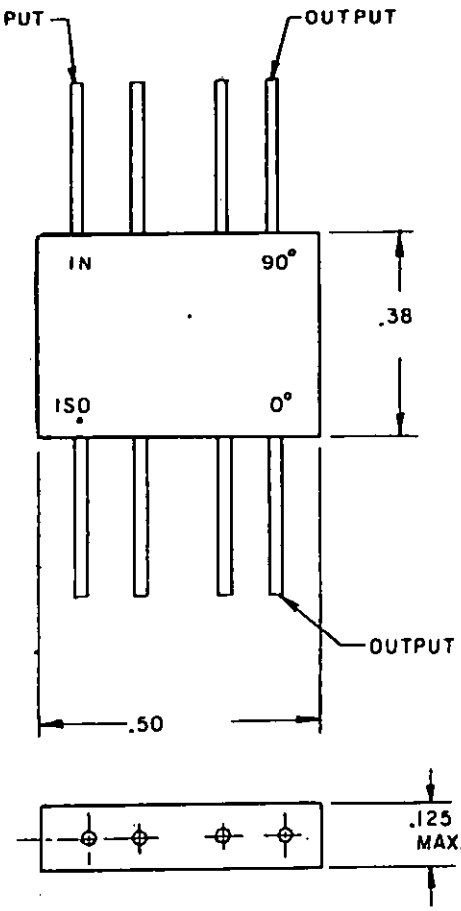

M23971/8-02

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/8-	FREQUENCY RANGE MHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL	
						AVG W	PK W
01	7 - 14	3+.2 -0	1.2:1	.5	± 2.0	5	
02	40 - 80				± 3.0	5	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER, N WAY, 0 DEGREES, SMA CONNECTORS

MIL-P-23971/9

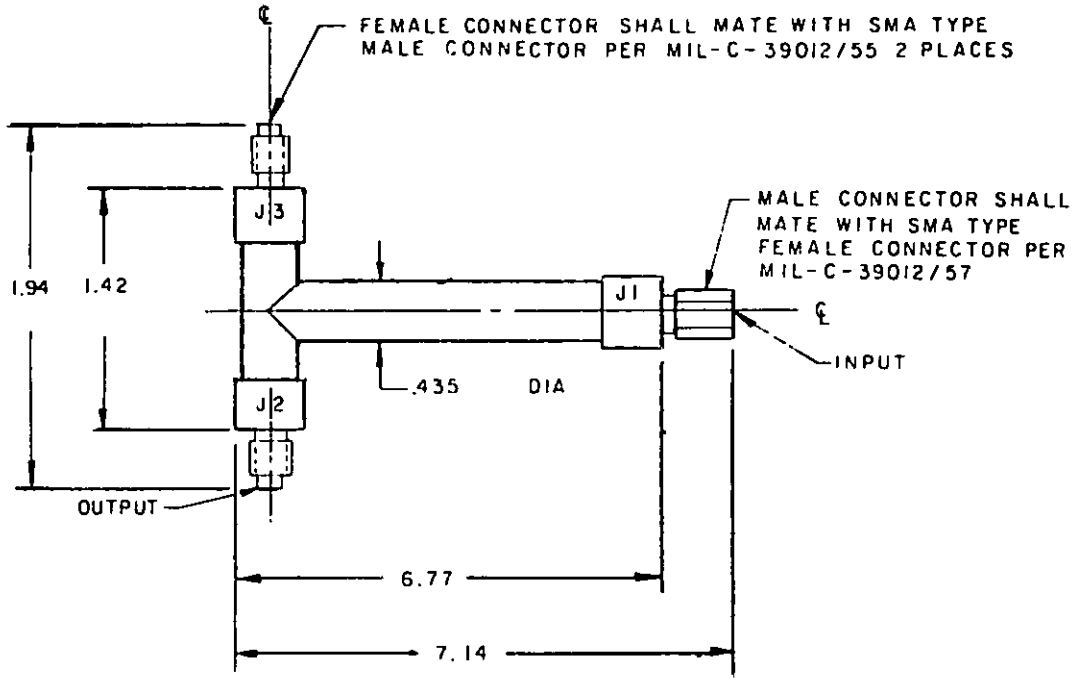



TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/9-	FREQUENCY RANGE GHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL	
						AVG W	PK W
01	.5 - 1.5	3+.25	1.15:1	.05	± 1.0	150	2K

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER/COMBINERS, QUADRATURE, RECTANGULAR, PC PINS

MIL-P-23971/10

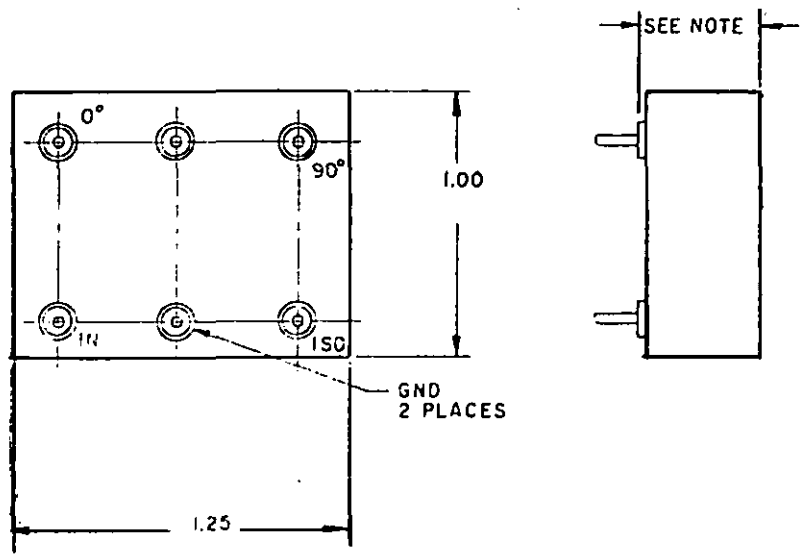

NOTE:
M23971/10-01: .465 MAX
M23971/10-02: .400 MAX

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/10-	FREQUENCY RANGE GHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL	
						AVG W	PK W
01 02	26 - 34	3+.2 -0	1.2:1	.3	± 1.0	1	

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDERS/COMBINERS, QUADRATURE, TO-5

MIL-P-23971/11

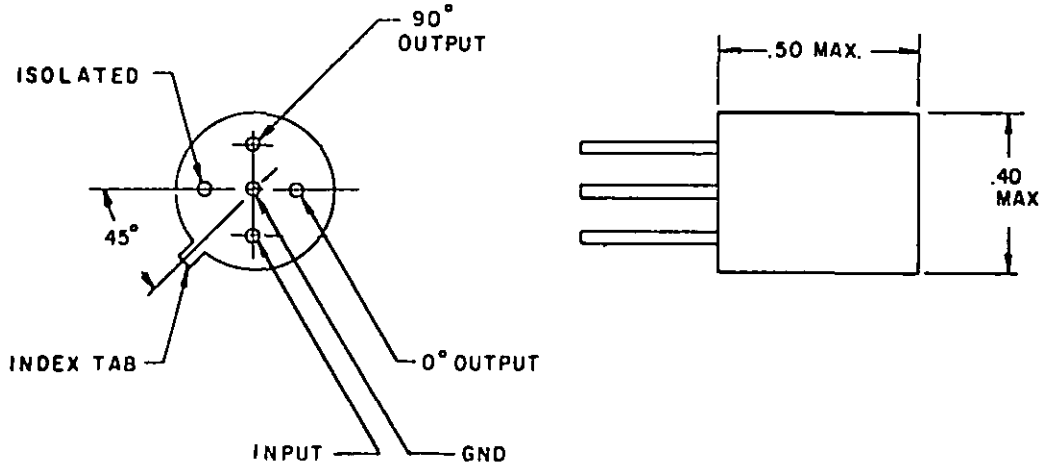


TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/11-	FREQUENCY RANGE MHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL	
						AVG W	PK W
01	29 - 31	3+.5 -0	1.2:1	.2	± 2.0	-	.25
02	91.2 - 100.8	3+ .2 -0			± 2.0	-	.25

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDERS/COMBINERS, QUADRATURE, STRIPLINE

MIL-P-23971/12

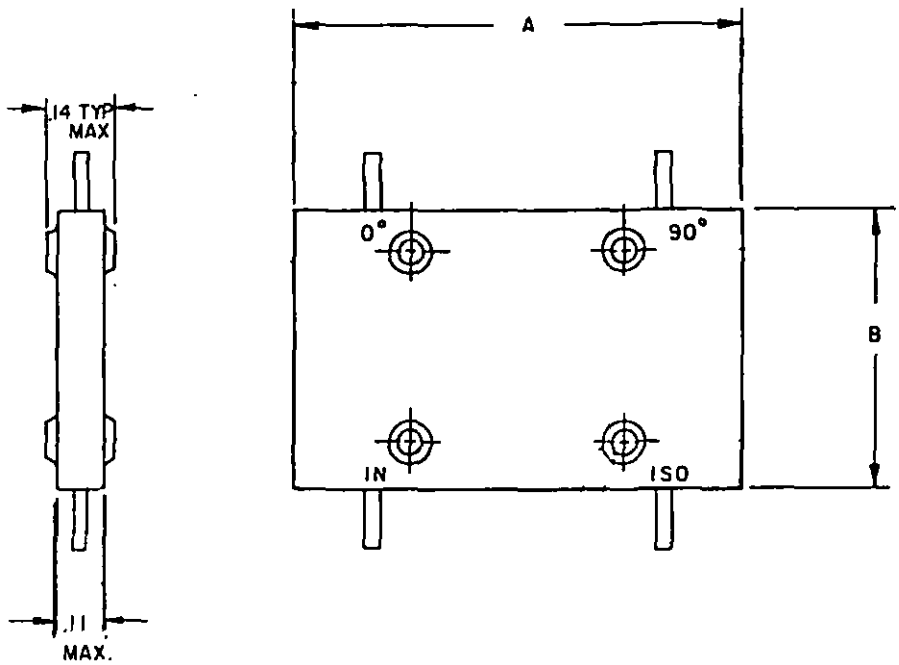


TABLE I. DIMENSIONS

PART NO.	A	B
01	1.83	2.02
02	1.00	.87

TABLE II. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/12-	FREQUENCY RANGE GHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL	
						AVG W	PK W
01	.1 - .16	3+.2 -0	1.2:1	.3	± 2.0	200	1K
02	.5 - 1.0			.25	± 1.5	200	1K

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER/COMBINERS, 2-WAY, 180 DEGREES, SMA CONNECTORS

MIL-P-23971/13

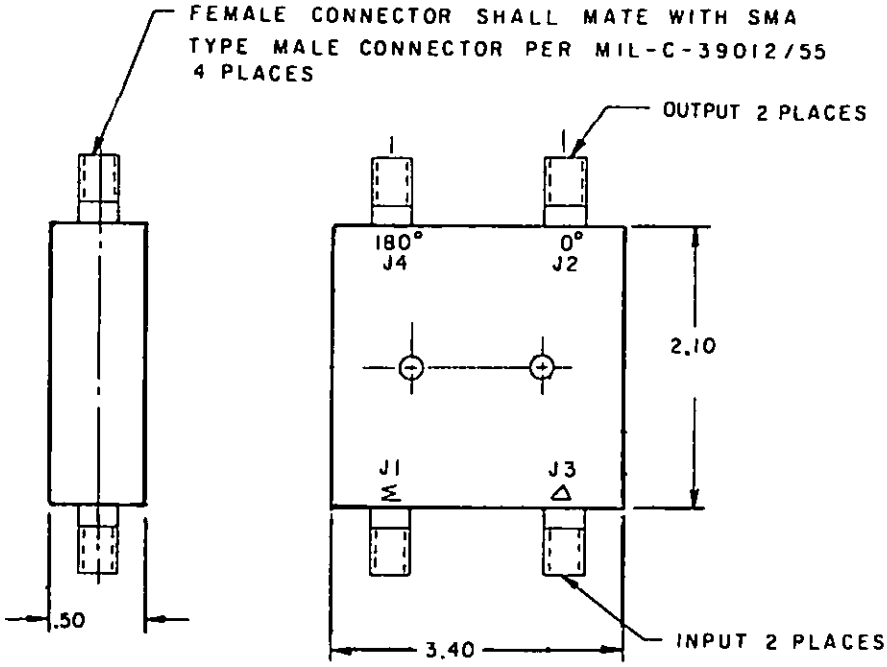


FIGURE 1

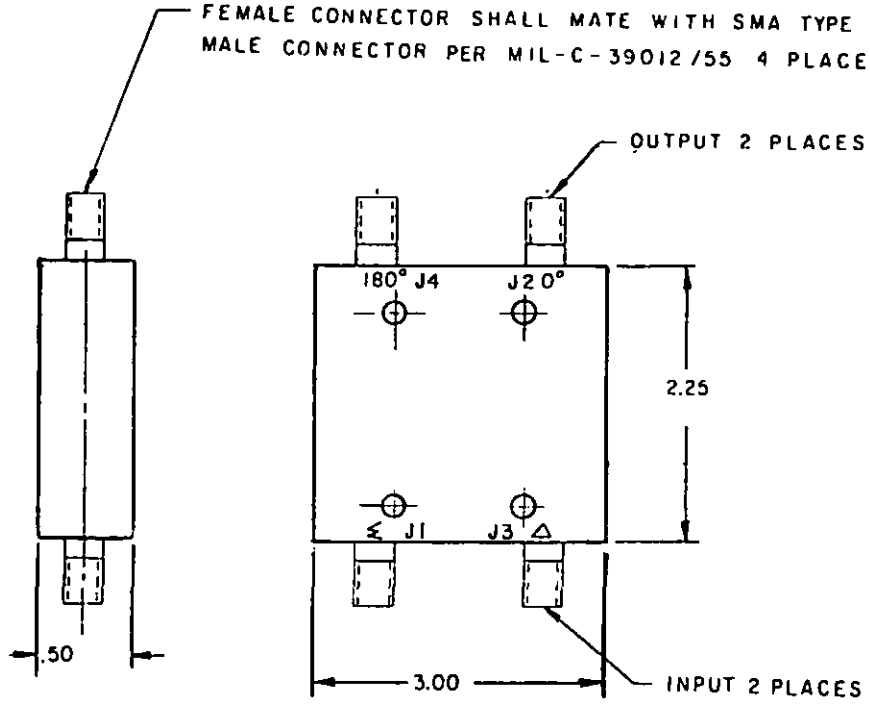


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDER/COMBINERS, 2-WAY, 180 DEGREES, SMA CONNECTORS

MIL-P-23971/13

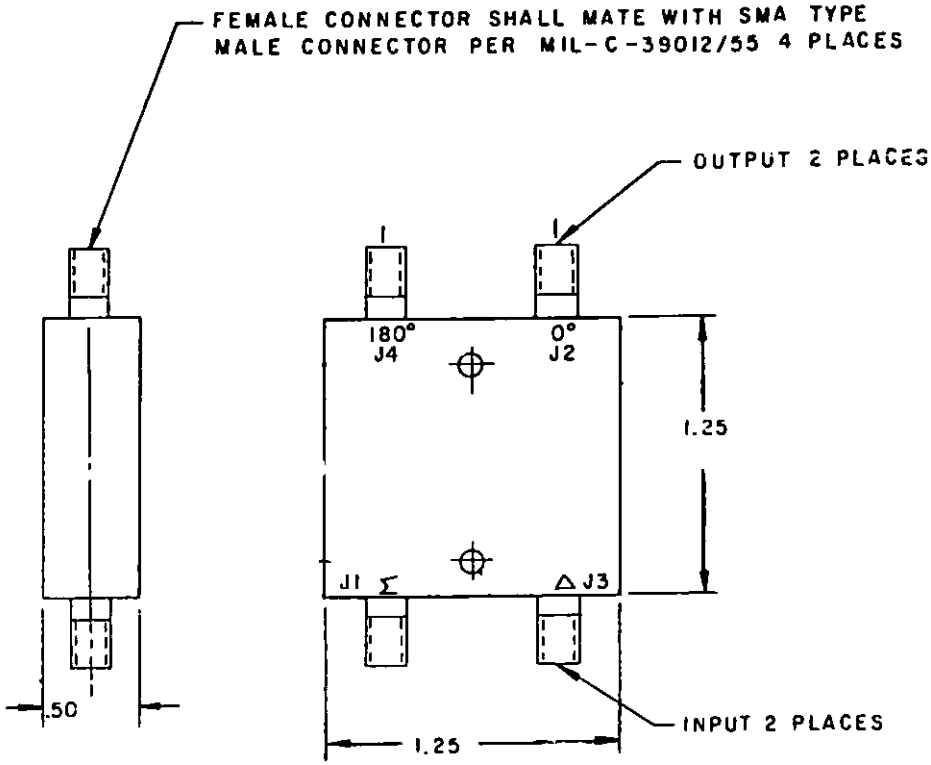


FIGURE 3

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/13-	FREQUENCY RANGE GHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL AVG W	POWER LEVEL PK W	FIG
01	1 - 2	3+.2 -0	1.35:1	.5	± 6.0	50	4K	1
02	2 - 4		1.5:1	.65				2
03	4 - 8		1.6:1	.6	± 8.0			3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, FLAT PACK
MIL-P-23971/14

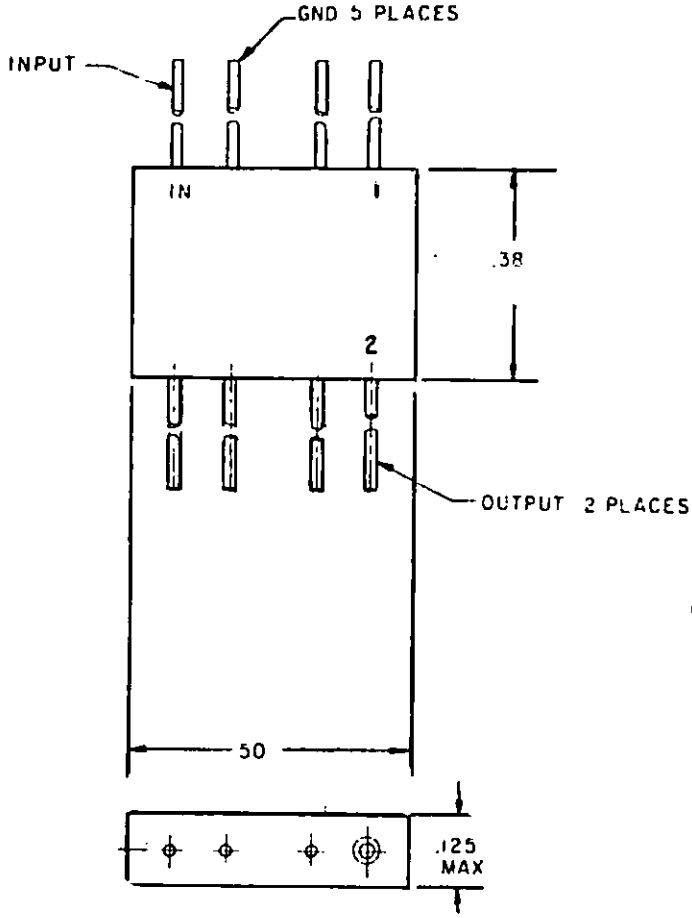


FIGURE 1

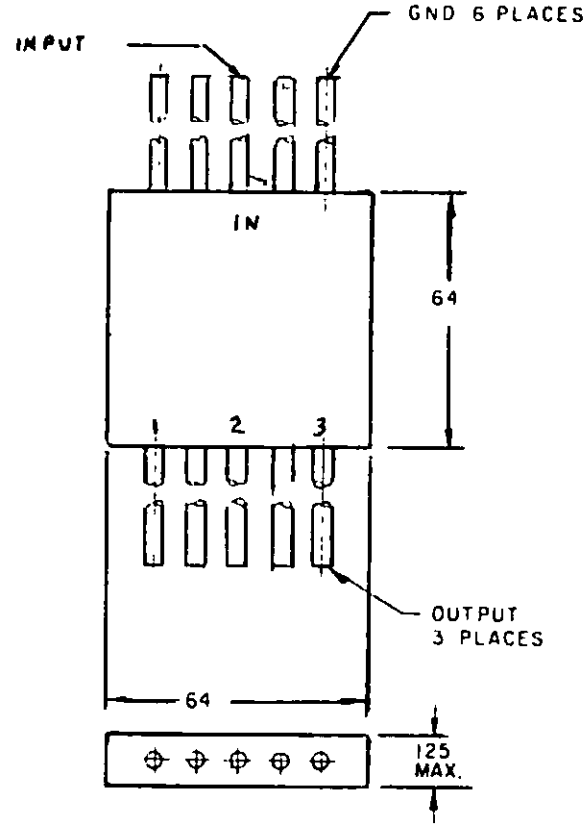


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, FLAT PACK
MIL-P-23971/14

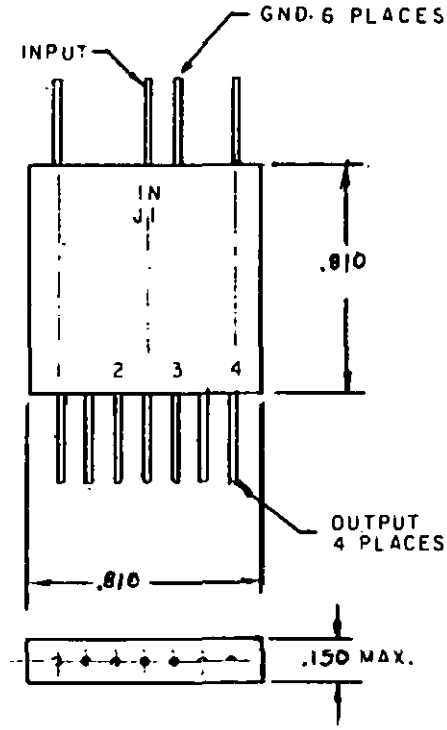


FIGURE 3

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/14-	FREQUENCY RANGE MHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL AVG W	POWER LEVEL PK W	FIG
01	5 - 100	3+.2 -0	1.3:1	.4	± 1.0	-	1.0	1
02	10 - 25	3+.6 -0		.6				
	25 - 500							
03	300 - 500	3+.2 -0		.5	± 2.0	-		
04	3 - 32	4.8+.3 -0	1.2:1	.6		-	.5	2
05	10 - 25	-	1.5:1	-	± 0.2	-	1.0	3
	25 - 500	-	1.35:1	-				
	10 - 400	6.+.75 -0	-	.75				
	400 - 500	6.+.86 -0	-	.85				

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, RECTANGULAR, PC PINS

MIL-P-23971/15

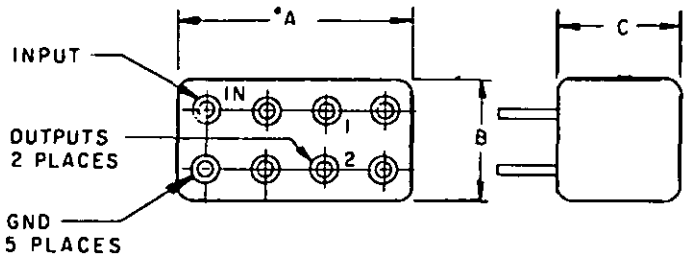


FIGURE 1

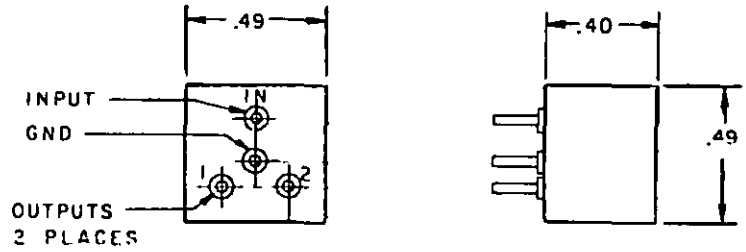


FIGURE 2

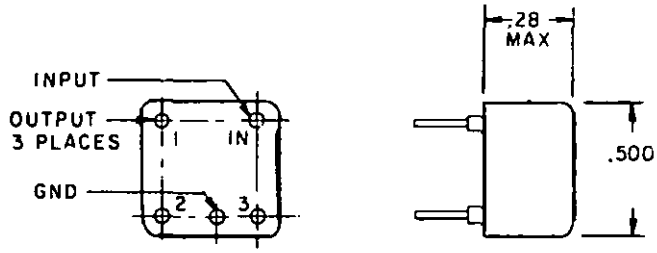


FIGURE 3

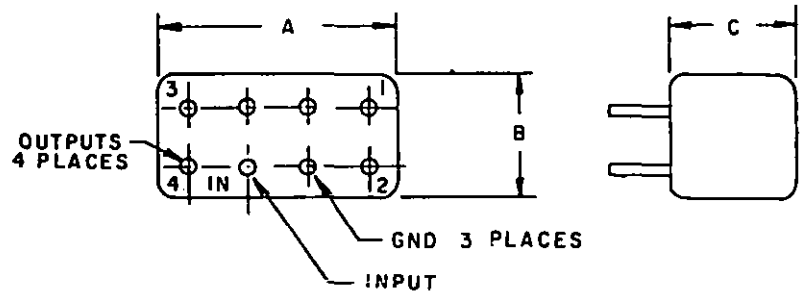


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDER/COMBINERS, N-WAY 0 DEGREES, RECTANGULAR, PC PINS

MIL-P-23971/15

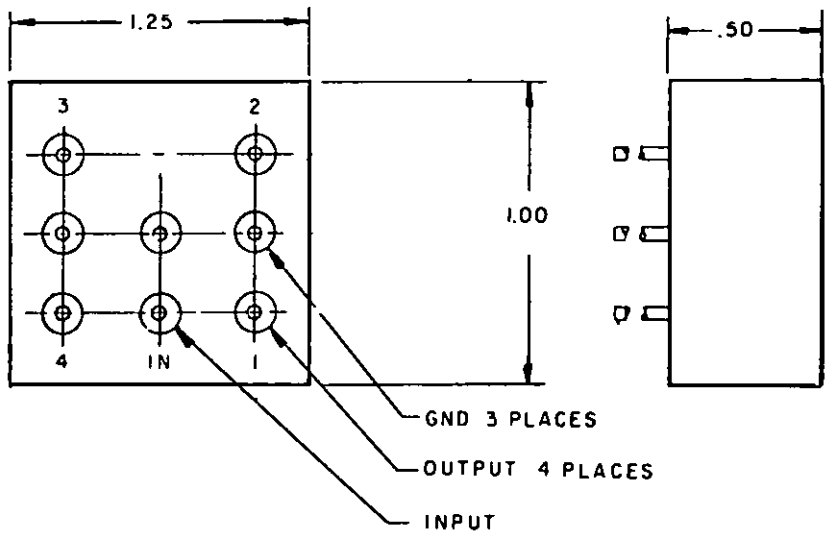


FIGURE 5

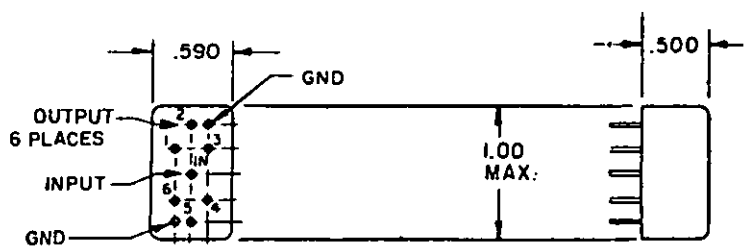


FIGURE 6

TABLE I. DIMENSIONS

PART NO. M23971/15-	A	B	C	FIGURE
01	.785	.385	.425	1
02	.490	.22	.405	
10	.800	.400	.40	4
11	.785	.385	.425	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, RECTANGULAR, PC PINS

MIL-P-23971/15

TABLE II. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/15-	FREQUENCY RANGE MHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL AVG W	POWER LEVEL PK W	FIG
01	0.1 - 0.4 0.4 - 2.0 2.0 - 40 40 - 400	-	1.2:1	-	-	-	1	1
	0.1 - 100	3.+.5 -0		.5	± 2.0			
	100 - 200	3.+.75 -0		.75	± 3.0			
	200 - 500	3.+1.0 -0		1.0	± 4.0			
02	.1 - 0.4	-		-	-			
	.4 - 2.0	-		-	-			
	2.0 - 250	-		-	-			
	250 - 450	-		-	-			
	0.1 - 100	3.+.5 -0		-	± 2.0			
	100 - 200	3.+.75 -0		-	± 3.0			
	200 - 450	3.+1.0 -0		-	± 4.0			
	2.0 - 100	-		.3	-			
	.1 - 250	-		.4	-			
	250 - 450	-		.6	-			
03	2.0 - 320	3.+.2 -0	1.3:1	.5	± 1.0	-		2
04	10 - 100					-	.5	
05	20 - 200							
06	50 - 1000			1.0	± 2.0	-	1	
07	100 - 300			.5	± 1.0			
08	200 - 400				± 1.0			
09	140 - 410	4.8+.3 -0		.75	± 3.0	-	3	3
10	.1 - 10	6.+.4 -0	1.2:1	.6	± 2.0	-	1	4
	10 - 100			.75				
	100 - 200			1.0				
11	.25 - 10	6.+.7 -0	1.1:1	.7				
	10.0 - 100	6.+.75 -0		.75				
	100 - 250	6.+1.2 -0		1.2				
12	10.0 - 100	6.+.4 -0	1.3:1	.7	± 1.0	-	2	5
13	235 - 275	7.78+.6 -0	1.15:1	1.0	± 2.0	-	5	6

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, SMA CONNECTORS

MIL-P-23971/16


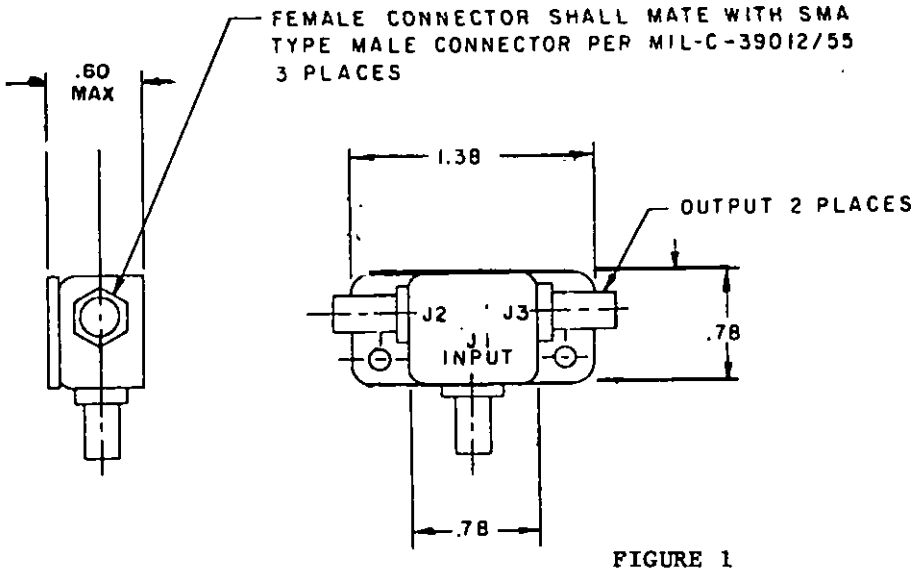


FIGURE 1

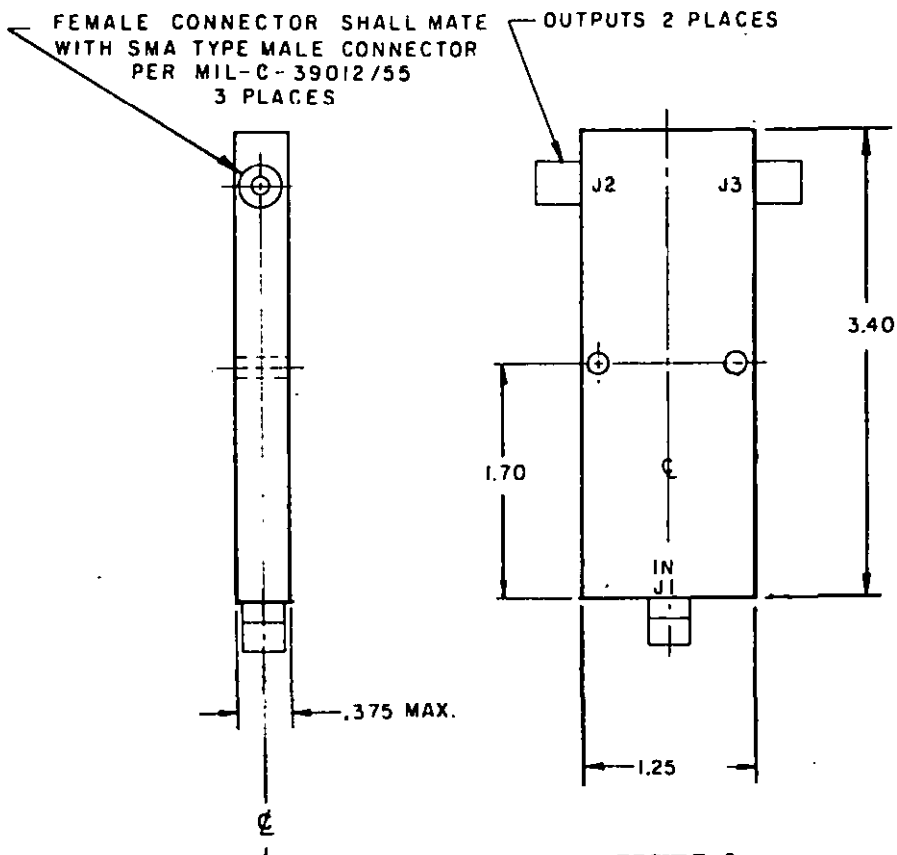

502.23

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, SMA CONNECTORS

MIL-P-23971/16

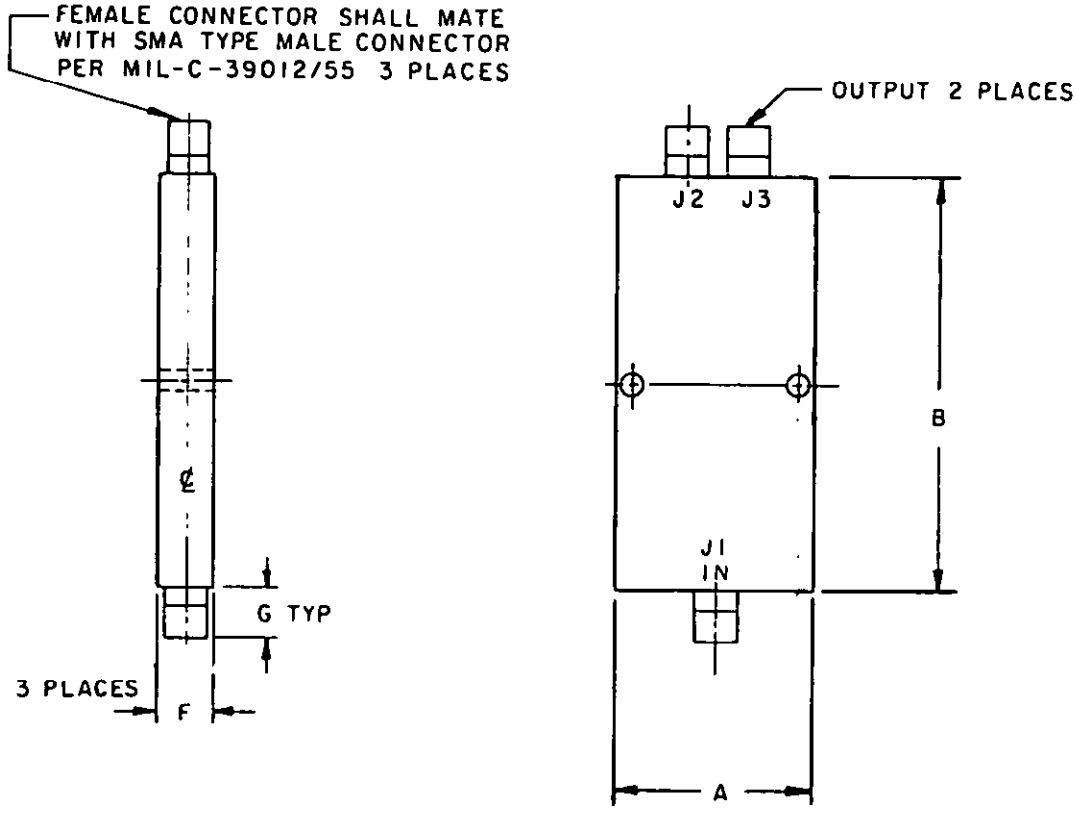


FIGURE 3

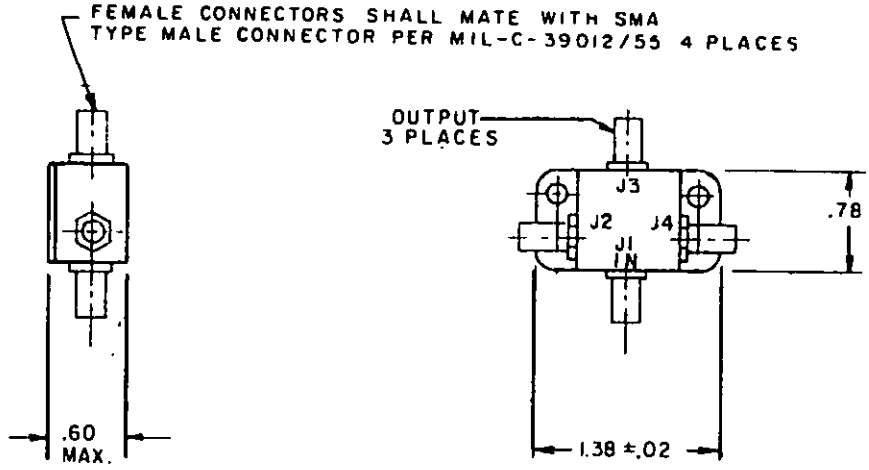


FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, SMA CONNECTORS

MIL-P-23971/16

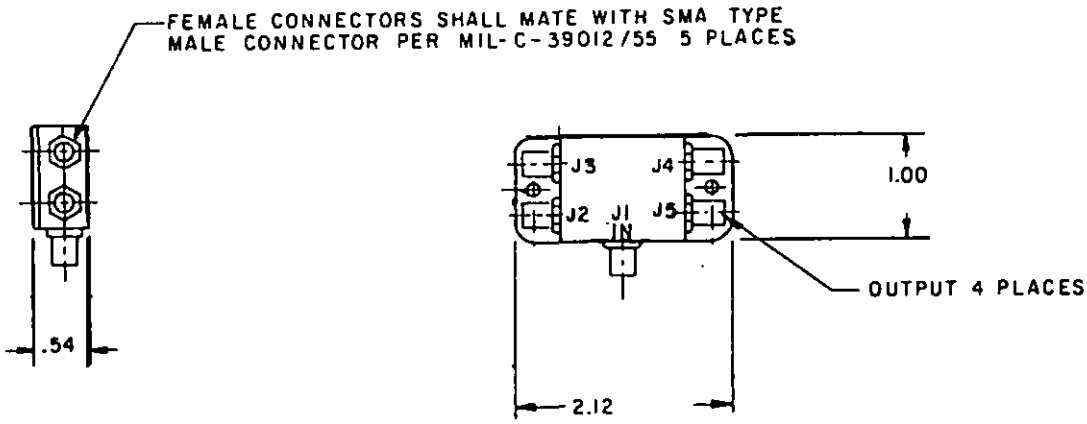


FIGURE 5

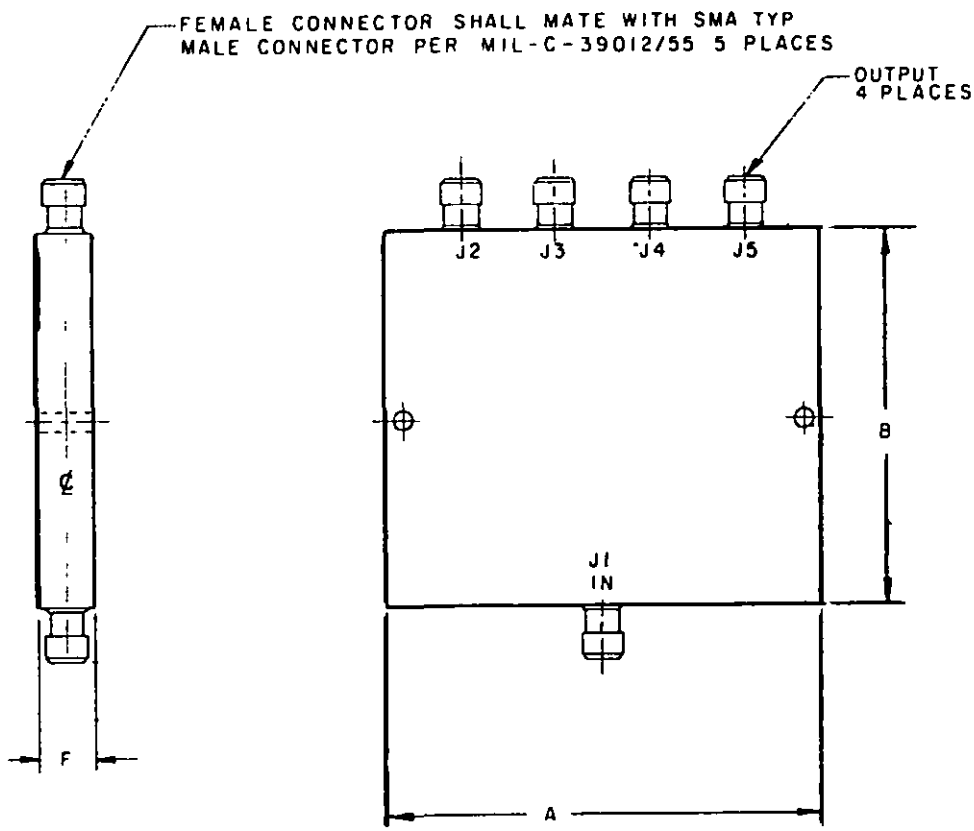


FIGURE 6

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDER/COMBINERS, N-WAY 0 DEGREES, SMA CONNECTORS

MIL-P-23971/16

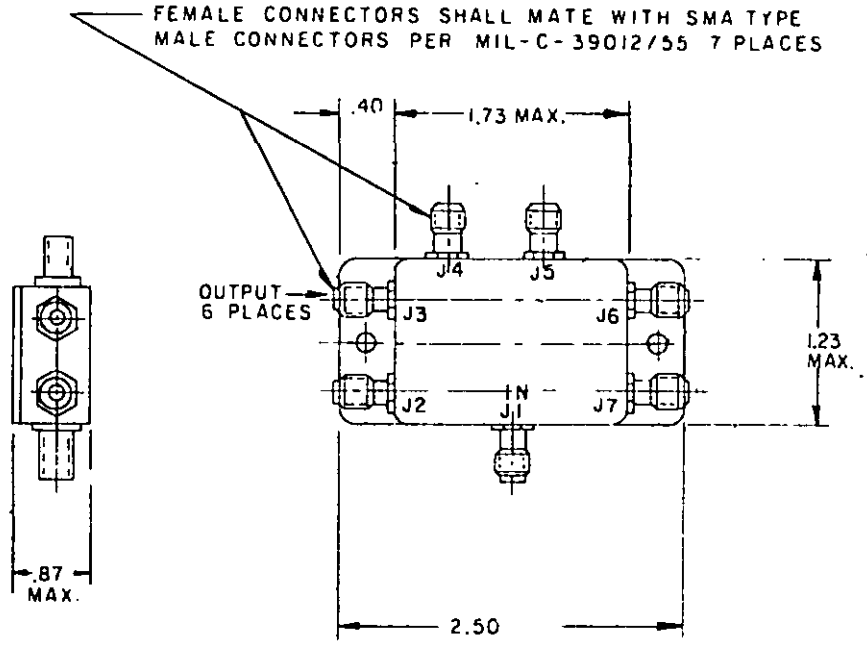


FIGURE 7

TABLE I. DIMENSIONS

PART NO. M23971/16-	A	B	F	G	FIGURE
03, 04	1.45	3.00	.37	.35	3
12	3.20	2.85			6
13					
14	2.80	2.40	.36		

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, SMA CONNECTORS

MIL-P-23971/16

TABLE II. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/16-	FREQUENCY RANGE GHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90	POWER LEVEL AVG W	POWER LEVEL PK W	FIG
01	1.0 - 100	3.01+.5 -0	1.3:1	.5	± 1.0	-	2	1
02	1.0 - 2.0	3.+.2 -0	1.25:1	.3	± 6.0	-	.1	2
03	1.0 - 2.0			.3	± 6.0	-		3
04	1.0 - 4.0 4.8 - 8.0 8.0 - 12.0 12.0 - 12.4		1.7:1 1.6:1	.4 .8 1.20 1.30	± 4.0 ± 5.0	1	275	
05	10 - 100	4.77+.5 -0	1.3:1	.5	± 1.0	-	5	4
06	2 - 32	6.+.5 -0		.7		-	2	5
07	10 - 100 MHz	6.02+.7 -0						
08	20 - 200 MHz	6.+.5 -0						
09	100 - 300 MHz	6.+.5 -0		1.0		-	2	
10	200 - 500 MHz	6.+.5 -0		1.0		-	2	
11	200 - 500 MHz			1.0				
12	1 - 2		1.35:1	.6	± 6.0	-	.1	6
13	1 - 2	6.+.9 -0				.316		
14	2 - 4	6.+.5 -0			± 3.0	.1	-	
15	10 - 100 MHz	7.8+.7 -0	1.3:1	1.0	± 2.0	2	-	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, TNC CONNECTORS

MIL-P-23971/17

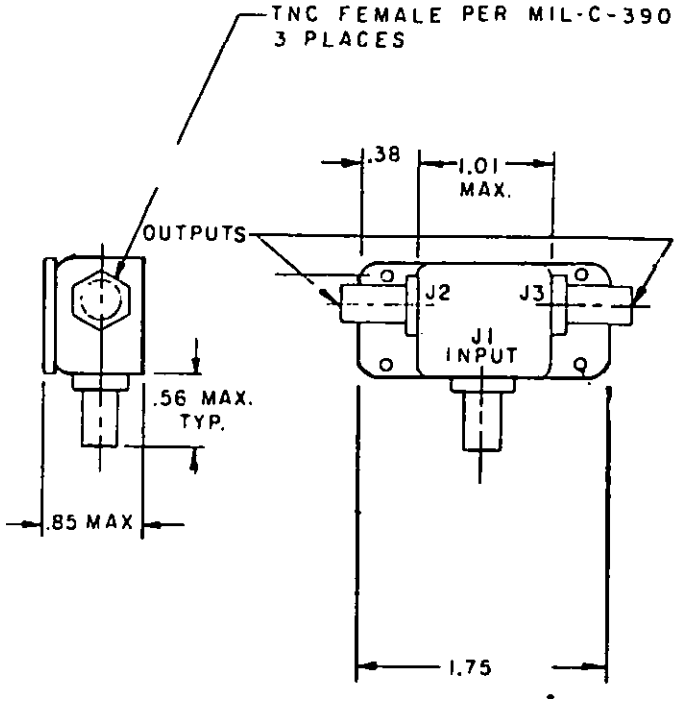


FIGURE 1

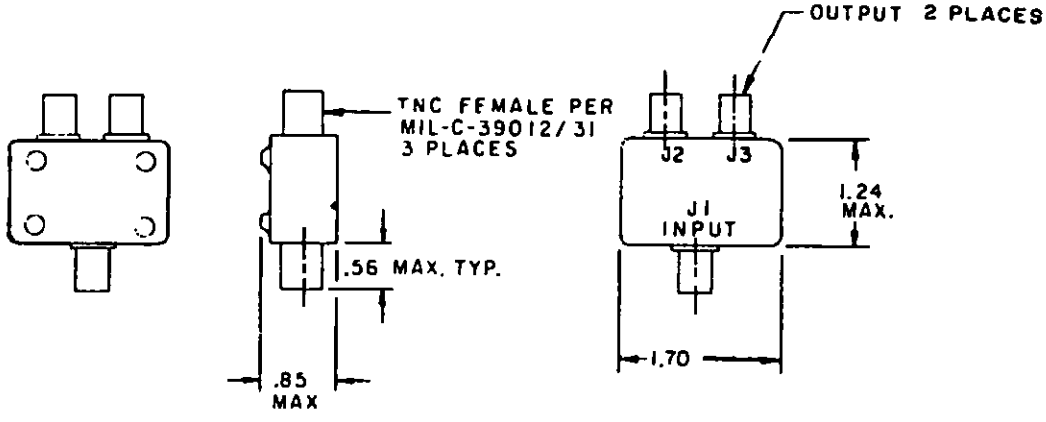


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

POWER DIVIDER/COMBINERS, N-WAY, 0 DEGREES, TNC CONNECTORS

MIL-P-23971/17

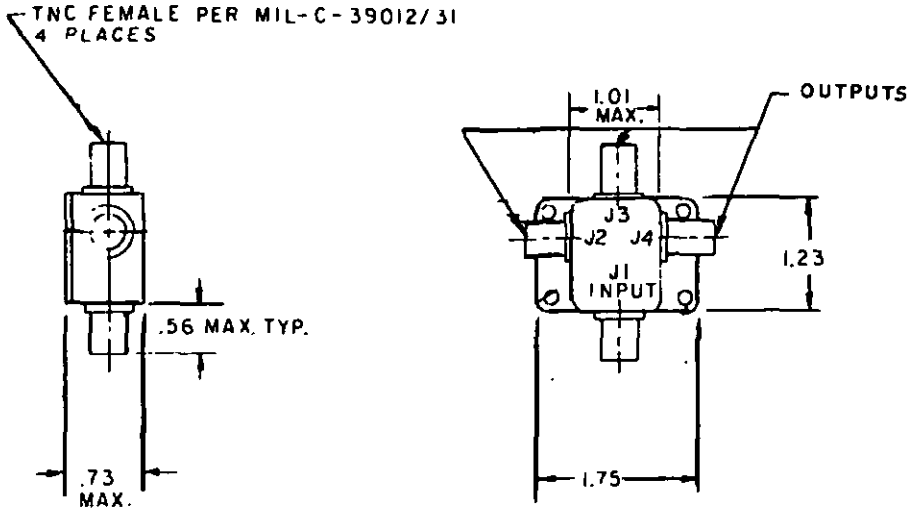


FIGURE 3

TABLE I. PHYSICAL AND ELECTRICAL REQUIREMENTS.

PART NO. M23971/17-	FREQUENCY RANGE MHz	AVERAGE COUPLING dB	VSWR MAX PRI	INSERTION LOSS MAX (dB)	PHASE BALANCE 90°	POWER LEVEL AVG W	POWER LEVEL PK W	FIG
01	.05 - 20	3+.2 -0	1.3:1	.5	± 1.0	-	2	1
02	1 - 100					-	5	2
03	200 - 400	4.8+.3 -0		.75	± 2.0			3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCH, COAXIAL, RADIO FREQUENCY TRANSMISSION LINE

MIL-S-3928

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR COAXIAL SWITCHES, EITHER MANUALLY OR REMOTELY CONTROLLED, FOR USE WITH COAXIAL CABLE AT RADIO FREQUENCIES. THESE ARE INTENDED FOR USE WITH RF COAXIAL TRANSMISSION LINE SYSTEMS. USES INCLUDE ANTENNA SWITCHING, RECEIVER OR COMPONENT PROTECTION, LOAD DIVIDER CIRCUITS, AND THE CONTROL OF DISPLAY SIGNALS.

MIL-S-3928/09

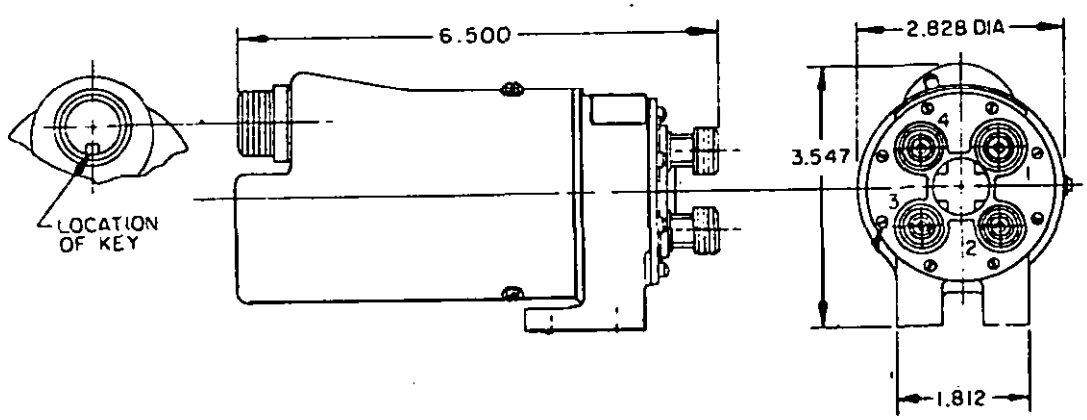


FIGURE 1: M3928/9-01, 02, 09

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (MANUALLY AND MOTOR OPERATED)
CLASS 1 (TYPE N CONNECTORS)

MIL-S-3928/9

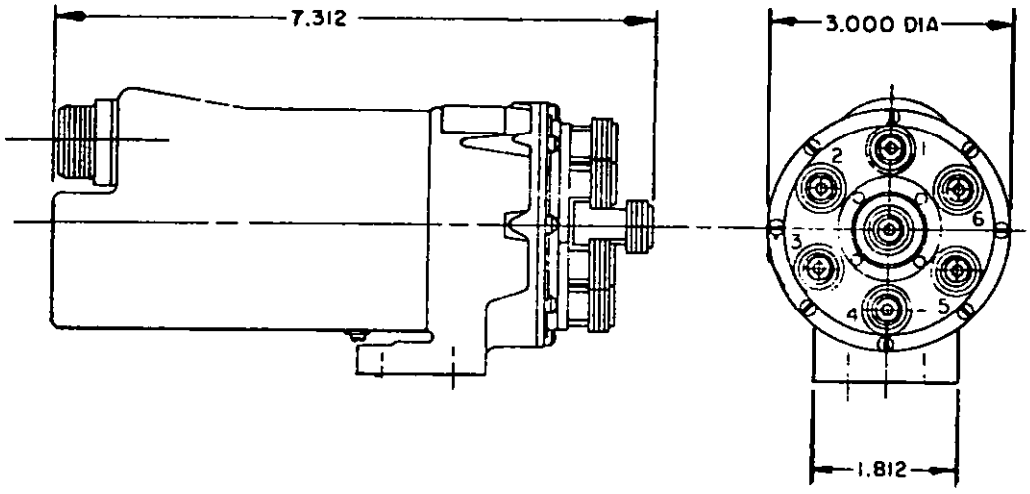


FIGURE 2: M3928/9-03,11 AND 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (MANUALLY AND MOTOR OPERATED)
CLASS 1 (TYPE N CONNECTORS)

MIL-S-3928/9

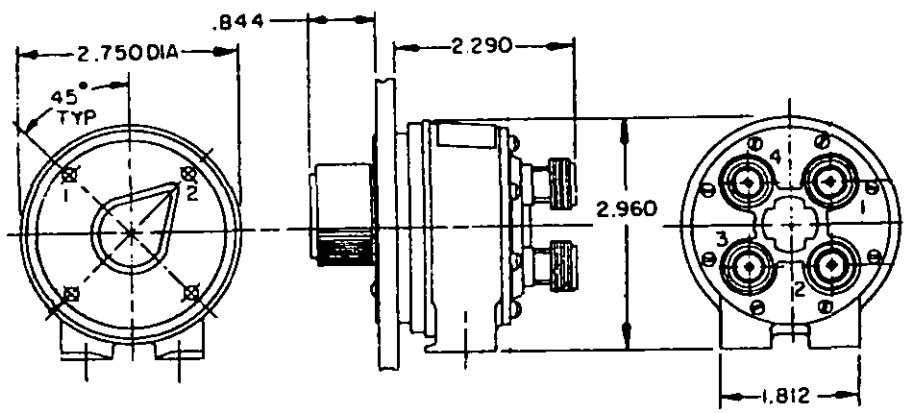


FIGURE 3: M3928/9-05 AND 13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (MANUALLY AND MOTOR OPERATED)
CLASS 1 (TYPE N CONNECTORS)

MIL-S-3928/9

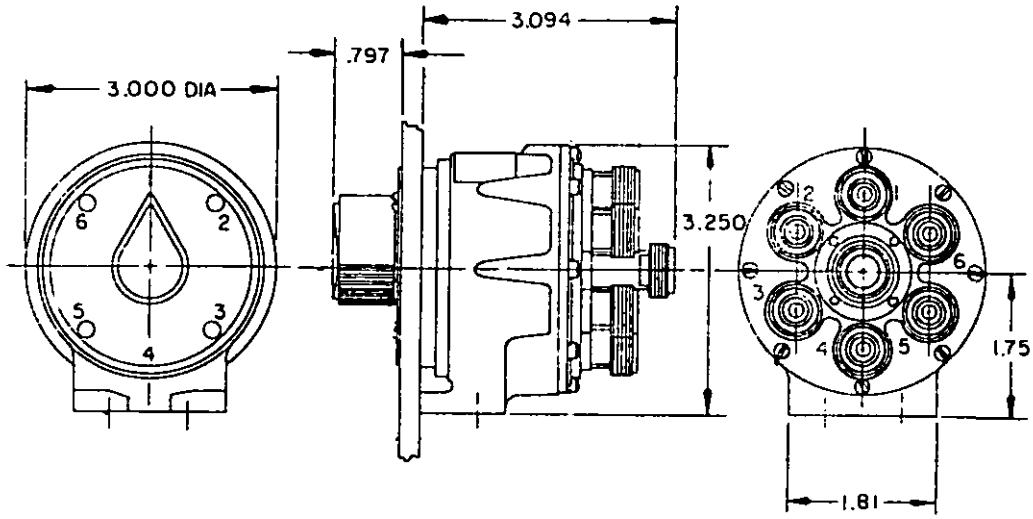


FIGURE 4: M3928/9-04, 14 AND 15


NOTE: FOR PART NO. M3928/9-04, THE CENTER CONNECTOR SHALL BE DELETED.

FREQUENCY RANGE:	10 (DC TO GHz)
VSWR:	1.3 MAX
INSERTION LOSS:	0.31 dB MAX
NOMINAL OPERATING VOLTAGE:	
DASH NO. 01, 02, 03, 09, 11	28 DC
DASH NO. 04, 05, 13, 14, 15	---
OPERATING CURRENT:	
DASH NO. 01, 02, 03, 11	3.0 AMPS MAX
DASH NO. 09	2.0 AMPS MAX
DASH NO. 04, 05, 13, 14, 15	---
SWITCH TIME:	
DASH NO. 01, 02, 09, 11	300 ms
DASH NO. 03	600 ms
DASH NO. 04, 05, 13, 14, 15	---
NOMINAL IMPEDANCE:	50 OHMS
OPERATING TEMPERATURE:	-55°C TO +85°C
RF POWER HANDLING CAPABILITY:	100 WATTS MIN (AVG)
PART NUMBERS:	M3928/9-01,02,03,04,05,09,11,13,14,15

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (ELECTRICALLY OPERATED)
CLASS 5 (TYPE 1P2T CONNECTORS)

MIL-S-3928/15

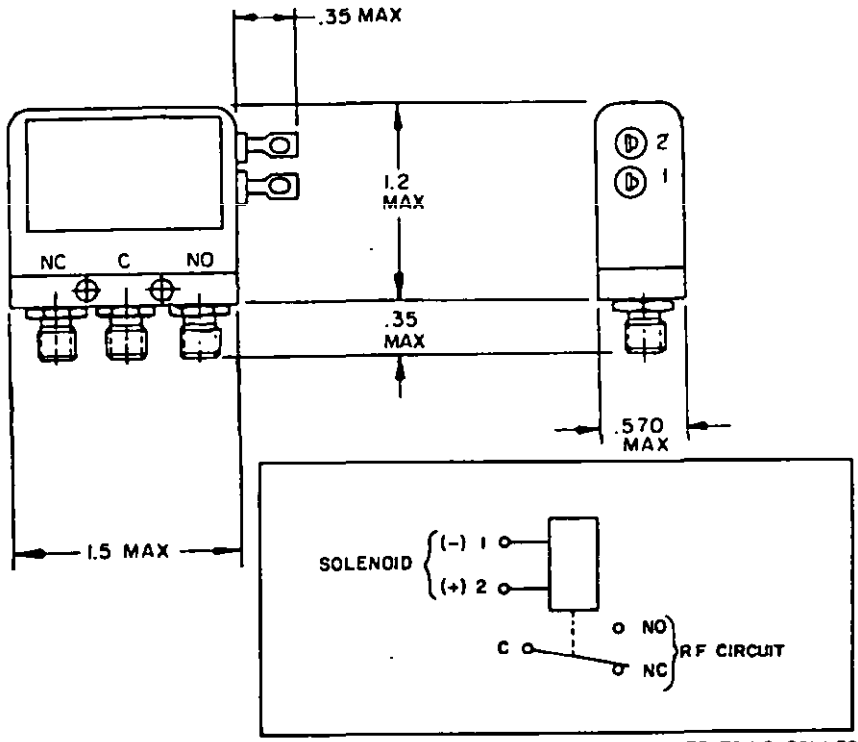

POSITION 1 (DEENERGIZED OR FAILSAFE POSITION.) C CONNECTS TO NC CONNECTOR. NO IS OPEN CIRCUIT.
POSITION 2 (ENERGIZED POSITION.) C CONNECTS TO NO CONNECTOR. NC IS OPEN CIRCUIT.


SCHEMATIC (SHOWN IN POSITION 1)

FIGURE 1: M3928/15-01


Source: https://assist.dla.mil -- Downloaded: 20261O-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (ELECTRICALLY OPERATED)
CLASS 5 (TYPE 1P2T CONNECTORS)


MIL-S-3928/15




M3928/15-03



M3928/15-04

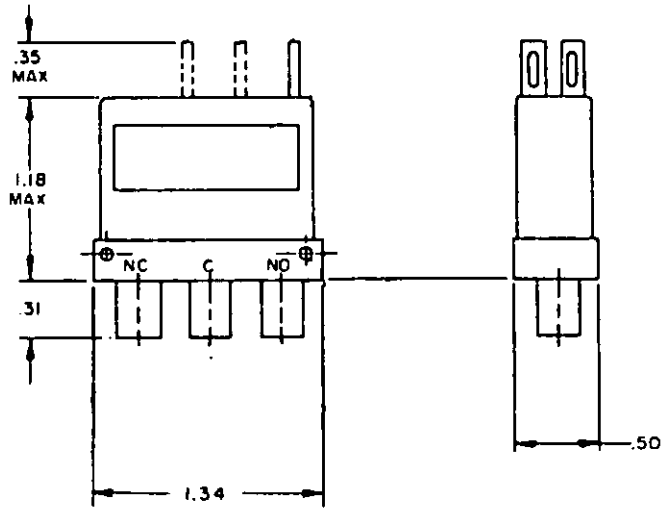

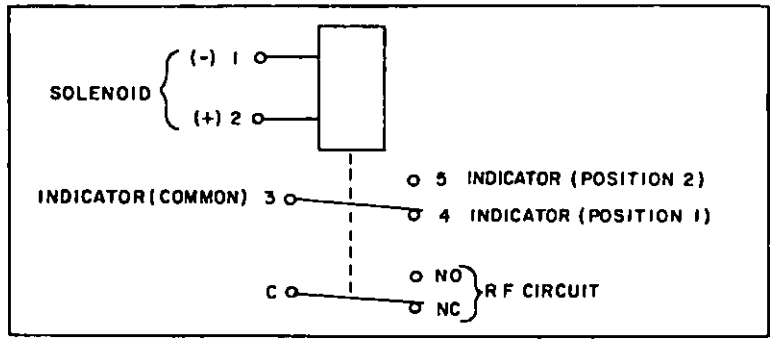

PART NO. M3928/15-03 DOES NOT HAVE INDICATOR CIRCUIT PROVISIONS AND THEREFORE DOES NOT HAVE TERMINALS 3, 4 AND 5.

POSITION 1. (DEENERGIZED OR FAILSAFE POSITION.) C CONNECTS TO NC CONNECTOR. NO IS OPEN CIRCUIT.
POSITION 2. (ENERGIZED POSITION.) C CONNECTS TO NO CONNECTOR. NC IS OPEN CIRCUIT.


SCHEMATIC (SHOWN IN POSITION 1)


FIGURE 2: M3928/15-03 AND 04

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (ELECTRICALLY OPERATED)
CLASS 5 (TYPE 1P2T CONNECTORS)

MIL-S-3928/15



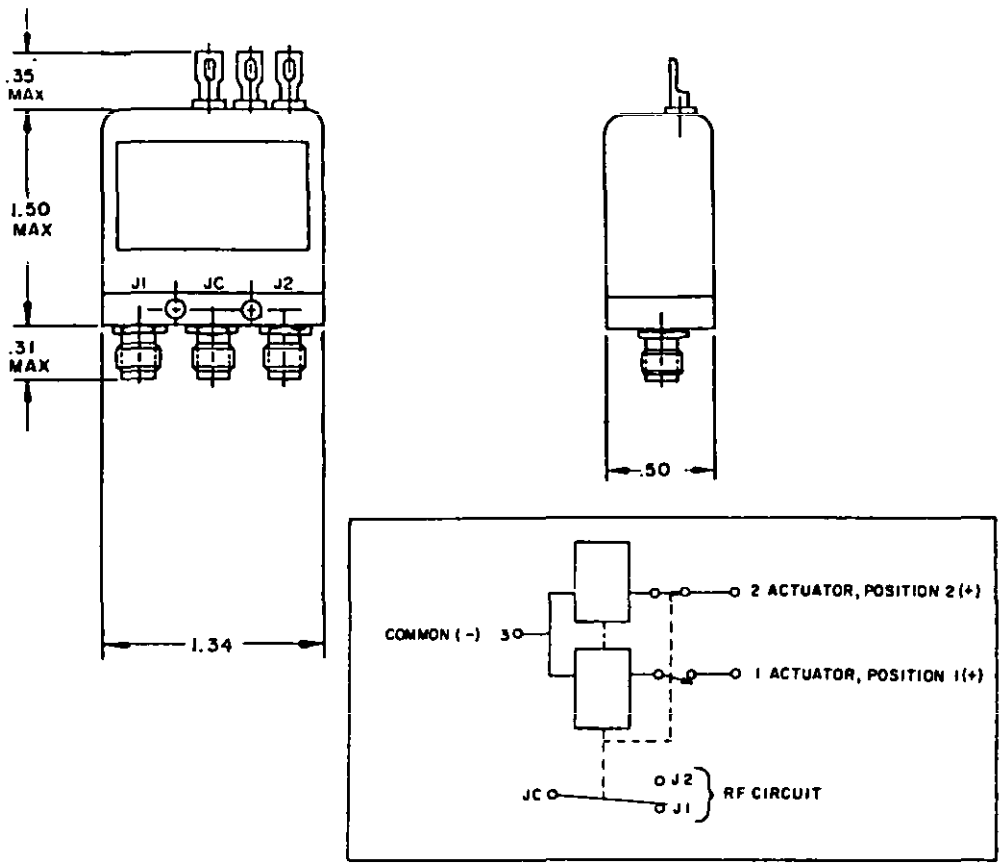


POSITION 1. ENERGIZE TERMINAL 1. JC CONNECTS TO J1, J2 IS OPEN CIRCUIT.
POSITION 2. ENERGIZE TERMINAL 2. JC CONNECTS TO J2, J1 IS OPEN CIRCUIT.
SCHEMATIC (SHOWN IN POSITION 1)


FIGURE 3: M3928/15-07


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (ELECTRICALLY OPERATED)
CLASS 5 (TYPE 1P2T CONNECTORS)

MIL-S-3928/15



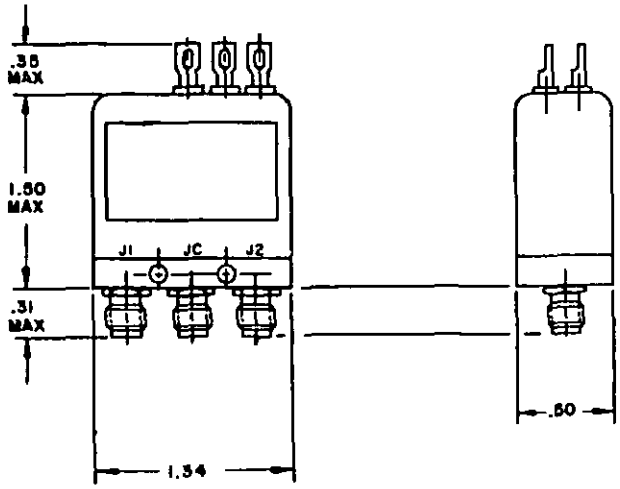

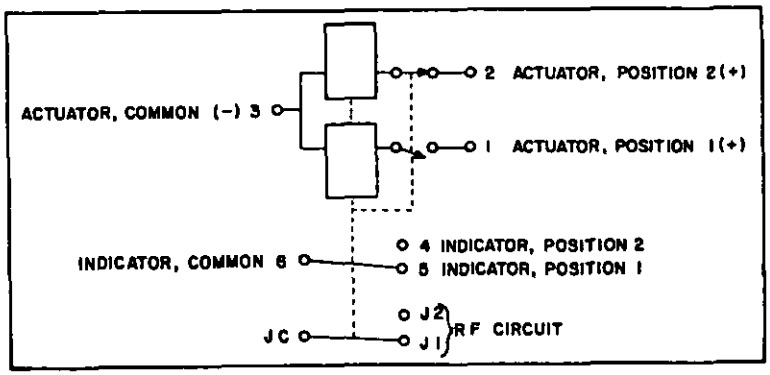

POSITION 1. ENERGIZE TERMINAL 1. JC CONNECTS TO J1, J2 IS OPEN CIRCUIT.
POSITION 2. ENERGIZE TERMINAL 2. JC CONNECTS TO J2, J1 IS OPEN CIRCUIT.
SCHEMATIC (SHOWN IN POSITION 1)

FIGURE 4: M3928/15-08

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (ELECTRICALLY OPERATED)
CLASS 5 (TYPE 1P2T CONNECTORS)


MIL-S-3928/15


FREQUENCY RANGE:	18 (DC TO GHz)
VSWR:	1.5:1 MAX
INSERTION LOSS:	0.5 dB MAX
NOMINAL OPERATING VOLTAGE:	28 VDC
OPERATING CURRENT:	
DASH NO. 01, 03, 04	0.12 AMPS MAX
DASH NO. 07, 08	0.35 AMPS MAX
SWITCH TIME:	
DASH NO. 01, 07, 08	20 ms
DASH NO. 03, 04	15 ms
NOMINAL IMPEDANCE:	50 OHMS
OPERATING TEMPERATURE:	-55°C TO +85°C
DASH NO. 03	-55°C TO +110°C
RF POWER HANDLING CAPABILITY:	25 WATTS MIN (AVG)
RF CONNECTORS:	FEMALE CONNECTORS (3 PLACES) SHALL MEET REQUIREMENTS
OF MIL-C-39012 AND SHALL MATE	WITH SMA TYPE MALE CONNECTORS PER MIL-C-39012/55.
PART NUMBERS:	M3928/15-01,03,04,07,08

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (ELECTRICALLY OPERATED)
CLASS 5 (TYPE TR CONNECTORS)

MIL-S-3928/19

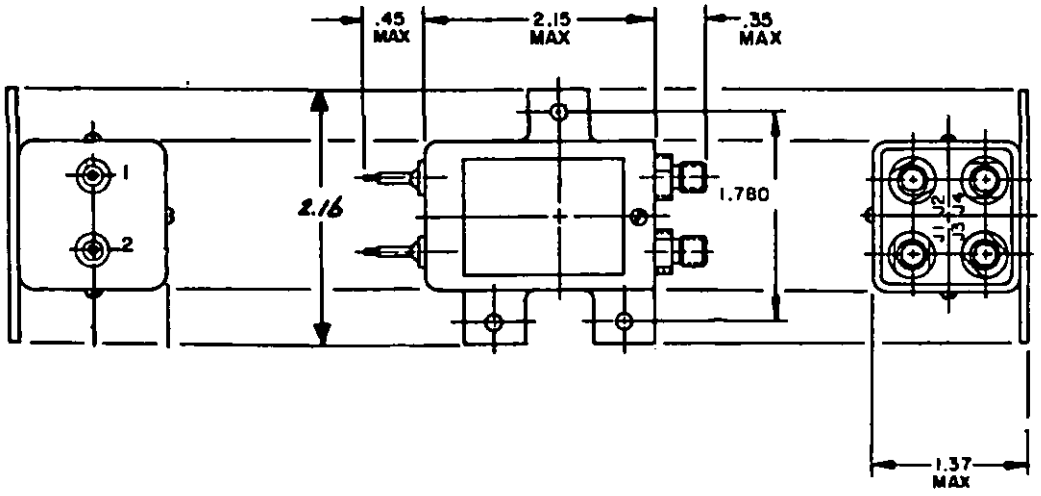

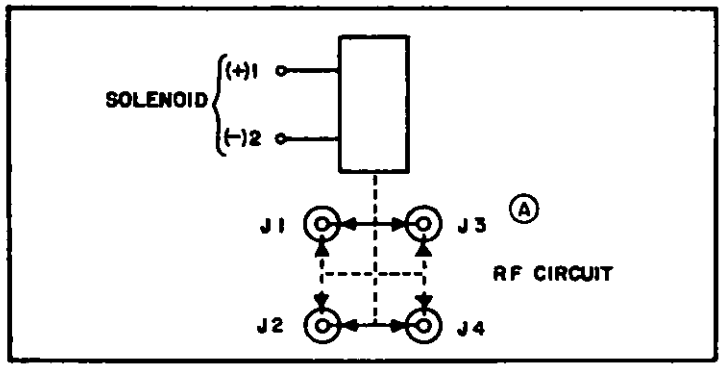

POS 1. DEENERGIZED OR FAILSAFE POSITION, J1-J3 AND J2-J4.
POS 2. ENERGIZED POSITION, J1-J2 AND J3-J4.
SCHEMATIC (SHOWN IN POSITION 1).

FIGURE 1: M3928/19-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (ELECTRICALLY OPERATED)
CLASS 5 (TYPE TR CONNECTORS)

MIL-S-3928/19


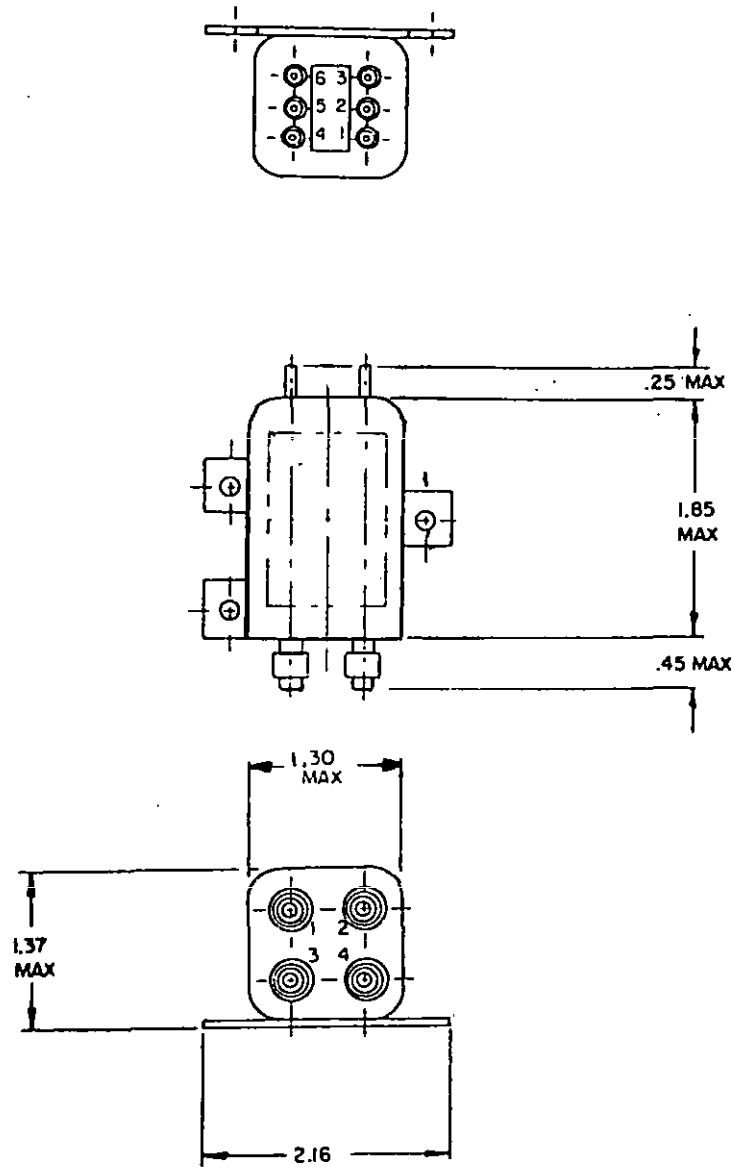


FIGURE 2: M3928/19-05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SWITCHES (COAXIAL), RF TRANSMISSION LINE (ELECTRICALLY OPERATED)
CLASS 5 (TYPE TR CONNECTORS)

MIL-S-3928/19

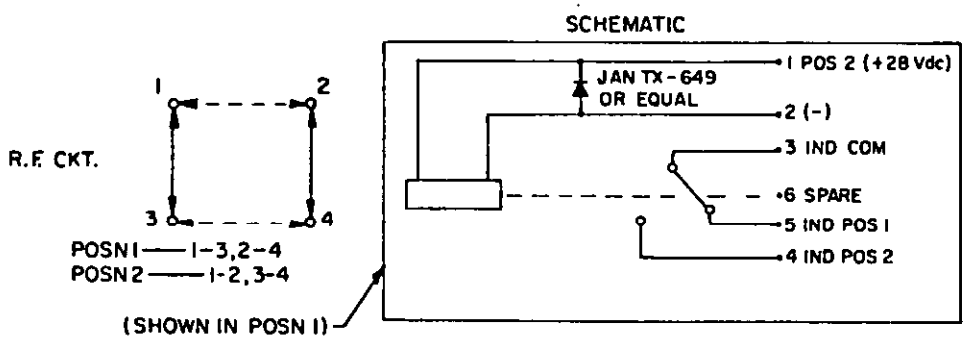

M3928/19-05 (CONTINUED)

FREQUENCY RANGE:	12.4 (DC TO GHz)
VSWR:	1.5:1
INSERTION LOSS:	0.5 dB MAX
NOMINAL OPERATING VOLTAGE:	28 VDC
OPERATING CURRENT:	
DASH NO. 02	1.3 AMPS MAX
DASH NO. 05	2.0 AMPS MAX
SWITCH TIME:	20 ms MAX
NOMINAL IMPEDANCE:	50 OHMS
OPERATING TEMPERATURE:	-55°C TO +85°C
RF POWER HANDLING CAPABILITY:	25 WATTS MIN (AVG)
RF CONNECTORS:	FEMALE CONNECTORS (4 PLACES) SHALL MEET REQUIREMENTS OF MIL-C-39012 AND SHALL MATE WITH SMA TYPE CONNECTORS PER MIL-C-39012/55.
PART NUMBERS:	M3928/19-02, 05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, CIRCULAR

MIL-W-23068

SCOPE: THIS SECTION COVERS CIRCULAR, RIGID WAVEGUIDES AS FABRICATED IN BULK AT THE MILL. WAVEGUIDES MAY BE SEAMLESS OR LAMINATED STOCK SUPPLIED IN ALUMINUM ALLOY, BRASS, COPPER, MAGNESIUM-BASE ALLOY, OR SILVER ALLOY.

TABLE I. TABLE MULTIPLIER.

SYMBOL	MULTIPLY BY:
U	1
D	10
C	100

TABLE II. MATERIAL.

SYMBOL	MATERIAL
A	ALUMINUM ALLOY
B	BRASS
C	COPPER
M	MAGNESIUM-BASE ALLOY
S	SILVER ALLOY

TYPE DESIGNATION: WRC 312U 14 A

COMPONENT

FREQUENCY (SEE TABLES I AND III.)

BANDWIDTH RATIO

MATERIAL (SEE TABLE II.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, CIRCULAR

MIL-W-23068

TABLE III. FREQUENCY RANGES AND DIMENSIONS.

TYPE DESIGNATION	FREQUENCY RANGE ((kmc/s) SQ.)		DIMENSIONS (DIA)	
	TE01 MODE	TE11 MODE	INSIDE	OUTSIDE
WRC312U14-	0.083 - 0.940	0.312 - 0.427	25.508	---
WRC365U14-	0.799 - 1.100	0.365 - 0.500	21.791	---
WRC427U14-	0.936 - 1.290	0.427 - 0.586	18.616	---
WRC500U14-	1.100 - 1.510	0.500 - 0.686	15.903	---
WRC586U14-	1.280 - 1.770	0.586 - 0.803	13.585	---
WRC686U14-	1.500 - 2.070	0.686 - 0.939	11.606	---
WRC803U14-	1.760 - 2.420	0.803 - 1.100	9.915	---
WRC939U14-	2.060 - 2.830	0.939 - 1.290	8.470	---
WRC110D14-	2.410 - 3.310	1.100 - 1.510	7.325	---
WRC129D14-	2.820 - 3.880	1.290 - 1.760	6.181	6.781
WRC151D14-	3.300 - 4.540	1.510 - 2.070	5.280	5.880
WRC176D14-	3.860 - 5.320	1.760 - 2.420	4.511	5.111
WRC207D14-	4.520 - 6.220	2.070 - 2.830	3.853	4.253
WRC242D14-	5.290 - 7.280	2.420 - 3.310	3.292	3.692
WRC283D14-	6.190 - 8.530	2.830 - 3.880	2.812	3.112
WRC331D14-	7.250 - 9.980	3.310 - 4.540	2.403	2.703
WRC389D14-	8.510 - 11.700	3.890 - 5.330	2.047	2.307
WRC454D14-	9.950 - 13.070	4.540 - 6.230	1.750	2.010
WRC530D14-	11.600 - 16.000	5.300 - 7.270	1.500	1.700
WRC621D14-	13.600 - 18.700	6.210 - 8.510	1.281	1.441
WRC727D14-	15.900 - 21.900	7.270 - 9.970	1.094	1.224
WRC849D14-	18.600 - 25.600	8.490 - 11.600	0.938	1.068
WRC997D14-	21.900 - 30.100	9.970 - 13.700	0.797	0.897
WRC116C14-	25.300 - 34.900	11.600 - 15.900	0.688	0.788
WRC134C14-	29.300 - 40.400	13.400 - 18.400	0.594	0.674
WRC159C14-	34.800 - 48.000	15.900 - 21.800	0.500	0.580
WRC182C14-	39.800 - 54.800	18.200 - 24.900	0.438	0.518
WRC212C14-	46.400 - 63.900	21.200 - 29.100	0.375	0.435
WRC243C14-	53.100 - 73.100	24.300 - 33.200	0.328	0.388
WRC283C14-	61.900 - 85.200	28.300 - 38.800	0.281	0.341
WRC318C14-	69.700 - 95.900	31.800 - 43.600	0.250	0.290
WRC364C14-	79.600 - 110.000	36.400 - 49.800	0.219	0.259
WRC424C14-	92.900 - 128.000	42.400 - 58.100	0.188	0.228
WRC463C14-	101.000 - 139.000	46.300 - 63.500	0.172	0.212
WRC566C14-	124.000 - 171.000	56.000 - 77.500	0.141	0.181
WRC635C14-	139.000 - 192.000	63.500 - 87.200	0.125	0.155
WRC727C14-	159.000 - 219.000	72.700 - 99.700	0.109	0.139
WRC848C14-	186.000 - 256.000	84.800 - 116.000	0.094	0.124


Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDE, RIGID, RECTANGULAR

MIL-W-85

SCOPE: THIS SECTION COVERS THE REQUIREMENTS FOR SEAMLESS OR FABRICATED RIGID WAVEGUIDES WITH RECTANGULAR INSIDE CONFIGURATIONS. THESE ARE INTENDED FOR USE AS TRANSMISSION LINES IN MILITARY SERVICES RADIO AND ELECTRONIC EQUIPMENT.

ASTM TYPE MATERIAL	CODE
OF - DLP COPPER ALLOY MIL-S-13282 GRADE C	C CA S

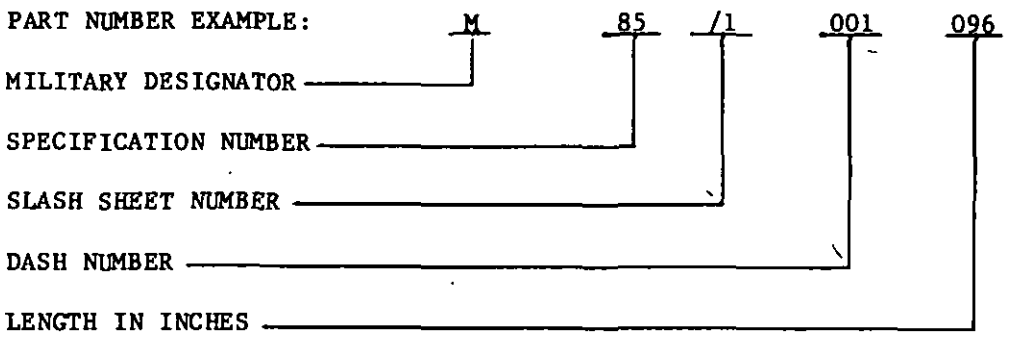

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR

MIL-W-85/1

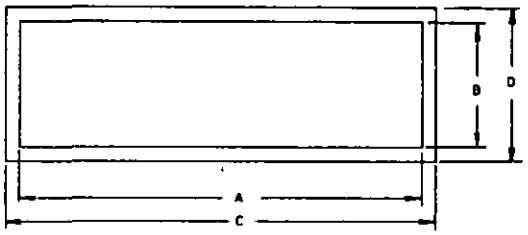


TABLE I. WAVEGUIDES, RIGID, RECTANGULAR.

PART NO. M85/1-	DIMENSIONS				ASTM TYPE MATERIAL
	A	B	C	D	
001-XXX 002-XXX 161-XXX	23.000	11.500	23.376	11.876	1100 6061 6063
003-XXX 004-XXX 162-XXX	21.000	10.500	21.376	10.876	1100 6061 6063
005-XXX 006-XXX 163-XXX	18.000	9.000	18.250	9.250	1100 6061 6063
007-XXX 008-XXX 164-XXX	15.000	7.500	15.250	7.750	1100 6061 6063
009-XXX 010-XXX 165-XXX	11.500	5.750	11.750	6.000	1100 6061 6063
011-XXX 012-XXX 166-XXX	9.750	4.875	10.000	5.125	1100 6061 6063
013-XXX 014-XXX 167-XXX	7.700	3.850	7.950	4.100	1100 6061 6063
015-XXX 017-XXX 018-XXX 019-XXX 168-XXX	6.500	3.250	6.660	3.410	C CA 1100 6061 6063

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR

MIL-W-85/1

TABLE I. WAVEGUIDES, RIGID, RECTANGULAR (CONT.).

PART NO. M85/1-	DIMENSIONS				ASTM TYPE MATERIAL
	A	B	C	D	
021-XXX 023-XXX 025-XXX 026-XXX 169-XXX	5.100	2.550	5.260	2.710	C CA 1100 6061 6063
027-XXX 029-XXX 030-XXX 031-XXX 170-XXX	4.300	2.150	4.460	2.310	C 1100 6061 CA 6063
033-XXX 035-XXX 036-XXX 037-XXX 171-XXX	3.400	1.700	3.560	1.860	C 1100 6061 CA 6063
039-XXX 041-XXX 042-XXX 043-XXX 172-XXX	2.840	1.340	3.000	1.500	C 1100 6061 CA 6063
045-XXX 047-XXX 048-XXX 049-XXX 173-XXX	2.290	1.145	2.418	1.273	C 1100 6061 CA 6063
051-XXX 053-XXX 054-XXX 055-XXX 174-XXX	1.872	0.872	2.000	1.000	C 1100 6061 CA 6063
057-XXX 059-XXX 060-XXX 061-XXX 175-XXX	1.590	0.795	1.718	0.923	C 1100 6061 CA 6063
063-XXX 065-XXX 066-XXX 067-XXX 176-XXX	1.372	0.622	1.500	0.750	C 1100 6061 CA 6063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR

MIL-W-85/1

TABLE I. WAVEGUIDES, RIGID, RECTANGULAR (CONT.).

PART NO. M85/1-	DIMENSIONS				ASTM TYPE MATERIAL
	A	B	C	D	
069-XXX 071-XXX 072-XXX 073-XXX 177-XXX	1.122	0.497	1.250	0.625	C 1100 6061 CA 6063
075-XXX 077-XXX 078-XXX 079-XXX 178-XXX	0.900	0.400	1.000	0.500	C 1100 6061 CA 6063
081-XXX 083-XXX 084-XXX 085-XXX 179-XXX	0.750	0.375	0.850	0.475	C 1100 6061 CA 6063
087-XXX 089-XXX 090-XXX 091-XXX 093-XXX 180-XXX	0.622	0.311	0.702	0.391	C CA 1100 6061 S 6063
094-XXX 096-XXX 097-XXX 098-XXX 181-XXX	0.510	0.255	0.590	0.335	C CA 1100 6061 6063
100-XXX 102-XXX 103-XXX 104-XXX 106-XXX 182-XXX	0.420	0.170	0.500	0.250	C CA 1100 6061 S 6063
107-XXX 109-XXX 110-XXX 111-XXX 113-XXX 183-XXX	0.340	0.170	0.420	0.250	C CA 1100 6061 CA & S 6063
155-XXX 156-XXX 157-XXX 158-XXX 160-XXX	1.020	0.510	1.148	0.638	CA C 1100 6061 6063

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR

MIL-W-85/1

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION.

PART NO. M85/1-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL ATTENUATION dB/100 FT	(LOWEST TO HIGHEST FREQUENCY) PEAK POWER RATING (MW)	CW POWER RATING (KW)
001-XXX 002-XXX 161-XXX	0.32 - 0.49	0.040-0.026 0.047-0.031 0.043-0.028	528.3-753.8	1702-2618 1447-2194 1582-2429
003-XXX 004-XXX 162-XXX	0.35 - 0.53	0.046-0.031 0.054-0.036 0.050-0.034	439.3-625.4	1375-2040 1170-1756 1264-1859
005-XXX 006-XXX 163-XXX	0.410 - 0.625	0.057-0.038 0.067-0.045 0.062-0.041	325.1-461.4	973.0-1450 827.2-123.2 893.9-135.2
007-XXX 008-XXX 164-XXX	0.490 - 0.750	0.076-0.051 0.089-0.060 0.082-0.055	224.1-320.4	630.1-939.0 537.7-797.6 583.6-870.1
009-XXX 010-XXX 165-XXX	0.64 - 0.96	0.113-0.076 0.133-0.089 0.122-0.082	132.0-186.9	342.8-509.7 291.0-434.9 317.3-472.1
011-XXX 012-XXX 166-XXX	0.75 - 1.12	0.147-0.098 0.173-0.115 0.159-0.106	93.81-133.7	231.2-346.9 196.4-295.4 213.6-320.5
013-XXX 014-XXX 167-XXX	0.96 - 1.45	0.205-0.139 0.240-0.163 0.222-0.151	59.67-84.18	137.8-203.3 117.6-173.2 127.9-187.0
015-XXX 017-XXX 018-XXX 019-XXX 168-XXX	1.12 - 1.70	0.213-0.141 0.316-0.209 0.273-0.180 0.320-0.212 0.295-0.195	41.34-59.74	114.8-173.6 80.53-121.8 88.45-135.7 76.26-115.1 82.72-125.1

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR
MIL-W-85/1

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION (CONT.).

PART NO. M85/1-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL ATTENUATION dB/100 FT	(LOWEST TO HIGHEST FREQUENCY) PEAK POWER RATING (MW)	CW POWER RATING (KW)
021-XXX	1.45 - 2.20	0.296-0.201	26.19-37.00	68.22-100.4
023-XXX		0.440-0.299		47.87-70.44
025-XXX		0.380-0.258		53.19-78.34
026-XXX		0.446-0.303		45.29-66.67
169-XXX		0.411-0.279		49.14-72.39
027-XXX	1.70 - 2.60	0.393-0.261	18.23-26.26	45.14-68.00
029-XXX		0.502-0.334		35.30-53.05
030-XXX		0.590-0.392		30.03-45.20
031-XXX		0.583-0.387		31.67-47.71
170-XXX		0.544-0.361		32.57-49.08
033-XXX	2.20 - 3.30	0.533-0.371	11.87-16.44	27.82-40.00
035-XXX		0.682-0.474		21.73-31.26
036-XXX		0.801-0.557		18.50-26.60
037-XXX		0.791-0.550		19.52-28.07
171-XXX		0.739-0.514		20.05-28.83
039-XXX	2.60 - 3.95	0.742-0.508	7.645-10.85	17.19-25.11
041-XXX		0.950-0.651		13.42-19.59
042-XXX		1.116-0.764		11.42-16.69
043-XXX		1.102-0.754		12.06-17.62
172-XXX		1.029-0.704		12.39-18.12
045-XXX	3.30 - 4.90	0.946-0.671	7.645-10.85	11.52-16.23
047-XXX		1.211-0.858	5.475-7.549	8.993-12.69
048-XXX		1.422-1.009		7.659-10.79
049-XXX		1.404-0.996		8.083-11.39
173-XXX		1.311-0.930		8.307-11.71
051-XXX	3.95 - 5.85	1.395-0.967	3.296-4.697	6.612-9.534
053-XXX		1.785-1.238		5.165-7.446
054-XXX		2.097-1.454		4.397-6.340
055-XXX		2.071-1.436		4.639-6.690
174-XXX		1.934-1.341		4.767-6.874
057-XXX	4.90 -7.05	1.553-1.160	2.792-3.719	5.374-7.193
059-XXX		1.988-1.485		4.196-5.617
060-XXX		2.334-1.744		3.574-4.783
061-XXX		2.305-1.722		3.771-5.047
175-XXX		2.152-1.608		3.876-5.187
063-XXX	5.85 - 8.20	1.978-1.562	1.975-2.531	3.708-4.695
065-XXX		3.532-1.999		2.076-3.667
066-XXX		4.148-2.348		1.768-3.122
067-XXX		2.936-2.319		2.602-3.294
176-XXX		3.824-2.164		1.917-3.387

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the currentversion before use.

WAVEGUIDES, RIGID, RECTANGULAR
MIL-W-85/1

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION (CONT.).

PART NO. M85/1-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL ATTENUATION dB/100 FT	(LOWEST TO HIGHEST FREQUENCY) PEAK POWER RATING (MW)	CW POWER RATING (KW)
069-XXX	7.05 - 10.00	2.776-2.154	1.284-1.702	2.290-2.946
071-XXX		3.548-2.756		1.788-2.301
072-XXX		4.166-3.238		1.523-1.958
073-XXX		4.114-3.197		1.607-2.067
177-XXX		3.841-2.985		1.652-2.124
075-XXX	8.20 - 12.40	4.328-2.995	0.758-1.124	1.229-1.776
077-XXX		5.540-3.833		0.9593-1.386
078-XXX		6.506-4.502		0.8169-1.180
079-XXX		6.424-4.445		0.8621-1.246
178-XXX		5.998-4.150		0.8860-1.280
081-XXX	10.00 - 15.00	5.121-3.577	0.622-0.903	0.9436-1.351
083-XXX		6.554-4.578		0.7368-1.055
084-XXX		7.698-5.377		0.6273-0.8982
085-XXX		7.601-5.309		0.6621-0.9479
179-XXX		7.097-4.957		0.6804-0.9473
087-XXX	12.40 - 18.00	6.451-4.743	0.457-0.633	0.6432-0.8749
089-XXX		9.578-7.041		0.4513-0.6139
090-XXX		8.259-6.071		0.5022-0.6832
091-XXX		9.700-7.131		0.4276-0.5816
093-XXX		6.910-5.079		0.6016-0.8184
180-XXX		8.943-6.574		0.4638-0.6309
094-XXX	15.00 - 22.00	8.812-6.384	0.312-0.433	0.4132-0.5701
096-XXX		13.08-9.477		0.2899-0.4000
097-XXX		11.27-8.172		0.3228-0.4452
098-XXX		13.25-9.598		0.2746-0.3791
181-XXX		12.21-8.849		0.2979-0.4111
100-XXX	18.00 - 26.50	13.80-10.13	0.171-0.246	0.2230-0.3038
102-XXX		20.48-15.04		0.1565-0.2132
103-XXX		17.66-12.97		0.1742-0.2372
104-XXX		20.74-15.23		0.1483-0.2020
106-XXX		14.77-10.85		0.2087-0.2842
182-XXX		19.12-14.04		0.1609-0.2191
107-XXX	22.00 - 33.00	16.86-11.73	0.139-0.209	0.1676-0.2410
109-XXX		25.03-17.41		0.1176-0.1691
110-XXX		21.58-15.01		0.1309-0.1883
111-XXX		25.35-17.63		0.1114-0.1603
113-XXX		16.18-11.25		0.1750-0.2517
183-XXX		23.37-16.26		0.1209-0.1738
155-XXX	7.00 - 11.00	5.219-3.291	1.017-1.534	1.220-1.935
156-XXX		3.516-2.217		1.725-2.735
157-XXX		4.500-2.838		1.358-2.154
158-XXX		5.285-3.333		1.156-1.834
160-XXX		4.873-3.073		1.254-1.989

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR, HEAVY WALL

MIL-W-85/2

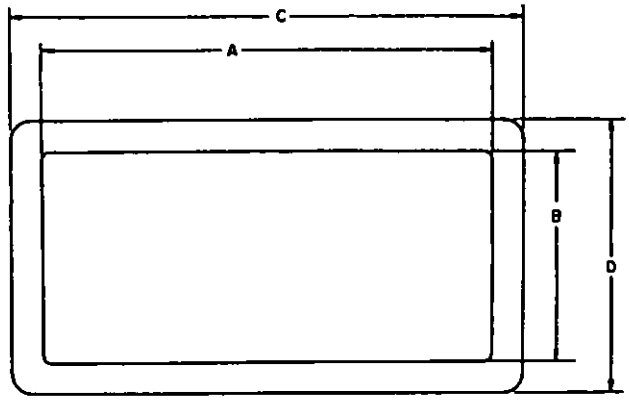


TABLE I. WAVEGUIDES, RIGID, RECTANGULAR, HEAVY WALL

PART NO. M85/2-	DIMENSIONS				ASTM TYPE MATERIAL
	A	B	C	D	
001-XXX 002-XXX 004-XXX	2.840	1.340	3.238	1.738	1100 6061 6063
003-XXX 005-XXX	1.872	0.872	2.172	1.172	1100 6063
006-XXX	1.872	0.872	2.122	1.122	C
007-XXX	1.122	0.497	1.378	0.753	C
008-XXX	0.900	0.400	1.100	0.600	C
009-XXX	0.900	0.400	1.300	0.800	C

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION.

PART NO. M85/2-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL ATTENUATION dB/100 FT	(LOWEST TO HIGHEST FREQUENCY) PEAK OWER RATING (KW)	CW POWER RATING (mW)
001-XXX	2.60 - 3.95	0.950-0.651	14.56-21.25	7.645-10.85
002-XXX	2.60 - 3.95	1.116-0.764	12.39-18.08	7.645-10.85
003-XXX	3.95 - 5.85	1.785-1.238	5.637-8.127	3.296-4.697
004-XXX	2.60 - 3.95	1.028-0.705	13.48-19.63	7.645-10.85
005-XXX	3.95 - 5.85	1.933-1.340	5.206-7.506	3.296-4.697
006-XXX	3.95 - 5.85	1.399-0.970	6.961-10.05	3.296-4.697
007-XXX	7.05 - 10.0	2.779-2.159	3.066-2.382	1.284-1.702
008-XXX	8.20 - 12.40	4.339-3.003	4.788-3.314	0.758-1.124
009-XXX	8.20 - 12.40	4.339-3.003	4.788-3.314	0.758-1.124

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR, MILLIMETER WAVELENGTH

MIL-W-85/3

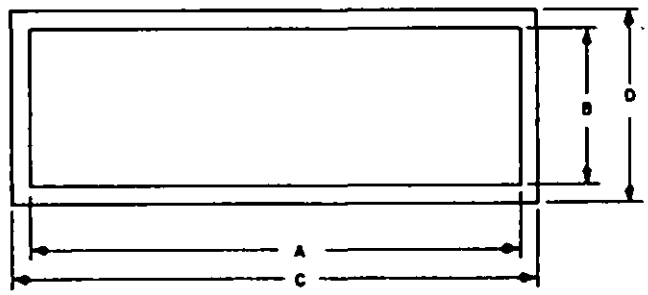


TABLE I. WAVEGUIDES, RIGID, RECTANGULAR.

PART NO. M85/3-	DIMENSIONS				ASTM TYPE MATERIAL
	A	B	C	D	
006-XXX 007-XXX 008-XXX 009-XXX	0.2800	0.1400	0.360	0.220	S C CA & S 6061
010-XXX 011-XXX 012-XXX 013-XXX	0.2240	0.1120	0.304	0.192	S C CA & S 6061
014-XXX 015-XXX 016-XXX	0.1880	0.0940	0.268	0.174	S C CA & S
017-XXX 018-XXX 019-XXX	0.1480	0.0740	0.228	0.154	S C CA & S
020-XXX 021-XXX 022-XXX	0.1220	0.0610	0.202	0.141	S C CA & S
023-XXX 024-XXX 025-XXX	0.1000	0.0500	0.180	0.130	S C CA & S
026-XXX 027-XXX 028-XXX	0.0800	0.0400	0.1600	0.1200	S C CA & S
029-XXX 030-XXX 031-XXX	0.0650	0.0325	0.1450	0.1125	S C CA & S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR, MILLIMETER WAVELENGTH

MIL-W-85/3

TABLE I. WAVEGUIDES, RIGID, RECTANGULAR (CONT.).

PART NO. M85/3-	DIMENSIONS				ASTM TYPE MATERIAL
	A	B	C	D	
032-XXX 033-XXX 034-XXX	0.0510	0.0255	0.1310	0.1055	S C CA & S
035-XXX 036-XXX 037-XXX	0.430	0.0215	0.1230	0.1015	S C CA & S
038-XXX 039-XXX 040-XXX	0.0340	0.0170	0.1140	0.0970	S C CA & S
041-XXX 042-XXX 043-XXX	0.0800	0.0400	0.1200	0.0800	S C CA & S
044-XXX 045-XXX 046-XXX	0.0650	0.0325	0.1050	0.7250	S C CA & S
047-XXX 048-XXX 049-XXX	0.0510	0.0255	0.0910	0.0655	S C CA & S
050-XXX 051-XXX 052-XXX	0.0430	0.0215	0.0830	0.0615	S C CA & S
053-XXX 054-XXX 055-XXX	0.0340	0.0170	0.0740	0.057	S C CA & S

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR, MILLIMETER WAVELENGTH

MIL-W-85/3

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION.

PART NO. M85/3-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL ATTENUATION dB/100 FT	(LOWEST TO HIGHEST FREQUENCY) PEAK POWER RATING (MW)	CW POWER RATING (KW)
006-XXX 007-XXX 008-XXX 009-XXX	26.50 - 40.00	24.55 - 16.80 23.02 - 15.77 21.99 - 15.06 34.46 - 23.59	96.0 - 146	103.1 - 150.1 109.7 - 160.1 115.1 - 168.0 73.27 - 107.0
010-XXX 011-XXX 012-XXX 013-XXX	33.00 - 50.00	34.57 - 23.50 32.44 - 22.05 30.98 - 21.06 48.53 - 32.99	64.4- 97.0	64.73 - 95.30 68.89 - 101.4 72.29 - 106.3 46.05 - 67.74
014-XXX 015-XXX 016-XXX	40.00 - 60.00	42.39 - 30.46 39.81 - 28.60 38.02 - 27.32	48 - 70.4	48.30 - 67.21 51.32 - 71.43 53.85 - 74.94
017-XXX 018-XXX 019-XXX	50.00 - 75.00	64.23 - 43.89 60.25 - 41.17 57.55 - 39.32	30 - 40	28.46 - 41.44 30.27 - 44.30 31.76 - 46.49
020-XXX 021-XXX 022-XXX	60.00 - 90.00	87.79 - 58.86 82.37 - 55.22 78.67 - 52.74	20 - 30	19.15 - 28.56 20.37 - 30.38 21.37 - 31.88
023-XXX 024-XXX 025-XXX	75.00 - 110.00	112.5 - 79.26 105.6 - 74.37 100.9 - 71.03	14 - 20	13.82 - 19.63 14.73 - 20.86 15.40 - 21.88
026-XXX 027-XXX 028-XXX	90.00 - 140.00	171.4 - 110.0 160.9 - 103.3 153.7 - 98.67	8.8 - 13	8.618 - 13.43 9.161 - 14.27 9.610 - 14.97
029-XXX 030-XXX 031-XXX	110.00 - 170.00	238.1 - 150.9 223.5 - 141.7 213.5 - 135.3	5.9 - 9.3	5.662 - 8.934 6.019 - 9.494 6.315 - 9.964

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION (CONT.).

PART NO. M85/3-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL ATTENUATION dB/100 FT	(LOWEST TO HIGHEST FREQUENCY) PEAK POWER RATING (MW)	CW POWER RATING (KW)
032-XXX 033-XXX 034-XXX	140.0 - 220.0	343.6 - 216.0 322.7 - 202.8 308.2 - 193.7	3.7 - 6.1	3.674 - 5.844 3.904 - 6.211 4.096 - 6.517
035-XXX 036-XXX 037-XXX	170.0 - 260.0	428.2 - 283.2 402.0 - 265.9 384.0 - 254.0	2.8 - 4.5	2.832 - 4.282 3.010 - 4.551 3.484 - 4.774
038-XXX 039-XXX 040-XXX	220.0 - 325.0	570.9 - 388.0 536.0 - 364.4 512.0 - 348.0	1.9 - 2.6	2.021 - 2.973 2.148 - 3.159 2.253 - 3.315
041-XXX 042-XXX 043-XXX	90.0 - 140.0	171.4 - 110.0 160.9 - 103.3 153.7 - 98.67	8.8 - 13	6.442 - 10.04 6.847 - 10.67 7.183 - 11.19
044-XXX 045-XXX 046-XXX	110.0 - 170.0	238.1 - 150.9 223.5 - 141.7 213.5 - 134.3	5.9 9.3	4.238 - 6.688 4.506 - 7.107 4.727 - 7.459
047-XXX 048-XXX 049-XXX	140.0 - 220.0	343.6 - 216.0 322.7 - 202.8 308.2 - 193.7	3.7 6.1	2.666 - 4.241 2.833 - 4.507 2.972 - 4.729
050-XXX 051-XXX 052-XXX	170.0 - 260.0	428.2 - 283.2 402.0 - 265.9 384.0 - 254.0	2.8 - 4.5	2.012 - 3.042 2.139 - 3.233 2.475 - 3.392
053-XXX 054-XXX 055-XXX	220.0 - 325.0	570.9 - 388.0 536.0 - 364.4 512.0 - 348.0	1.9 - 2.6	1.395 - 2.053 1.483 - 2.181 1.556 - 2.289

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR, REDUCED HEIGHT

MIL-W-85/4

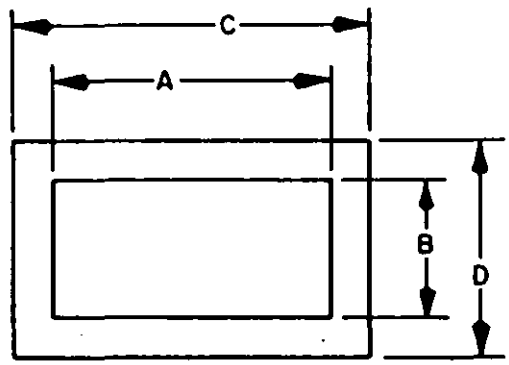


TABLE I. WAVEGUIDES, RIGID, RECTANGULAR, REDUCED HEIGHT

PART NO. M85/4-	DIMENSIONS				ASTM TYPE MATERIAL
	A	B	C	D	
001-XXX 002-XXX 007-XXX	2.840	1.004	3.000	1.164	CA 6061 6063
003-XXX 004-XXX 008-XXX	1.372	0.487	1.500	0.615	CA 6061 6063
009-XXX 010-XXX 011-XXX	9.750	2.436	10.000	2.686	CA 6061 6063
012-XXX 013-XXX 014-XXX	9.750	2.436	10.250	2.936	CA 6061 6063
015-XXX 016-XXX 017-XXX	2.840	0.670	3.000	0.830	CA 6061 6063
018-XXX 019-XXX 020-XXX	1.872	0.372	2.000	0.500	C 6061 6063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, RIGID, RECTANGULAR, REDUCED HEIGHT

MIL-W-85/4

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION.

PART NO. M85/4-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL ATTENUATION dB/100 FT	(LOWEST TO HIGHEST FREQUENCY) PEAK OWER RATING (mW)	CW POWER RATING (KW)
001-XXX	2.60 - 5.85	1.131-0.947	5.720-8.911	10.253-12.245
002-XXX	2.60 - 5.85	1.145-0.959	5.720-8.911	10.124-12.091
003-XXX	5.85 - 12.40	3.399-2.819	1.577-2.174	1.912-2.305
004-XXX	5.85 - 12.40	3.442-2.854	1.577-2.174	1.888-2.276
007-XXX	2.60 - 5.85	1.056-0.884	5.720-8.911	10.98-13.11
008-XXX	5.85 - 12.40	3.174-2.665	1.577-2.174	2.048-2.469
009-XXX	0.75 - 1.12	0.181-0.134	46.886-66.763	158.612-214.245
010-XXX	0.75 - 1.12	0.272-0.202	46.886-66.763	106.367-143.226
011-XXX	0.75 - 1.12	0.251-0.186	46.886-66.763	115.266-155.547
012-XXX	0.75 - 1.12	0.181-0.134	46.886-66.763	164.020-223.269
013-XXX	0.75 - 1.12	0.272-0.202	46.886-66.763	109.993-148.109
014-XXX	0.75 - 1.12	0.251-0.186	46.886-66.763	119.196-160.850
015-XXX	2.60 - 3.95	1.187-0.897	3.879-5.497	9.203-12.273
016-XXX	2.60 - 3.95	1.784-1.348	3.879-5.497	6.171-8.167
017-XXX	2.60 - 3.95	1.645-1.243	3.879-5.497	6.692-8.856
018-XXX	3.95 - 5.85	2.530-1.958	1.427-2.039	3.059-3.953
019-XXX	3.95 - 5.85	3.803-2.943	1.427-2.039	2.051-2.651
020-XXX	3.95 - 5.85	3.506-2.274	1.427-2.039	2.225-3.431

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.


WAVEGUIDES, SINGLE AND DOUBLE RIDGE

MIL-W-23351

SCOPE: THIS SECTION COVERS THE REQUIREMENTS FOR RIGID WAVEGUIDES WITH SINGLE OR DOUBLE INSIDE CONFIGURATIONS. THESE ARE INTENDED FOR USE AS TRANSMISSION LINES IN MILITARY SERVICES RADIO AND ELECTRONIC EQUIPMENT.

MATERIAL	CODE
ALUMINUM ALLOY	A
COPPER	C
COPPER ALLOY	CA
SILVER ALLOY	S


PART NUMBER EXAMPLE: M 23351 /1- 001

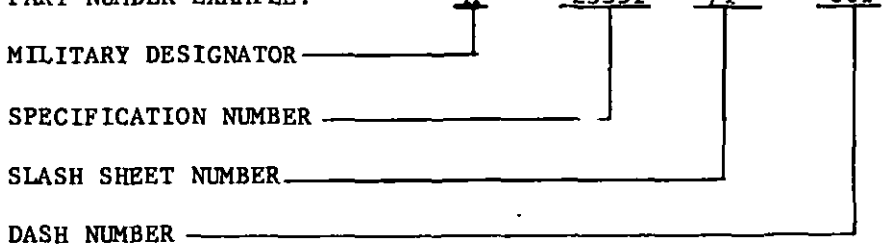


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, SINGLE RIDGE (BANDWIDTH RATIO 3.6:1)

MIL-W-23351/1

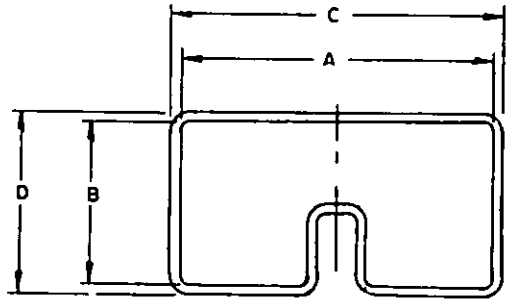

CONFIGURATION 1.

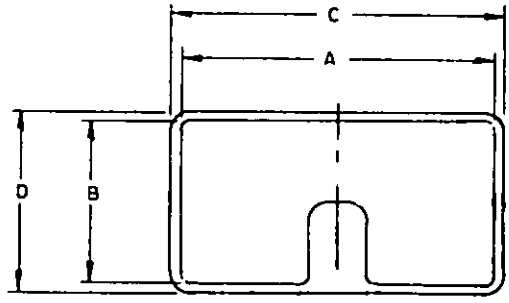

CONFIGURATION 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, SINGLE RIDGE (BANDWIDTH RATIO 3.6:1)

MIL-W-23351/1

TABLE I. PART NUMBER, DIMENSIONS, AND MATERIAL.

PART NO. M23351/1-	DIMENSIONS				CONFIG-URATION	MATE-RIAL
	A	B	C	D		
001-XXX 002-XXX 003-XXX 004-XXX	31.218	14.048	31.468 MAX	14.298 MAX	1	A CA C S
005-XXX 006-XXX 007-XXX 008-XXX	12.542	5.644	12.792	5.894	1	A CA C S
009-XXX 010-XXX 011-XXX 012-XXX	8.677	3.905	8.927	4.155	1	A CA C S
013-XXX 014-XXX 015-XXX 016-XXX	3.494	1.572	3.654	1.732	1	A CA C S
017-XXX 018-XXX 019-XXX 020-XXX	2.422	1.090	2.582	1.250	1	A CA C S
021-XXX 022-XXX 023-XXX 024-XXX	0.968	0.436	1.068	0.536	2	A CA C S
025-XXX 026-XXX 027-XXX 028-XXX	0.6780	0.3050	0.7780	0.4050	2	A CA C S
029-XXX 030-XXX 031-XXX 032-XXX	0.273	0.123	0.353	0.203	2	A CA C S

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

WAVEGUIDES, SINGLE RIDGE (BANDWIDTH RATIO 3.6:1)

MIL-W-23351/1

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION.

PART NO. M23351/1-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL	
		ATTENUATION dB/FT	POWER HANDLING CAPACITY (KW)
001-XXX 002-XXX 003-XXX 004-XXX	0.108 - 0.390	0.0024 0.0024 0.0016 0.0017	14,500
005-XXX 006-XXX 007-XXX 008-XXX	0.270 - 0.970	0.0098 0.0096 0.0065 0.0070	2,348
009-XXX 010-XXX 011-XXX 012-XXX	0.390 - 1.40	0.0658 0.0166 0.0112 0.0120	1,124
013-XXX 014-XXX 015-XXX 016-XXX	0.970 - 3.50	0.0658 0.0650 0.0438 0.0469	182.2
017-XXX 018-XXX 019-XXX 020-XXX	1.40 - 5.00	0.114 0.113 0.0758 0.0812	87.56
021-XXX 022-XXX 023-XXX 024-XXX	3.50 - 12.40	0.451 0.445 0.300 0.321	13.99
025-XXX 026-XXX 027-XXX 028-XXX	5.00 - 18.00	0.771 0.761 0.513 0.549	6.857
029-XXX 030-XXX 031-XXX 032-XXX	12.40 - 40.00	3.019 2.981 2.008 2.150	1.115

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, SINGLE RIDGE (BANDWIDTH RATIO 2.4:1)

MIL-W-23351/3

TABLE I. PART NUMBER, DIMENSIONS, AND MATERIAL.

PART NO. M23351/3-	DIMENSIONS				CONFIG-URATION	MATE-RIAL
	A	B	C	D		
001-XXX 002-XXX 003-XXX 004-XXX	28.129	12.658	28.379 MAX	12.908 MAX	1 (OF M23351/1)	A CA C S
005-XXX 006-XXX 007-XXX 008-XXX	18.421	8.289	18.671 MAX	8.539 MAX	1	A CA C S
009-XXX 010-XXX 011-XXX 012-XXX	11.695	5.263	11.945	5.513	1	A CA C S
013-XXX 014-XXX 015-XXX 016-XXX	7.682	3.457	7.932	3.707	1	A CA C S
017-XXX 018-XXX 019-XXX 020-XXX	5.847	2.631	6.007	2.791	1	A CA C S
021-XXX 022-XXX 023-XXX 024-XXX	3.276	1.474	3.436	1.634	1	A CA C S
025-XXX 026-XXX 027-XXX 028-XXX	2.456	1.105	2.616	1.265	1	A CA C S
029-XXX 030-XXX 031-XXX 032-XXX	1.404	0.632	1.532	0.760	2	A CA C S
033-XXX 034-XXX 035-XXX 036-XXX	1.034	0.465	1.134	0.565	2	A CA C S
037-XXX 038-XXX 039-XXX 040-XXX	0.6550	0.2950	0.7550	0.395	2	A CA C S
041-XXX 042-XXX 043-XXX 044-XXX	0.4466	0.2010	0.527	0.281	2	A CA C S
045-XXX 046-XXX 047-XXX 048-XXX	0.2729	0.1228	0.353	0.203	2	A CA C S

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currentversion before use.

WAVEGUIDES, SINGLE RIDGE (BANDWIDTH RATIO 2.4:1)

MIL-W-23351/3


TABLE II. CROSS INDEX AND ENGINEERING INFORMATION.

PART NO. M23351/3-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL	
		ATTENUATION dB/FT	POWER HANDLING CAPACITY (KW)
001-XXX	0.175 - 0.420	0.00036	32,870
002-XXX		0.00036	
003-XXX		0.00024	
004-XXX		0.00026	
005-XXX	0.267 - 0.640	0.00068	14,100
006-XXX		0.00067	
007-XXX		0.00045	
008-XXX		0.00048	
009-XXX	0.420 - 1.00	0.00130	5,682
010-XXX		0.00129	
011-XXX		0.00087	
012-XXX		0.00093	
013-XXX	0.640 - 1.53	0.00247	2,451
014-XXX		0.00243	
015-XXX		0.00164	
016-XXX		0.00176	
017-XXX	0.840 - 2.00	0.00373	1,421
018-XXX		0.00368	
019-XXX		0.00248	
020-XXX		0.00266	
021-XXX	1.50 - 3.60	0.00888	445.8
022-XXX		0.00877	
023-XXX		0.00591	
024-XXX		0.00633	
025-XXX	2.00 - 4.80	0.0136	250.6
026-XXX		0.0135	
027-XXX		0.00908	
028-XXX		0.00972	
029-XXX	3.50 - 8.20	0.0319	81.87
030-XXX		0.0315	
031-XXX		0.0212	
032-XXX		0.0227	
033-XXX	4.75 - 11.00	0.0501	44.43
034-XXX		0.0494	
035-XXX		0.0333	
036-XXX		0.0357	
037-XXX	7.50 - 18.00	0.0994	17.82
038-XXX		0.0981	
039-XXX		0.0661	
040-XXX		0.0708	
041-XXX	11.00 - 26.50	0.176	8.285
042-XXX		0.174	
043-XXX		0.117	
044-XXX		0.125	
045-XXX	18.00 - 40.00	0.370	3.095
046-XXX		0.365	
047-XXX		0.246	
048-XXX		0.263	


Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, DOUBLE RIDGE (BANDWIDTH RATIO 3.6:1)

MIL-W-23351/2

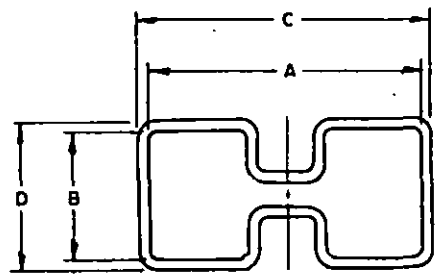

CONFIGURATION 1.

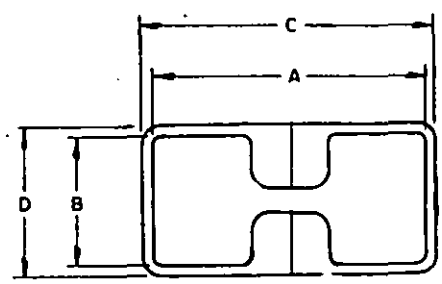

CONFIGURATION 2.

Source: https://assist.dla.mil -: Downloaded: 202640-26T07:29Z
Check the source to verify that this is the currenversion before use.

WAVEGUIDES, DOUBLE RIDGE (BANDWIDTH RATIO 3.6:1)

MIL-W-23351/2

TABLE I. PART NUMBER, DIMENSIONS, AND MATERIAL.

PART NO. M23351/2-	DIMENSIONS				CONFIG-URATION	MATE-RIAL
	A	B	C	D		
001-XXX 002-XXX 003-XXX 004-XXX	34.638	14.894	34.888 MAX	15.144 MAX	1	A CA C S
005-XXX 006-XXX 007-XXX 008-XXX	13.916	5.984	14.166 MAX	6.234 MAX	1	A CA C S
009-XXX 010-XXX 011-XXX 012-XXX	9.628	4.140	9.878	4.390	1	A CA C S
013-XXX 014-XXX 015-XXX 016-XXX	3.877	1.667	4.037	1.827	1	A CA C S
017-XXX 018-XXX 019-XXX 020-XXX	2.687	1.155	2.847	1.315	1	A CA C S
021-XXX 022-XXX 023-XXX 024-XXX	1.074	0.462	1.174	0.562	2	A CA C S
025-XXX 026-XXX 027-XXX 028-XXX	0.752	0.323	0.852	0.423	2	A CA C S
029-XXX 030-XXX 031-XXX 032-XXX	0.303	0.130	0.383	0.210	2	A CA C S

Source: https://assist.dla.mil -- Downloaded: 202610-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, DOUBLE RIDGE (BANDWIDTH RATIO 3.6:1)

MIL-W-23351/2

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION.

PART NO. M23351/2-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL	
		ATTENUATION dB/FT	POWER HANDLING CAPACITY (KW)
001-XXX	0.108 - 0.390	0.00065	28,830
002-XXX		0.00064	
003-XXX		0.00043	
004-XXX		0.00046	
005-XXX	0.270 - 0.970	0.0235	4,653
006-XXX		0.00232	
007-XXX		0.00156	
008-XXX		0.00167	
009-XXX	0.390 - 1.40	0.00415	2,227
010-XXX		0.00410	
011-XXX		0.00276	
012-XXX		0.00296	
013-XXX	0.970 - 3.50	0.0155	361.2
014-XXX		0.0153	
015-XXX		0.0103	
016-XXX		0.0110	
017-XXX	1.40 - 5.00	0.0283	173.5
018-XXX		0.0279	
019-XXX		0.0188	
020-XXX		0.0201	
021-XXX	3.50 - 12.40	0.110	27.74
022-XXX		0.108	
023-XXX		0.0729	
024-XXX		0.0781	
025-XXX	5.00 - 18.00	0.192	13.59
026-XXX		0.190	
027-XXX		0.128	
028-XXX		0.137	
029-XXX	12.40 - 40.00	0.737	2.210
030-XXX		0.727	
031-XXX		0.490	
032-XXX		0.525	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, DOUBLE RIDGE (BANDWIDTH RATIO 2.4:1)

MIL-W-23351/4

TABLE I. PART NUMBER, DIMENSIONS, AND MATERIAL.

PART NO. M23351/4-	DIMENSIONS				CONFIG-URATION	MATE-RIAL
	A	B	C	D		
001-XXX 002-XXX 003-XXX 004-XXX	29.667	13.795	29.917 MAX	14.045 MAX	1 (OF M23351/2)	A CA C S
005-XXX 006-XXX 007-XXX 008-XXX	19.428	9.034	19.678 MAX	9.284 MAX	1	A CA C S
009-XXX 010-XXX 011-XXX 012-XXX	12.333	5.737	12.583	5.987	1	A CA C S
013-XXX 014-XXX 015-XXX 016-XXX	8.100	3.767	8.350	4.017	1	A CA C S
017-XXX 018-XXX 019-XXX 020-XXX	6.167	2.868	6.417	3.118	1	A CA C S
021-XXX 022-XXX 023-XXX 024-XXX	3.455	1.607	3.615	1.767	1	A CA C S
025-XXX 026-XXX 027-XXX 028-XXX	2.590	1.205	2.750	1.365	1	A CA C S
029-XXX 030-XXX 031-XXX 032-XXX	1.480	0.688	1.608	0.816	2	A CA C S
033-XXX 034-XXX 035-XXX 036-XXX	1.090	0.506	1.190	0.606	2	A CA C S
037-XXX 038-XXX 039-XXX 040-XXX	0.691	0.321	0.791	0.421	2	A CA C S
041-XXX 042-XXX 043-XXX 044-XXX	0.471	0.219	0.551	.0299	2	A CA C S
045-XXX 046-XXX 047-XXX 048-XXX	0.288	0.134	0.368	0.214	2	A CA C S

Source: https://assist.dla.mil -- Downloaded: 202640-26T07:29Z
Check the source to verify that this is the current version before use.

WAVEGUIDES, DOUBLE RIDGE (BANDWIDTH RATIO 2.4:1)

MIL-W-23351/4

TABLE II. CROSS INDEX AND ENGINEERING INFORMATION.

PART NO. M23351/4-	SUGGESTED FREQUENCY RANGE TE10 MODE GHz	THEORETICAL	
		ATTENUATION dB/FT	POWER HANDLING CAPACITY (KW)
001-XXX	0.175 - 0.420	0.00035	61,960
002-XXX		0.00034	
003-XXX		0.00023	
004-XXX		0.00025	
005-XXX	0.267 - 0.640	0.00065	26,570
006-XXX		0.00064	
007-XXX		0.00043	
008-XXX		0.00046	
009-XXX	0.420 - 1.000	0.00128	10,710
010-XXX		0.00126	
011-XXX		0.00085	
012-XXX		0.00091	
013-XXX	0.640 - 1.530	0.0024	4,620
014-XXX		0.0024	
015-XXX		0.0016	
016-XXX		0.0017	
017-XXX	0.840 - 2.000	0.0036	2,676
018-XXX		0.0036	
019-XXX		0.0024	
020-XXX		0.0026	
021-XXX	1.500 - 3.600	0.0087	840.5
022-XXX		0.0086	
023-XXX		0.0058	
024-XXX		0.0062	
025-XXX	2.000 - 4.800	0.0134	472.5
026-XXX		0.0132	
027-XXX		0.0089	
028-XXX		0.0095	
029-XXX	3.500 - 8.200	0.0307	151.3
030-XXX		0.0303	
031-XXX		0.0204	
032-XXX		0.0218	
033-XXX	4.750 - 11.000	0.0487	83.72
034-XXX		0.0481	
035-XXX		0.0324	
036-XXX		0.0347	
037-XXX	7.500 - 18.000	0.0964	33.58
038-XXX		0.0951	
039-XXX		0.0641	
040-XXX		0.0686	
041-XXX	11.000 - 26.500	0.171	15.63
042-XXX		0.169	
043-XXX		0.114	
044-XXX		0.122	
045-XXX	18.000 - 40.000	0.358	5.834
046-XXX		0.353	
047-XXX		0.238	
048-XXX		0.255	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.