MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS
HARDWARE AND INSULATORS

To all holders of MIL-STD-242H(NAVY), PART 12:

1. The following pages of MIL-STD-242H(NAVY), PART 12 have been revised and supersede the pages listed:

NEW PAGES	DATE	SUPERSEDED PAGES	DATE
201.5		PRINTED WITHOUT CHANGE	18 JULY 1984
201.6		201.6	
301.9		PRINTED WITHOUT CHANGE	18 JULY 1984
301.10		301.10	
301.25		301.25	
301.26		PRINTED WITHOUT CHANGE	18 JULY 1984
351.3		PRINTED WITHOUT CHANGE	18 JULY 1984
351.4		351.4	
401.1		PRINTED WITHOUT CHANGE	18 JULY 1984
401.2		401.2	
411.1		411.1	
411.2		411.2	
411.3		411.3	
411.4		411.4	
421.1		421.1	
421.2		421.2	
451.1		PRINTED WITHOUT CHANGE	18 JULY 1984
451.2		451.2	
541.1		541.1	
541.1a		541.1	
541.1b		541.1	
541.2		541.2	
541.3		541.3	
541.4		541.4	
541.5		541.5	
543.1		543.1	
543.2		543.2	
543.3		543.3	
543.4		543.4	
549.1		549.1	
563.5		PRINTED WITHOUT CHANGE	18 JULY 1984
563.6		563.6	
563.7		563.7	
563.8		563.8	

FSC 59GP

Distribution statement A. approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-STD-242H(Navy), PART 12
NOTICE 1
18 November 1986

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS

HARDWARE AND INSULATORS

FSC 59GP

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

NEW PAGES	DATE	SUPERSEDED PAGES	DATE
563.9		563.9	
563.10		PRINTED WITHOUT CHANGE	18 JULY 1984
563.11		PRINTED WITHOUT CHANGE	18 JULY 1984
563.12		563.12	
611.9		PRINTED WITHOUT CHANGE	18 JULY 1984
611.10		611.10	
611.19		PRINTED WITHOUT CHANGE	18 JULY 1984
611.20		611.20	
611.25		611.25	
611.26		611.26	
651.1		PRINTED WITHOUT CHANGE	18 JULY 1984
651.2		651.2	
653.13		653.13	
653.14		653.14	
821.1		821.1	
821.2		821.2	
821.5		PRINTED WITHOUT CHANGE	18 JULY 1984
821.6		821.6	
821.7		821.7	
853.3		853.3	
853.4		PRINTED WITHOUT CHANGE	18 JULY 1984
853.5		853.5	
857.1		857.1	
857.2		PRINTED WITHOUT CHANGE	18 JULY 1984
857.3		857.3	
901.3		901.3	
901.4		901.4	
901.19		PRINTED WITHOUT CHANGE	18 JULY 1984
901.20		901.20	

2. Retain this notice and insert before table of contents.

3. Holders of MIL-STD-242H(NAVY), PART 12, will verify that page changes and additions indicated above have been entered. This notice page will be be retained as a check sheet this issuance, together with appended pages, is a separate publication. Each notice is to be retained by stocking points until the military standard is completely revised or cancelled.

Review activities:
Navy - AS, OS, SH, ES

User activity:

Preparing activity:
Navy - EC

(Project Number 59GP-N062)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSULATORS, STANDOFF (STYLES 10, 11, 12, 13, AND 14)

MIL-I-23264/2

TABLE I. TYPE DESIGNATION AND DIMENSIONS. (CONT.)

TYPE DESIGNATOR	DIMENSIONS	
	D	L
NL422B12-008	.750	1.000
NL422W12-008		
NL422B12-010		1.250
NL422W12-010		
NL422B12-012		1.500
NL422W12-012		
NL422B12-016		2.000
NL422W12-016		
NL422B12-020		2.500
NL422W12-020		
NL422B12-024		3.000
NL422W12-024		
NL422B12-032		4.000
NL422W12-032		
NL422B13-012	1.000	1.500
NL422W13-012		
NL422B13-016		2.000
NL422W13-016		
NL422B13-020		2.500
NL422W13-020		
NL422B13-024		3.000
NL422W13-024		
NL422B13-032		4.000
NL422W13-032		
NL422B14-008	SEE FIGURE 1B.	1.000
NL422W14-008		
NL422B14-010		1.250
NL422W14-010		
NL422B14-012		1.500
NL422W14-012		
NL422B14-016		2.000
NL422W14-016		
NL422B14-020		2.500
NL422W14-020		
NL422B14-024		3.000
NL422W14-024		
NL422B14-032		4.000
NL422W14-032		
NL422B14-040		5.000
NL422W14-040		
NL422B14-048		6.000
NL422W14-048		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

5

INSULATORS, STANDOFF (STYLES 19 AND 20)

MIL-I-23264/3

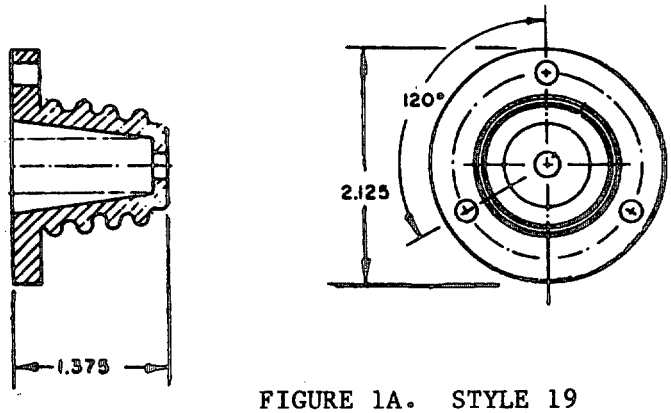


FIGURE 1A. STYLE 19

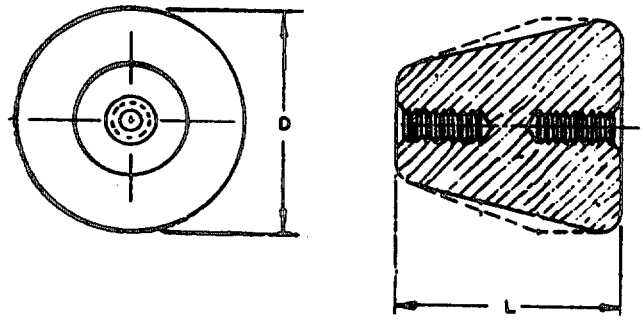


FIGURE 1B. STYLE 20

TABLE I. TYPE DESIGNATION AND DIMENSIONS.

TYPE DESIGNATOR	DIMENSIONS	
	D	L
NL422B19-011 NL422W19-011	SEE FIGURE 1A.	
NL422B20-008 NL422W20-008	1.000	1.000
NL422B20-012 NL422W20-012		1.500
NL422B20-016 NL422W20-016		2.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

NUT, SELF-LOCKING, HEXAGON, REGULAR HEIGHT, 800°F, 125 KSI Ftu

MS21046

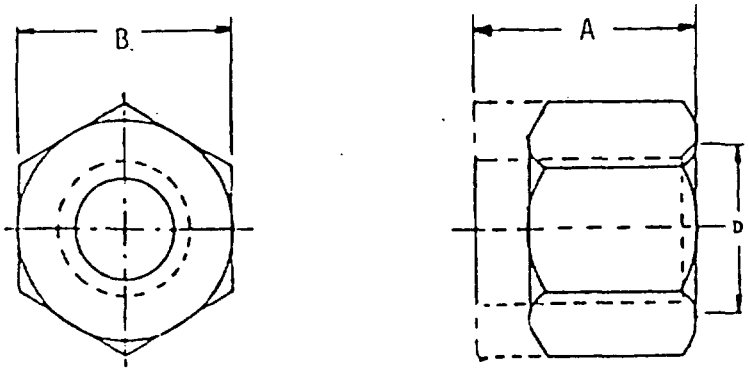


TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. M21046	THREAD @ SIZE __UNJ_-3B	DIMENSIONS A MAX	DIMENSIONS B MAX	DIMENSIONS D	AXIAL STRENGTH LBS-MIN
C04	4-40	.157	.251	.136	750
C06	6-32	.188	.313	.161	1130
C08	8-32	.250	.345	.188	1720
C3	10-32	.250	.376	.210	2460
C4	1/4-28	.328	.439	.273	4580
C5	5/16-24	.360	.502	.336	7390
C6	3/8-24	.469	.564	.398	11450
C7	7/16-20	.469	.690	.467	15450
C8	1/2-20	.610	.752	.531	21110
C9	9/16-18	.704	.877	.594	26810
C10	5/8-18	.766	.940	.656	34130
C12	3/4-16	.891	1.064	.787	50020
C14	7/8-14	1.016	1.252	.918	68440
C16	1-12	1.141	1.440	1.044	92180
C18	1 1/8-12	1.266	1.627	1.171	116700
C20	1 1/4-12	1.454	1.815	1.295	147940

@ PART NO. WITH "0" IN DASH NO. MEANS UNJC (04, 06, 08), OTHERS MEAN UNJF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

NUT, SELF-LOCKING, PLATE, TWO LUG, LOW HEIGHT, STEEL, 450 F, 125 KSI Ftu

MS21047

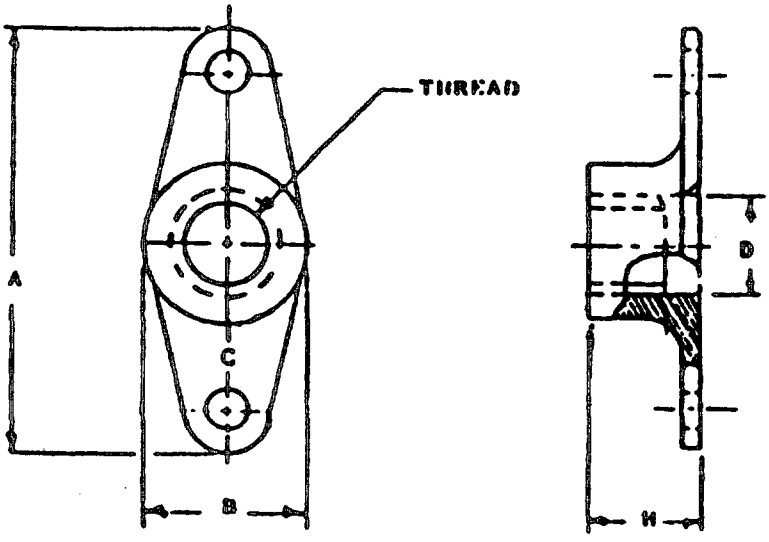


TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. MS21047 PLAIN HOLES FILM LUBRICATED		THREAD @ SIZE	DIMENSIONS				AXIAL STRENGTH
DRY	NON-DRY	UNJ -3B	A MAX	B DIA MAX	D DIA MIN	H MAX	LBS-MIN
L04	-04	.1120-40	.948	.260	--	.143	750
L06	-06	.1380-32	.948	.265	--	.171	1130
L08	-08	.1640-32	.948	.297	.168	.250	1720
L3	-3	.1900-32	.948	.328	.194	.250	2460
L4	-4	.2500-28	1.260	.414	.254	.281	4580
L5	-5	.3175-24	1.292	.505	.317	.328	7390
L6	-6	.3750-24	1.292	.614	.379	.344	11450

FOR COUNTERSUNK OR DIMPLED HOLES ADD "K" AFTER PART DASH NUMBER.
COUNTERSUNK OR DIMPLED HOLES NOT AVAILABLE IN -6K, -7K, L6K, OR L7K PART NO.
@ PART NO. WITH "0" IN DASH NO. MEANS UNJC (04, 06, 08), OTHERS MEAN UNJF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

NUT, SELF-LOCKING, PLATE, ONE LUG, FLOATING, LOW HEIGHT, CRES, 450 F AND 800 F, 125 KSI Ftu

MS21062

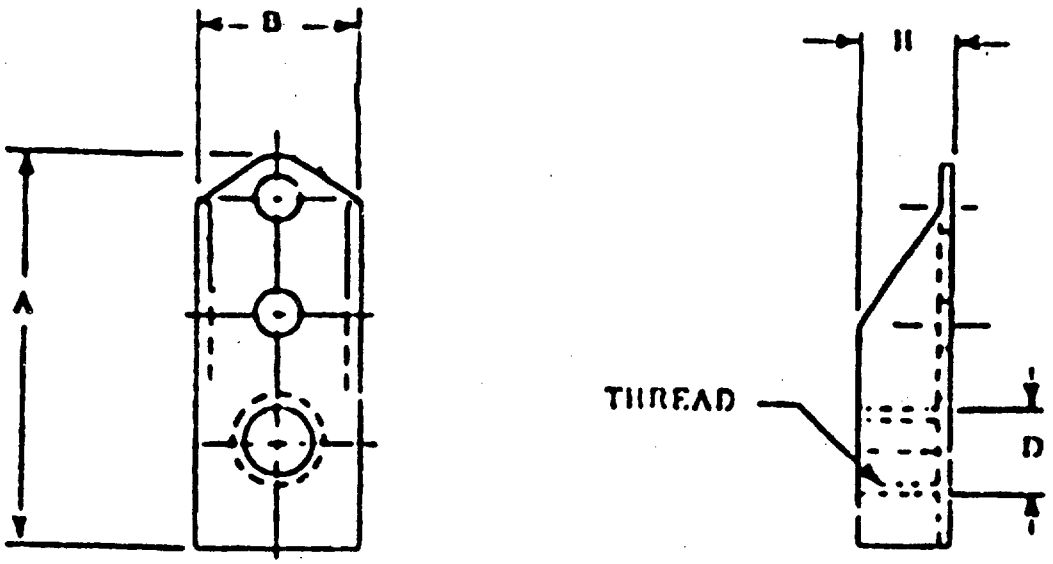


TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. MS21062 PLAIN HOLES FILM LUBRICATED		THREAD @ SIZE	DIMENSIONS				AXIAL STRENGTH
			A	B	D	H	
450° F DRY	800° F NON-DRY	UNJ -3B	MAX	MAX	DIA MIN	MAX	LBS-MIN
L04	-04	.1120-40	1.051	.422	--	.175	750
L06	-06	.1380-32	1.051	.422	--	.203	1130
L08	-08	.1640-32	1.051	.422	.168	.250	1720
L3	-3	.1900-32	1.051	.422	.194	.250	2460
L4	-4	.2500-28	1.306	.531	.254	.281	4580
L5	-5	.3125-24	1.396	.641	.317	.328	7390

FOR COUNTERSUNK OR DIMPLED HOLES ADD "K" AFTER PART DASH NUMBER.
COUNTERSUNK OR DIMPLED HOLES NOT AVAILABLE IN L6K OR -6K.
FOR WELDING PROJECTIONS ADD "W" AFTER PART DASH NUMBER.
@ PART NO. WITH "0" IN DASH NO. MEANS UNJC (04, 06, 08), OTHERS MEAN UNJF.

SUPERSEDES PAGE 301.25 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

NUT, SELF-LOCK, PLATE, TWO LUG, REDUCED RIVET SPACE, LOW HT., STEEL, 450°F, 125 KSI Ftu

MS21069

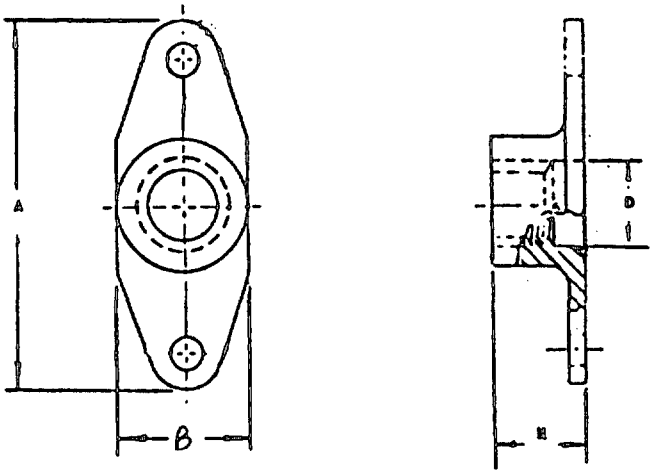


TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. MS21069 PLAIN HOLES FILM LUBRICATED		THREAD @ SIZE	DIMENSIONS				AXIAL STRENGTH
DRY	NON-DRY	UNJ -3B	A MAX	B MAX	D DIA MIN	H MAX	LBS-MIN
L04	-04	4-40	.630	.260	--	.143	750
L06	-06	6-32	.661	.265	--	.171	1130
L08	-08	8-32	.692	.297	.168	.250	1720
L3	-3	10-32	.724	.328	.194	.250	2460
L4	-4	1/4-28	.786	.414	.254	.281	4580
L5	-5	5/16-24	1.006	.505	.317	.328	7390
L6	-6	3/8-24	1.116	.614	.379	.344	11450

FOR COUNTERSUNK OR DIMPLED HOLES ADD "K" AFTER PART DASH NUMBER.
COUNTERSUNK OR DIMPLED HOLES NOT AVAILABLE IN -6K OR L6K PART NO.
@ PART NO. WITH "0" IN DASH NO. MEANS UNJC (04, 06, 08), OTHERS MEAN JF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

FASTENER, BLIND, HIGH STRENGTH, FULL TYPE, POSITIVE
MECHANICAL LOCK, 100 FLUSH HEAD, CORROSION RESISTING STEEL, 95 KSI Fsu

MS21140

TABLE II. GRIP TABULATIONS

5/32 DIA (-05)			3/16 DIA (-06)			1/4 DIA (-08)		
GRIP DASH NO.	GRIP RANGE MAX	C MAX	GRIP DASH NO.	GRIP RANGE MAX	C MAX	GRIP DASH NO.	GRIP RANGE MAX	C MAX
-0502	.157	.404	-0602	.157	.457			
-0503	.220	.466	-0603	.220	.511	-0803	.220	.586
-0504	.282	.529	-0604	.282	.574	-0804	.282	.648
-0505	.345	.592	-0605	.345	.636	-0805	.345	.710
-0506	.407	.654	-0606	.407	.699	-0806	.407	.773
-0507	.470	.716	-0607	.470	.761	-0807	.470	.836
-0508	.532	.779	-0608	.532	.824	-0808	.532	.898
-0509	.595	.842	-0609	.595	.886	-0809	.595	.960
-0510	.657	.904	-0610	.657	.949	-0810	.657	1.023
-0511	.720	.966	-0611	.720	1.011	-0811	.720	1.086
-0512	.782	1.029	-0612	.782	1.074	-0812	.782	1.148
-0513	.845	1.092	-0613	.845	1.136	-0813	.845	1.210
-0514	.907	1.154	-0614	.907	1.199	-0814	.907	1.273
-0515	.970	1.216	-0615	.970	1.261	-0815	.970	1.336
-0516	1.032	1.279	-0616	1.032	1.324	-0816	1.032	1.398
			-0617	1.095	1.386	-0817	1.095	1.460
			-0618	1.157	1.449	-0818	1.157	1.523
			-0619	1.220	1.511	-0819	1.220	1.586
			-0620	1.282	1.574	-0820	1.282	1.648
						-0821	1.345	1.710
						-0822	1.407	1.773
						-0823	1.470	1.836
						-0824	1.532	1.898

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

FASTENER, BLIND, HIGH STRENGTH, FULL TYPE, POSITIVE MECHANICAL LOCK, 100 FLUSH HEAD, CORROSION RESISTING STEEL, 95 KSI Fsu

MS21140

TABLE II. GRIP TABULATIONS (CONT.)

5/16 DIA (-10)			3/8 DIA (-12)		
GRIP DASH NO.	GRIP RANGE MAX	C MAX	GRIP DASH NO.	GRIP RANGE MAX	C MAX
-1004	.282	.713	-1204	.282	.790
-1005	.345	.775	-1205	.345	.853
-1006	.407	.838	-1206	.407	.915
-1007	.470	.900	-1207	.470	.977
-1008	.532	.963	-1208	.532	1.040
-1009	.595	1.025	-1209	.595	1.103
-1010	.657	1.088	-1210	.657	1.165
-1011	.720	1.150	-1211	.720	1.227
-1012	.782	1.213	-1212	.782	1.290
-1013	.845	1.275	-1213	.845	1.353
-1014	.907	1.338	-1214	.907	1.415
-1015	.970	1.400	-1215	.970	1.477
-1016	1.032	1.463	-1216	1.032	1.540
-1017	1.095	1.525	-1217	1.095	1.603
-1018	1.157	1.588	-1218	1.157	1.665
-1019	1.220	1.650	-1219	1.220	1.727
-1020	1.282	1.713	-1220	1.282	1.790
-1021	1.345	1.775	-1221	1.345	1.853
-1022	1.407	1.838	-1222	1.407	1.915
-1023	1.470	1.900	-1223	1.470	1.977
-1024	1.532	1.963	-1224	1.532	2.040
-1025	1.595	2.025	-1225	1.595	2.103
-1026	1.657	2.088	-1226	1.657	2.165
-1027	1.720	2.150	-1227	1.720	2.227
-1028	1.782	2.213	-1228	1.782	2.290
			-1229	1.845	2.353
			-1230	1.907	2.415
			-1231	1.970	2.477
			-1232	2.032	2.540


SUPERSEDES PAGE 351.4 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

POSTS, BINDING, ELECTRICAL (INSULATED AND UNINSULATED)

MIL-P-55149

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR INSULATED BINDING POSTS AND UNINSULATED BINDING POSTS WITH INSULATED AND UNINSULATED CAPS.

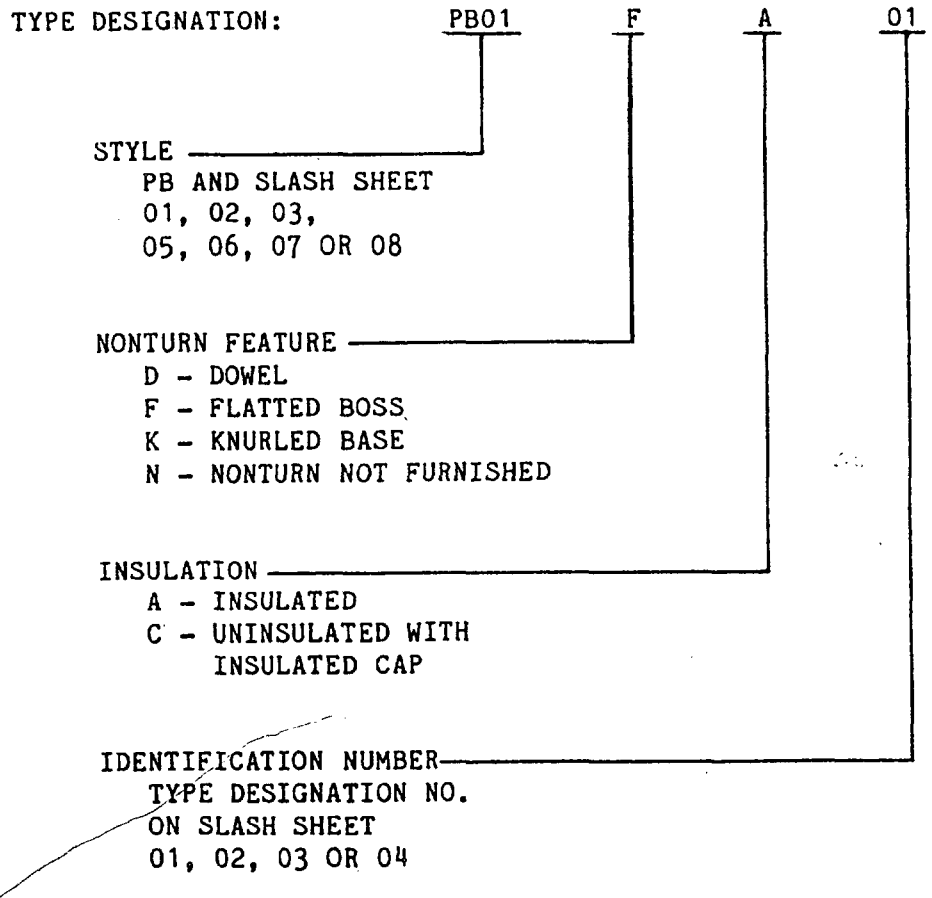


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

13

POSTS, BINDING, ELECTRICAL (INSULATED), TYPES PB01FA01 TO PB01FA04

MIL-P-55149/1

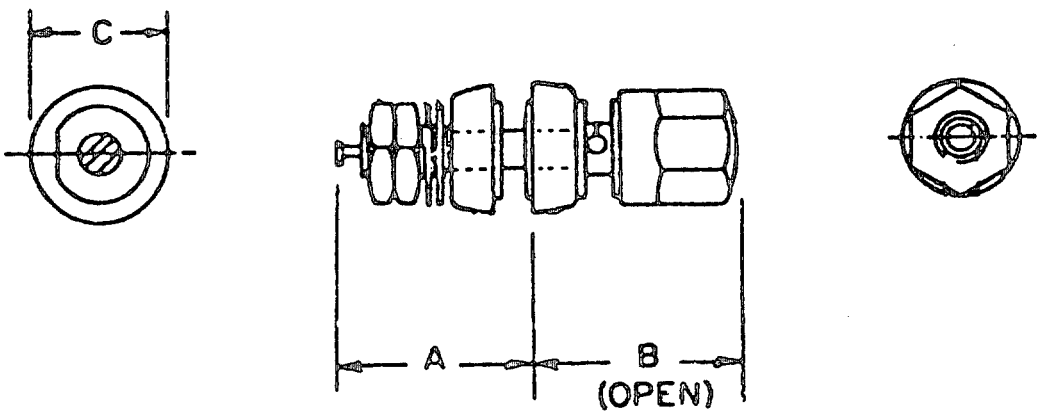


TYPE DESIGNATION	INSULATION COLOR	DIMENSIONS		
		A	B MAX	C
PB01FA01	RED	0.690	1.035	0.500
PB01FA02	BLACK	0.690	1.035	0.500
PB01FA03	RED	0.910	1.187	0.640
PB01FA04	BLACK	0.910	1.187	0.640

SUPERSEDES PAGE 401.2 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

POSTS, BINDING, ELECTRICAL (UNINSULATED), TYPES PB02DC01 AND PB02DC02

MIL-P-55149/2

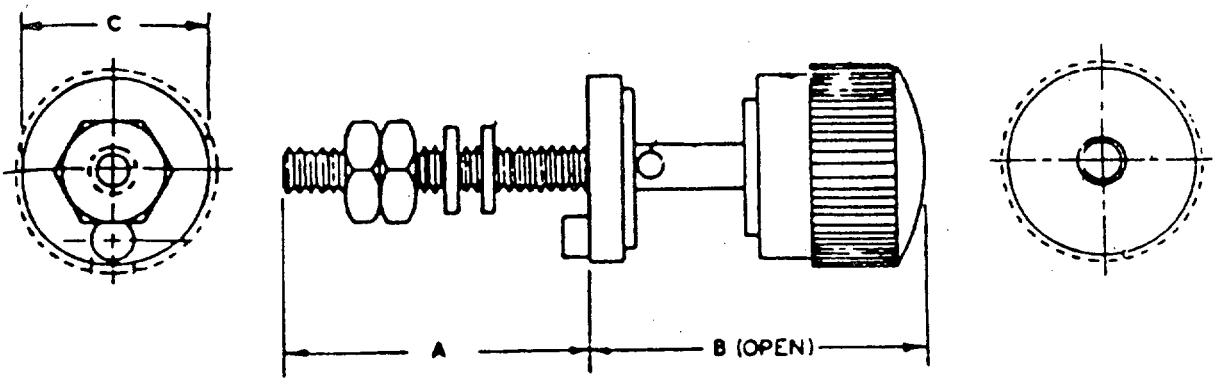

TYPE DESIGNATION	INSULATION COLOR	DIMENSIONS		
		A	B	C
PB02DC01	RED	1.125	1.250	0.687
PB02DC02	BLACK	1.125	1.250	0.687


SUPERSEDES PAGE 411.1 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

15

POSTS, BINDING, ELECTRICAL (UNINSULATED), TYPES PB03KC01 AND PB03KC02

MIL-P-55149/3

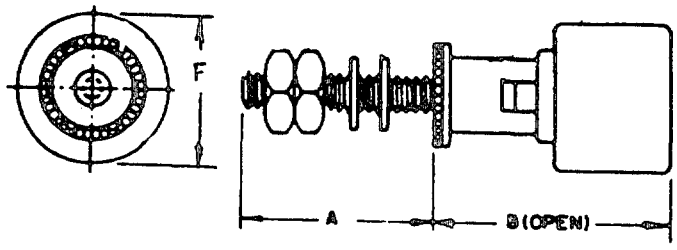


TYPE DESIGNATION	INSULATION COLOR	DIMENSIONS		
		A	B	F
PB03KC01	BLACK	0.562	0.734	0.500
PB03KC02	BLACK	0.812	0.172	0.625

SUPERSEDES PAGE 411.2 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

POSTS, BINDING, ELECTRICAL (UNINSULATED), TYPE PB05NC01

MIL-P-55149/5

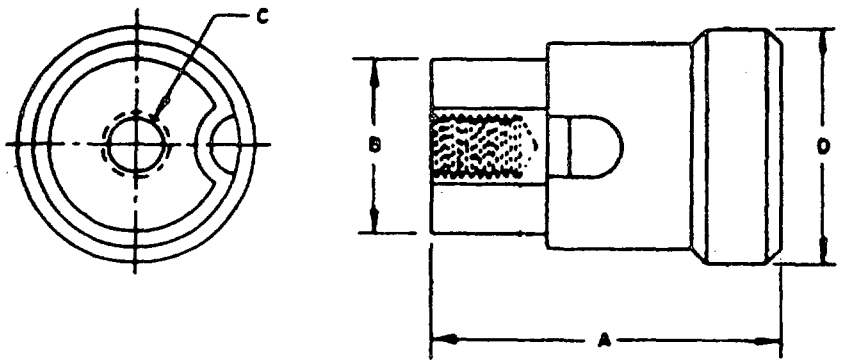

TYPE DESIGNATION	INSULATION COLOR	DIMENSIONS			
		A MAX	B	C	D
PB05NC01	BLACK	0.750	0.375	6-32 UNC-2B	0.500


SUPERSEDES PAGE 411.3 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

17

POSTS, BINDING, ELECTRICAL (UNINSULATED), TYPE PB06NC01

MIL-P-55149/6

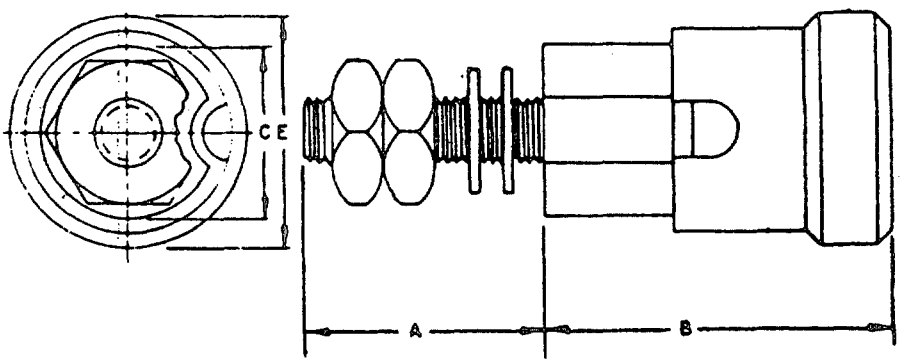


TYPE DESIGNATION	INSULATION COLOR	DIMENSIONS			
		A	B MAX	C	E
PB06NC01	BLACK	0.500	0.750	.375	0.500

SUPERSEDES PAGE 411.4 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

POSTS, BINDING, ELECTRICAL (INSULATED), TYPE PB07FA01

MIL-P-55149/7

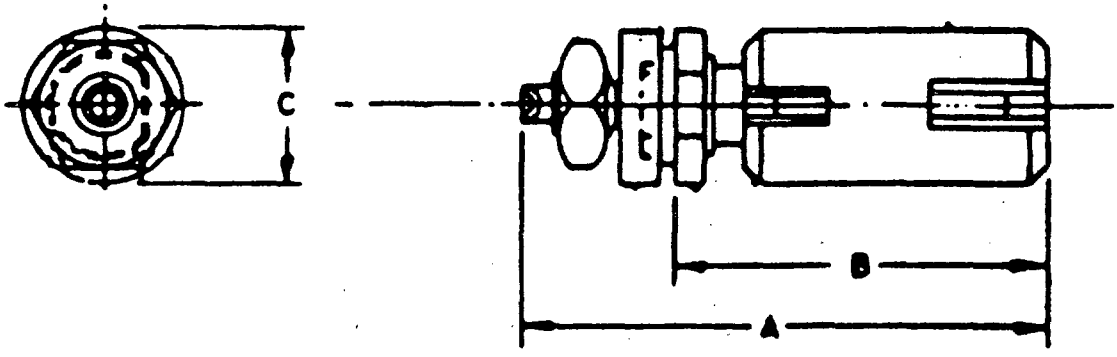

TYPE DESIGNATION	INSULATION COLOR	DIMENSIONS (MAX)		
		A	B	C
PB07FA01	OLIVE DRAB	1.612	1.072	.400


SUPERSEDES PAGE 421.1 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

19

POSTS, BINDING, ELECTRICAL WATERPROOF (INSULATED), TYPES PB08NA01 AND PB08NA02

MIL-P-55149/8

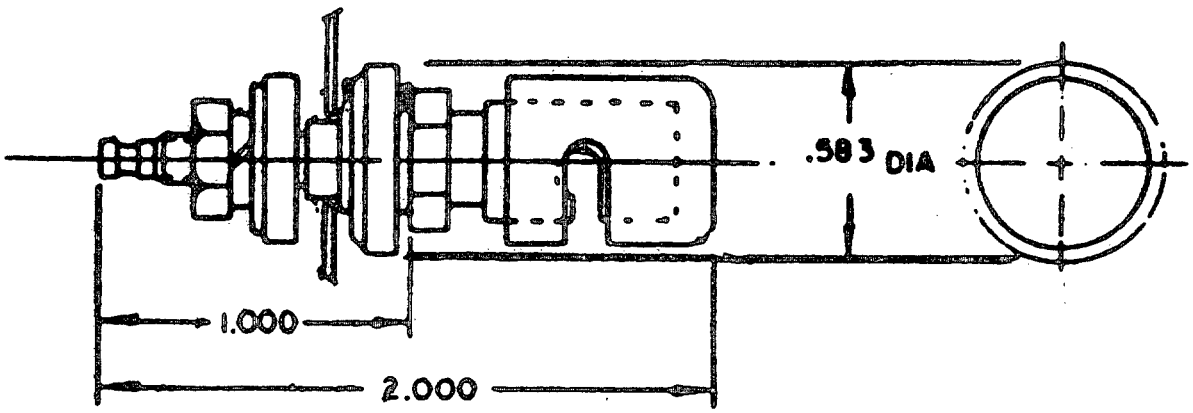

TYPE DESIGNATION	CAP COLOR	TYPE DESIGNATION	CAP COLOR
PB08NA01	BLACK	PB08NA02	RED

SUPERSEDES PAGE 421.2 OF 18 JULY 1984


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CLAMP, LOOP, CUSHION

MIL-C-85052

SCOPE: THIS SECTION COVERS TUBE SUPPORT LOOP CLAMPS. THESE CLAMPS ARE INTENDED FOR USE IN GENERAL CLAMPING OF FLUID AND ELECTRICAL AND RIGID TUBING. THE CLAMPS MAY BE USED WITHIN THE CUSHION TEMPERATURE 250°F OR 500°F.

PART NUMBER EXAMPLE: M85052/1-8

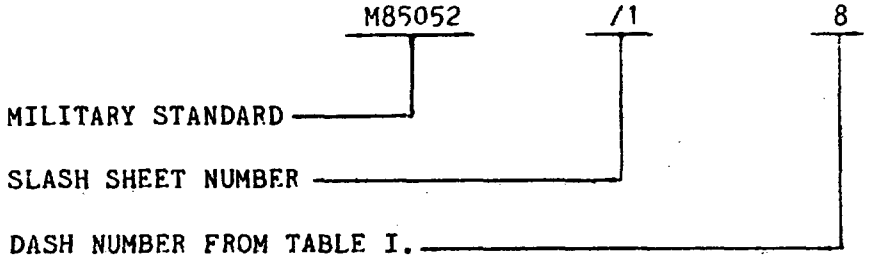


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CLAMP, LOOP, TUBE-17-7 PH CRES, 275 F, FUEL AND PETROLEUM BASED HYDRAULIC FLUID RESISTANT

MIL-C-85052/1

TABLE I SEE PAGE 451.2

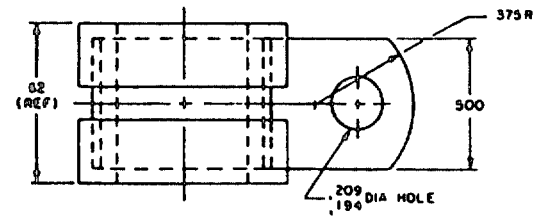

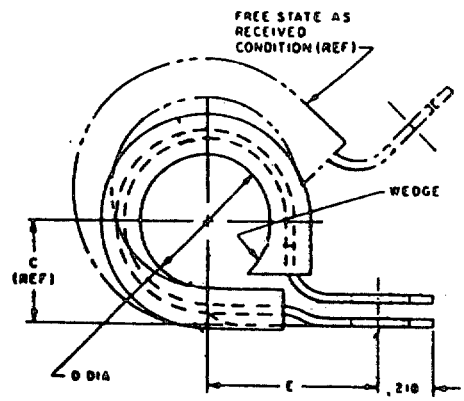


TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. MIL-C-85052/_-	DIMENSIONS			PART NO. MIL-C-85052/_-	DIMENSIONS		
	C	D	E		C	D	E
2	.192	.125	.468				
3	.224	.188	.499	14	.580	.875	.898
4	.255	.250	.530	15	.611	.938	.929
5	.286	.312	.561	16	.642	1.000	.960
6	.318	.375	.592	17	.681	1.062	1.001
7	.349	.438	.624	18	.712	1.125	1.032
8	.380	.500	.655	19	.744	1.188	1.064
9	.423	.562	.741	20	.775	1.250	1.095
10	.454	.625	.772	21	.806	1.312	1.126
11	.486	.688	.804	22	.838	1.375	1.158
12	.517	.750	.835	23	.869	1.438	1.189
13	.548	.812	.866	24	.900	1.500	1.220


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM


MIL-T-81714

SCOPE: THIS SECTION COVERS THE COMPONENTS WHICH ARE USED FOR INTERCONNECTION OF WIRING IN TERMINAL JUNCTION SYSTEMS. THE COMPONENTS MAKING UP THE SYSTEM AND COVERED BY THIS SECTION INCLUDE FEEDBACK AND FEEDTHRU TYPES TERMINAL JUNCTION MODULES, TRACKS FOR MODULES, AND REMOVABLE CONTACT WIRE SPLICES.

BUSSING BLOCKS

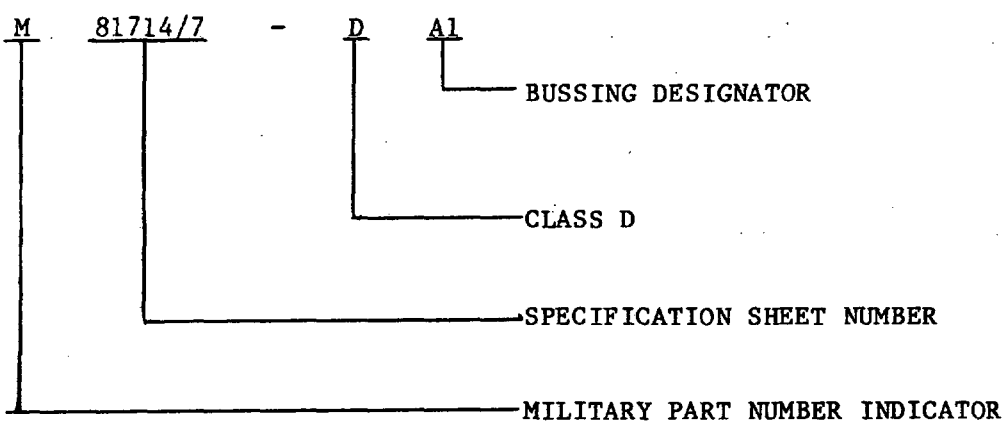

ELECTONIC BLOCKS

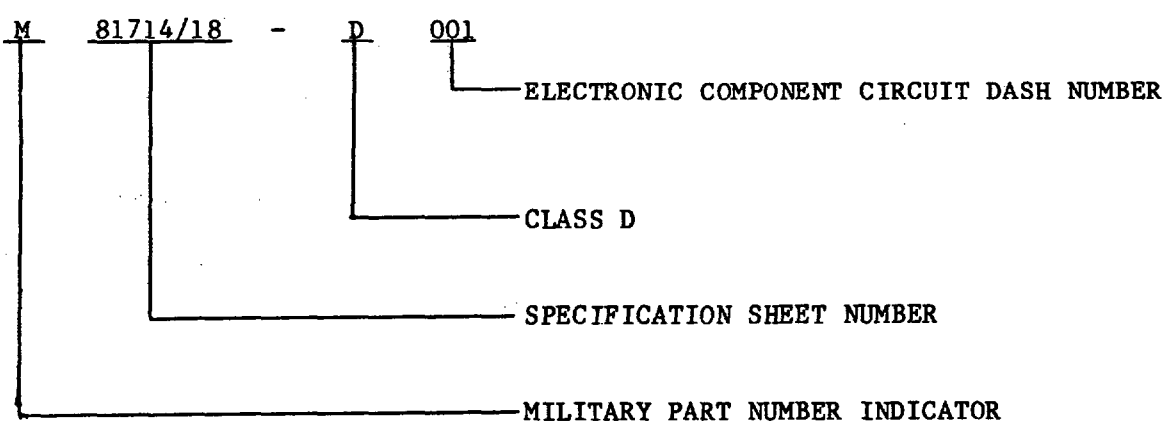


SUPERSEDES PAGE 541.1 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


TERMINAL JUNCTION SYSTEM

MIL-T-81714

WIRE IN-LINE JUNCTIONS

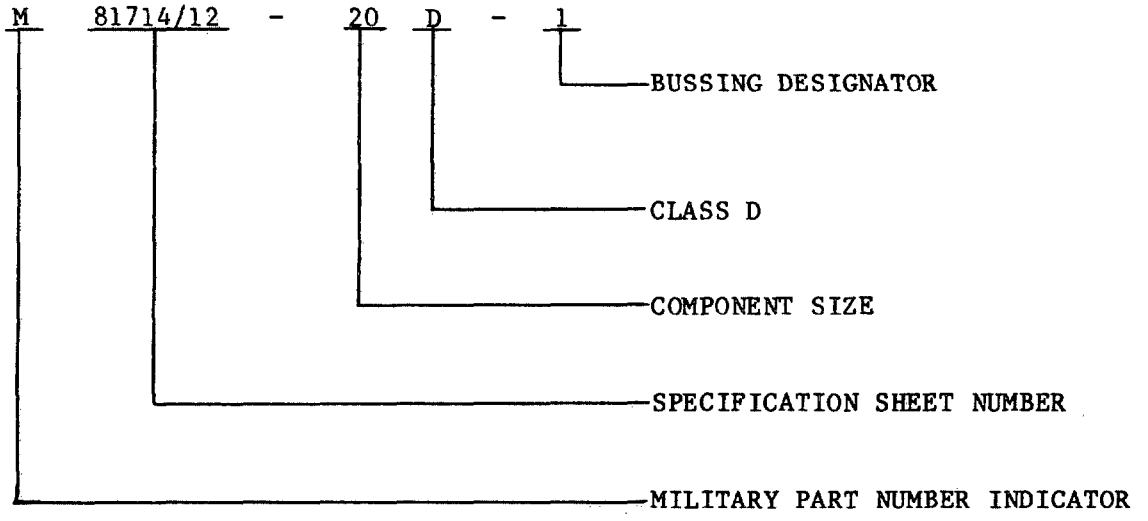

ELECTRONIC IN-LINE JUNCTIONS

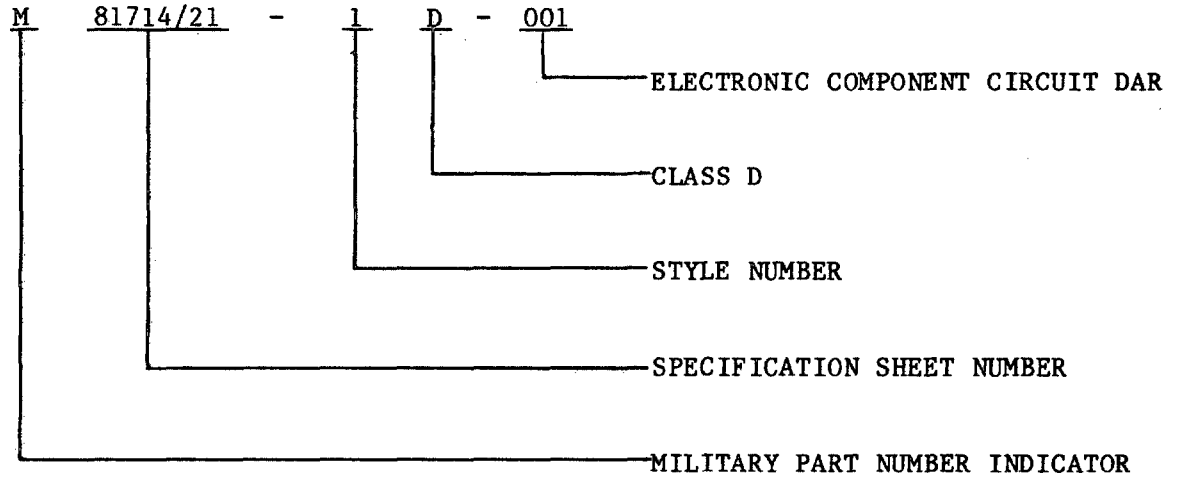


SUPERSEDES PAGE 541.1 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM

MIL-T-81714

RACKS AND BRACKETS

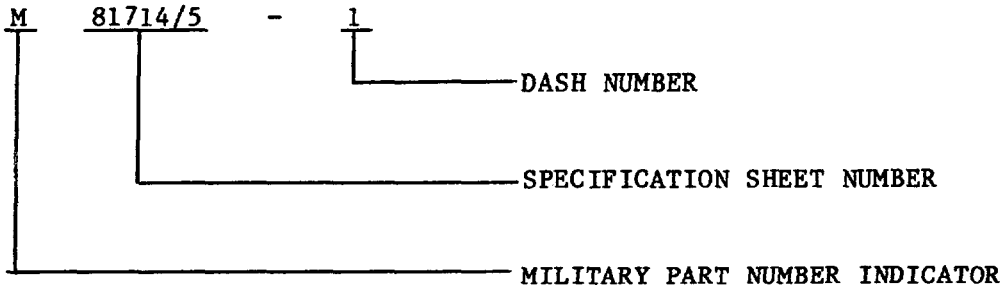


SUPERSEDES PAGE 541.1 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM
MODULES, FEEDBACK TYPE, SIZE 22

MIL-T-81714/1

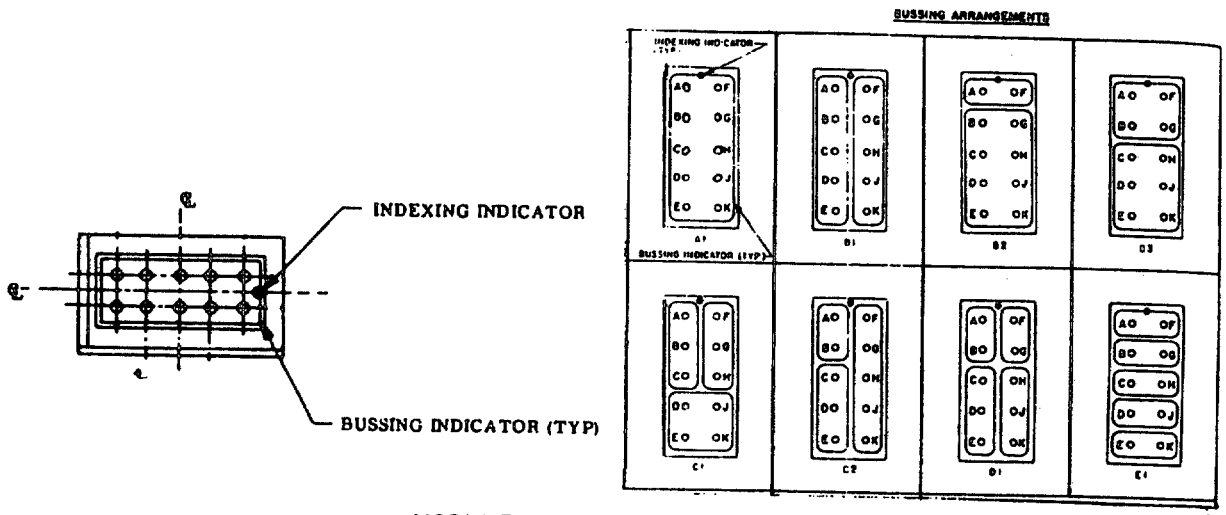

MODULE BLOCK

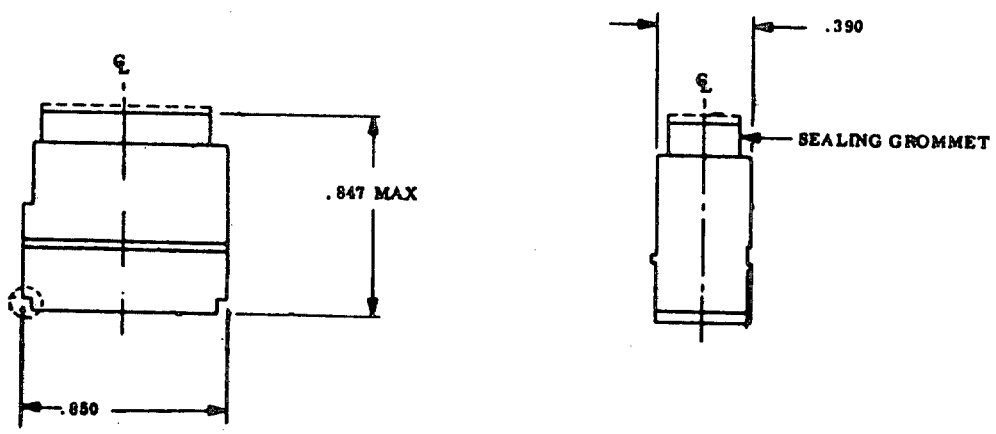


TABLE I.

PART NUMBER	CONSISTS OF MODULE BLOCK AND	
	CONTACTS PART NUMBER	SEALING PLUGS PART NUMBER
M81714/1-D**	M39029/1-100	MS27488-20


**BUSSING ARRANGEMENT


SUPERSEDES PAGE 541.3 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


TERMINAL JUNCTION SYSTEM
MODULES, FEEDBACK TYPE, SIZE 20

MIL-T-81714/2

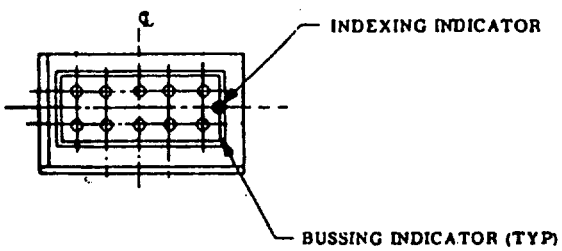

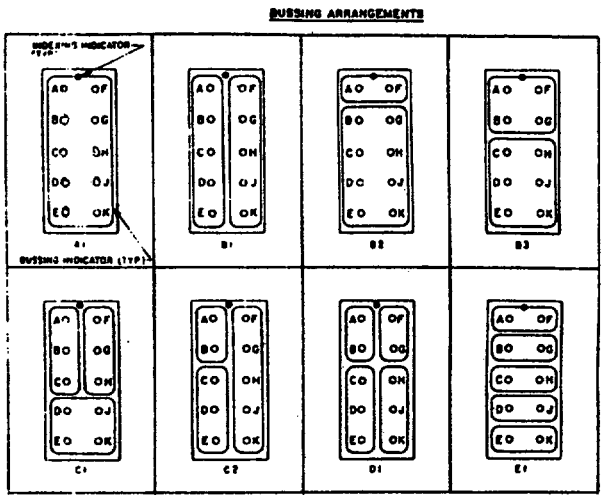

MODULE BLOCK

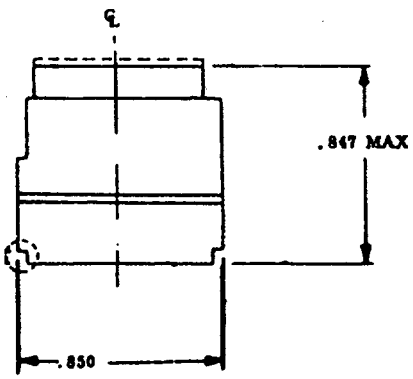




TABLE I.

PART NUMBER	CONSISTS OF MODULE BLOCK AND	
	CONTACTS PART NUMBER	SEALING PLUGS PART NUMBER
M81714/2-D**	M39029/1-101	MS27488-20

**BUSSING ARRANGEMENT


SUPERSEDES PAGE 541.4 OF 18 JULY 1984


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM
MODULES, FEEDBACK TYPE, SIZE 16


MIL-T-81714/3

BUSSING ARRANGEMENTS

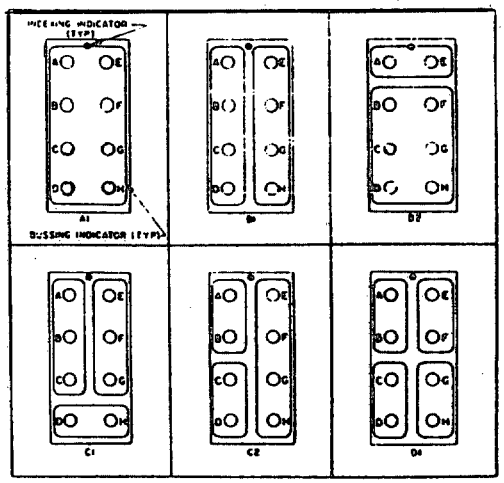

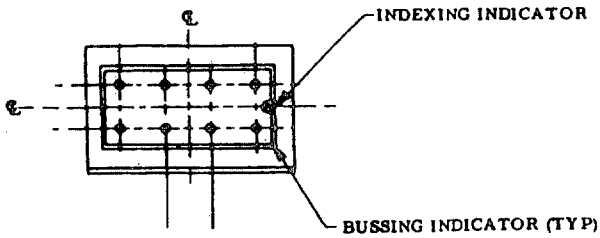

MODULE BLOCK

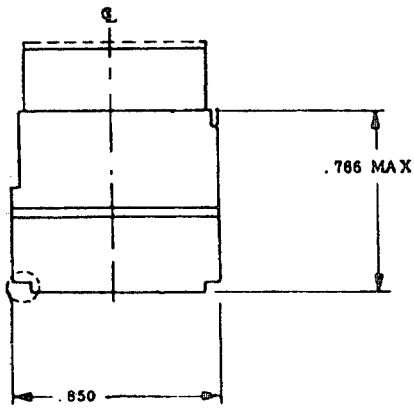

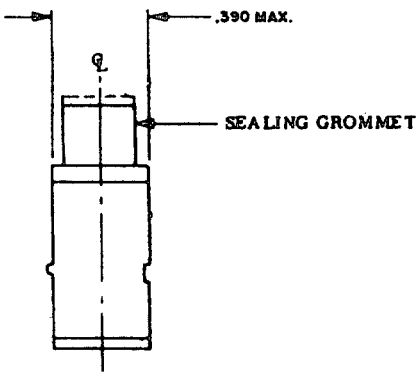


TABLE I. PART NUMBER

PART NUMBER	CONSISTS OF MODULE BLOCK AND	
	CONTACTS PART NUMBER	SEALING PLUG PART NUMBER
M81714/3-D**	M39029/1-102	MS27488-16

**BUSSING ARRANGEMENT

SUPERSEDES PAGE 541.5 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM
MODULES, FEEDBACK TYPE, SIZE 12

MIL-T-81714/4

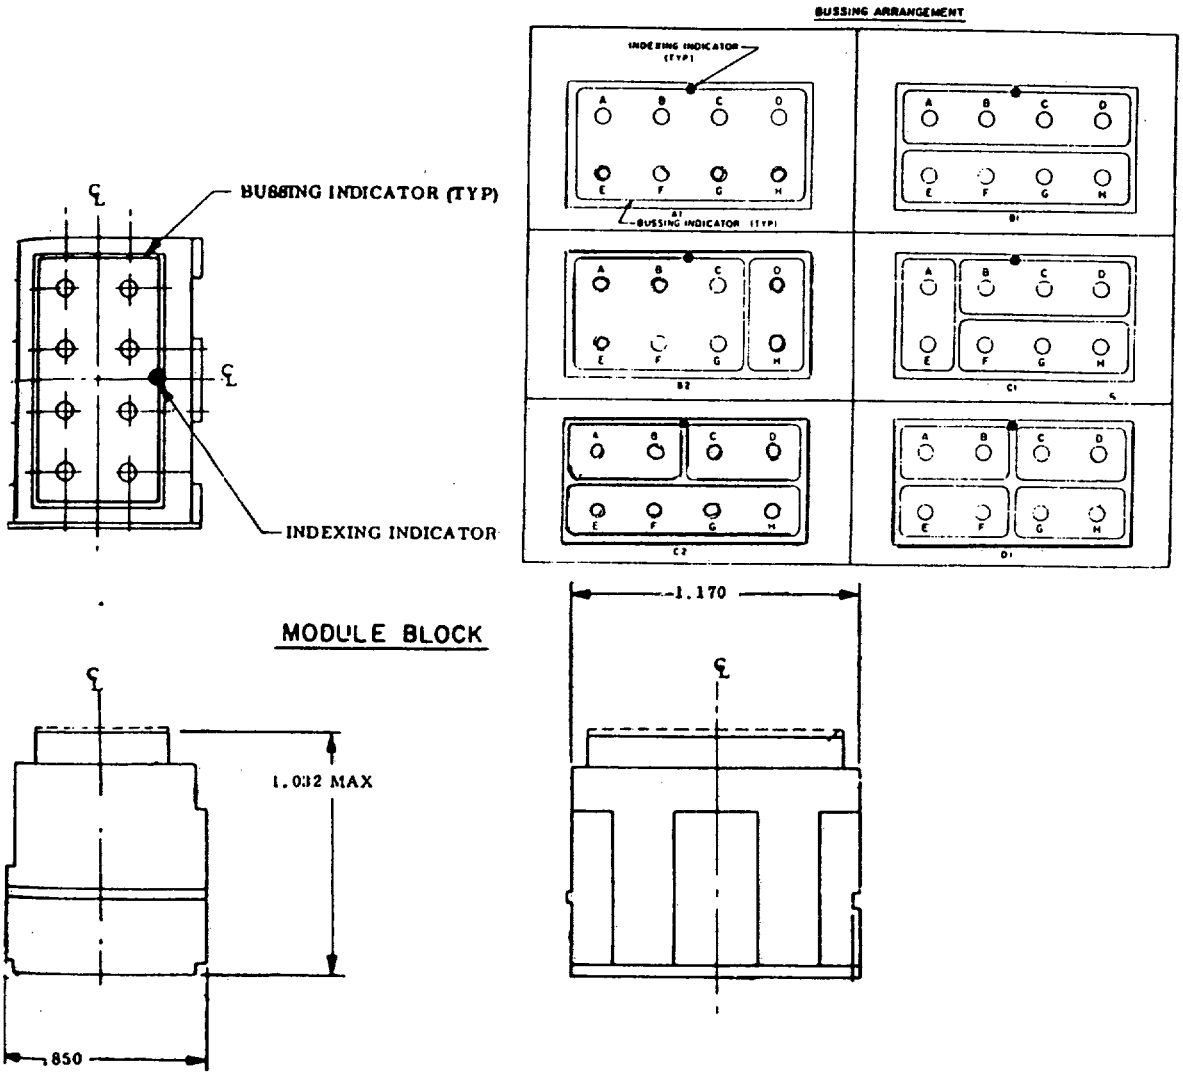


TABLE I. PART NUMBER

PART NUMBER	CONSISTS OF MODULE BLOCK AND	
	CONTACTS PART NUMBER	SEALING PLUGS PART NUMBER
M81714/4-D**	M39029/1-103	MS27488-12

**BUSSING ARRANGEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM
MODULES, FEEDTHRU TYPE, SIZE 22

MIL-T-81714/6

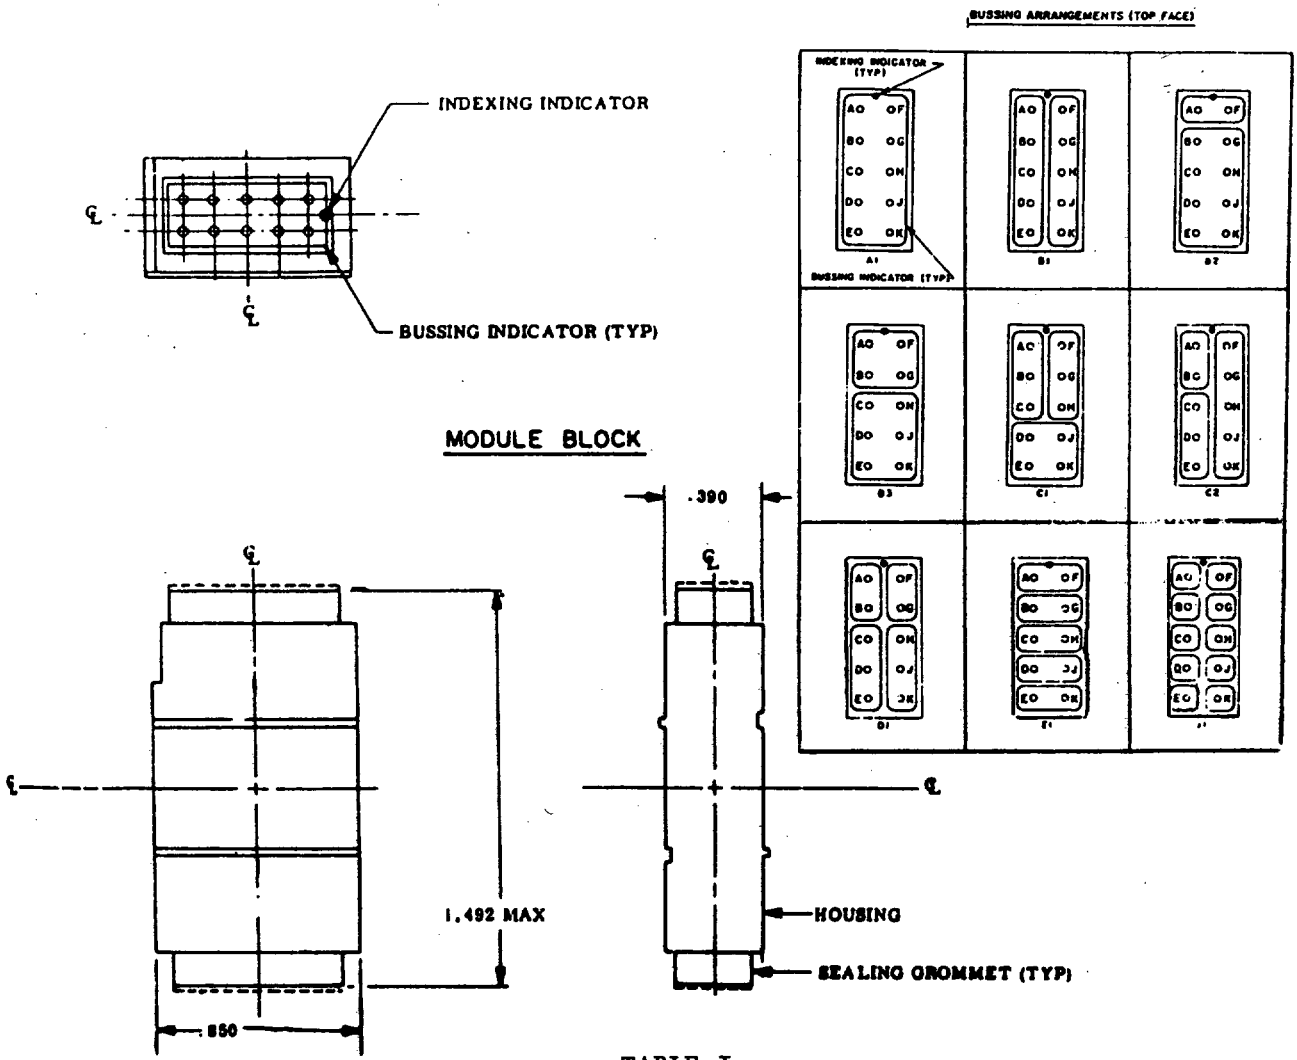


TABLE I.

PART NUMBER	CONSISTS OF MODULE BLOCK AND	
	CONTACTS PART NUMBER	SEALING PLUGS PART NUMBER
M81714/6-D**	M39029/1-100	MS27488-20


**BUSSING ARRANGEMENT


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM
MODULES, FEEDTHRU TYPE, SIZE 20

MIL-T-81714/7

BUSSING ARRANGEMENTS

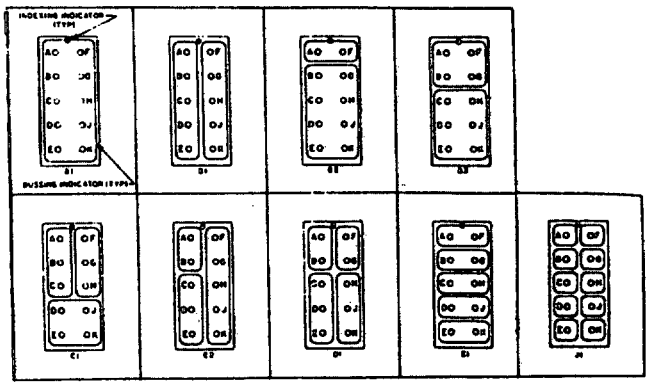

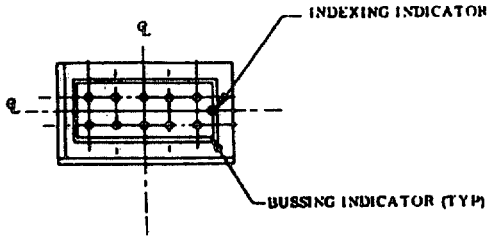

MODULE BLOCK

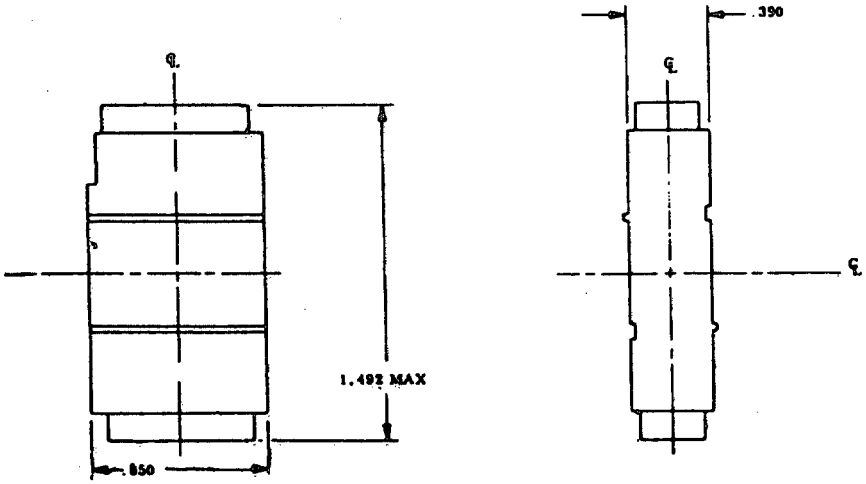


TABLE I. PART NUMBER

PART NUMBER	CONSISTS OF MODULE BLOCK AND		INSERTION/ EXTRACTION TOOL PART NUMBER
	CONTACTS PART NUMBER	SEALING PLUGS PART NUMBER	
M81714/7-D**	M39029/1-101	MS27488-20	M81969/14-20 OR M81969/8-06


** BUSSING ARRANGEMENT


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM
MODULES, FEEDTHRU TYPE, SIZE 16


MIL-T-81714/8

BUSSING ARRANGEMENT

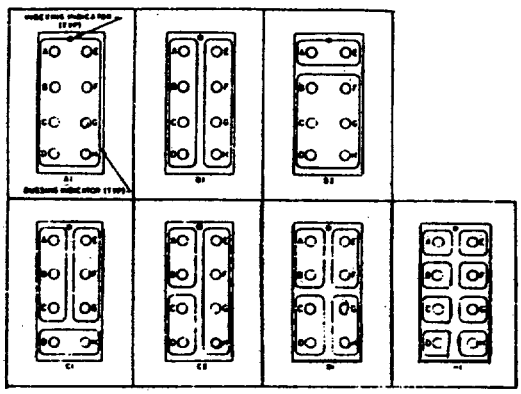

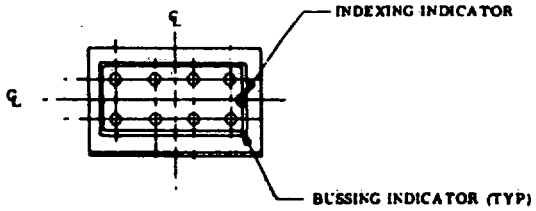

MODULE BLOCK

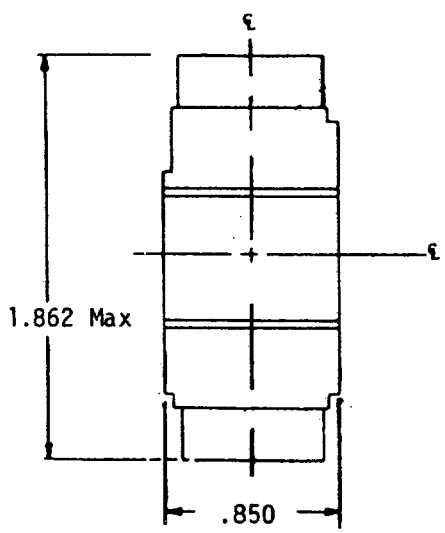

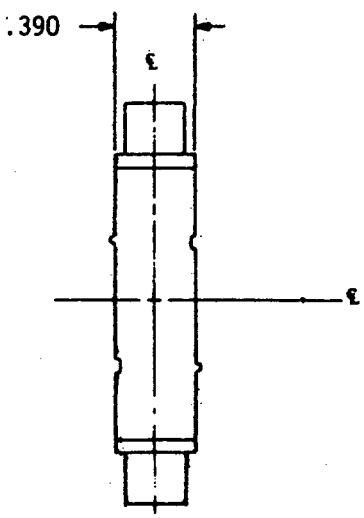


TABLE I. PART NUMBER


PART NUMBER	CONSISTS OF MODULE BLOCK AND		INSERTION/ EXTRACTION TOOL PART NUMBER
	CONTACTS PART NUMBER	SEALING PLUGS PART NUMBER	
M81714/8-D**	M39029/1-102	MS27488-16	M81969/14-03 OR M81969/8-08


**BUSSING ARRANGEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM
MODULES, FEEDTHRU TYPE, SIZE 12


MIL-T-81714/9

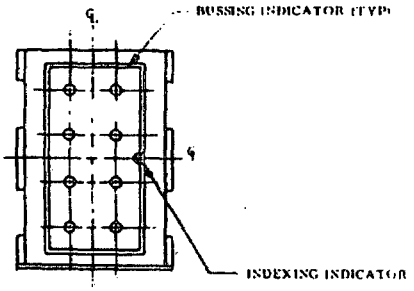

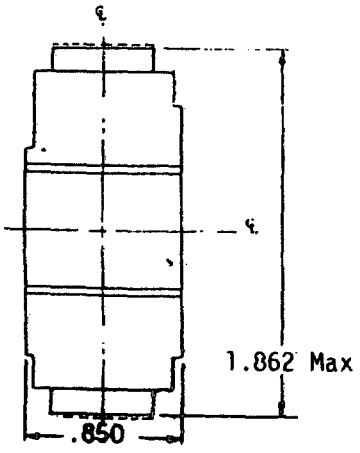

BUSSING ARRANGEMENTS (TOP FACE)

MODULE BLOCK

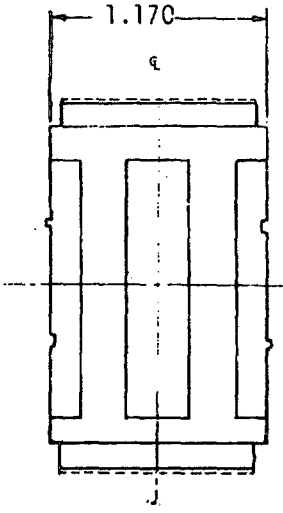

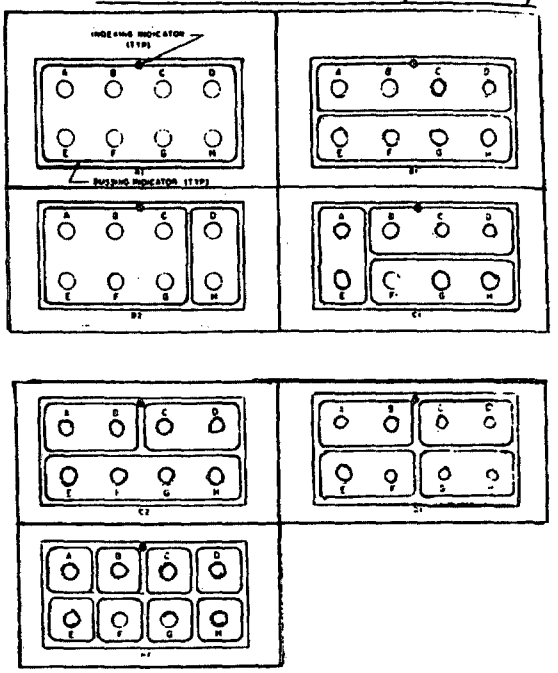


TABLE I. PART NUMBER


PART NUMBER	CONSISTS OF MODULE BLOCK AND		INSERTION/ EXTRACTION TOOL PART NUMBER
	CONTACTS PART NUMBER	SEALING PLUGS PART NUMBER	
M81714/9-D**	M39029/1-103	MS27488-12	M81969/14-04 OR M81969/8-10

**BUSSING ARRANGEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL JUNCTION SYSTEM
SPLICE, SINGLE

MIL-T-81714/11

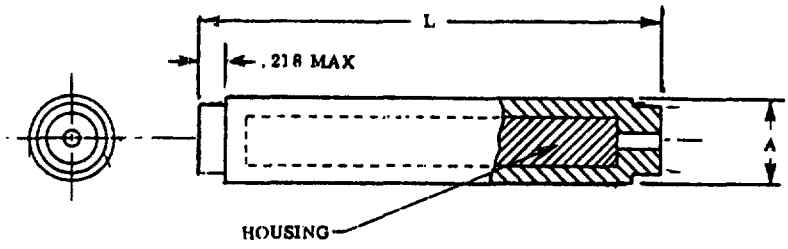

SINGLE SPLICE BODY

TABLE I. IN-LINE JUNCTION

PART NUMBER	SPLICE CONSISTS OF			INSTALLING REMOVAL TOOL
	BODY		CONTACTS	
	A DIA	L MAX	PART NUMBER	
M81714/11-22D	.250	1.552	M39029/1-100	M81969/14-02
M81714/11-20D	.250	1.552	M39029/1-101	M81969/14-02
M81714/11-16D	.281	1.922	M39029/1-102	M81969/14-03
M81714/11-12D	.344	1.922	M39029/1-103	M81969/14-04

SUPERSEDED PAGE 549.1 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINALS, LUG AND SPLICES, CONDUCTOR, CRIMP STYLE, COPPER
INSULATED, RECTANGULAR TONGUE,
FOR THIN WALL WIRE, TYPE II CLASS I
FOR 105°C TOTAL CONDUCTOR TEMPERATURE

MIL-T-7928/2

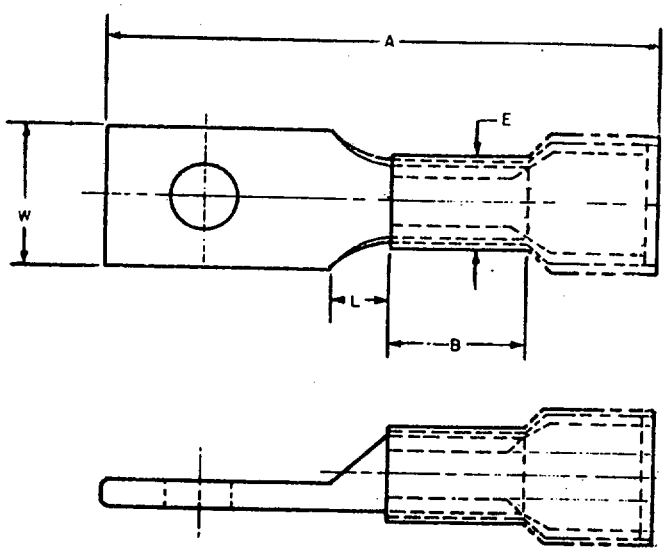


TABLE I. PART NO., DIMENSIONS, COLOR

PART NO. M7928/2-	WIRE. SIZE	DIMENSIONS STUD SIZE	A MAX.	B MIN.	E DIA	L MAX	W	INSUL. SLEEVE COLOR	WIRE SIZE COLOR
1	22	4 (.112)	.842	.156	.215	.125	.237	RED	GREEN
2		4 (.112)	1.061		.190	.156			
3		5 (.125)	.905			.125	.277		
4		6 (.138)	1.061			.156	.237		
5		6 (.138)	1.155			.250	.302		
6		8 (.164)							
7		8 (.164)	1.405			.281	.390		
8	20	4 (.112)	.842	.156	.215	.125	.237	RED	RED
9		4 (.112)	1.061		.190	.156			
10		5 (.125)	.905			.125	.277		
11		6 (.138)	1.061			.156	.237		
12		6 (.138)	1.155			.250	.302		
13		8 (.164)							
14		8 (.164)	1.405			.281	.390		

563.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINALS, LUG AND SPLICES, CONDUCTOR, CRIMP STYLE, COPPER
INSULATED, RECTANGULAR TONGUE,
FOR THIN WALL WIRE, TYPE II CLASS I
FOR 105°C TOTAL CONDUCTOR TEMPERATURE

MIL-T-7928/2

TABLE I. PART NO., DIMENSIONS, COLOR

PART NO. M7928/2-	WIRE. SIZE	STUD SIZE	DIMENSIONS A MAX.	B MIN.	E DIA	L MAX	W	INSUL. SLEEVE COLOR	WIRE SIZE COLOR
15	18	4 (.112)	.842	.156	.215	.125	.237	RED	WHITE
16		4 (.112)	1.061		.190	.156			
17		5 (.125)	.905			.125	.277		
18		6 (.138)	1.061			.156	.237		
19		6 (.138)	1.155			.250	.302		
20		8 (.164)							
21		8 (.164)	1.405			.281	.390		
22	16	4 (.112)	.842	.156	.240	.125	.237	BLUE	BLUE
23		4 (.112)	1.061		.210	.156			
24		5 (.125)	.905			.125	.277		
25		6 (.138)	1.061			.156	.237		
26		6 (.138)	1.155			.250	.302		
27		8 (.164)							
28		8 (.164)	1.405			.281	.390		
29	14	4 (.112)	.842	.156	.240	.125	.237	BLUE	GREEN
30		4 (.112)	1.061		.210	.156			
31		5 (.125)	.905			.125	.277		
32		6 (.138)	1.061			.156	.237		
33		6 (.138)	1.155			.250	.302		
34		8 (.164)							
35		8 (.164)	1.405			.281	.390		
36	12	4 (.112)	1.062	.234	.300	.125	.237	YELLOW	YELLOW
37		4 (.112)	1.281		.275	.156			
38		5 (.125)	1.124			.125	.277		
39		6 (.138)	1.281			.156	.237		
40		6 (.138)	1.359			.250	.302		
41		8 (.164)							
42		8 (.164)	1.609			.281	.390		
43	10	4 (.112)	1.062	.234	.300	.125	.237	YELLOW	BROWN
44		4 (.112)	1.281		.275	.156			
45		5 (.125)	1.124			.125	.277		
46		6 (.138)	1.281			.156	.237		
47		6 (.138)	1.359			.250	.302		
48		8 (.164)							
49		8 (.164)	1.609			.281	.390		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RECTANGULAR TONGUE, TYPE I, CLASS 1
FOR 105° C TOTAL CONDUCTOR TEMPERATURE

MS17143

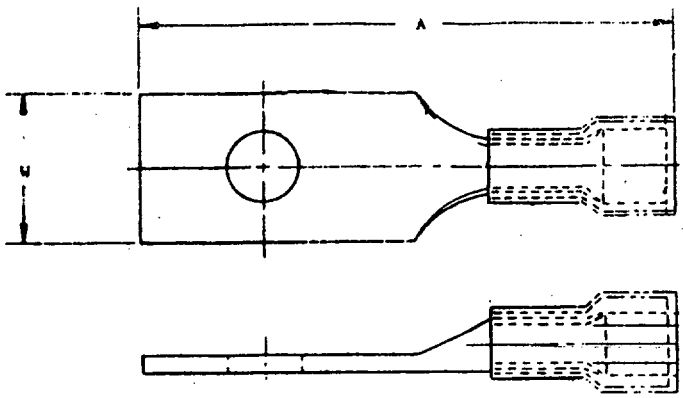


TABLE I. TYPE DESIGNATOR AND CHARACTERISTICS.

PART NUMBER MS17143-	WIRE SIZE AWG	STUD SIZE (DEC)	DIMENSIONS A(MAX)	DIMENSIONS W(MAX)	INSULATION SLEEVE COLOR
1	22-18	.164	1.359	.390	RED
2	16-14				BLUE
3	12-10		1.531		YELLOW
4	22-18	.138	1.109	.302	RED
5	16-14				BLUE
6	12-10		1.281		YELLOW
7	22-18	.164	1.109		RED
8	16-14				BLUE
9	12-10		1.281		YELLOW
10	22-18	.125	.859	.277	RED
11	16-14				BLUE
12	12-10		1.046		YELLOW
13	22-18	.138	1.015	.237	RED
14	16-14				BLUE
15	12-10		1.203		YELLOW
16	22-18		1.015		RED
17	16-14	.112			BLUE
18	12-10		1.203		YELLOW
19	22-18		.796		RED
20	16-14				BLUE
21	12-10		.984		YELLOW

SUPERSEDES PAGE 563.7 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL, LUG, CRIMP STYLE, COPPER, UNINSULATED, RING TONGUE, TYPE I, CLASS 1
FOR 175° C TOTAL CONDUCTOR TEMPERATURE

MS20659

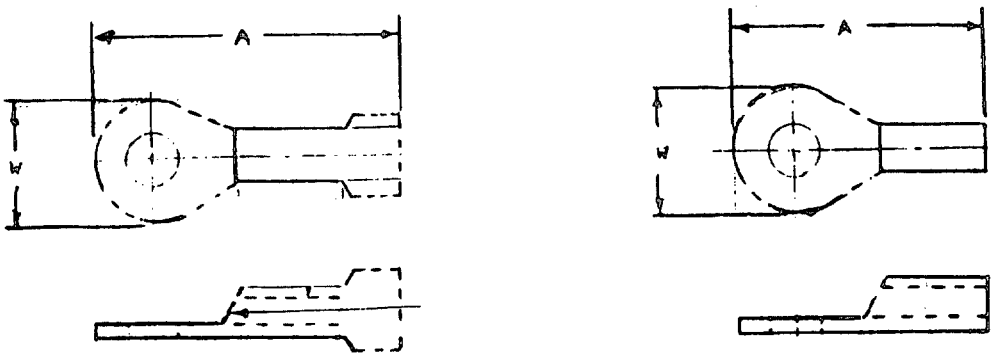


TABLE I. TYPE DESIGNATOR AND CHARACTERISTICS.

PART NUMBER MS20659-	WIRE SIZE AWG	STUD SIZE (DEC)	DIMENSIONS A(MAX)	DIMENSIONS W(MAX)
167	22-18	.086	.890	.260
138		.112		
101		.138		
102		.190	.986	.320
161		.312	1.187	.540
125		.375	1.308	
162		.500	1.530	.733
139	16-14	.112	.947	.266
103		.138	.955	.327
126			.947	.266
104		.190	.955	.327
163		.312	1.249	.540
127		.375	1.290	
164		.500	1.593	.733
165	12-10	.138	.955	.317
105		.190	.969	.391
106		.312	1.156	.547
128		.375	1.172	.598
166		.500	1.718	.733
140	8	.164	1.150	.429
107		.190		

SUPERSEDES PAGE 563.8 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL, LUG, CRIMP STYLE, COPPER, UNINSULATED, RING TONGUE, TYPE I, CLASS 1
FOR 175° C TOTAL CONDUCTOR TEMPERATURE

MS20659

TABLE I. TYPE DESIGNATOR AND CHARACTERISTICS. (CONT.)

PART NUMBER MS20659-	WIRE SIZE AWG	STUD SIZE (DEC)	DIMENSIONS	
			A(MAX)	W(MAX)
141	8	.250	1.219	.478
108		.312	1.297	.590
129		.375		
142		.500	1.545	.833
130	6	.190	1.312	.503
109		.250		
131		.312	1.437	.623
110		.375		
143		.500	1.676	.833
144	4	.190	1.400	.628
111		.250		
132		.312	1.489	.648
112		.375		
145		.500	1.721	.833

SUPERSEDES PAGE 563.9 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL, LUG, UNINSULATED, RECTANGULAR TONGUE, CRIMP STYLE, COPPER, TYPE I, CLASS 1 FOR 175 C TOTAL CONDUCTOR TEMPERATURE

MS21004

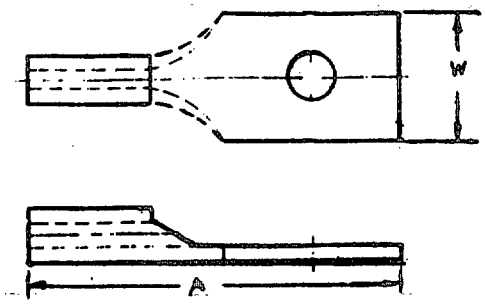


TABLE I. TYPE DESIGNATOR AND CHARACTERISTICS.

PART NUMBER MS21004-	WIRE SIZE AWG	STUD SIZE (DEC)	DIMENSIONS A(MAX)	DIMENSIONS W(MAX)
22	22-18	.086	.759	.182
1		.112	.826	.237
2		.125	.858	.277
3		.164	1.040	.302
4		.138		.302
5		.112	.980	.237
6		.138		.237
7		.164	1.290	.390
8	16-14	.112	.889	.237
9		.125	.921	.277
10		.164	1.075	.302
11		.138		.302
12		.112	1.043	.237
13		.138		.237
14		.164	1.294	.390
15	12-10	.112	1.014	.237
16		.125	1.146	.277
17		.164	1.200	.302
18		.138		.302
19		.112	1.168	.237
20		.138		.237
21		.164	1.419	.390

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RING TONGUE, BELL-MOUTHED, TYPE II, CLASS 1, FOR 105°C TOTAL CONDUCTOR TEMPERATURE

MS25036

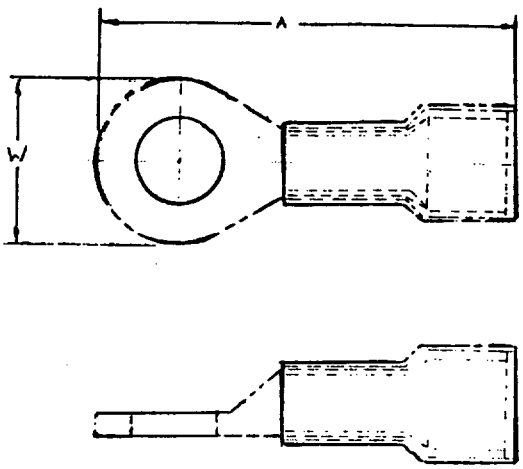


TABLE I. TYPE DESIGNATOR AND CHARACTERISTICS.

PART NUMBER MS25036-	WIRE SIZE AWG	STUD SIZE (DEC)	DIMENSIONS A(MAX)	DIMENSIONS W(MAX)	INSULATION SLEEVE COLOR
143	26-24	.086	.740	.210	YELLOW
144		.112	.755	.260	
145		.138	.855		
146		.164		.330	
147		.190	.865		
159	22-18	.086	.755	.230	RED
148		.112			
101		.138			
102			.865	.260	
149		.164	.910	.320	
103		.190	1.090		
150		.250		.473	
104		.3125			
105		.375	1.320	.540	
151		.500		.720	
152	16-14	.112	.774	.260	BLUE
106		.138			
107			.910	.317	
153		.164			
108		.190	.915		
154		.250	1.085	.473	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RING TONGUE, BELL-MOUTHED
TYPE II, CLASS 1, FOR 105°C TOTAL CONDUCTOR TEMPERATURE

MS25036

TABLE I. TYPE DESIGNATOR AND CHARACTERISTICS (CONT.).

PART NUMBER MS25036-	WIRE SIZE AWG	STUD SIZE (DEC)	DIMENSIONS A(MAX)	DIMENSIONS W(MAX)	INSULATION SLEEVE COLOR
109	16-14	.3125	1.085	.473	BLUE
110		.375	1.225	.540	
155		.500	1.320	.720	
111	12-10	.138	1.120	.380	YELLOW
156		.164			
157		.250	1.322	.536	
112		.190			
113		.3125			
114		.375	1.414	.598	
158		.500		.720	
115	8	.190	1.402	.429	RED
116		.250	1.466	.478	
117		.250	1.544	.590	
118		.375			
119	6	.190	1.599	.503	BLUE
120		.250			
121		.3125	1.762	.623	
122		.375			
123	4	.250	1.812	.570	YELLOW
124		.3125	1.879	.648	
125		.375			
126		.250	2.069	.783	RED
127		.375			
128		.500	2.269	.804	
129	1	.250	2.150	.783	CLEAR TO WHITE
130		.375			
131		.500	2.370	.887	
132	0	.250	2.401	.853	BLUE
133		.375			
134		.500	2.525	.903	
135	00	.3125	2.750	.956	YELLOW
136		.375			
137		.500			
138	000	.375	3.000	1.053	RED
139		.500			
140	0000	.375	3.330	1.148	BLUE
141		.500			

SUPRESEDES PAGE 563.12 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), STEEL, CORROSION RESISTING, PASSIVATED, UNC-2A

MS35307

TABLE I. PART NUMBERS AND CHARACTERISTICS (CONT.)

PART NUMBER MS35307	L	NOMINAL SIZE	THREADS PER INCH	DIMENSIONS (MAX)			TENSILE STRENGTH MIN
				D	F	H	
-361	1.125	3/8	16UNC-2A	.3750	.5625	.2430	6200
-362	1.250						
-363	1.375						
-364	1.500						
-365	1.750						
-366	2.000						
-367	2.250						
-368	2.500						
-369	2.750						
-370	3.000						
-371	3.250						
-372	3.500						
-373	3.750						
-374	4.000						
-375	4.250						
-376	4.500						
-377	4.750						
-378	5.000						
-379	.438	7/16	14UNC-2A	.4375	.6250	.2910	8500
-380	.500						
-381	.562						
-382	.625						
-383	.750						
-384	.875						
-385	1.000						
-386	1.125						
-387	1.250						
-388	1.375						
-389	1.500						
-390	1.750						
-391	2.000						
-392	2.250						
-393	2.500						
-394	2.750						
-395	3.000						
-396	3.250						
-397	3.500						
-398	3.750						
-399	4.000						
-400	4.250						
-401	4.500						
-402	4.750						
-403	5.000						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

SCREW, CAP, HEXAGON HEAD (FINISHED HEXAGON BOLT), STEEL, CORROSION RESISTING, PASSIVATED, UNC-2A

MS35307

TABLE I. PART NUMBERS AND CHARACTERISTICS (CONT.)

PART NUMBER MS35307	L	NOMINAL SIZE	THREADS PER INCH	DIMENSIONS (MAX)			TENSILE STRENGTH MIN
				D	F	H	
-404	.500	1/2	13UNC-2A	.5000	.7500	.3210	11300
-405	.562						
-406	.625						
-407	.750						
-408	.875						
-409	1.000						
-410	1.125						
-411	1.250						
-412	1.375						
-413	1.500						
-414	1.750						
-415	2.000						
-416	2.250						
-417	2.500						
-418	2.750						
-419	3.000						
-420	3.250						
-421	3.500						
-422	3.750						
-423	4.000						
-424	4.250						
-425	4.500						
-426	4.750						
-427	5.000						
-428	5.500						
-429	6.000						
-430	.562	9/16	12UNC-2A	.5625	.8125	.3710	14500
-431	.625						
-432	.750						
-433	.875						
-434	1.000						
-435	1.125						
-436	1.250						
-437	1.375						
-438	1.500						
-439	1.750						
-440	2.000						
-441	2.250						
-442	2.500						
-443	2.750						
-444	3.000						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

SCREW, MACHINE, PAN-HEAD, CROSS-RECESSED, CORROSION RESISTING STEEL, UNF-2A

MS51958

PART NUMBER EXAMPLE: MS51958-1B

MS51958 -1 B

MILITARY STANDARD

DASH NUMBER

COATING " " = CLEANED AND DESCALED
"B" = BLACK OXIDE

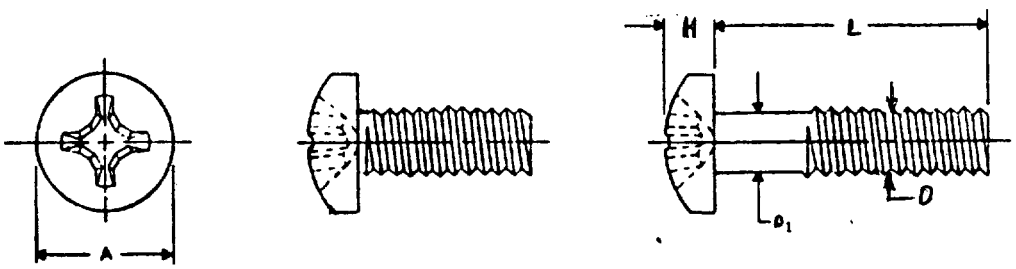


TABLE I. PART NUMBERS AND CHARACTERISTICS

PART NUMBER MS51958	L	D NOMINAL SIZE	THREADS PER INCH	DIMENSIONS (MAX)			TENSILE STRENGTH MIN
				D1	A	H	
-120 -121 -122 -123 -124 -125 -126	1/8 3/16 1/4 5/16 3/8 7/16 1/2	.060	80UNF-2A	.0600	.116	.044	140
-1 -2 -3 -4 -5 -6 -7 -8 -9	1/8 3/16 1/4 5/16 3/8 7/16 1/2 5/8 3/4	.086	64UNF-2A	.0860	.167	.062	310

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

SCREW, MACHINE, PAN-HEAD, CROSS-RECESSED, CORROSION RESISTING STEEL, UNF-2A

MS51958

TABLE I. PART NUMBERS AND CHARACTERISTICS (CONT.)

PART NUMBER MS51958	L	D NOMINAL SIZE	THREADS PER INCH	DIMENSIONS (MAX)			TENSILE STRENGTH MIN
				D1	A	H	
-11	1/8	.112	48UNF-2A	.1120	.219	.080	530
-12	3/16						
-13	1/4						
-14	5/16						
-15	3/8						
-16	7/16						
-17	1/2						
-18	5/8						
-19	3/4						
-20	7/8						
-21	1						
-24	1/8	.138	40UNF-2A	.1380	.270	.097	810
-25	3/16						
-26	1/4						
-27	5/16						
-28	3/8						
-29	7/16						
-30	1/2						
-31	5/8						
-32	3/4						
-33	7/8						
-34	1						
-35	1-1/4						
-36	1-1/2						
-37	1-3/4						
-38	2						
-39	1/8	.164	36UNF-2A	.1640	.322	.115	1180
-40	3/16						
-41	1/4						
-42	5/16						
-43	3/8						
-44	7/16						
-45	1/2						
-46	5/8						
-47	3/4						
-48	7/8						
-49	1						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82 , CROSS-RECESSED CORROSION RESISTING STEEL, UNC-2A

MS51959

TABLE I. PART NUMBERS AND CHARACTERISTICS (CONT.)

PART NUMBER MS51959	L	D NOMINAL SIZE	THREADS PER INCH	DIMENSIONS (MAX)			TENSILE STRENGTH MIN
				D1	A	H	
-51 -52 -53 -57	1-1/2 1-3/4 2 3	.164	32UNC-2A	.1640	.332	.100	1120
-59 -60 -61 -62 -63 -64 -65 -66 -67 -68 -69 -70 -71 -72 -73	1/4 5/16 3/8 7/16 1/2 5/8 3/4 7/8 1 1-1/4 1-1/2 1-3/4 2 2-1/4 2-1/2	.190	24UNC-2A	.1900	.385	.116	1400
-76 -77 -78 -79 -80 -81 -82 -83 -84 -85 -86 -87 -88 -89	5/16 3/8 7/16 1/2 5/8 3/4 7/8 1 1-1/4 1-1/2 1-3/4 2 2-1/4 2-1/2	.250	20UNC-2A	.2500	.507	.153	2540

SUPERSEDES PAGE 611.25 OF JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

SCREW, MACHINE-FLAT COUNTERSUNK HEAD, 82 , CROSS-RECESSED CORROSION RESISTING STEEL, UNC

MS51959

TABLE I. PART NUMBERS AND CHARACTERISTICS (CONT.)

PART NUMBER MS51959	L	D NOMINAL SIZE	THREADS PER INCH	DIMENSIONS (MAX)			TENSILE STRENGTH MIN
				D1	A	H	
-92	3/8	.3125	18UNC-2A	.3125	.635	.191	4190
-93	7/16						
-94	1/2						
-95	5/8						
-96	3/4						
-97	7/8						
-98	1						
-99	1-1/4						
-100	1-1/2						
-101	1-3/4						
-102	2						
-103	2-1/4						
-104	2-1/2						
-107	1/2	.375	16UNC-2A	.3750	.762	.230	9200
-108	5/8						
-109	3/4						
-110	7/8						
-111	1						
-112	1-1/4						
-113	1-1/2						
-114	1-3/4						
-115	2						
-116	2-1/4						
-117	2-1/2						
-118	2-3/4						
-119	3						

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BOLT, INTERNAL WRENCHING, 160 KSI Ftu

MIL-B-7838

SCOPE: THIS SECTION COVERS INTERNAL WRENCHING BOLTS INTENDED FOR USE IN APPLICATIONS REQUIRING 160 KSI (THOUSANS POUNDS PER SQUARE INCH TENSILE STRENGTH, 96,000 PSI SHEAR STRENGTH, OR HIGH FATIGUE STRENGTH, OR COMBINATIONS THEREOF.

PART NUMBER EXAMPLE: MS20004-16


MS20004 - 16

MILITARY STANDARD

HEAD "-" = UNDRILLED
"H" = DRILLED

GRIP LENGTH DASH NO.
SEE MS200024 - MS20024 SHEET

MS20004 THRU MS20024

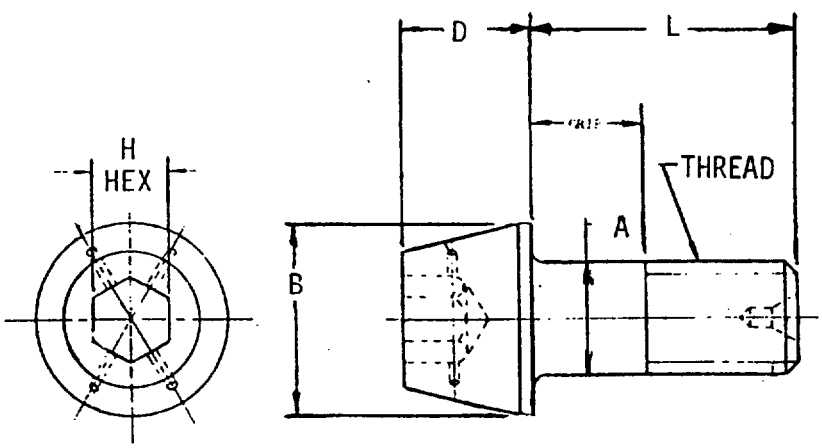

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BOLT, INTERNAL WRENCHING, 160 KSI Ftu AND 96 KSI Fsu

MS20004 THRU MS20024

TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. MS200__	THREAD PER MIL-S-7742 UNF-3A	DIMENSIONS				ULTIMATE TENSILE STRENGTH LBS-MIN
		B DIA MAX	A DIA MAX	D DIA MAX	H HEX	
04	1/4-28	.438	.2492	.250	.1900	6190
05	5/16-24	.531	.3117	.312	.2210	9820
06	3/8-24	.649	.3742	.375	.3150	15200
07	7/16-20	.750	.4367	.438	.3150	20600
08	1/2-20	.828	.4991	.500	.3785	27400
09	9/16-18	.938	.5616	.562	.4410	34800
10	5/80-18	1.050	.6240	.625	.5035	43600
12	3/4-16	1.230	.7488	.750	.5660	63200
14	7/8-14	1.438	.8737	.875	.6295	86100
16	1 -14NS-3A	1.625	.9985	1.000	.7547	112000
18	1-1/8-12	1.875	1.124	1.125	.7547	114000
20	1-1/4-12	2.125	1.249	1.250	1.005	144000
22	1-3/8-12	2.313	1.374	1.375	1.131	180000
24	1-1/2-12	2.500	1.499	1.500	1.256	263000

TABLE II. DASH NO., GRIP RANGE

PART NO. RANGE MS200__	DASH NO. GRIP RANGE
04 - 08	16 - 96
09 - 17	16 - 112
18	18 - 128
20	20 - 128
22	22 - 128
24	24 - 128

SEE MS20004 - MS20024 SHEET FOR SPECIFIC LENGTH VS. GRIP SIZE AND PART NO.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BOLT, TENSION, FLANGED STEEL, 450°F, EXTERNAL WRENCHING, SPLINE DRIVE, 180 KSI Ftu

MS21134

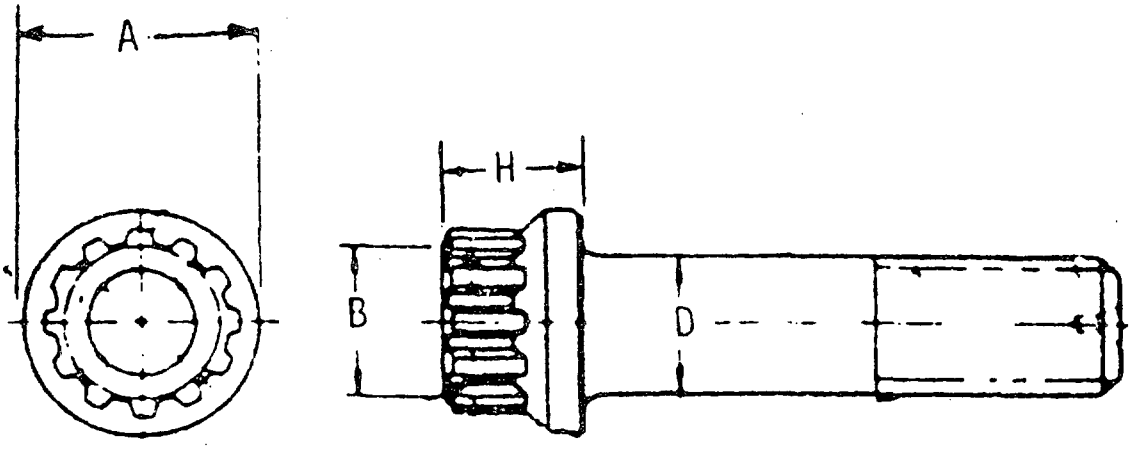


TABLE I. DIMENSIONS

PART NO. MS21134-	NOMINAL SIZE	THREAD PER MIL-S-8879 UNJF-3A	DIMENSIONS				ULTIMATE TENSILE STRENGTH LBS-MIN	DOUBLE SHEAR STRENGTH LBS-MIN
			A DIA MAX	B DIA MAX	D DIA MAX	H		
03	NO. 10	.1900-32	.359	.188	.1895	.205	3910	6100
04	1/4	.2500-28	.470	.250	.2495	.250	6980	10600
05	5/16	.3125-24	.585	.375	.3130	.312	11100	16600
06	3/8	.3750-24	.701	.438	.3745	.337	17100	23900
07	7/16	.4375-20	.817	.500	.4370	.393	23200	32500
08	1/2	.5000-20	.932	.562	.4995	.450	30900	42400
09	9/16	.5625-18	1.047	.625	.5615	.505	39200	53700
10	5/8	.6250-18	1.163	.688	.6240	.562	49100	66300
12	3/4	.7500-16	1.394	.812	.7490	.600	71000	96400
14	7/8	.8750-14	1.625	.938	.8740	.700	97000	129900
16	1	1.0000-12	1.856	1.062	.9990	.800	126000	169800
18	1-1/8	1.1250-12	2.067	1.250	1.1240	.900	162000	214700
20	1-1/4	1.2500-12	2.318	1.375	1.2490	1.000	202000	265100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BOLT, TENSION, STEEL, 450°F, EXTERNAL WRENCHING FLANGED, 12 POINT, 180 KSI Ftu

MS21250

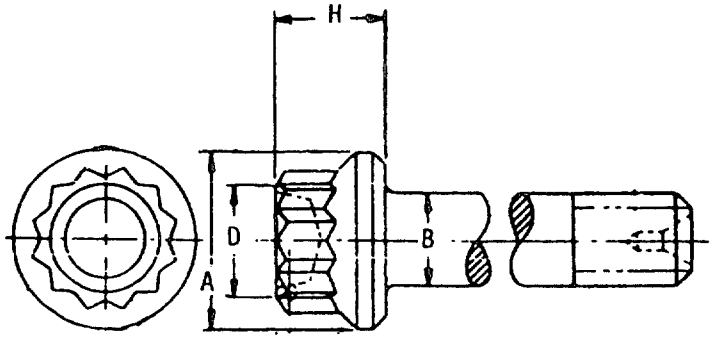


TABLE I. DIMENSIONS


PART NO. MS21250-	THREAD PER MIL-S-8879 UNJF-3A	DIMENSIONS A DIA MAX	B DIA MAX	D DIA MAX	H	ULTIMATE TENSILE STRENGTH LBS-MIN	DOUBLE SHEAR STRENGTH LBS-MIN
04	.2500-28	.438 .428	.2495 .2485	.312 .297	.300	6980	10600
05	.3125-24	.531 .521	.3120 .3110	.375 .360	.348	11100	16600
06	.3750-24	.649 .639	.3745 .3735	.437 .422	.388	17100	23900
07	.4375-20	.750 .740	.4370 .4360	.500 .485	.435	23200	32500
08	.5000-20	.828 .818	.4995 .4985	.562 .547	.504	30900	42400
09	.5625-18	.938 .928	.5615 .5605	.625 .610	.557	39200	53700
10	.6250-18	1.050 1.040	.6240 .6230	.687 .672	.618	49000	66300
12	.7500-16	1.230 1.220	.7490 .7480	.812 .797	.711	71100	95400
14	.8750-14	1.438 1.428	.8740 .8730	.937 .922	.808	97100	129900
16	1.0000-12	1.625 1.615	.9990 .9980	1.062 1.047	.923	126000	169600
18	1.1250-12	1.875 1.865	1.1240 1.1225	1.250 1.235	1.051	162000	214700
20	1.2500-12	2.125 2.115	1.2490 1.2475	1.312 1.297	1.155	202000	265100
22	1.3750-12	2.313 2.303	1.3740 1.3725	1.437 1.422	1.266	247000	320700
24	1.5000-12	2.500 2.490	1.4990 1.4975	1.625 1.610	1.434	296000	381700

Source: http://assist.daps.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

WASHER, FLAT - METAL, ROUND, GENERAL PURPOSE

MS15795

PART NUMBER: MS15795-801

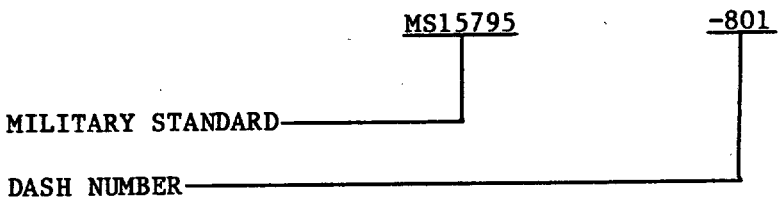

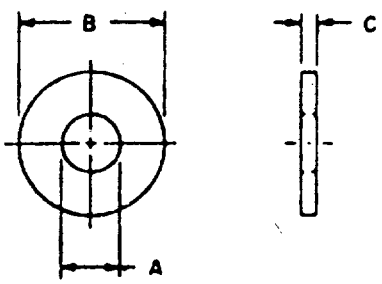


TABLE I. PART NUMBERS AND CHARACTERISTICS.

PART NUMBER MS15795-	DIMENSIONS		
	A	B	C MAX
801	.078	.188	.025
802	.094	.250	.025
806	.156	.375	.065
841	.188	.438	.065
842	.219	.500	.065
809	.250	.562	.080
810	.281	.625	.080
811	.312	.734	.080
812	.344	.688	.080
813	.375	.875	.104
814	.406	.812	.080
815	.438	1.000	.104
816	.469	.922	.080
817	.500	1.250	.104

SUPERSEDED PAGE 821.1 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

55

WASHER, FLAT - METAL, ROUND, GENERAL PURPOSE

MS15795

TABLE I. PART NUMBERS AND CHARACTERISTICS (CONT.)

PART NUMBER MS15795-	DIMENSIONS		
	A	B	C MAX
818	.531	1.062	.121
819	.562	1.375	.132
820	.656	1.469	.121
821	.688	1.750	.160
822	.812	1.469	.160
823	.812	2.000	.177
824	.938	1.750	.160
825	.938	2.250	.192
826	1.062	2.000	.160
827	1.062	2.500	.192
828	1.250	2.750	.192
829	1.375	3.000	.192
830	1.500	3.250	.213
831	1.625	3.500	.213
832	1.750	3.750	.213
833	1.875	4.000	.213
835	2.125	4.500	.213
836	2.375	4.750	.248
837	2.625	5.000	.280
838	2.875	5.250	.310
839	3.125	5.500	.327

SUPERSEDES PAGE 821.2 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

WASHER, LOCK-COUNTERSUNK, 80"-82", EXTERNAL TOOTH

MS35336

PART NUMBER: MS35336-5

MS35336 -5

MILITARY STANDARD

DASH NUMBER



ACCEPTABLE DESIGNS

TABLE I. PART NUMBERS AND CHARACTERISTICS

PART NUMBER MS35336- PASSIVATED	NOMINAL SIZE NO.		DIMINSIONS (MAX)	
			D	C
5	4	.112	.065	.019
11	6	.138	.092	.021
17	8	.164	.105	.021
23	10	.190	.099	.025
29	1/4	.250	.128	.025
35	5/16	.312	.192	.028
41	3/8	.375	.255	.034
47	7/16	.438	.270	.045
53	1/2	.500	.304	.045


821.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

WASHER, LOCK-SPRING, HELICAL, REGULAR (MEDIUM) SERIES

MS35338

PART NUMBER: MS35338-134

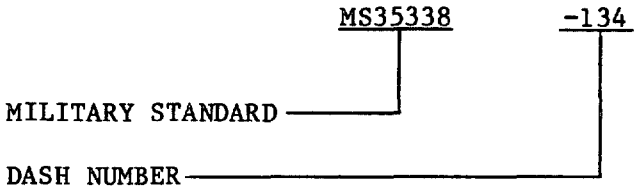

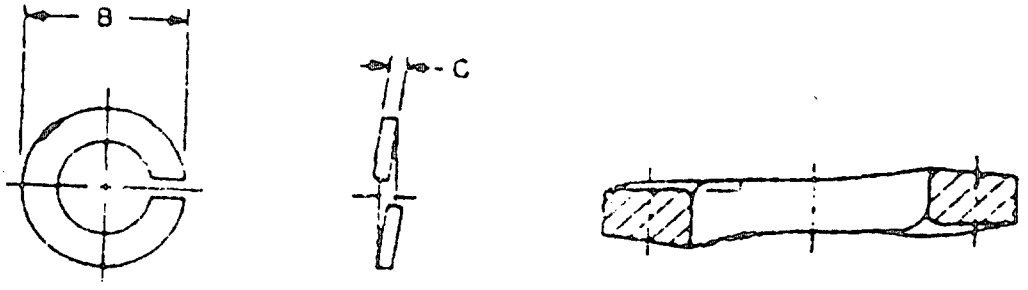


TABLE I. PART NUMBERS AND CHARACTERISTICS

PART NUMBER MS35338-	NOMINAL SIZE		DIMENSIONS	
	NO.		B MAX	C MIN
134	2	.086	.172	.020
135	4	.112	.209	.025
136	6	.138	.250	.031
137	8	.164	.293	.040
138	10	.190	.334	.047
139	1/4	.250	.489	.062
140	5/16	.312	.586	.078
141	3/8	.375	.683	.094
142	7/16	.438	.779	.109
143	1/2	.500	.873	.125
144	9/16	.562	.971	.141
145	5/8	.625	1.079	.156
146	3/4	.750	1.271	.188
147	7/8	.875	1.464	.219
148	1	1.000	1.661	.250
149	1-1/8	1.125	1.853	.281
150	1-1/4	1.250	2.045	.312
151	1-3/8	1.375	2.239	.344
152	1-1/2	1.500	2.430	.375

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

WASHER, LOCK-HELICAL, SPRING, HI-COLLAR

MS51848

PART NUMBER: MS51848-16

MS51848 -16

MILITARY STANDARD

DASH NUMBER

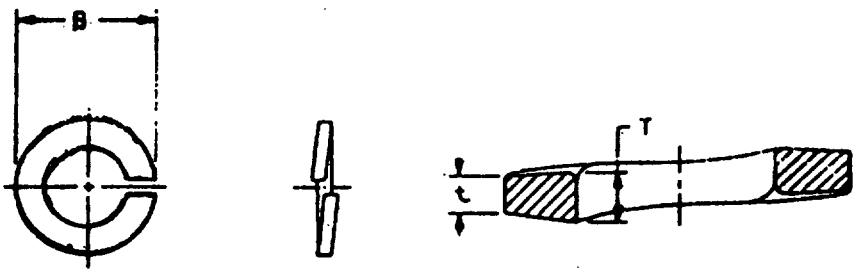


TABLE I. PART NUMBERS AND CHARACTERISTICS

PART NUMBER MS51848-	NOMINAL SIZE		DIMENSIONS	
			B MAX	T AVG MIN
41	NO. 0	.0600	.092	.016
43	2	.0860	.135	.020
45	4	.1120	.173	.022
47	6	.1380	.216	.030
48	8	.1640	.267	.047
49	10	.1900	.294	.047
50	1/4	.2500	.365	.078
51	5/16	.3120	.460	.093
52	3/8	.3750	.553	.125
53	7/16	.4380	.647	.140
54	1/2	.5000	.737	.172
55	5/8	.6250	.923	.203
16	3/4	.7500	1.111	.218
17	7/8	.8750	1.296	.234
18	1	1.0000	1.483	.250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BEARING, PLAIN, SELF-ALIGNING, SELF-LUBRICATING, LOW SPEED, WIDE, CHAMFERED OUTER RING

MS14102

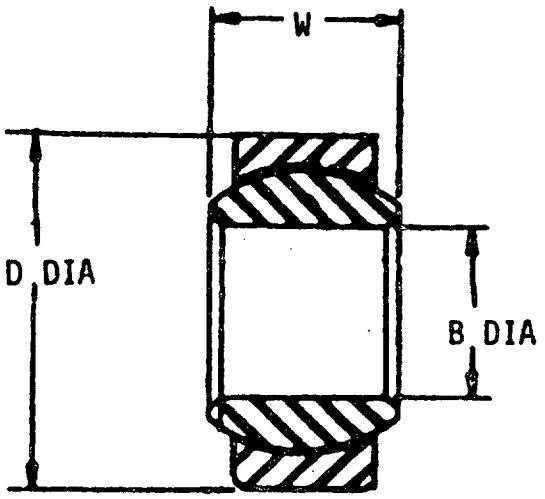


TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. MS14102-	DIMENSIONS			STATIC LIMIT LOAD		OSCIL-LATING LOAD LB
	B	D	W	RADIAL LB	AXIAL LB	
3	.1900	.6250	.437	2500	1770	4900
4	.2500	.6250	.437	5500	1770	4900
5	.3125	.6875	.437	9400	1640	6050
6	.3750	.8125	.500	13700	2630	8310
7	.4375	.9375	.562	20700	3650	11750
8	.5000	1.0000	.625	21400	4970	14950
9	.5625	1.1250	.687	26600	5370	18100
10	.6250	1.1875	.750	29000	6130	20250
12	.7500	1.3750	.875	37000	7730	26200
14	.8750	1.6250	.875	65200	10800	33600
16	1.0000	2.1250	1.375	104000	19300	56250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BEARING, PLAIN, SELF-ALIGNING, SELF-LUBRICATING, LOW SPEED, WIDE, GROOVED OUTER RING

MS14103

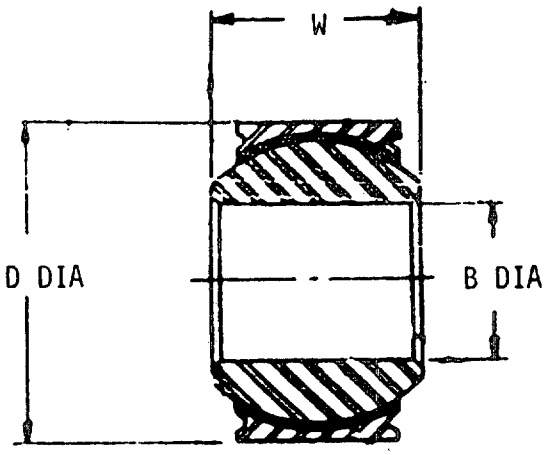


TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. MS14103-	DIMENSIONS			STATIC LIMIT LOAD		OSCIL-LATING LOAD LB
	B	D	W	RADIAL LB	AXIAL LB	
3	.1900	.6250	.437	2500	1770	4900
4	.2500	.6250	.437	5500	1770	4900
5	.3125	.6875	.437	9400	1640	6050
6	.3750	.8125	.500	13700	2630	8310
7	.4375	.9375	.562	20700	3650	11750
7A	.4375	.9062	.562	19700	3650	11750
8	.5000	1.0000	.625	21400	4970	14950
9	.5625	1.1250	.687	26600	5370	18100
10	.6250	1.1875	.750	29000	6130	20250
12	.7500	1.3750	.875	37000	7730	26200
14	.8750	1.6250	.875	65200	10800	33600
16	1.0000	2.1250	1.375	104000	19300	56250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BEARING, PLAIN, SELF-ALIGNING, SELF-LUBRICATING, LOW SPEED, NARROW, CHAMFERED OUTER RING

MS14104

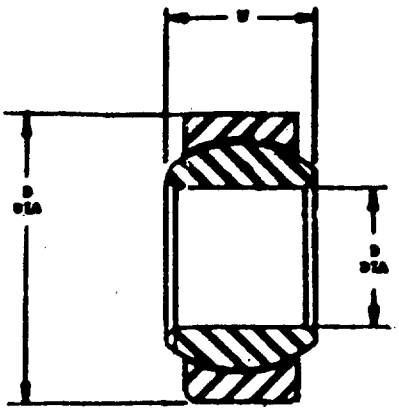


TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. MS14104-	DIMENSIONS			STATIC LIMIT LOAD		OSCIL-LATING LOAD LB
	B	D	W	RADIAL LB	AXIAL LB	
3	.1900	.5625	.281	3975	150	1500
4	.2500	.6562	.343	6040	430	3320
5	.3125	.7500	.375	8750	700	5460
6	.3750	.8125	.406	10540	1100	6600
7	.4375	.9062	.437	13200	1400	8050
8	.5000	1.0000	.500	17900	2100	10400
9	.5625	1.0937	.562	23200	3680	13000
10	.6250	1.1875	.625	30500	4720	16450
12	.7500	1.4375	.750	46400	6750	23600
14	.8750	1.5625	.875	62200	9350	30250
16	1.0000	1.7500	1.000	82200	12160	38000


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BEARINGS, PLAIN, SELF-ALIGNING (BeCu BALL, CRES RACE)

MIL-B-81936

SCOPE: THIS SECTION COVERS AIRFRAME PLAIN SPHERICAL BEARINGS UTILIZING A BERYLLIUM-COPPER BALL AND CORROSION RESISTANT STEEL OUTER RACE FOR USE BETWEEN -65°F AND +350°F. THESE BEARINGS ARE INTENDED FOR USE IN AIRFRAME POWER-ACTUATED SYSTEMS DEVELOPING HIGH OSCILLATORY LOADS WHERE MODERATE FRICTION IS NOT OBJECTIONABLE AND WHERE RELUBRICATION PROVISIONS ARE AVAILABLE.

PART NUMBER EXAMPLE: M81936/1-4R

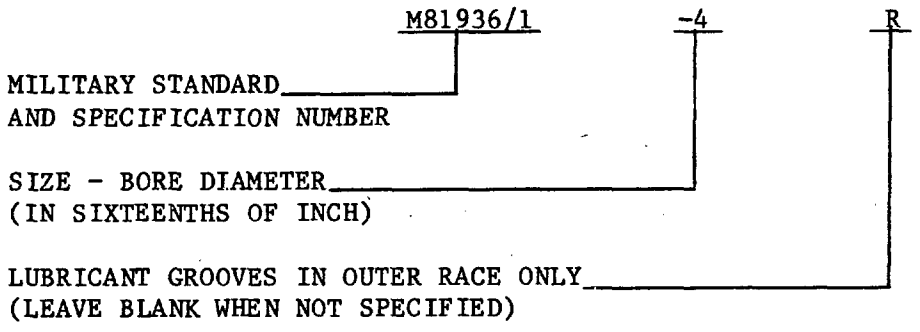


SUPERSEDES PAGE 857.1 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BEARING, PLAIN, SELF-ALIGNING, BeCu BALL, CRES RACE (WITH STACKING GROOVE)

MIL-B-81936/1

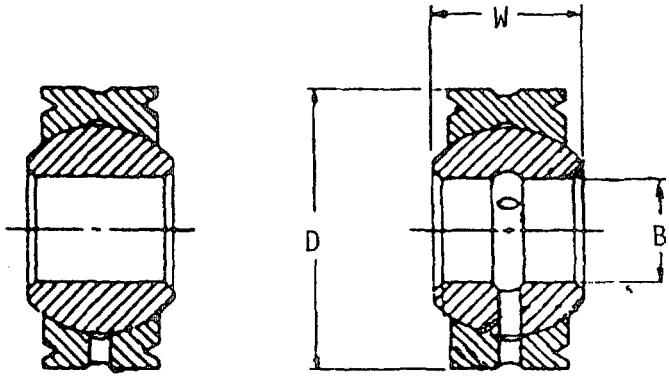

M81936/1( )R M81936/1( )

TABLE I. DIMENSIONS AND CHARACTERISTICS


PART NO. * M81936/1-	DIMENSIONS			BALL DIA. MAX	STATIC LIMIT LOAD	
	B	D DIA.	W		RADIAL LB	AXIAL LB
4	.2500	.6562	.343	.501	6330	1930
5	.3125	.7500	.375	.563	8460	2450
6	.3750	.8125	.406	.657	11400	3090
7	.4375	.9062	.437	.719	14800	3740
8	.5000	1.0000	.500	.814	20400	4860
9	.5625	1.0937	.562	.876	26700	6100
10	.6250	1.1875	.625	.969	33100	8080
12	.7500	1.4375	.750	1.188	50000	11440
13	.8125	1.5625	.812	1.282	59000	13800
14	.8750	1.6562	.875	1.376	70300	16160
16	1.0000	1.8750	1.000	1.563	77700	20850
18	1.1250	2.1250	1.125	1.751	121500	26740
20	1.2500	2.3125	1.250	1.938	152000	33065
22	1.3750	2.5625	1.375	2.157	186000	40120
24	1.5000	2.8125	1.500	2.345	224000	47820

* LUBE GROOVES AND OIL HOLES IN BALL AND RACE.
ADD "R" WHEN LUBE GROOVES AND OIL HOLES IN RACE ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

BEARING, PLAIN, SELF-ALIGNING, BeCu BALL, CRES RACE

MIL-B-81936/2

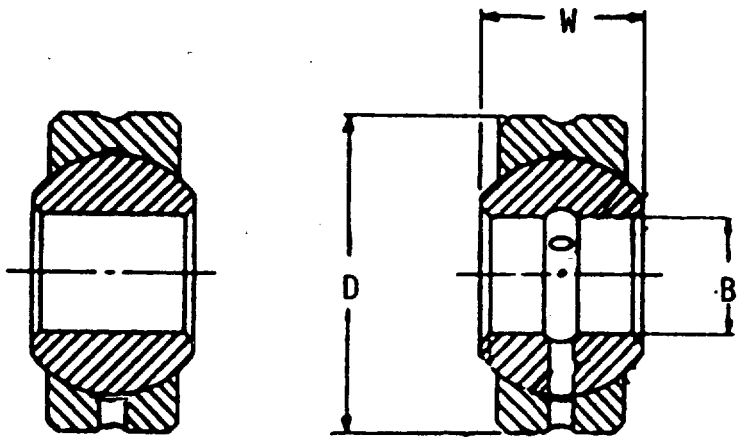

M81936/2( )R M81936/2( )

TABLE I. DIMENSIONS AND CHARACTERISTICS

PART NO. * M81936/2-	DIMENSIONS			BALL DIA. MAX	STATIC LIMIT LOAD	
	B	D DIA.	W		RADIAL LB	AXIAL LB
4	.2500	.6562	.343	.501	6330	1930
5	.3125	.7500	.375	.562	8460	2450
6	.3750	.8125	.406	.656	11400	3090
7	.4375	.9062	.437	.718	14800	3740
8	.5000	1.0000	.500	.813	20400	4860
9	.5625	1.0937	.562	.875	26700	6100
10	.6250	1.1875	.625	.968	33100	8080
12	.7500	1.4375	.750	1.187	50000	11440
13	.8125	1.5625	.812	1.281	59000	13800
14	.8750	1.6562	.875	1.375	70300	16160
16	1.0000	1.8750	1.000	1.562	77700	20850
18	1.1250	2.1250	1.125	1.750	121500	26740
20	1.2500	2.3125	1.250	1.937	152000	33065
22	1.3750	2.5625	1.375	2.156	186000	40120
24	1.5000	2.8125	1.500	2.344	224000	47820

* LUBE GROOVES AND OIL HOLES IN BALL AND RACE.
ADD "R" WHEN LUBE GROOVES AND OIL HOLES IN RACE ONLY.

SUPERSEDES PAGE 857.3 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

67

MIL-K-3926 MS91528

TABLE A. STYLE CODES

A	BAR WITH WHITE LINE
B	DIAL SKIRTED BAR WITH WHITE LINE AND WHITE ARROW
C	ROUND WITH WHITE DOT
D	SKIRTED ROUND
E	SKIRTED ROUND WITH WHITE DOT
F	ROUND DIAL SKIRT WITH WHITE ARROW
G	ROUND DIAL SKIRT, NO ARROW
H	ROUND DIAL SKIRT WITH SLOT
I	ROUND WITH FLUORESCENT DOT
J	SKIRTED ROUND FLUORESCENT DOT
K	SKIRTED POINTER
L	BAR WITH WHITE LINE
M	DIAL SKIRTED BAR WITH WHITE LINE
N	ROUND
O	ROUND DIAL SKIRT WITH BLACKLIGHTED WHITE ARROW
P	PLAIN POINTER
Q	ROUND DIAL SKIRT WITH FLUORESCENT ARROW
R	DIAL SKIRTED BAR WITH WHITE LINE AND SLOT
S	SPINNER
T	PLAIN POINTER WITH WHITE LINE
U	SKIRTED POINTER WITH WHITE LINE
V	DIAL SKIRTED BAR WITH SHITE LINE AND TRANSLUCENT ARROW
W	BAR WITH FLUORESCENT LINE
X	DIAL SKIRTED BAR WITH FLUORESCENT LINE AND FLUORESCENT ARROW
Y	DIAL SKIRTED BAR WITH FLUORESCENT LINE AND SLOT
Z	DIAL SKIRTED BAR WITH FLUORESCENT LINE AND TRANSLUCENT ARROW
AA	ROUND KNOB LOCK POINTER WITH WHITE LINE
AB	DIAL SKIRTED BAR WITH PHOSPHORESCENT LINE AND PHOSPHORESCENT ARROW
AC	DIAL SKIRTED BAR WITH PHOSPHORESCENT LINE AND SLOT
AD	DIAL SKIRTED BAR WITH PHOSPHORESCENT LINE AND TRANSLUCENT ARROW
BB	ROUND KNOB LOCK POINTER WITH FLORESCENT LINE
GG	ROUND BAR WITH WHITE LINE
HH	ROUND BAR RING SKIRTED WITH WHITE LINE
II	ROUND BAR DIAL SKIRTED WITH WHITE LINE
JJ	ROUND BAR WITH FLUORESCENT LINE
KK	ROUND BAR RING SKIRTED WITH FLUORESCENT LINE
LL	ROUND BAR DIAL SKIRTED WITH FLUORESCENT LINE
MM	ROUND WITH PHOSPHORESCENT DOT
NN	SKIRTED ROUND PHOSPHORESCENT DOT
OO	ROUND DIAL SKIRT WITH PHOSPHORESCENT ARROW
PP	ROUND BAR RING SKIRTED WITH PHOSPHORESCENT LINE
QQ	ROUND KNOB LOCK POINTER WITH PHOSPHORESCENT LINE
RR	PLAIN POINTER WITH PHOSPHORESCENT LINE
SC	SPINNER SLIP-CLUTCH WITH WHITE DOT
SE	SPINNER SLIP-CLUTCH WITH PHOSPHORESCENT DOT
SS	ROUND BAR WITH PHOSPHORESCENT LINE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TABLE A. STYLE CODES (CONT.)

TT	PLAIN POINTER WITH FLUORESCENT LINE
UU	SKIRTED POINTER WITH FLUORESCENT LINE
VV	ROUND BAR DIAL SKIRTED WITH PHOSPHORESCENT LINE
WW	SKIRTED POINTER WITH PHOSPHORESCENT LINE
XX	BAR WITH PHOSPHORESCENT LINE
YY	DIAL SKIRTED BAR WITH PHOSPHORESCENT LINE
ZZ	DIAL SKIRTED BAR WITH FLUORESCENT LINE

TABLE B. SHAFT HOLE DIAMETER CODES

CODE	DESCRIPTION
1	1/8 IN. ROUND
2	1/4 IN. ROUND
3	1/8 IN. D FLAT
4	1/4 IN. D FLAT


TABLE C. COLOR CODES

CODE	COLOR
B	BLACK
G	GRAY
R	RED

TABLE D. TACTILE FORM CODES

CODE	TACTICLE FORM
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

TACTILE FORMS

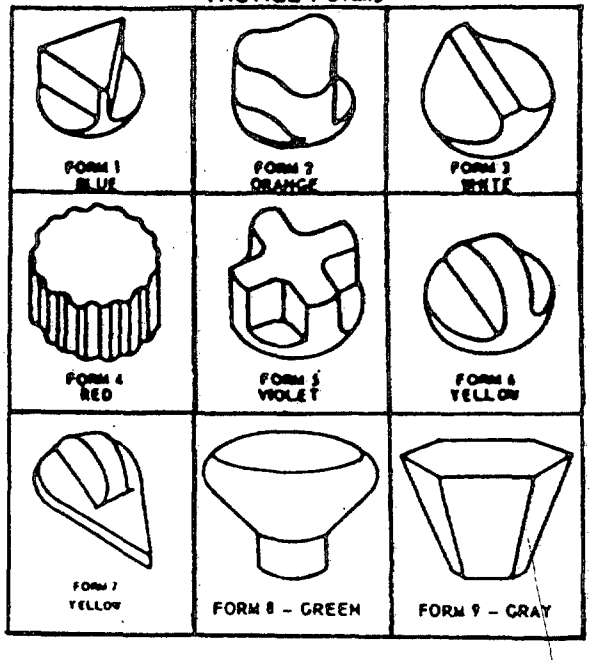


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)

MIL-K-3926

SPINNER KNOBS

MS91528





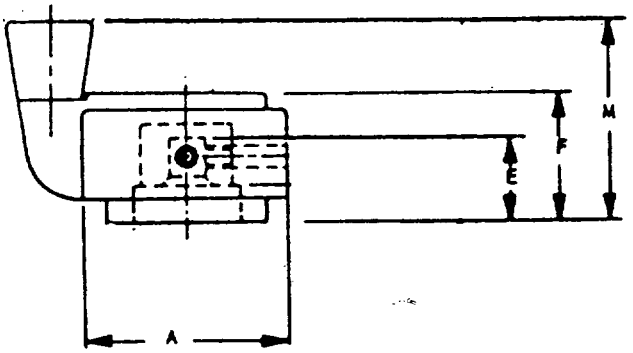


TABLE I. PART NUMBER AND DIMENSIONS

MS91528-SERIES	DIMENSIONS			
	A	E(MIN)	F	M
3	1.250	.605	.850	1.350
4	1.750	.740	1.070	1.758
5	2.250	.740	1.095	1.782

STYLE: S
SHAFT HOLE DIA: 2, 4
COLOR: B, G, R

SEE TABLES A, B, C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

KNOBS-CONTROL, PLASTIC (ROUND, CONCENTRIC, POINTER, SPINNER, SPINNER SLIP-CLUTCH, BAR, TACTILE, KNOB LOCK POINTER, SLIP-CLUTCH, AND KNOB LOCKS)

MIL-K-3926

SPINNER SLIP CLUTCH KNOBS

MS91528

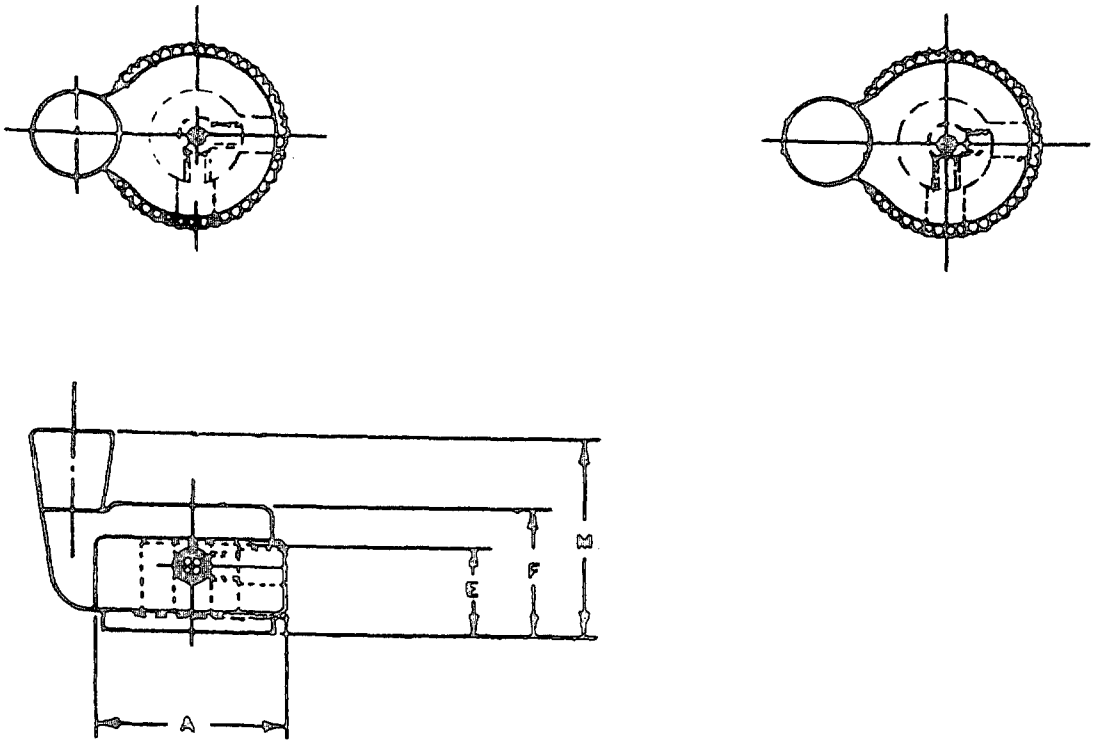


TABLE I. PART NUMBER AND DIMENSIONS

MS91528-SERIES	DIMENSIONS			
	A	E(MIN)	F	M
3	1.250	.600	1.040	1.520
4	1.750	.740	1.070	1.758
5	2.250	.740	1.095	1.782

STYLE: SC, SD, SE
SHAFT HOLE DIA: 2, 4
COLOR: B, G, R

SEE TABLES A, B, C.

SUPERSEDES PAGE 901.20 OF 18 JULY 1984

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND (ELEX 8111)
WASHINGTON, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.