MIL-STD-242H (NAVY) – PART 2
17 AUGUST 1981
SUPERSEDING
MIL-STD-242F (NAVY),
PART I, Section 1100
PART III, Section 200
PART IV

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS SELECTED STANDARDS

CRYSTALS, DELAY LINES, COILS, AND TRANSFORMERS

FSC 59GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D. C. 20360

Electronic Equipment Parts, Selected Standards, Crystals, Delay Lines, Coils, and Transformers

MIL-STD-242H(NAVY)-PART 2

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to: Commander, Naval Electronic Systems Command, Attn: ELEX 8111, Department of the Navy, Washington, D. C. 20360.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FOREWORD

This Military Standard Part provides equipment designers and manufacturers with a list of Crystals, Delay Lines, Coils, and Transformers having quality levels most acceptable in the design and construction of Military systems and equipments. It also will aid to control and minimize the life cycle cost, improve reliability of equipment and minimize logistic support. The criteria used in selecting parts are as follows:

1. Application need. Parts must satisfy the widest range of design requiring reliable parts.

2. Technological maturity. The design of the part must be final and must use proven materials and technologies. It must have been in production for a period sufficient to ensure that the design and process parameters have been identified and adequate quality controls have been developed.

3. Availability. The part must be in production by at least one manufacturer whose previous performance indicates ability to qualify to specifications of this standard. There must also be reasonable expectation that the part will not be obsolescent for at least seven years. Microcircuits are excluded from this requirement because of rapid technological changes.

4. Test or usage history. Sufficient test or usage data to predict part reliability must be available.

In the event of conflict between the technical description of standard parts in this standard and the applicable specification, the specification shall govern.

Technical information included in this standard was obtained from military specifications and standards; no warranty is made of data accuracy, or that inclusion of these parts will assure equipment/systems will meet performance requirements of any contracts. The contractor is responsible for conducting necessary tests and inspections of selected parts to ensure that contract requirements are met.

Review activities:
Navy - AS, SH, OS

User activity:
Navy - MC

Preparing activity:
Navy - EC

(Project Number 59GP-N031-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CRYSTALS, DELAY LINES, COILS, AND TRANSFORMERS

TABLE OF CONTENTS

SUBJECT/SECTION	PAGE
SECTION 1 TRANSFORMERS, POWER	
1 MIL-T-27	1-1 through 1-46
SECTION 2 TRANSFORMERS, PULSE, LOW POWER	
2 MIL-T-21038	2-1 through 2-3
SECTION 3 TRANSFORMERS, AUDIO FREQUENCY	
3 MIL-T-27	3-1 through 3-28
SECTION 4 INDUCTORS, AUDIO, POWER AND HIGH PULSE	
4 MIL-T-27	4-1 through 4-14
SECTION 5 COILS, RF	
5A MS STYLES, FIXED	5-1 through 5-21
5B M39010 STYLES, FIXED	5-22 through 5-32
5C MS STYLES, VARIABLE	5-33 through 5-36
5D MIL-C-15305	5-37 through 5-39
5E MIL-C-83446	5-40 through 5-56
SECTION 6 DELAY LINES	
6 MIL-D-23859	6-1 through 6-20
SECTION 7 CRYSTAL UNITS	
7 MIL-C-3098	7-1 through 7-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

	PAGE
SECTION 1 TRANSFORMERS, POWER	
1.5 VA	1-1
3 VA	1-7
6 VA	1-13
9 VA	1-19
16 VA	1-21
25 VA	1-27
50 VA	1-33
75 VA	1-35
100 VA	1-37
250 VA	1-39
56.9 VA	1-41
SECTION 2 TRANSFORMERS, PULSE, LOW POWER	
NON DUAL INLINE PACKAGE	2-1
SECTION 3 TRANSFORMERS, AUDIO FREQUENCY	
MIL-T-27/67	3-1
MIL-T-27/69	3-3
MIL-T-27/72	3-5
MIL-T-27/103	3-7
MIL-T-27/144	3-10
MIL-T-27/165	3-13
MIL-T-27/166	3-16
MIL-T-27/167	3-20
MIL-T-27/173	3-25
SECTION 4 INDUCTORS, AUDIO, POWER & HIGH POWER PULSE	
MIL-T-27/142	4-1
MIL-T-27/145	4-2
MIL-T-27/146	4-3
MIL-T-27/147	4-4
MIL-T-27/161	4-6
MIL-T-27/162	4-7
MIL-T-27/163	4-8
MIL-T-27/168	4-9
MIL-T-27/205	4-10
SECTION 5 COILS, RF	
MS STYLES, FIXED	5-1
M39010 STYLES, FIXED	5-22
VARIABLE STYLE	5-33
SECTION 6 DELAY LINES	
FIXED	6-1
LUMPED CONSTANT	6-14
SECTION 7 CRYSTAL UNITS	
GENERAL PURPOSE	7-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 1.5 VA , 400 Hz, MIL-T-27/37

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 1.5 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.


EFFICIENCY: 70 PERCENT MINIMUM AT RATED LOAD


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 23 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: .85 OUNCE MAXIMUM

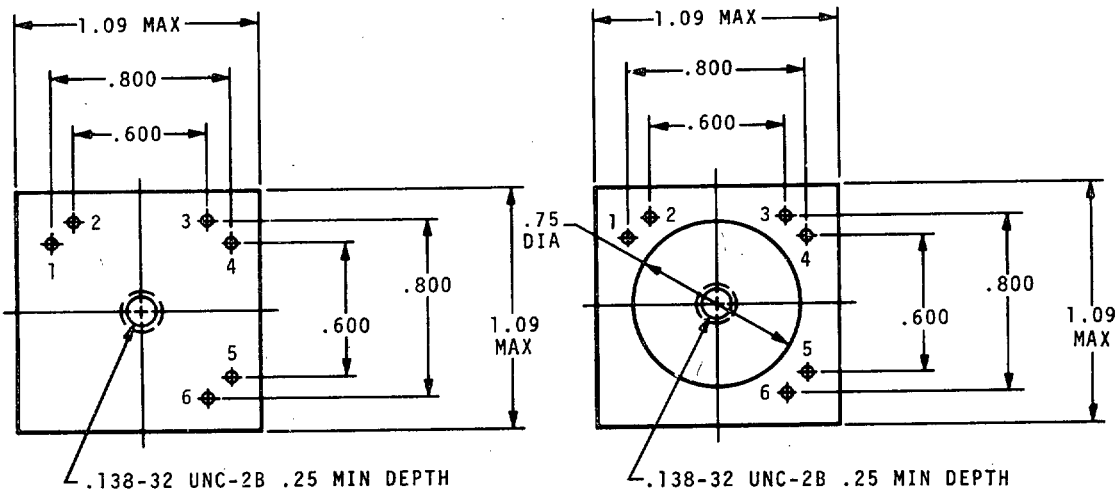

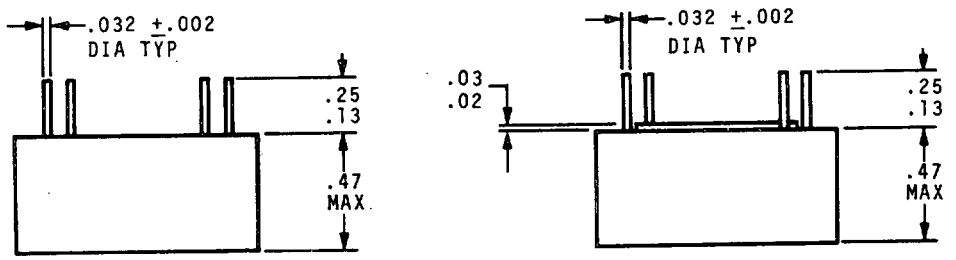

CONFIGURATION A


CONFIGURATION B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use

TRANSFORMER, POWER,
1.5 VA , 400 Hz,
MIL-T-27/37

PART NUMBER:

EXAMPLE: M 27/37-01 A OR B

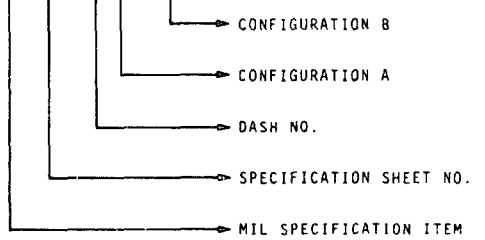



MAX ALT 70,000'
CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/37-01 A OR B	TF5S03ZZ400	6	0.250	325
-02	401	6.3	0.238	
-03	402	7	0.214	
-04	403	7.5	0.200	
-05	404	8	0.188	
-06	405	9	0.167	
-07	406	10	0.150	
-08	407	11	0.136	
-09	408	12	0.125	
-10	409	12.6	0.119	
-11	410	13	0.115	
-12	411	15	0.100	
-13	412	16	0.094	
-14	413	18	0.083	
-15	414	20	0.075	
-16	415	22	0.068	
-17	416	24	0.063	
-18	417	26	0.058	
-19	418	28	0.053	
-20	419	30	0.050	
-21	420	33	0.045	
-22	421	36	0.042	
-23	422	39	0.038	
-24	423	43	0.035	
-25	424	47	0.032	
-26	425	51	0.029	
-27	426	56	0.027	
-28	427	62	0.024	
-29	428	68	0.022	
-30	429	75	0.020	
-31	430	82	0.018	
-32	431	91	0.016	
-33	432	100	0.015	
-34	433	110	0.014	
-35	434	115	0.013	
-36	435	120	0.0125	
-37	436	130	0.0115	
-38	437	150	0.010	
-39	438	180	0.0085	325
-40	439	200	0.0075	440
-41	440	220	0.007	440
-42	441	240	0.006	440
-43	442	270	0.0055	580
M27/37-44 A OR B	TF5S03ZZ443	300	0.005	580

46

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 1.5 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/38

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 3 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 70 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.

POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 18 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 1.1 OUNCES MAXIMUM

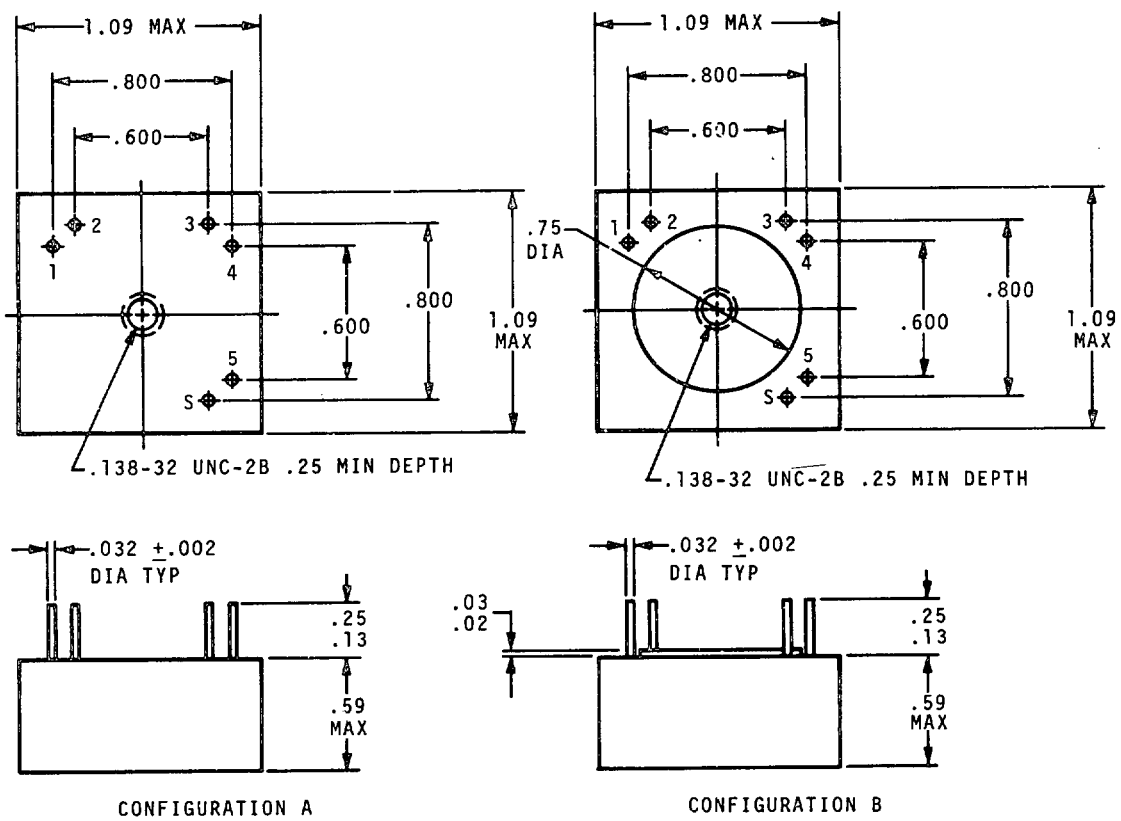



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 1.5 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/38

PART NUMBER:

EXAMPLE: M 27/38-01 A OR B

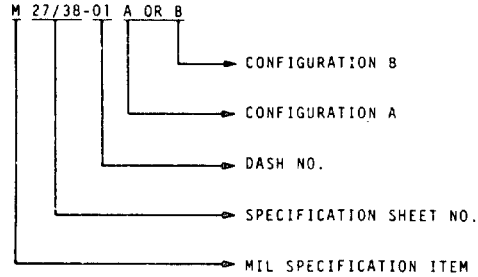



MAX ALT, 70,000'
CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/38-01 A OR B	TF5S03ZZ444	6	0.250	325
-02	445	6.3	0.238	
-03	446	7	0.214	
-04	447	7.5	0.200	
-05	448	8	0.188	
-06	449	9	0.167	
-07	450	10	0.150	
-08	451	11	0.136	
-09	452	12	0.125	
-10	453	12.6	0.119	
-11	454	13	0.115	
-12	455	15	0.100	
-13	456	16	0.094	
-14	457	18	0.083	
-15	458	20	0.075	
-16	459	22	0.068	
-17	460	24	0.063	
-18	461	26	0.058	
-19	462	28	0.053	
-20	463	30	0.050	
-21	464	33	0.045	
-22	465	36	0.042	
-23	466	39	0.038	
-24	467	43	0.035	
-25	468	47	0.032	
-26	469	51	0.029	
-27	470	56	0.027	
-28	471	62	0.024	
-29	472	68	0.022	
-30	473	75	0.020	
-31	474	82	0.018	
-32	475	91	0.016	
-33	476	100	0.015	
-34	477	110	0.014	
-35	478	115	0.013	
-36	479	120	0.0125	
-37	480	130	0.0115	
-38	481	150	0.010	
-39	482	180	0.0085	325
-40	483	200	0.0075	440
-41	484	220	0.007	440
-42	485	240	0.006	440
-43	486	270	0.0055	580
M27/38-44 A OR B	TF5S03ZZ487	300	0.005	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

50

TRANSFORMER, POWER, 1.5 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/49

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 3 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 70 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.

POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 18 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 1.25 OUNCES MAXIMUM

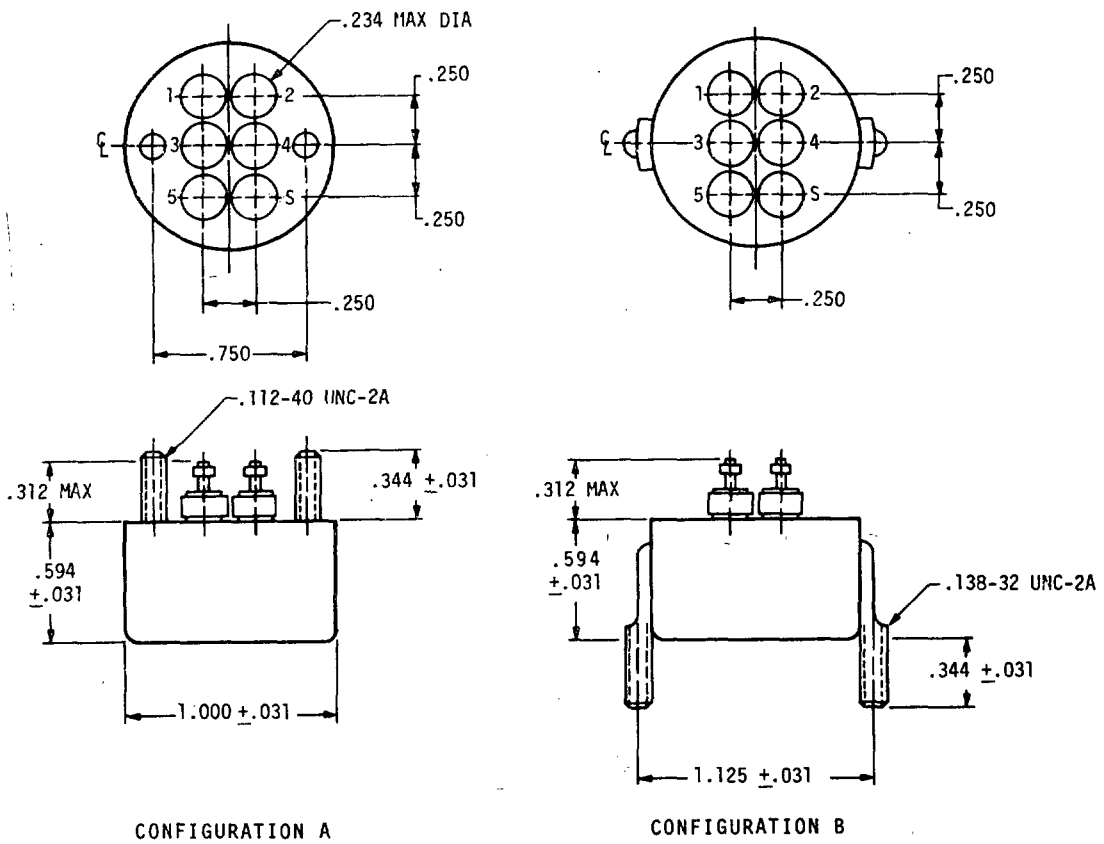

CONFIGURATION A

CONFIGURATION B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 1.5 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/49

PART NUMBER:

EXAMPLE: M 27/49-01 A OR B

- M — MIL SPECIFICATION ITEM
- 27/49 — SPECIFICATION SHEET NO.
- 01 — DASH NO.
- A — CONFIGURATION A
- B — CONFIGURATION B

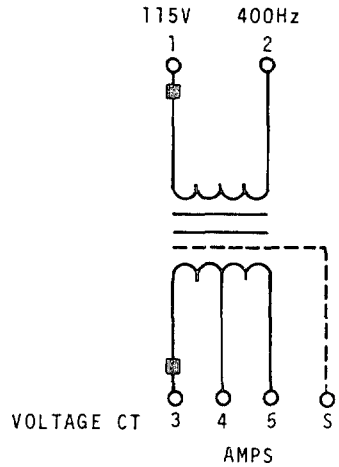

MAX ALT 70,000'

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX	M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/49-01 A OR B	6	0.250	325	M27/49-23 A OR B	39	0.038	325
-02 A OR B	6.3	0.238	325	-24 A OR B	43	0.035	325
-03 A OR B	7	0.214	325	-25 A OR B	47	0.032	325
-04 A OR B	7.5	0.200	325	-26 A OR B	51	0.029	325
-05 A OR B	8	0.188	325	-27 A OR B	56	0.027	325
-06 A OR B	9	0.167	325	-28 A OR B	62	0.024	325
-07 A OR B	10	0.150	325	-29 A OR B	68	0.022	325
-08 A OR B	11	0.136	325	-30 A OR B	75	0.020	325
-09 A OR B	12	0.125	325	-31 A OR B	82	0.018	325
-10 A OR B	12.6	0.119	325	-32 A OR B	91	0.016	325
-11 A OR B	13	0.115	325	-33 A OR B	100	0.015	325
-12 A OR B	15	0.100	325	-34 A OR B	110	0.014	325
-13 A OR B	16	0.094	325	-35 A OR B	115	0.013	325
-14 A OR B	18	0.083	325	-36 A OR B	120	0.0125	325
-15 A OR B	20	0.075	325	-37 A OR B	130	0.0115	325
-16 A OR B	22	0.068	325	-38 A OR B	150	0.010	325
-17 A OR B	24	0.063	325	-39 A OR B	180	0.0085	325
-18 A OR B	26	0.058	325	-40 A OR B	200	0.0075	440
-19 A OR B	28	0.053	325	-41 A OR B	220	0.007	440
-20 A OR B	30	0.050	325	-42 A OR B	240	0.006	440
-21 A OR B	33	0.045	325	-43 A OR B	270	0.0055	580
M27/49-22 A OR B	36	0.042	325	M27/49-44 A OR B	300	0.005	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

52

TRANSFORMER, POWER,
3 VA , 400 Hz,
MIL-T-27/39

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 3 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.


EFFICIENCY: 75 PERCENT MINIMUM AT RATED LOAD

POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 18 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 1.1 OUNCES MAXIMUM

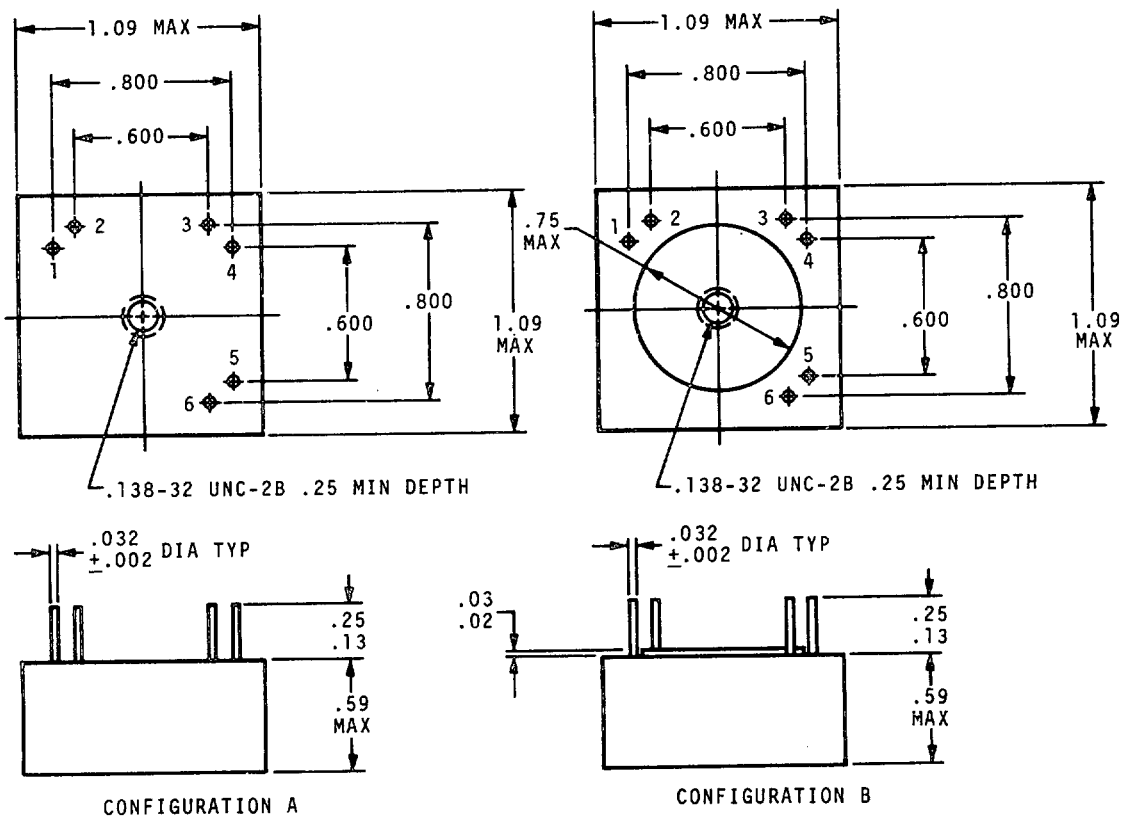

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER,
3 VA , 400 Hz,
MIL-T-27/39

PART NUMBER:

EXAMPLE: M 27/39-01 A OR B

- M — MIL SPECIFICATION ITEM
- 27/39 — SPECIFICATION SHEET NO.
- 01 — DASH NO.
- A OR B — CONFIGURATION A / CONFIGURATION B



MAX ALT 70,000'
CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/39-01 A OR B	TF5S03ZZ488	6	0.500	325
-02	489	6.3	0.476	
-03	490	7	0.429	
-04	491	7.5	0.400	
-05	492	8	0.375	
-06	493	9	0.333	
-07	494	10	0.300	
-08	495	11	0.273	
-09	496	12	0.250	
-10	497	12.6	0.238	
-11	498	13	0.231	
-12	499	15	0.200	
-13	500	16	0.188	
-14	501	18	0.167	
-15	502	20	0.150	
-16	503	22	0.136	
-17	504	24	0.125	
-18	505	26	0.115	
-19	506	28	0.107	
-20	507	30	0.100	
-21	508	33	0.091	
-22	509	36	0.083	
-23	510	39	0.077	
-24	511	43	0.070	
-25	512	47	0.064	
-26	513	51	0.059	
-27	514	56	0.054	
-28	515	62	0.048	
-29	516	68	0.044	
-30	517	75	0.040	
-31	518	82	0.037	
-32	519	91	0.033	
-33	520	100	0.030	
-34	521	110	0.027	
-35	522	115	0.026	
-36	523	120	0.025	
-37	524	130	0.023	
-38	525	150	0.020	
-39	526	180	0.017	325
-40	527	200	0.015	440
-41	528	220	0.014	440
-42	529	240	0.013	440
-43	530	270	0.011	580
M27/39-44 A OR B	TF5S03ZZ531	300	0.010	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 3 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/40

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 6 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 75 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 12 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 1.65 OUNCES MAXIMUM

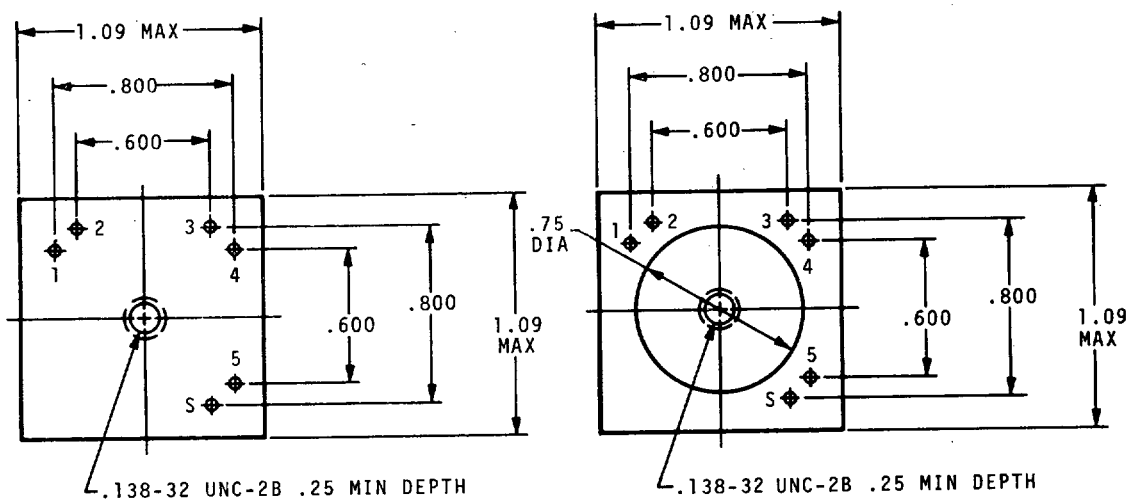

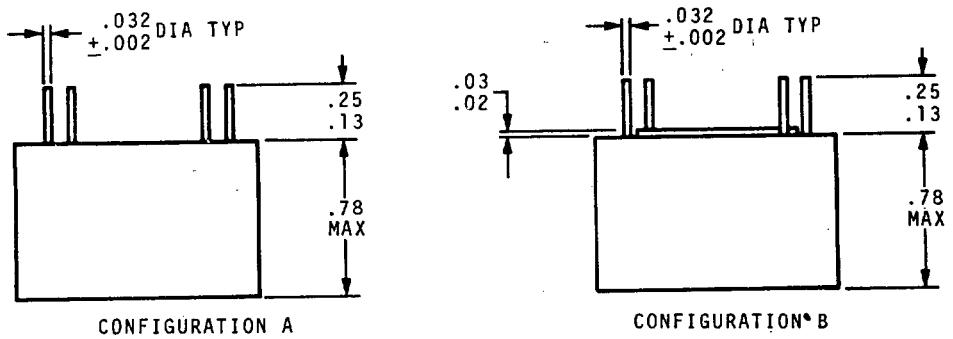



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 3 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/40

PART NUMBER:

EXAMPLE: M 27/40-01 A OR B

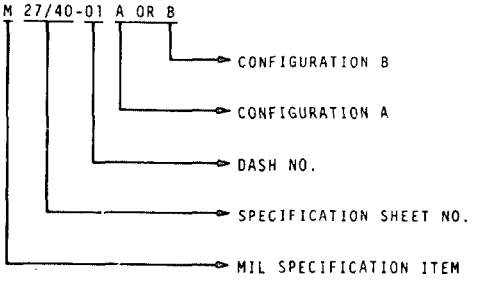

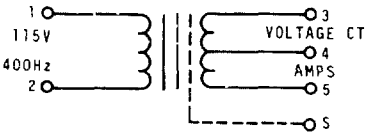

MAX ALT, 70,000'
CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/40-01 A OR B	TF5S03ZZ532	6	0.500	325
-02	533	6.3	0.476	
-03	534	7	0.429	
-04	535	7.5	0.400	
-05	536	8	0.375	
-06	537	9	0.333	
-07	538	10	0.300	
-08	539	11	0.273	
-09	540	12	0.250	
-10	541	12.6	0.238	
-11	542	13	0.231	
-12	543	15	0.200	
-13	544	16	0.188	
-14	545	18	0.167	
-15	546	20	0.150	
-16	547	22	0.136	
-17	548	24	0.125	
-18	549	26	0.115	
-19	550	28	0.107	
-20	551	30	0.100	
-21	552	33	0.091	
-22	553	36	0.083	
-23	554	39	0.077	
-24	555	43	0.070	
-25	556	47	0.064	
-26	557	51	0.059	
-27	558	56	0.054	
-28	559	62	0.048	
-29	560	68	0.044	
-30	561	75	0.040	
-31	562	82	0.037	
-32	563	91	0.033	
-33	564	100	0.030	
-34	565	110	0.027	
-35	566	115	0.026	
-36	567	120	0.025	
-37	568	130	0.023	
-38	569	150	0.020	
-39	570	180	0.017	325
-40	571	200	0.015	440
-41	572	220	0.014	440
-42	573	240	0.013	440
-43	574	270	0.011	580
M27/40-44 A OR B	TF5S03ZZ575	300	0.010	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 3 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/51

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 6 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 75 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED


REGULATION: SHALL NOT EXCEED 12 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM


WEIGHT: 1.7 OUNCES MAXIMUM

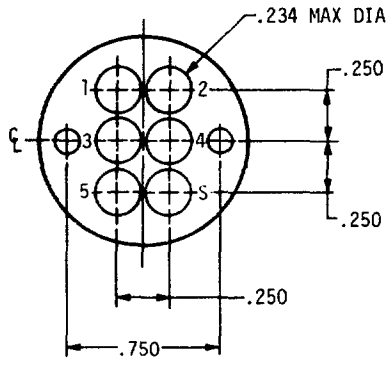

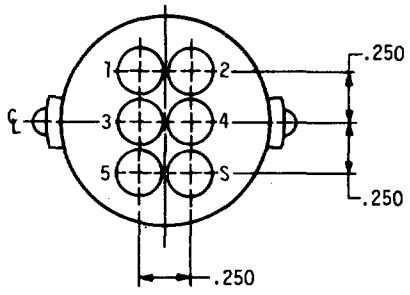

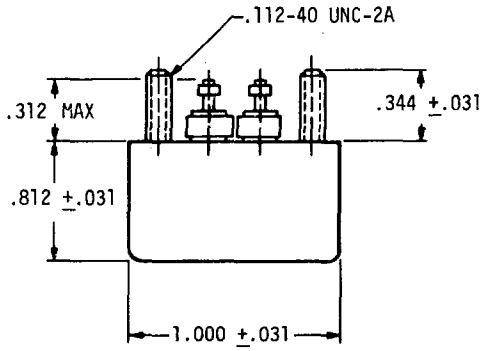

CONFIGURATION A

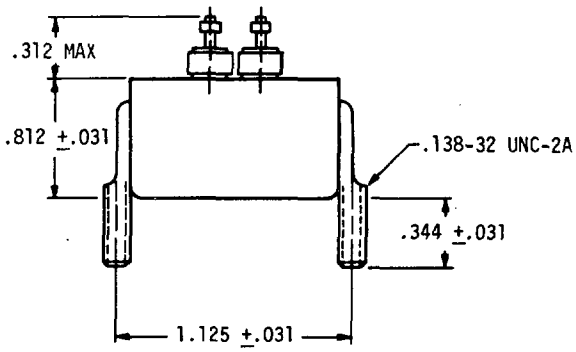

CONFIGURATION B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 3 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/51

PART NUMBER:

EXAMPLE: M 27/51-01 A OR B

- CONFIGURATION B
- CONFIGURATION A
- DASH NO.
- SPECIFICATION SHEET NO.
- MIL SPECIFICATION ITEM

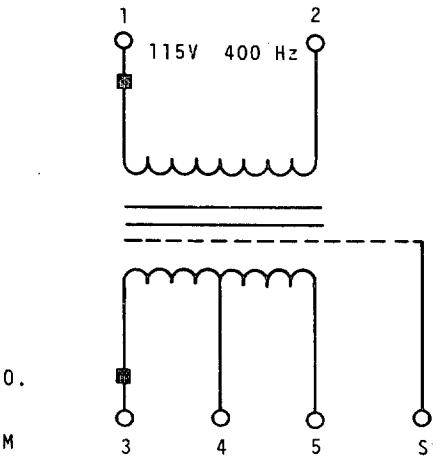

MAX ALT 70,000'
CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX	M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/51-01 A OR B	6	0.500	325	M27/51-23 A OR B	39	0.077	325
-02 A OR B	6.3	0.476	325	-24 A OR B	43	0.070	325
-03 A OR B	7	0.429	325	-25 A OR B	47	0.064	325
-04 A OR B	7.5	0.400	325	-26 A OR B	51	0.059	325
-05 A OR B	8	0.375	325	-27 A OR B	56	0.054	325
-06 A OR B	9	0.333	325	-28 A OR B	62	0.048	325
-07 A OR B	10	0.300	325	-29 A OR B	68	0.044	325
-08 A OR B	11	0.273	325	-30 A OR B	75	0.040	325
-09 A OR B	12	0.250	325	-31 A OR B	82	0.037	325
-10 A OR B	12.6	0.238	325	-32 A OR B	91	0.033	325
-11 A OR B	13	0.231	325	-33 A OR B	100	0.030	325
-12 A OR B	15	0.200	325	-34 A OR B	110	0.027	325
-13 A OR B	16	0.188	325	-35 A OR B	115	0.026	325
-14 A OR B	18	0.167	325	-36 A OR B	120	0.025	325
-15 A OR B	20	0.150	325	-37 A OR B	130	0.023	325
-16 A OR B	22	0.136	325	-38 A OR B	150	0.020	325
-17 A OR B	24	0.125	325	-39 A OR B	180	0.017	325
-18 A OR B	26	0.115	325	-40 A OR B	200	0.015	440
-19 A OR B	28	0.107	325	-41 A OR B	220	0.014	440
-20 A OR B	30	0.100	325	-42 A OR B	240	0.013	440
-21 A OR B	33	0.091	325	-43 A OR B	270	0.011	580
M27/51-22 A OR B	36	0.083	325	M27/51-44 A OR B	300	0.010	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 6 VA , 400 Hz, MIL-T-27/41

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 6 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.


EFFICIENCY: 81 PERCENT MINIMUM AT RATED LOAD

POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 12 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 1.65 OUNCES MAXIMUM

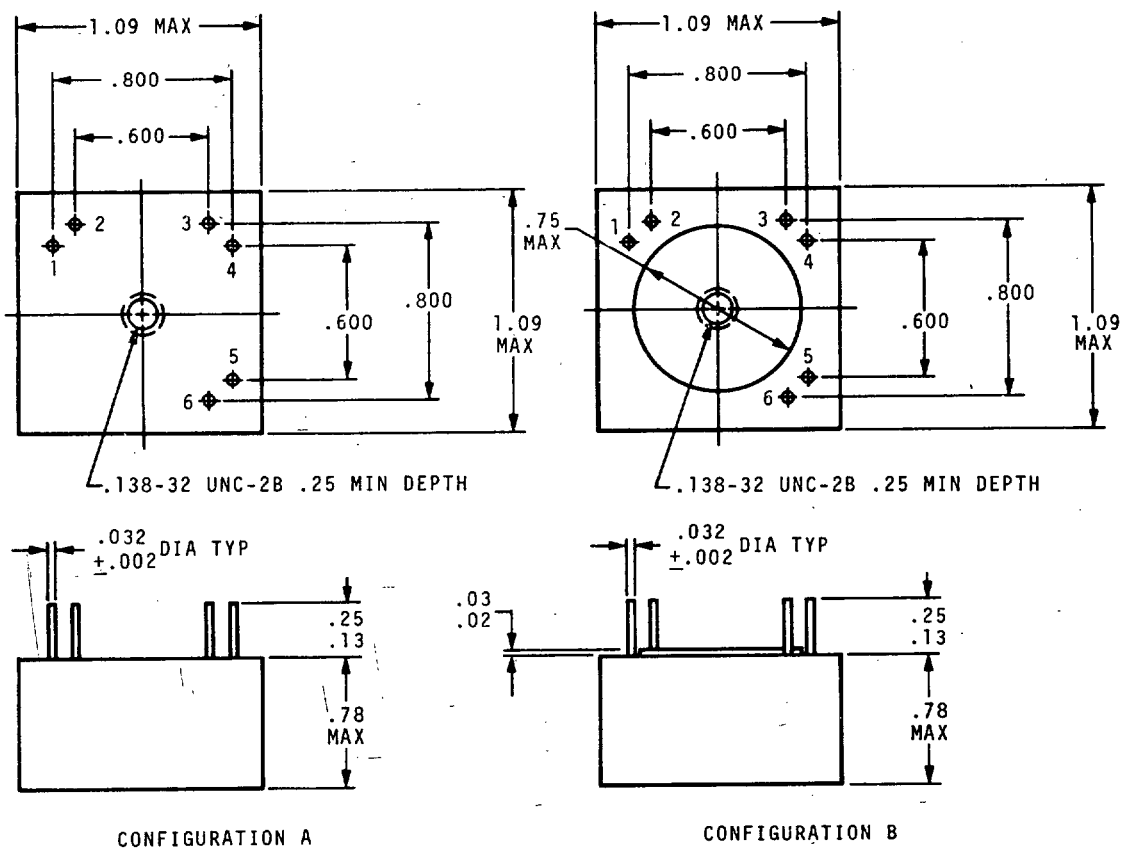



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER,
6 VA , 400 Hz,
MIL-T-27/41

PART NUMBER:

EXAMPLE: M 27/41-01 A OR B

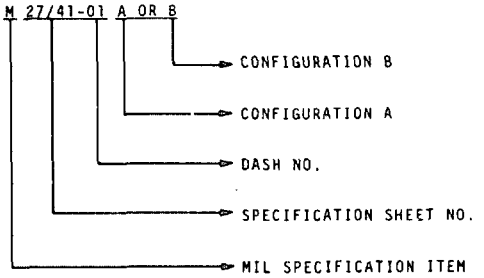

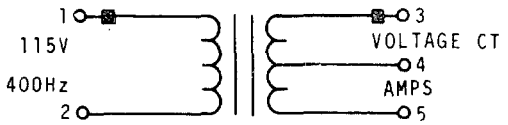

MAX ALT 70,000'

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/41-01 A OR B	TF5S03ZZ576	6	1.000	325
-02	577	6.3	0.953	
-03	578	7	0.857	
-04	579	7.5	0.800	
-05	580	8	0.750	
-06	581	9	0.667	
-07	582	10	0.600	
-08	583	11	0.545	
-09	584	12	0.500	
-10	585	12.6	0.476	
-11	586	13	0.462	
-12	587	15	0.400	
-13	588	16	0.375	
-14	589	18	0.333	
-15	590	20	0.300	
-16	591	22	0.272	
-17	592	24	0.250	
-18	593	26	0.230	
-19	594	28	0.214	
-20	595	30	0.200	
-21	596	33	0.182	
-22	597	36	0.167	
-23	598	39	0.154	
-24	599	43	0.140	
-25	600	47	0.128	
-26	601	51	0.118	
-27	602	56	0.107	
-28	603	62	0.097	
-29	604	68	0.088	
-30	605	75	0.080	
-31	606	82	0.073	
-32	607	91	0.066	
-33	608	100	0.060	
-34	609	110	0.055	
-35	610	115	0.052	
-36	611	120	0.050	
-37	612	130	0.046	
-38	613	150	0.040	
-39	614	180	0.033	325
-40	615	200	0.030	440
-41	616	220	0.027	440
-42	617	240	0.025	440
-43	618	270	0.022	580
M27/41-44 A OR B	TF5S03ZZ619	300	0.020	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 6 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/42

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 9 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 80 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 10 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 2.2 OUNCES MAXIMUM

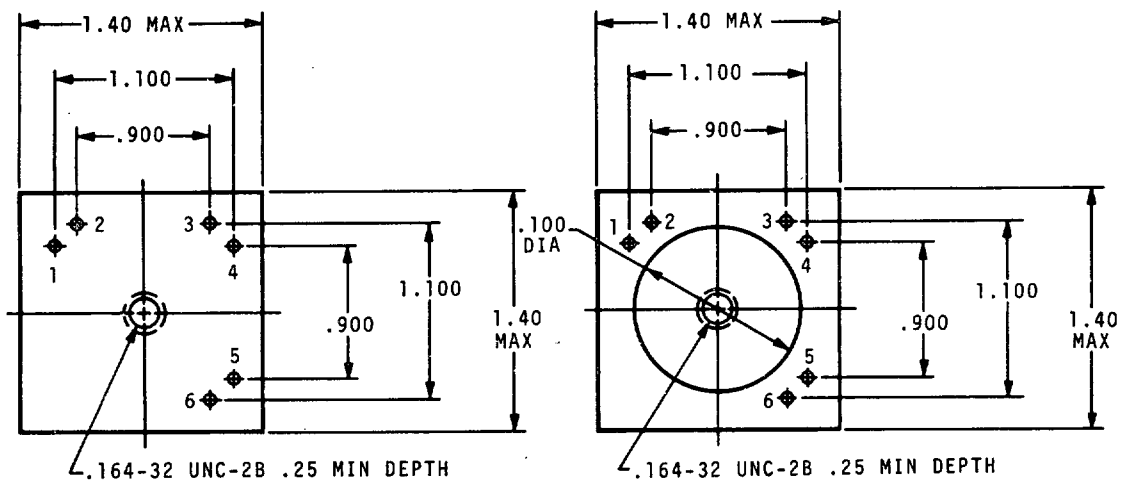

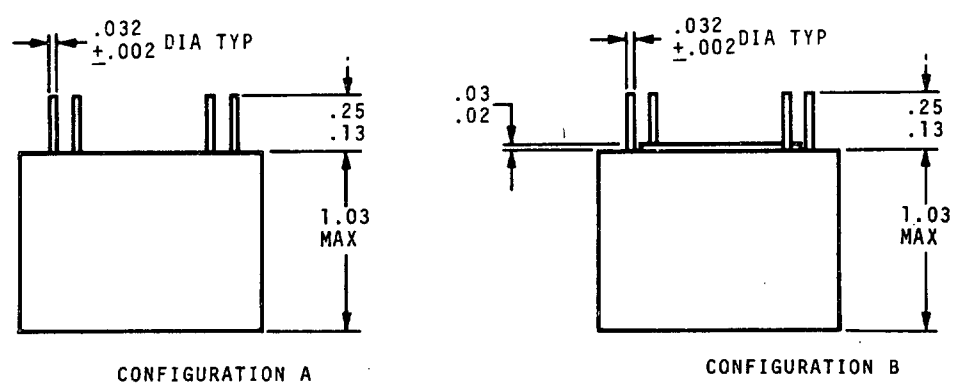

CONFIGURATION A


CONFIGURATION B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 6 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/42

PART NUMBER:

EXAMPLE: M 27/42-01 A OR B

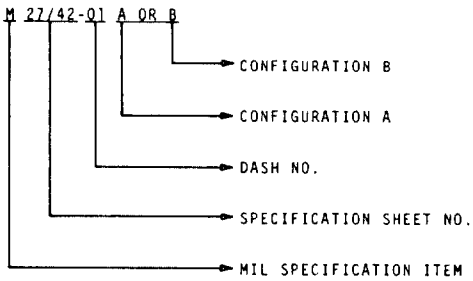

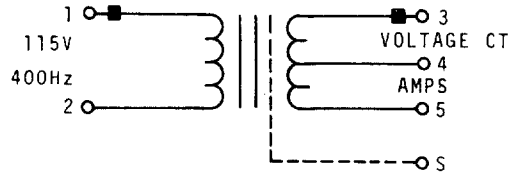

MAX ALT 70,000'

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/42-01 A OR B	TF5S03ZZ620	6	1.000	325
-02	621	6.3	0.953	
-03	622	7	0.857	
-04	623	7.5	0.800	
-05	624	8	0.750	
-06	625	9	0.667	
-07	626	10	0.600	
-08	627	11	0.545	
-09	628	12	0.500	
-10	629	12.6	0.476	
-11	630	13	0.462	
-12	631	15	0.400	
-13	632	16	0.375	
-14	633	18	0.333	
-15	634	20	0.300	
-16	635	22	0.272	
-17	636	24	0.250	
-18	637	26	0.230	
-19	638	28	0.214	
-20	639	30	0.200	
-21	640	33	0.182	
-22	641	36	0.167	
-23	642	39	0.154	
-24	643	43	0.140	
-25	644	47	0.128	
-26	645	51	0.118	
-27	646	56	0.107	
-28	647	62	0.097	
-29	648	68	0.088	
-30	649	75	0.080	
-31	650	82	0.073	
-32	651	91	0.066	
-33	652	100	0.060	
-34	653	110	0.055	
-35	654	115	0.052	
-36	655	120	0.050	
-37	656	130	0.046	
-38	657	150	0.040	
-39	658	180	0.033	325
-40	659	200	0.030	440
-41	660	220	0.027	440
-42	661	240	0.025	440
-43	662	270	0.022	580
M27/42-44 A OR B	TF5S03ZZ663	300	0.020	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 6 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/53

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 9 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.


EFFICIENCY: 80 PERCENT MINIMUM AT RATED LOAD

ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 kHz.

POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 2.3 OUNCES MAXIMUM

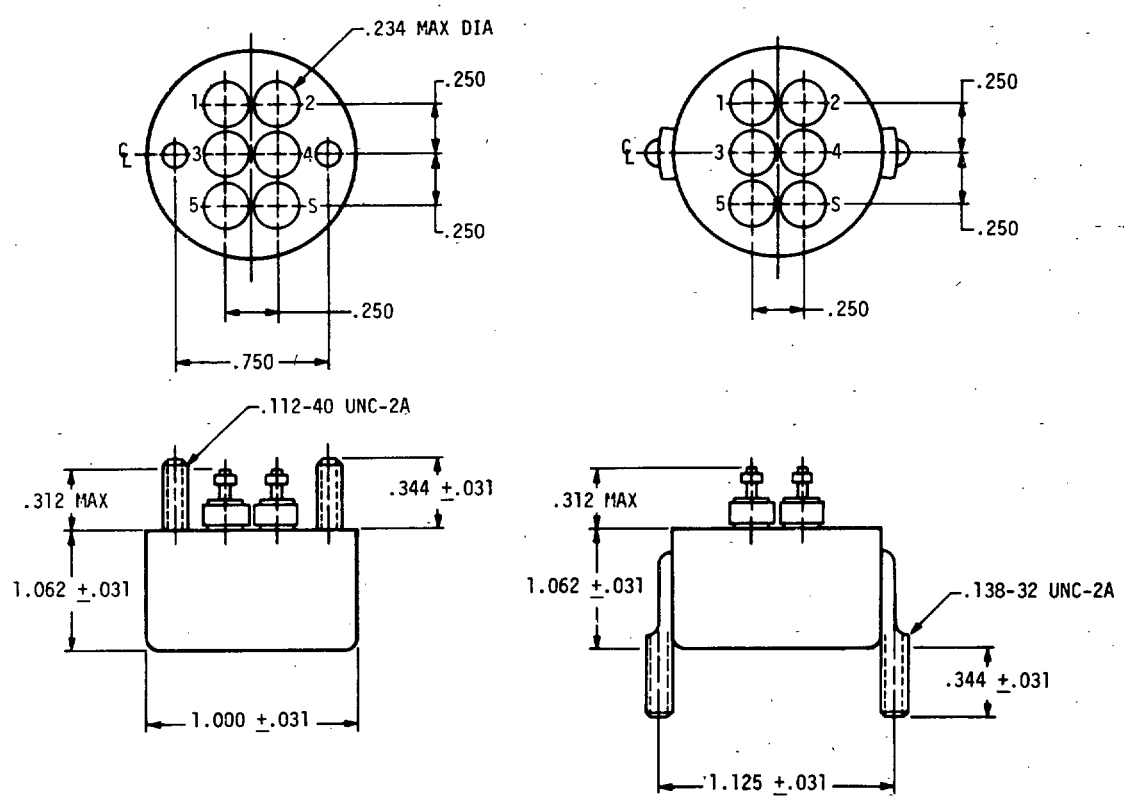

CONFIGURATION A

CONFIGURATION B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 6 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/53

PART NUMBER:

EXAMPLE: M 27/53-01 A OR B

- M — MIL SPECIFICATION ITEM
- 27/53 — SPECIFICATION SHEET NO.
- 01 — DASH NO.
- A — CONFIGURATION A
- B — CONFIGURATION B

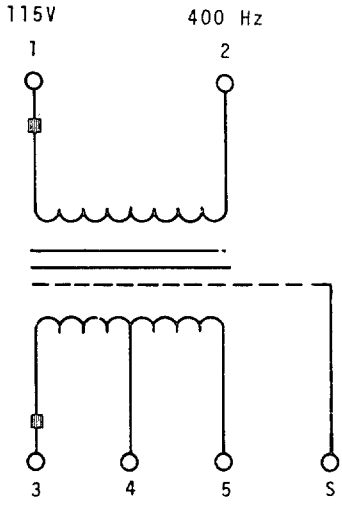

VOLTAGE CT AMPS
MAX ALT 70,000'
CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX	M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/53-01 A OR B	6	1.000	325	M27/53-23 A OR B	39	0.154	325
-02 A OR B	6.3	0.953	325	-24 A OR B	43	0.140	325
-03 A OR B	7	0.857	325	-25 A OR B	47	0.128	325
-04 A OR B	7.5	0.800	325	-26 A OR B	51	0.118	325
-05 A OR B	8	0.750	325	-27 A OR B	56	0.107	325
-06 A OR B	9	0.667	325	-28 A OR B	62	0.097	325
-07 A OR B	10	0.600	325	-29 A OR B	68	0.088	325
-08 A OR B	11	0.545	325	-30 A OR B	75	0.080	325
-09 A OR B	12	0.500	325	-31 A OR B	82	0.073	325
-10 A OR B	12.6	0.476	325	-32 A OR B	91	0.066	325
-11 A OR B	13	0.462	325	-33 A OR B	100	0.060	325
-12 A OR B	15	0.400	325	-34 A OR B	110	0.055	325
-13 A OR B	16	0.375	325	-35 A OR B	115	0.052	325
-14 A OR B	18	0.333	325	-36 A OR B	120	0.050	325
-15 A OR B	20	0.300	325	-37 A OR B	130	0.046	325
-16 A OR B	22	0.272	325	-38 A OR B	150	0.040	325
-17 A OR B	24	0.250	325	-39 A OR B	180	0.033	325
-18 A OR B	26	0.230	325	-40 A OR B	200	0.030	440
-19 A OR B	28	0.214	325	-41 A OR B	220	0.027	440
-20 A OR B	30	0.200	325	-42 A OR B	240	0.025	440
-21 A OR B	33	0.182	325	-43 A OR B	270	0.022	580
M27/53-22 A OR B	36	0.167	325	M27/53-44 A OR B	300	0.020	580

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 9 VA , 400 Hz, MIL-T-27/43

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 9 mA RMS.


RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 83 PERCENT MINIMUM AT RATED LOAD

POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 2.2 OUNCES MAXIMUM

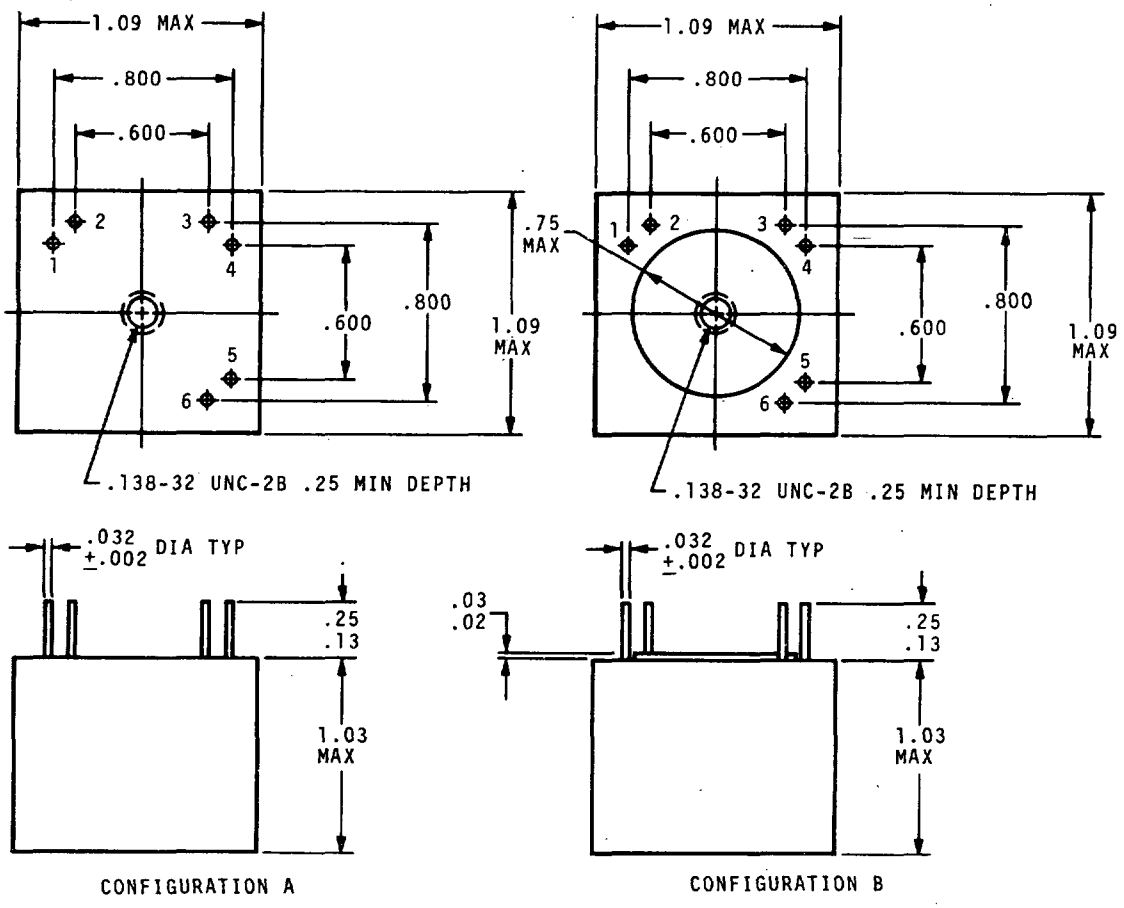


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER,
9 VA , 400 Hz,
MIL-T-27/43

PART NUMBER:

EXAMPLE: M 27/43-01 A OR B

- CONFIGURATION B
- CONFIGURATION A
- DASH NO.
- SPECIFICATION SHEET NO.
- MIL SPECIFICATION ITEM

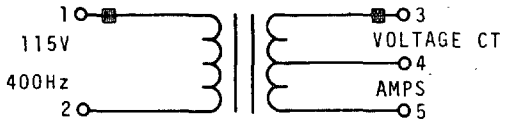

MAX ALT 70,000'

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/43-01 A OR B	TF5S03ZZ664	6	1.500	325
-02	665	6.3	1.430	
-03	666	7	1.286	
-04	667	7.5	1.200	
-05	668	8	1.125	
-06	669	9	1.000	
-07	670	10	0.900	
-08	671	11	0.818	
-09	672	12	0.750	
-10	673	12.6	0.715	
-11	674	13	0.692	
-12	675	15	0.600	
-13	676	16	0.563	
-14	677	18	0.500	
-15	678	20	0.450	
-16	679	22	0.409	
-17	680	24	0.375	
-18	681	26	0.346	
-19	682	28	0.321	
-20	683	30	0.300	
-21	684	33	0.273	
-22	685	36	0.250	
-23	686	39	0.231	
-24	687	43	0.209	
-25	688	47	0.191	
-26	689	51	0.176	
-27	690	56	0.161	
-28	691	62	0.145	
-29	692	68	0.132	
-30	693	75	0.120	
-31	694	82	0.110	
-32	695	91	0.099	
-33	696	100	0.090	
-34	697	110	0.082	
-35	698	115	0.078	
-36	699	120	0.075	
-37	700	130	0.069	
-38	701	150	0.060	
-39	702	180	0.050	325
-40	703	200	0.045	440
-41	704	220	0.041	440
-42	705	240	0.038	440
-43	706	270	0.033	580
M27/43-44 A OR B	TF5S03ZZ707	300	0.030	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 16 VA , 400 Hz, MIL-T-27/44

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 16 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 87 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.

POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 8 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 3.4 OUNCES MAXIMUM

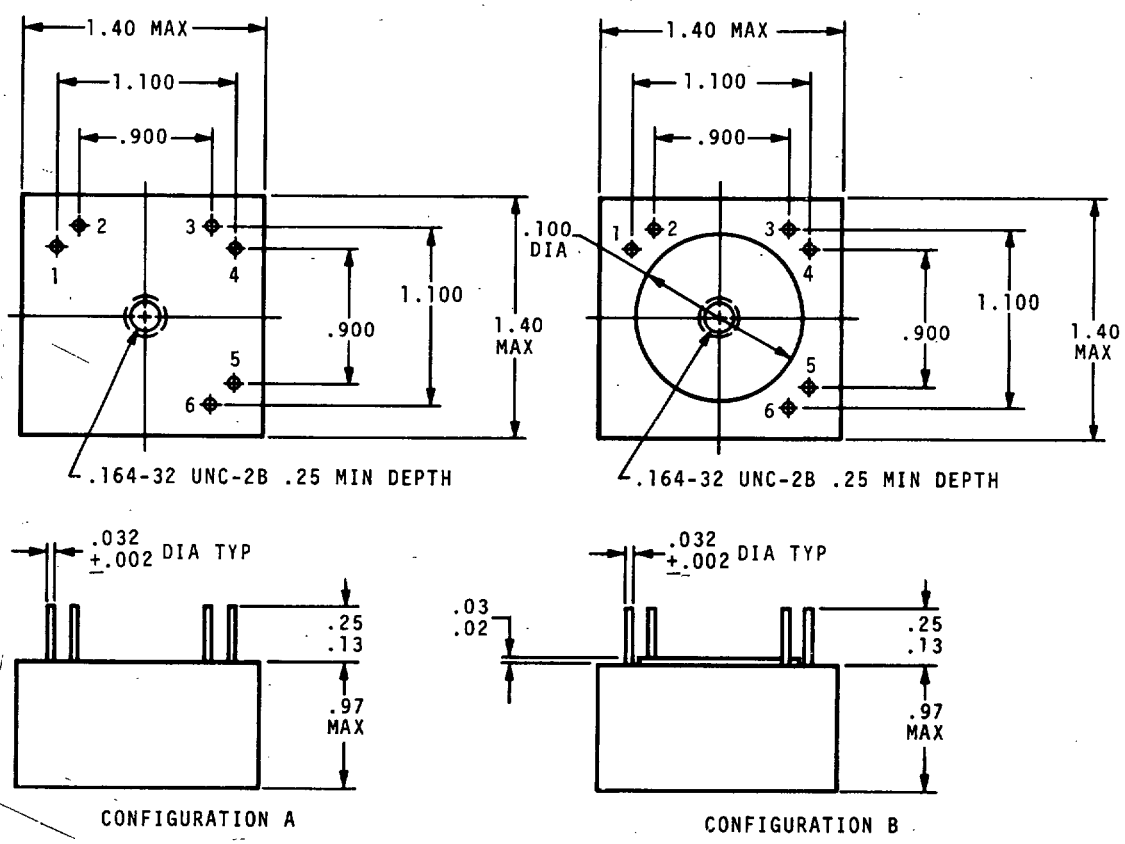



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER,
16 VA , 400 Hz,
MIL-T-27/44

PART NUMBER:

EXAMPLE: M 27/44-01 A OR B

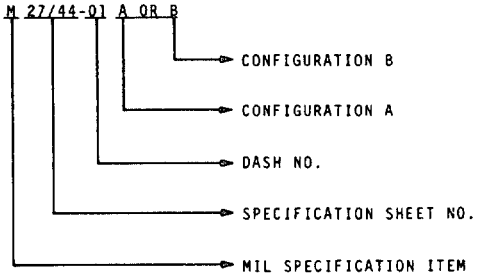

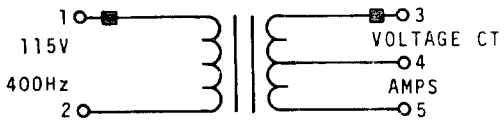

MAX ALT 70,000'

CIRCUIT DIAGRAM

TABLE 1: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/44-01 A OR B	TF5S03ZZ708	6	2.667	325
-02	709	6.3	2.540	
-03	710	7	2.286	
-04	711	7.5	2.133	
-05	712	8	2.000	
-06	713	9	1.778	
-07	714	10	1.600	
-08	715	11	1.455	
-09	716	12	1.333	
-10	717	12.6	1.270	
-11	718	13	1.231	
-12	719	15	1.067	
-13	720	16	1.000	
-14	721	18	0.889	
-15	722	20	0.800	
-16	723	22	0.727	
-17	724	24	0.667	
-18	725	26	0.615	
-19	726	28	0.571	
-20	727	30	0.533	
-21	728	33	0.485	
-22	729	36	0.444	
-23	730	39	0.410	
-24	731	43	0.372	
-25	732	47	0.340	
-26	733	51	0.314	
-27	734	56	0.286	
-28	735	62	0.258	
-29	736	68	0.236	
-30	737	75	0.213	
-31	738	82	0.195	
-32	739	91	0.176	
-33	740	100	0.160	
-34	741	110	0.145	
-35	742	115	0.139	
-36	743	120	0.133	
-37	744	130	0.123	
-38	745	150	0.106	
-39	746	180	0.089	325
-40	747	200	0.080	440
-41	748	220	0.073	440
-42	749	240	0.067	440
-43	750	270	0.059	580
M27/44-44 A OR B	TF5S03ZZ751	300	0.053	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 16 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/45

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 16 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 87 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 8 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 3.4 OUNCES MAXIMUM

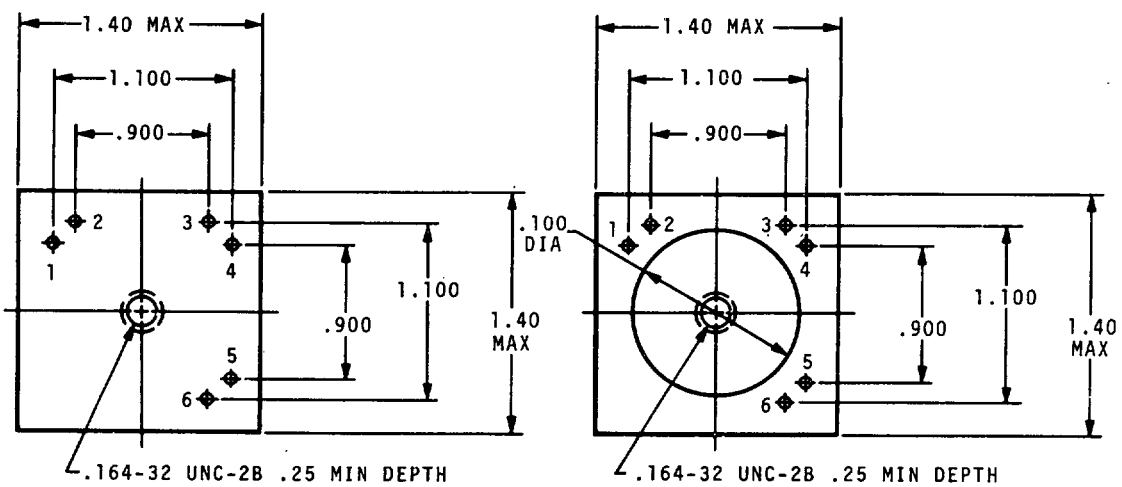

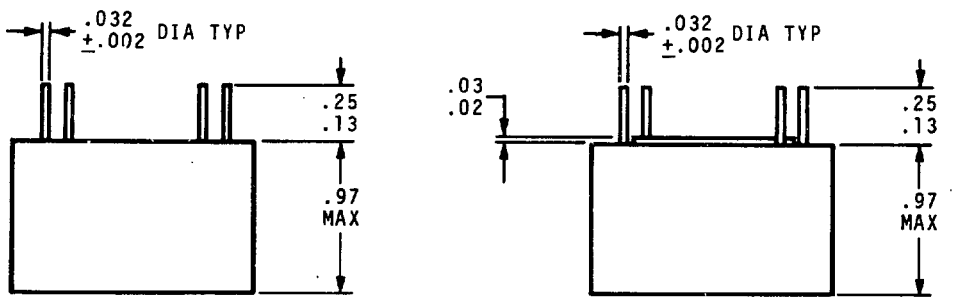

CONFIGURATION A

CONFIGURATION B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26107:292
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 16 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/45

PART NUMBER:

EXAMPLE: M 27/45-01 A OR B

- M — MIL SPECIFICATION ITEM
- 27/45 — SPECIFICATION SHEET NO.
- -01 — DASH NO.
- A — CONFIGURATION A
- B — CONFIGURATION B

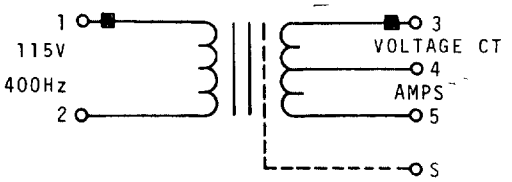

MAX ALT 70,000'

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/45-01 A OR B	TF5S03ZZ752	6	2.667	325
-02	753	6.3	2.540	
-03	754	7	2.286	
-04	755	7.5	2.133	
-05	756	8	2.000	
-06	757	9	1.778	
-07	758	10	1.600	
-08	759	11	1.455	
-09	760	12	1.333	
-10	761	12.6	1.270	
-11	762	13	1.231	
-12	763	15	1.067	
-13	764	16	1.000	
-14	765	18	0.889	
-15	766	20	0.800	
-16	767	22	0.727	
-17	768	24	0.667	
-18	769	26	0.615	
-19	770	28	0.571	
-20	771	30	0.533	
-21	772	33	0.485	
-22	773	36	0.444	
-23	774	39	0.410	
-24	775	43	0.372	
-25	776	47	0.340	
-26	777	51	0.314	
-27	778	56	0.286	
-28	779	62	0.258	
-29	780	68	0.236	
-30	781	75	0.213	
-31	782	82	0.195	
-32	783	91	0.176	
-33	784	100	0.160	
-34	785	110	0.145	
-35	786	115	0.139	
-36	787	120	0.133	
-37	788	130	0.123	
-38	789	150	0.106	
-39	790	180	0.089	325
-40	791	200	0.080	440
-41	792	220	0.073	440
-42	793	240	0.067	440
-43	794	270	0.059	580
M27/45-44 A OR B	TF5S03ZZ795	300	0.053	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 16 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/61

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 16 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 87 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 8 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 3.8 OUNCES MAXIMUM

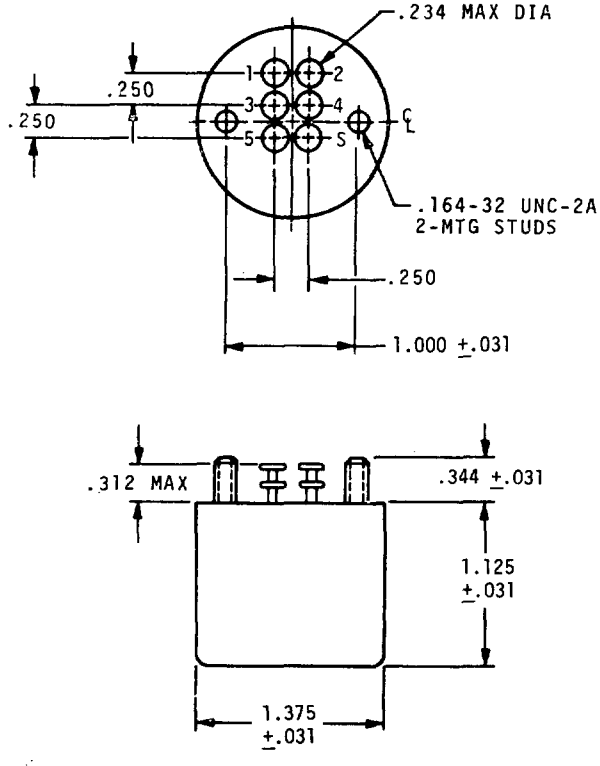

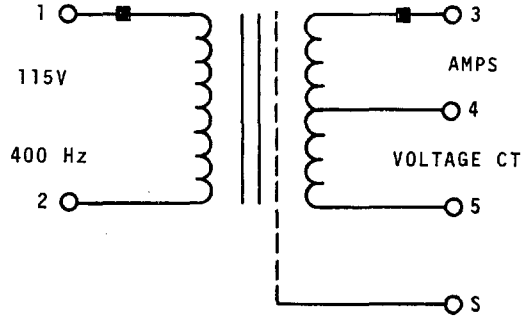

MAX ALT 70,000'
CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER,
16 VA , 400 Hz, ELECTROSTATIC SHIELDED,
MIL-T-27/61

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX	M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/61-01	6	2.667	325	M27/61-23	39	0.410	325
-02	6.3	2.540	325	-24	43	0.372	325
-03	7	2.286	325	-25	47	0.340	325
-04	7.5	2.133	325	-26	51	0.314	325
-05	8	2.000	325	-27	56	0.286	325
-06	9	1.778	325	-28	62	0.258	325
-07	10	1.600	325	-29	68	0.236	325
-08	11	1.455	325	-30	75	0.213	325
-09	12	1.333	325	-31	82	0.195	325
-10	12.6	1.270	325	-32	91	0.176	325
-11	13	1.231	325	-33	100	0.160	325
-12	15	1.067	325	-34	110	0.145	325
-13	16	1.000	325	-35	115	0.139	325
-14	18	0.889	325	-36	120	0.133	325
-15	20	0.800	325	-37	130	0.123	325
-16	22	0.727	325	-38	150	0.106	325
-17	24	0.667	325	-39	180	0.089	325
-18	26	0.615	325	-40	200	0.080	440
-19	28	0.571	325	-41	220	0.073	440
-20	30	0.533	325	-42	240	0.067	440
-21	33	0.485	325	-43	270	0.059	580
M27/61-22	36	0.444	325	M27/61-44	300	0.053	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 25 VA , 400 Hz, MIL-T-27/46

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 25 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.


EFFICIENCY: 88 PERCENT MINIMUM AT RATED LOAD


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 7 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 4.4 OUNCES MAXIMUM

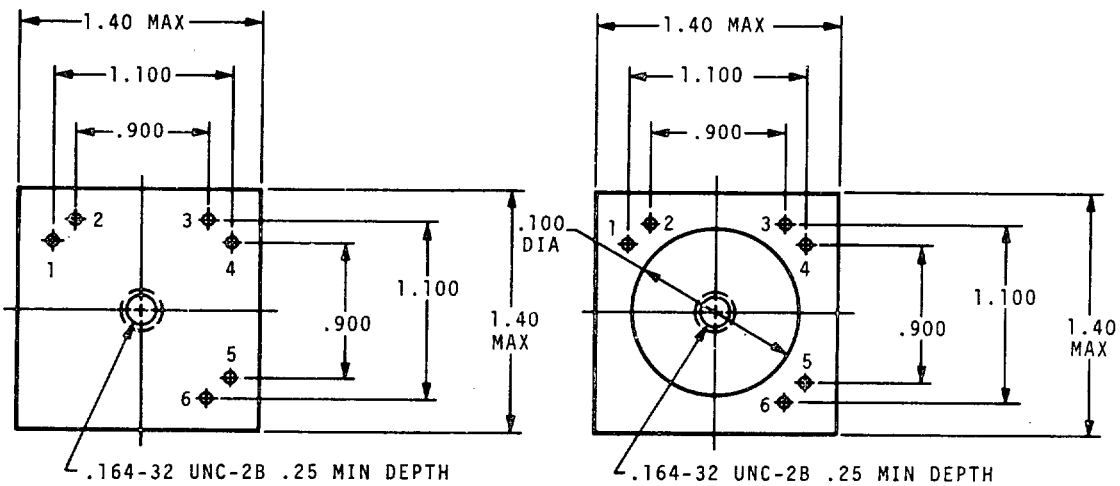

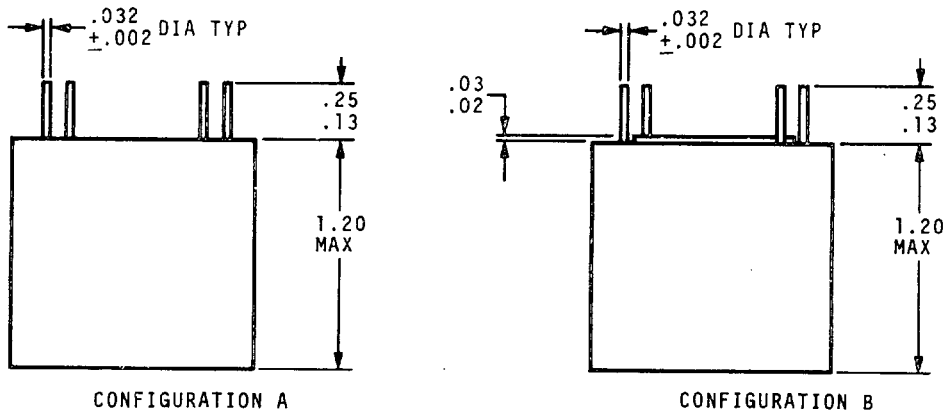


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER,
25 VA , 400 Hz,
MIL-T-27/46

PART NUMBER:

EXAMPLE: M 27/46-01 A OR B

- CONFIGURATION B
- CONFIGURATION A
- DASH NO.
- SPECIFICATION SHEET NO.
- MIL SPECIFICATION ITEM

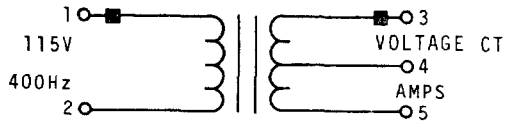

MAX ALT 70,000'

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/46-01 A OR B	TF5S03ZZ796	6	4.167	325
-02	797	6.3	3.968	
-03	798	7	3.571	
-04	799	7.5	3.333	
-05	800	8	3.125	
-06	801	9	2.778	
-07	802	10	2.500	
-08	803	11	2.273	
-09	804	12	2.033	
-10	805	12.6	1.984	
-11	806	13	1.923	
-12	807	15	1.667	
-13	808	16	1.563	
-14	809	18	1.389	
-15	810	20	1.250	
-16	811	22	1.136	
-17	812	24	1.042	
-18	813	26	0.962	
-19	814	28	0.893	
-20	815	30	0.833	
-21	816	33	0.758	
-22	817	36	0.694	
-23	818	39	0.641	
-24	819	43	0.581	
-25	820	47	0.532	
-26	821	51	0.490	
-27	822	56	0.446	
-28	823	62	0.403	
-29	824	68	0.367	
-30	825	75	0.333	
-31	826	82	0.305	
-32	827	91	0.275	
-33	828	100	0.250	
-34	829	110	0.227	
-35	830	115	0.218	
-36	831	120	0.208	
-37	832	130	0.192	
-38	833	150	0.166	
-39	834	180	0.139	325
-40	835	200	0.125	440
-41	836	220	0.113	440
-42	837	240	0.104	440
-43	838	270	0.093	580
M27/46-44 A OR B	TF5S03ZZ839	300	0.083	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 25 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/47

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 25 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 88 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.

POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 7 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 4.4 OUNCES MAXIMUM

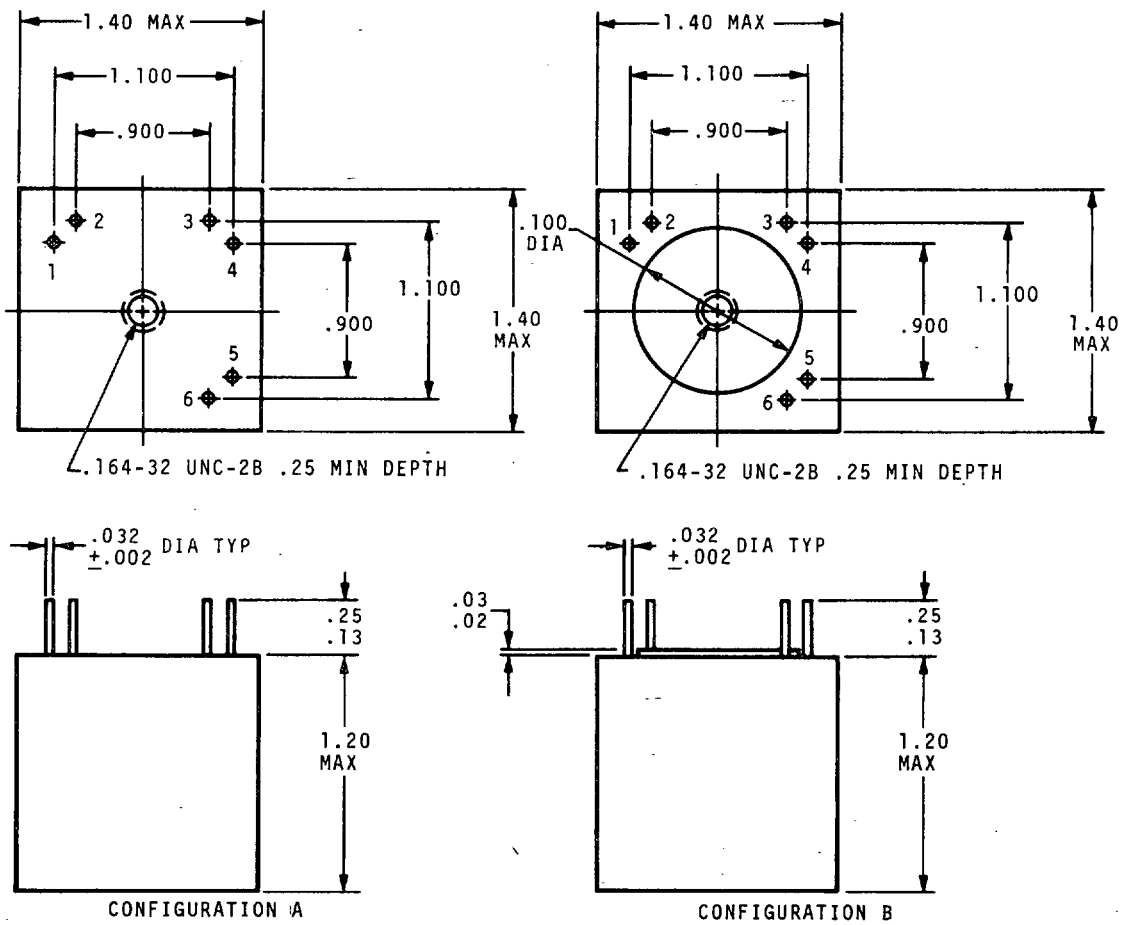



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 25 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/47

PART NUMBER:

EXAMPLE: M 27/47-01 A OR B

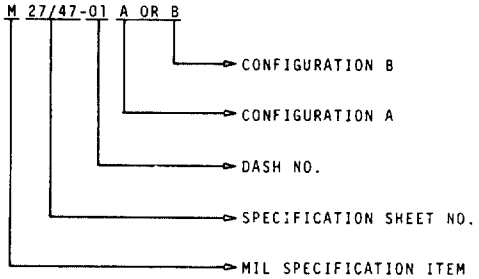

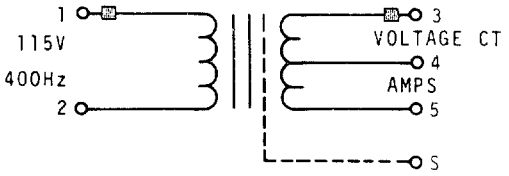

MAX ALT 70,000'

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	TYPE DESIGNATION	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/47-01 A OR B	TF5S03ZZ840	6	4.167	325
-02	841	6.3	3.968	
-03	842	7	3.571	
-04	843	7.5	3.333	
-05	844	8	3.125	
-06	845	9	2.778	
-07	846	10	2.500	
-08	847	11	2.273	
-09	848	12	2.083	
-10	849	12.6	1.984	
-11	850	13	1.923	
-12	851	15	1.667	
-13	852	16	1.563	
-14	853	18	1.389	
-15	854	20	1.250	
-16	855	22	1.136	
-17	856	24	1.042	
-18	857	26	0.962	
-19	858	28	0.893	
-20	859	30	0.833	
-21	860	33	0.758	
-22	861	36	0.694	
-23	862	39	0.641	
-24	863	43	0.581	
-25	864	47	0.532	
-26	865	51	0.490	
-27	866	56	0.446	
-28	867	62	0.403	
-29	868	68	0.367	
-30	869	75	0.333	
-31	870	82	0.305	
-32	871	91	0.275	
-33	872	100	0.250	
-34	873	110	0.227	
-35	874	115	0.218	
-36	875	120	0.208	
-37	876	130	0.192	
-38	877	150	0.166	
-39	878	180	0.139	325
-40	879	200	0.125	440
-41	880	220	0.113	440
-42	881	240	0.104	440
-43	882	270	0.093	580
M27/47-44 A OR B	TF5S03ZZ883	300	0.083	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 25 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/62

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 25 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 88 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 7 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 4.95 OUNCES MAXIMUM

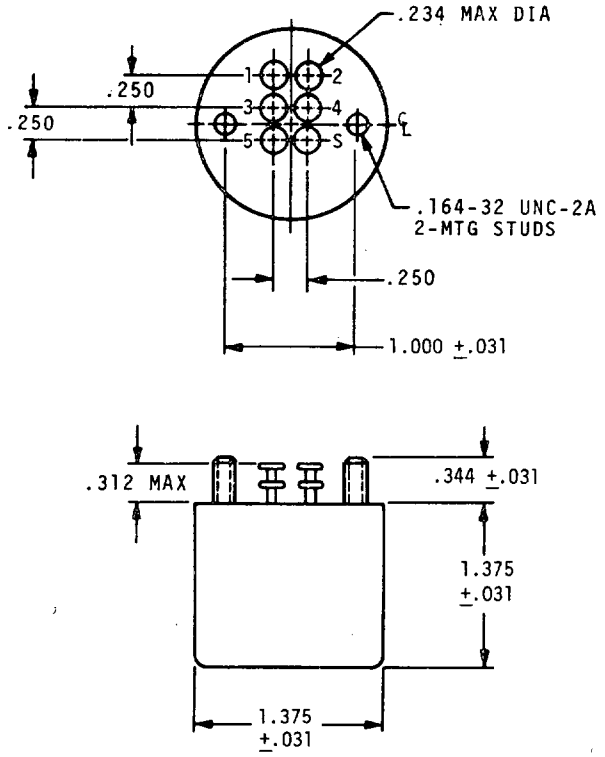

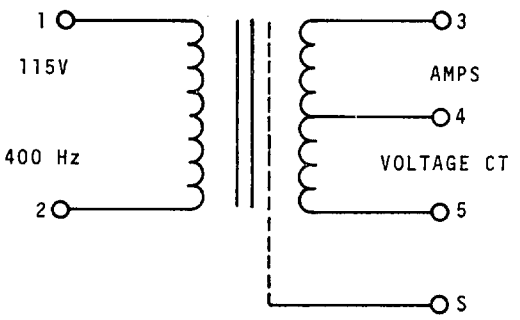

MAX ALT 70,000'

CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 25 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/62

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX	M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/62-01	6	4.167	325	M27/62-23	39	0.641	325
-02	6.3	3.968	325	-24	43	0.581	325
-03	7	3.571	325	-25	47	0.532	325
-04	7.5	3.333	325	-26	51	0.490	325
-05	8	3.125	325	-27	56	0.446	325
-06	9	2.778	325	-28	62	0.403	325
-07	10	2.500	325	-29	68	0.367	325
-08	11	2.273	325	-30	75	0.333	325
-09	12	2.083	325	-31	82	0.305	325
-10	12.6	1.984	325	-32	91	0.275	325
-11	13	1.923	325	-33	100	0.250	325
-12	15	1.667	325	-34	110	0.227	325
-13	16	1.563	325	-35	115	0.218	325
-14	18	1.389	325	-36	120	0.208	325
-15	20	1.250	325	-37	130	0.192	325
-16	22	1.136	325	-38	150	0.166	325
-17	24	1.042	325	-39	180	0.139	325
-18	26	0.962	325	-40	200	0.125	440
-19	28	0.893	325	-41	220	0.113	440
-20	30	0.833	325	-42	240	0.104	440
-21	33	0.758	325	-43	270	0.093	580
M27/62-22	36	0.694	325	M27/62-44	300	0.083	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 50 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/63

REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 45 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 92 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO I AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED


REGULATION: SHALL NOT EXCEED 3 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 11 OUNCES MAXIMUM

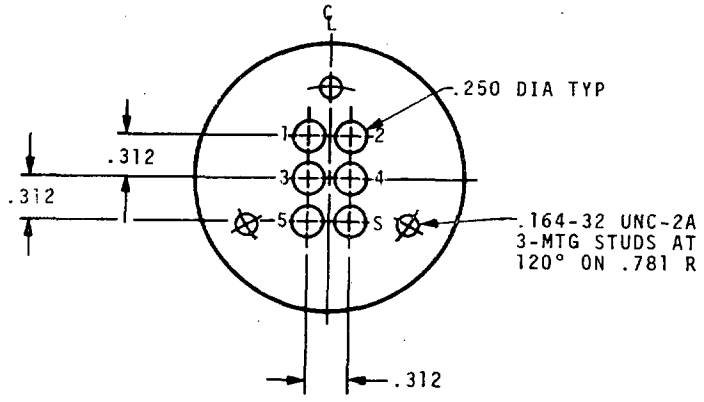

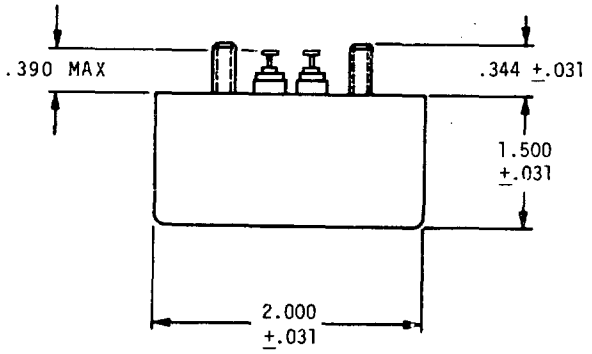

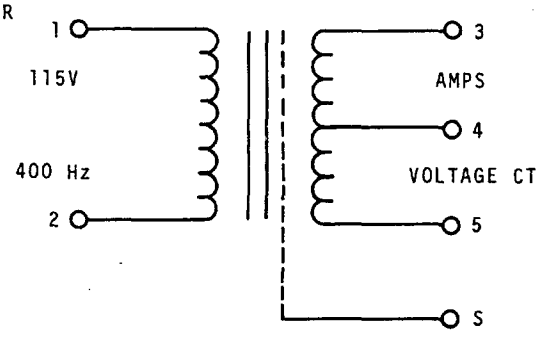

MAX ALT 70,000'
CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 50 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/63

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX	M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/63-01	6	8.333	325	M27/63-23	39	1.282	325
-02	6.3	7.937	325	-24	43	1.163	325
-03	7	7.143	325	-25	47	1.064	325
-04	7.5	6.667	325	-26	51	0.980	325
-05	8	6.250	325	-27	56	0.893	325
-06	9	5.556	325	-28	62	0.806	325
-07	10	5.000	325	-29	68	0.735	325
-08	11	4.545	325	-30	75	0.667	325
-09	12	4.167	325	-31	82	0.610	325
-10	12.6	3.968	325	-32	91	0.549	325
-11	13	3.846	325	-33	100	0.500	325
-12	15	3.333	325	-34	110	0.455	325
-13	16	3.125	325	-35	115	0.435	325
-14	18	2.778	325	-36	120	0.417	325
-15	20	2.500	325	-37	130	0.385	325
-16	22	2.273	325	-38	150	0.333	325
-17	24	2.083	325	-39	180	0.278	325
-18	26	1.923	325	-40	200	0.250	440
-19	28	1.786	325	-41	220	0.227	440
-20	30	1.667	325	-42	240	0.208	440
-21	33	1.515	325	-43	270	0.185	580
M27/63-22	36	1.389	325	M27/63-44	300	0.167	580

Source: https://assist.dla.mil-Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 75 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/64

REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 60 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 92 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED


REGULATION: SHALL NOT EXCEED 3 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 18.7 OUNCES MAXIMUM

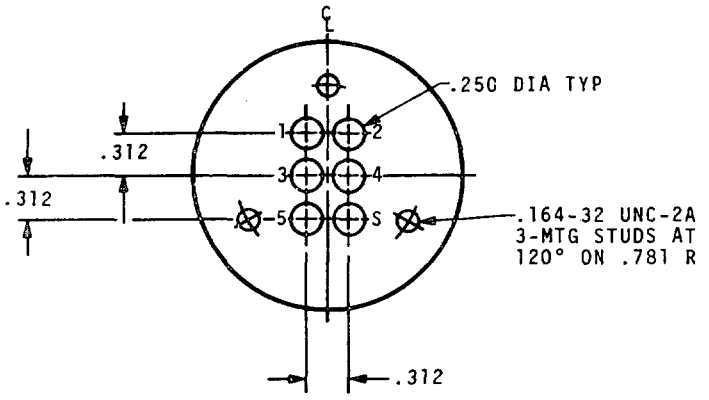

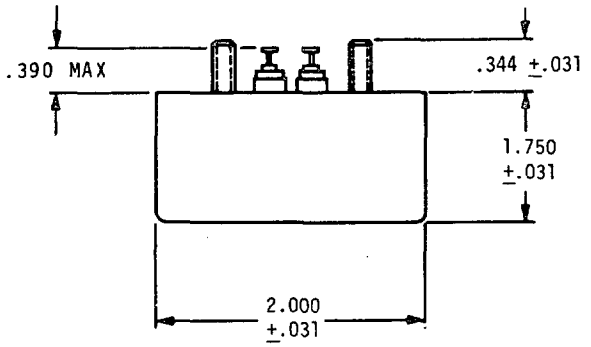

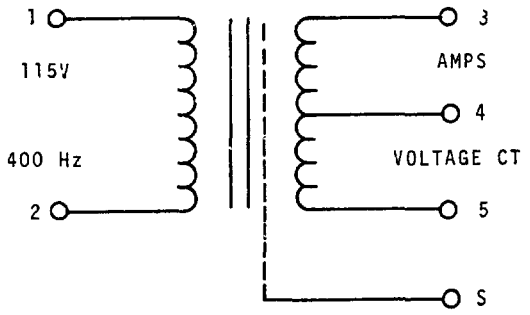

MAX ALT 70,000'

CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 75 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/64

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX	M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±3%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/64-01	10	7.50	325	M27/64-20	51	1.47	325
-02	11	6.82	325	-21	56	1.34	325
-03	12	6.25	325	-22	62	1.21	325
-04	12.6	5.95	325	-23	68	1.10	325
-05	13	5.77	325	-24	75	1.00	325
-06	15	5.00	325	-25	82	0.92	325
-07	16	4.69	325	-26	91	0.82	325
-08	18	4.17	325	-27	100	0.75	325
-09	20	3.75	325	-28	110	0.68	325
-10	22	3.41	325	-29	115	0.65	325
-11	24	3.13	325	-30	120	0.63	325
-12	26	2.89	325	-31	130	0.58	325
-13	28	2.68	325	-32	150	0.50	325
-14	30	2.50	325	-33	180	0.42	325
-15	33	2.27	325	-34	200	0.38	440
-16	36	2.08	325	-35	220	0.34	440
-17	39	1.92	325	-36	240	0.31	440
-18	43	1.74	325	-37	270	0.28	580
M27/64-19	47	1.60	325	M27/64-38	300	0.25	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 100 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/65

REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 75 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 93 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED


REGULATION: SHALL NOT EXCEED 2.5 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 18.7 OUNCES MAXIMUM

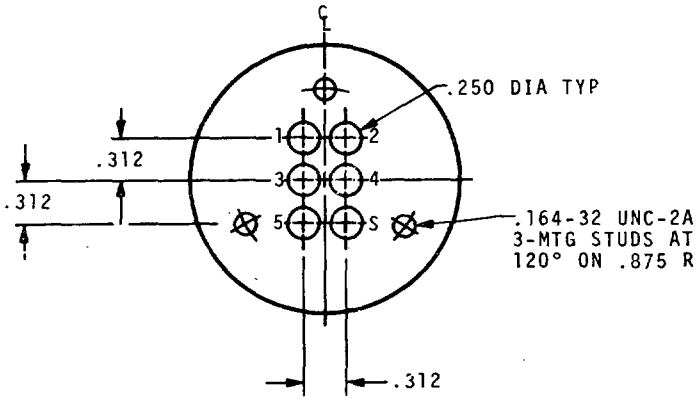

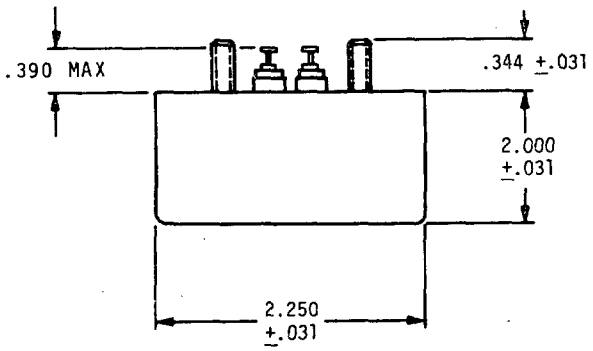

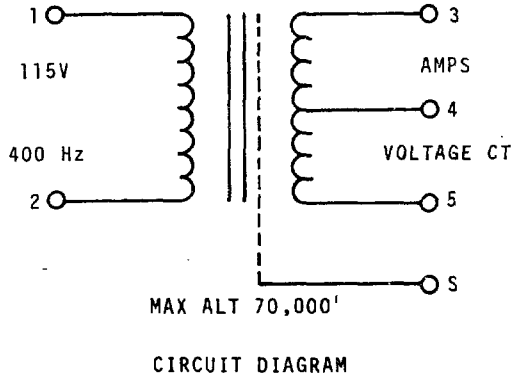

CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 100 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/65

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS	SECONDARY CURRENT (3-5) AMPS	WORKING VOLTAGE VRMS MAX	M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS	SECONDARY CURRENT (3-5) AMPS	WORKING VOLTAGE VRMS MAX
	±3%	RMS			±3%	RMS	
M27/65-01	12	8.33	325	M27/65-19	56	1.79	325
-02	12.6	7.94	325	-20	62	1.61	325
-03	13	7.69	325	-21	68	1.47	325
-04	15	6.67	325	-22	75	1.33	325
-05	16	6.25	325	-23	82	1.22	325
-06	18	5.56	325	-24	91	1.10	325
-07	20	5.00	325	-25	100	1.00	325
-08	22	4.55	325	-26	110	0.91	325
-09	24	4.17	325	-27	115	0.87	325
-10	26	3.85	325	-28	120	0.83	325
-11	28	3.57	325	-29	130	0.77	325
-12	30	3.33	325	-30	150	0.67	325
-13	33	3.03	325	-31	180	0.56	325
-14	36	2.78	325	-32	200	0.50	440
-15	39	2.56	325	-33	220	0.45	440
-16	43	2.33	325	-34	240	0.42	440
-17	47	2.13	325	-35	270	0.37	580
M27/65-18	51	1.96	325	M27/65-36	300	0.33	580

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 250 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/66

REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I

PRIMARY VOLTAGE (1-2): 115 VOLTS ±10 PERCENT, 400 Hz ±5 PERCENT

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2); CURRENT IN (1-2) SHALL NOT EXCEED 125 mA RMS.

RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2) AND A RESISTIVE LOAD WITH CURRENT AS SPECIFIED IN TABLE I IN (3-5), THE VOLTAGE ACROSS (3-5) SHALL BE AS SPECIFIED IN TABLE I.

EFFICIENCY: 95 PERCENT MINIMUM AT RATED LOAD


ELECTROSTATIC SHIELDING: THE VOLTAGE RATIO SHALL BE A MINIMUM OF 5 TO 1 AT 20 KHz.


POLARITY: ADDITIVE WITH TERMINALS 2 AND 3 CONNECTED

REGULATION: SHALL NOT EXCEED 2 PERCENT

PHASE SHIFT: 1.0 ELECTRICAL DEGREE BETWEEN PRIMARY AND SECONDARY VOLTAGE AT RATED LOAD MAXIMUM

WEIGHT: 30 OUNCES MAXIMUM

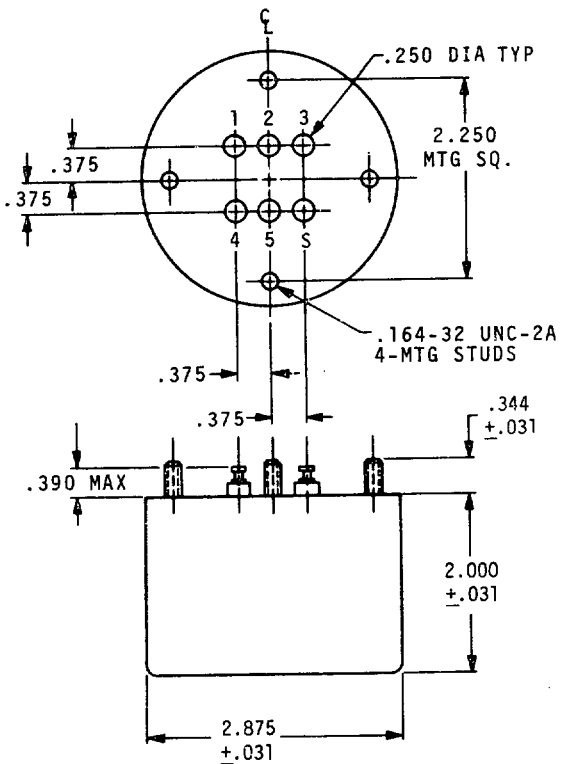

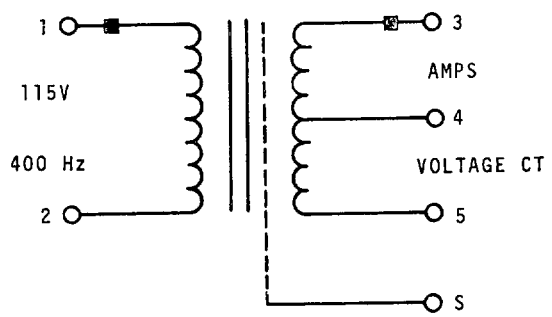

MAX ALT 70,000'

CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, 250 VA , 400 Hz, ELECTROSTATIC SHIELDED, MIL-T-27/66

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±5%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX	M PART NUMBER	SECONDARY VOLTAGE (3-5) VRMS ±5%	SECONDARY CURRENT (3-5) AMPS RMS	WORKING VOLTAGE VRMS MAX
M27/66-01	26	9.62	325	M27/66-15	91	2.75	325
-02	28	8.93	325	-16	100	2.50	325
-03	30	8.33	325	-17	110	2.27	325
-04	33	7.58	325	-18	115	2.17	325
-05	36	6.94	325	-19	120	2.08	325
-06	39	6.41	325	-20	130	1.92	325
-07	43	5.81	325	-21	150	1.66	325
-08	47	5.32	325	-22	180	1.39	325
-09	51	4.90	325	-23	200	1.25	440
-10	56	4.46	325	-24	220	1.14	440
-11	62	4.03	325	-25	240	1.04	440
-12	68	3.68	325	-26	270	0.93	580
-13	75	3.33	325	M27/66-27	300	0.83	580
M27/66-14	82	3.05	325				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, MIL-T-27/77

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY CURRENT: .495 AMPERE

VOLT AMPERE: 56.9 VA

PRIMARY VOLTAGE (1-2): 115 VOLTS RMS, 400 Hz

SECONDARY VOLTAGE (3-4): 115 VOLTS RMS, 0.45 AMPERE RMS

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2), CURRENT IN (1-2) SHALL NOT EXCEED 100 mA AND THE POWER IN (1-2) SHALL NOT EXCEED 5 WATTS.

VOLTAGE ACROSS (3-4): 123 VOLTS ±1 PERCENT


RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2), THE VOLTAGE ACROSS (3-4) SHALL BE 115 VOLTS ±3 PERCENT.


DC RESISTANCE:

(1-2): 6.5 OHMS ±20 PERCENT

(3-4): 8.7 OHMS ±20 PERCENT


WIEGHT: 7.7 OUNCES MAXIMUM.

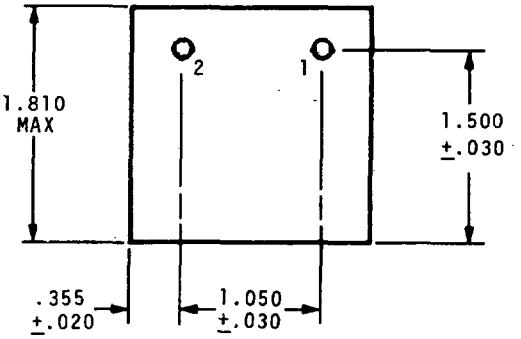

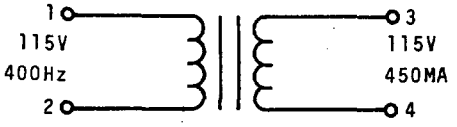


WV 326 MAX

CIRCUIT DIAGRAM

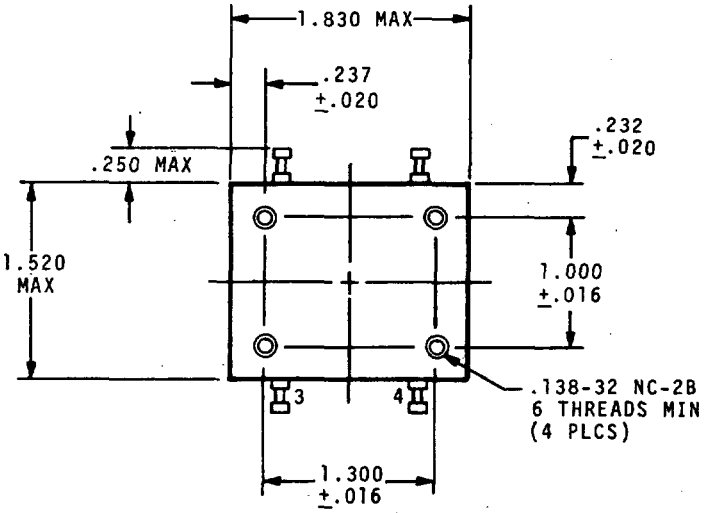


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, PULSE, LOW POWER, MIL-T-21038/2

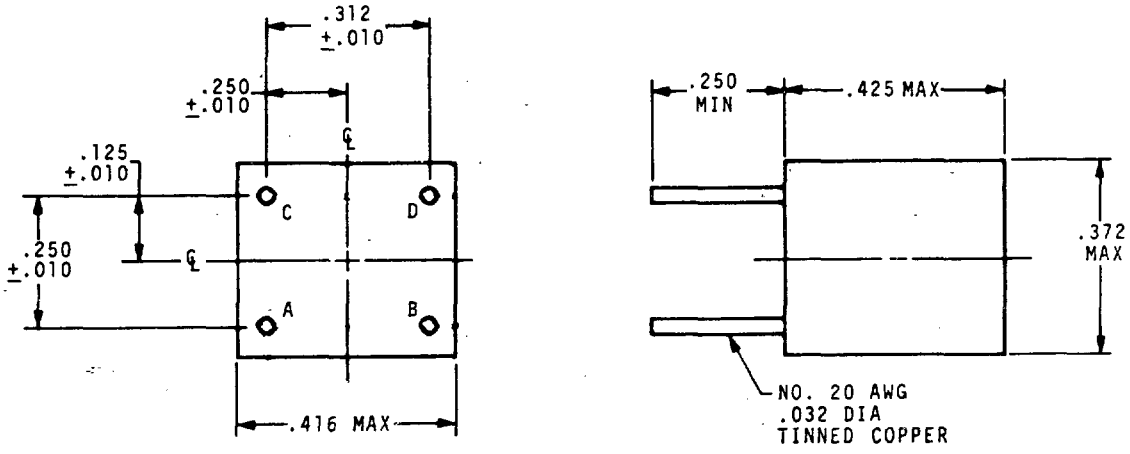

NOTE: WEIGHT: 3.12 GRAMS MAXIMUM.




CIRCUIT DIAGRAM

TABLE I: ELECTRICAL CHARACTERISTICS INCLUDING WAVEFORM PARAMETERS


M PART NUMBER	VOLTAGE PEAK		DCR ±20% OHMS		TURNS RATIO	INDUCTANCE mH	PULSE DURATION µSEC	PULSE RISE TIME µSEC	OVER-SHOOT % MAX	DROOP % MAX	DECAY TIME µSEC MAX	PULSE REPETITION FREQUENCY Hz
	A/B	C/D	A/B	C/D								
M21038/2-001	3	4.7	32	40	1.1 ±3%	200 MIN AT 1.0 V, 1 kHz	60	0.8	10	5	0.5	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, PULSE, LOW POWER, MIL-T-21038/8

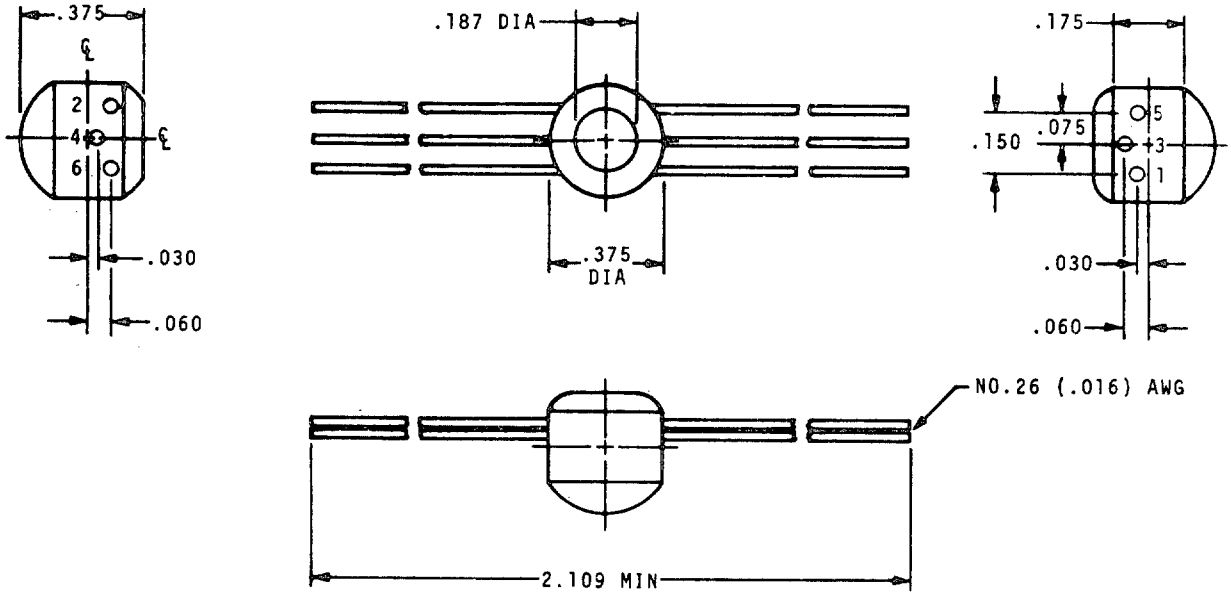

NOTE: WEIGHT: 1.0 GRAM



CIRCUIT DIAGRAM


TABLE I: ELECTRICAL CHARACTERISTICS INCLUDING WAVEFORM PARAMETERS


M PART NUMBER	DCR OHMS			BLOCKING OSCILLATOR PULSE					COUPLING CIRCUIT CHARACTERISTICS							FREQ RESPONSE ±2 dB 1/		TURNS RATIO
	1-2	3-4	5-6	PULSE WIDTH µSEC	RISE TIME µSEC	OVER-SHOOT %	DROOP %	BACK SWING %	PULSE WIDTH µSEC	VOLTS OUT	RISE TIME µSEC	OVER-SHOOT %	DROOP %	BACK SWING %	IMPD OUT OHMS	KHz MIN	MHz MAX	
M21038/8-001	3	3.5	4	.05	.022	0	20	10	.05	17	.01	20	0	35	250	260	34	1:1:1
M21038/8-002	5.5	6.5	7	.10	.024	0	25	10	.10	19	.01	30	10	50	250	220	34	1:1:1

1/ PER COUPLING CIRCUIT (Z), IN/OUT, 1.0 V INPUT.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, PULSE, LOW POWER, MIL-T-21038/9

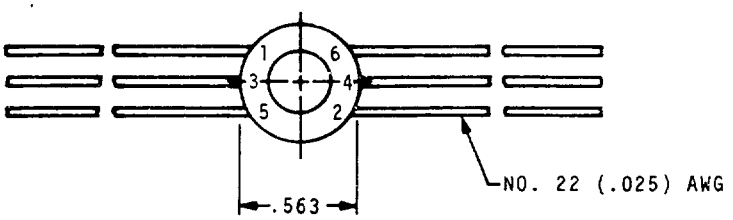

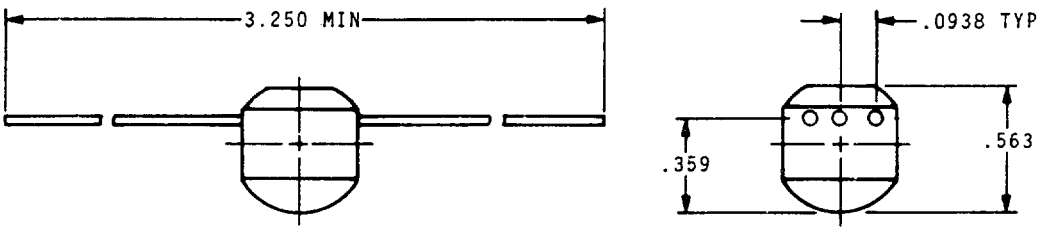

NOTE: WEIGHT: 4.0 GRAMS.



CIRCUIT DIAGRAM

TABLE I: ELECTRICAL CHARACTERISTICS INCLUDING WAVEFORM PARAMETERS

M PART NUMBER	DCR OHMS			BLOCKING OSCILLATOR PULSE					COUPLING CIRCUIT CHARACTERISTICS							FREQUENCY RESPONSE ±2 dB 1/		TURNS RATIO
	1-2	3-4	5-6	PULSE WIDTH µSEC	RISE TIME µSEC	OVER-SHOOT %	DROOP %	BACK SWING %	PULSE WIDTH µSEC	VOLTS OUT	RISE TIME µSEC	OVER-SHOOT %	DROOP %	BACK SWING %	IMPD OUT OHMS	KHz MIN	MHz MAX	
M21038/9-001	3.7	4.0	4	.20	.026	0	25	8	.20	18	.01	30	15	65	500	260	93	1:1:1
-002	5.5	5.8	6	.50	.03	0	20	5	.50	20	.01	30	20	65	500	85	73	1:1:1
-003	8	8.5	9	1	.04	0	20	10	1	24	.02	15	15	65	500	50	62.5	1:1:1
-004	20	21	22	2	.05	0	20	10	2	27	.05	10	15	35	500	24.5	49	1:1:1
-005	28	31	33	3	.10	1	20	8	3	26	.07	10	10	35	500	12.6	5.65	1:1:1
M21038/9-006	36	41	44	5	.13	1	25	8	5	23	.15	10	10	45	1,000	13	3.465	1:1:1

1/ PER COUPLING CIRCUIT (Z) IN/OUT 1.0 V INPUT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SECTION 3
TRANSFORMERS, AUDIO FREQUENCY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/67

REQUIREMENTS:


ELECTRICAL RATINGS: SEE TABLE I

POWER LEVEL: 500 MILLIWATTS AT 60 Hz


ELECTRICAL CHARACTERISTICS: SEE TABLE II

FREQUENCY RESPONSE:

REFERENCE FREQUENCY: 1 KHz

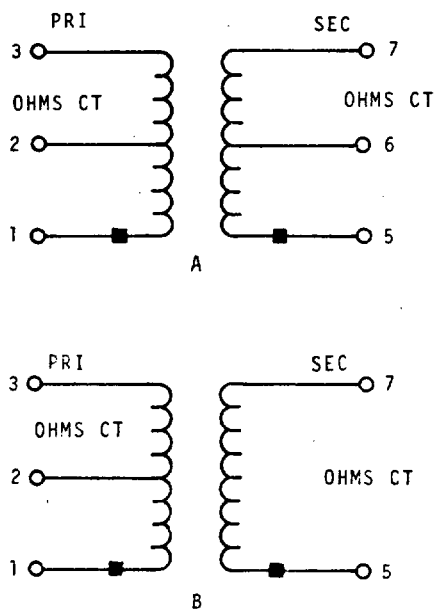

CIRCUIT DIAGRAMS

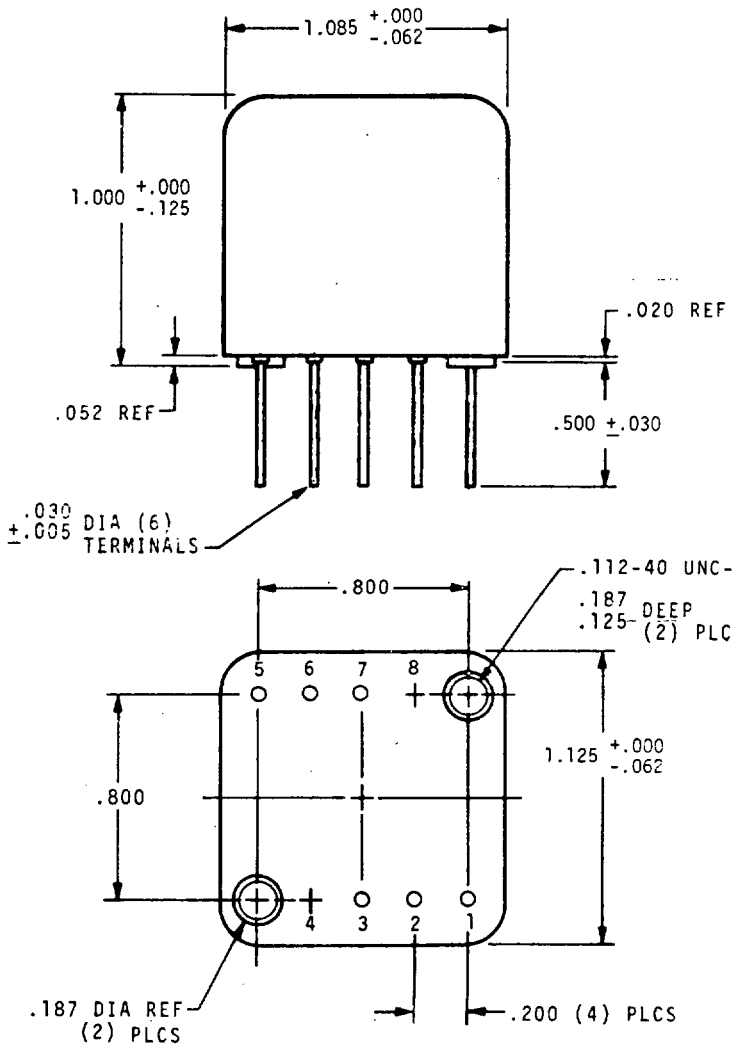

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/67

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	CIRCUIT DIAGRAM	PRIMARY IMPEDANCE (1-3) OHMS	SECONDARY IMPEDANCE (5-7) OHMS	PRIMARY DCR (1-3) OHMS ±25%	SECONDARY DCR (5-7) OHMS ±25%	PRIMARY UNBALANCED DC CURRENT mA MAX	WORKING VOLTAGE
M27/67-01	A	10,000 CT	10,000 CT	700	900	1.0	355
-02	A	10,000 CT	600 CT	700	50	1.0	355
-03	B	10,000 CT	4	700	0.37	1.0	355
-04	B	1,500 CT	15	93	1.2	2.5	175
-05	A	1,000 CT	600 CT	65	50	3.0	175
-06	B	1,000 CT	4	65	0.37	3.0	175
-07	A	600 CT	600 CT	37	50	4.0	175
-08	A	600 CT	60 CT	37	5	4.0	175
-09	B	600 CT	15	37	1.2	4.0	175
-10	B	600 CT	4	37	0.37	4.0	175
M27/67-11	A	250 CT	600 CT	16	50	7.0	175

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	FREQUENCY RESPONSE AT 60 Hz TO 10 KHz ±1 dB			
	Z_S (1-3) OHMS	Z_L (5-7) OHMS	E_L VOLTS	PRIMARY DC CURRENT (1-3) mA
M27/67-01	10,000	10,000	16.0	0.5
-02	10,000	600	16.0	0.5
-03	10,000	4	16.0	0.5
-04	1,500	15	6.0	1.25
-05	1,000	600	5.0	1.5
-06	1,000	4	5.0	1.5
-07	600	600	4.0	2.0
-08	600	60	4.0	2.0
-09	600	15	4.0	2.0
-10	600	4	4.0	2.0
M27/67-11	250	600	4.0	3.5

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/69

REQUIREMENTS:


ELECTRICAL RATINGS: SEE TABLE I


POWER LEVEL: 500 MILLIWATTS MAXIMUM AT 200 Hz

WORKING VOLTAGE: 175 VOLTS


FREQUENCY RANGE: 200 Hz TO 20 KHz

WEIGHT: 26.93 GRAMS MAXIMUM

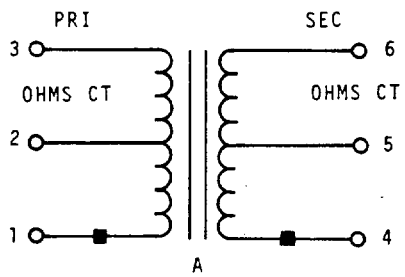

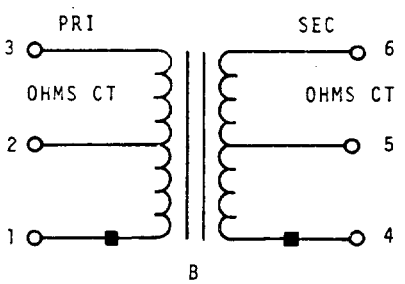

CIRCUIT DIAGRAMS

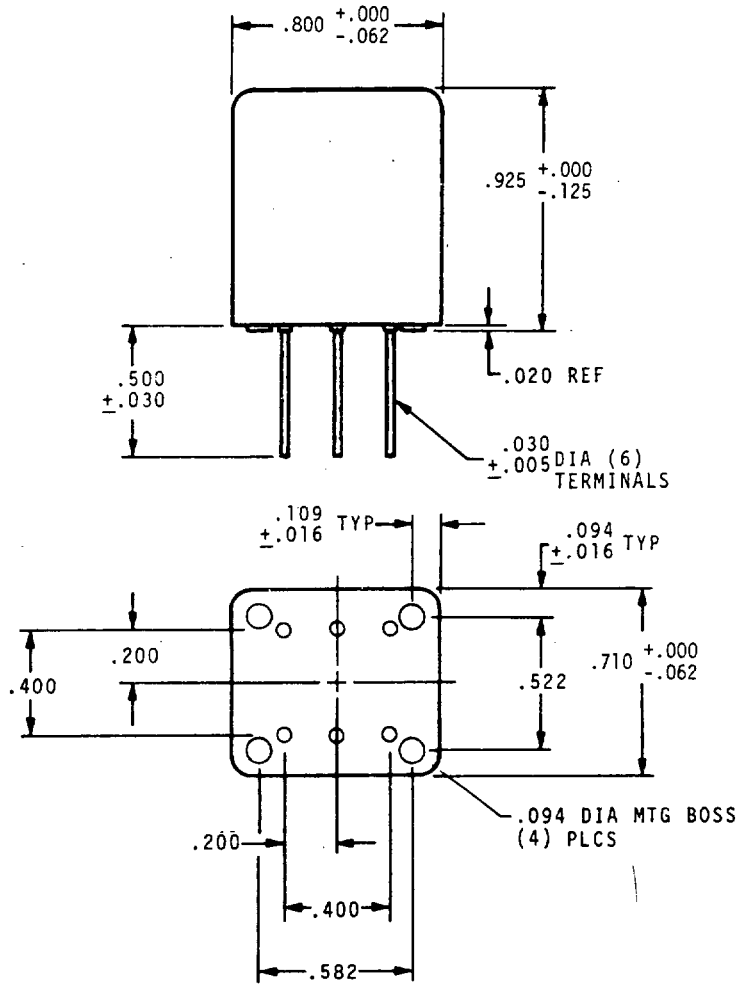

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/69

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	CIRCUIT DIAGRAM	PRIMARY IMPEDANCE (1-3) OHMS	SECONDARY IMPEDANCE (4-6) OHMS	PRIMARY DCR ±25% OHMS	SECONDARY DCR ±25% OHMS	PRIMARY UNBALANCE DC CURRENT mA MAX
M27/69-01	A	25,000 CT	1,000 CT	2,700	150	0
-02	A	10,000 CT	10,000 CT	1,100	1,200	1.0
-03	A	10,000 CT	1,500 CT	1,100	180	1.0
-04	A	10,000 CT	600 CT	1,100	75	1.0
-05	B	10,000 CT	4	1,100	0.5	1.0
-06	A	4,000 CT	10,000 CT	440	1,200	1.5
-07	B	1,500 CT	15	170	1.8	2.5
-08	A	1,000 CT	600 CT	105	75	3.0
-09	B	1,000 CT	4	105	0.5	3.0
-10	A	600 CT	25,000 CT	65	3,700	4.0
-11	A	600 CT	600 CT	65	75	4.0
-12	B	600 CT	60	65	7	2.0
-13	B	600 CT	15	65	2	2.0
-14	B	600 CT	4	65	0.5	2.0
M27/69-15	A	250 CT	600 CT	30	75	2.0

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	FREQUENCY RESPONSE AT 200 Hz TO 20 KHz ±1 dB			
	Z_S (1-3) OHMS	Z_L (4-6) OHMS	E_L VOLTS	PRIMARY DC CURRENT (1-3) mA
M27/69-01	25,000	1,000	3.0	0
-02	10,000	10,000	8.0	0.5
-03	10,000	1,500	8.0	0.5
-04	10,000	600	8.0	0.5
-05	10,000	4	8.0	0.5
-06	4,000	10,000	5.0	0.75
-07	1,500	15	3.0	1.25
-08	1,000	600	3.0	1.5
-09	1,000	4	3.0	1.5
-10	600	25,000	2.0	2.0
-11	600	600	2.0	2.0
-12	600	60	2.0	2.0
-13	600	15	2.0	2.0
-14	600	4	2.0	2.0
M27/69-15	250	600	2.0	3.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/72


REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I


WORKING VOLTAGE: 175 VOLTS


FREQUENCY RANGE: 300 Hz TO 100 KHz (EXCEPT 300 Hz TO 40 KHz FOR M27/72-01)

WEIGHT: 3.97 GRAMS MAXIMUM

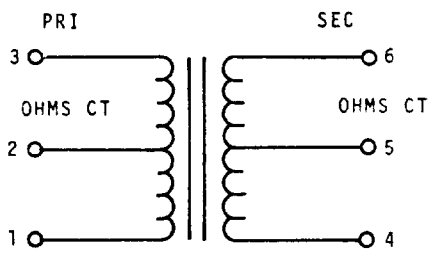

CIRCUIT DIAGRAM

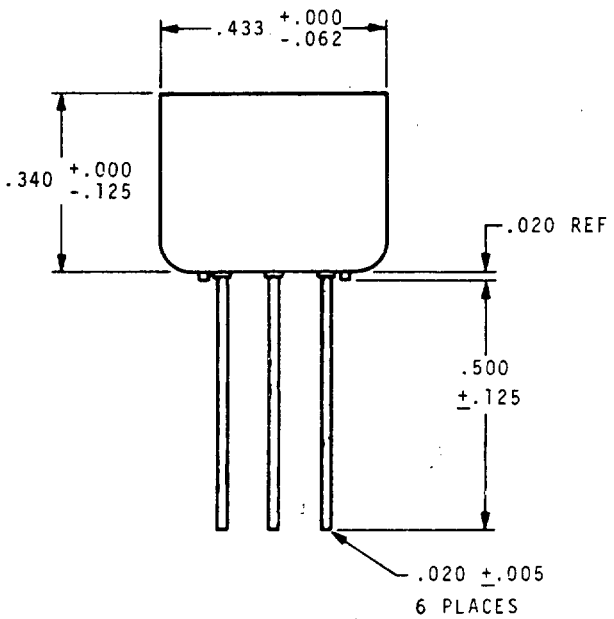

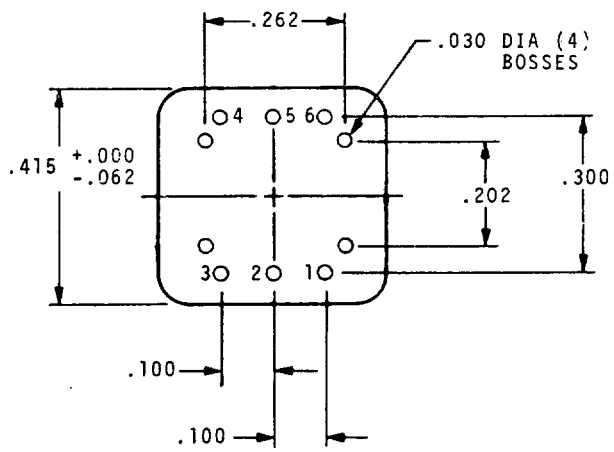

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/72

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	PRIMARY IMPEDANCE (1-3) OHMS CT	SECONDARY IMPEDANCE (4-6) OHMS CT	PRIMARY DCR ±25% OHMS	PRIMARY POWER LEVEL AT 300 Hz MAX mW	SECONDARY DCR ±25% OHMS	PRIMARY UNBALANCED DC CURRENT MAX mA
M27/72-01	100,000	1,000	6,800	10	110	0.2
-02	25,000	1,000	4,300	50	140	1.2
-03	25,000	600	4,300	50	90	1.25
-04	10,000	10,000	1,350	50	1,350	1.0
-05	10,000	1,500	1,350	50	170	1.0
-06	10,000	600	1,350	50	90	1.0
-07	1,000	600	140	50	90	6.25
-08	600	600	90	50	90	8.0
M27/72-09	600	60	90	50	10	8.0

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	FREQUENCY RESPONSE AT 300 Hz TO 100 KHz ±2 dB			
	Z_S (1-3) OHMS	Z_L (4-6) OHMS	E_L VOLTS	PRIMARY DC CURRENT (1-3) mA
M27/72-01 1/	100,000	1,000	10	0.1
-02	25,000	1,000	5.0	0.6
-03	25,000	600	5.0	0.63
-04	10,000	10,000	2.0	0.5
-05	10,000	1,500	2.0	0.5
-06	10,000	600	2.0	0.5
-07	1,000	600	1.0	3.12
-08	600	600	0.6	4.0
M27/72-09	600	60	0.6	4.0

1/ FREQUENCY RESPONSE IS 300 Hz TO 40 KHz ±2 dB.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/103

REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I

FREQUENCY RANGE: 400 Hz TO 100 KHz

ELECTRICAL CHARACTERISTICS: SEE TABLE II


NO LOAD (CENTER-TAP VOLTAGE UNBALANCE ONLY): ±1 PERCENT WITH 5.0 VOLTS, 5 KHz ACROSS THE PRIMARY


HARMONIC DISTORTION: TOTAL HARMONIC CONTENT OF THE OUTPUT SHALL BE A MAXIMUM 5 PERCENT AT THE SPECIFIED POWER LEVEL AND PRIMARY DC CURRENT (SEE TABLE I).

INSERTION LOSS: AT THE SPECIFIED POWER LEVEL (SEE TABLE I), THE INSERTION LOSS SHALL BE A MAXIMUM OF 3 dB.


FREQUENCY RESPONSE: ±3 dB AT THE RATED SOURCE AND LOAD IMPEDANCES (SEE TABLE II) WITH 1 mW LEVEL OUTPUT AND A REFERENCE FREQUENCY OF 1 KHz.

WEIGHT: 3.2 GRAMS MAXIMUM

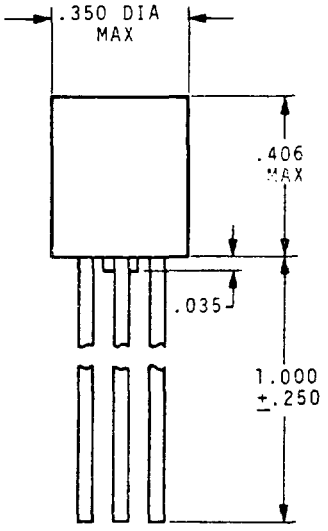

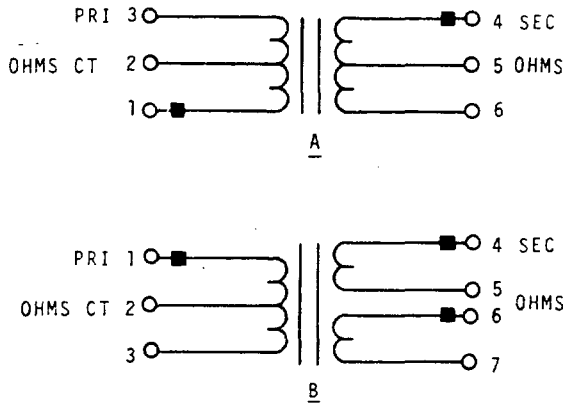

CIRCUIT DIAGRAM

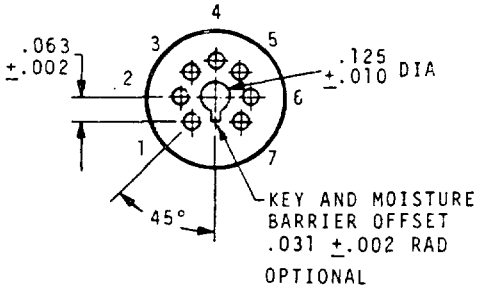

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/103

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	CIRCUIT DIAGRAM	PRIMARY IMPEDANCE OHMS	SECONDARY IMPEDANCE OHMS	PRIMARY DC CURRENT mA	POWER LEVEL AT 1 KHz MAX mW	PRIMARY DC RESISTANCE +25% OHMS	SECONDARY DC RESISTANCE +25% OHMS
M27/103-01	A	10,000 CT (1-3) 12,000 CT	10,000 CT (4-6) 12,000 CT	1	100	970	1220
-02	A	20,000 CT (1-3) 30,000 CT	800 CT (4-6) 1,200 CT	0.5	50	815	140
-03	B	10,000 CT (1-3) 12,500 CT	2,000 SPLIT (4-7) 2,500 SPLIT	1	100	620	220
-04	A	10,000 CT (1-3) 12,000 CT	2,000 CT (4-6) 2,400 CT	1	100	870	180
-05	A	10,000 CT 12,500 CT	1,200 CT (4-6) 1,500 CT	1	100	870	130
-06	A	10,000 CT (1-3) 12,000 CT	500 CT (4-6) 600 CT	1	100	870	50
-07	B	2,000 CT (1-3) 2,500 CT	8,000 SPLIT (4-7) 10,000 SPLIT	3	100	180	440
-08	A	1,500 CT (1-3)	600 CT (4-6)	3	500	87	90
-09	A	1,000 CT (1-3) 1,200 CT	50 CT (4-6) 60 CT	3	500	110	9
-10	A	500 CT (1-3)	600 CT (4-6)	5.5	500	32	89
-11	A	500 CT (1-3) 600 CT	50 CT (4-6) 60 CT	3	500	65	9
-12	B	400 CT (1-3) 500 CT	400 SPLIT (4-7) 500 SPLIT	5 6	500	50	89
-13	B	400 CT (1-3) 500 CT	40 SPLIT (4-7) 50 SPLIT	8 6	500	50	6.5
-14	A	300 CT (1-3)	600 CT (4-6)	7	500	20	89
M27/103-15	B	80 CT (1-3) 100 CT	32 SPLIT (4-7) 40 SPLIT	12 10	500	11.5	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/103

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	FREQUENCY RESPONSE: ±3 dB AT 400 Hz TO 100 KHz AND 1 mW		RESONANCE, SECOND RESONANT FREQUENCY KHz MIN	POLARITY: ADDITIVE WITH TERMINALS (BELOW) CONNECTED
	Z_S OHMS	Z_L OHMS		
M27/103-01	10,000 CT (1-3)	10,000 CT (4-6)	750	3 AND 4
-02	20,000 CT (1-3)	800 CT (4-6)	500	3 AND 4
-03	10,000 CT (1-3)	2,000 CT (4-7)	750	(3-4) AND (5-6)
-04	10,000 CT (1-3)	2,000 CT (4-6_	750	3 AND 4
-05	10,000 CT (1-3)	1,200 CT (4-6)	750	3 AND 4
-06	10,000 CT (1-3)	500 CT (4-6)	750	3 AND 4
-07	2,000 CT (1-3)	8,000 CT (4-7)	750	(3-4) AND (5-6)
-08	1,500 CT (1-3)	600 CT (4-6)	750	3 AND 4
-09	1,000 CT (1-3)	50 CT (4-6)	750	3 AND 4
-10	500 CT (1-3)	600 CT (4-6)	750	3 AND 4
-11	500 CT (1-3)	50 CT (4-6)	750	3 AND 4
-12	400 CT (1-3)	400 (4-7)	1,000	(3-4) AND (5-6)
-13	400 CT (1-3)	40 (4-7)	750	(3-4) AND (5-6)
-14	300 CT (1-3)	600 CT (4-6)	750	3 AND 4
M27/103-15	80 CT (1-3)	32 (4-7)	750	(3-4) AND (5-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/144

REQUIREMENTS

ELECTRICAL RATINGS: SEE TABLE I

FREQUENCY RANGE: 400 Hz TO 100 KHz

ELECTRICAL CHARACTERISTICS: SEE TABLE II


NO LOAD (CENTER-TAP VOLTAGE UNBALANCE ONLY): ±1 PERCENT WITH 1.0 VOLT, 5 KHz ACROSS THE PRIMARY

HARMONIC DISTORTION: TOTAL HARMONIC CONTENT OF OUTPUT SHALL BE A MAXIMUM OF 5 PERCENT AT THE SPECIFIED POWER LEVEL AND PRIMARY DC CURRENT AT 1 KHz (SEE TABLE I).

INSERTION LOSS: AT THE SPECIFIED POWER LEVEL (SEE TABLE I), THE INSERTION LOSS SHALL BE A MAXIMUM OF 3 dB.

FREQUENCY RESPONSE: AT THE RATED SOURCE AND LOAD IMPEDANCE (SEE TABLE II) AND WITH A 1 MILLIWATT LEVEL OUTPUT OVER A FREQUENCY RANGE OF 400 Hz TO 100 KHz FREQUENCY RESPONSE SHALL BE A MAXIMUM OF ±3 dB. REFERENCE FREQUENCY = 1 KHz

WEIGHT: 3.0 GRAMS MAXIMUM

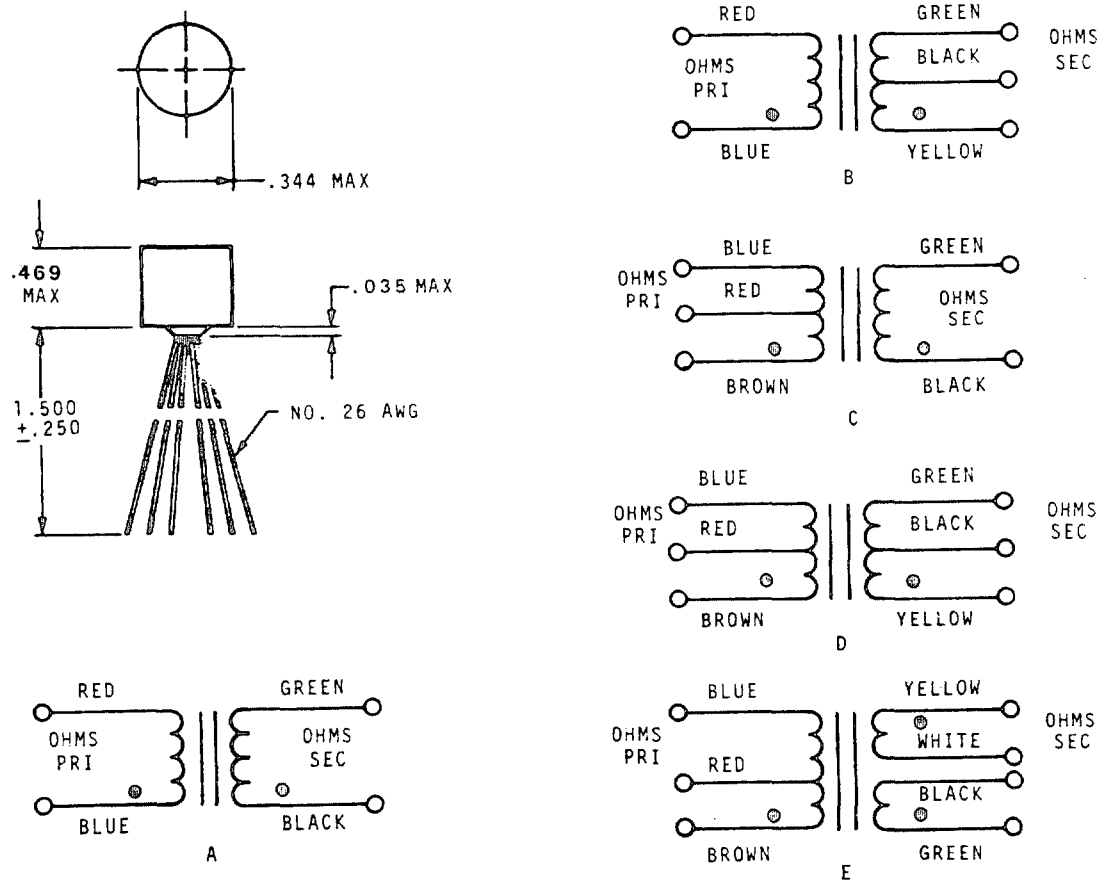

CIRCUIT DIAGRAMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/144

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	CIRCUIT DIAGRAM	PRIMARY IMPEDANCE OHMS	SECONDARY IMPEDANCE OHMS	PRIMARY DC CURRENT mA	PRIMARY DC RESISTANCE ±25% OHMS	PRIMARY POWER LEVEL AT 1 KHz MAX mW	SECONDARY DC RESISTANCE ±25% OHMS
M27/144-01	E	80 CT (BRN-BLU) 100 CT	32 SPLIT (YEL-GRN) 40 SPLIT	12 10	11.5	500	4.0
-02	C	300 CT	600 (BLK-GRN)	7	20		89
-03	E	400 CT 500 CT	40 SPLIT (YEL-GRN) 50 SPLIT	8 6	50		6.5
-04	E	400 CT 500 CT	400 SPLIT 500 SPLIT	8 6	50		89
-05	D	400 CT (BRN-BLU) 500 CT	4,000 CT (YEL-GRN) 5,000 CT	8 6	46	500	220
-06	A	500 (BLU-RED) 600	50 (BLK-GRN) 60	3 3	65	100	9
-07	C	500 CT (BRN-BLU)	600 (BLK-GRN)	5.5	32	500	89
-08	D	600 CT (BRN-BLU)	600 CT (YEL-GRN)	4	47		47
-09	C	900 CT (BRN-BLU)	600 (BLK-GRN)	4	53	500	90
-10	A	1,000 (BLU-RED) 1,200	50 60	3 3	110	100	9
-11	A	1,200	3.2	2	110	100	0.53
-12	C	1,500 CT (BRN-BLU)	600 (BLK-GRN)	3	87	500	90
-13	E	2,000 CT (BRN-BLU) 2,500 CT	2,000 SPLIT (YEL-GRN) 2,500 SPLIT	3 3	180	100	110
-14	E	2,000 CT (BRN-BLU) 2,500 CT	8,000 SPLIT 10,000 SPLIT	3 3	180		440
-15	B	10,000 (BLU-RED) 12,000	500 CT 600 CT	1	870		50
-16	B	10,000 (BLU-RED) 12,500	1,200 CT 1,500 CT		870		130
-17	D	10,000 CT (BRN-BLU) 12,000 CT	1,500 CT 1,800 CT		870		105
-18	E	10,000 CT (BRN-BLU) 12,000 CT	2,000 SPLIT 2,400 SPLIT		620		220
-19	B	10,000 (BLU-RED) 12,500	2,000 CT 2,500 CT		870		180
-20	D	10,000 CT (BRN-BLU) 12,000 CT	10,000 CT (YEL-GRN) 12,000 CT	1	970	100	1,220
-21	A	20,000 (BLU-RED) 30,000	800 (BLK-GRN) 1,200	0.5	815	50	140
M27/144-22	D	20,000 CT (BRN-BLU) 30,000 CT	800 CT (YEL-GRN) 1,200 CT	0.5	815	50	140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/144

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	FREQUENCY RESPONSE: ±3 dB AT 400 Hz TO 100 KHz AND 1 mW		RESONANCE, SECOND RESONANT FREQUENCY KHz MIN	POLARITY: ADDITIVE WITH TERMINALS (BELOW) CONNECTED
	Z_S OHMS	Z_L OHMS		
M27/144-01	80 CT (BRN-BLU)	32 (YEL-GRN)	750	BLU AND YEL, AND WHT AND BLK
-02	300 CT (BRN-BLU)	600 (BLK-GRN)	750	BLU AND BLK
-03	400 CT (BRN-BLU)	40 (YEL-GRN)	750	BLU AND YEL, AND WHT AND BLK
-04	400 CT (BRN-BLU)	400 (YEL-GRN)	1,000	BLU AND YEL, AND WHT AND BLK
-05	400 CT (BRN-BLU)	4,000 CT (YEL-GRN)	750	BLU AND YEL
-06	500 (BLU-RED)	50 (BLK-GRN)		RED AND BLK
-07	500 CT (BRN-BLU)	600 (BLK-GRN)		BLU AND BLK
-08	600 CT (BRN-BLU)	600 CT (YEL-GRN)		BLU AND YEL
-09	900 CT (BRN-BLU)	600 (BLK-GRN)		BLU AND YEL
-10	1,000 (BLU-RED)	50 (BLK-GRN)		RED AND BLK
-11	1,200 (BLU-RED)	3.2 (BLK-GRN)		RED AND BLK
-12	1,500 CT (BRN-BLU)	600 (BLK-GRN)		BLU AND BLK
-13	2,000 CT (BRN-BLU)	2,000 (YEL-GRN)		BLU AND YEL, AND WHT AND BLK
-14	2,000 CT (BRN-BLU)	8,000 (YEL-GRN)		BLU AND YEL, AND WHT AND BLK
-15	10,000 (BLU-RED)	500 (YEL-GRN)		RED AND YEL
-16	10,000 (BLU-RED)	1,200 (YEL-GRN)		RED AND YEL
-17	10,000 CT (BRN-BLU)	1,500 (YEL-GRN)		BLU AND YEL
-18	10,000 CT (BRN-BLU)	2,000 (YEL-GRN)		BLU AND YEL, AND WHT AND BLK
-19	10,000 (BLU-RED)	2,000 (YEL-GRN)		RED AND YEL
-20	10,000 CT (BRN-BLU)	10,000 CT (YEL-GRN)	750	BLU AND YEL
-21	20,000 (BLU-RED)	800 (BLK-GRN)	500	RED AND BLK
M27/144-22	20,000 CT (BRN-BLU)	800 (YEL-GRN)	500	BLU AND YEL

TABLE III: SUPERSESSION DATA

SUPERSEDING MILITARY PART NUMBER	SUPERSEDED MS PART NUMBER
M27/144-01	MS53225-1
-03	MS21416-1
-04	MS21417-1
-13	MS53226-1
-14	MS21418-1
M27/144-18	MS21420-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/165

REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I


ELECTRICAL CHARACTERISTICS: SEE TABLE II

RESONANCE:

SECOND RESONANT FREQUENCY: 20 KHz MINIMUM


INSERTION LOSS: 3 dB MAXIMUM AT 1 KHz

WEIGHT: 1.0 OUNCE, MAXIMUM.

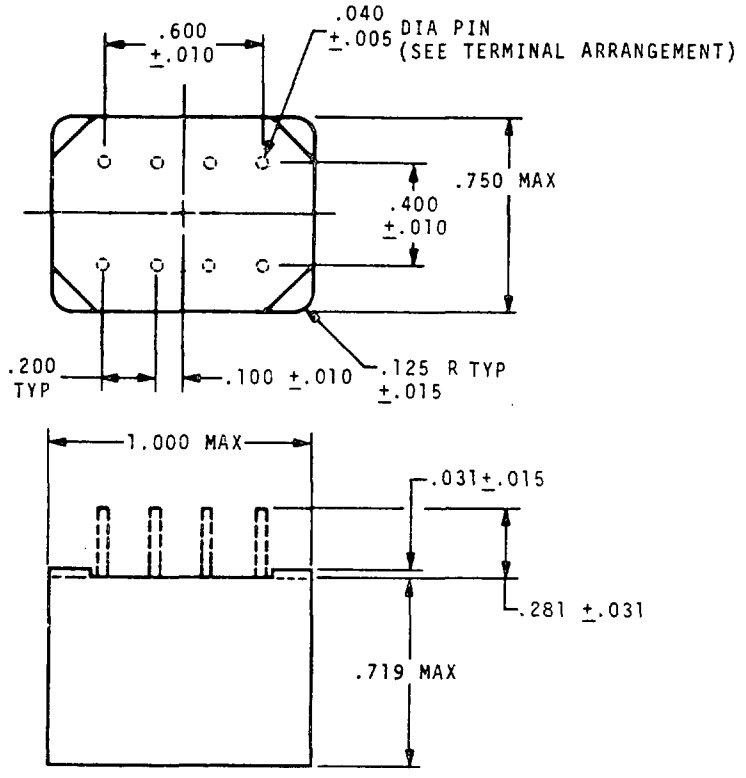


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/165

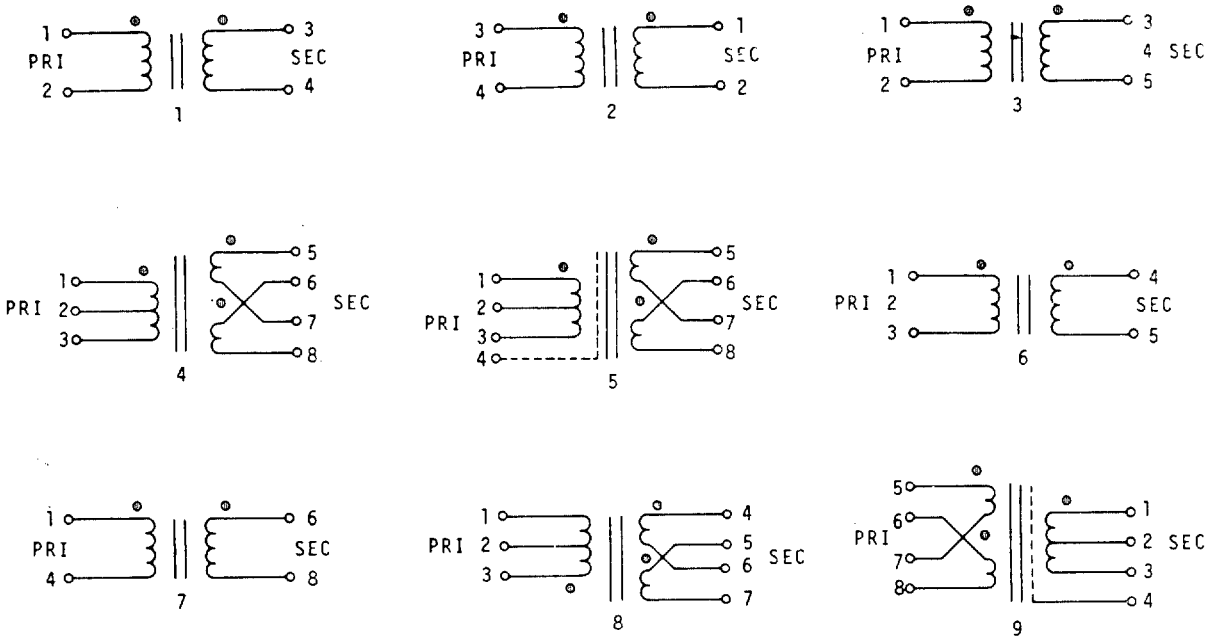

CIRCUIT DIAGRAMS

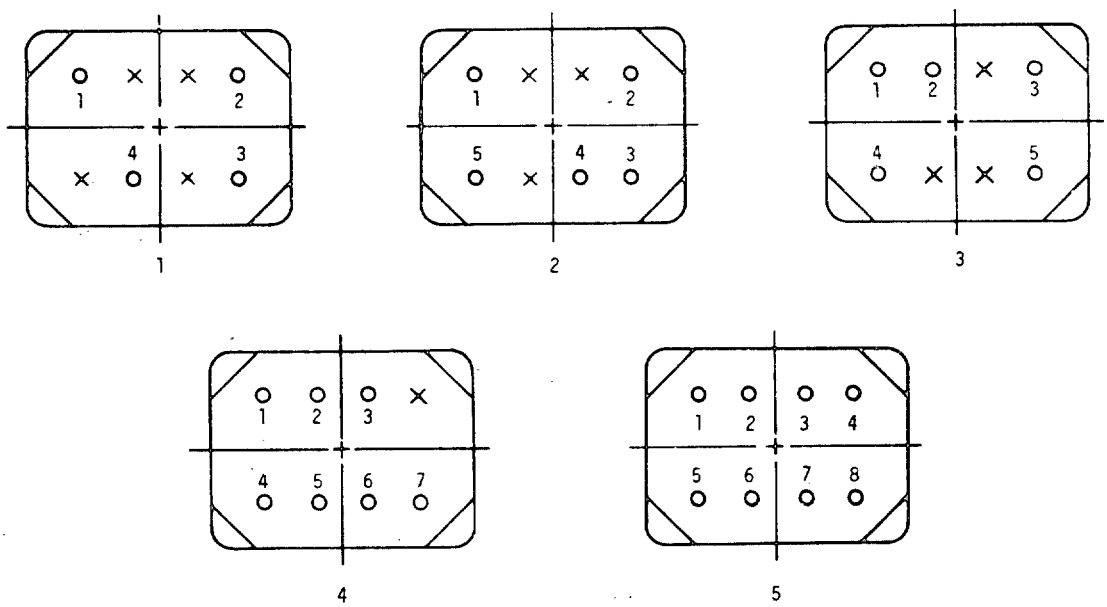

TERMINAL ARRANGEMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/165

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	PRIMARY IMPEDANCE OHMS 1/	SECONDARY IMPEDANCE OHMS 1/	PRIMARY DCR ±25% OHMS	SECONDARY DCR ±25% OHMS	POWER LEVEL mW	PRIMARY DC CURRENT mA	TERMINAL ARRANGEMENT	CIRCUIT DIAGRAM
M27/165-01	50 CT 100 CT	32 SPLIT 40 SPLIT	4.9	3.2	250	16	D	8
-02	200	250,000	16	2,500	10	0	E	7
-03	400 CT 500 CT	40 SPLIT 50 SPLIT	20	4.5	250	8	E	4
-04	400 CT 500 CT	120 SPLIT 150 SPLIT	20	12.5		8	E	4
-05	400 CT 500 CT	400 SPLIT 500 SPLIT	20	45		8	E	4
-06	500 CT	3.2	15	0.35		0	C	6
-07	600 CT	600 SPLIT	35	60		6	D	8
-08	600 2/ SPLIT	10,000 CT	80	1,050		9	E	9
-09	2,000 CT 4,000 CT	8 16	290	2		4 2	C	6
-10	2,500 CT	2,500 SPLIT	140	300	250	4	E	4
-11	10,000 25,000	200 500	1,225	30	200	3 1.5	A	1
-12	10,000	2,000 CT	1,000	40	200	1	B	3
-13	10,000 CT 2/ 12,000 CT	10,000 SPLIT 12,000 SPLIT	855	1,080	200	1	E	5
-14	10,000	90,000	215	1,850	100	0.25	A	2
-15	20,000 30,000	800 1,200	450	32	200	0.5	A	1
-16	30,000	50	1,850	3.8	200	1	E	7
-17	50,000 CT	600 SPLIT	2,400	63	250	1	D	8
M27/165-18	100,000	60	3,400	3.7	200	0.5	E	7

1/ IMPEDANCE VALUES WRITTEN ONE ABOVE THE OTHER INDICATE A RANGE OF MATCHING IMPEDANCES OVER WHICH THE PARTS WILL GIVE SATISFACTORY PERFORMANCE AS LONG AS THE IMPEDANCE RATIO IS MAINTAINED.

2/ ELECTROSTATIC SHIELD, SHIELD RATIO 5:1 MINIMUM AT 20 KHz.

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	FREQUENCY RESPONSE AT 200 Hz TO 20 KHz +3 dB			POLARITY, SAME ON TERMINALS
	Z_S OHMS	Z_L OHMS	E_L VOLTS	
M27/165-01	80	32	2.8	1, 4, 5
-02	200	250,000	50	1, 6
-03	400	40	3.16	3, 5, 6
-04	400	120	5.5	3, 5, 6
-05	400	400	10	3, 5, 6
-06	500	3.2	0.9	1, 4
-07	600	600	12.2	1, 4, 5
-08	600	10,000	45	1, 5, 6
-09	2,000	8	1.4	1, 4
-10	2,500	2,500	25	3, 5, 6
-11	10,000	200	6.3	1, 3
-12	10,000	2,000	20	1, 3
-13	10,000	10,000	45	1, 5, 6
-14	10,000	90,000	95	1, 3
-15	20,000	800	12.6	1, 3
-16	30,000	50	3.16	1, 6
-17	50,000	600	12.2	1, 4, 5
M27/165-18	100,000	60	3.4	1, 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/166

REQUIREMENTS:


ELECTRICAL RATINGS: SEE TABLE 1.

FREQUENCY RESPONSE: SEE TABLE II

REFERENCE FREQUENCY: 1 KHz


INSERTION LOSS: 3 dB

WEIGHT: 2.0 OUNCES MAXIMUM

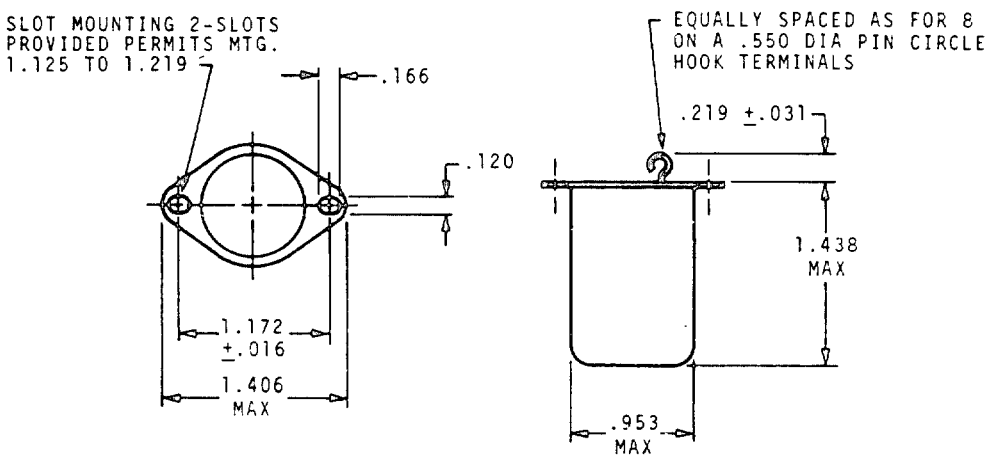


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/166

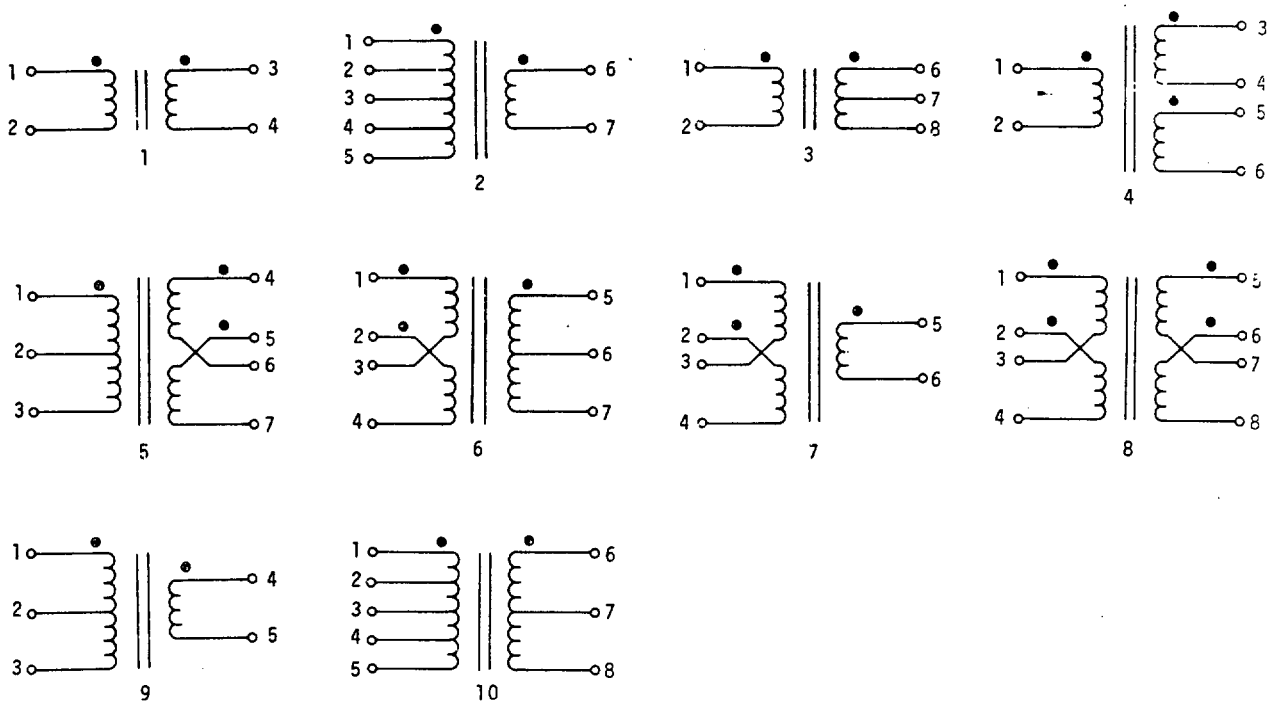

CIRCUIT DIAGRAMS

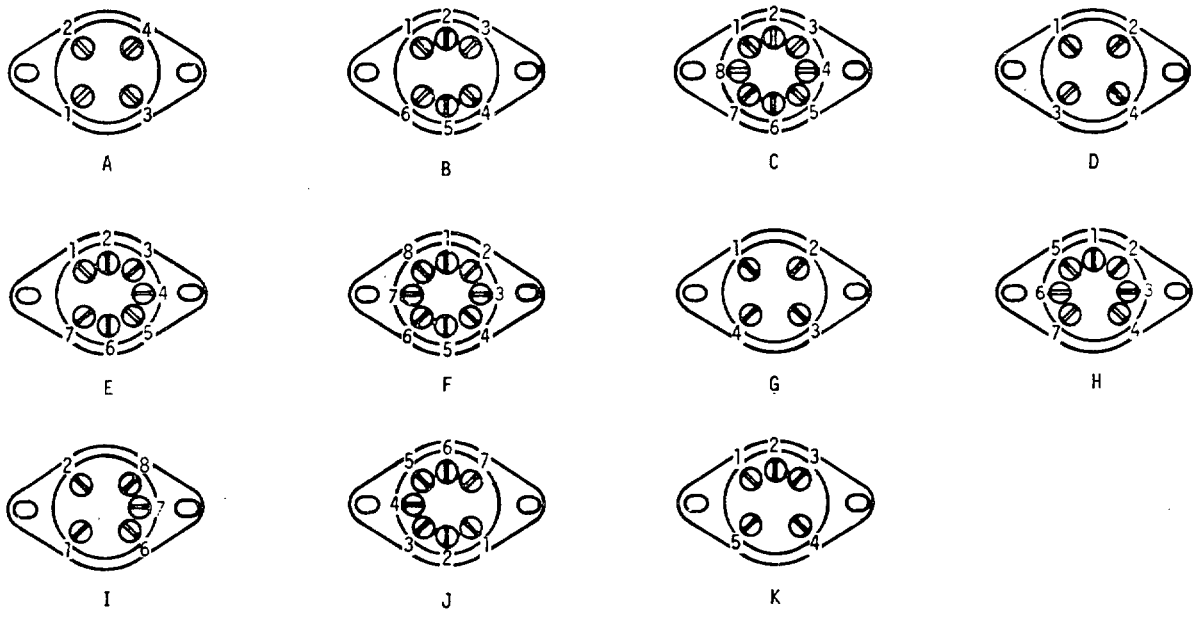

TERMINAL ARRANGEMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/166

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	PRIMARY IMPEDANCE OHMS 1/	SECONDARY IMPEDANCE OHMS 1/	PRIMARY DCR ±25% OHMS	SECONDARY DCR ±25% OHMS	POWER LEVEL mW	PRIMARY DC CURRENT mA	WORKING VOLTAGE VOLTS	DIELECTRIC WITHSTANDING VOLTAGE (RMS) 2/		TERM ARR	CKT DIA
								SEA LEVEL	REDUCED BAROMETRIC PRESSURE		
M27/166-01	82	135,000	14	6,700	63	50	250	750	300	G	1
-02	50, 200 CT 500 CT	50,000	54	3,827	3	0	175	500		H	2
-03	50, 200 CT 500 CT	50,000 CT	54	3,827	3	0				F	10
-04	500/125 SPLIT	150/37.5 SPLIT	35	16	250 3/	20				F	8
-05	500/125 SPLIT	500/125 SPLIT	37	67	250 3/	20				F	8
-06	600/150 SPLIT	600 CT	39	29	6.3	0				J	6
-07	600/150 SPLIT	2,000/500 SPLIT	70	280	31	0				F	8
-08	600/150 SPLIT	1 M	16.5	5,100	10	0				B	7
-09	1,500 CT	500/125 SPLIT	100	35	100	8				J	5
-10	2000 CT 4000 CT	8 16	200	0.9	100	4				K	9
-11	10,000 CT	500/125 SPLIT	750	52	100	4				E	5
-12	10K/2.5K SPLIT	2,000/500 SPLIT	760	195	100	4				C	8
-13	10K/2.5K SPLIT	4K/1K SPLIT	800	350	100	4				C	8
-14	10,000	1 M	330	4,875	10	0				A	1
-15	15,000	60,000	690	3,100	4	0				A	1
-16	15,000	60,000	690	3,100	25	4				D	1
-17	15,000	95,000 CT	673	3,800	3	0				I	3
-18	15,000	95,000 SPLIT	1,260	5,800	12	4				B	4
M27/166-19	20,000 CT	600/150 SPLIT	930	45	125	4	175	500	300	J	5

1/ IMPEDANCE VALUES WRITTEN ONE ABOVE THE OTHER INDICATE A RANGE OF MATCHING IMPEDANCES OVER WHICH THE PARTS WILL GIVE SATISFACTORY PERFORMANCE AS LONG AS THE IMPEDANCE RATIO IS MAINTAINED.

2/ DIELECTRIC WITHSTANDING VOLTAGE BETWEEN SPLIT SECTIONS, 50 VOLTS RMS MAXIMUM.

3/ 250 mW AT 100 Hz, 1 WATT AT 200 Hz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/166

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	NO LOAD (CENTER-TAP VOLTAGE UNBALANCE ONLY)		FREQUENCY RESPONSE			RESONANCE, SECOND RESONANT FREQUENCY	POLARITY SAME ON TERMINALS
	POTENTIAL AT 1 KHz (VOLTS)	UNBALANCE ±%	FREQ RANGE Hz	±dB	E_L VOLTS	MIN KHz	
M27/166-01	---	---	250 - 8,000	2	92	8	1, 3
-02	1.0	1.0	50 - 10,000		12.2	10	1, 6
-03			50 - 10,000		12.2	10	1, 6
-04			100 - 20,000		6.1	20	1, 2, 5, 6
-05			100 - 20,000		11.2	20	1, 2, 5, 6
-06			50 - 10,000		1.9	10	1, 2, 5
-07			50 - 20,000	2	7.9	20	1, 2, 5, 6
-08			200 - 3,000	4	100	3	1, 2, 5
-09			100 - 10,000	2	7.1	10	1, 4, 5
-10			100 - 10,000	2	0.9	10	1, 4
-11			100 - 10,000	2	7.1	10	1, 4, 5
-12			100 - 10,000	2	14	10	1, 2, 5, 6
-13	1.0	1.0	100 - 10,000	2	20	10	1, 2, 5, 6
-14	---	---	200 - 3,000	4	100	3	1, 3
-15	---	---	50 - 10,000	2	15.5	10	1, 3
-16	---	---	200 - 10,000	2	39	10	1, 3
-17	1.0	1.0	50 - 10,000	2	17	10	1, 6
-18	1.0	1.0	200 - 10,000	2	34	10	1, 3, 5
M27/166-19	1.0	1.0	200 - 10,000	2	8.7	10	1, 4, 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/167


REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I

FREQUENCY RANGE: 300 Hz TO 20 KHz


ELECTRICAL CHARACTERISTICS: SEE TABLE II

WEIGHT: 20 GRAMS MAXIMUM

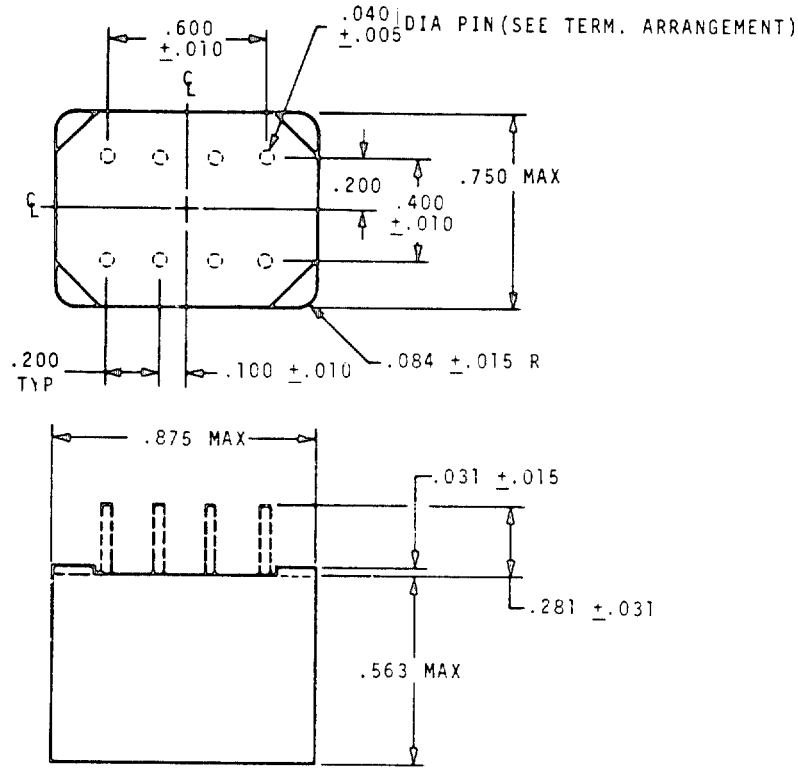


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/167

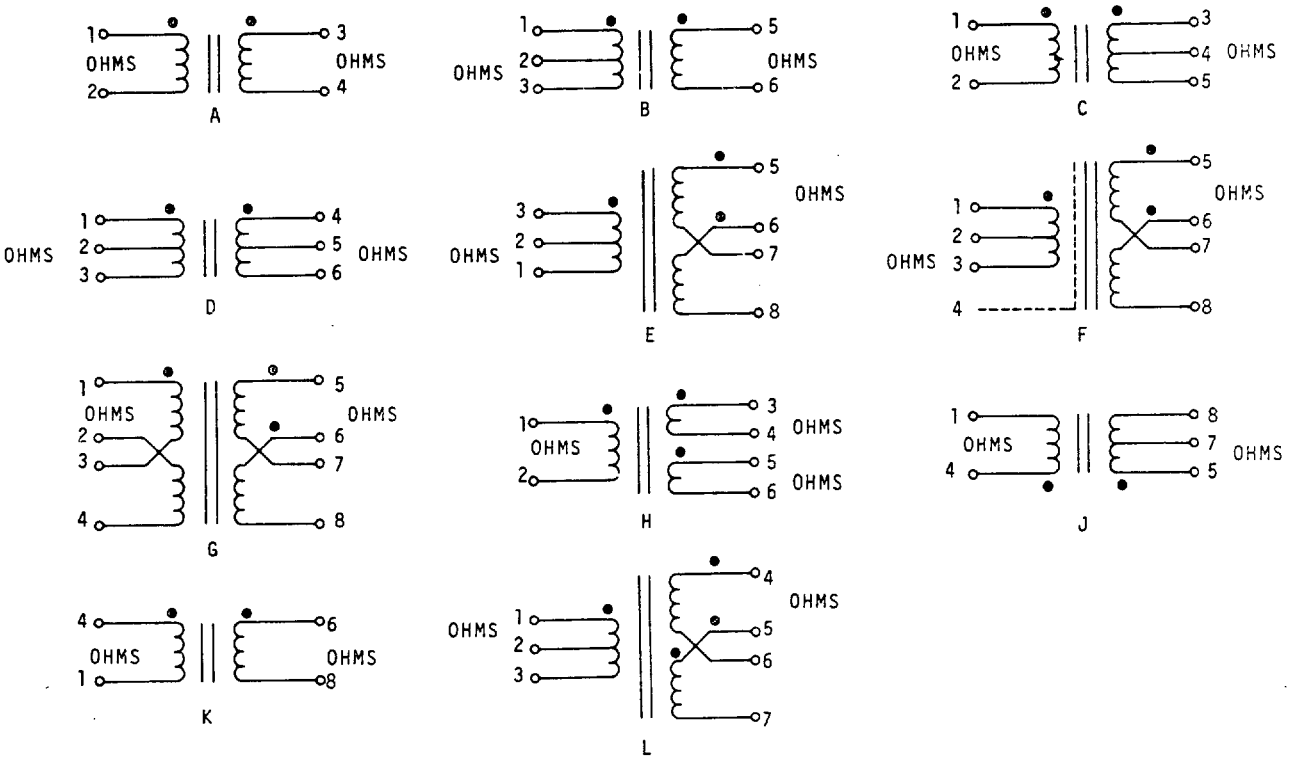

CIRCUIT DIAGRAMS

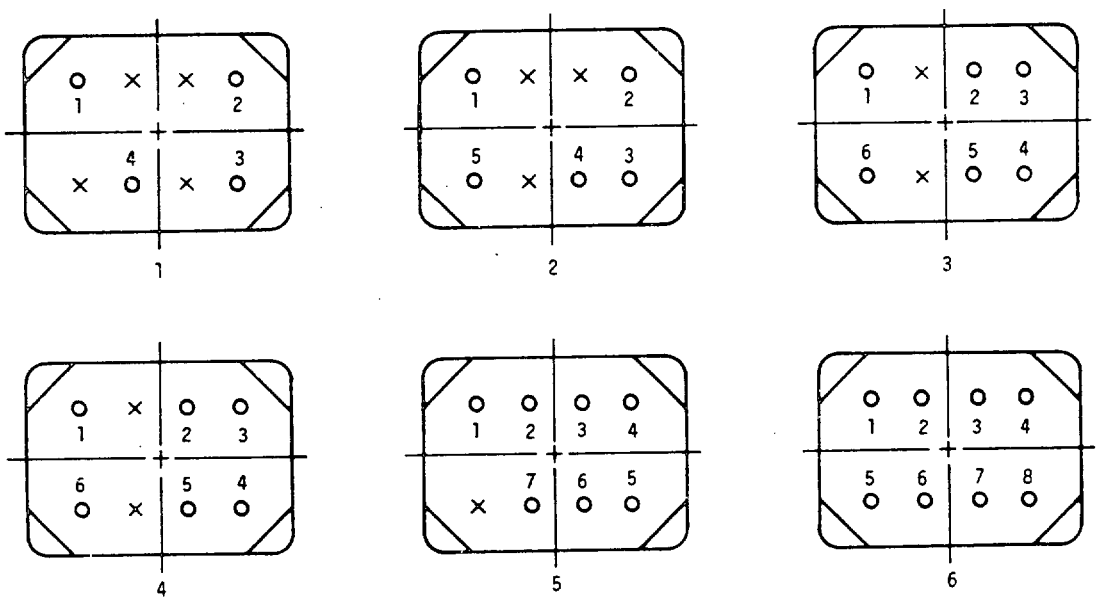

NOTE: PINS NOT USED ARE REMOVED. THESE ARE INDICATED BY "X".

TERMINAL ARRANGEMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/167

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	PRIMARY IMPEDANCE OHMS 2/	SECONDARY IMPEDANCE OHMS 2/	PRIMARY DCR ±25% OHMS	SECONDARY DCR ±25% OHMS	POWER LEVEL mW	PRIMARY DC CURRENT mA	TERMINAL ARRANGEMENT	CIRCUIT DIAGRAM
M27/167-01	10,000 25,000	200 500	2,500	34	100	3 1.5	1	A
-02	50	62,500	13.5	3,600	5	0	6	K
-03	100 SPLIT	100 SPLIT	5.9	6.9	100	10		G
-04	500 SPLIT 600 SPLIT	12.8 SPLIT 16 SPLIT	36.2	1.5	100	8		G
-05	500 600	50 60	50	5	100	3.5		K
-06	500 SPLIT 600 SPLIT	50 SPLIT 60 SPLIT	36	6.5	100	3.5		G
-07	500 CT	600 CT	26	70	100	10		D
-08	500 SPLIT	600 SPLIT	30	42	100	10		G
-09 1/	600 CT	600 SPLIT	29	42	100	10		F
-10	600 SPLIT	2,000 SPLIT	40	113	100	5		G
-11	600	600 CT AND 600 CT	50	50 AND 50	25	5		H
-12 1/	600 SPLIT	8,000 CT	55	484	50	3.2		F
-13	800 SPLIT 1,200 SPLIT	20,000 SPLIT 30,000 SPLIT	110	800	50	3		G
-14	1,000 1,200	50 60	5	90	100	6		K
-15	1,000 SPLIT 1,200 SPLIT	200 SPLIT 240 SPLIT	102	19	100	3		G
-16	1,200 1,500	3.2 4.0	70	0.45	100	7	6	K
-17	1,500 CT	600 CT	70	65	100	2.5	3	D
-18	4,000 CT	600 SPLIT	15.5	47	100	2.6	5	L
-19	4,000 SPLIT 5,000 SPLIT	12.8 SPLIT 16 SPLIT	327	1.5	100	2	6	G
-20	10,000	3.2	800	0.65	100	2		K
-21	8,000 SPLIT 10,000 SPLIT	12.8 SPLIT 16 SPLIT	600	1.5	100	2		G
-22	10,000	16	800	2.7	100	4		K
-23	10,000 CT 12,000 CT	3.2 4.0	770	0.73	100	3 1.5		B
-24	10,000 SPLIT 25,000 SPLIT	200 SPLIT 500 SPLIT	2,500	34	100	2 1	6	G
-25	10,000 CT 25,000 CT	200 CT 500 CT	560	22	100	2	3	D
-26	10,000 12,000	500 CT 600 CT	800	95	100	4	6	J
M27/167-27	10,000 SPLIT 12,000 SPLIT	500 SPLIT 600 SPLIT	800	95	100	4	6	G

1/ ELECTROSTATIC SHIELD, SHIELD RATIO 5:1 MINIMUM AT 20 KHz.

2/ IMPEDANCE VALUES WRITTEN ONE ABOVE THE OTHER INDICATE A RANGE OF MATCHING IMPEDANCES OVER WHICH THE PARTS WILL GIVE SATISFACTORY PERFORMANCE AS LONG AS THE IMPEDANCE RATIO IS MAINTAINED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/167

TABLE I: ELECTRICAL RATINGS (CONTINUED)

M PART NUMBER	PRIMARY IMPEDANCE OHMS 2/	SECONDARY IMPEDANCE OHMS 2/	PRIMARY DCR ±25% OHMS	SECONDARY DCR ±25% OHMS	POWER LEVEL mW	PRIMARY DC CURRENT mA	TERMINAL ARRANGEMENT	CIRCUIT DIAGRAM
M27/167-28	10,000 CT	2,000 CT	1,200	45	100	1	2	C
-29	10,000 CT 12,000 CT	1,500 CT 1,800 CT	800	300	100	4	4	D
-30	10,000 CT 12,000 CT	10,000 CT 12,000 CT	560	650	100	1	5	L
-31	10,000 SPLIT 12,000 SPLIT	10,000 SPLIT 12,000 SPLIT	560	650	100	1	6	G
-32	10,000	90,000	710	3,150	30	.25	6	K
-33	20,000 30,000	600 1,200	800	110	100	.5	6	K
-34	20,000 CT 30,000 CT	800 CT 1,200 CT	800	110	100	1	3	D
-35	30,000	50	2,875	4.6	100	1	6	K
-36	40,000 CT 50,000 CT	400 SPLIT 500 SPLIT	1,900	43	100	.5		E
-37	40,000 SPLIT 50,000 SPLIT	400 SPLIT 500 SPLIT	1,900	43	100	.5		G
-38	100,000	60	3,500	3.3	100	.5		K
-39 1/	100,000 CT 200,000 CT	100 SPLIT 200 SPLIT	3,290	4.1	5	0		F
-40	200,000	1,000	4,000	190	5	0	6	K
-41	200,000 CT	1,000 CT	4,000	200	5	0	3	D
M27/167-42 1/	200,000 CT	1,000 SPLIT	4,000	200	5	0	6	F

1/ ELECTROSTATIC SHIELD, SHIELD RATIO 5:1 MINIMUM AT 20 KHz.
2/ IMPEDANCE VALUES WRITTEN ONE ABOVE THE OTHER INDICATE A RANGE OF MATCHING IMPEDANCES OVER WHICH THE PARTS WILL GIVE SATISFACTORY PERFORMANCE AS LONG AS THE IMPEDANCE RATIO IS MAINTAINED.

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	FREQUENCY RESPONSE AT 300 Hz TO 20 KHz +3 dB			RESONANCE, SECOND RESONANT FREQUENCY MIN	INSERTION LOSS AT 1 KHz MAX	POLARITY SAME ON TERMINALS
	Z_S OHMS	Z_L OHMS	E_L VOLTS			
M27/167-01	25,000	500	7.07	20 KHz	3.5	1, 3
-02	50	62,500	17.7	20 KHz	4.0	4, 6
-03	100	100	3.16	50 KHz	3.5	1, 5, 6
-04	600	16	1.26	50 KHz	3.5	1, 5, 6
-05	600	60	2.45	50 KHz	3.5	4, 6
-06	600	60	2.45	50 KHz	3.5	1, 5, 6
-07	500	600	7.75	50 KHz	3.0	1, 4
-08	500	600	7.75	50 KHz	3.5	1, 5, 6
-09	600	600	7.75	50 KHz	3.5	1, 5, 6
-10	600	2,000	14.1	50 KHz	3.5	1, 5, 6
-11	600 (1-2)	1,200 (3-5) 1,200 (6-8)	3.87 3.87	50 KHz	3.5	1, 3, 6
-12	600	8,000	20	20 KHz	3.5	1, 5, 6
-13	1,200	30,000	38.7	20 KHz	3.5	1, 5, 6
-14	1,200	60	2.45	20 KHz	3.5	4, 6
-15	1,200	240	4.9	20 KHz	3.5	1, 5, 6
-16	1,500	4.0	0.63	20 KHz	4.0	4, 6
-17	1,500	600	7.75	20 KHz	3.5	1, 4
-18	4,000	600	7.75	20 KHz	3.5	1, 4, 5
-19	5,000	16	1.26	20 KHz	3.5	1, 5, 6
M27/167-20	10,000	3.2	0.56	20 KHz	4.0	4, 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/167

TABLE II: ELECTRICAL CHARACTERISTICS (CONTINUED)

M PART NUMBER	FREQUENCY RESPONSE AT 300 Hz TO 20 KHz +3 db			RESONANCE, SECOND RESONANT FREQUENCY MIN	INSERTION LOSS AT 1 KHz MAX	POLARITY SAME ON TERMINALS
	Z_S OHMS	Z_L OHMS	E_L VOLTS			
M27/167-21	10,000	16	1.26	20 KHz	3.5	1, 5, 6
-22	10,000	16	1.26	20 KHz	4.0	4, 6
-23	12,000	4	0.63	20 KHz	5.0	1, 5
-24	25,000	500	7.07	20 KHz	3.5	1, 5, 6
-25	25,000	500	7.07	20 KHz	3.0	1, 4
-26	12,000	600	7.75	20 KHz	3.5	1, 8
-27	12,000	600	7.75	20 KHz	3.5	1, 5, 6
-28	10,000	2,000	14.1	20 KHz	3.5	1, 3
-29	12,000	1,800	13.4	20 KHz	3.5	1, 4
-30	12,000	12,000	34.6	20 KHz	3.5	1, 4, 5
-31	12,000	12,000	34.6	20 KHz	3.5	1, 5, 6
-32	10,000	90,000	52	20 KHz	3.5	4, 6
-33	30,000	1,200	11	20 KHz	3.5	4, 6
-34	30,000	1,200	11	20 KHz	3.5	1, 4
-35	30,000	50	2.23	20 KHz	3.5	4, 6
-36	50,000	500	7.07	20 KHz	3.5	3, 5, 6
-37	50,000	500	7.07	20 KHz	3.5	1, 5, 6
-38	100,000	60	2.45	20 KHz	3.5	4, 6
-39	200,000	200	1.0	20 KHz	3.0	1, 5, 6
-40	200,000	1,000	2.23	20 KHz	3.5	4, 6
-41	200,000	1,000	2.23	20 KHz	3.5	1, 4
M27/167-42	200,000	1,000	2.23	20 KHz	3.5	1, 5, 6

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MICRO-MINIATURE, MIL-T-27/173

REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I

FREQUENCY RANGE: 300 Hz TO 250 KHz

PRIMARY DC CURRENT (1-5): 0 AMPERE


ELECTRICAL CHARACTERISTICS: SEE TABLE II

NO LOAD (CENTER-TAP VOLTAGE UNBALANCE ONLY): AT THE SPECIFIED POTENTIAL (SEE TABLE II), THE VOLTAGE SHALL BE A MAXIMUM OF 1 PERCENT.

INSERTION LOSS: AT THE SPECIFIED POWER LEVEL (SEE TABLE I), THE INSERTION LOSS SHALL BE A MAXIMUM OF 4 dB.


HARMONIC DISTORTION: TOTAL HARMONIC CONTENT OF THE OUTPUT SHALL BE A MAXIMUM OF 5 PERCENT AT THE SPECIFIED POWER LEVEL AND 1 KHz (SEE TABLE I).

WEIGHT: 1.50 GRAMS MAXIMUM

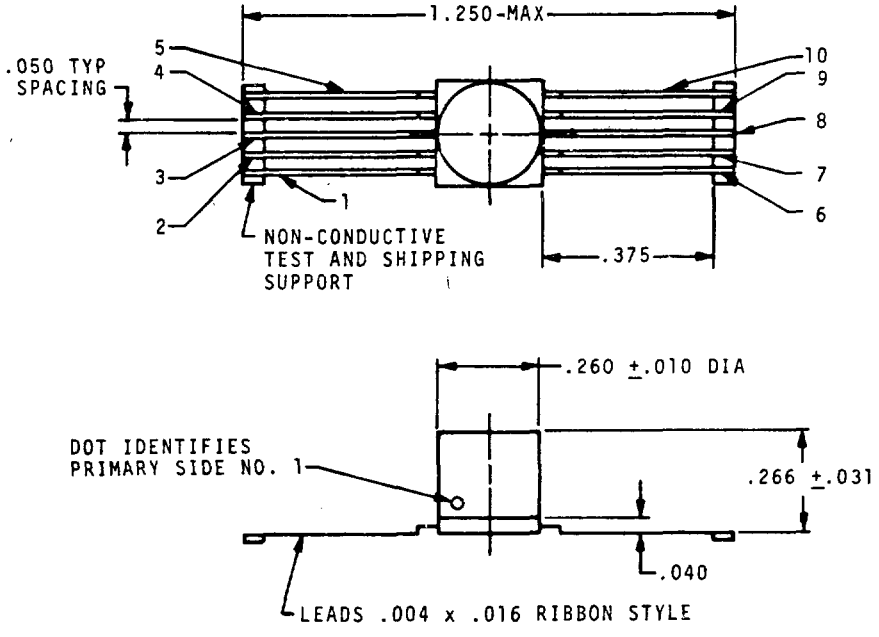

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MICRO-MINIATURE, MIL-T-27/173

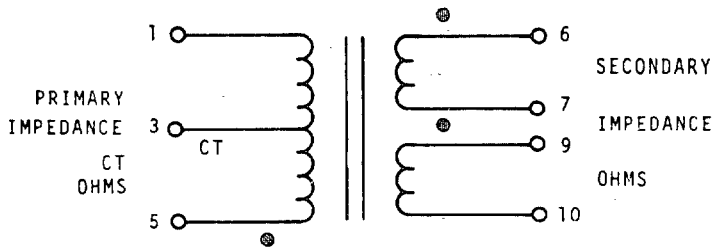

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	PRIMARY IMPEDANCE (1-5) OHMS CT	SECONDARY IMPEDANCE (6-10) OHMS	PRIMARY DCR (1-5) OHMS ±25%	PRIMARY POWER LEVEL AT 1 KHz (MAX)	SECONDARY DCR (6-10) OHMS ±25%
M27/173-01	25,000	1000/250 SPLIT	2,400	40 mW	48
M27/173-02	1,500	600/150 SPLIT	150	75 mW	65

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	NO LOAD (CENTER-TAP VOLTAGE UNBALANCE ONLY) POTENTIAL (1-5)	FREQUENCY RESPONSE AT 300 Hz TO 250 KHz, ±3 dB			RESONANCE: SECOND RESONANT FREQUENCY KHz MIN
		Z_S (1-5) OHMS	Z_L (6-10) OHMS	E_S VOLTS	
M27/173-01	5.0 V AT 5 KHz	25 K	1,000	10.0	250
M27/173-02	1.0 V AT 5 KHz	1.5 K	600	3.2	600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SECTION 4
INDUCTORS, AUDIO, POWER AND HIGH POWER PULSE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE), MIL-T-27/142

REQUIREMENTS:


ELECTRICAL RATINGS:

VOLTAGE (1-2): 1 VOLT RMS, 1 KHz

POWER: .080 WATT

ELECTRICAL CHARACTERISTICS: SEE TABLE I

WEIGHT: .7 OUNCE MAXIMUM



CIRCUIT DIAGRAM

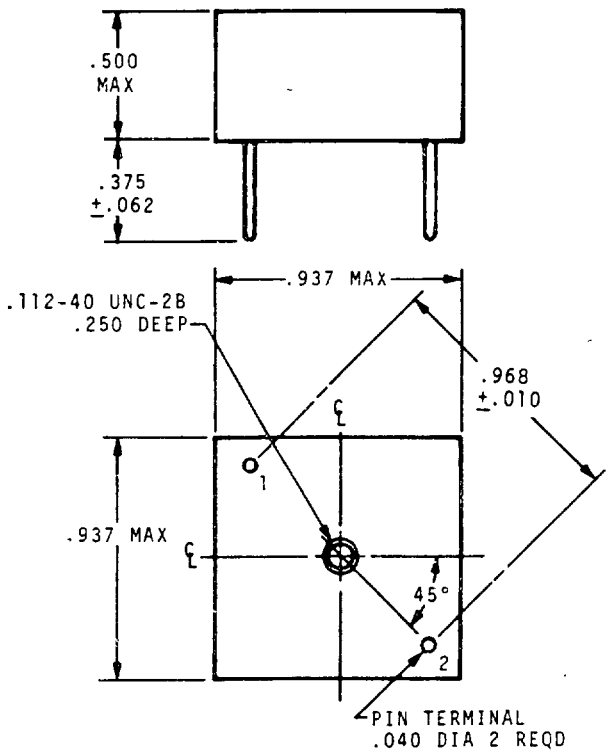


TABLE I: ELECTRICAL CHARACTERISTICS

M PART NUMBER	INDUCTANCE (1-2) H ±1% 1/	SELF-RESONANT FREQUENCY KHz MIN	DC CURRENT mA MAX	DC RESISTANCE (1-2) OHMS MAX	QUALITY FACTOR Q MIN
M27/142-01	0.01	170	70	2.5	100 AT 10 KHz
-02	0.02	120	50	5.1	105 AT 10 KHz
-03	0.05	76	30	12.0	105 AT 10 KHz
-04	0.10	54	22	22.0	105 AT 10 KHz
-05	0.50	24	10	122.0	80 AT 5 KHz
-06	1.00	17	7	250.0	80 AT 5 KHz
M27/142-07	2.00	12	5	500.0	60 AT 5 KHz


1/ INDUCTANCE AT 1 VRMS AND 1 KHz.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE), MIL-T-27/145

REQUIREMENT:

WEIGHT: 2 OUNCES MAXIMUM

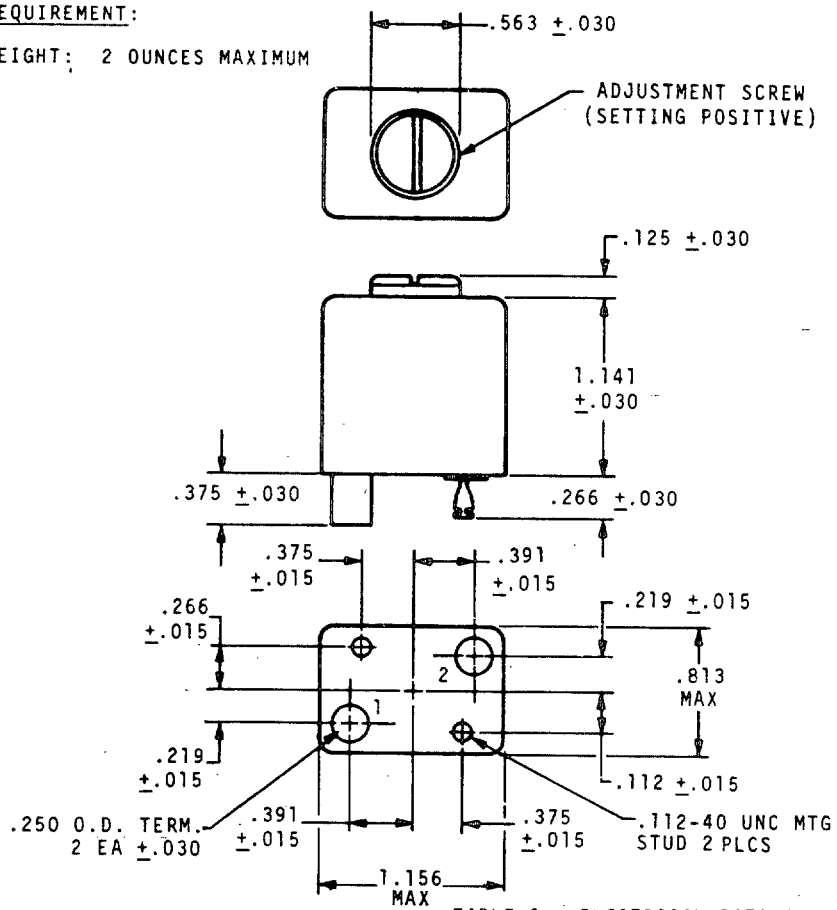

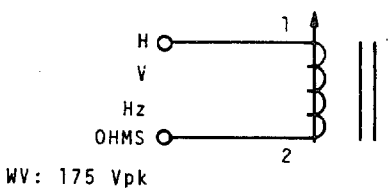

WV: 175 Vpk

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	(1-2) INDUCTANCE RANGE			(1-2) VOLTAGE	(1-2) FREQUENCY	(1-2) 1/ DC CURRENT	DCR ±20%
	MIN H	MEAN H	MAX H	VRMS	Hz	mA	OHMS
M27/145-01	0.002	0.006	0.02	0.5	1 K	100	0.5
M27/145-02	0.005	0.015	0.05	0.5	1 K	60	1.4
M27/145-03	0.011	0.040	0.11	0.5	1 K	40	3.6
M27/145-04	0.03	0.10	0.3	1	1 K	30	8.6
M27/145-05	0.07	0.25	0.7	1	1 K	20	22
M27/145-06	0.2	0.6	2	1	1 K	15	55
M27/145-07	0.5	1.5	5	5	1 K	10	141
M27/145-08	1.1	4	11	7	60	7	360
M27/145-09	3	10	30	7	60	5	950
M27/145-10	7	25	70	10	60	3.5	2220
M27/145-11	20	60	200	10	60	2	5550
M27/145-12	50	150	500	10	60	1.5	15.6 K


1/ DC CURRENT IS APPLICABLE IN THE MEAN TO MINIMUM INDUCTANCE RANGE ONLY.


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE), MIL-T-27/146

REQUIREMENT:

WEIGHT: 1.3 GRAMS MAXIMUM

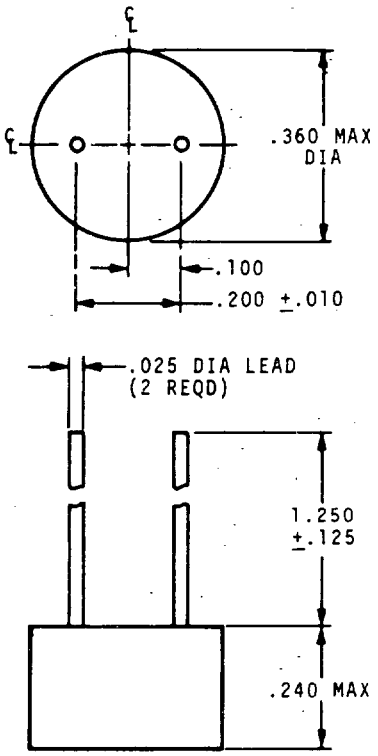



MAX ALT 75,000'

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	INDUCTANCE (1-2) mH ±2%	DC CURRENT (1-2) MAX mA 1/	DC RESISTANCE (1-2) MAX AT 25°C OHMS	QUALITY FACTOR (1-2)		
				Q MIN	VOLTAGE RMS	FREQUENCY KHz
M27/146-01	1	60	1.4	26	1.0	15
-02	5	28	7	30	1.0	15
-03	10	20	11	32	1.0	15
-04	25	13	38	32	1.0	15
-05	50	9	75	32	1.0	15
M27/146-06	100	6	132	32	1.0	15


1/ THE DC CURRENT IS THE AMOUNT OF CURRENT THAT WILL REDUCE THE INDUCTANCE 10% MAXIMUM.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE), MIL-T-27/147

REQUIREMENT:

WEIGHT: 450 GRAMS MAXIMUM

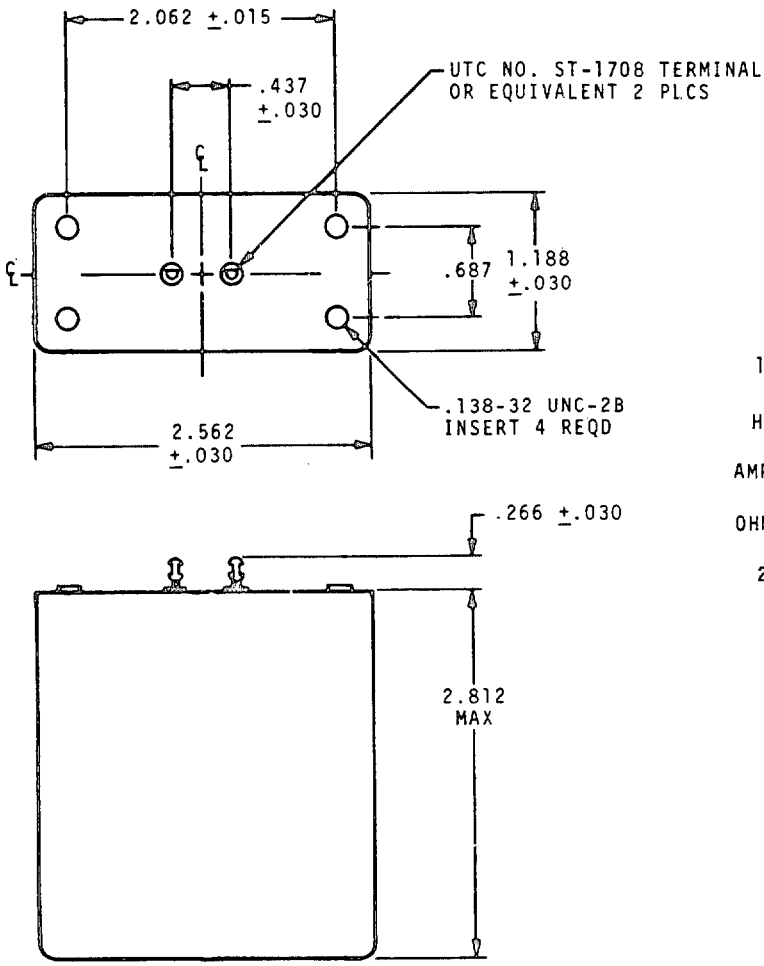



CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26107:292
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE), MIL-T-27/147

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	INDUCTANCE (1-2) H ±1% 1/	DC CURRENT (1-2) mA 2/	DC RESISTANCE (1-2) OHMS ±20%	QUALITY FACTOR MIN	TEMPERATURE STABILITY -55°C TO +105°C	WORKING VOLTAGE PEAK V	VOLTAGE (1-2)
M27/147-01	0.010	400	0.30	180 AT 3 KHz	±1.5%	350	1.0 V AT 500 Hz
-02	0.030	250	0.90	180			
-03	0.070	170	2.2	200			
-04	0.12	120	3.6	200			
-05	0.50	60	16	200			
-06	1.0	40	28	190 AT 3 KHz			
-07	2.0	30	64	165 AT 2 KHz			
-08	3.5	22	101	135 AT 1.5 KHz			
-09	7.5	16	230	110 AT 1 KHz			
-10	12	11	373	100 AT 1 KHz			
-11	18	9.0	463	85 AT 700 Hz			
-12	25	8.0	680	75 AT 700 Hz			1.0 V AT 500 Hz
-13	40	6.0	1,075	65 AT 400 Hz			1.0 V AT 400 Hz
M27/147-14	60	4.0	1,670	65 AT 400 Hz	±1.5%	350	1.0 V AT 400 Hz

1/ THE INDUCTANCE IS MEASURED WITH 0 ADC APPLIED TO (1-2) AND AT THE SPECIFIED VOLTAGE ACROSS (1-2).

2/ THE AMOUNT OF DC CURRENT THAT WILL REDUCE THE INDUCTANCE A MAXIMUM OF 8%.


3. WHEN NUMBERS IN PARENTHESES, I.E., (1-2), ARE USED; THEY INDICATE THE WINDING AND THE EXTREME TERMINALS OF THE WINDING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE),
MIL-T-27/161

REQUIREMENT:

WEIGHT: 8.50 GRAMS, MAXIMUM



CIRCUIT DIAGRAM

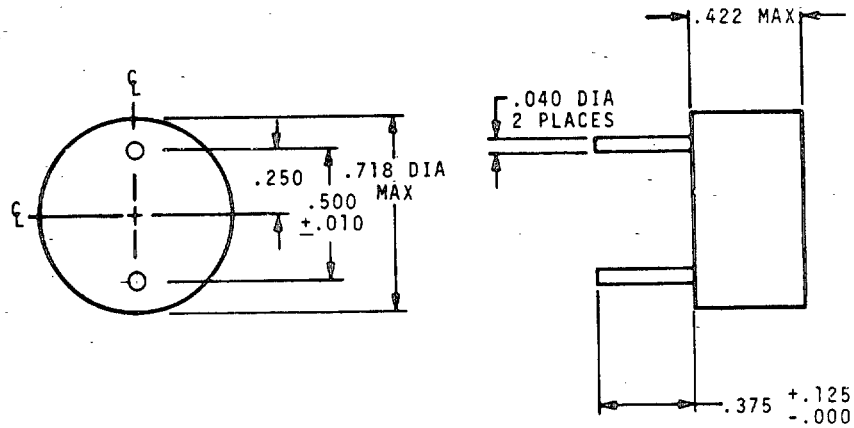


TABLE I: ELECTRICAL RATINGS

M PART NUMBER	INDUCTANCE (1-2) H ±1%]	CURRENT (1-2) mADC MAX 1/	DC RESISTANCE ±20% AT 25°C (1-2) OHMS	QUALITY FACTOR MIN
M27/161-01	0.05	25	27	70 AT 15 KHz
-02	0.10	18	51	70 AT 15 KHz
-03	0.25	11	136	65 AT 15 KHz
-04	0.50	8	243	65 AT 10 KHz
-05	0.75	7	355	60 AT 10 KHz
-06	1.0	6	500	55 AT 10 KHz
-07	1.2	5	560	55 AT 10 KHz
-08	2.0	4	870	43 AT 5 KHz
-09	3.0	3.5	1,340	40 AT 5 KHz
M27/161-10	5.0	3	2,500	33 AT 5 KHz

1/ THE AMOUNT OF DC CURRENT THAT WILL REDUCE THE INDUCTANCE A MAXIMUM OF 7%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE), MIL-T-27/162


REQUIREMENTS:


ELECTRICAL CHARACTERISTICS:

INDUCTANCE: THE INDUCTANCE IN TABLE I IS MEASURED WITH 1.0 VRMS, 60 Hz ACROSS (1-4) WITH (2-3) CONNECTED, AND 0 ADC APPLIED TO (1-4).

WORKING VOLTAGE (PEAK): 350 VOLTS

WEIGHT: 170 GRAMS MAXIMUM

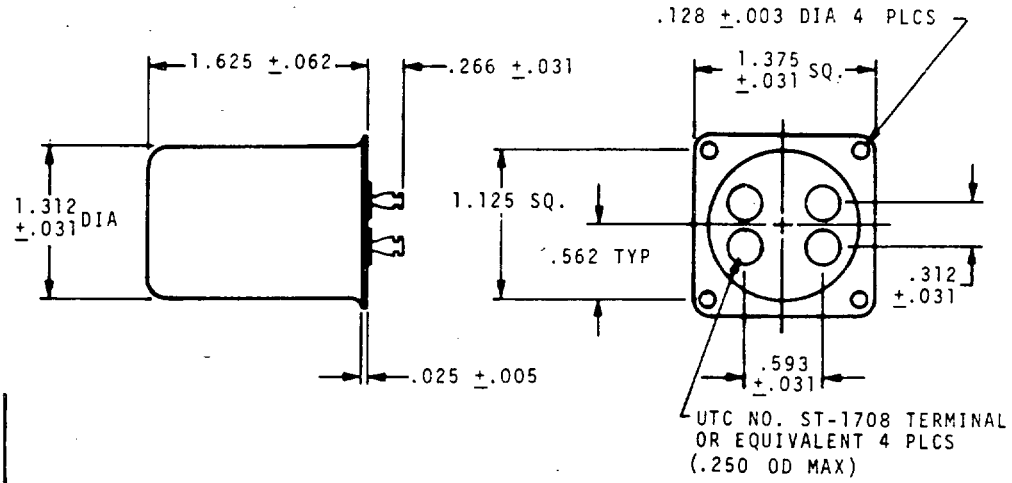



CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	INDUCTANCE (1-4) H ±2%	VOLTAGE (1-4) V 1/	DC RESISTANCE ±20% (1-4) OHMS 2/	QUALITY FACTOR AT 1.0 V MIN
M27/162-01	2.0/0.5	1.0/0.5 AT 60 Hz	21	24 AT 150 Hz
M27/162-02	16/4.0	1.0/0.5 AT 60 Hz	143	23 AT 150 Hz
M27/162-03	40/10	1.0/0.5 AT 60 Hz	368	23 AT 100 Hz
M27/162-04	300/75	1.0/0.5 AT 60 Hz	3,700	23.5 AT 100 Hz
M27/162-05	600/150	1.0/0.5 AT 60 Hz	5,720	23.5 AT 100 Hz

1/ VALUES CORRESPOND TO THE WINDINGS BEING CONNECTED IN SERIES/PARALLEL, RESPECTIVELY.

2/ DC RESISTANCE WITH 2 AND 3 CONNECTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE),
MIL-T-27/163

REQUIREMENTS:

ELECTRICAL CHARACTERISTICS:

INDUCTANCE: THE INDUCTANCE IN TABLE I IS MEASURED WITH 1.0 VRMS, 400 Hz ACROSS (1-2) AND 0 ADC APPLIED TO (1-2).

WEIGHT: 170 GRAMS MAXIMUM

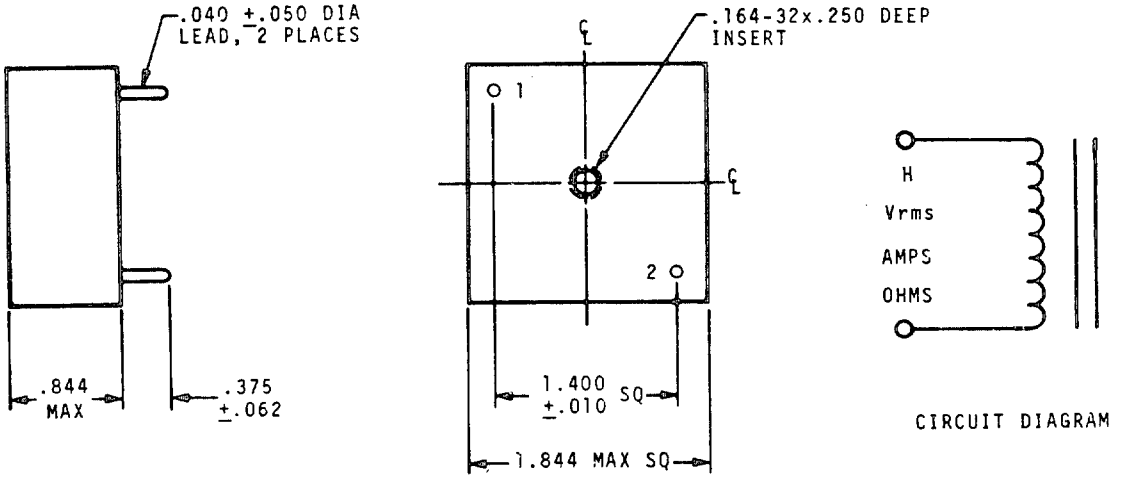

CIRCUIT DIAGRAM

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	INDUCTANCE (1-2) H ±1%	CURRENT (1-2) mA MAX 1/	VOLTAGE (1-2) VRMS	DC RESISTANCE (1-2) OHMS MAX	QUALITY FACTOR MIN	QUALITY FACTOR TEST CONDITIONS
M27/163-01	0.1	60	1 AT 400 Hz	4.2	210	1 VRMS 3 KHz
-02	0.5	25		23	185	1 VRMS 3 KHz
-03	1.0	18		43	185	1 VRMS 3 KHz
-04	2.0	12		92	140	1 VRMS 2 KHz
-05	5.0	8		240	120	1 VRMS 1.5 KHz
M27/163-06	10.0	6	1 AT 400 Hz	440	95	1 VRMS 1 KHz


1/ THE AMOUNT OF DC CURRENT THAT WILL REDUCE THE INDUCTANCE A MAXIMUM OF 7%.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE), MIL-T-27/168

REQUIREMENT:

WEIGHT: 1.2 OUNCES MAXIMUM

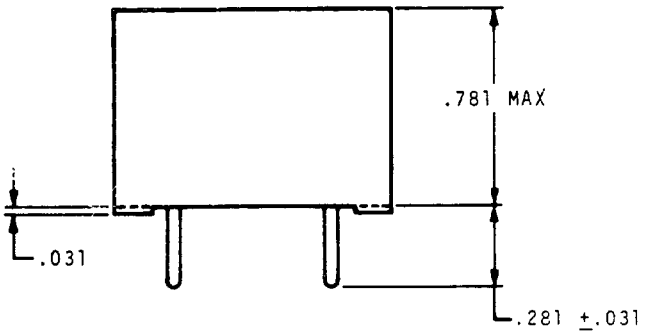

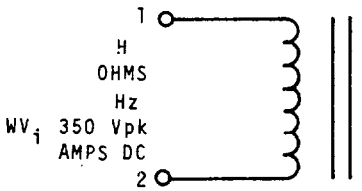

CIRCUIT DIAGRAM

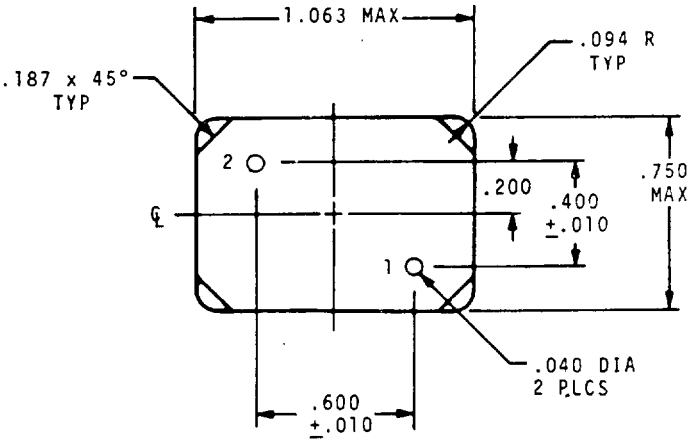


TABLE I: ELECTRICAL RATINGS

M PART NUMBER	INDUCTANCE AT 1 VOLT (1-2) 1/		CURRENT (1-2)	DC RESISTANCE	QUALITY FACTOR (1-2)		
	L ±2% H	FREQUENCY Hz	mADC MAX 2/	±20% AT 25°C (1-2) OHMS	Q MIN	VOLTAGE VRMS	FREQUENCY Hz
M27/168-01	.10	1,000	55	14	22	1	1,500
-02	.15	1,000	45	22	22	1	1,500
-03	.30	1,000	28	34	22	1	1,500
-04	.50	1,000	23	54	22	1	1,500
-05	1.0	1,000	16	130	22	1	1,500
-06	2.0	400	8	130	20	1	750
-07	5.0	400	5	340	20	1	750
-08	7.5	400	4.5	517	20	1	750
-09	20	400	2.7	1,310	20	1	750
-10	50	400	1.4	3,180	20	1	750
M27/168-11	100	400	1.1	8,550	21	1	750

1/ INDUCTANCE IS MEASURED AT 0 DC.


2/ THE AMOUNT OF DC CURRENT THAT WILL REDUCE THE INDUCTANCE APPROXIMATELY 5% (8% MAXIMUM).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE), MIL-T-27/205

REQUIREMENT:

WEIGHT: 120 GRAMS MAXIMUM

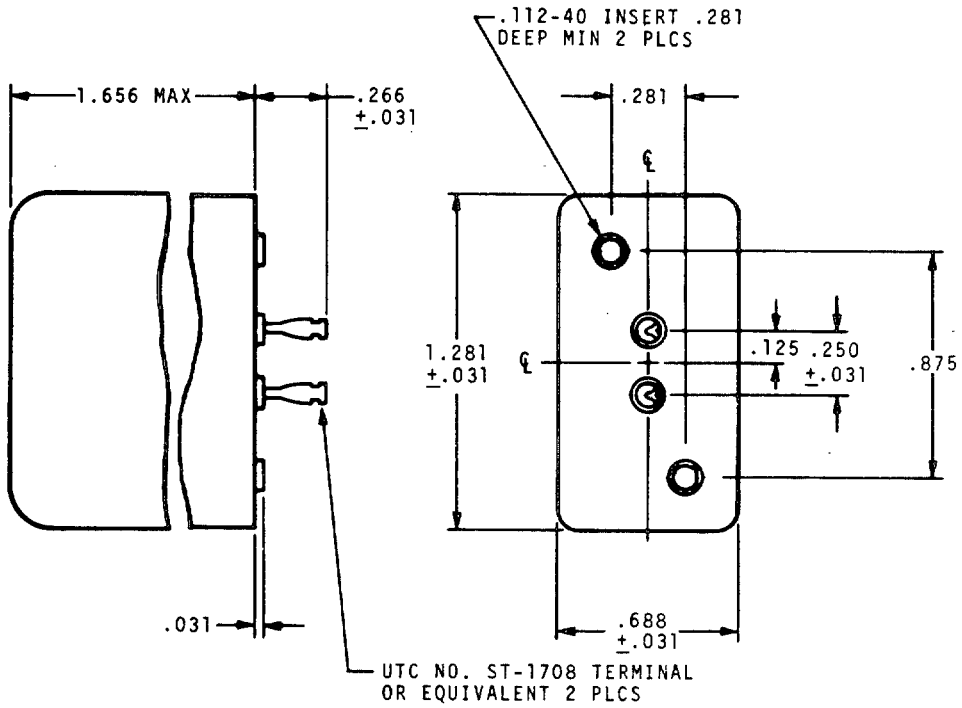



WV (PK): 350V

CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE), MIL-T-27/205

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	INDUCTANCE (1-2) H ±1% 1/	DC CURRENT (1-2) mA, MAX 2/	DC RESISTANCE (1-2) OHMS ±20%	QUALITY FACTOR AT 1.0 V MIN	TEMPERATURE STABILITY -55°C TO +105°C	WORKING VOLTAGE PEAK V	TEST VOLTAGE (1-2)
M27/205-01	0.007	250	0.6	115 AT 5 KHz	±1%	350	1.0 V AT 1 KHz
-02	0.012	200	1.1	120			
-03	0.020	150	1.6	125			
-04	0.030	125	2.5	130			
-05	0.050	100	3.9	135			
-06	0.070	80	5.7	145			
-07	0.120	60	9.1	145 AT 5 KHz			
-08	0.2	50	16	120 AT 3 KHz			
-09	0.3	40	25	118			
-10	0.5	30	39	110			
-11	0.7	25	58	105			
-12	1.0	20	84	105			
-13	1.5	17	130	95			
-14	2.5	13	215	85 AT 3 KHz			1.0 V AT 1 KHz
-15	4.0	10	335	50 AT 1 KHz			1.0 V AT 500 Hz
-16	6.0	9	510	45			
-17	10	7	840	45			
-18	15	5	1,350	42			
-19	22	4	1,960	40			
M27/205-20	35	3	3,200	40	±1%	350	1.0 V AT 500 Hz

1/ THE INDUCTANCE IS MEASURED WITH 0 ADC APPLIED TO (1-2) AND AT THE SPECIFIED TEST VOLTAGE ACROSS (1-2).

2/ THE AMOUNT OF DC CURRENT THAT WILL REDUCE THE INDUCTANCE A MAXIMUM OF 8 PERCENT.

3. WHEN NUMBERS IN PARENTHESES, I.E., (1-2) ARE USED; THEY INDICATE THE WINDING AND THE EXTREME TERMINALS OF THE WINDING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS14040

RATINGS:

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 1.8 GRAMS MAXIMUM

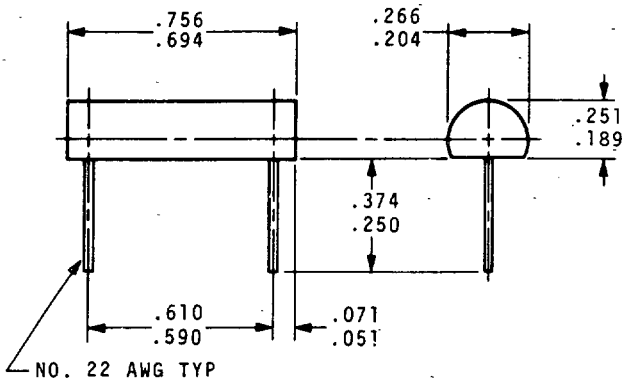


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ KHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14040-1	LT10K097	5.60	35	7.9	50	.15	760
-2	LT10K098	6.80	35	7.9	40	.20	660
-3	LT10K099	8.20	35	7.9	38	.25	575
-4	LT10K100	10.0	35	7.9	34	.30	545
-5	LT10K101	12.0	40	2.5	30	.50	410
-6	LT10K102	15.0	40	2.5	28	.60	380
-7	LT10K103	18.0	45	2.5	25	80	330
-8	LT10K104	22.0	50	2.5	21	1.20	264
-9	LT10K105	27.0	55	2.5	19	1.40	248
-10	LT10K106	33.0	60	2.5	17	1.90	214
MS14040-11	LT10K107	39.0	60	2.5	16	2.00	198

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS14041

RATINGS:

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 1.8 GRAMS MAXIMUM

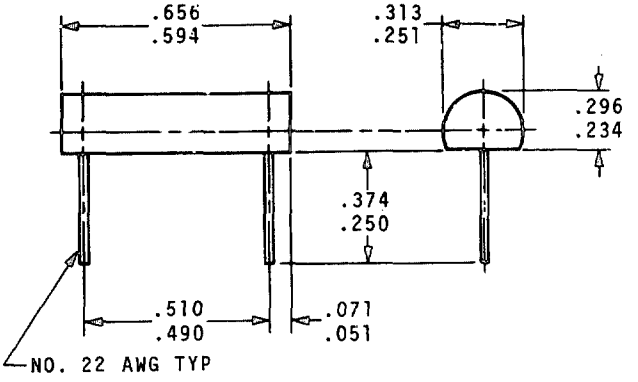


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ KHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14041-1	LT10K108	68	45	2.5	6.8	3.3	165
↑ -2	LT10K109	82	40	2.5	6.3	3.5	157
| -3	LT10K110	100	35	2.5	5.8	3.8	152
↓ -4	LT10K111	120	60	.79	5.0	4.7	138
MS14041-5	LT10K112	150	60	.79	4.4	5.3	132

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS14042

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 3.4 GRAMS MAXIMUM

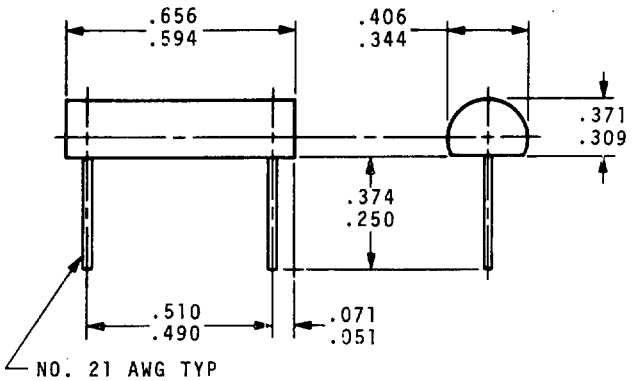


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ KHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14042-1	LT10K113	180	60	790	3.4	5.5	148
-2	LT10K114	220	60	790	3.2	5.9	145
-3	LT10K115	270	60	790	3.0	6.6	138
-4	LT10K116	330	55	790	2.7	7.5	132
MS14042-5	LT10K117	390	55	790	2.5	8.2	125

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS14043

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 4.4 GRAMS MAXIMUM

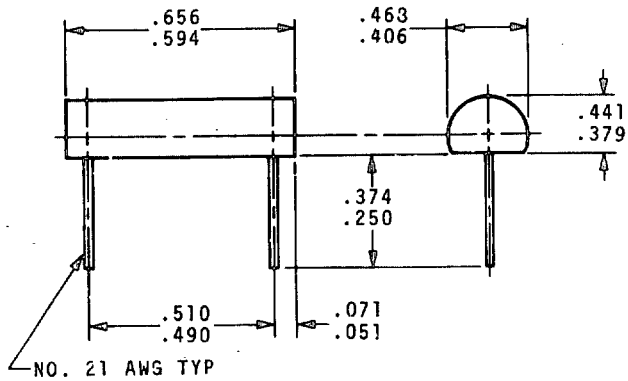


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ KHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14043-1	LT10K118	470	50	790	2.3	9.0	125
-2	LT10K119	560	45	790	2.1	10.0	118
-3	LT10K120	680	45	790	2.0	11.2	112
-4	LT10K121	820	40	790	1.8	12.2	105
MS14043-5	LT10K122	1,000	35	790	1.7	13.5	99

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS14044

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 8.0 GRAMS MAXIMUM

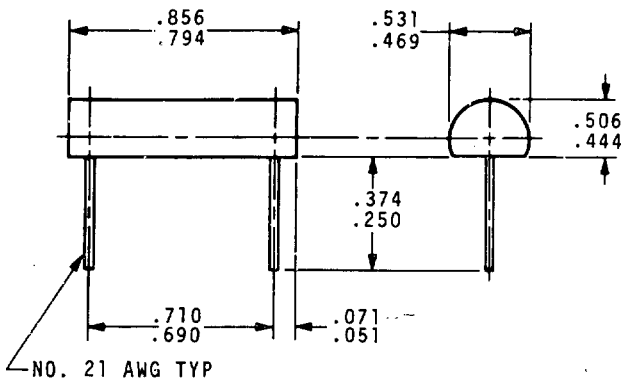


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ KHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14044-1	LT10K123	1,500	55	250	2.0	24.2	82
-2	LT10K124	1,800	55	250	1.7	29.5	76
-3	LT10K125	2,700	55	250	1.5	34.5	69
-4	LT10K126	5,100	50	250	1.0	78.0	46
MS14044-5	LT10K127	10,000	40	250	.5	70.0	49

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (PHENOLIC CORE)
MS18100

RATINGS

STYLE: LT4

GRADE: 1

CLASS: B

TEMPERATURE RISE: 35°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +125°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 1.5 GRAMS MAXIMUM

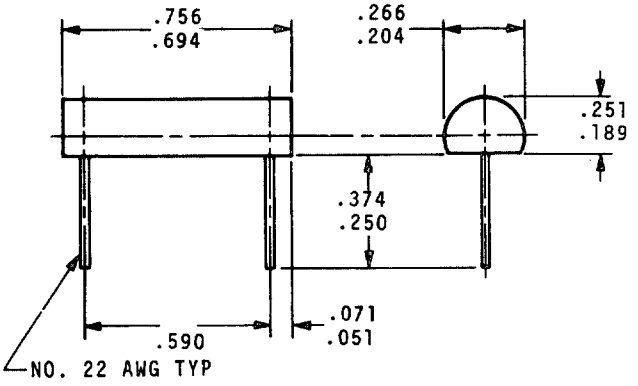


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS18100-1	LT4K200	0.47 ±20%	50	25	250	.06	1800
-2	LT4K201	0.68 ±20%	50	25	215	.10	1400
-3	LT4K202	1.00 ±10%	50	25	180	.15	1150
-4	LT4K203	1.50 ±10%	40	7.9	145	.28	850
-5	LT4K204	2.20 ±10%	40	7.9	120	.50	625
-6	LT4K205	2.70 ±10%	40	7.9	108	.70	525
-7	LT4K206	3.30 ±10%	40	7.9	95	1.40	370
-8	LT4K207	3.90 ±10%	40	7.9	90	1.50	350
MS18100-9	LT4K208	4.70 ±10%	40	7.9	80	1.80	325

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, MICROMINIATURE (IRON CORE)
MS14046

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: .90 GRAM MAXIMUM

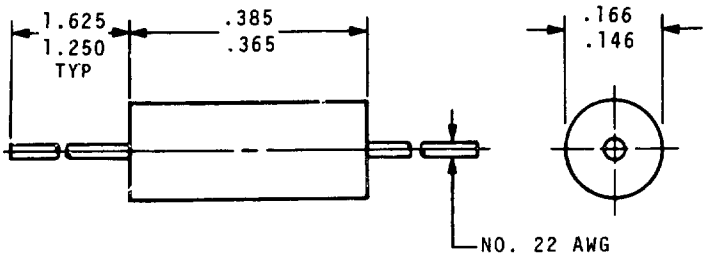


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14046-1	LT10K128	5.60	45	7.9	60	.32	495
-2	LT10K129	6.80	50	7.9	55	.50	395
-3	LT10K130	8.20	50	7.9	50	.60	360
-4	LT10K131	10.00	55	7.9	45	.90	290
-5	LT10K132	12.00	65	2.5	42	1.10	265
-6	LT10K133	15.00	65	2.5	40	1.40	240
-7	LT10K134	18.00	75	2.5	34	2.25	185
-8	LT10K135	22.00	75	2.5	30	2.50	175
-9	LT10K136	27.00	60	2.5	25	2.60	170
MS14046-10	LT10K137	33.00	65	2.5	19	3.00	165

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)

MS14047

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 2.0 GRAMS MAXIMUM

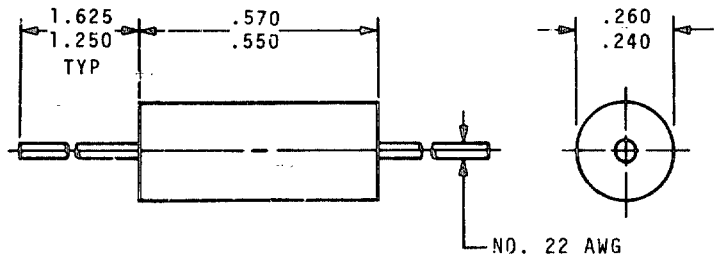


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14047-1	LT10K138	68	70	2.5	13.0	3.3	168
-2	LT10K139	82	65	2.5	11.7	3.5	162
-3	LT10K140	100	65	2.5	10.7	3.8	155
-4	LT10K141	120	75	.790	9.3	4.7	142
MS14047-5	LT10K142	150	75	.790	8.3	5.3	132

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS14048

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 2.8 GRAMS MAXIMUM

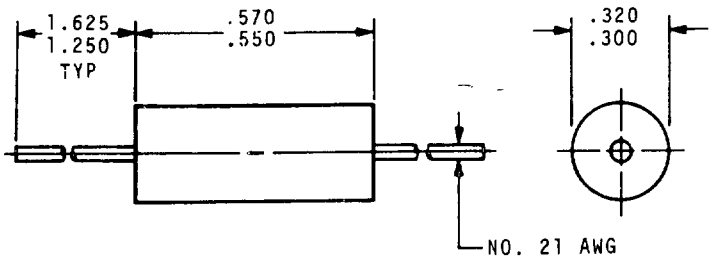


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14048-1	LT10K143	180	80	.790	6.0	5.5	148
-2	LT10K144	220	80	.790	5.5	5.9	145
-3	LT10K145	270	80	.790	5.1	6.6	138
-4	LT10K146	330	75	.790	4.2	7.8	122
MS14048-5	LT10K147	390	75	.790	3.9	8.7	118

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS14049

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 4.0 GRAMS MAXIMUM

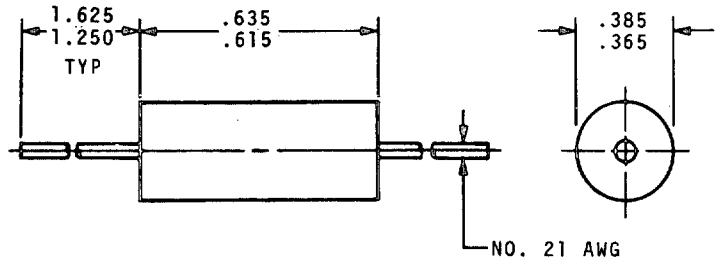


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14049-1	LT10K148	470	80	.790	3.7	9.0	125
-2	LT10K149	560	80	.790	3.5	10.0	118
-3	LT10K150	680	75	.790	3.2	11.2	112
-4	LT10K151	820	75	.790	3.0	13.0	105
MS14049-5	LT10K152	1,000	70	.790	2.7	14.5	95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS14050

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 6.4 GRAMS MAXIMUM

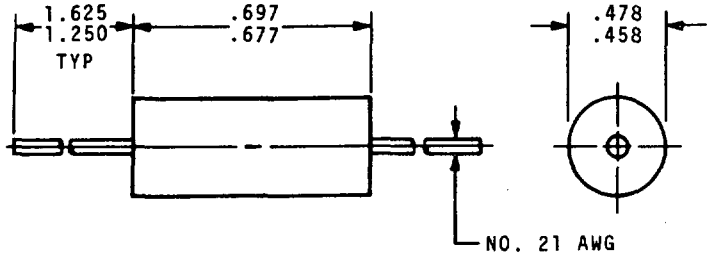


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14050-1	LT10K153	1,500	85	.250	2.2	22	84
-2	LT10K154	2,200	85	.250	1.8	27	76
-3	LT10K155	2,700	85	.250	1.6	32	69
-4	LT10K156	5,100	70	.250	1.0	66	48
MS14050-5	LT10K157	10,000	70	.250	.8	70	47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS14052

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 1.5 GRAMS MAXIMUM

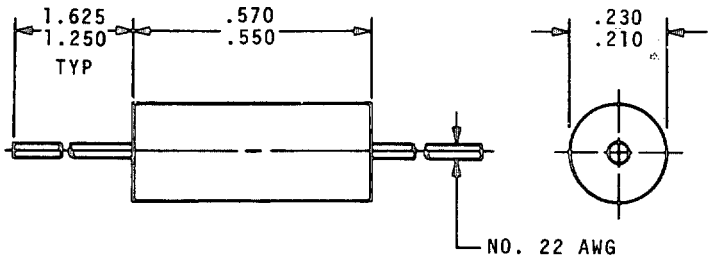


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS14052-1	LT10K158	5.60	35	7.9	55	.13	885
-2	LT10K159	6.80	35	7.9	50	.20	710
-3	LT10K160	8.20	35	7.9	44	.22	680
-4	LT10K161	10.00	35	7.9	42	.26	625
-5	LT10K162	12.00	45	2.5	34	.45	465
-6	LT10K163	15.00	45	2.5	32	.52	442
-7	LT10K164	18.00	50	2.5	28	.70	380
-8	LT10K165	22.00	60	2.5	24	1.00	326
-9	LT10K166	27.00	60	2.5	22	1.30	275
-10	LT10K167	33.00	60	2.5	20	1.50	258
MS14052-11	LT10K168	39.00	70	2.5	18	2.00	224

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (PHENOLIC CORE)
MS75052

RATINGS

STYLE: LT4

GRADE: 1

CLASS: B

TEMPERATURE RISE: 35°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +125°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 2.0 GRAMS MAXIMUM

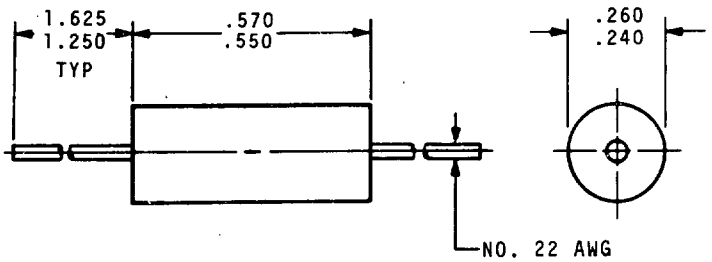


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS75052-1	LT4K052	47	18	2.5	13.5	5.9	195
MS75052-2	LT4K053	56	18	2.5	13.0	6.4	185

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS75101

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: .95 GRAM MAXIMUM

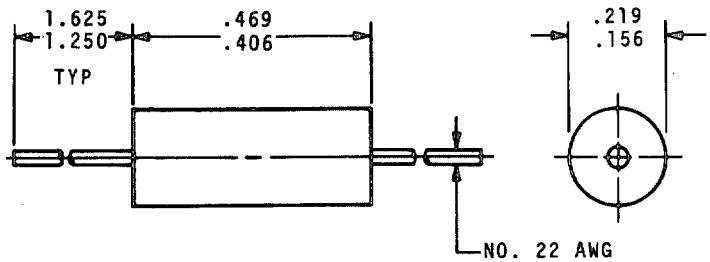


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ KHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS75101-1	LT10K169	3.30	30	7.9	70	0.140	990
-2	LT10K170	3.90	30	7.9	65	0.155	870
-3	LT10K171	4.70	30	7.9	60	0.210	745
-4	LT10K172	5.60	30	7.9	50	0.280	645
-5	LT10K173	6.80	30	7.9	50	0.375	560
-6	LT10K174	8.20	30	7.9	48	0.440	540
-7	LT10K175	10.00	30	7.9	42	0.605	440
-8	LT10K176	12.00	50	2.5	36	1.05	370
-9	LT10K177	15.00	55	2.5	30	1.20	310
-10	LT10K178	18.00	60	2.5	30	1.95	255
-11	LT10K179	22.00	60	2.5	24	2.20	240
MS75101-12	LT10K180	27.00	65	2.5	22	2.75	205

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS75103

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 3.9 GRAMS MAXIMUM

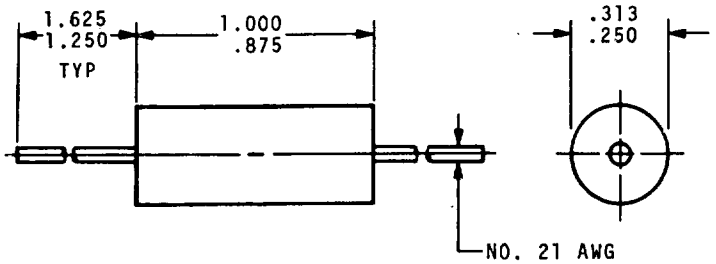


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS75103-1	LT10K181	22.0	50	2.5	24	0.295	725
-2	LT10K182	27.0	45	2.5	22	0.350	660
-3	LT10K183	33.0	60	2.5	19	0.550	525
-4	LT10K184	39.0	55	2.5	18	0.650	485
-5	LT10K185	47.0	65	2.5	16	1.00	390
-6	LT10K186	56.0	65	2.5	14	1.15	360
-7	LT10K187	68.0	75	2.5	13	1.85	285
-8	LT10K188	82.0	75	2.5	12	2.10	265
-9	LT10K189	100.0	75	2.5	12	2.50	245
MS75103-10	LT10K190	120.0	95	0.790	10	4.10	195

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS90538

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 700 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 180 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: .90 GRAM MAXIMUM

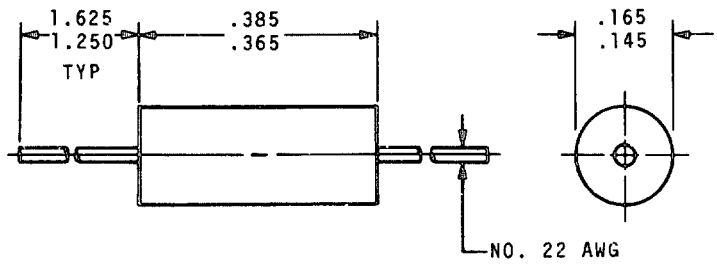


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS90538-1	LT10K001	36	60	2.50	15.5	2.50	180
-2	LT10K002	39	60	2.50	14.5	2.60	176
-3	LT10K003	43	60	2.50	13.7	2.70	172
-4	LT10K004	47	55	2.50	13.0	2.75	170
-5	LT10K005	51	55	2.50	12.7	2.85	167
-6	LT10K006	56	55	2.50	12.0	3.00	164
-7	LT10K007	62	55	2.50	11.5	3.15	160
-8	LT10K008	68	55	2.50	11.0	3.30	156
-9	LT10K009	75	55	2.50	10.5	3.70	147
-10	LT10K010	82	50	2.50	10.3	3.90	143
-11	LT10K011	91	50	2.50	10.0	4.30	136
-12	LT10K012	100	50	2.50	9.5	4.50	133
-13	LT10K013	110	60	.79	8.9	4.90	128
-14	LT10K014	120	65	.79	8.7	5.20	124
-15	LT10K015	130	65	.79	8.5	5.45	121
-16	LT10K016	150	65	.79	8.0	6.05	114
-17	LT10K017	160	65	.79	7.5	6.40	111
-18	LT10K018	180	65	.79	7.0	6.75	108
-19	LT10K019	200	65	.79	6.5	7.10	106
-20	LT10K020	220	65	.79	6.2	7.45	103
MS90538-21	LT10K021	240	65	.79	5.9	7.80	101

Source: https://assist.dla.mil downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS90539

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 700 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 180 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: .95 GRAM MAXIMUM

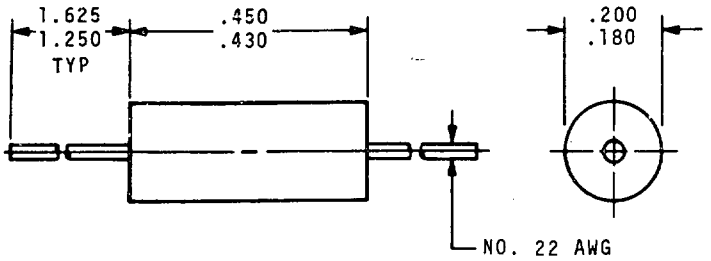


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±5% µH	Q MIN	TEST FREQUENCY MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS90539-1	LT10K022	270	65	.79	5.6	8.2	110
-2	LT10K023	300	65	.79	5.3	8.7	107
-3	LT10K024	330	65	.79	5.0	9.1	105
-4	LT10K025	360	65	.79	4.7	9.6	102
-5	LT10K026	390	65	.79	4.5	10.0	100
-6	LT10K027	430	65	.79	4.3	10.6	97
-7	LT10K028	470	65	.79	4.0	11.1	95
-8	LT10K029	510	65	.79	3.8	11.6	93
-9	LT10K030	560	65	.79	3.6	12.3	91
-10	LT10K031	620	60	.79	3.5	13.0	88
-11	LT10K032	680	60	.79	3.4	13.7	85
-12	LT10K033	750	60	.79	3.3	14.4	83
-13	LT10K034	820	60	.79	3.1	15.1	81
-14	LT10K035	910	60	.79	2.9	15.8	79
MS90539-15	LT10K036	1,000	60	.79	2.8	16.5	78

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS90540

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 700 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 180 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 1.5 GRAMS MAXIMUM

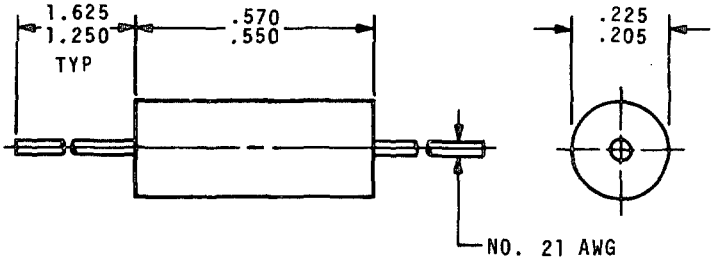


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±5% µH	Q MIN	TEST FREQUENCY MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS90540-1	LT10K037	1,100	60	.25	2.8	21.0	78
-2	LT10K038	1,200	60	.25	2.7	22.0	76
-3	LT10K039	1,300	60	.25	2.6	23.0	75
-4	LT10K040	1,500	65	.25	2.4	25.0	72
-5	LT10K041	1,600	65	.25	2.3	26.0	70
-6	LT10K042	1,800	65	.25	2.2	28.0	68
-7	LT10K043	2,000	65	.25	2.1	29.0	67
-8	LT10K044	2,200	70	.25	2.0	30.0	66
-9	LT10K045	2,400	70	.25	1.9	31.0	64
-10	LT10K046	2,700	70	.25	1.8	33.0	62
-11	LT10K047	3,000	70	.25	1.7	35.0	61
-12	LT10K048	3,300	70	.25	1.6	38.0	58
MS90540-13	LT10K049	3,600	70	.25	1.5	40.0	57

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (IRON CORE)
MS90541

RATINGS

STYLE: LT10

GRADE: 1

CLASS: A

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 700 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 180 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 2.5 GRAMS MAXIMUM

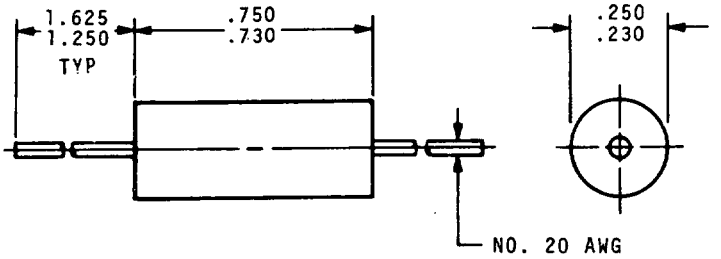


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS90541-1	LT10K050	3,900	80	.25	1.45	44.0	61
-2	LT10K051	4.300	80	.25	1.40	46.0	59
-3	LT10K052	4,700	80	.25	1.35	48.0	58
-4	LT10K053	5,000	80	.25	1.30	50.0	57
-5	LT10K054	5,600	80	.25	1.25	53.0	56
-6	LT10K055	6,200	80	.25	1.20	56.0	54
-7	LT10K056	6,800	80	.25	1.15	59.0	52
-8	LT10K057	7,500	80	.25	1.10	62.0	51
-9	LT10K058	8,200	80	.25	1.05	65.0	50
-10	LT10K059	9,100	80	.25	1.00	68.0	49
MS90541-11	LT10K060	10,000	80	.25	.95	72.0	47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (PHENOLIC CORE)

MS90542

RATINGS

STYLE: LT4

GRADE: 1

CLASS: B

TEMPERATURE RISE: 35°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +125°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 1.5 GRAMS MAXIMUM

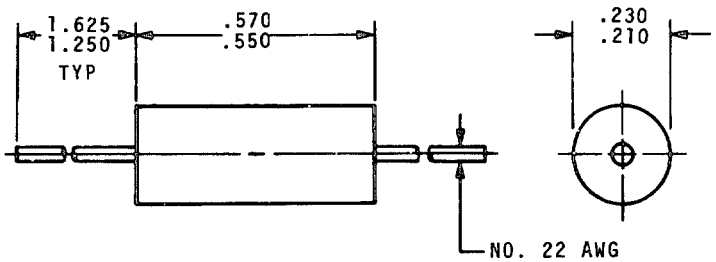


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% H	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS90542-1	LT4K315	.47	65	25	300	.06	1970
-2	LT4K316	.56	65	25	270	.07	1850
-3	LT4K317	.68	65	25	240	.08	1700
-4	LT4K318	.82	65	25	220	.11	1450
-5	LT4K319	1.00	65	25	200	.14	1290
-6	LT4K320	1.20	40	7.9	180	.19	1120
-7	LT4K321	1.50	40	7.9	160	.28	925
-8	LT4K322	1.80	40	7.9	150	.37	790
-9	LT4K323	2.20	40	7.9	135	.50	680
-10	LT4K324	2.70	40	7.9	120	.65	600
-11	LT4K325	3.30	40	7.9	105	1.00	480
-12	LT4K326	3.90	40	7.9	100	1.20	440
MS90542-13	LT4K327	4.70	40	7.9	90	1.80	360

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (PHENOLIC CORE)
MS91189

RATINGS

STYLE: LT4

GRADE: 1

CLASS: B

TEMPERATURE RISE: 35°C

AMBIENT TEMPERATURE: 90°C

OPERATING TEMPERATURE: -55°C TO +125°C

DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS FOR A MINIMUM OF 60 SEC

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS FOR A MINIMUM OF 60 SEC

TERMINAL PULL: 5 POUNDS

ALTITUDE: 70,000 FEET

WEIGHT: 3.9 GRAMS MAXIMUM

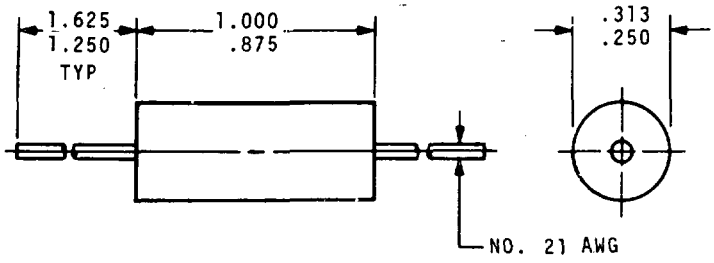


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
MS91189-14	LT4K002	1.2	60	7.9	170	0.075	2,400
-15	LT4K003	1.5	60	7.9	160	0.090	2,150
-16	LT4K004	1.8	60	7.9	140	0.135	1,750
-17	LT4K005	2.2	60	7.9	125	0.160	1,600
-18	LT4K006	2.7	60	7.9	115	0.220	1,350
-19	LT4K007	3.3	60	7.9	100	0.305	1,150
-20	LT4K008	3.9	60	7.9	95	0.450	955
-21	LT4K009	4.7	60	7.9	90	0.560	860
-22	LT4K010	5.6	60	7.9	80	0.745	745
-23	LT4K011	6.8	60	7.9	75	1.05	635
-24	LT4K012	8.2	60	7.9	68	1.40	550
-25	LT4K013	10.0	60	7.9	60	1.90	460
-26	LT4K014	12.0	40	2.5	53	2.65	395
-27	LT4K015	15.0	40	2.5	50	3.25	355
MS91189-28	LT4K016	18.0	40	2.5	45	4.15	315

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, MICROMINIATURE, MAGNETICALLY SHIELDED (PHENOLIC CORE-IRON SLEEVE) M39010/1

RATINGS:

OPERATING TEMPERATURE: -55°C TO +105°C

WEIGHT: 0.850 GRAM MAXIMUM

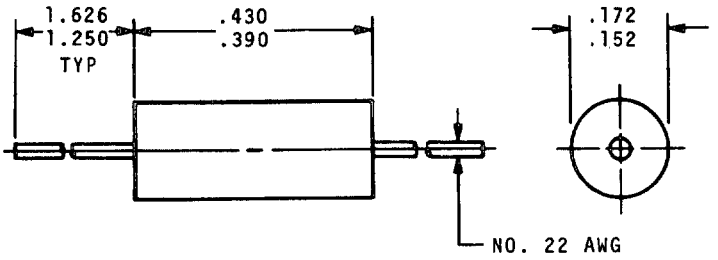


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA
M39010/1-AR10K	.10	50	25	250	.025	1790
-AR12K	.12	50	25	250	.034	1530
-AR15K	.15	50	25	250	.037	1470
-AR18K	.18	50	25	250	.047	1300
-AR22K	.22	49	25	250	.067	1100
-AR27K	.27	47	25	250	.11	853
-AR33K	.33	46	25	250	.13	780
-AR39K	.39	44	25	250	.18	670
-AR47K	.47	44	25	235	.25	565
-AR56K	.56	43	25	210	.33	490
-AR68K	.68	42	25	190	.45	420
M39010/1-AR82K	.82	40	25	180	.59	370

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL LETTER SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, MICROMINIATURE
(IRON CORE-IRON SLEEVE)
M39010/2

RATINGS:

OPERATING TEMPERATURE: -55°C TO +105°C

DIELECTRIC WITHSTANDING VOLTAGE (METHOD 301 OF MIL-STD-202, TEST VOLTAGE): 1,500 VOLTS RMS

WEIGHT: 1.00 GRAM MAXIMUM

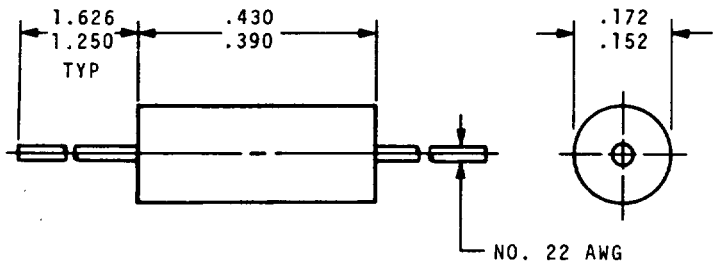


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA
M39010/2-A1R0K	1.00	44	25	140	.07	1070
-A1R2K	1.20	44	7.9	130	.10	895
-A1R5K	1.50	44	7.9	115	.12	815
-A1R8K	1.80	44	7.9	105	.14	755
-A2R2K	2.20	44	7.9	100	.19	650
-A2R7K	2.70	44	7.9	92	.28	535
-A3R3K	3.30	44	7.9	85	.35	480
-A3R9K	3.90	44	7.9	75	.40	450
-A4R7K	4.70	44	7.9	70	.55	380
-A5R6K	5.60	44	7.9	65	.72	335
-A6R8K	6.80	50	7.9	55	1.02	280
-A8R2K	8.20	50	7.9	50	1.32	245
-A100K	10.0	50	7.9	46	1.62	220
M39010/2-A120K	12.0	55	2.5	44	2.00	200

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, MOLDED, MICROMINIATURE, MAGNETICALLY SHIELDED (FERRITE CORE-FERRITE SLEEVE) M39010/3

RATINGS:

OPERATING TEMPERATURE: -55°C TO +105°C

WEIGHT: 1.00 GRAM MAXIMUM

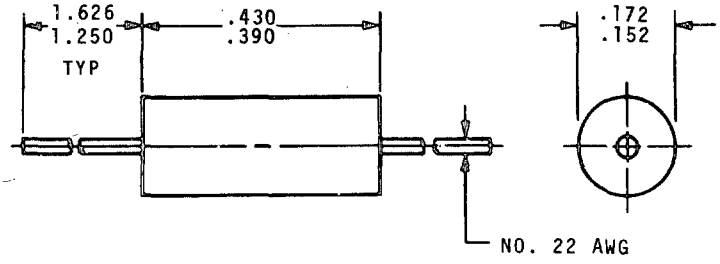


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA	INCREMENTAL CURRENT
M39010/3-A150K	15	45	2.5	49	.80	315	250
-A180K	18	45	2.5	45	.89	300	235
-A220K	22	45	2.5	41	.96	290	220
-A270K	27	45	2.5	38	1.19	260	200
-A330K	33	45	2.5	34	1.37	240	190
-A390K	39	50	2.5	29	1.93	205	180
-A470K	47	50	2.5	27	2.11	195	175
-A560K	56	50	2.5	25	2.23	190	160
-A680K	68	50	2.5	21	2.70	180	150
-A820K	82	50	2.5	10.5	2.44	170	140
-A101K	100	50	2.5	10.0	3.12	160	120
-A121K	120	55	.79	9.7	3.60	150	95
M39010/3-A151K	150	55	.79	8.5	4.10	140	90

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, MOLDED, MICROMINIATURE, MAGNETICALLY SHIELDED (FERRITE CORE-FERRITE SLEEVE) M39010/3

ELECTRICAL CHARACTERISTICS (INITIAL) (CONTINUED)

M PART NUMBER 1/	INDUCTANCE ±10% H	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA	INCREMENTAL CURRENT
M39010/3-A181K	180	55	.79	8.0	4.40	135	85
-A221K	220	55	.79	7.5	5.00	125	80
-A271K	270	55	.79	7.0	5.80	115	70
-A331K	330	55	.79	6.5	6.40	110	65
-A391K	390	60	.79	6.2	7.40	105	60
-A471K	470	60	.79	5.7	9.50	92	58
-A561K	560	60	.79	4.7	10.5	90	55
-A681K	680	60	.79	4.5	11.8	80	50
-A821K	820	60	.79	4.2	13.0	80	45
-A102K	1,000	60	.79	3.8	17.5	70	40
-A122K	1,200	45	.25	1.5	22.1	60	35
-A152K	1,500	45	.25	1.2	26.5	55	33
-A182K	1,800	45	.25	1.0	29.9	50	30
-A222K	2,200	45	.25	.97	33.8	50	27
-A272K	2,700	45	.25	.92	47.3	40	25
-A332K	3,300	45	.25	.84	53.0	40	22
-A392K	3,900	45	.25	.80	73.8	35	20
-A472K	4,700	45	.25	.74	81.6	31	19
-A562K	5,600	44	.25	.73	98.9	28	17
-A682K	6,800	40	.25	.66	111.0	27	16
-A822K	8,200	40	.25	.54	119.0	26	15
-A103K	10,000	40	.25	.47	137.0	24	14
-A123K	12,000	30	.079	.33	143.0	23	13
-A153K	15,000	30	.079	.29	157.0	22	12
-A183K	18,000	30	.079	.28	175.0	21	10
-A223K	22,000	27	.079	.25	274.0	17	9
-A273K	27,000	27	.079	.21	308.0	16	8
-A333K	33,000	27	.079	.19	343.0	15	7.5
-A393K	39,000	27	.079	.17	376.0	15	6.0
-A473K	47,000	23	.079	.16	473.0	13	5.5
-A563K	56,000	23	.079	.14	512.0	13	5.0
-A683K	68,000	23	.079	.13	580.0	12	4.0
-A823K	82,000	21	.079	.12	618.0	11	3.5
M39010/3-A104K	100,000	18	.079	.11	678.0	11	3.0

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINATURE MAGNETICALLY SHIELDED (PHENOLIC CORE) M39010/4

RATINGS:

OPERATING TEMPERATURE: -55°C TO +125°C

WEIGHT: 0.950 GRAM MAXIMUM

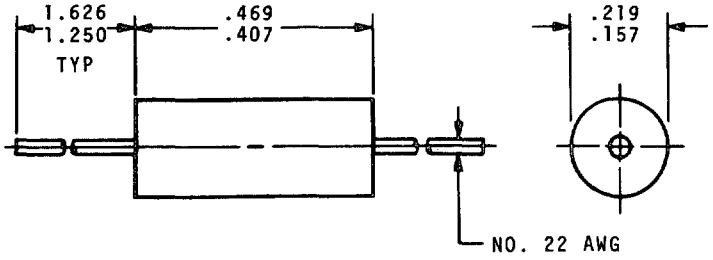


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA
M39010/4-BR15L	0.15 ±20%	55	25.0	510	0.030	2900
-BR22L	0.22 ±20%	50	25.0	415	0.035	2700
-BR33L	0.33 ±20%	50	25.0	350	0.065	2000
-BR47L	0.47 ±20%	50	25.0	300	0.085	1700
-BR56K	0.56 ±10%	50	25.0	270	0.125	1450
-BR68K	0.68 ±10%	45	25.0	250	0.150	1300
-BR82K	0.82 ±10%	40	25.0	210	0.205	1100
-B1R0K	1.00 ±10%	40	25.0	200	0.290	930
-B1R2K	1.20 ±10%	30	7.9	180	0.400	785
-B1R5K	1.50 ±10%	30	7.9	170	0.485	720
-B1R8K	1.80 ±10%	30	7.9	150	0.740	580
-B2R2K	2.20 ±10%	30	7.9	140	0.970	505
M39010/4-B2R7K	2.70 ±10%	30	7.9	120	1.20	460

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL LETTER SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, SUBMINIATURE (POWDERED IRON CORE)
M39010/5

RATINGS:

OPERATING TEMPERATURE: -55°C TO +105°C

WEIGHT: 0.950 GRAM MAXIMUM

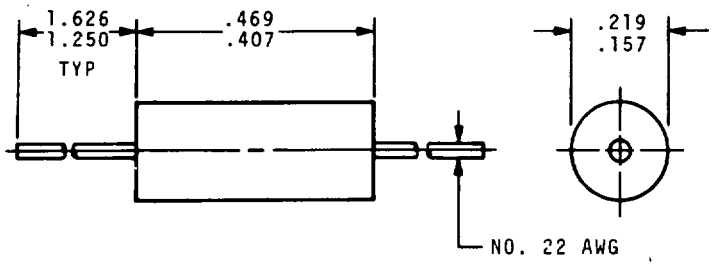


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA
M39010/5-A3R3K	3.30	30	7.9	70	0.140	945
-A3R9K	3.90	30	7.9	65	0.155	870
-A4R7K	4.70	30	7.9	60	0.210	745
-A5R6K	5.60	30	7.9	50	0.280	645
-A6R8K	6.80	30	7.9	50	0.375	560
-A8R2K	8.20	30	7.9	48	0.440	520
-A100K	10.0	30	7.9	42	0.605	440
-A120K	12.0	50	2.5	36	1.05	335
-A150K	15.0	55	2.5	30	1.20	310
-A180K	18.0	60	2.5	30	1.95	245
-A220K	22.0	60	2.5	24	2.20	230
M39010/5-A270K	27.0	65	2.5	22	2.75	205

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL LETTER SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, MICROMINIATURE (PHENOLIC CORE)
M39010/6

RATINGS:

OPERATING TEMPERATURE: -55°C TO +125°C

WEIGHT: 0.90 GRAM MAXIMUM

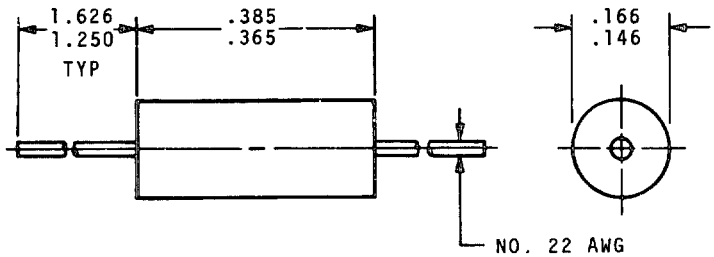


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA
M39010/6-BR15L	0.15 ±20%	50	25.0	525	0.030	2450
-BR22L	0.22 ±20%	50	25.0	450	0.055	1810
-BR33L	0.33 ±20%	45	25.0	360	0.090	1400
-BR47L	0.47 ±20%	45	25.0	310	0.12	1225
-BR56K	0.56 ±10%	50	25.0	280	0.135	1150
-BR68K	0.68 ±10%	50	25.0	250	0.150	1100
-BR82K	0.82 ±10%	50	25.0	220	0.220	900
-B1R0K	1.00 ±10%	50	25.0	200	0.290	785
-B1R2K	1.20 ±10%	33	7.9	180	0.420	650
-B1R5K	1.50 ±10%	33	7.9	160	0.500	600
-B1R8K	1.80 ±10%	33	7.9	150	0.650	525
-B2R2K	2.20 ±10%	33	7.9	135	0.950	435
-B2R7K	2.70 ±10%	33	7.9	120	1.20	385
-B3R3K	3.30 ±10%	33	7.9	110	2.00	300
-B3R9K	3.90 ±10%	33	7.9	100	2.30	280
M39010/6-B4R7K	4.70 ±10%	33	7.9	90	2.60	260

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL LETTER SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, MICROMINIATURE (POWDERED IRON CORE)
M39010/7

RATINGS:

OPERATING TEMPERATURE: -55°C TO +105°C

WEIGHT: 0.90 GRAM MAXIMUM

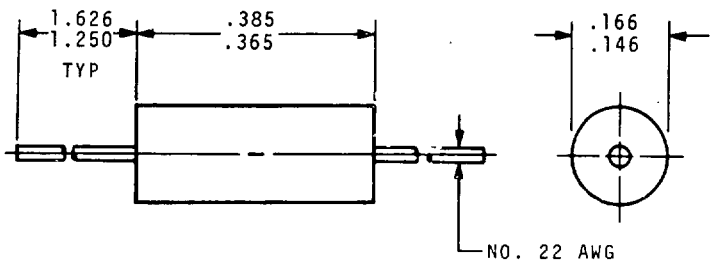


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA
M39010/7-A5R6K	5.6	45	7.9	60	0.32	495
-A6R8K	6.8	50	7.9	55	0.50	395
-A8R2K	8.2	50	7.9	50	0.60	360
-A100K	10	55	7.9	45	0.90	290
-A120K	12	65	2.5	42	1.10	265
-A150K	15	65	2.5	40	1.40	240
-A180K	18	75	2.5	34	2.25	185
-A220K	22	75	2.5	30	2.50	175
-A270K	27	60	2.5	25	2.60	170
M39010/7-A330K	33	65	2.5	19	3.00	165

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL LETTER SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, MICROMINIATURE (PHENOLIC CORE)
M39010/8

RATINGS:

OPERATING TEMPERATURE: -55°C TO +125°C

WEIGHT: 0.30 GRAM MAXIMUM

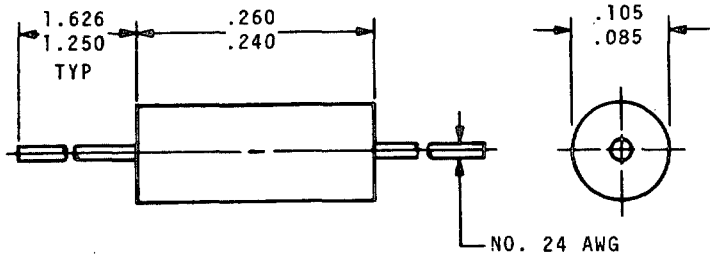


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA
M39010/8-BR10K	.10	40	25.0	680	.08	1350
-BR12K	.12	40	25.0	640	.09	1270
-BR15K	.15	38	25.0	600	.10	1200
-BR18K	.18	35	25.0	550	.12	1105
-BR22K	.22	33	25.0	510	.14	1025
-BR27K	.27	33	25.0	430	.16	960
-BR33K	.33	30	25.0	410	.22	815
-BR39K	.39	30	25.0	365	.30	700
-BR47K	.47	30	25.0	330	.35	650
-BR56K	.56	30	25.0	300	.50	545
-BR68K	.68	28	25.0	275	.60	495
-BR82K	.82	28	25.0	250	.85	415
M39010/8-B1R0K	1.00	25	25.0	230	1.00	385

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL LETTER SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, MICROMINIATURE (IRON CORE)
M39010/9

RATINGS:

OPERATING TEMPERATURE: -55°C TO +105°C

WEIGHT: 0.30 GRAM MAXIMUM

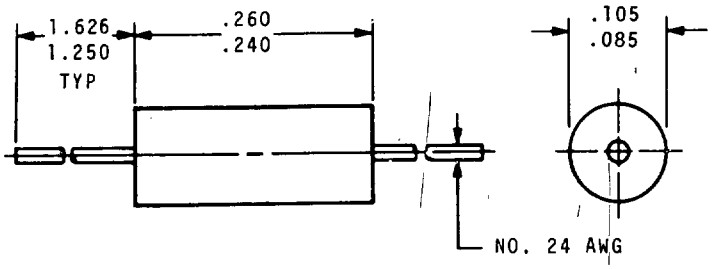


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA
M39010/9-A1R2K	1.2	25	7.9	150	.18	590
-A1R5K	1.5	28	7.9	140	.22	535
-A1R8K	1.8	30	7.9	125	.30	455
-A2R2K	2.2	30	7.9	115	.40	395
-A2R7K	2.7	37	7.9	100	.55	335
-A3R3K	3.3	45	7.9	90	.85	270
-A3R9K	3.9	45	7.9	80	1.00	250
-A4R7K	4.7	45	7.9	75	1.20	230
-A5R6K	5.6	50	7.9	65	1.80	185
-A6R8K	6.8	50	7.9	60	2.00	175
-A8R2K	8.2	55	7.9	55	2.70	155
-A100K	10	55	7.9	50	3.70	130
-A120K	12	45	2.5	40	2.70	155
-A150K	15	40	2.5	35	2.80	150
-A180K	18	50	2.5	30	3.10	145
-A220K	22	50	2.5	25	3.30	140
M39010/9-A270K	27	50	2.5	20	3.50	135

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL LETTER SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, MICROMINIATURE (FERRITE CORE)
M39010/10

RATINGS:

OPERATING TEMPERATURE: -55°C TO +105°C

WEIGHT: 0.30 GRAM MAXIMUM

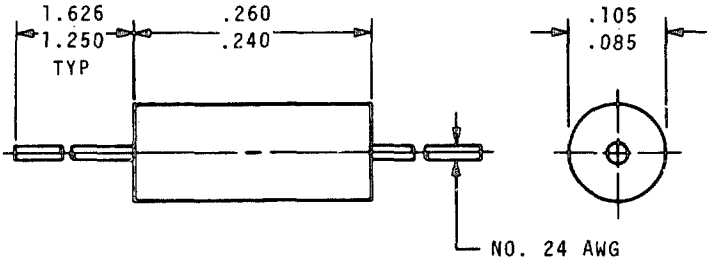


TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER 1/	INDUCTANCE ±10% µH	Q MIN	TEST FREQ MHz	SELF-RESONANT FREQUENCY MIN MHz	DC RESISTANCE MAX, 25°C OHMS	RATED DC CURRENT mA
M39010/10-A330K	33	45	2.5	24	3.4	130
-A390K	39	45	2.5	22	3.6	125
-A470K	47	45	2.5	20	4.5	110
-A560K	56	45	2.5	18	5.7	100
-A680K	68	50	2.5	15	6.7	92
-A820K	82	50	2.5	14	7.3	88
-A101K	100	50	2.5	13	8	84
-A121K	120	30	.79	12	13	66
-A151K	150	30	.79	11	15	61
-A181K	180	30	.79	10	17	57
-A221K	220	30	.79	9	21	52
-A271K	270	30	.79	8	25	47
-A331K	330	30	.79	7	28	45
-A391K	390	30	.79	6.5	35	40
-A471K	470	30	.79	6	42	36
-A561K	560	30	.79	5	46	35
-A681K	680	30	.79	4	60	30
-A821K	820	30	.79	3.8	65	29
M39010/10-A102K	1,000	30	.79	3.4	72	28

1/ COMPLETE DASH NUMBER WILL INCLUDE AN ADDITIONAL LETTER SYMBOL TO INDICATE FAILURE RATE LEVEL.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, VARIABLE, (POWDERED IRON CORE) MS90543

RATINGS

STYLE: LT12

GRADE: 3

CLASS: A

MAXIMUM OPERATING TEMPERATURE: 105°C

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C


DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS

TERMINAL PULL: 5 POUNDS

OPERATING TEMPERATURE: -55°C TO +105°C

ALTITUDE: 70,000 FEET

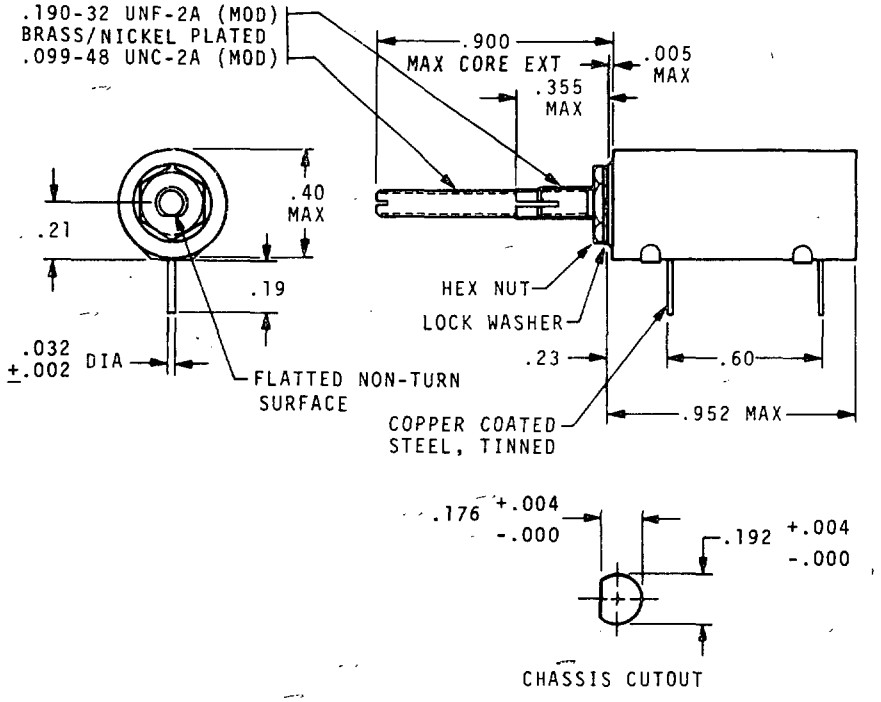

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, VARIABLE, (POWDERED IRON CORE) MS90543

TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	TUNING RANGE						SELF-RESONANT FREQUENCY MIN MHz 1/	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
		INDUCTANCE MIN	Q MIN	TEST FREQUENCY	INDUCTANCE MAX	Q MIN	TEST FREQUENCY			
MS90543-32	LT12V001	.18 µH	85	25 MHz	.28 µH	100	25 MHz	225	.05	1800
-33	LT12V002	.25 µH	95	25 MHz	.38 µH	110	25 MHz	200	.055	1720
-34	LT12V003	.35 µH	95	25 MHz	.52 µH	110	25 MHz	185	.06	1650
-35	LT12V004	.45 µH	105	25 MHz	.70 µH	110	25 MHz	165	.06	1430
-36	LT12V005	.62 µH	110	25 MHz	1.00 µH	110	25 MHz	125	.09	1340
-37	LT12V006	.83 µH	100	25 MHz	1.60 µH	65	7.9 MHz	100	.10	1280
-38	LT12V007	1.30 µH	65	7.9 MHz	2.50 µH	80	7.9 MHz	78	.23	840
-39	LT12V008	1.70 µH	70	7.9 MHz	3.40 µH	85	7.9 MHz	62	.35	680
-40	LT12V009	2.60 µH	70	7.9 MHz	5.50 µH	95	7.9 MHz	52	.75	465
-41	LT12V010	3.80 µH	80	7.9 MHz	7.30 µH	95	7.9 MHz	42	1.00	405
-42	LT12V011	5.80 µH	85	7.9 MHz	11.00 µH	90	2.5 MHz	34	1.40	340
-43	LT12V012	9.30 µH	65	7.9 MHz	18.00 µH	90	2.5 MHz	24	1.50	315
-44	LT12V013	13.50 µH	70	2.5 MHz	27.00 µH	90	2.5 MHz	18	2.00	274
-45	LT12V014	20.00 µH	75	2.5 MHz	40.00 µH	90	2.5 MHz	15.6	2.20	261
-46	LT12V015	30.00 µH	80	2.5 MHz	58.00 µH	90	2.5 MHz	12.5	3.00	223
-47	LT12V016	46.00 µH	80	2.5 MHz	87.00 µH	80	2.5 MHz	10.6	3.80	198
-48	LT12V017	70.00 µH	75	2.5 MHz	130.00 µH	85	790 KHz	8.0	4.20	189
-49	LT12V018	105.00 µH	75	790 KHz	170.00 µH	85	790 KHz	7.0	4.50	182
-50	LT12V019	150.00 µH	65	790 KHz	250.00 µH	80	790 KHz	5.5	6.00	158
-51	LT12V020	225.00 µH	55	790 KHz	390.00 µH	70	790 KHz	3.6	13.00	107
-52	LT12V021	360.00 µH	55	790 KHz	600.00 µH	60	790 KHz	2.8	17.00	94
-53	LT12V022	570.00 µH	35	790 KHz	1.25 mH	45	250 KHz	1.95	19.00	82
-54	LT12V023	1.05 mH	40	250 KHz	2.00 mH	45	250 KHz	1.45	23.00	74
-55	LT12V024	1.60 mH	35	250 KHz	3.20 mH	45	250 KHz	1.3	33.00	62
-56	LT12V025	2.50 mH	35	250 KHz	5.00 mH	40	250 KHz	1.10	41.00	56
-57	LT12V026	3.70 mH	35	250 KHz	7.50 mH	40	250 KHz	.80	61.00	46
-58	LT12V027	5.00 mH	35	250 KHz	10.00 mH	35	250 KHz	.65	81.00	40
-59	LT12V028	8.50 mH	35	250 KHz	16.00 mH	35	79 KHz	.46	120.00	32
-60	LT12V029	12.50 mH	25	79 KHz	25.00 mH	35	79 KHz	.34	170.00	27
-61	LT12V030	20.00 mH	20	79 KHz	38.00 mH	30	79 KHz	.28	230.00	23
MS90543-62	LT12V031	30.00 mH	20	79 KHz	56.00 mH	30	79 KHz	.22	345.00	19

1/ MIN SELF-RESONANT FREQUENCY AT MAX SPECIFIED INDUCTANCE.

Source: https://assist.dla.mil downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, VARIABLE, (FERRITE CORE)
MS90546

RATINGS

STYLE: LT12

GRADE: 3

CLASS: A

MAXIMUM OPERATING TEMPERATURE: 105°C

TEMPERATURE RISE: 15°C

AMBIENT TEMPERATURE: 90°C


DIELECTRIC WITHSTANDING VOLTAGE (SEA LEVEL): 1,000 VOLTS RMS

DIELECTRIC WITHSTANDING VOLTAGE (REDUCED BAROMETRIC PRESSURE): 200 VOLTS RMS

TERMINAL PULL: 5 POUNDS

OPERATING TEMPERATURE: -55°C TO +105°C

ALTITUDE: 70,000 FEET

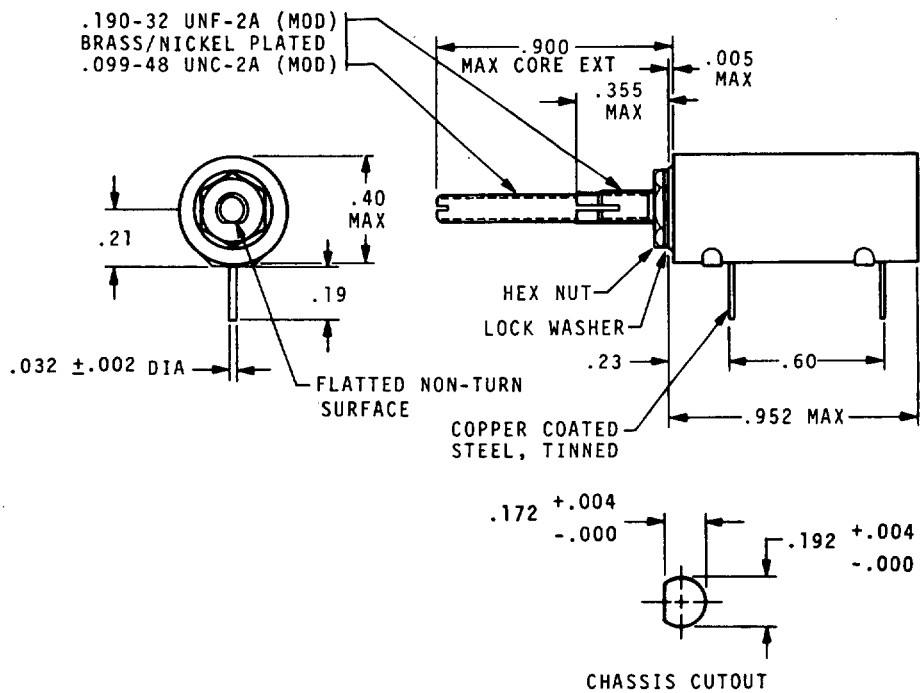

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RF, MOLDED, VARIABLE, (FERRITE CORE)
MS90546

TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

MS PART NUMBER	TYPE DESIGNATION	TUNING RANGE						SELF-RESONANT FREQUENCY MIN 1/	DC RESISTANCE MAX OHMS	RATED DC CURRENT mA
		INDUCTANCE MIN	Q MIN	TEST FREQUENCY	INDUCTANCE MAX	Q MIN	TEST FREQUENCY			
MS90546-32	LT12V032	.23 µH	90	25 MHz	.40 µH	100	25 MHz	210 MHz	.05	1800
-33	LT12V033	.29 µH	95	25 MHz	.64 µH	110	25 MHz	165 MHz	.055	1720
-34	LT12V034	.37 µH	100	25 MHz	.90 µH	110	25 MHz	140 MHz	.06	1650
-35	LT12V035	.50 µH	105	25 MHz	1.20 µH	95	7.9 MHz	125 MHz	.08	1430
-36	LT12V036	.78 µH	105	25 MHz	1.80 µH	90	7.9 MHz	95 MHz	.09	1340
-37	LT12V037	1.10 µH	75	7.9 MHz	2.50 µH	65	7.9 MHz	75 MHz	.10	1280
-38	LT12V038	1.30 µH	65	7.9 MHz	3.60 µH	65	7.9 MHz	68 MHz	.23	840
-39	LT12V039	2.00 µH	70	7.9 MHz	6.00 µH	75	7.9 MHz	56 MHz	.35	680
-40	LT12V040	3.00 µH	80	7.9 MHz	9.00 µH	100	7.9 MHz	45 MHz	.75	465
-41	LT12V041	4.00 µH	80	7.9 MHz	11.00 µH	90	2.5 MHz	39 MHz	1.00	405
-42	LT12V042	7.50 µH	80	7.9 MHz	18.00 µH	95	2.5 MHz	32 MHz	1.40	340
-43	LT12V043	12.00 µH	70	2.5 MHz	30.00 µH	100	2.5 MHz	21 MHz	1.50	315
-44	LT12V044	15.00 µH	70	2.5 MHz	44.00 µH	90	2.5 MHz	16 MHz	2.00	274
-45	LT12V045	25.00 µH	75	2.5 MHz	65.00 µH	90	2.5 MHz	13 MHz	2.20	261
-46	LT12V046	35.00 µH	80	2.5 MHz	90.00 µH	85	2.5 MHz	10 MHz	3.00	223
-47	LT12V047	55.00 µH	80	2.5 MHz	130.00 µH	85	790 KHz	8 MHz	3.80	198
-48	LT12V048	80.00 µH	70	2.5 MHz	200.00 µH	85	790 KHz	6.8 MHz	4.20	189
-49	LT12V049	120.00 µH	70	790 KHz	290.00 µH	85	790 KHz	5.6 MHz	4.50	182
-50	LT12V050	200.00 µH	60	790 KHz	430.00 µH	75	790 KHz	4.5 MHz	6.00	158
-51	LT12V051	300.00 µH	50	790 KHz	620.00 µH	70	790 KHz	3.2 MHz	13.00	107
-52	LT12V052	400.00 µH	50	790 KHz	1.00 mH	60	790 KHz	2.4 MHz	17.00	94
-53	LT12V053	600.00 µH	35	790 KHz	1.70 mH	50	250 KHz	1.9 MHz	19.00	82
-54	LT12V054	1.05 mH	35	250 KHz	2.70 mH	50	250 KHz	1.28 MHz	23.00	74
-55	LT12V055	1.70 mH	30	250 KHz	4.00 mH	40	250 KHz	1.10 MHz	33.00	62
-56	LT12V056	2.50 mH	30	250 KHz	6.00 mH	35	250 KHz	840 KHz	41.00	56
-57	LT12V057	3.70 mH	30	250 KHz	9.00 mH	35	250 KHz	700 KHz	61.00	46
-58	LT12V058	5.80 mH	30	250 KHz	13.00 mH	30	79 KHz	600 KHz	81.00	40
-59	LT12V059	8.50 mH	30	250 KHz	22.00 mH	35	79 KHz	370 KHz	120.00	32
-60	LT12V060	13.00 mH	25	79 KHz	30.00 mH	35	79 KHz	280 KHz	170.00	27
-61	LT12V061	21.00 mH	20	79 KHz	47.00 mH	25	79 KHz	210 KHz	230.00	23
MS90546-62	LT12V062	35.00 mH	20	79 KHz	70.00 mH	25	79 KHz	140 KHz	345.00	19


1/ MIN SELF-RESONANT FREQUENCY AT MAX SPECIFIED INDUCTANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SECTION 6
DELAY LINES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED STYLE PC MIL-D-23859/3

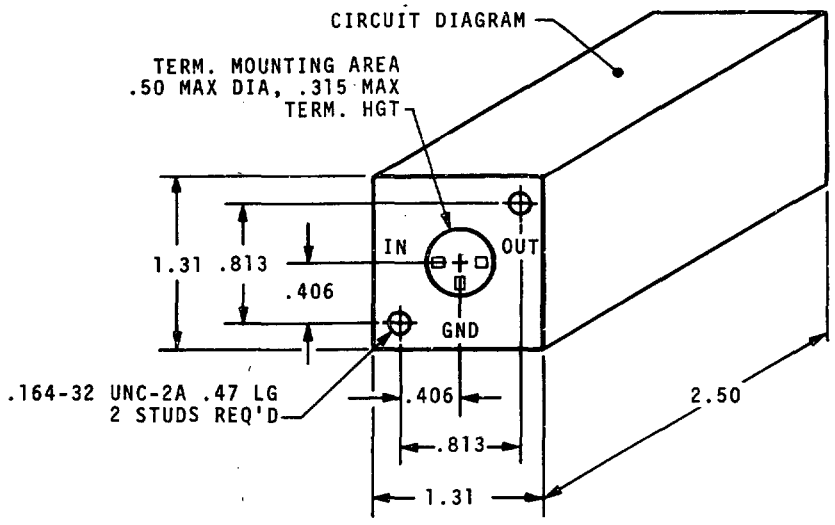

ENGINEERING DATA:

CASE MATERIAL: FERROUS TYPE, HOT TINNED OR FUSED ELECTROTINNED

FINISH: GREY ENAMEL IN ACCORDANCE WITH MIL-E-15090, TYPE I, CLASS 2

TERMINALS: THREE HOOKED TYPE SOLDER LUGS CAPABLE OF ACCEPTING TWO NO. 22 AWG BUSS LEADS MINIMUM

INPUT PULSE:

PEAK PULSE VOLTAGE: 150 VOLTS PEAK MAXIMUM

PULSE WIDTH: SHALL BE GREATER THAN THREE TIMES THE DELAY LINE PULSE RISE TIME AND LESS THAN TWICE THE DELAY

PULSE RISE TIME: 15 PERCENT TO 20 PERCENT OF DELAY LINE RISE TIME

NOMINAL TERMINATING IMPEDANCE: SEE TABLE I

WEIGHT: 8 OUNCES MAXIMUM

REQUIREMENTS:

DISTORTION: ±10 PERCENT AT MAXIMUM DELAY

THERMAL AGE STABILITY: 3 PERCENT MAXIMUM DELAY CHANGE PERMISSIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED STYLE PC MIL-D-23859/3

TABLE I: ELECTRICAL CHARACTERISTICS (INITIAL)

M PART NUMBER	TYPE DESIGNATION	NOMINAL TERMINATING IMPEDANCE OHMS	DELAY µSEC	ATTENUATION MAX dB	MAX RISE TIME µSEC
M23859/03-001	DL101PC2506F	100	0.25	1.0	0.025
-002	DL201PC2506F	200	0.25	1.0	.025
-003	DL501PC2506F	500	0.25	1.0	.025
-004	DL102PC2506F	1,000	0.25	1.0	.025
-005	DL500PC5006F	50	0.50	1.0	.050
-006	DL101PC5006F	100	0.50	1.0	.050
-007	DL201PC5006F	200	0.50	1.0	.050
-008	DL501PC5006F	500	0.50	1.0	.050
-009	DL102PC5006F	1,000	0.50	1.0	.050
-010	DL500PC1005F	50	1.0	1.0	.10
-011	DL101PC1005F	100	1.0	1.0	.10
-012	DL201PC1005F	200	1.0	1.0	.10
-013	DL501PC1005F	500	1.0	1.0	.10
-014	DL102PC1005F	1,000	1.0	1.0	.10
-015	DL202PC1005F	2,000	1.0	1.0	.10
-016	DL101PC2505F	100	2.5	3.0	.25
-017	DL201PC2505F	200	2.5	3.0	.25
-018	DL501PC2505F	500	2.5	3.0	.25
-019	DL102PC2505F	1,000	2.5	3.0	.25
-020	DL202PC2505F	2,000	2.5	3.0	.25
-021	DL201PC5005F	200	5.0	3.0	.50
-022	DL501PC5005F	500	5.0	3.0	.50
-023	DL102PC5005F	1,000	5.0	3.0	.50
-024	DL202PC5005F	2,000	5.0	3.0	.50
-025	DL501PC1004F	500	10.0	6.0	1.0
-026	DL102PC1004F	1,000	10.0	6.0	1.0
-027	DL202PC1004F	2,000	10.0	6.0	1.0
M23859/03-028	DL202PC2504F	2,000	25.0	6.0	2.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED STYLE PD MIL-D-23859/4

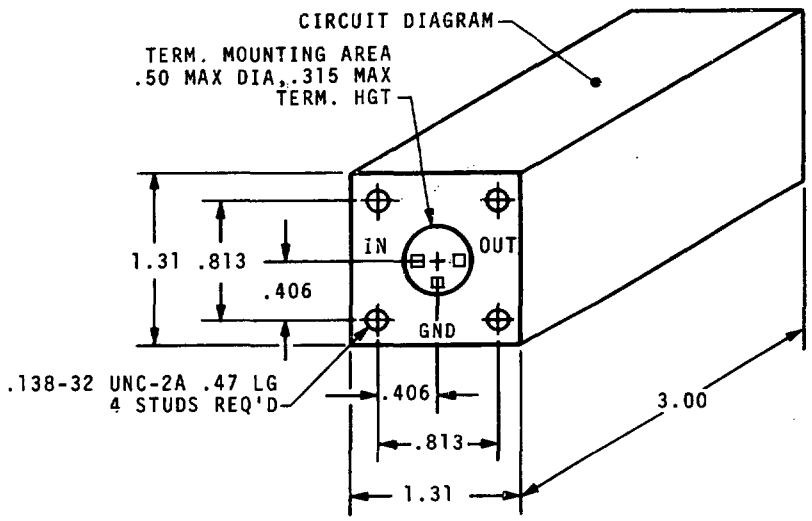

ENGINEERING DATA:

CASE MATERIAL: FERROUS TYPE, HOT TINNED OR FUSED ELECTROTINNED

FINISH: GREY ENAMEL IN ACCORDANCE WITH MIL-E-15090, TYPE I, CLASS 2

TERMINALS: THREE HOOKED TYPE SOLDER LUGS CAPABLE OF ACCEPTING TWO NO. 22 AWG BUSS LEADS MINIMUM

INPUT PULSE:

PEAK PULSE VOLTAGE: 150 VOLTS PEAK MAXIMUM

PULSE WIDTH: SHALL BE GREATER THAN THREE TIMES THE DELAY LINE PULSE RISE TIME AND LESS THAN TWICE THE DELAY

PULSE RISE TIME: 15 PERCENT TO 20 PERCENT OF DELAY LINE RISE TIME

NOMINAL TERMINATING IMPEDANCE: SEE TABLE I

WEIGHT: 12 OUNCES MAXIMUM

REQUIREMENTS:

DISTORTION: ±10 PERCENT AT MAXIMUM DELAY

THERMAL AGE STABILITY: 3 PERCENT MAXIMUM DELAY CHANGE PERMISSIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED STYLE PD MIL-D-23859/4

TABLE I

M PART NUMBER	TYPE DESIGNATION	NOMINAL TERMINATING IMPEDANCE OHMS	DELAY µSEC	ATTENUATION MAX dB	MAX RISE TIME µSEC
M23859/04-001	DL101PD2506H	100	0.25	1.0	.016
-002	DL201PD2506H	200	0.25	1.0	.016
-003	DL501PD2506H	500	0.25	1.0	.016
-004	DL500PD5006H	50	0.50	1.0	.033
-005	DL101PD5006H	100	0.50	1.0	.033
-006	DL201PD5006H	200	0.50	1.0	.033
-007	DL501PD5006H	500	0.50	1.0	.033
-008	DL500PD1005H	50	1.0	1.0	.066
-009	DL101PD1005H	100	1.0	1.0	.066
-010	DL201PD1005H	200	1.0	1.0	.066
-011	DL501PD1005H	500	1.0	1.0	.066
-012	DL102PD1005H	1,000	1.0	1.0	.066
-013	DL101PD2505H	100	2.5	3.0	.167
-014	DL201PD2505H	200	2.5	3.0	.167
-015	DL501PD2505H	500	2.5	3.0	.167
-016	DL102PD2505H	1,000	2.5	3.0	.167
-017	DL202PD2505H	2,000	2.5	3.0	.167
-018	DL201PD5005H	200	5.0	3.0	.334
-019	DL501PD5005H	500	5.0	3.0	.334
-020	DL102PD5005H	1,000	5.0	3.0	.334
-021	DL202PD5005H	2,000	5.0	3.0	.334
-022	DL501PD1004H	500	10.0	6.0	.665
-023	DL102PD1004H	1,000	10.0	6.0	.665
M23859/04-024	DL102PD2504H	1,000	25.0	6.0	1.67

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE , ELECTROMAGNETIC, FIXED STYLE PG MIL-D-23859/7

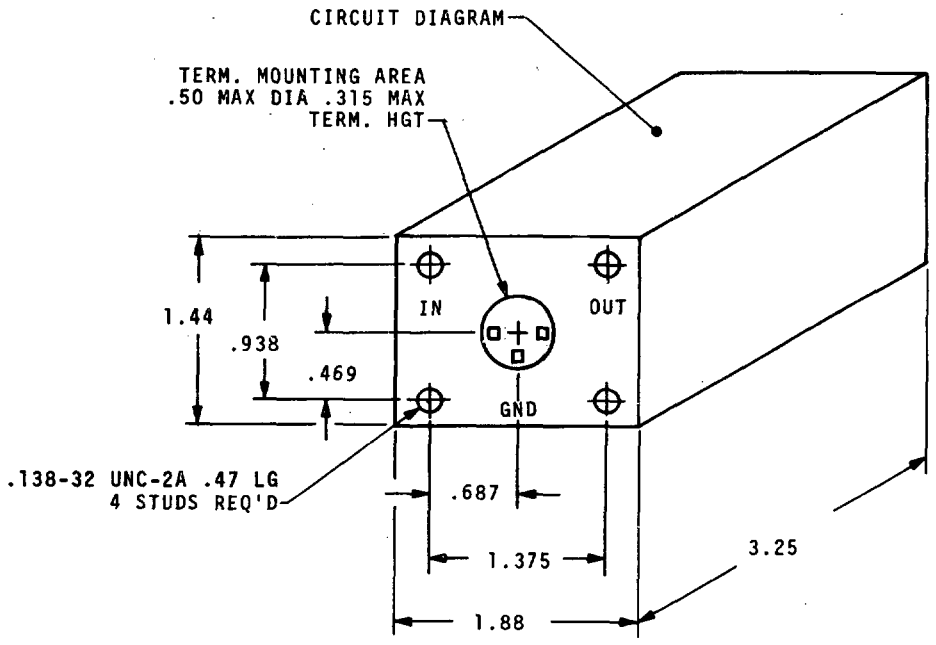

ENGINEERING DATA:

CASE MATERIAL: FERROUS TYPE, HOT TINNED OR FUSED ELECTROTINNED

FINISH: GREY ENAMEL IN ACCORDANCE WITH MIL-E-15090, TYPE I, CLASS 2

TERMINALS: THREE HOOKED TYPE SOLDER LUGS CAPABLE OF ACCEPTING TWO NO. 22 AWG BUSS LEADS MINIMUM

INPUT PULSE:

PEAK PULSE VOLTAGE: 150 VOLTS PEAK MAXIMUM

PULSE WIDTH: SHALL BE GREATER THAN THREE TIMES THE DELAY LINE PULSE RISE TIME AND LESS THAN TWICE THE DELAY

PULSE RISE TIME: 15 PERCENT TO 20 PERCENT OF DELAY LINE RISE TIME

NOMINAL TERMINATING IMPEDANCE: SEE TABLE I

WEIGHT: 20 OUNCES MAXIMUM

REQUIREMENTS:

DISTORTION: ±10 PERCENT AT MAXIMUM DELAY

THERMAL AGE STABILITY: 3 PERCENT MAXIMUM DELAY CHANGE PERMISSIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED STYLE PG MIL-D-23859/7

TABLE I

M PART NUMBER	TYPE DESIGNATION	NOMINAL TERMINATING IMPEDANCE OHMS	DELAY µSEC	ATTENUATION MAX dB	MAX RISE TIME µSEC
M23859/07-001	DL500PG2505H	50	2.5	3.0	.167
-002	DL500PG5005H	50	5.0	3.0	.334
-003	DL101PG5005H	100	5.0	3.0	.334
-004	DL101PG1004H	100	10.0	6.0	.665
-005	DL201PG1004H	200	10.0	6.0	.665
-006	DL501PG2504H	500	25.0	6.0	1.67
-007	DL202PG2504H	2,000	25.0	6.0	1.67
-008	DL501PG5004H	500	50.0	6.0	3.34
-009	DL102PG5004H	1,000	50.0	6.0	3.34
M23859/07-010	DL202PG5004H	2,000	50.0	6.0	3.34

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC
FIXED STYLE PJ
MIL-D-23859/9

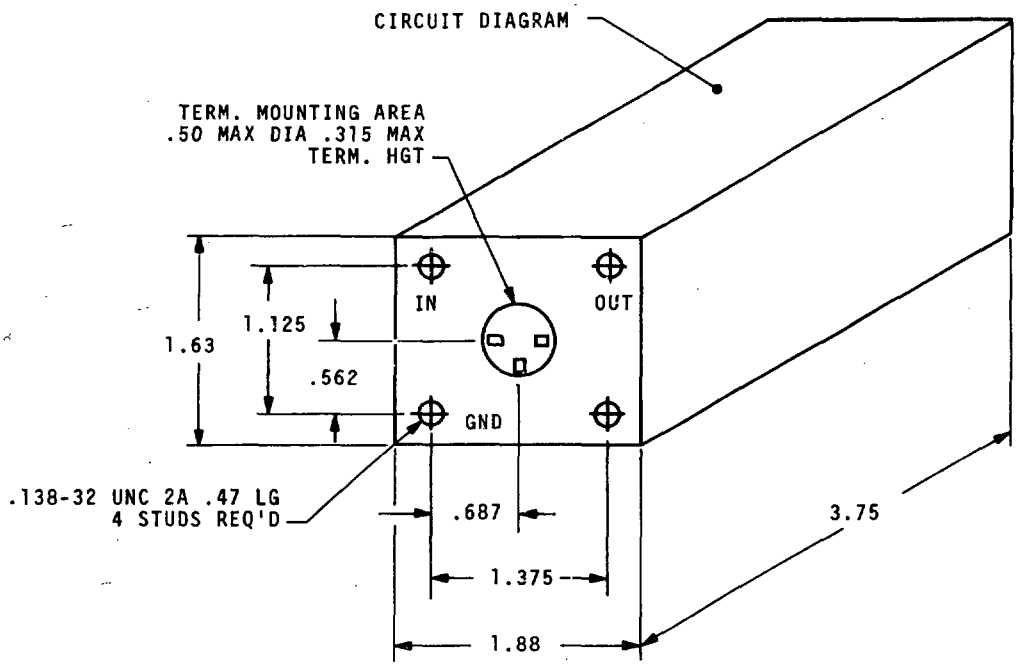

ENGINEERING DATA:

CASE MATERIAL: FERROUS TYPE, HOT TINNED OR FUSED ELECTROTINNED

FINISH: GREY ENAMEL IN ACCORDANCE WITH MIL-E-15090, TYPE I, CLASS 2

TERMINALS: THREE HOOKED TYPE SOLDER LUGS CAPABLE OF ACCEPTING TWO NO. 22 AWG BUSS LEADS MINIMUM

INPUT PULSE:

PEAK PULSE VOLTAGE: 150 VOLTS PEAK MAXIMUM

PULSE WIDTH: SHALL BE GREATER THAN THREE TIMES THE DELAY LINE PULSE RISE TIME AND LESS THAN TWICE THE DELAY

PULSE RISE TIME: 15 PERCENT TO 20 PERCENT OF DELAY LINE RISE TIME

NOMINAL TERMINATING IMPEDANCE: SEE TABLE I

WEIGHT: 16 OUNCES MAXIMUM

REQUIREMENTS:

DISTORTION: ±10 PERCENT AT MAXIMUM DELAY

THERMAL AGE STABILITY: 3 PERCENT MAXIMUM DELAY CHANGE PERMISSIBLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED STYLE PJ MIL-D-23859/9

TABLE I

M PART NUMBER	TYPE DESIGNATION	NOMINAL TERMINATING IMPEDANCE OHMS	DELAY µSEC	ATTENUATION MAX dB	MAX RISE TIME µSEC
M23859/09-001	DL101PJ1005M	100	1.0	1.0	.03
-002	DL201PJ1005M	200	1.0	1.0	.03
-003	DL501PJ1005M	500	1.0	1.0	.03
-004	DL500PJ2505M	50	2.5	3.0	.075
-005	DL101PJ2505M	100	2.5	3.0	.075
-006	DL201PJ2505M	200	2.5	3.0	.075
-007	DL501PJ2505M	500	2.5	3.0	.075
-008	DL102PJ2505M	1,000	2.5	3.0	.075
-009	DL101PJ5005M	100	5.0	3.0	.153
-010	DL201PJ5005M	200	5.0	3.0	.153
-011	DL501PJ5005M	500	5.0	3.0	.153
-012	DL102PJ5005M	1,000	5.0	3.0	.153
-013	DL202PJ5005M	2,000	5.0	3.0	.153
-014	DL201PJ1004M	200	10.0	6.0	.302
-015	DL501PJ1004M	500	10.0	6.0	.302
-016	DL102PJ1004M	1,000	10.0	6.0	.302
-017	DL202PJ1004M	2,000	10.0	6.0	.302
-018	DL501PJ2504M	500	25.0	6.0	.755
-019	DL102PJ2504M	1,000	25.0	6.0	.755
-020	DL202PJ2504M	2,000	25.0	6.0	.755
-021	DL102PJ5004M	1,000	50.0	6.0	1.53
M23859/09-022	DL202PJ5004M	2,000	50.0	6.0	1.53

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED STYLE PK MIL-D-23859/10

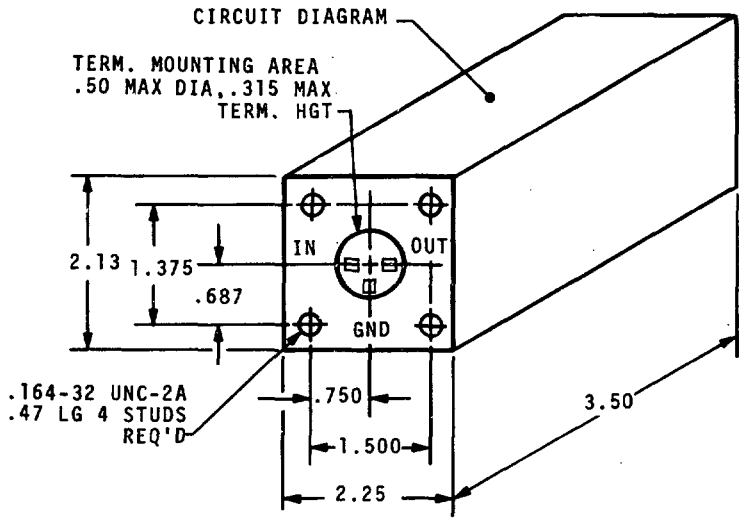

ENGINEERING DATA:

CASE MATERIAL: FERROUS TYPE, HOT TINNED OR FUSED ELECTROTINNED

FINISH: GREY ENAMEL IN ACCORDANCE WITH MIL-E-15090, TYPE I, CLASS 2

TERMINALS: THREE HOOKED TYPE SOLDER LUGS CAPABLE OF ACCEPTING TWO NO. 22 AWG BUSS LEADS MINIMUM

INPUT PULSE:

PEAK PULSE VOLTAGE: 150 VOLTS PEAK MAXIMUM

PULSE WIDTH: SHALL BE GREATER THAN THREE TIMES THE DELAY LINE PULSE RISE TIME AND LESS THAN TWICE THE DELAY

PULSE RISE TIME: 15 PERCENT TO 20 PERCENT OF DELAY LINE RISE TIME

NOMINAL TERMINATING IMPEDANCE: SEE TABLE I

WEIGHT: 16 OUNCES MAXIMUM

REQUIREMENTS:

DISTORTION: ±10 PERCENT AT MAXIMUM DELAY


THERMAL AGE STABILITY: 3 PERCENT MAXIMUM DELAY CHANGE PERMISSIBLE.

TABLE 1

M PART NUMBER	TYPE DESIGNATION	NOMINAL TERMINATING IMPEDANCE OHMS	DELAY µSEC	ATTENUATION MAX dB	MAX RISE TIME µSEC
M23859/10-001	DL500PK5005M	50	5.0	3.0	.153
-002	DL500PK1004M	50	10.0	6.0	.302
-003	DL101PK1004M	100	10.0	6.0	.302
-004	DL101PK2504M	100	25.0	6.0	.755
-005	DL201PK2504M	200	25.0	6.0	.755
-006	DL201PK5004M	200	50.0	6.0	1.53
M23859/10-007	DL501PK5004M	500	50.0	6.0	1.53

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED STYLE PM MIL-D-23859/12

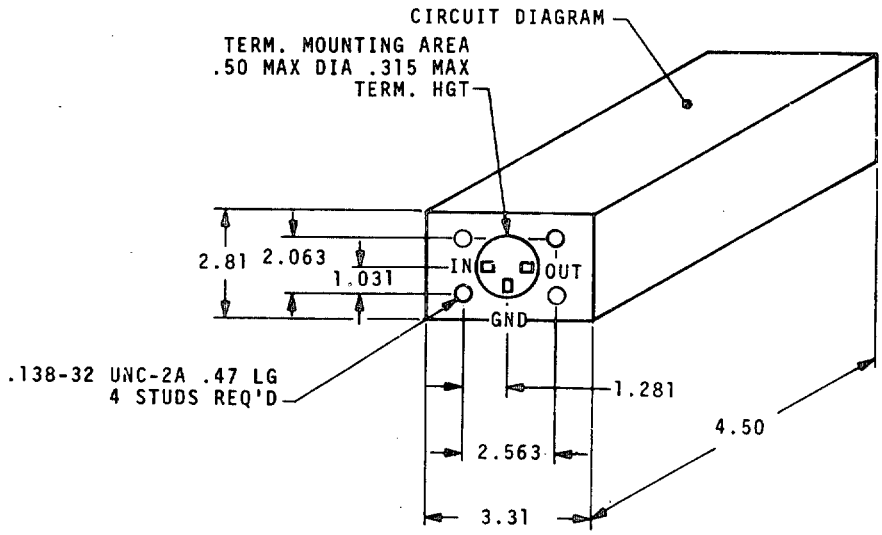

ENGINEERING DATA:

CASE MATERIAL: FERROUS TYPE, HOT TINNED OR FUSED ELECTROTINNED

FINISH: GREY ENAMEL IN ACCORDANCE WITH MIL-E-15090, TYPE I, CLASS 2

TERMINALS: THREE HOOKED TYPE SOLDER LUGS CAPABLE OF ACCEPTING TWO NO. 22 AWG BUSS LEADS MINIMUM

INPUT PULSE:

PEAK PULSE VOLTAGE: 150 VOLTS PEAK MAXIMUM

PULSE WIDTH: SHALL BE GREATER THAN THREE TIMES THE DELAY LINE PULSE RISE TIME AND LESS THAN TWICE THE DELAY

PULSE RISE TIME: 15 PERCENT TO 20 PERCENT OF DELAY LINE RISE TIME

NOMINAL TERMINATING IMPEDANCE: SEE TABLE I

WEIGHT: 32 OUNCES MAXIMUM

REQUIREMENTS:

DISTORTION: ±10 PERCENT AT MAXIMUM DELAY

THERMAL AGE STABILITY: 3 PERCENT MAXIMUM DELAY CHANGE PERMISSIBLE.

TABLE I

M PART NUMBER	TYPE DESIGNATION	NOMINAL TERMINATING IMPEDANCE OHMS	DELAY µSEC	ATTENUATION MAX dB	MAX RISE TIME µSEC
M23859/12-001	DL500PM2504M	50	25.0	6.0	.755
M23859/12-002	DL500PM5004M	50	50.0	6.0	1.53
M23859/12-003	DL101PM5004M	100	50.0	6.0	1.53

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED COMPUTER TYPE MIL-D-23859/21

REQUIREMENTS:

CASE MATERIAL: NONMETALLIC


LEADS: SOLID TINNED COPPER WIRE

INPUT PULSE:


PEAK PULSE VOLTAGE: 50 VOLTS MAXIMUM

PULSE WIDTH: GREATER THAN 3 TIMES THE OUTPUT RISE TIME AND LESS THAN 1.5 TIMES THE DELAY TIME

WEIGHT: 0.5 OUNCE MAXIMUM



CIRCUIT DIAGRAM

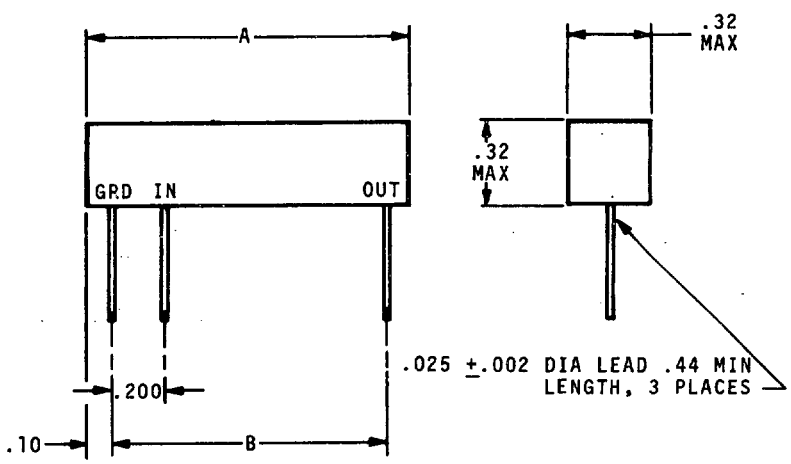

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED COMPUTER TYPE MIL-D-23859/21

ELECTRICAL CHARACTERISTICS

M PART NUMBER	NOMINAL TERMINATING IMPEDANCE OHMS	DELAY TIME nSEC	DIMENSIONS A INCHES	DIMENSIONS B INCHES	MAX RISE TIME nSEC
M23859/21-001	100	10	1.00	.800	3
-002		20			6
-003		30			9
-004		40			12
-005		50			15
-006		60	2.00	1.800	12
-007		80			16
-008		100			20
-009	200	10	1.00	.800	3
-010		20			6
-011		30			9
-012		40			12
-013		50			15
-014		60	2.00	1.800	12
-015		80			16
-016		100			20
-017	500	100	1.00	.800	30
-018		150			45
-019		200			60
-020		300			80
-021		400	2.00	1.800	55
-022		500			70
-023		600			80
M23859/21-024		1200			250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED STYLE RA

MIL-D-23859/13

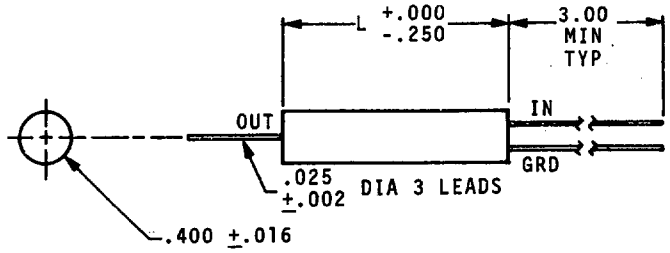
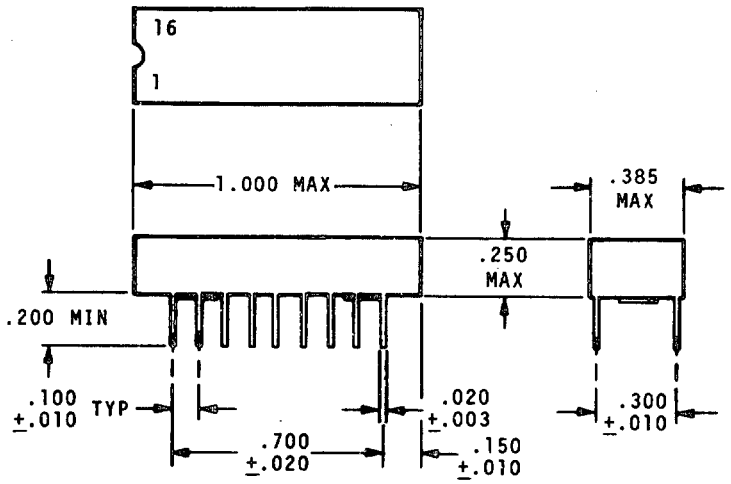


TABLE 1

M PART NUMBER	TYPE DESIGNATION	NOMINAL TERMINATING IMPEDANCE OHMS	DELAY TIME µSEC	FIGURE OF MERIT	ATTENUATION PERCENT	DIMENSION L	MAX RISE TIME µSEC
M23859/13-001	DL501RA2006B	500	.20	B	10	2.531	.074
-002	DL501RA2206B	500	.22	B	10	2.812	.081
-003	DL501RA2406B	500	.24	B	11	2.938	.089
-004	DL501RA2706C	500	.27	C	12	3.219	.048
-005	DL501RA3006C	500	.30	C	12	3.406	.053
-006	DL501RA3306C	500	.33	C	13	3.750	.059
-007	DL501RA3606D	500	.36	D	14	3.969	.053
-008	DL501RA3906D	500	.39	D	14	4.219	.057
-009	DL501RA4306D	500	.43	D	15	4.594	.063
-010	DL501RA4706D	500	.47	D	16	4.812	.069
-011	DL501RA5106E	500	.51	E	16	5.219	.062
-012	DL501RA5606E	500	.56	E	17	5.625	.068
-013	DL501RA6206E	500	.62	E	18	6.219	.075
-014	DL501RA6806E	500	.68	E	19	6.719	.083
-015	DL501RA7506F	500	.75	F	20	7.344	.075
-016	DL501RA8206F	500	.82	F	22	7.969	.082
-017	DL501RA9106F	500	.91	F	24	8.750	.091
-018	DL501RA1005F	500	1.00	F	25	9.531	.100
-019	DL501RA1105G	500	1.10	G	27	10.406	.092
M23859/13-020	DL102RA2006C	1,000	.20	C	10	2.406	.036

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, LUMPED CONSTANT, MIL-D-23859/22



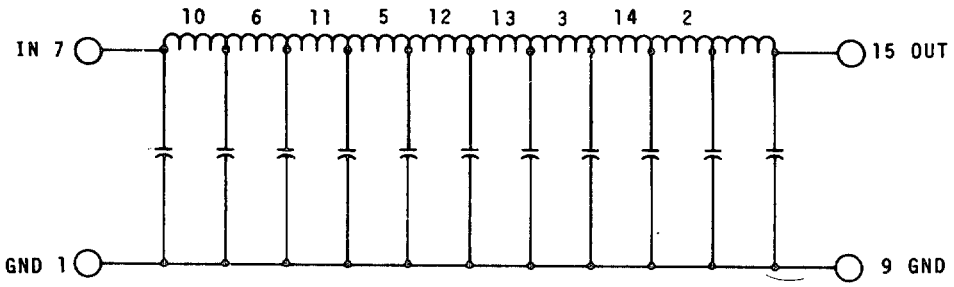


FIGURE 1: CONFIGURATION AND CIRCUIT DIAGRAM

ENGINEERING DATA:

PEAK INPUT PULSE VOLTAGE: 100 VOLTS ±5 PERCENT

WEIGHT: 2 GRAMS MAXIMUM

REQUIREMENT:

DISTORTION: ±10 PERCENT AT MAXIMUM DELAY

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, LUMPED CONSTANT, MIL-D-23859/22


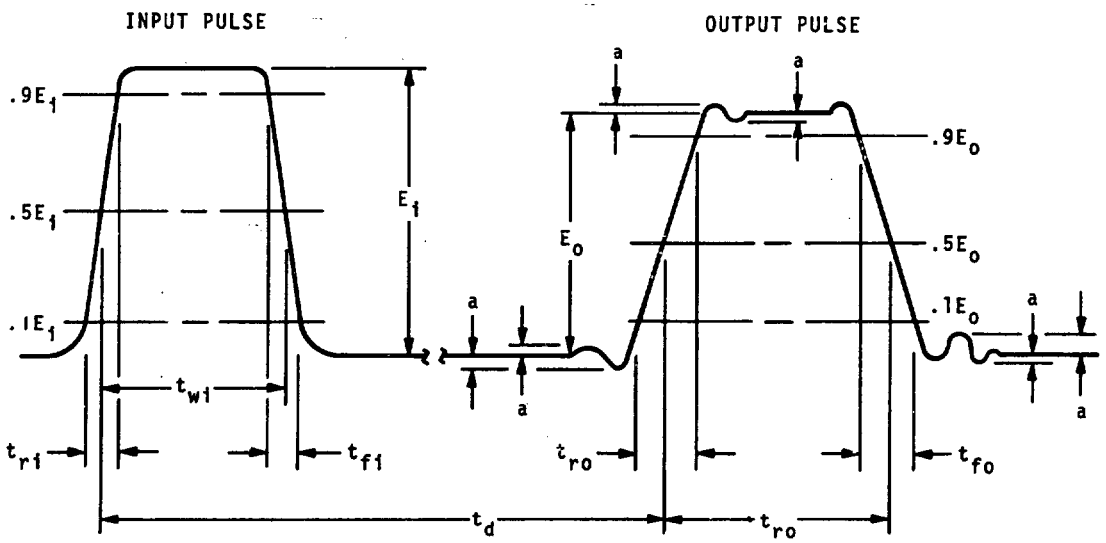


FIGURE 2: WAVEFORM CHARACTERISTICS

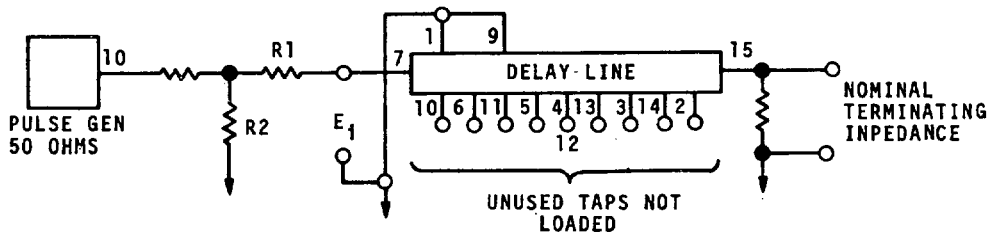

MINIMUM LOSS PADS

NOMINAL TERMINATING IMPEDANCE ±10%	R$_1$ ±1%	R$_2$ ±1%
50 Ω 1/	--	--
100 Ω	70.711	70.710

1/ NO PAD USED WHEN TERMINATING IMPEDANCE IS 50 Ω.

FIGURE 3: TEST CIRCUIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26107:292
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE , ELECTROMAGNETIC, LUMPED CONSTANT MIL-D-23859/22

TABLE I: ELECTRICAL CHARACTERISTICS

M PART NUMBER	NOMINAL TERMINATING IMPEDANCE ±10% OHMS	DELAY (BETWEEN SUCCESSIVE TAPS) nSEC 1/	ATTENUATION MAX PERCENT	RISE TIME AT MAX DELAY nSEC
M23859/22-001	100	25 ±3	12	40 ±5%
-002	100	5 ±2	2	8.5 ±10%
-003	100	10 ±3	4	17 ±10%
-004	100	12.5 ±3	6	21 ±10%
-005	100	15 ±3	8	25 ±10%
-006	100	20 ±3	10	34 ±10%
-007	50	5 ±2	1.6	8.5 ±10%
-008	50	10 ±3	3.8	17 ±10%
M23859/22-009	50	12.5 ±3	6.5	21 ±10%

1/ THE TOTAL DELAY TIME SHALL BE TEN TIMES THE DELAY BETWEEN SUCCESSIVE TAPS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, LUMPED CONSTANT MIL-D-23859/23

ENGINEERING DATA:

TERMINALS: PIN TYPE


TERMINAL MATERIAL: COPPER-NICKEL, TIN PLATED PER MIL-T-10727, TYPE I

PEAK INPUT PULSE VOLTAGE: 5.0 VOLTS ±5 PERCENT

WEIGHT: 2.5 GRAMS MAXIMUM

REQUIREMENT:

DISTORTION: ±10 PERCENT AT MAXIMUM DELAY

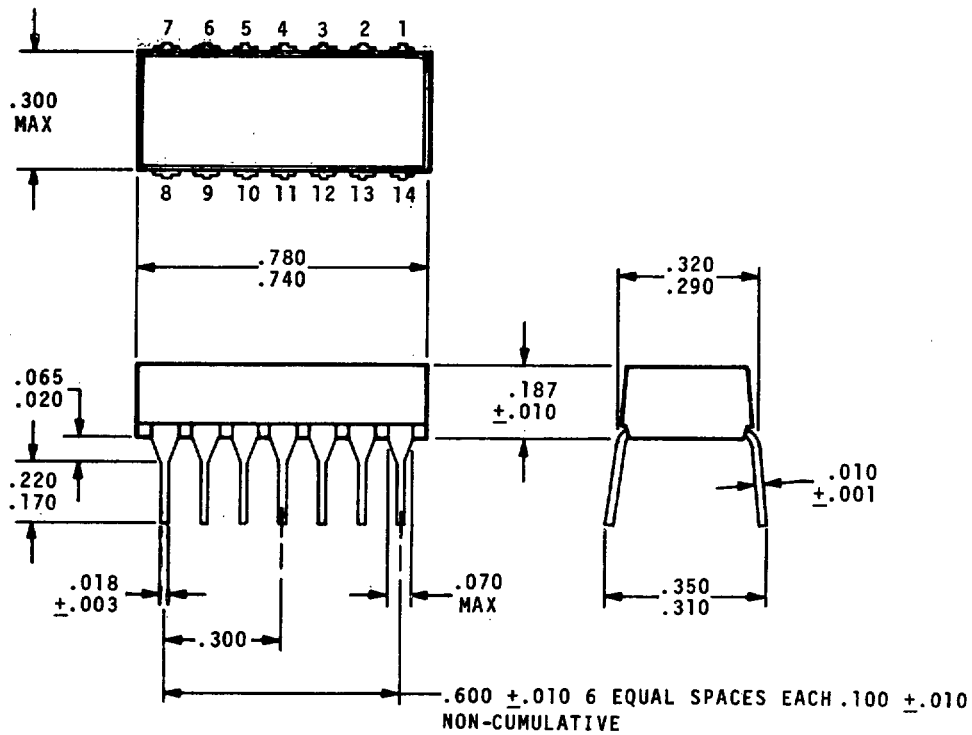

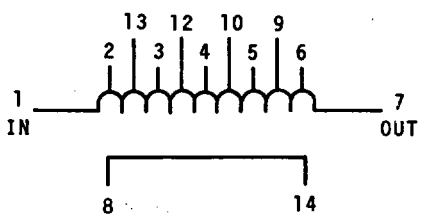


FIGURE 1: CONFIGURATION AND CIRCUIT DIAGRAM

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, LUMPED CONSTANT MIL-D-23859/23


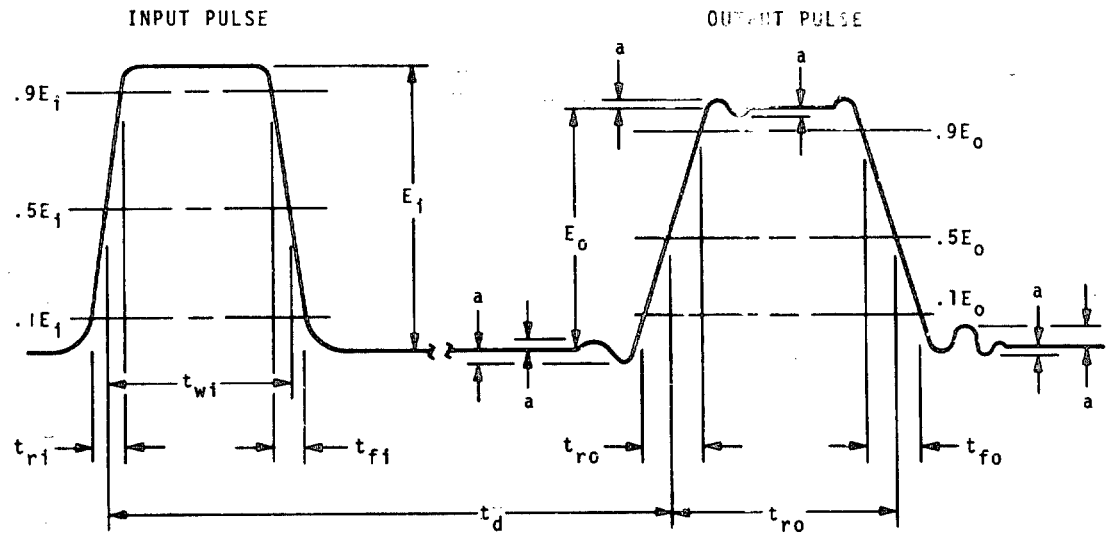


FIGURE 2: WAVEFORM CHARACTERISTICS

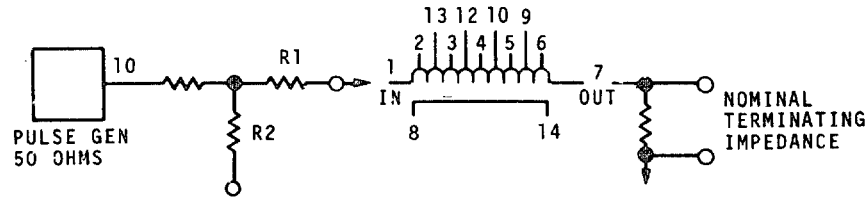

MINIMUM LOSS PADS

NOMINAL TERMINATING IMPEDANCE ±10%	R_1 ±1%	R_2 ±1%
50 Ω 1/	--	--
100 Ω	70.711	70.710
200 Ω	173.205	57.735
360 Ω	324.037	54.006
500 Ω	474.342	52.705

1/ NO PAD USED WHEN TERMINATING IMPEDANCE IS 50 Ω.

FIGURE 3: TEST CIRCUIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, LUMPED CONSTANT
MIL-D-23859/23

ELECTRICAL CHARACTERISTICS

PART NUMBER M23859/23- NOMINAL TERMINATING IMPEDANCE ±10%					TOTAL DELAY TIME 1/	ATTENUATION (MAX) PER IMPEDANCE					RISE TIME (MAX) AT MAX DELAY
50 Ω	100 Ω	200 Ω	360 Ω	500 Ω	nSEC	50 Ω	100 Ω	200 Ω	360 Ω	500 Ω	nSEC
						PERCENT					
001	101	201	301	401	5 ±2 nSEC	3	5	5	5	7	2
002	102	202	302	402	10						3
003	103	203	303	403	15						4
004	104	204	304	404	20						5.5
005	105	205	305	405	25						6
006	106	206	306	406	30						6.5
007	107	207	307	407	35						7
008	108	208	308	408	40 ±2 nSEC						8
009	109	209	309	409	45 ±5%						9
010	110	210	310	410	50						10
011	111	211	311	411	55						11
012	112	212	312	412	60						12
013	113	213	313	413	65						13
014	114	214	314	414	70						14
015	115	215	315	415	75						15
016	116	216	316	416	80						16
017	117	217	317	417	85						17
018	118	218	318	418	90						18
019	119	219	319	419	95						19
020	120	220	320	420	100			5	5	7	20
021	121	221	321	421	110			6	7	8	22
022	122	222	322	422	120						24
023	123	223	323	423	130						26
024	124	224	324	424	140						28
025	125	225	325	425	150						30
026	126	226	326	426	160						32
027	127	227	327	427	170						34
028	128	228	328	428	180						36
029	129	229	329	429	190						38
030	130	230	330	430	200	3					40
--	131	231	331	431	210						45
--	132	232	332	432	220						45
--	133	233	333	433	230						50
--	134	234	334	434	240						50
--	135	235	335	435	250						50
--	136	236	336	436	260						55
--	137	237	337	437	270						55
--	138	238	338	438	280 ±5%		5	6	7	8	60

1/ DELAY BETWEEN SUCCESSIVE TAPS SHALL BE .10 OF THE TOTAL DELAY TIME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DELAY LINE, PULSE, ELECTROMAGNETIC, LUMPED CONSTANT MIL-D-23859/23

ELECTRICAL CHARACTERISTICS (CONTINUED)

PART NUMBER M23859/23- NOMINAL TERMINATING IMPEDANCE ±10%					TOTAL DELAY TIME 1/	ATTENUATION (MAX) PER IMPEDANCE					RISE TIME (MAX) AT MAX DELAY
50 Ω	100 Ω	200 Ω	360 Ω	500 Ω	nSEC	50 Ω	100 Ω	200 Ω	360 Ω	500 Ω	nSEC
							PERCENT				
--	139	239	339	439	290 ±5%		5	6	7	8	60
--	140	240	340	440	300		5	6	7	8	60
--	141	241	341	441	310		7	8	10	10	65
--	142	242	342	442	320		↑	↑	↑	↑	65
--	143	243	343	443	330						70
--	144	244	344	444	340						70
--	145	245	345	445	350						70
--	146	246	346	446	360						75
--	147	247	347	447	370						75
--	148	248	348	448	380						80
--	149	249	349	449	390		↓	↓			80
--	150	250	350	450	400		7	8			80
--	151	251	351	451	410		8	10			85
--	152	252	352	452	420		↑	↑			85
--	153	253	353	453	430						90
--	154	254	354	454	440						90
--	155	255	355	455	450						90
--	156	256	356	456	460						95
--	157	257	357	457	470						95
--	158	258	358	458	480						100
--	159	259	359	459	490		↓	↓			100
--	160	260	360	460	500		8	10	↓	↓	100
--	161	261	361	461	350 ±5%		7	8	10	10	50

1/ DELAY BETWEEN SUCCESSIVE TAPS SHALL BE .10 OF THE TOTAL DELAY TIME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SECTION 7
CRYSTAL UNITS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CRYSTAL UNITS, GENERAL PURPOSE, MIL-C-3098

DESCRIPTION: QUARTZ CRYSTAL UNITS FOR GENERAL PURPOSE APPLICATIONS LISTED IN ORDER OF LOW END OF FREQUENCY RANGE.

SHOCK: 100 G FOR 6 mSEC (METHOD 213 OF MIL-STD-202, CONDITION C)

VIBRATION: PER TABLE I

PART NUMBER IS FORMED BY ADDING FREQUENCY TO TYPE NUMBER; E.G., CR-19A//UA 124,000 MHz.

FREQUENCY RANGE	CRYSTAL UNIT TYPE	MODE OF OSCILLATION	FREQUENCY TOLERANCE ± PPM	OPERATING TEMPERATURE RANGE, °C	HOLDER	MIL-C-3098/	LOAD CAPACITANCE pF 1/	RATED DRIVE LEVEL mW	VIB LEVEL 13/
16 TO 100 KHz	CR-38A/U	FUNDAMENTAL	120	-40 TO +70	HC-13/U	18	20.0 ± 0.5	0.1	1
	CR-50A/U	FUNDAMENTAL	120	-40 TO +70	HC-13/U	28		0.1	1
90 TO 250 KHz	CR-37A/U	FUNDAMENTAL	200	-40 TO +70	HC-13/U	17	20.0 ± 0.5	2.0 ± 0.4	1
	CR-42A/U	FUNDAMENTAL	30 2/	+70 TO +80	HC-13/U	21	32.0 ± 0.5	2.0 ± 0.4	1
190 TO 500 KHz	CR-47A/U	FUNDAMENTAL	20 3/	+70 TO +80	HC-6/U	26	20.0 ± 0.5	2.0 ± 0.4	1
200 TO 555 KHz	CR-25B/U	FUNDAMENTAL	100	-40 TO +85	HC-6/U	7		2.0 ± 0.4	2
	CR-26A/U	FUNDAMENTAL	20 3/	+70 TO +80	HC-6/U	8		2.0 ± 0.4	2
	CR-63B/U	FUNDAMENTAL	100 4/	-40 TO +70	HC-6/U	41	20.0 ± 0.5	2.0 ± 0.4	3
455 KHz	CR-45/U	FUNDAMENTAL	200	-40 TO +70	HC-6/U	24		2.0 ± 0.4	2
0.8 TO 20 MHz	CR-18A/U	FUNDAMENTAL	50	-55 TO +105	HC-6/U	3	32.0 ± 0.5	10.0 ± 2.0 5/ 5.0 ± 1.0 6/	2
	CR-19A/U	FUNDAMENTAL	50	-55 TO +105	HC-6/U	4		10.0 ± 2.0 5/ 5.0 ± 1.0 6/	2
	CR-27A/U	FUNDAMENTAL	20 3/	+70 TO +80	HC-6/U	9	32.0 ± 0.5	5.0 ± 1.0 5/ 2.5 ± 0.5 6/	2
	CR-28A/U	FUNDAMENTAL	20 3/ 11/	+70 TO +80	HC-6/U	10		5.0 ± 1.0 5/ 2.5 ± 0.5 6/	2
	CR-35A/U	FUNDAMENTAL	20 3/ 12/	+80 TO +90	HC-6/U	15		5.0 ± 1.0 5/ 2.5 ± 0.5 6/	2
	CR-36A/U	FUNDAMENTAL	20 3/ 12/	+80 TO +90	HC-6/U	16	32.0 ± 0.5	5.0 ± 1.0 5/ 2.5 ± 0.5 6/	2
	CR-62/U	FUNDAMENTAL	10 3/ 11/	+70 TO +80	HC-6/U	40	32.0 ± 0.2	5.0 ± 1.0 5/ 2.5 ± 0.5 6/	2
	CR-85/U	FUNDAMENTAL	20 30	-40 TO +90 -55 TO -40 +90 TO +105	HC-6/U	56		10.0 ± 2.0 5/ 5.0 ± 1.0 6/	4
	CR-157/U	FUNDAMENTAL	50	-55 TO +105	HC-33/U	137		10.0 ± 2.0 5/ 5.0 ± 1.0 6/	2
2 TO 10 MHz	CR-120/U	FUNDAMENTAL	5	85 ± 5	HC-27/U	97	100 ± 0.5	.002	4
	CR-121/U	FUNDAMENTAL	5		HC-27/U	98	50.0 ± 0.5	.2	4
2.2 TO 20 MHz	CR-78A/U	FUNDAMENTAL	50	-55 TO +105	HC-25/U	62	30.0 ± 0.5	5.0 ± 1.0	4
2.9 TO 20 MHz	CR-64/U	FUNDAMENTAL	50	-55 TO +105	HC-18/U	42	30.0 ± 0.5	5.0 ± 1.0	4
	CR-79/U	FUNDAMENTAL	50	-55 TO +105	HC-25/U	63		5.0 ± 1.0	4
2.9 TO 25 MHz	CR-69A/U	FUNDAMENTAL	20 30	-40 TO +90 -55 TO -40 +90 TO +105	HC-18/U	47	30.0 ± 0.5	5.0 ± 1.0	4
3 TO 20 MHz	CR-66/U	FUNDAMENTAL	20 30	-40 TO +90 -55 TO -40 +90 TO +105	HC-6/U	44	30.0 ± 0.5	10.0 ± 2.0 5/ 5.0 ± 1.0 6/	4
	CR-68/U	FUNDAMENTAL	20 3/	+70 TO +80	HC-6/U	46	32.0 ± 0.5	5.0 ± 1.0	2
5 TO 20 MHz	CR-60A/U	FUNDAMENTAL	50	-55 TO +105	HC-18/U	38		5.0 ± 1.0	2
	CR-112/U	FUNDAMENTAL	25	-55 TO +105	HC-18/U	88		5.0 ± 1.0	2
10 TO 61 MHz	CR-52A/U	THIRD OVERTONE	50	-55 TO +105	HC-6/U	30		4.0 ± 0.8 7/ 2.0 ± 0.4 8/	2
	CR-65/U	THIRD OVERTONE	10 9/ 11/	+70 TO +80	HC-6/U	43		2.0 ± 0.4 7/ 1.0 ± 0.2 8/	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CRYSTAL UNITS, GENERAL PURPOSE, MIL-C-3098

FREQUENCY RANGE	CRYSTAL UNIT TYPE	MODE OF OSCILLATION	FREQUENCY TOLERANCE ± PPM	OPERATING TEMPERATURE RANGE, °C	HOLDER	MIL-C-3098/	LOAD CAPACITANCE pF 1/	RATED DRIVE LEVEL mW	VIB LEVEL 13/
16 TO 61 MHz	CR-76A/U	THIRD OVERTONE	20	-40 TO +90	HC-18/U	53		2.0 ± 0.4	4
			30	-55 TO -40 +90 TO +105					
17 TO 61 MHz	CR-61/U	THIRD OVERTONE	20 3/ 12/	+80 TO +90	HC-18/U	39		2.0 ± 0.4 7/ 1.0 ± 0.2 8/	2
	CR-73/U	THIRD OVERTONE	30	-55 TO +105	HC-29/U	54		2.0 ± 0.4 10/	4
	CR-84/U	THIRD OVERTONE	20 3/ 11/	+80 TO +90	HC-25/U	61		2.0 ± 0.4 7/ 1.0 ± 0.2 8/	4
17 TO 62 MHz	CR-55A/U	THIRD OVERTONE	50	-55 TO +105	HC-18/U	33		2.0 ± 0.4	4
	CR-67A/U	THIRD OVERTONE	25	-55 TO +105	HC-18/U	45		2.0 ± 0.4	4
			20	-40 TO +90					
	CR-77/U	THIRD OVERTONE	30	-55 TO -40 +90 TO +105	HC-25/U	55		2.0 ± 0.4	4
17 TO 65 MHz	CR-81/U	THIRD OVERTONE	50	-55 TO +105	HC-25/U	58		2.0 ± 0.4	4
45 TO 125 MHz	CR-74/U	FIFTH OVERTONE	10 9/	+80 TO +90	HC-26/U	51		1.0 ± 0.2	4
50 TO 125 MHz	CR-54A/U	FIFTH OVERTONE	50	-55 TO +105	HC-6/U	32		2.0 ± 0.4	2
	CR-56A/U	FIFTH OVERTONE	50	-55 TO +105	HC-18/U	34		2.0 ± 0.4	4
	CR-59A/U	FIFTH OVERTONE	20 3/ 12/	+80 TO +90	HC-18/U	37		1.0 ± 0.2	2
	CR-75/U	FIFTH OVERTONE	10 9/ 11/	+70 TO +80	HC-6/U	52		1.0 ± 0.2	2
			20	-40 ± +90					
	CR-80/U	FIFTH OVERTONE	30	-55 TO -40 +90 TO +105	HC-18/U	57		2.0 ± 0.4	4
	CR-82/U	FIFTH OVERTONE	50	-55 TO +105	HC-25/U	59		2.0 ± 0.4	4
			20	-40 TO +90					
	CR-83/U	FIFTH OVERTONE	30	-55 TO -40 +90 TO +105	HC-25/U	60		2.0 ± 0.4	4

1/ WHEN A LOAD CAPACITANCE IS GIVEN, THE CRYSTAL UNIT IS DESIGNED TO RESONATE AT RATED FREQUENCY WITH AN EXTERNAL CAPACITOR OF THE VALUE SPECIFIED. CRYSTAL UNITS WHICH HAVE INFINITE LOAD CAPACITANCE ARE DESIGNED TO OPERATE AT SERIES RESONANCE.

2/ STABILITY WITHIN OVERALL FREQUENCY TOLERANCE: ±20 PPM.

3/ STABILITY WITHIN OVERALL FREQUENCY TOLERANCE: ±5 PPM.

4/ FREQUENCY TOLERANCE OVER SECONDARY OPERATING TEMPERATURE RANGE (-55 TO -40°C AND +70 TO +90): ±150 PPM.

5/ FOR FREQUENCIES UP TO AND INCLUDING 10 MHz.

6/ FOR FREQUENCIES ABOVE 10 MHz.

7/ FOR FREQUENCIES UP TO AND INCLUDING 25 MHz.

8/ FOR FREQUENCIES ABOVE 25 MHz.

9/ STABILITY WITHIN OVERALL FREQUENCY TOLERANCE: ±2.5 PPM.

10/ FOR FREQUENCIES OF 17 TO 30 MHz.

11/ FREQUENCY TOLERANCE AT ROOM TEMPERATURE: ±70 PPM.


12/ FREQUENCY TOLERANCE AT ROOM TEMPERATURE: ±80 PPM.

13/ VIBRATION LEVELS:

1 - 10-55 Hz, .003 INCH DOUBLE AMPLITUDE; PER MIL-STD-202, METHOD 201
2 - 10-55 Hz, .06 INCH DOUBLE AMPLITUDE; PER MIL-STD-202, METHOD 201
3 - 10-500 Hz, 5 G; PER MIL-STD-202, METHOD 204, CONDITION A
4 - 10-500 Hz, 10 G; PER MIL-STD-202, METHOD 204, CONDITION A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CRYSTAL UNITS, GENERAL PURPOSE, MIL-C-3098

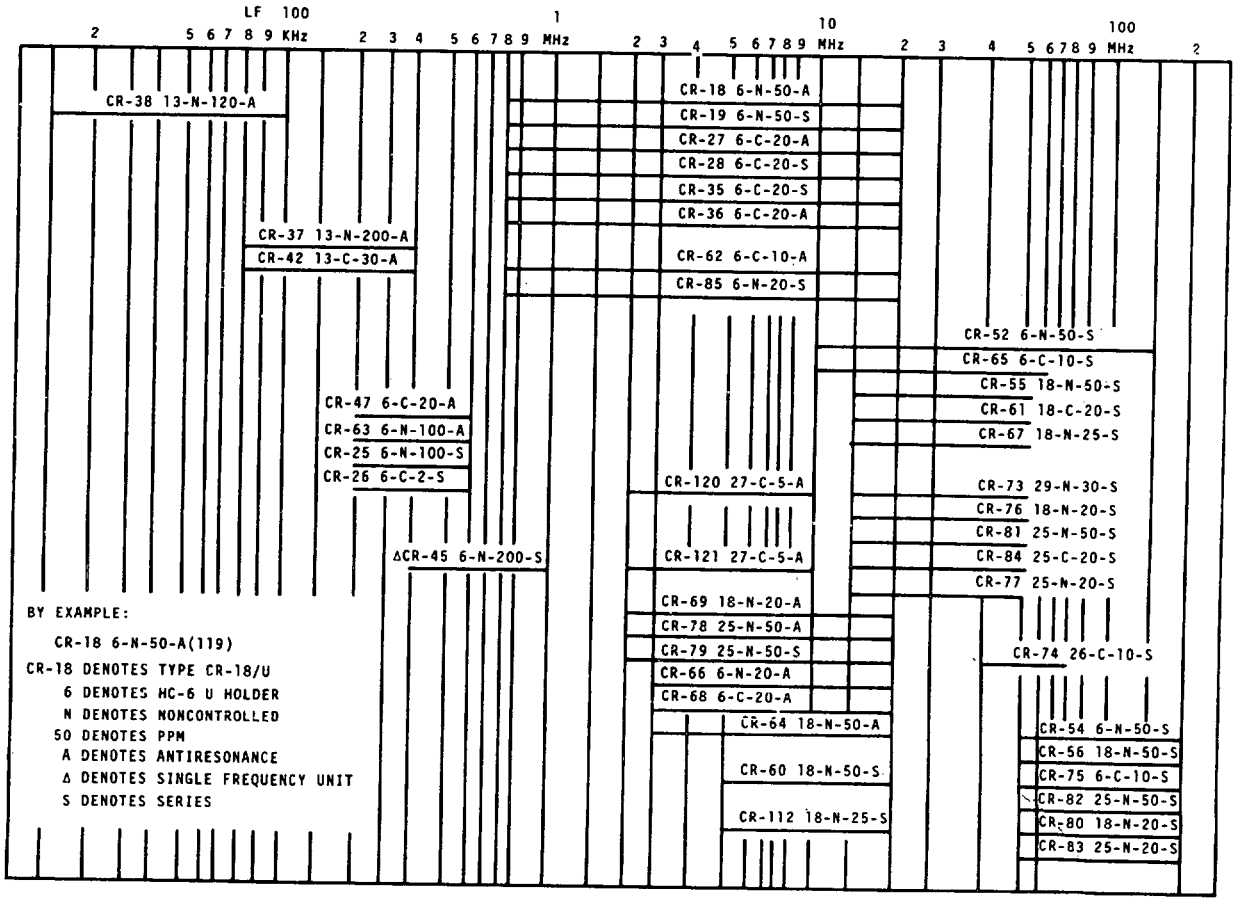


Source: https://assist.dla.mil -- Downloaded: 2026-10-26107:292
Check the source to verify that this is the current version before use.


CRYSTAL UNITS, GENERAL PURPOSE, MIL-C-3098

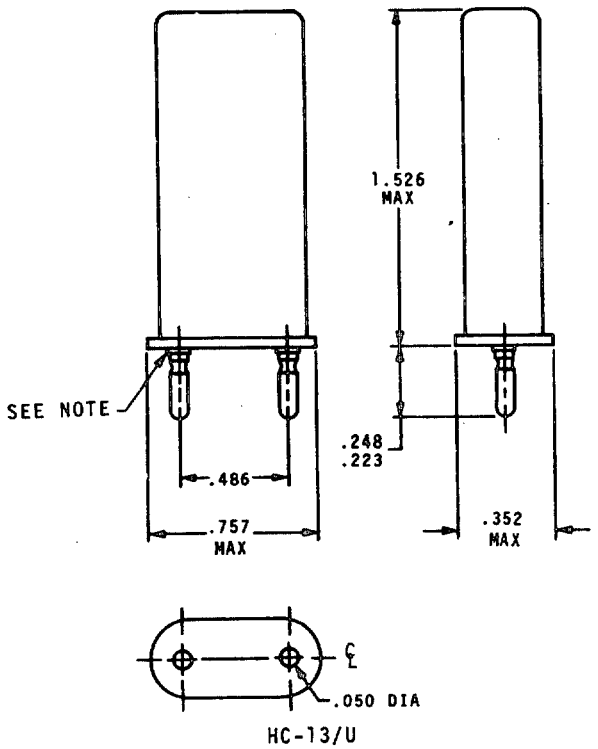


HC-13/U

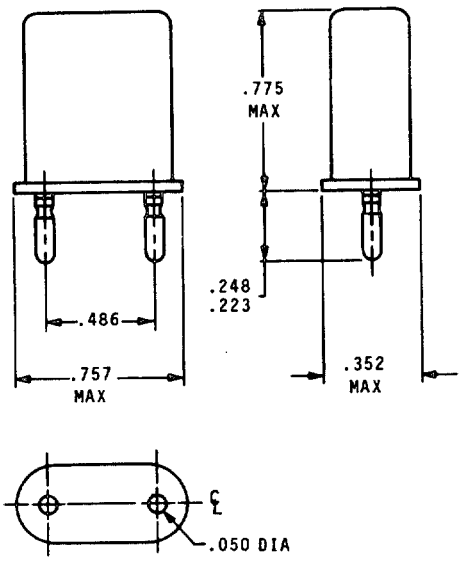

HC-27/U

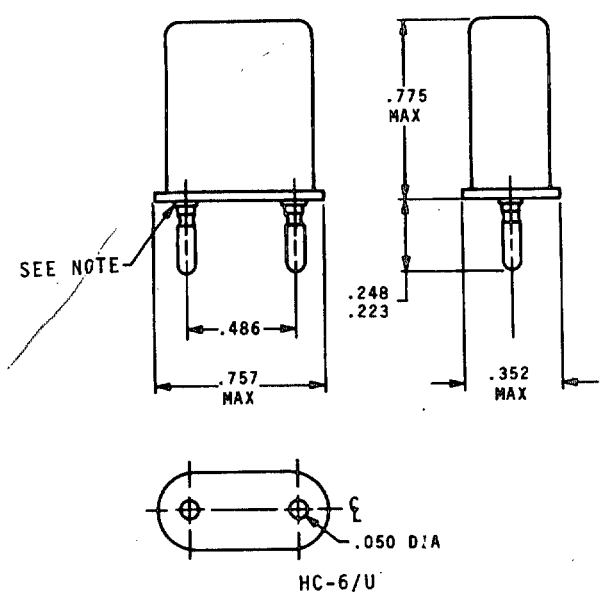

HC-6/U

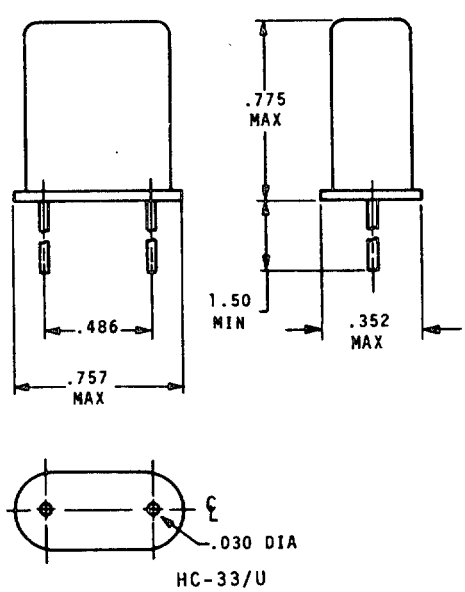


HC-33/U


NOTE: BOSS: .141 DIA MAX X .020 MAX; OPTIONAL.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CRYSTAL UNITS, GENERAL PURPOSE , MIL-C-3098

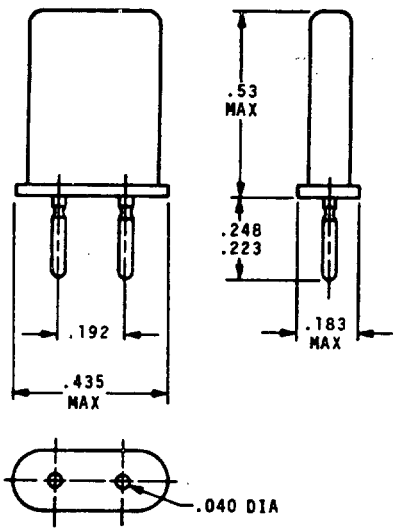


HC-25/U

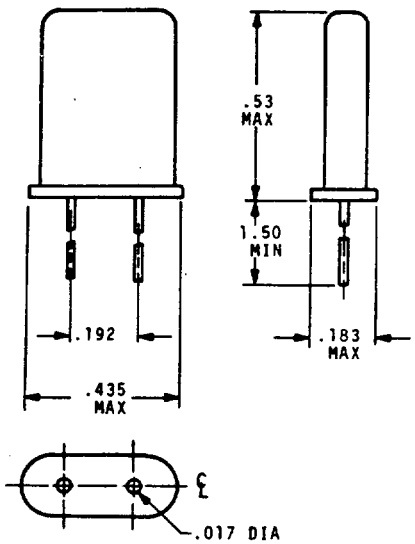

HC-18/U

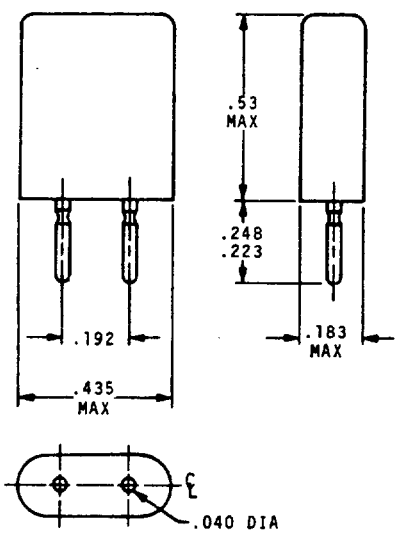

HC-29/U

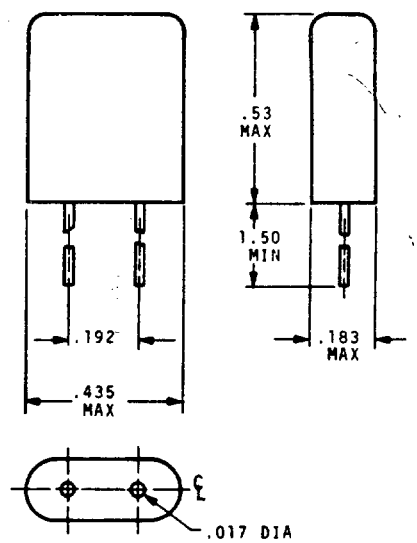

HC-26/U

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.