MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS
CRYSTALS, DELAY LINES, COILS, AND TRANSFORMERS

TO ALL HOLDERS OF MIL-STD-242H(NAVY), PART 2:

1. THE FOLLOWING PAGES OF MIL-STD-242H(NAVY), PART 2 HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
iii		(REPRINTED WITHOUT CHANGE)	
iv	22 October 1984	iv	17 AUGUST 1981
1-41		(REPRINTED WITHOUT CHANGE)	
1-42	22 October 1984	NONE	---
1-43	22 October 1984	NONE	---
1-44	22 October 1984	NONE	---
1-45	22 October 1984	NONE	---
1-46	22 October 1984	NONE	---
3-9		(REPRINTED WITHOUT CHANGE)	
3-10	22 October 1984	3-10	17 AUGUST 1981
3-11	22 October 1984	3-11	17 AUGUST 1981
3-12		(REPRINTED WITHOUT CHANGE)	
3-13		(REPRINTED WITHOUT CHANGE)	
3-14	22 October 1984	3-14	17 AUGUST 1981
3-21	22 October 1984	3-21	17 AUGUST 1981
3-22		(REPRINTED WITHOUT CHANGE)	
3-25		(REPRINTED WITHOUT CHANGE)	
3-26	22 October 1984	3-26	17 AUGUST 1981
3-27	22 October 1984	NONE	---
3-28	22 October 1984	NONE	---
4-11		(REPRINTED WITHOUT CHANGE)	
4-12	22 October 1984	NONE	---
4-13	22 October 1984	NONE	---
4-14	22 October 1984	NONE	---
5-37	22 October 1984	NONE	---
5-38	22 October 1984	NONE	---
5-39	22 October 1984	NONE	---
5-40	22 October 1984	NONE	---
5-41	22 October 1984	NONE	---
5-42	22 October 1984	NONE	---
5-43	22 October 1984	NONE	---
5-44	22 October 1984	NONE	---
5-45	22 October 1984	NONE	---
5-46	22 October 1984	NONE	---

FSC 59GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

5-47	22 October 1984	NONE	---
5-48	22 October 1984	NONE	---
5-49	22 October 1984	NONE	---
5-50	22 October 1984	NONE	---
5-51	22 October 1984	NONE	---
5-52	22 October 1984	NONE	---
5-53	22 October 1984	NONE	---
5-54	22 October 1984	NONE	---
5-55	22 October 1984	NONE	---
5-56	22 October 1984	NONE	---

2. MAKE PEN AND INK CHANGES TO THE FOLLOWING PAGES:

Page 1-41, under WEIGHT: Add "Part number: M27/77-01".

Page 2-1: Delete.

Page 3-12: Delete.

Page 3-15, TABLE I, M27/165-01, PRIMARY IMPEDANCE column: Delete "50 CT" and substitute "80 CT".

Page 3-22, TABLE I, M27/167-02, PRIMARY IMPEDANCE column, after 50: Add "200".

Page 3-22, TABLE I, M27/167-02, SECONDARY IMPEDANCE column, after 62500: Add "250 K".

Page 3-25, bottom drawing: Delete ".266 ±.031" and substitute ".260".

Pages 5-1 through 5-6: Delete.

Page 7-1, TABLE, CRYSTAL UNIT TYPE, CR-26A/U, FREQUENCY RANGE column: Delete "555" and substitute "500". Page 7-3, modify chart same.

Page 7-1, TABLE, CRYSTAL UNIT TYPE, CR-78A/U, FREQUENCY RANGE column: Delete "2.2" and substitute "2.0".

Page 7-5, FIGURE, HC-26/U: Delete "1.50 MIN" and substitute ".500 MIN".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

3. RETAIN THIS NOTICE AND INSERT BEFORE TABLE OF CONTENTS.

4. HOLDERS OF MIL-STD-242H(NAVY), PART 2, WILL VERIFY THAT PAGE CHANGES AND ADDITIONS INDICATED ABOVE HAVE BEEN ENTERED. THIS NOTICE PAGE WILL BE RETAINED AS A CHECK SHEET. THIS ISSUANCE, TOGETHER WITH APPENDED PAGES, IS A SEPARATE PUBLICATION. EACH NOTICE IS TO BE RETAINED BY STOCKING POINTS UNTIL THE MILITARY STANDARD IS COMPLETELY REVISED OR CANCELLED.

Review activity:
Navy - AS

User activities:
Navy - MC, OS, SH

Preparing activity:
Navy-EC

(Project No. 59GP-N050)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FOREWORD

This Military Standard Part provides equipment designers and manufacturers with a list of Crystals, Delay Lines, Coils, and Transformers having quality levels most acceptable in the design and construction of Military systems and equipments. It also will aid to control and minimize the life cycle cost, improve reliability of equipment and minimize logistic support. The criteria used in selecting parts are as follows:

1. Application need. Parts must satisfy the widest range of design requiring reliable parts.

2. Technological maturity. The design of the part must be final and must use proven materials and technologies. It must have been in production for a period sufficient to ensure that the design and process parameters have been identified and adequate quality controls have been developed.

3. Availability. The part must be in production by at least one manufacturer whose previous performance indicates ability to qualify to specifications of this standard. There must also be reasonable expectation that the part will not be obsolescent for at least seven years. Microcircuits are excluded from this requirement because of rapid technological changes.

4. Test or usage history. Sufficient test or usage data to predict part reliability must be available.

In the event of conflict between the technical description of standard parts in this standard and the applicable specification, the specification shall govern.

Technical information included in this standard was obtained from military specifications and standards; no warranty is made of data accuracy, or that inclusion of these parts will assure equipment/systems will meet performance requirements of any contracts. The contractor is responsible for conducting necessary tests and inspections of selected parts to ensure that contract requirements are met.

Review activities:
Navy - AS, SH, OS

User activity:
Navy - MC

Preparing activity:
Navy - EC

(Project Number 59GP-N031-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CRYSTALS, DELAY LINES, COILS, AND TRANSFORMERS

TABLE OF CONTENTS

SUBJECT/SECTION	PAGE
SECTION 1 TRANSFORMERS, POWER	
1 MIL-T-27	1-1 through 1-46
SECTION 2 TRANSFORMERS, PULSE, LOW POWER	
2 MIL-T-21038	2-1 through 2-3
SECTION 3 TRANSFORMERS, AUDIO FREQUENCY	
3 MIL-T-27	3-1 through 3-28
SECTION 4 INDUCTORS, AUDIO, POWER AND HIGH PULSE	
4 MIL-T-27	4-1 through 4-14
SECTION 5 COILS, RF	
5A MS STYLES, FIXED	5-1 through 5-21
5B M39010 STYLES, FIXED	5-22 through 5-32
5C MS STYLES, VARIABLE	5-33 through 5-36
5D MIL-C-15305	5-37 through 5-39
5E MIL-C-83446	5-40 through 5-56
SECTION 6 DELAY LINES	
6 MIL-D-23859	6-1 through 6-20
SECTION 7 CRYSTAL UNITS	
7 MIL-C-3098	7-1 through 7-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, POWER, MIL-T-27/77

REQUIREMENTS:

ELECTRICAL RATINGS:

PRIMARY CURRENT: .495 AMPERE

VOLT AMPERE: 56.9 VA

PRIMARY VOLTAGE (1-2): 115 VOLTS RMS, 400 Hz

SECONDARY VOLTAGE (3-4): 115 VOLTS RMS, 0.45 AMPERE RMS

ELECTRICAL CHARACTERISTICS:

NO LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2), CURRENT IN (1-2) SHALL NOT EXCEED 100 mA AND THE POWER IN (1-2) SHALL NOT EXCEED 5 WATTS.

VOLTAGE ACROSS (3-4): 123 VOLTS ±1 PERCENT


RATED LOAD: WITH 115 VOLTS, 400 Hz ACROSS (1-2), THE VOLTAGE ACROSS (3-4) SHALL BE 115 VOLTS ±3 PERCENT.


DC RESISTANCE:

(1-2): 6.5 OHMS ±20 PERCENT

(3-4): 8.7 OHMS ±20 PERCENT


WIEGHT: 7.7 OUNCES MAXIMUM.

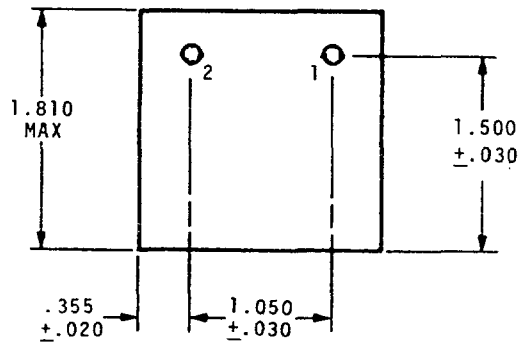

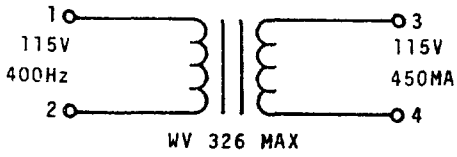

WV 326 MAX


CIRCUIT DIAGRAM

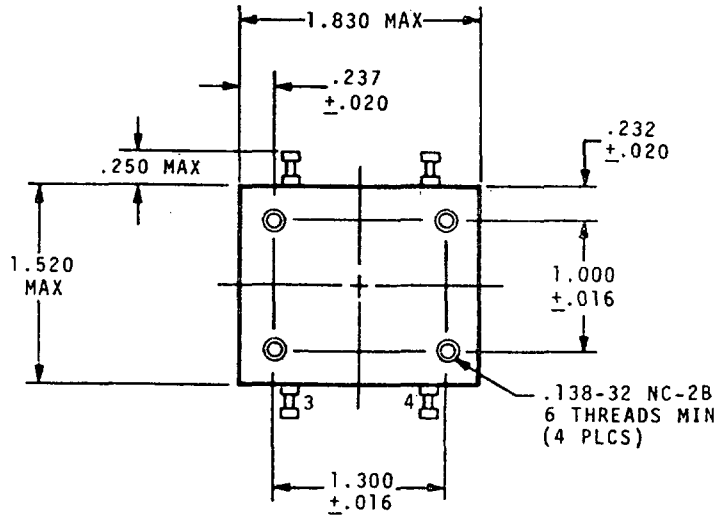



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER, ISOLATION, SHIELDED, TF4RO3YY

MIL-T-27/235

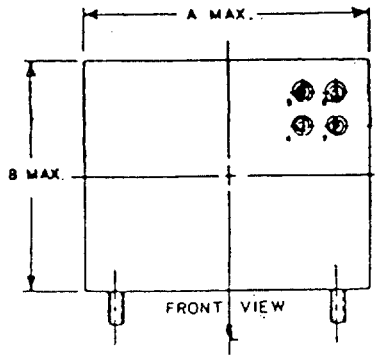

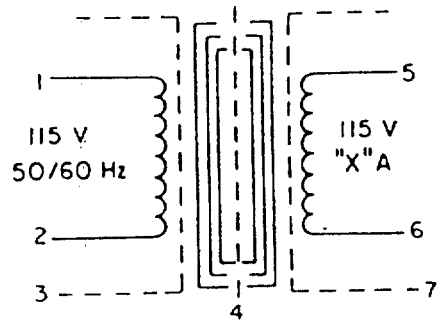

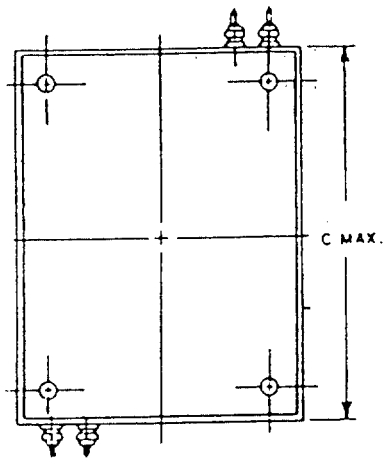

BOTTOM VIEW

Part numbers: M27/235-01, -04, -05


REQUIREMENTS:

Electrical ratings: See TABLE I.
Primary voltage: 115 volts RMS, 50/60 Hz (1-2, 5-6)
Electrical characteristics:
No load: See TABLE I.
Rated load: 115 volts
Electrostatic shielding: Voltage ratio greater than 100:1 at 20 KHz.
Polarity: Additive with terminals 2 and 6 connected.
Maximum operating temperature: 105°C
Working voltage: 175 volts

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER, ISOLATION, SHIELDED, TF4RO3YY

MIL-T-27/235

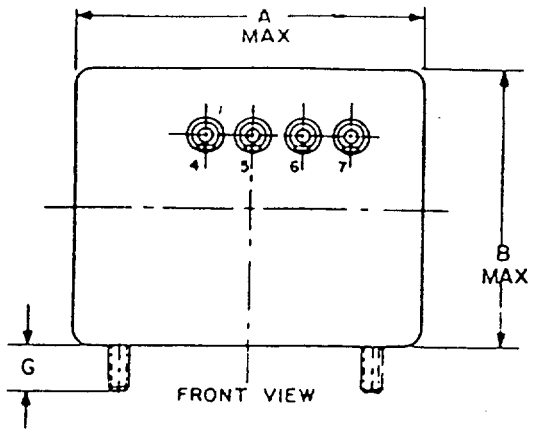

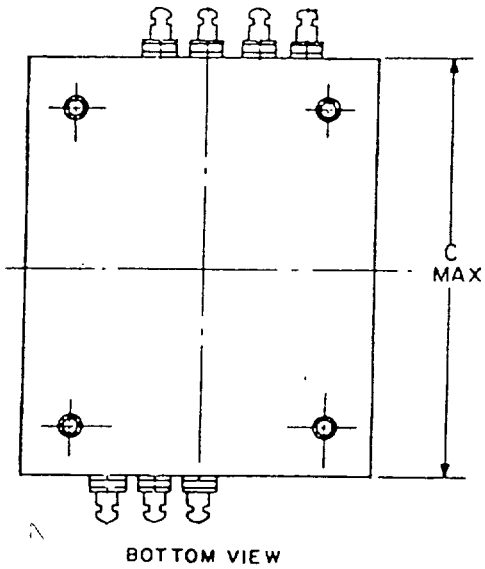



TABLE I. Electrical characteristics.


PART NO. M27/235-	SECONDARY CURRENT	VA RATING	NO LOAD PRIMARY		DC RESISTANCE		DIMENSIONS (MAX)		
			CURRENT mA	POWER WATTS	PRIMARY OHMS	SECONDARY OHMS	A	B	C
01	3.5	400	400	10	.35	.38	6.531	5.531	8.000
02	.435	50	150	2.5	11	13	4.032	3.032	4.032
03	1.04	120	300	5	2.1	3	5.344	3.500	5.000
04	1.4	160	300	5.5	1.5	1.65	5.531	4.531	5.531
05	8.7	1000	1000	13.5	.116	.155	7.500	7.500	9.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER, STEP-DOWN, TF4S03AJ

MIL-T-27/156

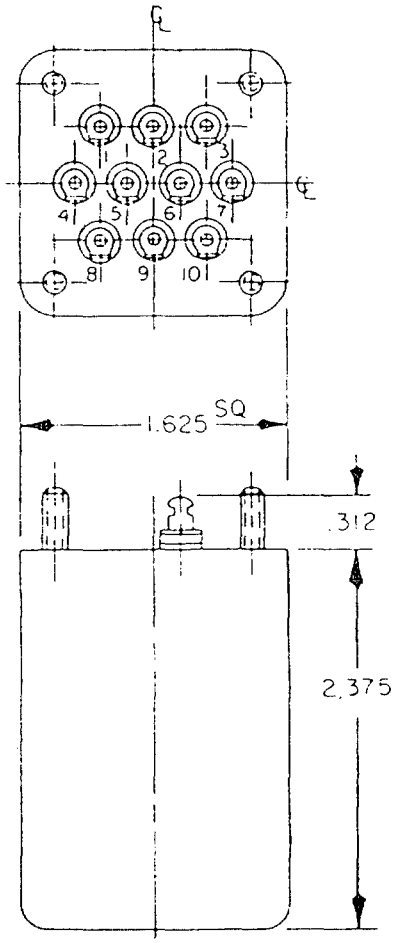

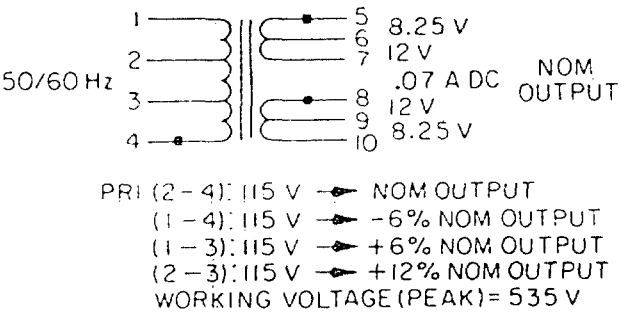

Part number: M27/156-01

REQUIREMENTS:


Electrical ratings:
- Primary voltage: 115 volts, 50/60 Hz
- Secondary voltage: 8.25 through 13.44 volts
- Primary current: .120 amps RMS MAX
- Secondary current: .105 amps RMS MAX
- Voltage ampere: 4.8
- Working voltage: 535 volts

Electrical characteristics:
- No load: 115 volts, 60 Hz, .120 amps, 1.2 watts (2-4)
- Voltage across: (5-7) and (8-10): 24.86 volts
- Rated load: with 115 volts, 60 Hz across (2-4), the voltage across (5-7), and (8-10) shall be 20.25 volts, .105 amps RMS.
- Polarity: Additive with 1 and 5, 7 and 8 connected.
- DC resistance: (1-4): 200 ohms MAX; (8-10): 27 ohms MAX; (5-7): 24 ohms MAX
- Maximum operating temperature: 130°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER, STEPDOWN, TF4R03


MIL-T-27/300

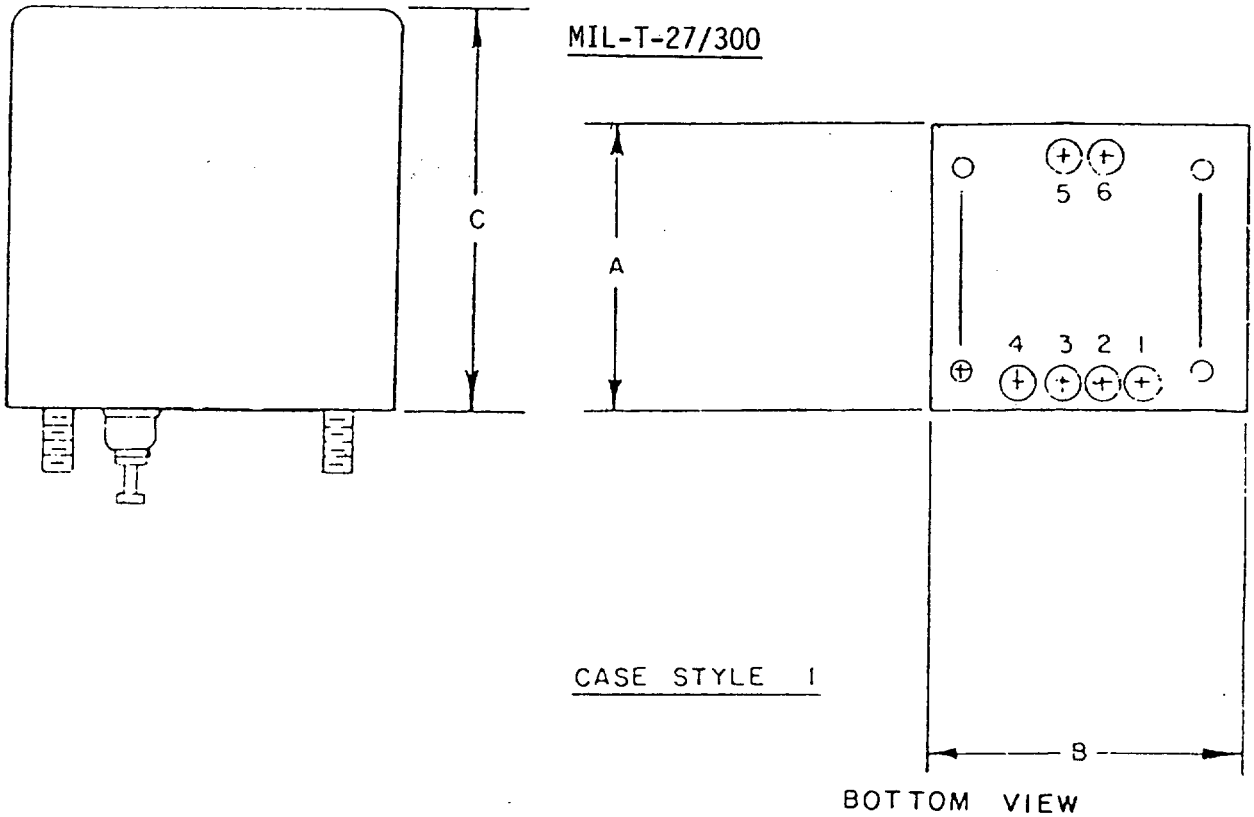


CASE STYLE 1

BOTTOM VIEW

Part numbers: M27/300-01, -04, -07.

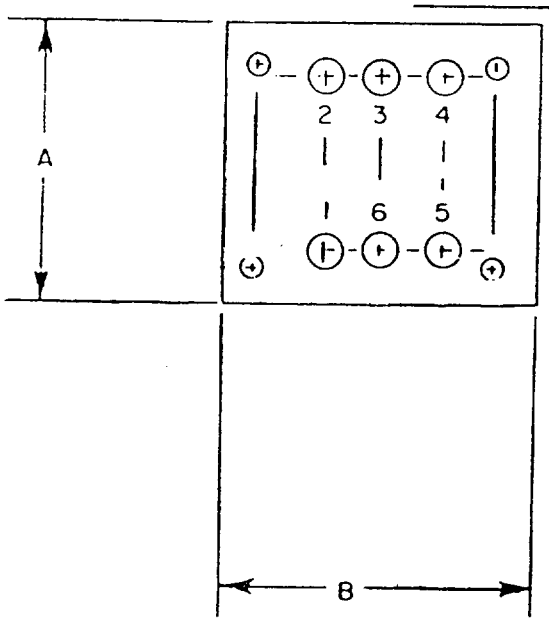

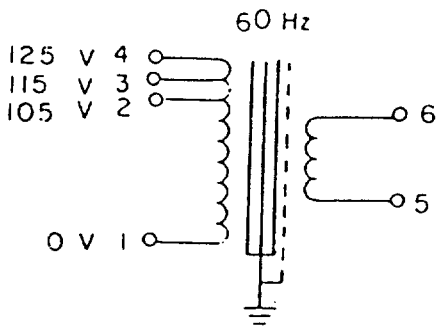

CASE STYLE 2

BOTTOM VIEW

Part numbers: M27/300-02, -03, -05, -06, -08, -09, and -10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, POWER, STEPDOWN, TF4R03

MIL-T-27/300

REQUIREMENTS:

Electrical ratings: See TABLE I.
Primary voltage: 60 Hz, (1-2): 105 volts; (1-3): 115 volts; (1-4): 125 volts
Primary working voltage: 175 volts MAX
Electrical characteristics:
No load: 115 volts, 60 Hz
Rated load: 115 volts, 60 Hz See TABLE I.
Electrostatic shielding: Voltage ratio minimum of 5:1 at 20 KHz.
Polarity: Additive with terminals 4 and 5 connected.
Maximum operating temperature: 105°C

TABLE I. Electrical characteristics.

PART NO. M27/300-	Type TF4R03	SECONDARY		NO LOAD PRIMARY MAX		DIMENSIONS (MAX)		
		CURRENT AMPS	VOLTAGE VOLTS	CURRENT mA	POWER WATTS	A	B	C
01	EB	3	2.5	.06	.85	1.812	1.938	2.438
02	GB	10	2.5	.12	1.60	2.375	2.750	2.812
03	JB	10	2.5	.11	3.60	3.062	3.562	3.875
04	FB	3	5.0	.11	1.40	2.062	2.312	2.500
05	HB	10	5.0	.19	2.90	2.625	3.062	3.188
06	KB	10	5.0	.25	5.70	3.375	3.938	4.312
07	FB	2	6.3	.11	1.40	2.062	2.312	2.500
08	GB	5	6.3	.15	2.00	2.375	2.750	2.812
09	JB	10	6.3	.35	5.50	3.062	3.562	3.875
10	KB	20	6.3	.50	5.50	3.375	3.938	4.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/103


TABLE II: ELECTRICAL CHARACTERISTICS


M PART NUMBER	FREQUENCY RESPONSE: ±3 dB AT 400 Hz TO 100 KHz AND 1 mW		RESONANCE, SECOND RESONANT FREQUENCY KHz MIN	POLARITY: ADDITIVE WITH TERMINALS (BELOW) CONNECTED
	Z_S OHMS	Z_L OHMS		
M27/103-01	10,000 CT (1-3)	10,000 CT (4-6)	750	3 AND 4
-02	20,000 CT (1-3)	800 CT (4-6)	500	3 AND 4
-03	10,000 CT (1-3)	2,000 CT (4-7)	750	(3-4) AND (5-6)
-04	10,000 CT (1-3)	2,000 CT (4-6_	750	3 AND 4
-05	10,000 CT (1-3)	1,200 CT (4-6)	750	3 AND 4
-06	10,000 CT (1-3)	500 CT (4-6)	750	3 AND 4
-07	2,000 CT (1-3)	8,000 CT (4-7)	750	(3-4) AND (5-6)
-08	1,500 CT (1-3)	600 CT (4-6)	750	3 AND 4
-09	1,000 CT (1-3)	50 CT (4-6)	750	3 AND 4
-10	500 CT (1-3)	600 CT (4-6)	750	3 AND 4
-11	500 CT (1-3)	50 CT (4-6)	750	3 AND 4
-12	400 CT (1-3)	400 (4-7)	1,000	(3-4) AND (5-6)
-13	400 CT (1-3)	40 (4-7)	750	(3-4) AND (5-6)
-14	300 CT (1-3)	600 CT (4-6)	750	3 AND 4
M27/103-15	80 CT (1-3)	32 (4-7)	750	(3-4) AND (5-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY, SUB-MINIATURE, TF5R21ZZ

MIL-T-27/172

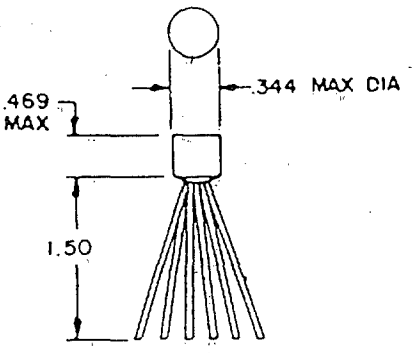

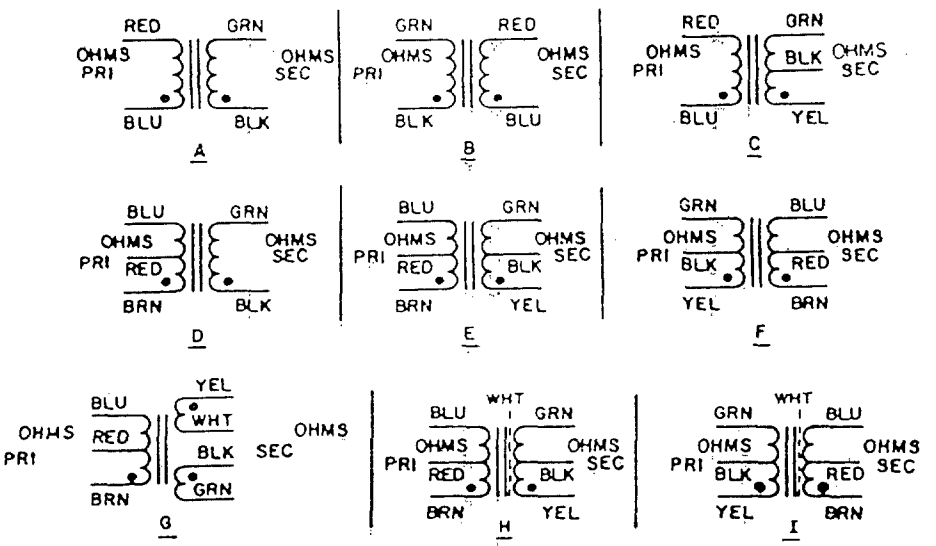

REQUIREMENTS:

Electrical ratings: See TABLE I.
Frequency range: 300 Hz to 100 KHz
Electrical characteristics:
No load: (center tap unbalance) ±1 percent at 1 volt, 5 KHz across primary
Harmonic distortion: 5 percent MAX at power level and primary DC current at 1-100 KHz
Insertion loss: 3.0 dB MAX at 1 KHz and power level
Frequency response: ±3 dB at 300 Hz to 100 KHz and 1 mW
Maximum operating temperature: 105°C

Supersedes Page 3-10 of 17 August 1981.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY, SUB-MINIATURE, TF5R21ZZ

MIL-T-27/172

TABLE I. Electrical characteristics.

PART NO. M27/172-	CIRCUIT DIAGRAM	IMPEDANCE (OHMS) AND COLOR CODE * PRIMARY	IMPEDANCE (OHMS) AND COLOR CODE * SECONDARY	PRIMARY DC CURRENT mA	POWER LEVEL @ 1KHz MAX mW	DC RESISTANCE (OHMS) PRIMARY	DC RESISTANCE (OHMS) SECONDARY
01	G	80CT A	32SP B	12	600	9.8	6
		100CT A	40SP B	10			
05	D	300CT A	600 D	7	600	19	89
07	G	400CT A	40SP B	8	500	46	8
		500CT A	50SP B	6			
09	G	400CT A	40SP B	8	600	46	74
		500CT A	50SP B	6			
10	E	400CT A	4000CT B	8	600	46	550
		500CT A	5000CT B	6			
11	A	500 C	50 D	3	600	60	8
		600 C	60 D				
12	D	500CT A	600 D	5.5	600	31	90
18	D	900CT A	600 D	4	600	53	89
19	A	1000 C	50 D	3	600	115	8
		1200 C	60 D				
23	A	1200 C	3.2 D	2	600	105	.58
25	D	1500CT C	600 D	3	600	86	89
27	G	2000CT C	2000SP B	3	600	195	125
		2500CT C	2500SP B				
28	G	2000CT C	2800SP B	3	125	195	455
		2500CT C	10000SP B				
32	C	10000 C	500CT B	1	125	780	50
		12000 C	600CT B				
33	C	10000 C	1200CT B	1	125	780	115
		12500 C	1500CT B				
34	E	10000CT A	1500CT B	1	125	780	126
		12000CT A	1800CT B				
35	G	10000CT A	2000CT B	1	125	560	230
		12000CT A	2400CT B				
37	E	10000CT A	10000CT B	1	125	975	1175
		12000CT A	12000CT B				
38	A	20000 C	800 D	.5	60	830	115
		30000 C	1200 D				
39	E	20000CT A	800CT B	.5	60	830	115
		30000CT A	12000CT B				
45	E	600CT A	600CT B	4	600	47	47

* A - BROWN-BLUE B - YELLOW-GREEN C - BLUE-RED D - BLACK-GREEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/144

TABLE II: ELECTRICAL CHARACTERISTICS

M PART NUMBER	FREQUENCY RESPONSE: ±1 dB AT 400 Hz TO 100 KHz AND 1 mW		RESONANCE, SECOND RESONANT FREQUENCY KHz MIN	POLARITY: ADDITIVE WITH TERMINALS (BELOW) CONNECTED
	Z_S OHMS	Z_L OHMS		
M27/144-01	80 CT (BRN-BLU)	32 (YEL-GRN)	750	BLU AND YEL, AND WHT AND BLK
-02	300 CT (BRN-BLU)	600 (BLK-GRN)	750	BLU AND BLK
-03	400 CT (BRN-BLU)	40 (YEL-GRN)	750	BLU AND YEL, AND WHT AND BLK
-04	400 CT (BRN-BLU)	400 (YEL-GRN)	1,000	BLU AND YEL, AND WHT AND BLK
-05	400 CT (BRN-BLU)	4,000 CT (YEL-GRN)	750	BLU AND YEL
-06	500 (BLU-RED)	50 (BLK-GRN)		RED AND BLK
-07	500 CT (BRN-BLU)	600 (BLK-GRN)		BLU AND BLK
-08	600 CT (BRN-BLU)	600 CT (YEL-GRN)		BLU AND YEL
-09	900 CT (BRN-BLU)	600 (BLK-GRN)		BLU AND YEL
-10	1,000 (BLU-RED)	50 (BLK-GRN)		RED AND BLK
-11	1,200 (BLU-RED)	3.2 (BLK-GRN)		RED AND BLK
-12	1,500 CT (BRN-BLU)	600 (BLK-GRN)		BLU AND BLK
-13	2,000 CT (BRN-BLU)	2,000 (YEL-GRN)		BLU AND YEL, AND WHT AND BLK
-14	2,000 CT (BRN-BLU)	8,000 (YEL-GRN)		BLU AND YEL, AND WHT AND BLK
-15	10,000 (BLU-RED)	500 (YEL-GRN)		RED AND YEL
-16	10,000 (BLU-RED)	1,200 (YEL-GRN)		RED AND YEL
-17	10,000 CT (BRN-BLU)	1,500 (YEL-GRN)		BLU AND YEL
-18	10,000 CT (BRN-BLU)	2,000 (YEL-GRN)		BLU AND YEL, AND WHT AND BLK
-19	10,000 (BLU-RED)	2,000 (YEL-GRN)		RED AND YEL
-20	10,000 CT (BRN-BLU)	10,000 CT (YEL-GRN)	750	BLU AND YEL
-21	20,000 (BLU-RED)	800 (BLK-GRN)	500	RED AND BLK
M27/144-22	20,000 CT (BRN-BLU)	800 (YEL-GRN)	500	BLU AND YEL

TABLE III: SUPERSESSION DATA

SUPERSEDING MILITARY PART NUMBER	SUPERSEDED MS PART NUMBER
M27/144-01	MS53225-1
-03	MS21416-1
-04	MS21417-1
-13	MS53226-1
-14	MS21418-1
M27/144-18	MS21420-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/165

REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I


ELECTRICAL CHARACTERISTICS: SEE TABLE II

RESONANCE:

SECOND RESONANT FREQUENCY: 20 KHz MINIMUM

INSERTION LOSS: 3 dB MAXIMUM AT 1 KHz


WEIGHT: 1.0 OUNCE, MAXIMUM.

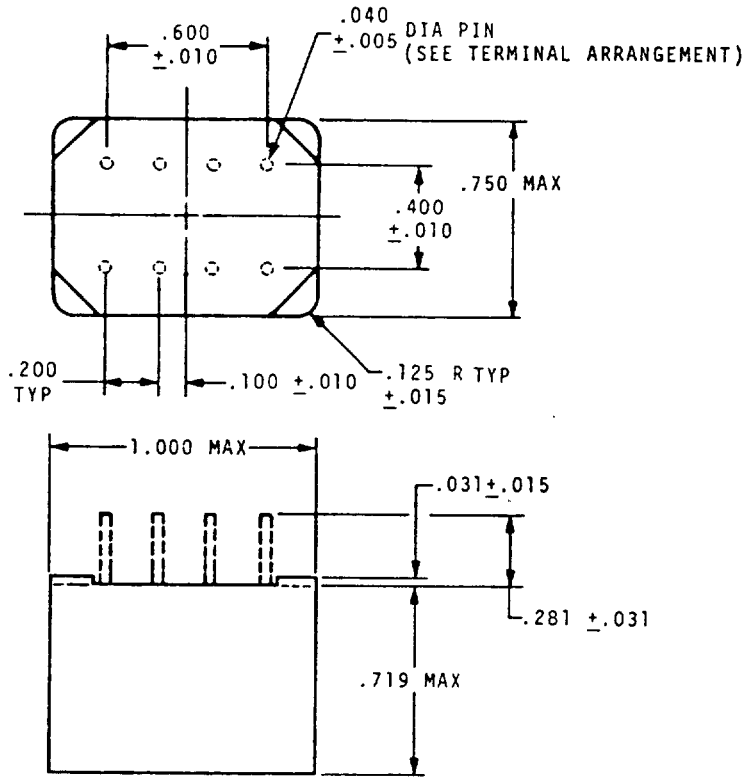


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY


MIL-T-27/165




1.




2.




3.




4.




5.



6.




7.




8.


CIRCUIT DIAGRAM




A.




B.



C.



D.




E.

PIN ARRANGEMENT


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY, TF5R21ZZ

MIL-T-27/167

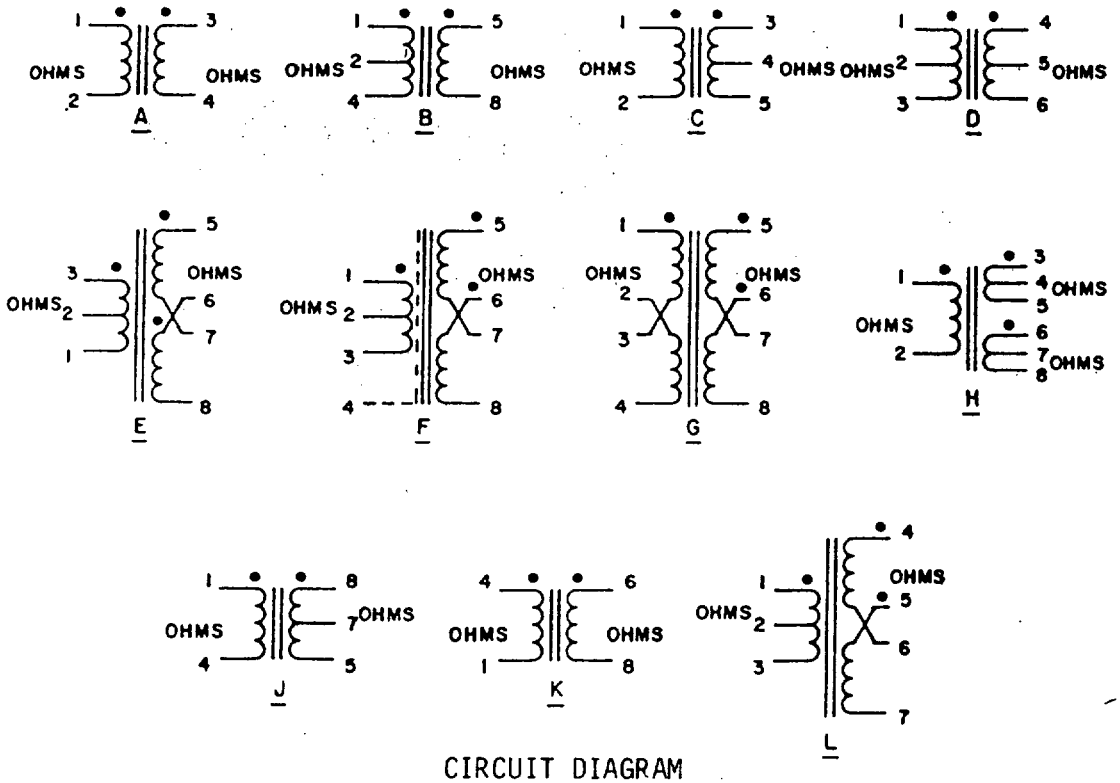

CIRCUIT DIAGRAM

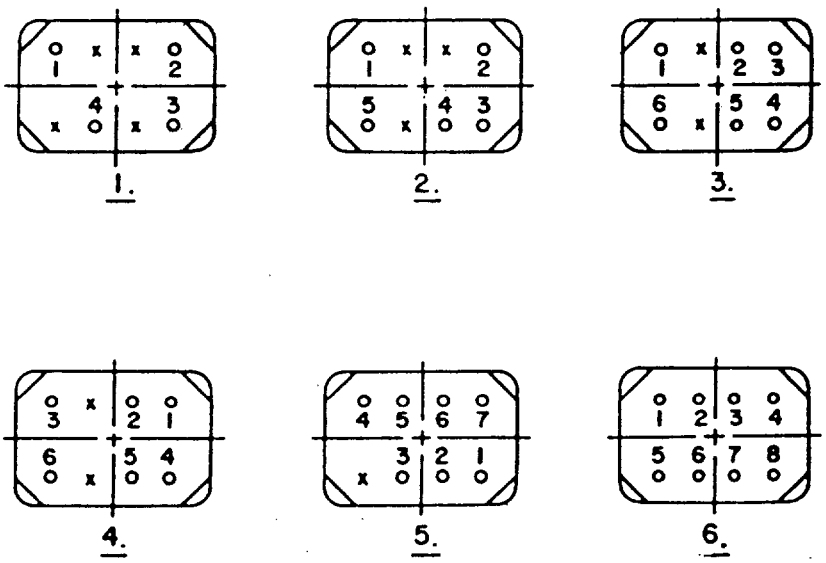

PIN ARRANGEMENT

Supersedes Page 3-21 of 17 August 1981

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MIL-T-27/167

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	PRIMARY IMPEDANCE OHMS 2/	SECONDARY IMPEDANCE OHMS 2/	PRIMARY DCR ±25% OHMS	SECONDARY DCR ±25% OHMS	POWER LEVEL mW	PRIMARY DC CURRENT mA	TERMINAL ARRANGEMENT	CIRCUIT DIAGRAM
M27/167-01	10,000 25,000	200 500	2,500	34	100	3 1.5	1	A
-02	50	62,500	13.5	3,600	5	0	6	K
-03	100 SPLIT	100 SPLIT	5.9	6.9	100	10		G
-04	500 SPLIT 600 SPLIT	12.8 SPLIT 16 SPLIT	36.2	1.5	100	8		G
-05	500 600	50 60	50	5	100	3.5		K
-06	500 SPLIT 600 SPLIT	50 SPLIT 60 SPLIT	36	6.5	100	3.5		G
-07	500 CT	600 CT	26	70	100	10		D
-08	500 SPLIT	600 SPLIT	30	42	100	10		G
-09 1/	600 CT	600 SPLIT	29	42	100	10		F
-10	600 SPLIT	2,000 SPLIT	40	113	100	5		G
-11	600	600 CT AND 600 CT	50	50 AND 50	25	5		H
-12 1/	600 SPLIT	8,000 CT	55	484	50	3.2		F
-13	800 SPLIT 1,200 SPLIT	20,000 SPLIT 30,000 SPLIT	110	800	50	3		G
-14	1,000 1,200	50 60	5	90	100	6		K
-15	1,000 SPLIT 1,200 SPLIT	200 SPLIT 240 SPLIT	102	19	100	3		G
-16	1,200 1,500	3.2 4.0	70	0.45	100	7	6	K
-17	1,500 CT	600 CT	70	65	100	2.5	3	D
-18	4,000 CT	600 SPLIT	15.5	47	100	2.6	5	L
-19	4,000 SPLIT 5,000 SPLIT	12.8 SPLIT 16 SPLIT	327	1.5	100	2	6	G
-20	10,000	3.2	800	0.65	100	2		K
-21	8,000 SPLIT 10,000 SPLIT	12.8 SPLIT 16 SPLIT	600	1.5	100	2		G
-22	10,000	16	800	2.7	100	4		K
-23	10,000 CT 12,000 CT	3.2 4.0	770	0.73	100	3 1.5		B
-24	10,000 SPLIT 25,000 SPLIT	200 SPLIT 500 SPLIT	2,500	34	100	2 1	6	G
-25	10,000 CT 25,000 CT	200 CT 500 CT	560	22	100	2	3	D
-26	10,000 12,000	500 CT 600 CT	800	95	100	4	6	J
M27/167-27	10,000 SPLIT 12,000 SPLIT	500 SPLIT 600 SPLIT	800	95	100	4	6	G

1/ ELECTROSTATIC SHIELD, SHIELD RATIO 5:1 MINIMUM AT 20 KHz.

2/ IMPEDANCE VALUES WRITTEN ONE ABOVE THE OTHER INDICATE A RANGE OF MATCHING IMPEDANCES OVER WHICH THE PARTS WILL GIVE SATISFACTORY PERFORMANCE AS LONG AS THE IMPEDANCE RATIO IS MAINTAINED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MICRO-MINIATURE, MIL-T-27/173

REQUIREMENTS:

ELECTRICAL RATINGS: SEE TABLE I

FREQUENCY RANGE: 300 Hz TO 250 KHz

PRIMARY DC CURRENT (1-5): 0 AMPERE


ELECTRICAL CHARACTERISTICS: SEE TABLE II

NO LOAD (CENTER-TAP VOLTAGE UNBALANCE ONLY): AT THE SPECIFIED POTENTIAL (SEE TABLE II), THE VOLTAGE SHALL BE A MAXIMUM OF 1 PERCENT.

INSERTION LOSS: AT THE SPECIFIED POWER LEVEL (SEE TABLE I), THE INSERTION LOSS SHALL BE A MAXIMUM OF 4 dB.

HARMONIC DISTORTION: TOTAL HARMONIC CONTENT OF THE OUTPUT SHALL BE A MAXIMUM OF 5 PERCENT AT THE SPECIFIED POWER LEVEL AND 1 KHz (SEE TABLE I).


WEIGHT: 1.50 GRAMS MAXIMUM

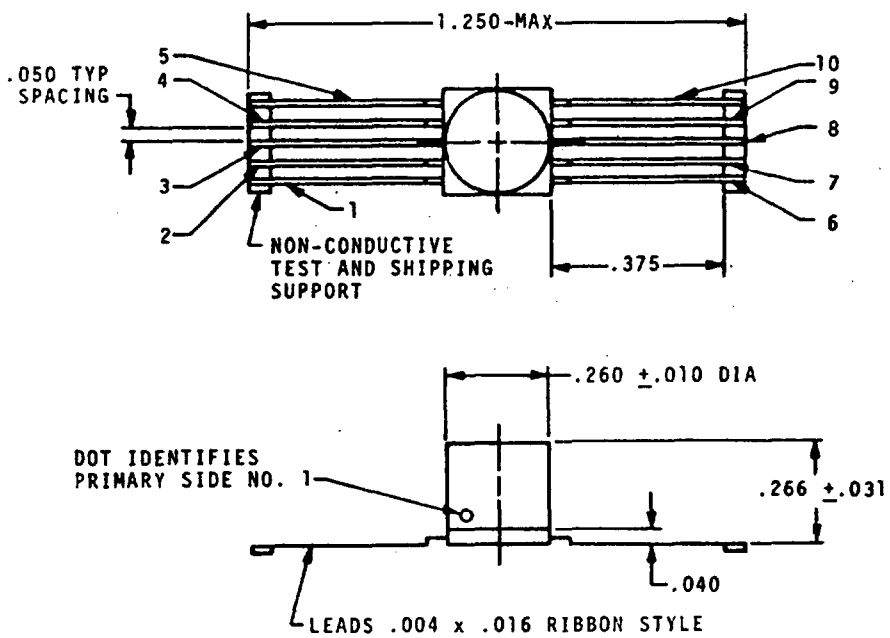

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMER, AUDIO FREQUENCY, MICRO-MINIATURE,

MIL-T-27/173

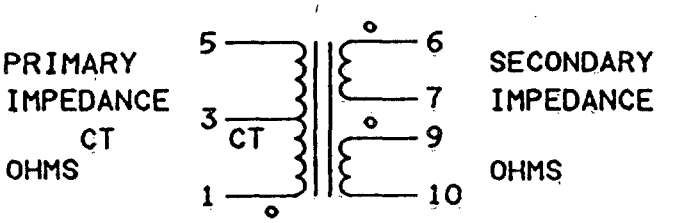

CIRCUIT DIAGRAM

TABLE I. Electrical ratings.

PART NUMBER	PRIMARY IMPEDANCE (1-5) OHMS CT	SECONDARY IMPEDANCE (6-10) OHMS	PRIMARY DCR (1-5) OHMS ±25%	PRIMARY POWER LEVEL AT 1 KHz (MAX)	SECONDARY DCR (6-10) OHMS ±25%
M27/173-01	25,000	1000/250 SPLIT	2,400	40 mW	78
M27/173-02	1,500	600/150 SPLIT	150	75 mW	65


TABLE II. Electrical characteristics.


PART NUMBER	NO LOAD (CENTER-TAP VOLTAGE UNBALANCE ONLY) POTENTIAL (1-5)	FREQUENCY RESPONSE AT 300 Hz TO 250 KHz, ±3 dB			RESONANCE: SECOND RESONANT FREQUENCY KHz MIN
		Z_S (1-5) OHMS	Z_L (6-10) OHMS	E_S VOLTS	
M27/173-01	5.0 V AT 5 KHz	25 K	1,000	10.0	250
M27/173-02	1.0 V AT 5 KHz	1.5 K	600	3.2	600


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY, TF5S21ZZ


MIL-T-27/247





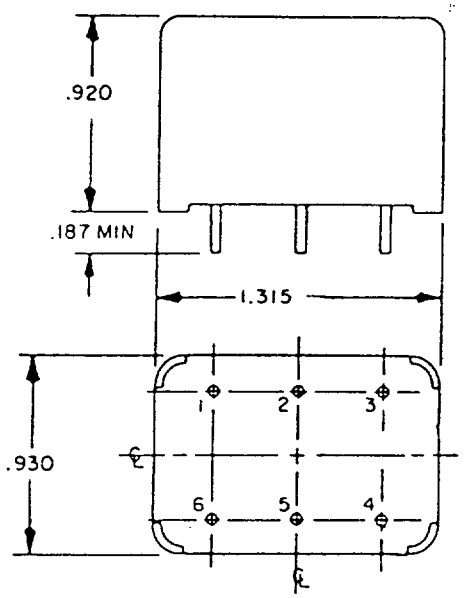

WORKING VOLTAGE: 175 V



CIRCUIT DIAGRAM B for part numbers M27/247-05 and -11.

Requirements:

Electrical ratings:
- Primary voltage: 500 volts RMS, 200 Hz
- Frequency range: 200 Hz to 10 KHz
- Power level: 2 watts, MAX at 200 Hz

Electrical characteristics:
- Polarity: Additive with 1 and 4 connected.
- Maximum operating temperature: 130°C


TABLE I. Electrical ratings.


PART NO. M27/247-	IMPEDANCE (OHMS) PRIMARY (1-3)	IMPEDANCE (OHMS) SECONDARY (4-6)	DCR (OHMS) PRIMARY (1-3)	DCR (OHMS) SECONDARY (4-6)	PRIMARY DC CURRENT (1-3) mA
02	10.0 KCT	10.0 KCT	700	1000.00	0.75
03	10.0 KCT	1.5 KCT	700	150.00	0.75
04	10.0 KCT	600.0 CT	700	60.00	0.75
05	10.0 KCT	3.2	700	0.37	0.75
06	1.5 KCT	600.0 CT	105	60.00	2.00
07	1.0 KCT	600.0 CT	69	60.00	2.25
08	600.0 CT	600.0 CT	43	60.00	3.00
09	600.0 CT	250.0 CT	43	24.00	3.00
10	600.0 CT	150.0 CT	43	15.00	3.00
11	600.0 CT	3.2	43	0.37	3.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO FREQUENCY, TF4S21AJ

MIL-T-27/307

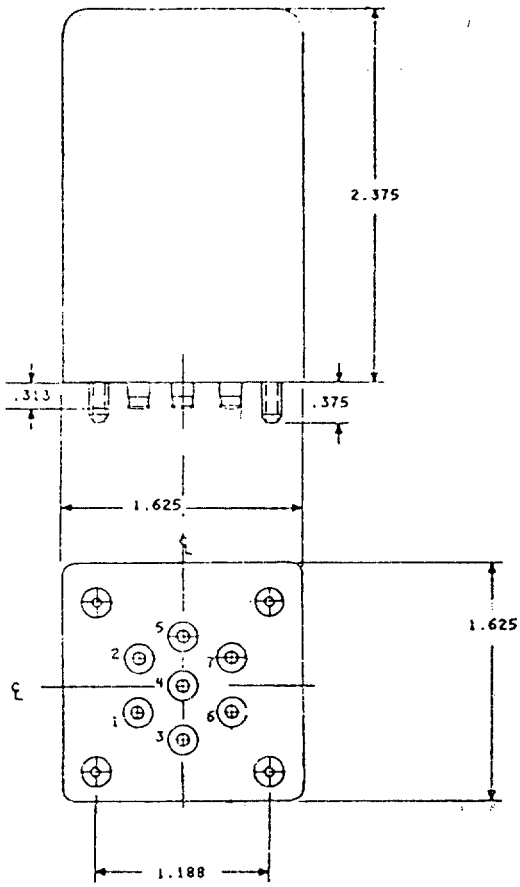



Part number: M27/307-01.

REQUIREMENTS:

Electrical ratings:
- Working voltage: 357 volts MAX
- Power level: 7 mW
- Frequency range: 300 Hz to 4 KHz
- Primary impedance: 600 ohms split
- Secondary impedance: 600 ohms
- DC resistance: (1-2) (3-4): 23 ohms; (6-7): 47 ohms

Electrical characteristics:
- Harmonic distortion: Not more than .5 percent at 7 dBm at 1 KHz
- Frequency response: 300 Hz to 4 KHz, flat within ±0.3 dB
- Insertion loss: 5 dB with 1 volt RMS at 1 KHz across (3-5) with (3-4) and (1-2) connected in series.
- Polarity: Additive with 1 and 4, 2 and 6 connected.
- Maximum operating temperature: 85°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INDUCTOR
(AUDIO, POWER AND HIGH-POWER PULSE),
MIL-T-27/205

TABLE I: ELECTRICAL RATINGS

M PART NUMBER	INDUCTANCE (1-2) H ±1% 1/	DC CURRENT (1-2) mA, MAX 2/	DC RESISTANCE (1-2) OHMS ±20%	QUALITY FACTOR AT 1.0 V MIN	TEMPERATURE STABILITY -55°C TO +105°C	WORKING VOLTAGE PEAK V	TEST VOLTAGE (1-2)
M27/205-01	0.007	250	0.6	115 AT 5 KHz	±1%	350	1.0 V AT 1 KHz
-02	0.012	200	1.1	120			
-03	0.020	150	1.6	125			
-04	0.030	125	2.5	130			
-05	0.050	100	3.9	135			
-06	0.070	80	5.7	145			
-07	0.120	60	9.1	145 AT 5 KHz			
-08	0.2	50	16	120 AT 3 KHz			
-09	0.3	40	25	118			
-10	0.5	30	39	110			
-11	0.7	25	58	105			
-12	1.0	20	84	105			
-13	1.5	17	130	95			
-14	2.5	13	215	85 AT 3 KHz			1.0 V AT 1 KHz
-15	4.0	10	335	50 AT 1 KHz			1.0 V AT 500 Hz
-16	6.0	9	510	45			
-17	10	7	840	45			
-18	15	5	1,350	42			
-19	22	4	1,960	40			
M27/205-20	35	3	3,200	40	±1%	350	1.0 V AT 500 Hz

1/ THE INDUCTANCE IS MEASURED WITH 0 ADC APPLIED TO (1-2) AND AT THE SPECIFIED TEST VOLTAGE ACROSS (1-2).


2/ THE AMOUNT OF DC CURRENT THAT WILL REDUCE THE INDUCTANCE A MAXIMUM OF 8 PERCENT.

3. WHEN NUMBERS IN PARENTHESES, I.E., (1-2) ARE USED; THEY INDICATE THE WINDING AND THE EXTREME TERMINALS OF THE WINDING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO, POWER AND HIGH-POWER PULSE, INDUCTOR, TF5SO4ZZ

MIL-T-27/303

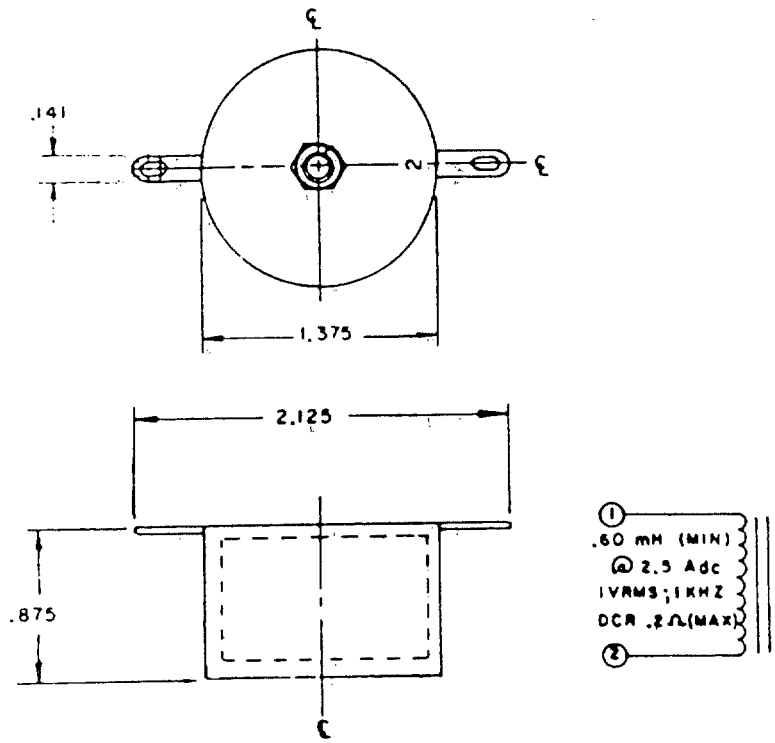

Part number: M27/303-01.

REQUIREMENTS:


Electrical ratings:
- Working voltage: 1.414 volts MAX
- DC current: 2.5 amps
- Voltage: 1.0 volt RMS, 1 KHz

Electrical characteristics:
- Inductance: 0.60 MH, MIN
- DC resistance: (1-2): 0.2 ohm, MAX
- Maximum operating temperature: 130°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO, POWER AND HIGH-POWER PULSE, INDUCTOR, TF5S04ZZ

MIL-T-27/304

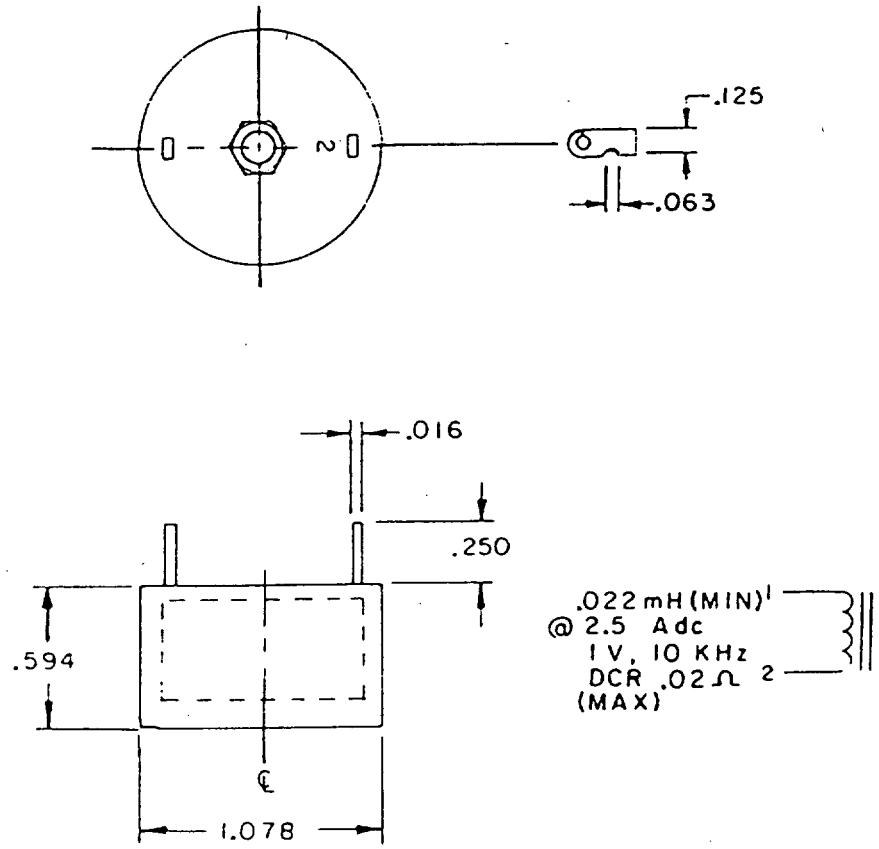

Part number: M27/304-01.

REQUIREMENTS:


Electrical ratings:
- Working voltage: 1.41 volts MAX
- DC current: 2.5 amps
- Voltage: 1.0 volt RMS, 10 KHz

Electrical characteristics:
- Inductance: 0.022 MH, MIN
- DC resistance: (1-2): 0.2 ohm, MAX
- Maximum operating temperature: 130°C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TRANSFORMERS, AUDIO, POWER AND HIGH-POWER PULSE, INDUCTOR, TF5SO4ZZ

MIL-T-27/305

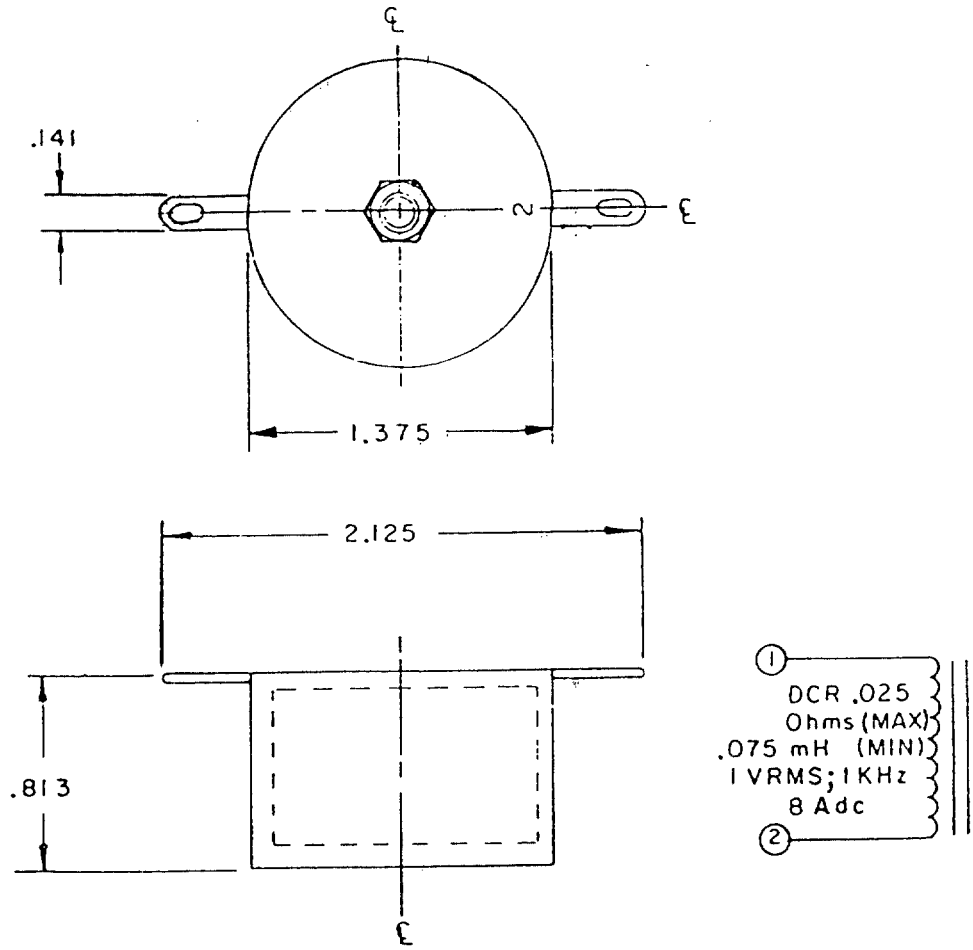

Part number: M27/305-01.

REQUIREMENTS:

Electrical ratings:
- Working voltage: 1.414 volts MAX
- DC current: 8.0 amps
- Voltage: 1.0 volt RMS, 1 KHz

Electrical characteristics:
- Inductance: 0.075 MH, MIN
- DC resistance: (1-2): 0.025 ohm, MAX
- Maximum operating temperature: 130°C


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, FIXED OR VARIABLE, RADIO FREQUENCY

MIL-C-15305

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR RADIO FREQUENCY COILS, FIXED OR VARIABLE, INTENDED FOR USE AS SIMPLE INDUCTIVE ELEMENTS IN RADIO FREQUENCY CIRCUITS.


Part number example: MS53229-1

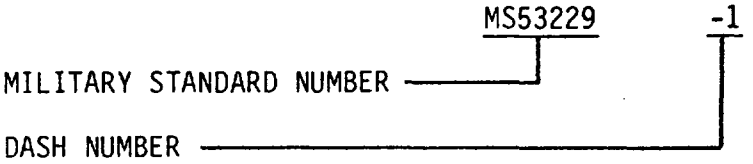

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RADIO FREQUENCY, ENCAPSULATED, VARIABLE, MICRO-MINIATURE, (IRON CORE) TYPES LT11V001 THRU LT11V021

MS53229

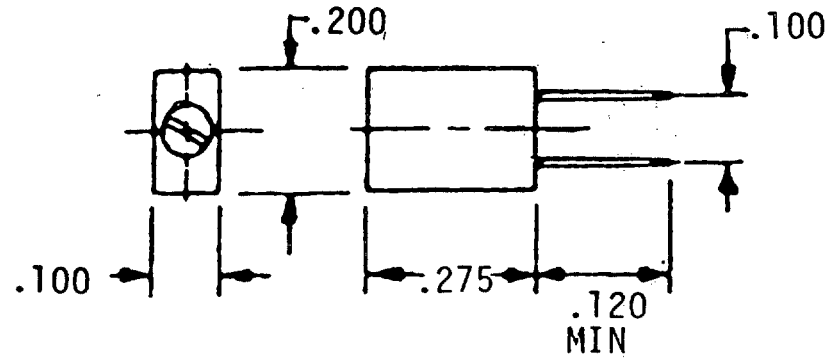

Operating temperature:	-55° to +105°C
Ambient temperature:	90°C
Temperature rise:	15°C
Altitude:	70,000 feet
Dielectric withstanding voltage:	1000 volts RMS MIN (sea level) 200 volts RMS (reduced barometric pressure)
Terminal pull:	2 LBS MIN
Grade and class:	2, A


TABLE I. Electrical characteristics.

PART NO. MS53229-	TYPE DESIG-NATION	INDUCTANCE µH		Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	DC CURRENT MAX mA
		MAX	MIN					
1	LT11V001	.025	.020	50	200	1000	.02	250
2	LT11V002	.051	.035	40	100	700	.03	250
3	LT11V003	.076	.055	40	100	615	.10	250
4	LT11V004	.10	.07	30	25	500	.3	250
5	LT11V005	.15	.11	30	25	420	.35	200
6	LT11V006	.22	.16	30	25	400	.4	180
7	LT11V007	.27	.19	30	25	400	.5	180
8	LT11V008	.33	.24	30	25	320	.6	140
9	LT11V009	.47	.34	30	25	290	.65	100
10	LT11V010	.56	.40	30	25	250	.75	100
11	LT11V011	.68	.50	30	25	240	.85	100
12	LT11V012	.82	.59	30	25	180	.9	100
13	LT11V013	1.00	.50	25	7.9	140	1.2	125
14	LT11V014	1.5	1.0	25	7.9	135	1.6	100
15	LT11V015	2.2	1.2	25	7.9	100	2.0	80
16	LT11V016	2.7	1.95	25	7.9	60	2.2	75
17	LT11V017	3.3	2.2	25	7.9	60	2.5	65
18	LT11V018	4.7	2.5	25	7.9	50	2.6	60
19	LT11V019	5.8	2.9	25	7.9	38	2.8	58
20	LT11V020	6.8	3.4	25	7.9	30	3.0	55
21	LT11V021	8.2	4.6	25	7.9	20	3.0	50

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, RADIO FREQUENCY, ENCAPSULATED, VARIABLE, MICRO-MINIATURE, (FERRITE CORE)
TYPES LT11V022 THRU LT11V038

MS53230

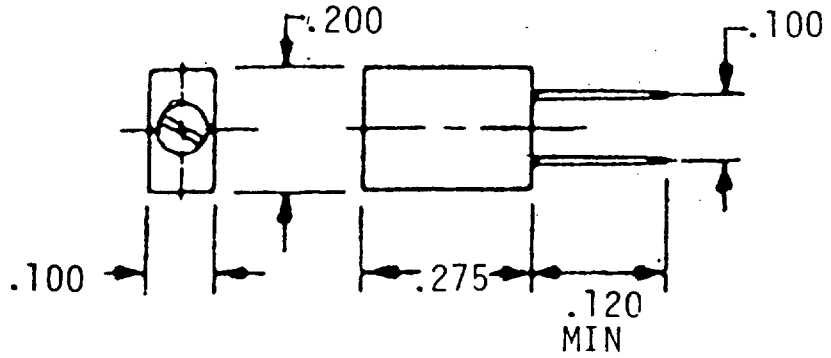

Operating temperature:	-55° to +105°C
Ambient temperature:	90°C
Temperature rise:	15°C
Altitude:	70,000 feet
Dielectric withstanding voltage:	1000 volts RMS MIN (sea level) 200 volts RMS (reduced barometric pressure)
Terminal pull:	2 LBS MIN (-1 through -13) 1 LB MIN (-14 through -17)
Grade and class:	2, A

TABLE I. Electrical characteristics.

PART NO. MS53230-	TYPE DESIGNATION	INDUCTANCE µH		Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESISTANCE MAX OHMS	DC CURRENT MAX mA
		MAX	MIN					
1	LT11V022	10.0	5.5	25	2.5	34	3.1	57
2	LT11V023	13.0	6.5	25	2.5	30	3.3	53
3	LT11V024	16.0	8.0	30	2.5	25	3.4	50
4	LT11V025	20.0	10.0	30	2.5	20	3.5	43
5	LT11V026	22.0	11.0	30	2.5	14	4.0	43
6	LT11V027	30.0	15.0	30	2.5	10	4.5	40
7	LT11V028	36.0	18.0	30	2.5	9	5.0	40
8	LT11V029	47.0	24.0	30	2.5	6.5	5.7	39
9	LT11V030	56.0	28.0	30	2.5	6.3	7.0	35
10	LT11V031	68.0	34.0	30	2.5	6.2	8.0	30
11	LT11V032	75.0	38.0	30	2.5	5.9	9.0	30
12	LT11V033	86.0	43.0	30	2.5	5.6	10.0	28
13	LT11V034	100.0	50.0	28	.79	5.4	12.0	27
14	LT11V035	120.0	60.0	25	.79	4.4	14.0	25
15	LT11V036	470.0	240.0	20	.79	2.1	30.0	16
16	LT11V037	680.0	340.0	20	.79	2.0	35.0	15
17	LT11V038	1MH	.5MH	20	.79	1.1	75.0	11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED OR VARIABLE

MIL-C-83446

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR FIXED OR VARIABLE, CHIP COILS PRIMARILY INTENDED FOR USE IN THIN OR THICK FILM HYBRID MICROELECTRONIC CIRCUITS.

Part number example: M83446/03-04B

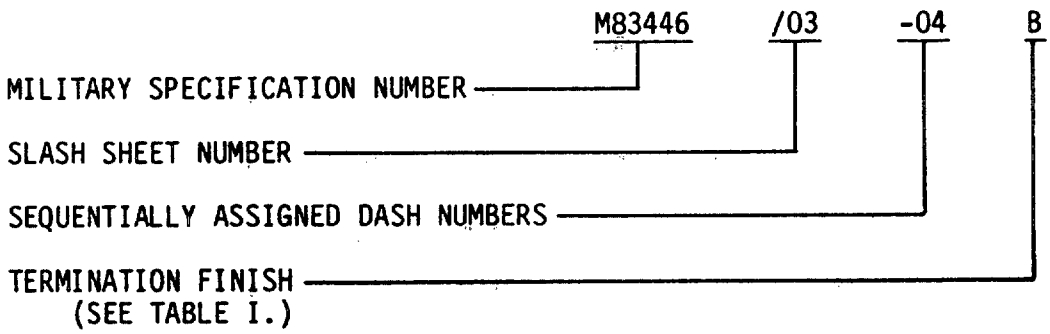



TABLE I. Termination finish.

CODE	FINAL FINISH	METHOD OF ASSY
A	GOLD OVER NICKEL	SOLDERABLE/WELDABLE
B	TIN-LEAD OVER NICKEL	SOLDERABLE
C	TIN PLATED	SOLDERABLE
D	PLATINUM-GOLD	SOLDERABLE/WELDABLE
E	PALLADIUM-SILVER	SOLDERABLE/WELDABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY

MIL-C-83446/1

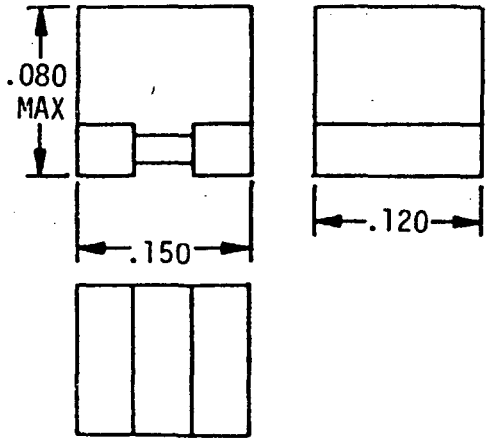

Operating temperature: -55° to +125°C

Temperature rise: 35°C

Altitude: 70,000 feet

Terminal finish: C and E

Dielectric withstanding voltage: 700 volts RMS

TABLE I. Electrical characteristics.

PART NO. M83446/01-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
01	.010	48	150	900	.050	650
02	.012	48	150	900	.055	650
03	.015	48	150	900	.060	650
04	.018	48	150	900	.065	650
05	.022	48	100	900	.070	650
06	.027	48	100	900	.075	650
07	.033	48	100	900	.075	650
08	.039	48	100	900	.080	650
09	.047	48	100	850	.085	650
10	.056	48	100	800	.088	650
11	.068	48	100	750	.098	650
12	.082	48	100	700	.095	650
13	.100	50	25	600	.075	650
14	.120	50	25	550	.075	650
15	.150	50	25	420	.085	650
16	.180	50	25	390	.10	650
17	.220	50	25	340	.11	640
18	.270	50	25	290	.12	620
19	.330	50	25	230	.14	590

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY

MIL-C-83446/1


TABLE I. Electrical characteristics.

PART NO. M83446/01-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
20	.390	50	25	210	.16	550
21	.470	50	25	190	.18	520
22	.560	50	25	180	.20	500
23	.680	50	25	170	.23	460
24	.820	50	25	150	.26	430
25	1.00	50	25	140	.34	380
26	1.20	36	7.90	130	.42	370
27	1.50	36	7.90	120	.56	320
28	1.80	36	7.90	100	.76	280
29	2.20	36	7.90	98	.93	250
30	2.70	40	7.90	91	1.2	220
31	3.30	40	7.90	76	1.3	210
32	3.90	47	7.90	48	1.5	200
33	4.70	47	7.90	46	1.7	180
34	5.60	44	7.90	42	1.8	170
35	6.80	40	7.90	39	1.9	160
36	8.20	40	7.90	30	2.4	150
37	10.0	46	7.90	26	3.2	130
38	12.0	41	2.50	24	3.7	120
39	15.0	46	2.50	23	3.8	110
40	18.0	46	2.50	22	4.2	100
41	22.0	47	2.50	18	5.5	98
42	27.0	47	2.50	17	6.1	95
43	33.0	47	2.50	13	6.6	92
44	39.0	50	2.50	12	7.0	88
45	47.0	50	2.50	11	8.3	85
46	56.0	50	2.50	10	8.9	82
47	68.0	50	2.50	9.1	13.0	67
48	82.0	50	2.50	8.6	14.0	65
49	100.0	47	2.50	7.6	16.0	61
50	120.0	30	0.790	6.8	17.0	59
51	150.0	32	0.790	5.6	18.0	57
52	180.0	32	0.790	4.5	22.0	52
53	220.0	32	0.790	4.0	28.0	46
54	270.0	32	0.790	3.8	32.0	43
55	330.0	32	0.790	3.5	44.0	37
56	390.0	32	0.790	3.4	48.0	35
57	470.0	28	0.790	3.2	75.0	28
58	560.0	28	0.790	2.8	81.0	27
59	680.0	28	0.790	2.7	93.0	23
60	820.0	28	0.790	2.0	112.0	21
61	1000.0	28	0.790	1.7	120.0	19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY

MIL-C-83446/4

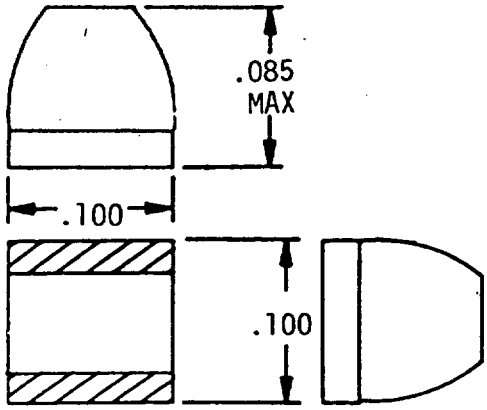

Operating temperature:	-55° to +125°C
Temperature rise:	35°C
Altitude:	70,000 feet
Terminal finish:	A, C and E
Dielectric withstanding voltage:	200 volts RMS

TABLE I. Electrical characteristics.

PART NO. M83446/04-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
01	.12	30	25	750	.125	880
02	.15	25	25	650	.175	745
03	.18	25	25	550	.200	695
04	.22	25	25	450	.220	665
05	.27	25	25	375	.230	650
06	.33	25	25	300	.235	645
07	.39	22	25	235	.240	635
08	.47	22	25	215	.260	610
09	.56	22	25	195	.278	590
10	.68	22	25	175	.520	435
11	.82	22	25	160	.530	430
12	1.0	22	25	145	.540	425
13	1.2	22	7.9	130	.740	360
14	1.5	22	7.9	115	.840	340
15	1.8	22	7.9	105	.920	325

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY

MIL-C-83446/4


TABLE I. Electrical characteristics.

PART NO. M83446/04-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
16	2.2	22	7.9	85	1.00	310
17	2.7	24	7.9	77	1.15	290
18	3.3	24	7.9	70	1.40	260
19	3.9	24	7.9	68	1.55	250
20	4.7	24	7.9	60	1.80	230
21	5.6	22	7.9	55	2.00	220
22	6.8	22	7.9	50	2.20	210
23	8.2	22	7.9	48	2.50	195
24	10.0	24	7.9	40	3.45	165
25	12.0	25	2.5	35	3.80	160
26	15.0	25	2.5	30	5.60	135
27	18.0	25	2.5	28	5.80	130
28	22.0	25	2.5	25	6.40	125
29	27.0	25	2.5	22	6.90	120
30	.010	60	50	2700	.060	1270
31	.015	55	50	2200	.078	1110
32	.022	50	50	1800	.108	950
33	.033	48	50	1450	.120	900
34	.047	42	50	1220	.145	820
35	.068	36	50	1000	.195	705
36	.100	32	50	830	.230	650

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY

MIL-C-83446/5

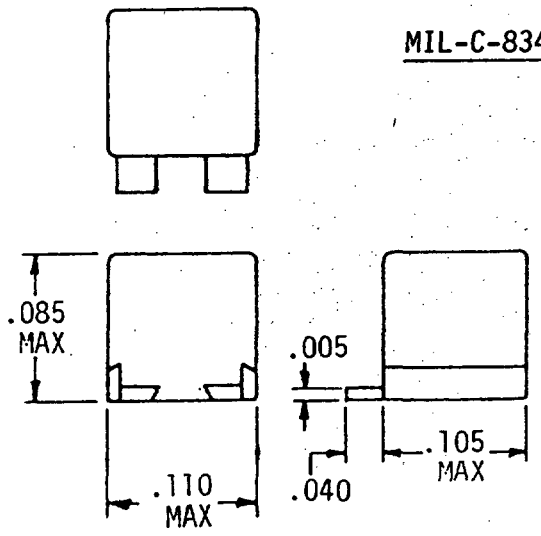

Operating temperature: -55° to +125°C

Temperature rise: 35°C

Altitude: 70,000 feet

Terminal finish: B and C

Dielectric withstanding voltage: 500 volts RMS

TABLE I. Electrical characteristics.

PART NO. M83446/05-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
01	.010	60	150	2000	.025	750
02	.012	60	150	2000	.025	750
03	.015	60	150	1800	.040	750
04	.018	60	150	1500	.040	750
05	.022	51	100	1400	.040	750
06	.027	51	100	1200	.040	750
07	.033	47	100	1200	.050	640
08	.039	47	100	1200	.070	600
09	.047	47	100	1000	.080	550
10	.056	47	100	900	.090	520
11	.068	47	100	900	.10	480
12	.082	47	100	750	.11	470
13	.100	47	50	700	.11	470
14	.120	47	50	600	.11	470
15	.150	47	50	500	.12	450

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY

MIL-C-83446/5


TABLE I. Electrical characteristics.

PART NO. M83446/05-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
16	.180	51	50	450	.14	430
17	.220	51	50	420	.20	350
18	.270	51	50	400	.25	310
19	.330	51	50	320	.30	280
20	.390	47	50	270	.45	240
21	.470	47	25	250	.50	230
22	.560	52	25	200	.55	220
23	.680	52	25	180	.58	210
24	.820	52	25	150	.60	200
25	1.00	52	25	120	.65	190
26	1.20	42	7.90	110	.75	180
27	1.50	42	7.90	100	1.1	160
28	1.80	48	7.90	95	1.2	150
29	2.20	48	7.90	90	1.3	140
30	2.70	48	7.90	65	1.5	130
31	3.30	48	7.90	55	1.8	120
32	3.90	48	7.90	45	2.0	110
33	4.70	48	7.90	43	2.3	100
34	5.60	48	7.90	40	2.5	100
35	6.80	46	7.90	38	2.6	98
36	8.20	46	7.90	35	2.8	95
37	10.0	46	7.90	33	3.3	87

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY

MIL-C-83446/8

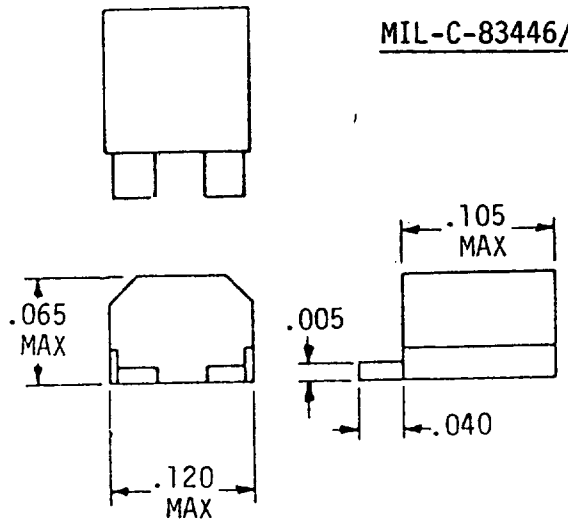

Operating temperature:	-55° to +125°C
Temperature rise:	35°C
Altitude:	70,000 feet
Terminal finish:	B and C
Dielectric withstanding voltage:	500 volts RMS

TABLE I. Electrical characteristics.

PART NO. M83446/08-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
01	.010	60	150	2000	.025	750
02	.012	60	150	2000	.025	750
03	.015	60	150	1800	.040	750
04	.018	60	150	1500	.040	750
05	.022	51	100	1400	.040	750
06	.027	51	100	1200	.040	750
07	.033	47	100	1100	.050	640
08	.039	47	100	1000	.070	600
09	.047	47	100	900	.080	550
10	.056	47	100	850	.090	520
11	.068	47	100	840	.10	480
12	.082	47	100	750	.11	470
13	.100	47	50	580	.11	470
14	.120	47	50	240	.11	470
15	.150	47	50	230	.12	450

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY

MIL-C-83446/8


TABLE I. Electrical characteristics.

PART NO. M83446/08-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
16	.180	51	50	230	.14	430
17	.220	51	50	230	.20	350
18	.270	51	50	230	.25	310
19	.330	51	50	200	.30	280
20	.390	47	50	190	.45	240
21	.470	47	25	180	.50	230
22	.560	45	25	170	.50	230
23	.680	45	25	160	.50	230
24	.820	45	25	150	.50	230
25	1.00	45	25	130	.50	230
26	1.20	36	7.90	120	.60	200
27	1.50	36	7.90	100	1.1	160
28	1.80	38	7.90	90	1.1	160
29	2.20	38	7.90	85	1.5	130
30	2.70	41	7.90	80	1.7	125
31	3.30	42	7.90	75	1.8	120
32	3.90	42	7.90	65	2.0	110
33	4.70	41	7.90	55	2.3	100
34	5.60	41	7.90	45	2.6	98
35	6.80	36	7.90	40	2.8	94
36	8.20	36	7.90	35	3.0	90
37	10.0	36	7.90	33	3.3	87
38	12.0	36	7.90	26	4.0	79
39	15.0	32	2.50	24	4.2	79
40	18.0	32	2.50	21	4.4	75
41	22.0	32	2.50	19	7.5	57
42	27.0	32	2.50	14	8.0	55
43	33.0	30	2.50	12	13.0	45
44	39.0	30	2.50	10	17.0	38
45	47.0	30	2.50	9.0	19.0	36
46	56.0	30	2.50	8.5	23.0	33
47	68.0	30	2.50	8.2	25.0	32
48	82.0	30	2.50	8.0	28.0	30
49	100.0	30	2.50	7.0	31.0	28

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY

MIL-C-83446/10

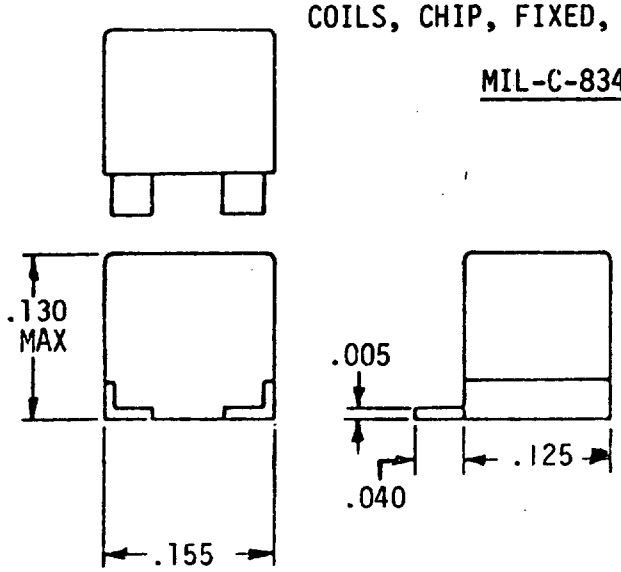

Operating temperature: -55° to +125°C

Temperature rise: 35°C

Altitude: 70,000 feet

Terminal finish: B and C

Dielectric withstanding voltage: 500 volts RMS

TABLE I. Electrical characteristics.

PART NO. M83446/10-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
01	.010	60	150	2000	.04	1000
02	.012	70	150	1800	.04	1000
03	.015	75	150	1500	.04	1000
04	.018	75	150	1500	.04	1000
05	.022	60	100	1300	.05	1000
06	.027	60	100	1300	.05	1000
07	.033	60	100	1000	.05	1000
08	.039	60	100	1000	.06	900
09	.047	65	100	800	.06	900
10	.056	65	100	760	.06	900
11	.068	65	100	700	.07	840
12	.082	65	100	650	.07	840
13	.100	65	50	570	.07	840
14	.120	65	50	520	.07	840
15	.150	75	50	400	.08	790
16	.180	75	50	360	.08	790

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY


MIL-C-83446/10

PART NO. M83446/10-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
17	.220	70	50	320	.08	790
18	.270	70	50	270	.10	700
19	.330	70	50	240	.10	700
20	.390	70	50	220	.10	700
21	.470	70	25	190	.14	590
22	.560	70	25	170	.19	510
23	.680	70	25	160	.26	430
24	.820	75	25	150	.30	400
25	1.00	75	25	130	.34	380
26	1.20	65	7.9	120	.45	330
27	1.50	65	7.9	110	.57	290
28	1.80	65	7.9	100	.72	260
29	2.20	65	7.9	80	.9	230
30	2.70	65	7.9	60	1.1	210
31	3.30	60	7.9	50	1.2	200
32	3.90	60	7.9	45	1.4	180
33	4.70	60	7.9	42	1.6	170
34	5.60	65	7.9	40	1.8	160
35	6.80	65	7.9	37	2.4	140
36	8.20	65	7.9	34	3.0	130
37	10.0	65	7.9	29	3.5	120
38	12.0	60	2.5	27	3.6	118
39	15.0	60	2.5	22	3.7	115
40	18.0	60	2.5	17	3.8	114
41	22.0	60	2.5	16	3.9	113
42	27.0	65	2.5	15	4.0	110
43	33.0	65	2.5	14	5.0	100
44	39.0	65	2.5	13	7.0	84
45	47.0	70	2.5	12	8.0	79
46	56.0	70	2.5	11	10.0	70
47	68.0	65	2.5	10	11.0	67
48	82.0	60	2.5	9	12.0	64
49	100.0	60	2.5	8	13.0	62
50	120.0	40	0.79	7	14.0	59
51	150.0	40	0.79	6	16.0	56
52	180.0	40	0.79	5	18.0	52
53	220.0	40	0.79	4	24.0	45
54	270.0	40	0.79	3.3	25.0	44
55	330.0	40	0.79	3.1	29.0	41
56	390.0	40	0.79	2.9	32.0	39
57	470.0	35	0.79	2.4	35.0	37
58	560.0	35	0.79	2.1	45.0	33
59	680.0	35	0.79	1.9	55.0	30
60	820.0	30	0.79	1.8	70.0	26
61	1000.0	30	0.79	1.7	80.0	25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY, SHIELDED

MIL-C-83446/11

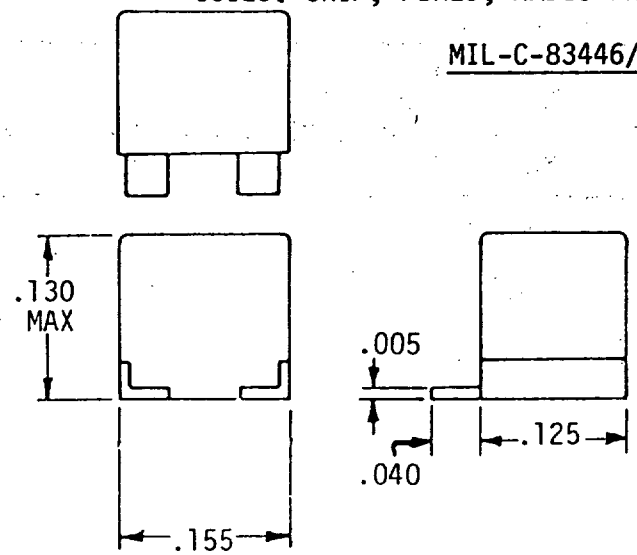

Operating temperature:	-55° to +125°C
Temperature rise:	35°C
Altitude:	70,000 feet
Terminal finish:	B and C
Dielectric withstanding voltage:	500 volts RMS

TABLE I. Electrical characteristics.

PART NO. M83446/11-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
01	.10	90	25	600	.03	1000
02	.12	90	25	520	.03	1000
03	.15	90	25	490	.03	1000
04	.18	90	25	460	.04	1000
05	.22	90	25	430	.04	1000
06	.27	100	25	370	.04	1000
07	.33	105	25	310	.05	750
08	.39	115	25	280	.05	750
09	.47	115	25	260	.05	750
10	.56	115	25	240	.06	700
11	.68	115	25	200	.06	700
12	.82	115	25	185	.06	700
13	1.0	115	25	175	.09	650
14	1.2	90	7.9	150	.09	650
15	1.5	100	7.9	135	.14	600
16	1.8	100	7.9	120	.20	500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, FIXED, RADIO FREQUENCY


MIL-C-83446/11


PART NO. M83446/11-	INDUCTANCE µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
17	2.2	100	7.9	105	.30	400
18	2.7	100	7.9	85	.40	350
19	3.3	100	7.9	80	.46	330
20	3.9	105	7.9	64	.52	310
21	4.7	115	7.9	56	.54	300
22	5.6	115	7.9	49	.60	285
23	6.8	115	7.9	45	.66	270
24	8.2	115	7.9	41	1.00	225
25	10.0	115	7.9	39	1.20	200
26	12.0	100	2.5	34	1.5	180
27	15.0	100	2.5	30	1.8	170
28	18.0	100	2.5	26	1.9	160
29	22.0	105	2.5	23	2.1	150
30	27.0	110	2.5	20	2.4	140
31	33.0	115	2.5	18	2.7	130
32	39.0	115	2.5	17	3.1	125
33	47.0	115	2.5	16	3.2	125
34	56.0	110	2.5	14	3.5	120
35	68.0	110	2.5	12	4.0	111
36	82.0	110	2.5	10	4.8	102
37	100.0	110	2.5	4.4	5.7	93
38	120.0	85	.79	8.0	6.2	89
39	150.0	85	.79	8.0	6.3	89
40	180.0	85	.79	6.9	6.4	88
41	220.0	85	.79	6.1	7.4	82
42	270.0	85	.79	5.2	8.1	78
43	330.0	100	.79	4.6	8.8	75
44	390.0	100	.79	4.0	9.7	72
45	470.0	100	.79	3.6	10.0	69
46	560.0	100	.79	2.8	11.0	66
47	680.0	100	.79	2.3	12.0	64
48	820.0	95	.79	2.1	17.0	53
49	1000.0	95	.79	2.0	22.0	47
50	1200.0	75	.25	1.7	24.0	45
51	1500.0	75	.25	1.6	25.0	44
52	1800.0	75	.25	1.5	27.0	43
53	2200.0	75	.25	1.4	30.0	40
54	2700.0	75	.25	1.3	34.0	38
55	3300.0	75	.25	1.2	39.0	35
56	3900.0	75	.25	1.1	56.0	29
57	4700.0	75	.25	1.0	70.0	26
58	5600.0	75	.25	.90	80.0	25
59	6800.0	75	.25	.80	90.0	23
60	8200.0	75	.25	.70	100.0	22
61	10000.0	75	.25	.70	110.0	21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, VARIABLE, RADIO FREQUENCY

MIL-C-83446/7



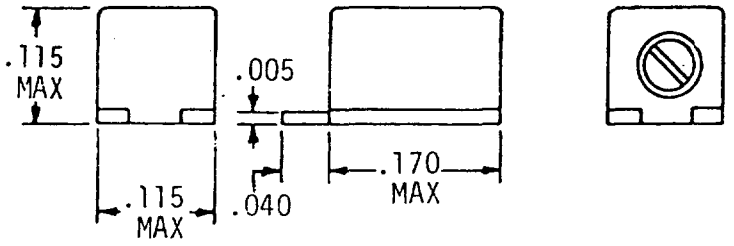

Operating temperature:	-55° to +125°C
Temperature rise:	35°C
Altitude:	70,000 feet
Terminal finish:	B and C
Dielectric withstanding voltage:	700 volts RMS

TABLE I. Electrical characteristics.

PART NO. M83446/07-	INDUCTANCE NOM µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
01	.018	52	150	1200	.02	750
02	.022	55	150	1100	.02	750
03	.027	55	150	1000	.03	750
04	.033	52	150	900	.03	750
05	.039	52	150	750	.03	750
06	.047	52	100	660	.04	750
07	.056	55	100	610	.04	750
08	.068	55	100	550	.05	750
09	.082	55	100	520	.06	640
10	.100	50	50	490	.07	600
11	.120	50	50	460	.07	600
12	.15	45	50	430	.10	480
13	.18	45	50	385	.12	450
14	.22	45	50	330	.15	400
15	.27	45	50	275	.20	350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, VARIABLE, RADIO FREQUENCY

MIL-C-83446/7


TABLE I. Electrical characteristics.

PART NO. M83446/07-	INDUCTANCE NOM µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
16	.33	45	50	240	.25	300
17	.39	42	50	210	.35	260
18	.47	40	25	190	.40	250
19	.56	40	25	165	.50	230
20	.68	40	25	155	.75	180
21	.82	40	25	145	.90	160
22	1.0	40	25	130	1.8	120
23	1.2	40	25	120	1.9	115
24	1.5	22	7.9	105	3.0	90
25	1.8	22	7.9	95	3.5	85
26	2.2	19	7.9	85	6.5	62
27	2.7	19	7.9	80	7.0	60
28	3.3	19	7.9	75	7.5	55
29	3.9	19	7.9	70	10.0	50
30	4.7	19	7.9	38	2.5	100
31	5.6	22	7.9	36	2.5	100
32	6.8	22	7.9	35	3.5	85
33	8.2	21	7.9	30	4.5	75
34	10	21	7.9	25	5.0	70
35	12	21	7.9	20	5.5	65
36	15	22	2.5	18	6.5	60
37	18	22	2.5	17	11.0	47
38	22	22	2.5	16	12.0	45
39	27	22	2.5	13	13.5	43
40	33	22	2.5	11	14.0	42
41	39	22	2.5	10	18.0	37
42	47	22	2.5	9	20.0	35
43	56	22	2.5	8	22.0	34
44	68	22	2.5	7	24.0	32
45	82	22	2.5	6	38.0	25
46	100	20	2.5	5.2	42.0	24
47	120	20	2.5	5.0	52.0	22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, VARIABLE, RADIO FREQUENCY

MIL-C-83446/9

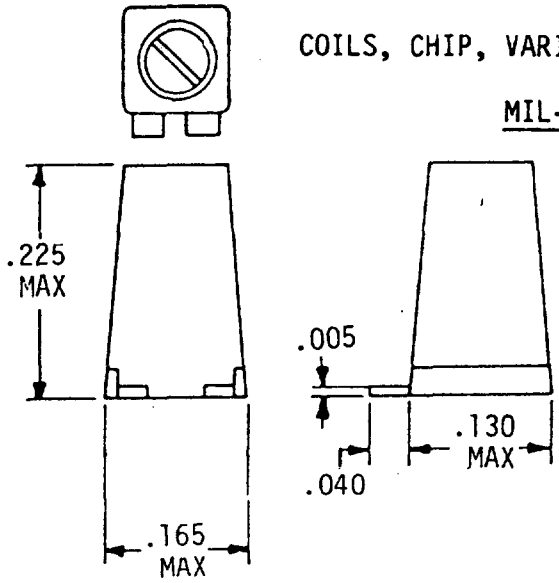

Operating temperature:	-55° to +125°C
Temperature rise:	35°C
Altitude:	70,000 feet
Terminal finish:	B and C
Dielectric withstanding voltage:	700 volts RMS

TABLE I. Electrical characteristics.

PART NO. M83446/09-	INDUCTANCE NOM µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
01	.018	50	150	1200	.03	750
02	.022	55	150	1100	.03	750
03	.027	55	150	1000	.03	750
04	.033	55	150	900	.04	750
05	.039	55	150	750	.04	750
06	.047	55	100	660	.04	750
07	.056	55	100	610	.05	750
08	.068	55	100	550	.05	750
09	.082	55	100	520	.06	645
10	.100	55	50	490	.06	645
11	.120	50	50	460	.07	600
12	.15	50	50	430	.08	560
13	.18	50	50	385	.09	525
14	.22	50	50	330	.10	500
15	.27	50	50	300	.15	400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

COILS, CHIP, VARIABLE, RADIO FREQUENCY

MIL-C-83446/9

TABLE I. Electrical characteristics.

PART NO. M83446/09-	INDUCTANCE NOM µH	Q MIN	TEST FREQUENCY MHz	SELF RESONANT FREQ. MIN MHz	DC RESIST-ANCE MAX OHMS	CURRENT MAX mA
16	.33	50	50	275	.19	360
17	.39	40	50	240	.25	300
18	.47	40	25	210	.30	280
19	.56	40	25	190	.40	250
20	.68	40	25	165	.60	200
21	.82	40	25	155	.70	180
22	1.00	40	25	140	.90	160
23	1.20	40	25	125	1.1	150
24	1.50	35	7.9	115	1.3	135
25	1.80	35	7.9	105	1.7	120
26	2.20	35	7.9	100	2.3	100
27	2.70	25	7.9	85	3.0	90
28	3.30	25	7.9	75	3.9	80
29	3.90	25	7.9	47	3.9	80
30	4.70	25	7.9	30	3.9	80
31	5.6	22	7.9	24	4.0	75
32	6.8	22	7.9	23	4.0	75
33	8.2	22	7.9	22	4.5	72
34	10.0	22	7.9	21	4.5	72
35	12.0	22	7.9	17	5.0	70
36	15.0	22	2.5	15	6.0	65
37	18.0	22	2.5	14	8.0	55
38	22.0	22	2.5	13	10.0	50
39	27.0	22	2.5	11	11.0	45
40	33.0	22	2.5	10	13.0	43
41	39.0	22	2.5	9	14.0	42
42	47.0	22	2.5	8	15.0	40
43	56.0	22	2.5	7	19.0	36
44	68.0	22	2.5	6	24.0	32
45	82.0	25	2.5	5	31.0	28
46	100.0	25	2.5	4	40.0	25
47	120.0	25	2.5	3	50.0	22

☆ U.S. GOVERNMENT PRINTING OFFICE: 1985-505-038/20901

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.