MIL-STD-242H(NAVY) PART 3
20 MAY 1986
SUPERSEDING
MIL-STD-242G(NAVY), PART 3

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS SELECTED STANDARDS

RESISTORS

FSC 59GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D. C. 20363-5100

Electronic Equipment Parts, Selected Standards, Resistors

MIL-STD-242H(NAVY), PART 3

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to: Commander, Space and Naval Warfare Systems Command, SPAWAR 8111C, Department of the Navy, Washington, D. C. 20363-5100.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

1. SCOPE.

1.1 SCOPE. THIS STANDARD ESTABLISHES THE REQUIREMENTS FOR THE SELECTION OF RESISTORS USED IN THE DESIGN AND MANUFACTURE OF NAVY EQUIPMENT.

1.2 PURPOSE. THE PURPOSE OF THIS STANDARD IS TO CONTROL AND MINIMIZE THE VARIETY OF RESISTORS IN NAVY EQUIPMENTS IN ORDER TO FACILITATE EFFECTIVE LOGISTIC SUPPORT, IMPROVE QUALITY AND REDUCE COST.

2. REFERENCED DOCUMENTS.

2.1 THE ISSUES OF THE FOLLOWING DOCUMENTS IN EFFECT ON THE DATE OF INVITATION FOR BIDS FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

SPECIFICATIONS

MILITARY

MIL-R-22	RESISTOR, VARIABLE, WIRE-WOUND, POWER TYPE
MIL-R-26	RESISTOR, FIXED, WIRE-WOUND, POWER TYPE
MIL-R-94	RESISTOR, VARIABLE, COMPOSITION
MIL-R-12934	RESISTOR, VARIABLE, WIRE-WOUND, PRECISION
MIL-R-18546	RESISTOR, FIXED, WIRE-WOUND, POWER TYPE, CHASSIS MOUNTED
MIL-R-22684	RESISTOR, FIXED, FILM, INSULATED
MIL-R-23285	RESISTOR, VARIABLE, NONWIRE-WOUND
MIL-R-27208	RESISTOR, VARIABLE, WIRE-WOUND, LEAD SCREW ACTUATED
MIL-R-39002	RESISTOR, VARIABLE, WIRE-WOUND, SEMI-PRECISION
MIL-R-39005	RESISTOR, FIXED, WIRE-WOUND, ACCURATE, ESTABLISHED RELIABILITY
MIL-R-39007	RESISTOR, FIXED, WIRE-WOUND, POWER TYPE, ESTABLISHED RELIABILITY
MIL-R-39008	RESISTOR, FIXED, COMPOSITION, INSULATED, ESTABLISHED RELIABILITY
MIL-R-39009	RESISTOR, FIXED, WIRE-WOUND, POWER TYPE, CHASSIS MOUNTED, ESTABLISHED RELIABILITY
MIL-R-39015	RESISTOR, VARIABLE, WIRE-WOUND, LEAD SCREW ACTUATED, ESTABLISHED RELIABILITY
MIL-R-39017	RESISTOR, FIXED, FILM, INSULATED, ESTABLISHED RELIABILITY
MIL-R-39023	RESISTOR, VARIABLE, NONWIRE-WOUND, PRECISION
MIL-R-39035	RESISTOR, VARIABLE, NONWIRE-WOUND, LEAD SCREW ACTUAAITED, ESTABLISHED RELIABILITY
MIL-R-55182	RESISTOR, FIXED, FILM, ESTABLISHED RELIABILITY
MIL-R-55342	RESISTOR, FIXED, FILM, CHIP
MIL-R-83401	RESISTOR, NETWORK, FIXED, FILM
MIL-T-23648A	RESISTOR, THERMISTOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 THE TERMS USED IN THIS STANDARD ARE DEFINED IN APPROPRIATE MILITARY SPECIFICATIONS.

4. GENERAL REQUIREMENTS

4.1 SELECTION OF DEVICES. RESISTOR DEVICE TYPES SHALL BE SELECTED FROM THE TYPES LISTED IN THIS STANDARD. THE VARIETY OF TYPES USED IN ANY NAVY EQUIPMENT SHALL BE THE MINIMUM NECESSARY TO PROVIDE SATISFACTORY PERFORMANCE AND THE CONTRACTOR (HARDWARE DESIGNER/BUILDER) SHALL EXERCISE ALL REASONABLE DESIGN CHOICES TO ACHIEVE THIS OBJECTIVE.

4.2 CRITERIA FOR INCLUSION IN THIS STANDARD.

(A). THE DEVICE MUST SATISFY A WIDE RANGE OF DESIGN REQUIREMENTS.
(B). AT LEAST ONE MANUFACTURER IS QUALIFIED TO THE APPLICABLE DETAIL SPECIFICATION.
(C). THERE IS REASONABLE ASSURANCE THAT THE DEVICE WILL BE AVAILABLE FOR AT LEAST SEVEN YEARS.

4.3 RESISTOR CHARACTERISTICS. THE CHARACTERISTICS LISTED HEREIN ARE FOR REFERENCE ONLY AND ARE INTENDED AS AN AID IN SELECTING DEVICES. THE APPLICABLE DETAIL SPECIFICATION SHALL BE USED FOR ALL FINAL DESIGN CRITERIA.

4.4 CONFLICT OF DATA. IN THE EVENT OF CONFLICT BETWEEN THE TECHNICAL DESCRIPTION OF DEVICES IN THIS STANDARD AND THE APPLICABLE DETAIL SPECIFICATION, THE DETAIL SPECIFICATION SHALL GOVERN.

5. RESISTOR IDENTIFICATION

5.1 RESISTOR IDENTIFICATION IS THE PART NUMBER OR TYPE DESIGNATOR AS LISTED IN THIS STANDARD.

6. OUTLINE DRAWING

6.1 OUTLINE DRAWINGS ARE DIMENSIONED IN INCHES ONLY.

Review activities:
Navy - AS, MC

Preparing activity:
Navy EC

(Project Number 59GP-N059)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE A. RESISTOR DECADE

TOLERANCE					
±0.5%*	±1%	±2%	±5%	±10%	±20%
1.00	1.00	1.00	1.0	1.0	1.0
1.01					
1.02	1.02				
1.04					
1.05	1.05	1.05			
1.06					
1.07	1.07				
1.09					
1.10	1.10	1.10	1.1		
1.11					
1.13	1.13				
1.14					
1.15	1.15	1.15			
1.17					
1.18	1.18				
1.20					
1.21	1.21	1.21	1.2	1.2	
1.23					
1.24	1.24				
1.26					
1.27	1.27				
1.29					
1.30	1.30				
1.32					
1.33	1.33	1.33	1.3		
1.35					
1.37	1.37				
1.39					
1.40	1.40	1.40			
1.42					
1.43	1.43				
1.45					
1.47	1.47	1.47	1.5	1.5	1.5
1.49					
1.50	1.50				
1.52					
1.54	1.54	1.54			
1.56					
1.58	1.58				
1.60					
1.62	1.62	1.62	1.6		
1.64					
1.65	1.65				
1.67					
1.69	1.69	1.69			
1.72					
1.74	1.74				
1.76					
1.78	1.78	1.78	1.8	1.8	
1.80					
1.82	1.82				
1.84					
1.87	1.87	1.87			
1.89					
1.91	1.91				
1.93					
1.96	1.96	1.96	2.0		
1.98					
2.00	2.00				
2.03					
2.05	2.05	2.05			
2.08					
2.10	2.10				
2.13					

TOLERANCE					
±0.5%*	±1%	±2%	±5%	±10%	±20%
2.15	2.15	2.15	2.2	2.2	2.2
2.18					
2.21	2.21				
2.23					
2.26	2.26	2.26			
2.29					
2.32	2.32				
2.34					
2.37	2.37	2.37	2.4		
2.40					
2.43	2.43				
2.46					
2.49	2.49	2.49			
2.52					
2.55	2.55				
2.58					
2.61	2.61	2.61	2.7	2.7	
2.64					
2.67	2.67				
2.71					
2.74	2.74	2.74			
2.77					
2.80	2.80				
2.84					
2.87	2.87	2.87	3.0		
2.91					
2.94	2.94				
2.98					
3.01	3.01	3.01			
3.05					
3.09	3.09				
3.12					
3.16	3.16	3.16	3.3	3.3	3.3
3.20					
3.24	3.24				
3.28					
3.32	3.32	3.32			
3.36					
3.40	3.40				
3.44					
3.48	3.48	3.48	3.6		
3.52					
3.57	3.57				
3.61					
3.65	3.65	3.65			
3.70					
3.74	3.74				
3.79					
3.83	3.83	3.83	3.9	3.9	
3.88					
3.92	3.92				
3.97					
4.02	4.02	4.02			
4.07					
4.12	4.12				
4.17					
4.22	4.22	4.22	4.3		
4.27					
4.32	4.32				
4.37					
4.42	4.42	4.42			
4.46					
4.53	4.53				
4.59					

TOLERANCE					
±0.5%	*±1%	±2%	±5%	±10%	±20%
4.64	4.64	4.64	4.7	4.7	4.7
4.70					
4.75	4.75				
4.81					
4.87	4.87	4.87			
4.93					
4.99	4.99				
5.05					
5.11	5.11	5.11	5.1		
5.17					
5.23	5.23				
5.30					
5.36	5.36	5.36			
5.42					
5.49	5.49				
5.56					
5.62	5.62	5.62	5.6	5.6	
5.69					
5.76	5.76				
5.83					
5.90	5.90	5.90			
5.97					
6.04	6.04				
6.12					
6.19	6.19	6.19	6.2		
6.26					
6.34	6.34				
6.42					
6.49	6.49	6.49			
6.57					
6.65	6.65				
6.73					
6.81	6.81	6.81	6.8	6.8	6.8
6.90					
6.98	6.98				
7.06					
7.15	7.15	7.15			
7.23					
7.32	7.32				
7.41					
7.50	7.50	7.50	7.5		
7.59					
7.68	7.68				
7.77					
7.87	7.87	7.87			
7.96					
8.06	8.06				
8.16					
8.25	8.25	8.25	8.2	8.2	
8.35					
8.45	8.45				
8.56					
8.66	8.66	8.66			
8.76					
8.87	8.87				
8.98					
9.09	9.09	9.09	9.1		
9.20					
9.31	9.31				
9.42					
9.53	9.53	9.53			
9.65					
9.76	9.76				
9.88					

* THESE VALUES ARE ALSO USED FOR TOLERANCES OF ±0.25% AND ±0.1%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

PAGE NUMBERS

100 RESISTORS, FIXED

110 COMPOSITION
MIL-R-39008 111.1 - 111.2
120 FILM
MIL-R-55182 121.1 - 121.4
MIL-R-39017 121.5 - 121.6
MIL-R-22684/8 121.7 - 121.9
130 WIREWOUND
131 ACCURATE
MIL-R-39005 131.1 - 131.4
132 POWER
MIL-R-26/3 132.1 - 132.2
MIL-R-39007 132.3 - 132.4
133 POWER, CHASSIS MOUNT
MIL-R-39009 133.1 - 133.2
MIL-R-18546/2 133.3 - 133.4

200 RESISTORS, VARIABLE

210 COMPOSITION
MIL-R-94 211.1 - 211.6
220 NON-WIREWOUND
221 POWER
MIL-R-23285 221.1 - 221.3
222 PRECISION
MIL-R-39023 222.1 - 222.4
224 LEAD SCREW ADJUSTMENT
MIL-R-39035 224.1 - 224.6
230 WIREWOUND
MIL-R-22 231.1 - 231.9
MIL-R-12934 232.1 - 232.7
233 SEMI-PRECISION
MIL-R-39002 233.1 - 233.5
234 LEAD SCREW ADJUSTMENT
MIL-R-39015 234.1 - 234.7
MIL-R-27208 234.8 - 234.9

300 RESISTORS, NETWORK

310 FILM
MIL-R-83401 311.1 - 311.10

400 RESISTORS, THERMISTORS

410 TEMPERATURE SENSITIVE
MIL-T-23648A 411.1 - 411.4

500 RESISTORS, CHIP

510 FILM
MIL-R-55342 511.1 - 511.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, COMPOSITION (INSULATED), ESTABLISHED RELIABILITY, STYLES RCR

MIL-C-39008/1 THRU /5

SCOPE: FIXED, INSULATED COMPOSITION RESISTORS, STYLE RCR PER MIL-C-39008 ARE ESTABLISHED RELIABILITY PARTS SUITABLE FOR GENERAL USAGE. APPROXIMATELY 16% MUST BE ADDED TO THE INITIAL TOLERANCE FOR OVERALL DESIGN TOLERANCE.

TEMPERATURE RANGE: -55°C TO +125°C, -55°C TO +70°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RCR07G153JS

RCR07 G 153 J S

STYLE

CHARACTERISTIC - G = 70°C MAX AMBIENT TEMPERATURE

RESISTANCE - FIRST TWO DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. LESS THAN 10 OHMS IS REPRESENTED BY AN "R": 2R7 MEANS 2.7 OHMS. SEE TABLE A.

TOLERANCE
J = ±5%
K = ±10%

FAILURE RATE
R = 0.01%/1000 HRS
S = 0.001%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, COMPOSITION (INSULATED), ESTABLISHED RELIABILITY STYLES RCR

MIL-R-39008/1 THRU /5

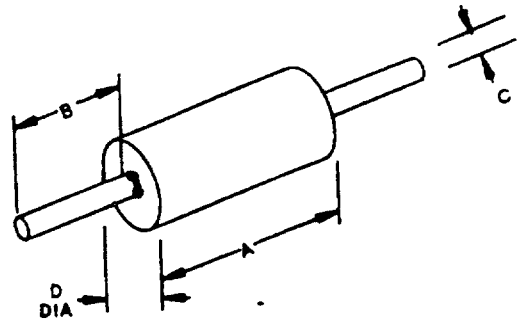


TABLE I. STYLES AND CHARACTERISTICS.

STYLE	MIL-R-39008/	POWER RATING (WATTS)	MAX WORKING VOLTAGE (DC OR RMS)	RESISTANCE RANGE (OHMS)		DIMENSIONS			
				MIN	MAX	A	B	C	D
RCR05	4	1/8	150	2.7	22M	.145	1.000	.015	.062
RCR07	1	1/4	250	2.7	22M	.250	1.50	.025	.090
RCR20	2	1/2	350	1.0	22M	.375	1.50	.031	.138
RCR32	3	1	500	1.0	22M	.562	1.50	.040	.225
RCR42	5	2	500	10	22M	.688	1.50	.045	.318

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED FILM, ESTABLISHED RELIABILITY, STYLES RNC, RNN, AND RNR

MIL-R-55182

SCOPE: FIXED, PRECISION, METAL FILM RESISTOR, STYLE RNC PER MIL-R-55182 ARE ESTABLISHED RELIABILITY RESISTORS WHICH OFFER OPERATING STABILITY BETWEEN GLAZE AND WIREWOUND TYPES. APPROXIMATELY 2% MUST BE ADDED TO INITIAL DESIGN TOLERANCE TO OBTAIN OVERALL DESIGN TOLERANCE WHEN OPERATED AT MAXIMUM RATED POWER AND TEMPERATURE. THESE RESISTORS ARE ESSENTIALLY NON-INDUCTIVE, WITH NOISE LEVELS IN NEGLIGIBLE QUANTITY. LEADS ARE BOTH SOLDERABLE AND WELDABLE.

TEMPERATURE RANGE: -55°C TO +125°C

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

FOR 1% RESISTORS USE RLR STYLE WHEREVER POSSIBLE. THIS STYLE IS USED ONLY WHEN TIGHTER TEMPERATURE COEFFICENT AND OVERALL DESIGN STABILITY IS REQUIRED.

PART NUMBER EXAMPLE: RNC60C1002FR

RNC60 C 1002 F R

STYLE SOLDER COATED COPPER LEADS SOLDERABLE AND WELDABLE

CHARACTERISTIC -
C* H** = ±50PPM °C
E* J** = ±25PPM °C
K** = ±100PPM °C

* HERMETIC
** NON-HERMETIC (FOR USE WITH RNC ONLY)

RESISTANCE - FIRST THREE DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. SEE TABLE A.

TOLERANCE
F = ±1%
D = ±0.5%
B = ±0.1% (NOT APPLICABLE TO CHARACTERISTIC K)

FAILURE RATE - (ESTABLISHED AT 60% CONFIDENCE)
R = 0.01%/1000 HRS
S = 0.001%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED FILM, ESTABLISHED RELIABILITY, STYLES RNC, RNN, AND RNR

MIL-R-55182

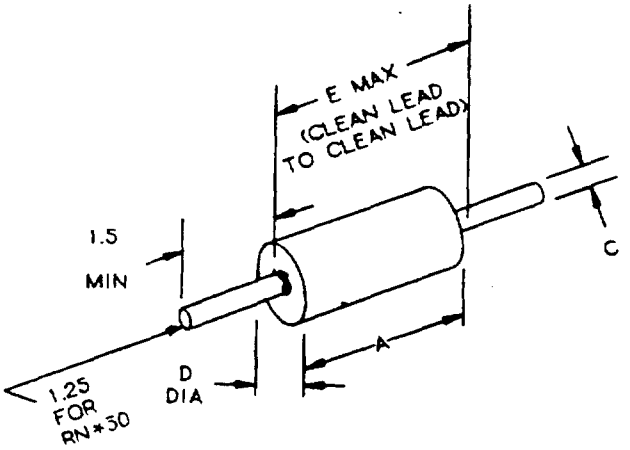


TABLE I. STYLES AND CHARACTERISTICS.

STYLE*	MIL-R-55182/	POWER RATING (WATTS)	MAX WORKING VOLTAGE (DC OR RMS)	RESISTANCE RANGE (OHMS)		DIMENSIONS			
				MIN	MAX	A	C	D	E
RNR50	7	1/20	200	10	.796M	.150	.016	.065	.244
RNR51	11	1/20	200	10	.200M	.150	.016	.065	.216
RNR55	1	1/10	200	10	2.0M	.250	.025	.109	.379
RNR56	12	1/10	200	10	1.21M	.260	.025	.100	.325
RNR60	3	1/8	250	10	3.010M	.375	.025	.125	.561
RNR65	5	1/4	300	10	4.990M	.625	.025	.188	.780
RNR70	6	1/2	350	10	7.500M	.750	.032	.250	.939
RNR75	10	1	750	24.9	2.00M	1.062	.032	.375	1.186

* THIRD LETTER IS VARIABLE, DEPENDENT UPON LEAD MATERIAL OR CAPABILITY
RNR=SOLDERABLE RNC=SOLDERABLE RNN=WELDABLE
NOT AVAILABLE IN RNN51, RNN56, OR RNN75

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED FILM, ESTABLISHED RELIABILITY, STYLE RNC90

MIL-R-55182/9

SCOPE: FIXED, INSULATED FILM RESISTORS, STYLE RNC PER MIL-R-55182, ARE ESTABLISHED RELIABILITY PARTS SUITABLE FOR GENERAL USAGE.

TEMPERATURE RANGE: -55°C TO +125°C
-55°C TO +70°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RNC90Y562R00AR

RNC90 Y 562R00 A R

STYLE

CHARACTERISTIC - Y= ±5PPM/°C TO AND INCLUDING 125°C AND ±10PPM/°C FROM 125°C TO 175°C. NON HERMETICALY SEALED

RESISTANCE - FIRST TWO DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. LESS THAN 10 OHMS IS REPRESENTED BY AN "R" 2R7 MEANS 2.70 OHMS. SEE TABLE A

TOLERANCE
A = ±.05%
B = ±.1%
D = ±.5%
F = ±1.0%
T = ±.01%
V = ±.005%

FAILURE RATE
P = 0.1%/1000 HRS
R = .01%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED FILM, ESTABLISHED RELIABILITY, STYLE RNC90

MIL-R-55182/9

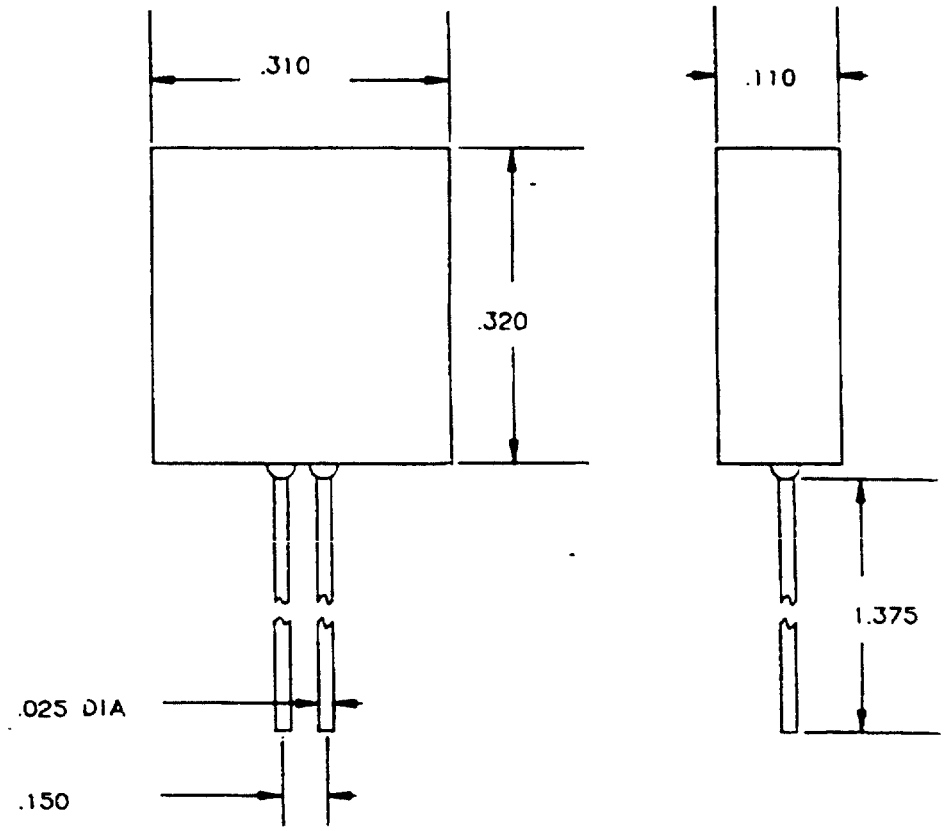


TABLE I. STYLES AND CHARACTERISTICS.

STYLE	POWER RATING (WATTS)	MAX WORKING VOLTAGE	RESISTANCE RANGE (OHMS)	
			MIN	MAX
RNC90	3/10	300	4.99	.121K

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, FILM, (INSULATED) ESTABLISHED RELIABILITY, STYLES RLR

MIL-R-39017/1, /2, /3, /5

SCOPE: FIXED, INSULATED, FILM RESISTORS, STYLE RLR PER MIL-R-39017 ARE SUITABLE FOR GENERAL PURPOSE USAGE. THEY ARE COMPARABLE IN SIZE TO COMPOSITION RESISTORS, BUT WITH SMALLER DESIGN TOLERANCES. APPROXIMATELY 5% MUST BE ADDED, TO THE INITIAL TOLERANCE TO OBTAIN THE OVERALL DESIGN TOLERANCE. THEIR HIGH FREQUENCY CHARACTERISTICS ARE COMPARABLE TO METAL FILM RESISTORS.

TEMPERATURE RANGE: -55°C TO +150°C, -55°C TO +70°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RLR07C1002FR

RLR07 C 1002 F R

STYLE

TERMINAL

LEAD MATERIAL AND FINISH SOLDER COATED OXYGEN FREE COPPER, SOLDERABLE AND WELDABLE.

RESISTANCE - FIRST THREE DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. SEE TABLE A.

TOLERANCE

F = ±1%

FAILURE RATE

R = 0.01%/1000 HRS

S = 0.001%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, FILM, (INSULATED) ESTABLISHED RELIABILITY, STYLES RLR

MIL-R-39017/1, /2, /3, /5

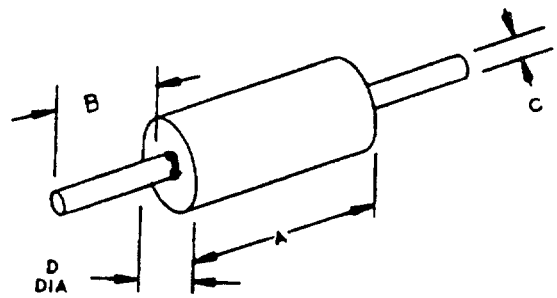


TABLE I. STYLES AND CHARACTERISTICS.

STYLE	MIL-R-39017/	POWER RATING (WATTS)	MAX WORKING VOLTAGE (DC OR RMS)	RESISTANCE RANGE (OHMS)		DIMENSIONS			
				MIN	MAX	A	B	C	D
RLR05	5	1/8	200	4.7	300K	.150	1.25	.016	.066
RLR07	1	1/4	250	10	10.0M	.250	1.50	.025	.090
RLR20	2	1/2	350	4.3	3.01M	.375	1.50	.032	.138
RLR32	3	1	500	10	2.70M	.562	1.50	.040	.19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED FILM, INSULATED, GENERAL PURPOSE, STYLE RL42


MIL-R-22684/8

SCOPE: FIXED, INSULATED, FILM RESISTORS, STYLE RL42TX PER MIL-R-22684/8 ARE RESISTORS SUITABLE FOR GENERAL PURPOSE USAGE. THEY ARE COMPARABLE IN SIZE TO COMPOSITION RESISTORS, BUT WITH SMALLER DESIGN TOLERANCES. APPROXIMATELY 5% MUST BE ADDED TO THE INITIAL TOLERANCE TO OBTAIN THE OVERALL DESIGN TOLERANCE. THEIR HIGH FREQUENCY CHARACTERISTICS ARE COMPARABLE TO METAL FILM RESISTORS.

TEMPERATURE RANGE: -55°C TO +150°C
-55°C TO +70°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

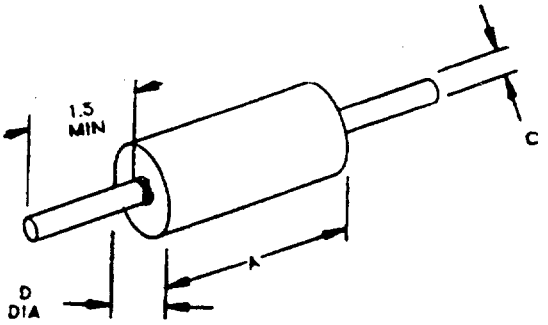

PART NUMBER EXAMPLE: M22684/08-1001

M22684	/08-	1001
MILITARY SPECIFICATION	SLASH SHEET NUMBER	DASH NUMBER SEE TABLE II.

TYPE DESIGNATION EXAMPLE: RL42S103J

RL42 S 103 J

STYLE

TERMINAL

RESISTANCE: SEE TABLE I

TOLERANCE
G = ±2%
J = ±5%

TABLE I. CHARACTERISTICS.

STYLE	POWER RATING (WATTS)	MAX WORKING VOLTAGE (DC OR RMS)	RESISTANCE RANGE (OHMS)		DIMENSIONS		
			MIN	MAX	A	D	C
RL42TX	2	500	10	1.5M	.648 .728	.280 .336	.043 .047

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED FILM, INSULATED, GENERAL PURPOSE, STYLE RL42

MIL-R-22684/8

TABLE II. PART NUMBER DESIGNATION

TYPE * DESIGNATION	NOMINAL TOTAL RESISTANCE VALUE (OHM)	DASH NUMBER	TYPE DESIGNATION	NOMINAL TOTAL RESISTANCE VALUE (OHM)	DASH NUMBER
RL42S100GTX	10	1001	RL42S361GTX	360	1075
RL42S110GTX	11	1003	RL42S391GTX	390	1077
RL42S120GTX	12	1005	RL42S431GTX	430	1079
RL42S130GTX	13	1007	RL42S471GTX	470	1081
RL42S150GTX	15	1009	RL42S511GTX	510	1083
RL42S160GTX	16	1011	RL42S561GTX	560	1085
RL42S180GTX	18	1013	RL42S621GTX	620	1087
RL42S200GTX	20	1015	RL42S681GTX	680	1089
RL42S220GTX	22	1017	RL42S751GTX	750	1091
RL42S240GTX	24	1019	RL42S821GTX	820	1093
RL42S270GTX	27	1021	RL42S911GTX	910	1095
RL42S300GTX	30	1023	RL42S102GTX	1,000	1097
RL42S330GTX	33	1025	RL42S112GTX	1,100	1099
RL42S360GTX	36	1027	RL42S122GTX	1,200	1101
RL42S390GTX	39	1029	RL42S132GTX	1,300	1103
RL42S430GTX	43	1031	RL42S152GTX	1,500	1105
RL42S470GTX	47	1033	RL42S162GTX	1,600	1107
RL42S510GTX	51	1035	RL42S182GTX	1,800	1109
RL42S560GTX	56	1037	RL42S202GTX	2,000	1111
RL42S620GTX	62	1039	RL42S222GTX	2,200	1113
RL42S680GTX	68	1041	RL42S242GTX	2,400	1115
RL42S750GTX	75	1043	RL42S272GTX	2,700	1117
RL42S820GTX	82	1045	RL42S302GTX	3,000	1119
RL42S910GTX	91	1047	RL42S332GTX	3,300	1121
RL42S101GTX	100	1049	RL42S362GTX	3,600	1123
RL42S111GTX	110	1051	RL42S392GTX	3,900	1125
RL42S121GTX	120	1053	RL42S432GTX	4,300	1127
RL42S131GTX	130	1055	RL42S472GTX	4,700	1129
RL42S151GTX	150	1057	RL42S512GTX	5,100	1131
RL42S161GTX	160	1059	RL42S562GTX	5,600	1133
RL42S181GTX	180	1061	RL42S622GTX	6,200	1135
RL42S201GTX	200	1063	RL42S682GTX	6,800	1137
RL42S221GTX	220	1065	RL42S752GTX	7,500	1139
RL42S241GTX	240	1067	RL42S822GTX	8,200	1141
RL42S271GTX	270	1069	RL42S912GTX	9,100	1143
RL42S301GTX	300	1071	RL42S103GTX	10,000	1145
RL42S331GTX	330	1073	RL42S113GTX	11,000	1147

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED FILM, INSULATED, GENERAL PURPOSE, STYLE RL42

MIL-R-22684/8

TABLE II. PART NUMBER DESIGNATION (CONT.)

TYPE DESIGNATION *	NOMINAL TOTAL RESISTANCE VALUE (OHM)	DASH NUMBER	TYPE DESIGNATION	NOMINAL TOTAL RESISTANCE VALUE (MEGOHM)	DASH NUMBER
RL42S123GTX	12,000	1149	RL42S134GTX	0.13	1199
RL42S133GTX	13,000	1151	RL42S154GTX	0.15	1201
RL42S153GTX	15,000	1153	RL42S164GTX	0.16	1203
RL42S163GTX	16,000	1155	RL42S184GTX	0.18	1205
RL42S183GTX	18,000	1157	RL42S204GTX	0.20	1207
RL42S203GTX	20,000	1159	RL42S224GTX	0.22	1209
RL42S223GTX	22,000	1161	RL42S244GTX	0.24	1211
RL42S243GTX	24,000	1163	RL42S274GTX	0.27	1213
RL42S273GTX	27,000	1165	RL42S304GTX	0.30	1215
RL42S303GTX	30,000	1167	RL42S334GTX	0.33	1217
RL42S333GTX	33,000	1169	RL42S364GTX	0.36	1219
RL42S363GTX	36,000	1171	RL42S394GTX	0.39	1221
RL42S393GTX	39,000	1173	RL42S434GTX	0.43	1223
RL42S433GTX	43,000	1175	RL42S474GTX	0.47	1225
RL42S473GTX	47,000	1177	RL42S514GTX	0.51	1227
RL42S513GTX	51,000	1179	RL42S564GTX	0.56	1229
RL42S563GTX	56,000	1181	RL42S624GTX	0.62	1231
RL42S623GTX	62,000	1183	RL42S684GTX	0.68	1233
RL42S683GTX	68,000	1185	RL42S754GTX	0.75	1235
RL42S753GTX	75,000	1187	RL42S824GTX	0.82	1237
RL42S823GTX	82,000	1189	RL42S914GTX	0.91	1239
RL42S913GTX	91,000	1191	RL42S105GTX	1.0	1241
			RL42S115GTX	1.1	1243
	(MEGOHM)		RL42S125GTX	1.2	1245
RL42S104GTX	0.10	1193	RL42S135GTX	1.3	1247
RL42S114GTX	0.11	1195	RL42S155GTX	1.5	1249
RL42S124GTX	0.12	1197			

* OR JTX. JTX uses next even dash number (ie. RL42S100JTX = 1002).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, WIRE-WOUND, (ACCURATE) ESTABLISHED RELIABILITY, STYLES RBR

MIL-R-39005/1, /3, /5

SCOPE: FIXED, INSULATED, PRECISION WIRE-WOUND RESISTORS, STYLE RBR, PER MIL-R-39005, ARE ESTABLISHED RELIABILITY RESISTORS SUITABLE FOR FULL-LOAD OPERATION AT +125°C IN APPLICATIONS REQUIRING LOW NOISE, HIGH STABILITY AND PRECISION. THESE RESISTORS WILL DEMONSTRATE REACTIVE CHARACTERISTICS IN RESPONSE TO AC. TO COMPENSATE FOR LONG TIME DRIFT, AGING AND TEMPERATURE COEFFICIENT, A DESIGN TOLERANCE OF .3% SHOULD BE ADDED TO THE INITIAL TOLERANCE TO OBTAIN THE ACTUAL OVERALL DESIGN TOLERANCE.

TEMPERATURE RANGE: -55°C TO +145°C
-55°C TO +125°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RBR52L12702AR

RBR52 L 12702 A R

STYLE

TERMINAL
L = SOLDERABLE
U = WELDABLE

RESISTANCE: FIRST FOUR DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. SEE TABLE A.

TOLERANCE
A = ±.05%
B = ±.10%
F = ±1.0%
Q = ±.02%
T = ±.01%

FAILURE RATE
P = 0.1%/1000 HRS
R = 0.01%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, WIRE-WOUND, (ACCURATE) ESTABLISHED RELIABILITY, STYLES RBR

MIL-R-39005/1, /3, /5

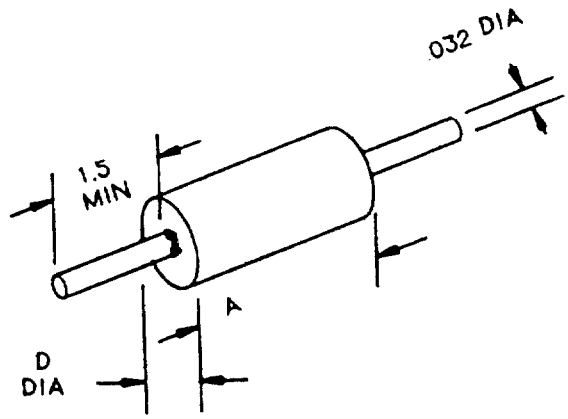


TABLE I. STYLES AND CHARACTERISTICS.

STYLE	MIL-R-39005/	POWER RATING (WATTS)	MAX WORKING VOLTAGE (DC OR RMS)	RESISTANCE RANGE (OHMS)		DIMENSIONS	
				MIN	MAX	A	D
RBR52	1	.500	600	.10	1.21M	1.000	.375
RBR54	3	.250	300	.10	.562M	.750	.250
RBR56	5	.125	150	.10	.220M	.344	.250
RBR75	9	.750	150	.10	.316M	.295	.250

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, WIRE-WOUND, (ACCURATE) ESTABLISHED RELIABILITY, STYLE RBR71

MIL-R-39005/6

SCOPE: FIXED, INSULATED, PRECISION WIRE-WOUND RESISTORS, STYLE RBR71, PER MIL-R-39005/6 ARE ESTABLISHED RELIABILITY RESISTORS SUITABLE FOR FULL-LOAD OPERATION AT +125°C IN APPLICATIONS REQUIRING LOW NOISE, HIGH STABILITY AND PRECISION. THESE RESISTORS WILL DEMONSTRATE REACTIVE CHARACTERISTICS IN RESPONSE TO AC. TO COMPENSATE FOR LONG TIME DRIFT, AGING AND TEMPERATURE COEFFICIENT, A DESIGN TOLERANCE OF .3% SHOULD BE ADDED TO THE INITIAL TOLERANCE TO OBTAIN THE ACTUAL OVERALL DESIGN TOLERANCE.

TEMPERATURE RANGE: -55°C TO +125°C

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RBR71L12702AR

RBR71 L 12702 A R

STYLE

TERMINAL
- L = SOLDERABLE
- U = WELDABLE

RESISTANCE: FIRST FOUR DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. SEE TABLE A.

TOLERANCE
- A = ±.05%
- B = ±.10%
- F = ±1.0%
- Q = ±.02%
- T = ±.01%

FAILURE RATE
- P = 0.1%/1000 HRS
- R = 0.01%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, WIRE-WOUND, (ACCURATE) ESTABLISHED RELIABILITY, STYLE RBR71

MIL-R-39005/6

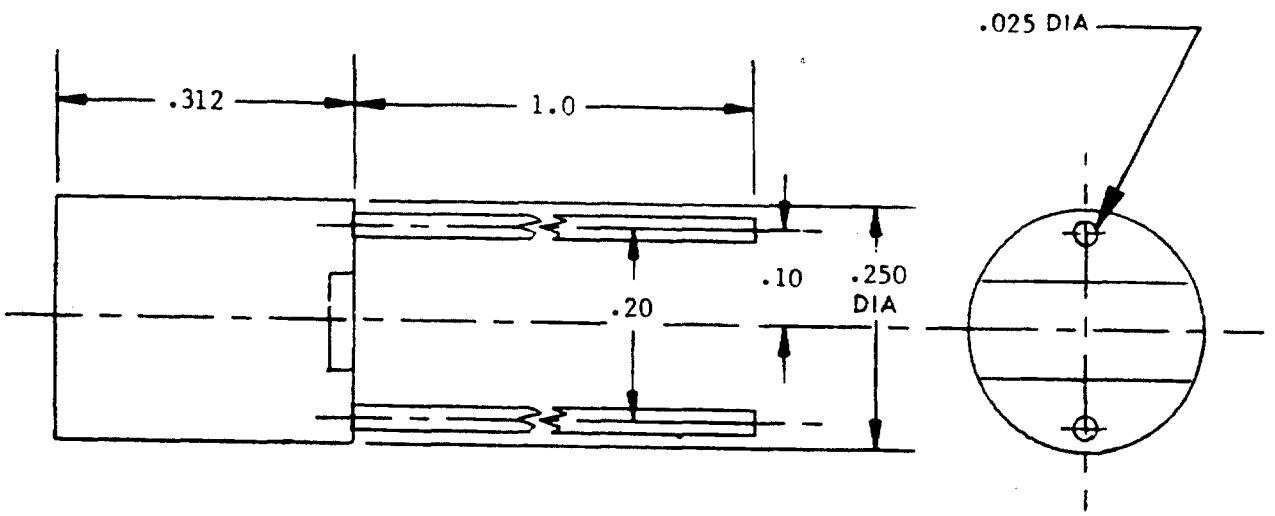


TABLE I. STYLES AND CHARACTERISTICS.

STYLE	POWER RATING (WATTS)	MAX WORKING VOLTAGE (DC OR RMS)	RESISTANCE RANGE (OHMS)	
			MIN	MAX
RBR71	1/8	150	.10	150K

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RESISTOR, FIXED, WIRE-WOUND, (POWER TYPE), STYLES RW

MIL-R-26/3

SCOPE: FIXED, POWER, WIRE-WOUND RESISTORS, STYLES PER MIL-R-26/3 ARE SUITABLE FOR GENERAL PURPOSE USAGE. INITIAL RESISTANCE TOLERANCE IS +5.0%. USE MIL-R-39007 STYLE RWR RESISTORS INSTEAD OF MIL-R-26 STYLE RW WHEN APPLICABLE.

TEMPERATURE RANGE: -55°C TO +350°C
-55°C TO +25°C AT RATED POWER

PART NUMBER EXAMPLE: RW33V100T

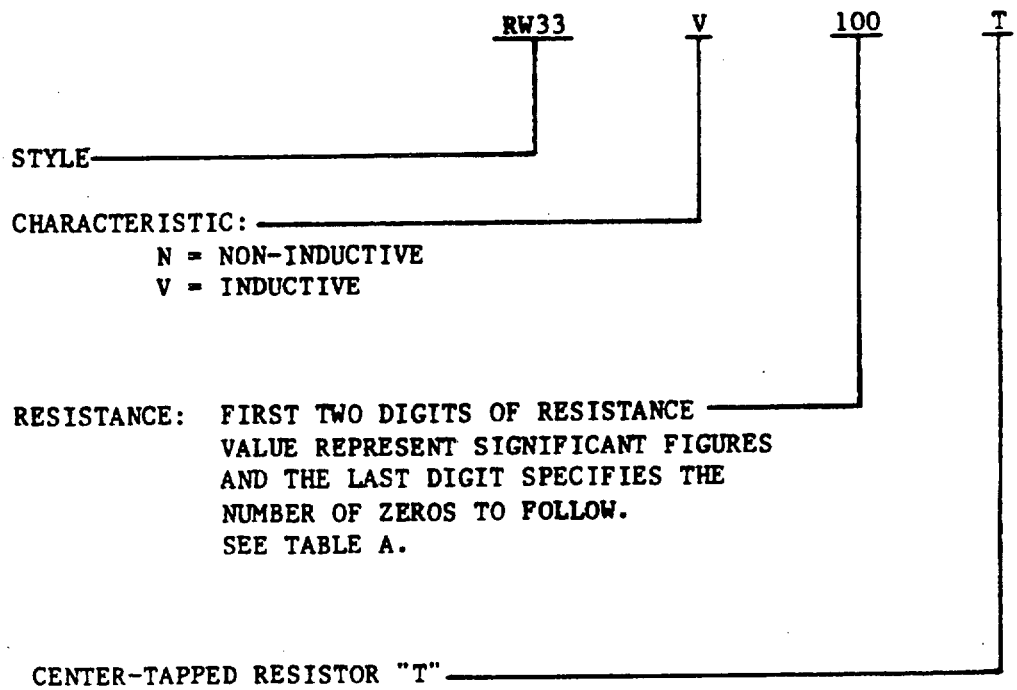

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, WIRE-WOUND, (POWER TYPE), STYLES RW

MIL-R-26/3

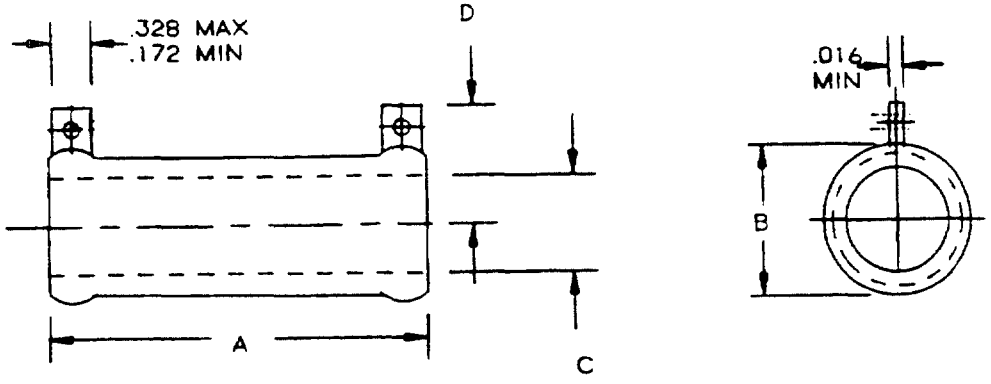


TABLE I. STYLES AND CHARACTERISTICS.

STYLE	POWER RATING (WATTS)		RESISTANCE* RANGE (OHMS)			DIMENSIONS			
	N	V	MIN	V MAX@	N MAX@	A	B MAX	C	D
RW29	11	11	.10	5.6K	2.7K	1.750	.500	.172 MIN	.625
RW31	14	14	.10	6.8K	3.3K	1.500	.594	.312	.625
RW33#	26	26	.10	18.0K	8.1K	3.000	.594	.187 MIN	.625
RW35#	55	55	.10	43.0K	20.0K	4.000	.906	.500	.812
RW37#	113	113	.10	91.0K	43.0K	6.000	1.312	.703 MIN	1.219
RW38#	159	159	.10	0.15M	75.0K	8.000	1.312	.750	1.219
RW47#	210	210	.10	0.18M	81.0K	10.500	1.312	.703 MIN	1.219

THE POWER RATING OF CENTER-TAPPED RESISTORS SHALL BE 90% OF THOSE SHOWN.
@ V = INDUCTIVE N = NON-INDUCTIVE
* (A) RESISTORS OF LESS THAN 1 OHM IN RESISTANCE VALUE SHALL HAVE A TOLERANCE OF ±10% OF THE NOMINAL RESISTANCE VALUE. IF CENTER-TAPPED, THE RESISTANCE TOLERANCE BETWEEN THE TAP AND TERMINAL SHALL BE ±10%.
(B) RESISTORS OF 1 OHM AND OVER IN RESISTANCE VALUE SHALL HAVE A TOLERANCE OF ±5% OF THE NOMINAL RESISTANCE VALUE. IF CENTER-TAPPED. THE RESISTANCE TOLERANCE BETWEEN THE TAP AND TERMINAL SHALL BE ±10%.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, WIRE-WOUND, (POWER TYPE), ESTABLISHED RELIABILITY, STYLE RWR

MIL-R-39007/7 THRU /12

SCOPE: FIXED, POWER, WIRE-WOUND RESISTORS, STYLE RWR PER MIL-R-39007 ARE ESTABLISHED RELIABILITY RESISTORS SUITABLE FOR GENERAL PURPOSE USAGE. THESE RESISTORS ARE NOT DESIGNED FOR HIGH FREQUENCY APPLICATIONS WHERE THE AC PERFORMANCE IS OF CRITICAL IMPORTANCE.

TEMPERATURE RANGE: -55°C TO +275°C
-55°C TO +25°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RWR81S1522FR

RWR81 S 1522 F R

STYLE

TERMINAL

S* = SOLDERABLE
W* = WELDABLE
N** = SOLDERABLE
Z** = WELDABLE

* INDUCTIVE
** NON-INDUCTIVE

RESISTANCE - FIRST THREE DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. SEE TABLE A.

TOLERANCE

B = ±.1%
D = ±.5%
F = ±1%

FAILURE RATE

R = 0.01%/1000 HRS
S = 0.001%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, WIRE-WOUND, (POWER TYPE), ESTABLISHED RELIABILITY, STYLE RWR

MIL-R-39007/7 THRU /12

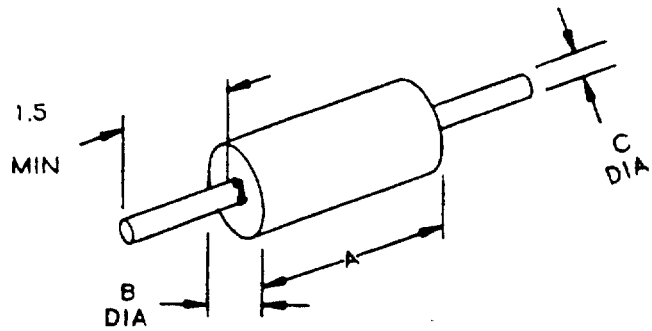


TABLE I. STYLES AND CHARACTERISTICS.

STYLE	MIL-R-39007/	POWER RATING (WATTS)	RESISTANCE RANGE (OHMS)				DIMENSIONS		
			INDUCTIVE		NON-INDUCTIVE				
			MIN	MAX	MIN	MAX	A	B	C
RWR78	7	10	.1	39.2K	10	19.6K	1.78	.375	.040
RWR80	8	2	.1	3.16K	10	1.58K	.406	.094	.020
RWR81	9	1	.1	1.0K	10	.499K	.250	.085	.020
RWR82	12	1.5	.1	1.3K	--	----	.312	.078	.020
RWR84	10	7	.1	12.4K	10	6.19K	.875	.312	.040
RWR89	11	3	.1	4.12K	10	2.05K	.560	.187	.032

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, WIRE-WOUND, (POWER TYPE, CHASSIS MOUNTED), ESTABLISHED RELIABILITY, STYLES RER

MIL-C-39009/1 AND /2

SCOPE: FIXED, INSULATED POWER-TYPE RESISTORS IN CHASSIS-MOUNTING, METALLIC CASES, PER MIL-R-39009, ARE ESTABLISHED RELIABILITY RESISTORS RECOMMENDED FOR GENERAL USE WHERE AC CHARACTERISTICS ARE NOT OF CRITICAL IMPORTANCE. TOLERANCE IS ±1%. RESISTANCE-TEMPERATURE COEFFICIENT IS ±30 PPM/°C FOR RESISTANCE VALUES OF 20 OHMS AND ABOVE AND ±50 PPM/°C BELOW 20 OHMS. RESISTORS MUST BE DERATED IF APPROPRIATE HEAT SINK IS NOT USED.

TEMPERATURE RANGE: -55°C TO +275°C, -55°C TO +25°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

NON-INDUCTIVE STYLE TO BE USED ONLY WHEN REQUIRED BY APPLICATION.

PART NUMBER EXAMPLE: RER40F1002P

RER40 — STYLE

F — TOLERANCE - F = ±1%

1002 — RESISTANCE - FIRST TWO DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. "R" MAY REPLACE ONE OF THE DIGITS TO REPRESENT A DECIMAL POINT IN WHICH CASE THE LAST DIGIT BECOMES SIGNIFICANT. SEE TABLE A.
EXAMPLE: 42R2 = 42.2 OHMS

P — FAILURE RATE
R = 0.01%/1000 HRS
P = 0.1%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, WIRE-WOUND, (POWER TYPE, CHASSIS MOUNTED), ESTABLISHED RELIABILITY, STYLES RER

MIL-C-39009/1 AND /2

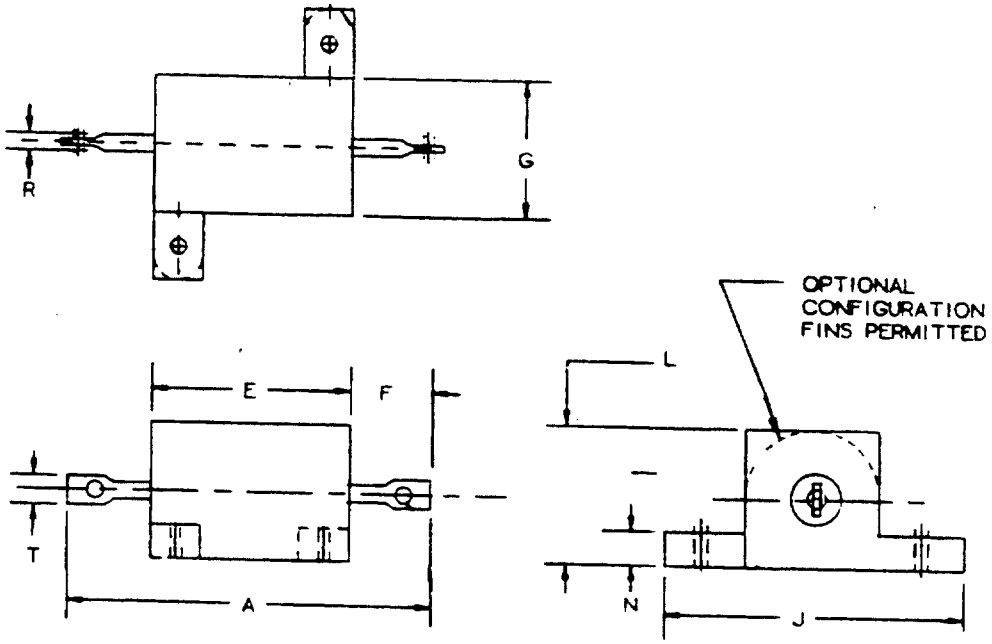


TABLE I. STYLES AND DIMENSIONS.

RESISTOR STYLE MIL-R-		DIMENSIONS								
39009/2 (NON-INDUCTIVE)	39009/1 (INDUCTIVE)	A	E	F	G	J	L	N	R MIN AWG	T MIN
RER40	RER60	1.125	.600	.266	.334	.646	.320	.065	16	.085
RER45	RER65	1.375	.750	.312	.438	.812	.406	.094	12	.140
RER50	RER70	1.938	1.062	.438	.531	1.094	.562	.094	12	.140
RER55	RER75	2.781	1.938	.438	.594	1.156	.625	.094	12	.140

TABLE II. CHARACTERISTICS.

STYLE	POWER RATING (WATTS)		RESISTANCE RANGE (OHMS)	
	FREE AIR	CHASSIS	MIN	MAX
RER40	3.0	5.0	1.0	1.65K
RER45	6.0	10.0	1.0	2.8 K
RER50	8.0	20.0	1.0	6.04K
RER55	10.0	30.0	1.0	19.6 K
RER60	3.0	5.0	0.1	3.32K
RER65	6.0	10.0	0.1	5.62K
RER70	8.0	20.0	0.1	12.1 K
RER75	10.0	30.0	0.1	39.2 K

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, WIRE-WOUND, (POWER TYPE) CHASSIS MOUNTED), STYLES RE77 AND RE80

MIL-R-18546/2

SCOPE: FIXED, POWER TYPE RESISTORS IN CHASSIS-MOUNTING METAL CASES RE77 AND RE80, PER MIL-R-18546/2, ARE RECOMMENDED FOR GENERAL USE WHERE AC CHARACTERISTICS ARE NOT OF CRITICAL IMPORTANCE. TOLERANCE IS ±1%. RESISTANCE TEMPERATURE COEFFICIENT IS ±30 PPM/°C FOR RESISTANCE VALUES OF 2K OHMS AND ABOVE AND 50 PPM/°C BELOW 2K OHMS. RESISTORS MUST BE DERATED IF APPROPRIATE HEAT SINK IS NOT USED.

TEMPERATURE RANGE: -55°C TO +275°C
-55°C TO +25°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RE77G1001

RE77 G 1001

STYLE

CHARACTERISTIC
G = INDUCTIVE
N = NON-INDUCTIVE

RESISTANCE - FIRST THREE DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW.
SEE TABLE A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, WIRE-WOUND, (POWER TYPE) CHASSIS MOUNTED), STYLES RE77 AND RE80

MIL-R-18546/2

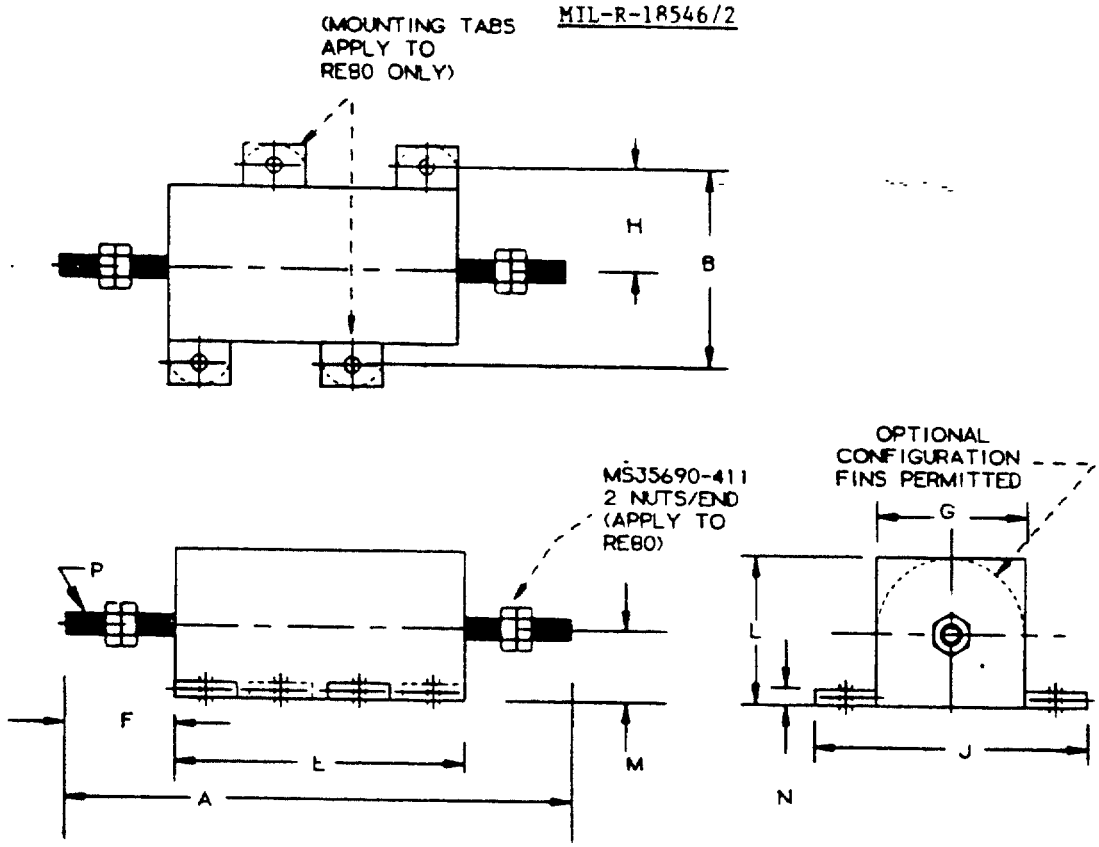


TABLE I. DIMENSIONS.

RESISTOR STYLE	DIMENSIONS										
	A	B	E	F	G	H	J	L	M	N	P UNC-2A
RE77	5.478	2.250	3.5	.989	1.812	1.125	2.812	1.750	.770	.188	12-24
RE80	7.000	2.500	4.5	1.25	2.125	1.25	3.000	2.188	1.00	.250	1/4-20

TABLE II. CHARACTERISTICS.

STYLE	RESISTANCE RANGE (OHMS)				POWER RATING (WATTS)
	G MIN	G MAX	N MIN	N MAX	
RE77	.05	29.4K	1.0	14.7K	75
RE80	.10	35.7K	1.0	17.4K	120

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE COMPOSITION, STYLES RV4 AND RV6

MIL-R-94/3 AND /5

SCOPE: VARIABLE COMPOSITION RESISTORS, STYLES RV4 AND RV6 PER MIL-R-94, ARE SUITABLE FOR CONTINUOUS OPERATION AT THE POWER RATINGS SPECIFIED AT A TEMPERATURE OF +70°C AND WHEN PROPERLY DERATED AS DIRECTED IN MIL-R-94, MAY BE OPERATAED AT AMBIENT TEMPERATURES UP TO +120°C OF A GENERAL-PURPOSE TYPE. THESE VARIABLE RESISTORS ARE AVAILABLE IN RESISTANCE TOLERANCES OF ±10 AND ±20 PERCENT.

TEMPERATURE RANGE: -55°C TO +120°C, -55°C TO +70°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 55-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RV4NAYSD103A

RV4	N	A	Y	S
STYLE	BUSHING N = STANDARD L = LOCKING S = SHAFT AND PANEL SEALED (STD) T = SHAFT AND PANEL SEALED (LOCKING)	SYMBOL A = NO SWITCH	CHARACTERISTIC 70°C MAX AMBIENT AT RATED WATTAGE 120°C MAX AMBIENT OPERATIONAL TEMPERATURE	SHAFT STYLE S = SLOTTED F = FLATTED

D	103	A
SHAFT LENGTH SEE TABLE III.	RESISTANCE FIRST TWO DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. SEE TABLE I OR II.	TOLERANCE SEE TABLE IV.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE COMPOSITION, STYLES RV4 AND RV6

MIL-R-94/3 AND /5

NOMINAL RESISTANCE & RATED CONTINUOUS WORKING VOLTAGE (TABLE NO. I & II)

TABLE NO.I

MILITARY PART NUMBER	RESISTANCE (OHMS)	VOLTAGE TAPER A	VOLTAGE TAPER C&F
RV4*****500*	50	A	C&F
RV4*****101*	100	10	---
RV4*****151*	150	14	10
RV4*****251*	250	17	12
RV4*****351*	350	22	16
RV4*****501*	500	26	18
RV4*****751*	750	32	23
RV4*****102*	1K	39	28
RV4*****202*	2K	45	32
RV4*****252*	2.5K	63.3	45
RV4*****352*	3.5K	71	50
RV4*****502*	5K	84	60
RV4*****752*	7.5K	100	71
RV4*****103*	10K	122	87
RV4*****153*	15K	141	100
RV4*****253*	25K	173	123
RV4*****353*	35K	224	160
RV4*****503*	50K	264	187
RV4*****753*	75K	316	224
RV4*****104*	100K	387	249
RV4*****154*	150K	445	316
RV4*****254*	250K	500	350
RV4*****354*	350K		
RV4*****504*	500K		
RV4*****754*	750K		
RV4*****105*	1M		
RV4*****155*	1.5M		
RV4*****205*	2M		
RV4*****255*	2.5M		
RV4*****355*	3.5M		
RV4*****505*	5M		

TABLE NO.II

MILITARY PART NUMBER	RESISTANCE (OHMS)	VOLTAGE TAPER A	VOLTAGE TAPER C&F
RV6*****101*	100	A	C&F
RV6*****251*	250	7	5
RV6*****501*	500	11	8
RV6*****102*	1K	16	11
RV6*****202*	2K	22	16
RV6*****252*	2.5K	31	22
RV6*****502*	5K	35	25
RV6*****103*	10K	50	36
RV6*****253*	25K	71	50
RV6*****503*	50K	112	80
RV6*****104*	100K	158	112
RV6*****254*	250K	224	160
RV6*****504*	500K	350	200
RV6*****105*	1M		
RV6*****205*	2M		
RV6*****255*	2.5M		
RV6*****505*	5M		

TABLE NO. III-LENGTH OF OPERATING SHAFT

SYMBOL	SHAFT LENGTH FROM MOUNTING SURFACE OF RESISTOR: BUSHING N & S	BUSHING L & T
A		5/8
B	1/2 (RV4 ONLY)	
L	3/8 (RV6 ONLY)	


TABLE NO. IV-RESISTANCE CHARACTERISTICS

TAPER & TOLERANCE TABLE		
SYMBOL	RESISTANCE TOLERANCE	
	TAPER	±
A	A	10%
B	A	20%
C	C	10%
D	C	20%
E	F	10%
F	F	20%


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE COMPOSITION, STYLS RV6


MIL-R-94/3

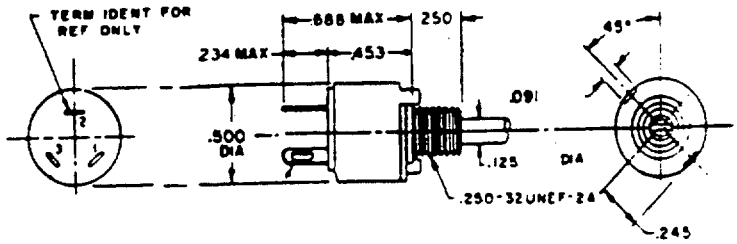


STANDARD-BUSHING TYPE

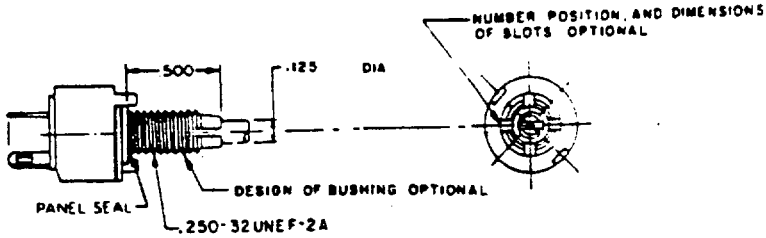


LOCKING-BUSHING TYPE

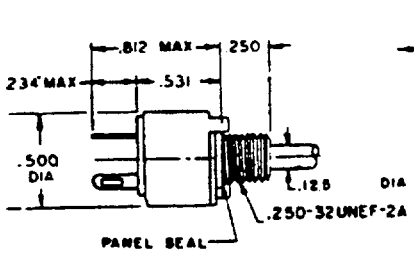


SHAFT-AND PANEL-SEALED-STANDARD BUSHING TYPE

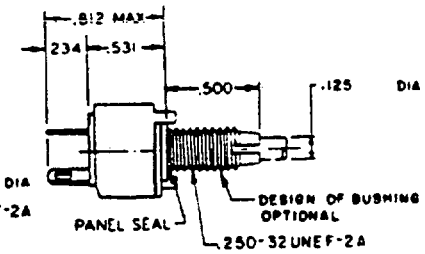

SHAFT AND PANEL-SEALED-LOCKING BUSHING TYPE



SLOTTED SHAFT




FLATTED SHAFT


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE COMPOSITION, STYLE RV4


MIL-R-94/5

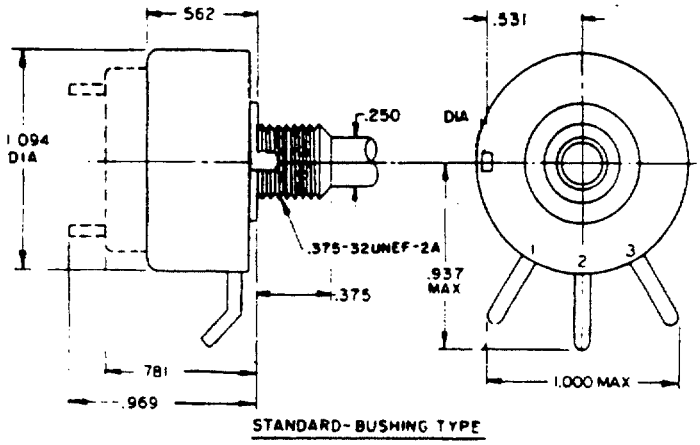


STANDARD-BUSHING TYPE

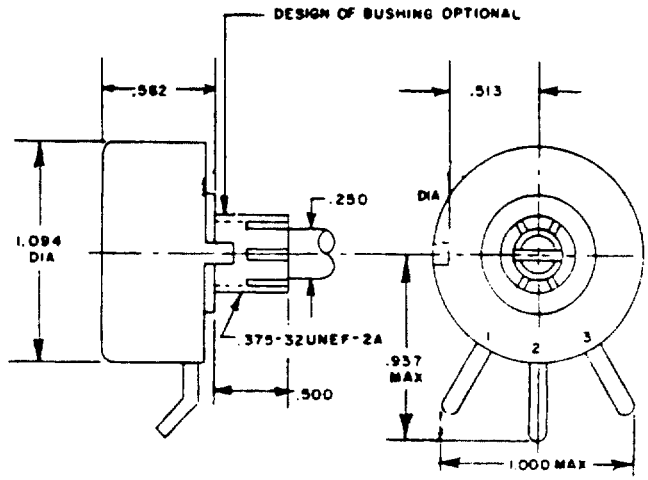


LOCKING-BUSHING TYPE

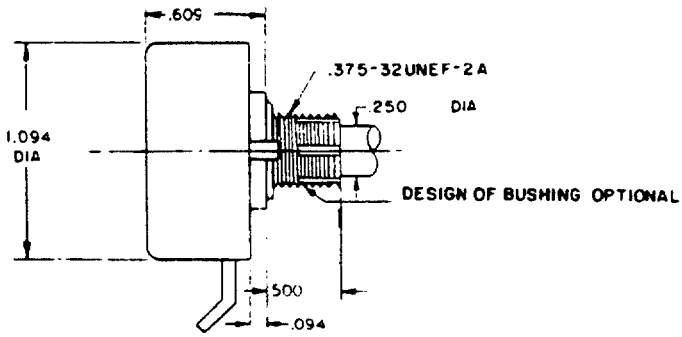


SHAFT-AND PANEL-SEALED-LOCKING BUSHING TYPE

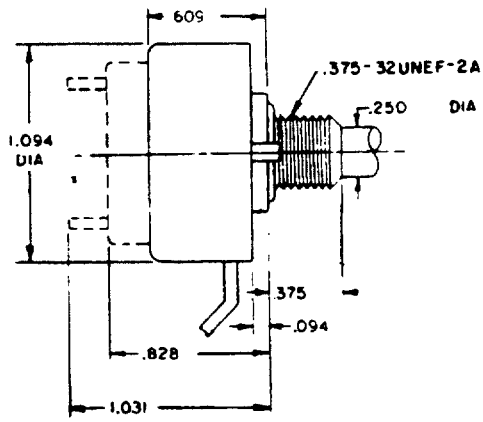

SHAFT-AND PANEL-SEALED-STANDARD BUSHING TYPE



FLATTED SHAFT



SLOTTED SHAFT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE COMPOSITION, STYLE 2RV7

MIL-R-94/6

SCOPE: VARIABLE COMPOSITION DUAL RESISTORS (2 GANGED), STYLE 2RV7 PER MIL-R-94/6, ARE SUITABLE FOR CONTINUOUS OPERATION AT THE RATED CONTINUOUS WORKING VOLTAGE AT A TEMPERATURE OF +70°C AND WHEN PROPERLY DERATED AS DIRECTED IN MIL-R-94, THESE DUAL VARIABLE RESISTORS ARE AVAILABLE IN RESISTANCE TOLERANCES OF ±10%.

TEMPERATURE RANGE: -55°C TO +120°C, -55°C TO +70°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 10G, 55-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: 2RV7NYSD103102A

2RV7	N	Y	SD
STYLE	BUSHING N = STANDARD L = LOCKING S = SHAFT AND PANEL SEALED (STD) T = SHAFT & PANEL SEALED (LOCKING)	CHARACTERISTIC 70°C MAX AMBIENT AT RATED WATTAGE 120°C MAX AMBIENT OPERATIONAL TEMPERATURE	OPERATING SHAFT S = SLOTTED SHAFT PLUS SYMBOL FROM TABLE II.

103	102	A
RESISTANCE (PANEL SECTION)	RESISTANCE (REAR SECTION)	RESISTANCE CHARACTERISTIC

FIRST TWO DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. SEE TABLE A.

TABLE I. CHARACTERISTICS.

STYLE	RESISTANCE POWER RATING (WATTS)		MAX WORKING VOLTAGE (DC OR RMS)	RESISTANCE RANGE (OHMS) CHARACTERISTIC A	
	REAR	FRONT OR PANEL		MIN	MAX
2RV7	1.6	2.0	500	50	5M


TABLE II. OPERATING SHAFT.

SYMBOL	SHAFT LENGTH FROM MOUNTING SURFACE (NOM) BUSHING	
	N & S	L & T
A		.625
B	.500	
D	.875	.875
G	1.250	
N	1.500	
J	2.000	
K	2.500	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RESISTOR, VARIABLE COMPOSITION, STYLE 2RV7

MIL-R-94/6

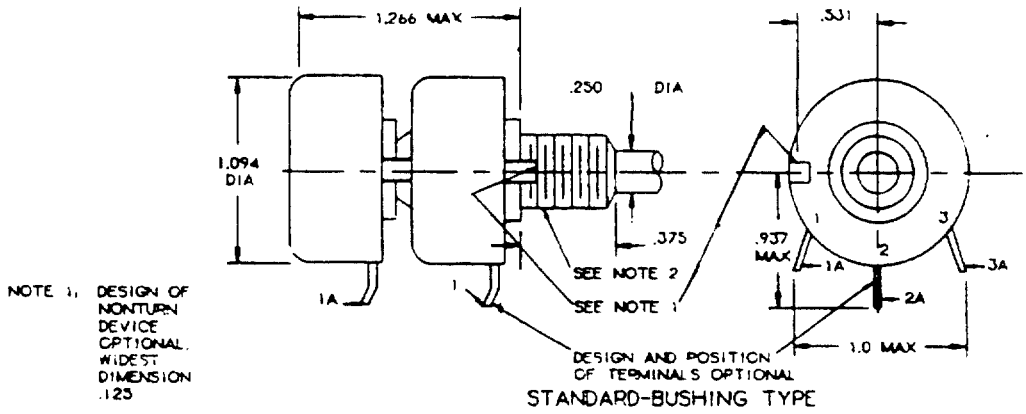


STANDARD-BUSHING TYPE


NOTE 2. 3/8 - 32UNEF - 2A

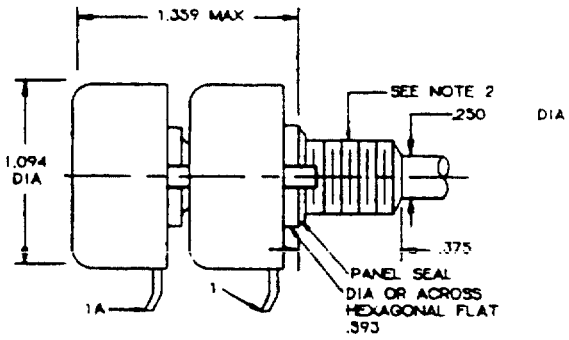


SHAFT-AND PANEL-SEALED-STANDARD BUSHING TYPE

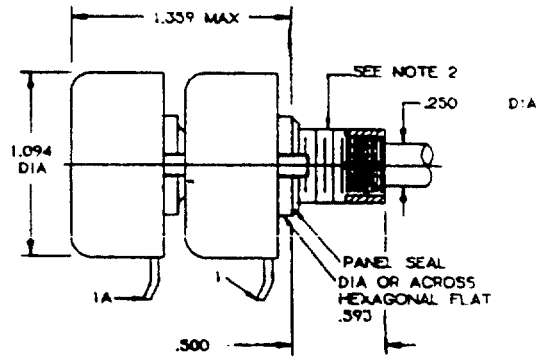

SHAFT-AND PANEL-SEALED-LOCKING BUSHING TYPE

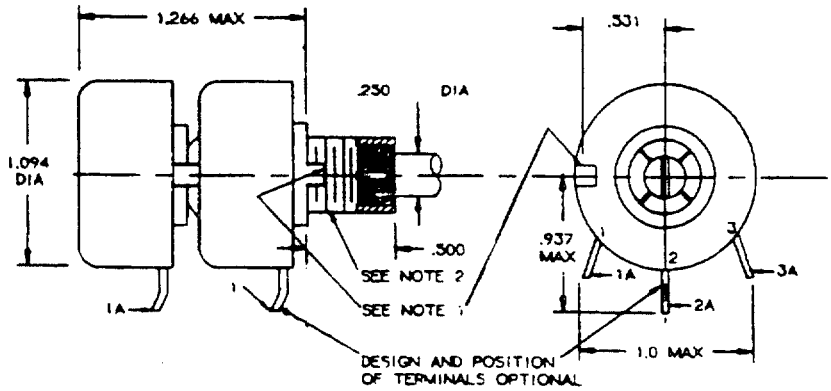

LOCKING-BUSHING TYPE



SHAFT DETAIL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND, STYLE RVC6

MIL-R-23285/3

SCOPE: VARIABLE NONWIRE-WOUND RESISTOR, STYLE RVC6 PER MIL-R-23285/3, IS CAPABLE OF FULL LOAD OPERATION AT MAXIMUM TEMPERATURE OF +125°C AND DERATED AT A MAXIMUM TEMPERATURE OF +175°C. RESISTANCE TOLERANCE IS ±10%.

TEMPERATURE RANGE: -65°C TO +175°C
-65°C TO +125°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

TABLE I.

TAPER & TOLERANCE TABLE		
SYMBOL	RESISTANCE TAPER	TOLERANCE
B	A (LINEAR CW)	± 10%
C	C (10% CW)	± 10%


PART NUMBER EXAMPLE: RVC6NYA103B

RVC6	N	Y	A	103	B
STYLE	BUSHING N = STANDARD L = LOCKING SEE TABLE III.	CHARACTERISTIC TEMPERATURE AND MOISTURE Y = ±250 PPM/°C	OPERATING SHAFT SEE TABLE II.	RESISTANCE FIRST TWO DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROES TO FOLLOW. SEE TABLE A	RESISTANCE CHARACTERISTIC SEE TABLE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND, STYLE RVC6

MIL-R-23285/3

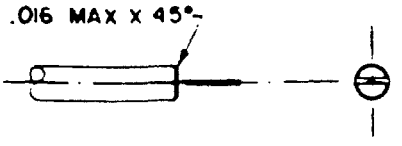

SHAFT DETAIL

TABLE II CHARACTERISTICS.

STYLE	RESISTANCE POWER RATING (WATTS) TAPER		MAX WORKING VOLTAGE (DC OR RMS) TAPER		RESISTANCE RANGE (OHMS) CHARACTERISTICS A & C	
					MIN	MAX
	A	C	A	C		
RV6	1/2	1/4	350	200	1.0K	1.0M


TABLE III OPERATING SHAFT TABLE.

SYMBOL	SHAFT LENGTH FROM MOUNTING SURFACE OF RESISTOR	
	BUSHING	BUSHING
	N & S	L & T
A		5/8
D	7/8	
L	3/8	


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND, STYLE RVC6


MIL-R-23285/3

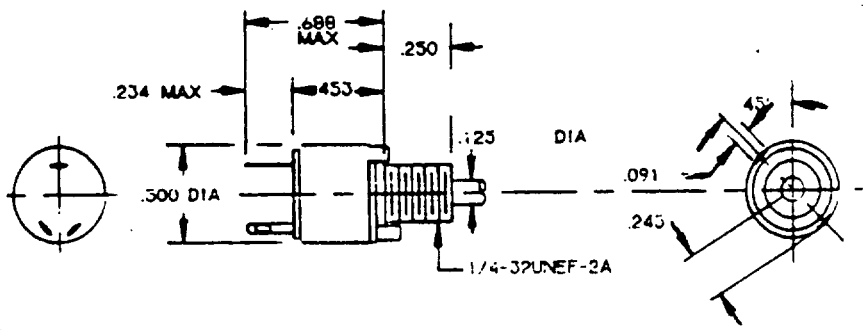


STANDARD-BUSHING TYPE

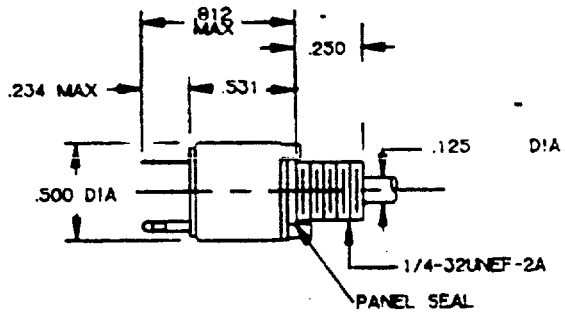

SHAFT-AND PANEL-SEALED-STANDARD BUSHING TYPE

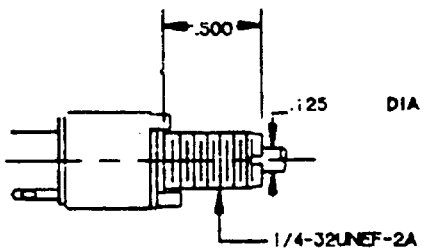

LOCKING-BUSHING TYPE

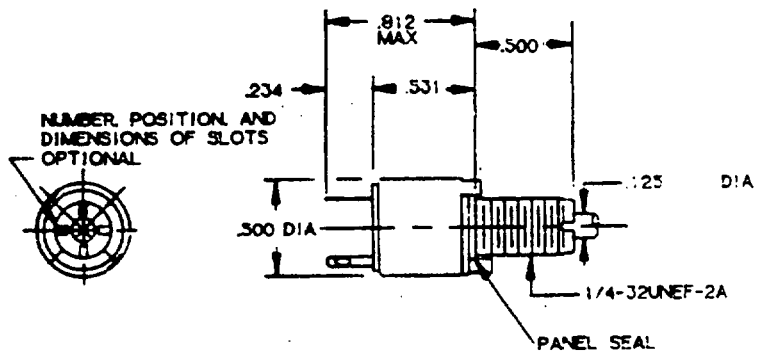

SHAFT-AND PANEL-SEALED-LOCKING BUSHING TYPE

(ALL VIEWS NOT TO SCALE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND, PRECISION, STYLES RQ

MIL-R-39023/1 THRU /8


SCOPE: VARIABLE, NONWIRE-WOUND PRECISION, RESISTORS, VARIOUS STYLES PER MIL-R-39023, ELECTRICAL OUTPUT, ARE LINEAR OR NON-LINEAR WITH RESPECT TO THE ANGULAR POSITION OF THE OPERATING SHAFT. RESISTORS ARE CAPABLE OF OPERATION AT MAXIMUM TEMPERATURE OF 70°C AND DERATED TO ZERO AT 125°C.

TEMPERATURE RANGE: -55°C TO +125°C, -55°C TO +70°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 15G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RQ090AA12AB103

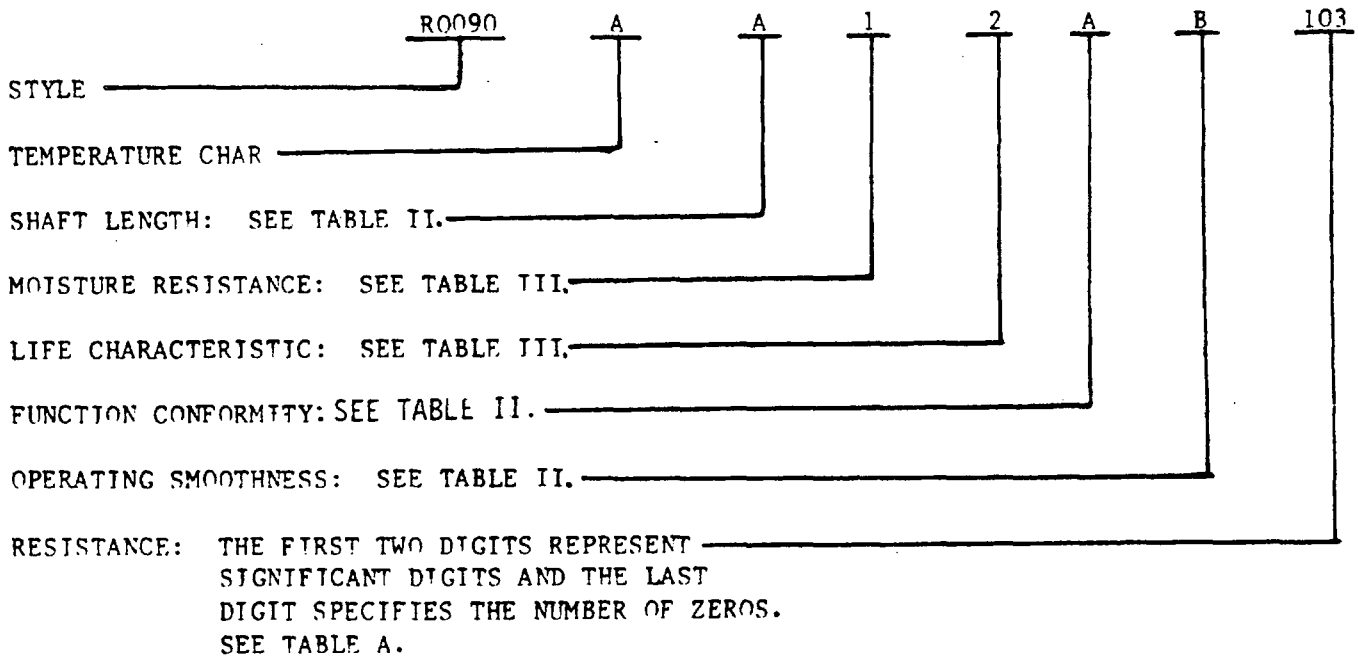

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RESISTOR, VARIABLE, NONWIRE-WOUND, PRECISION, STYLES RQ

MIL-R-39023/1 THRU /8

TABLE I. STYLE AND CHARACTERISTICS.


MIL-R-39023/	STYLE	POWER RATING (WATTS) 1/	MAX VOLTAGE (DC OR RMS)	RESISTANCE RANGE (OHMS)		TURNS	MAX STARTING & RUNNING TORQUE (OUNCE-INCH)			
				MIN	MAX		SINGLE CUP STARTING	SINGLE CUP RUNNING	PER EACH ADDITIONAL CUP STARTING	PER EACH ADDITIONAL CUP RUNNING
1	RQ090	1.0	250	100	1M	SINGLE	0.5	0.4	0.5	0.4
6	RQ100	2.5	500	1K	1M	10	1.0	0.8	1.0	0.8
2	RQ110	1.25	250	100	1M	SINGLE	0.5	0.4	0.5	0.4
3	RQ150	1.5	250	100	1M	SINGLE	1.0	0.8	1.0	0.8
7	RQ160	3.5	500	1K	3M	10	1.5	1.0	1.5	1.0
4	RQ200	2.0	250	100	1M	SINGLE	1.5	1.0	1.5	1.0
8	RQ210	4.5	500	1K	3M	10	2.0	1.0	2.0	1.0
5	RQ300	3.0	250	100	1M	SINGLE	1.5	1.0	1.5	1.0

1/ WHEN TWO SINGLE UNITS ARE GANGED, THE FIRST CUP SHALL BE RATED AT 75% AND THE SECOND CUP SHALL BE RATED AT 60% OF SINGLE UNIT RATED VOLTAGE

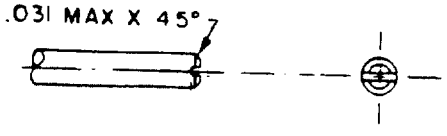

SHAFT DETAIL

STYLES RQ150, RQ160, RQ200, RQ210, RQ300

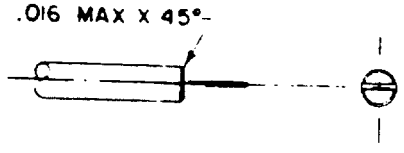

SHAFT DETAIL

STYLES RQ090, RQ100, RQ110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND, PRECISION, STYLES RQ

MIL-R-39023/1 THRU /8

TABLE II. CHARACTERISTICS.

SYMBOL	SHAFT LENGTH	FUNCTION-CONFORMITY		OUTPUT SMOOTHNESS (Eoutput/Einput) %H PEAK TO PEAK VOLTAGE	
		INITIAL ±%	DEGRADED ±%	INITIAL	DEGRATED
A	3/8	1.0	1.5	2.0	2.2
B	1/2	0.5	0.75	0.5	0.7
C	5/8	0.25	0.375	0.1	0.15
D	3/4	0.10	0.15	0.025	0.04
E	7/8	0.05	0.075	0.01	0.02
F	1.0	0.025	0.038	---	---

TABLE III. CHARACTERISTICS.

SYMBOL	RESISTANCE		LIFE CHARACTERISTIC (MULTI-TURN UNITS. 1 SHAFT REVOLUTION = 1 REVOLUTION)	
	MOISTURE TOTAL CHANGE IN RESISTANCE ± %	TEMP-ERATURE AVAILABLE	TOTAL NO. OF REVOL	DITHER LIFE IN HOURS
1	5	A	2.5×10^5	0.5
2	10	A	1.0×10^6	2.0
3	---	---	5.0×10^6	10.0
4	---	---	25.0×10^6	50.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND, PRECISION, STYLES RQ

MIL-R-39023/1 THRU /8

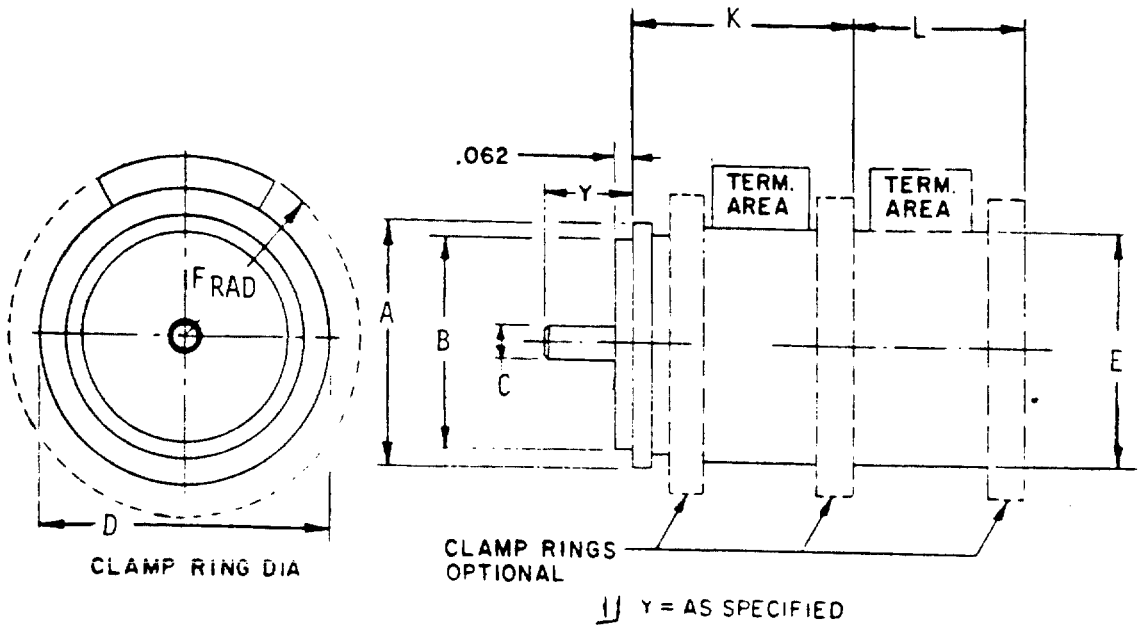


TABLE IV. DIMENSIONS.

STYLE	DIMENSIONS							
	A DIA	B DIA	C DIA	E MAX DIA	K MAX	L MAX	F MAX	D MAX
RQ090	.875	.7500	.1250	.906	.81	.62	.656	1.062
RQ100	.875	.7500	.1250	.906	1.88	1.44	.656	1.062
RQ110	1.062	.9688	.1250	1.125	.81	.62	.781	1.25
RQ150	1.437	1.3125	.2500	1.468	1.06	.88	1.094	1.625
RQ160	1.437	1.3125	.2500	1.468	2.50	2.00	1.094	1.625
RQ200	2.000	1.8750	.2500	2.031	1.31	.88	1.375	2.250
RQ210	2.000	1.8750	.2500	2.031	2.90	2.00	1.375	2.250
RQ300	3.000	2.8750	.2500	3.031	1.31	.88	1.750	3.250

Y = SHAFT TABLE SEE TABLE #2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND, (ADJUSTABLE TYPE, LEAD-SCREW ACTUATED), ESTABLISHED RELIABILITY, STYLES RJR

MIL-R-39035/1 THRU /5

SCOPE: VARIABLE NONWIRE-WOUND ESTABLISHED RELIABILITY RESISTORS WHICH ARE LEAD SCREW ACTUATED AND SINGLE TURN ARE DESIGNED FOR MATCHING, BALANCING, OR ADJUSTING CIRCUIT VARIABLES WHERE IT IS NECESSARY TO MAKE FINE ADJUSTMENTS TO ACHIEVE THE DESIRED SYSTEM ACCURACY. THE POWER RATING IS APPLICABLE TO +85°C AND DERATED TO ZERO AT +150°C. THE RESISTANCE TEMPERATURE CHARACTERISTIC IS +250 , +100 PPM/°C ALSO 50 PPM/°C MAXIMUM. THE RESISTANCE TOLERANCE IS +10%.

TEMPERATURE RANGE: -55°C TO +150°C, -55°C TO +85°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

TABLE I. STYLES AND CHARACTERISTICS.

MIL-R-39035/	STYLE	TERMINALS	POWER RATING (WATTS)	MAX WORKING VOLTAGE (DC OR RMS)	RESISTANCE RANGE (OHMS) CHARACTERISTICS						ELECTRICAL TRAVEL (TURNS)	
					C		F		H		MIN	MAX
					MIN	MAX	MIN	MAX	MIN	MAX		
1	RJR12	L, Y	3/4	300	10	1.0M	10	1.0M			17	27
2	RJR24	P, W, X	1/2	300	10	1.0M	10	1.0M	10	1.0M	15	30
3	RJR26	P, W, X	1/4	200	10	1.0M	10	1.0M	10	1.0M	10	25
5	RJR28	P	3/10	300	10	2.0M	10	2.0M			5	15
4	RJR50	P	1/4	200			10	1.0M			SINGLE	

PART NUMBER EXAMPLE: RJR12CL103M

RJR12 C L 103 P

STYLE: RJR12

CHARACTERISTIC: C = ±250 PPM/°C
F = ±100 PPM/°C
H = ± 50 PPM/°C

TERMINAL: SEE TABLE II.

RESISTANCE: FIRST TWO DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. SEE TABLE I.

FAILURE RATE:
P = ±0.1%/1000 HRS
R = ±0.01%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND (ADJUSTABLE TYPE), ESTABLISHED RELIABILITY, STYLES RJR


MIL-R-39035/1, THRU /5, /7

TABLE II. TERMINALS

SYMBOL	TYPE OF TERMINAL
L-----	FLEXIBLE, INSULATED-WIRE LEADS
P-----	PRINTED CIRCUIT PINS
W ---	PRINTED CIRCUIT PINS (EDGE MOUNTED)
X ---	PRINTED CIRCUIT PINS (EDGE MOUNTED, ALTERNATE CONFIGURATION)
Y ---	PRINTED CIRCUIT PINS (STAGGERED)

RESISTOR, VARIABLE, NONWIRE-WOUND (ADJUSTABLE TYPE), ESTABLISHED RELIABILITY, STYLE RJR50

MIL-R-39035/4

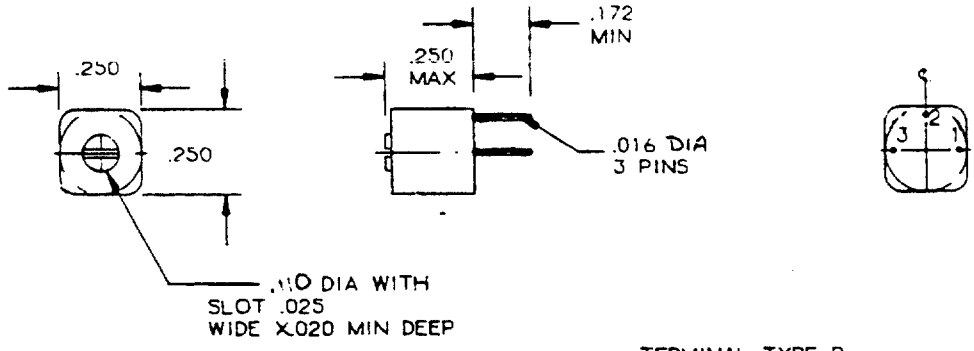


TERMINAL TYPE P


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND (ADJUSTABLE TYPE), ESTABLISHED RELIABILITY, STYLES RJR12

MIL-R-39035/1

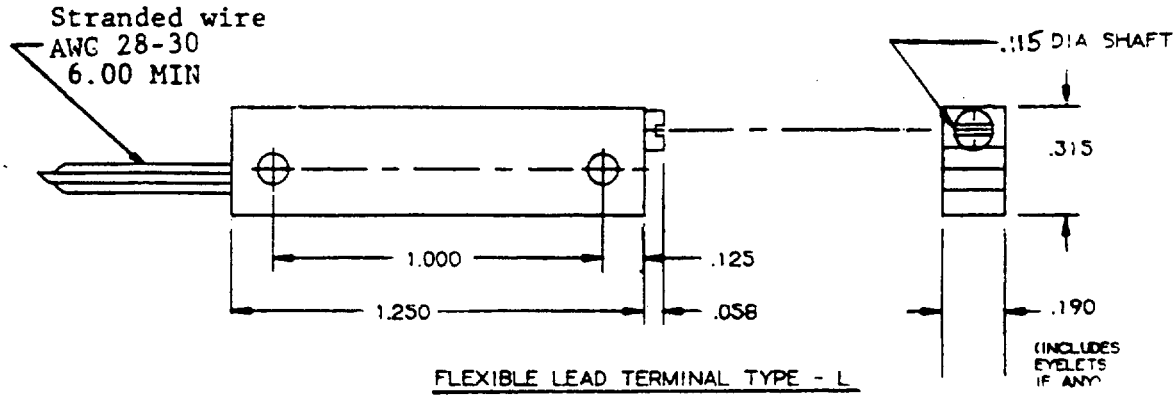

FLEXIBLE LEAD TERMINAL TYPE - L

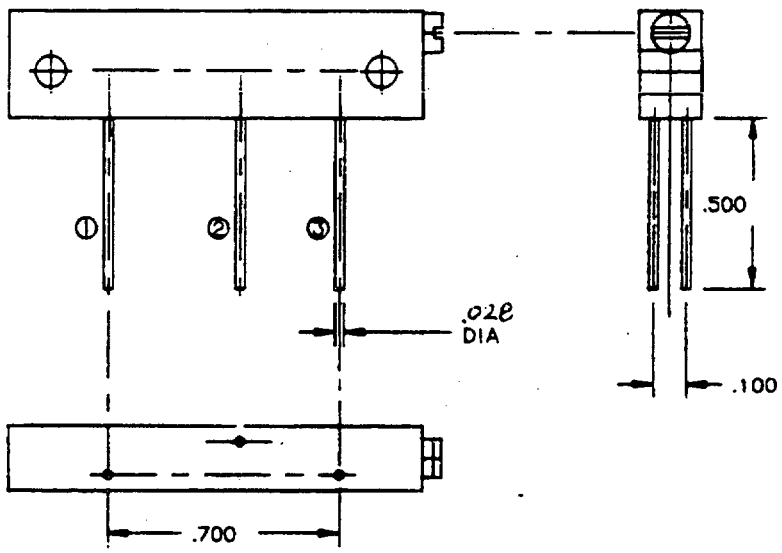


PRINTED-CIRCUIT PIN TERMINAL TYPE - Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND (ADJUSTABLE TYPE), ESTABLISHED RELIABILITY, STYLE RJR24


MIL-R-39035/2

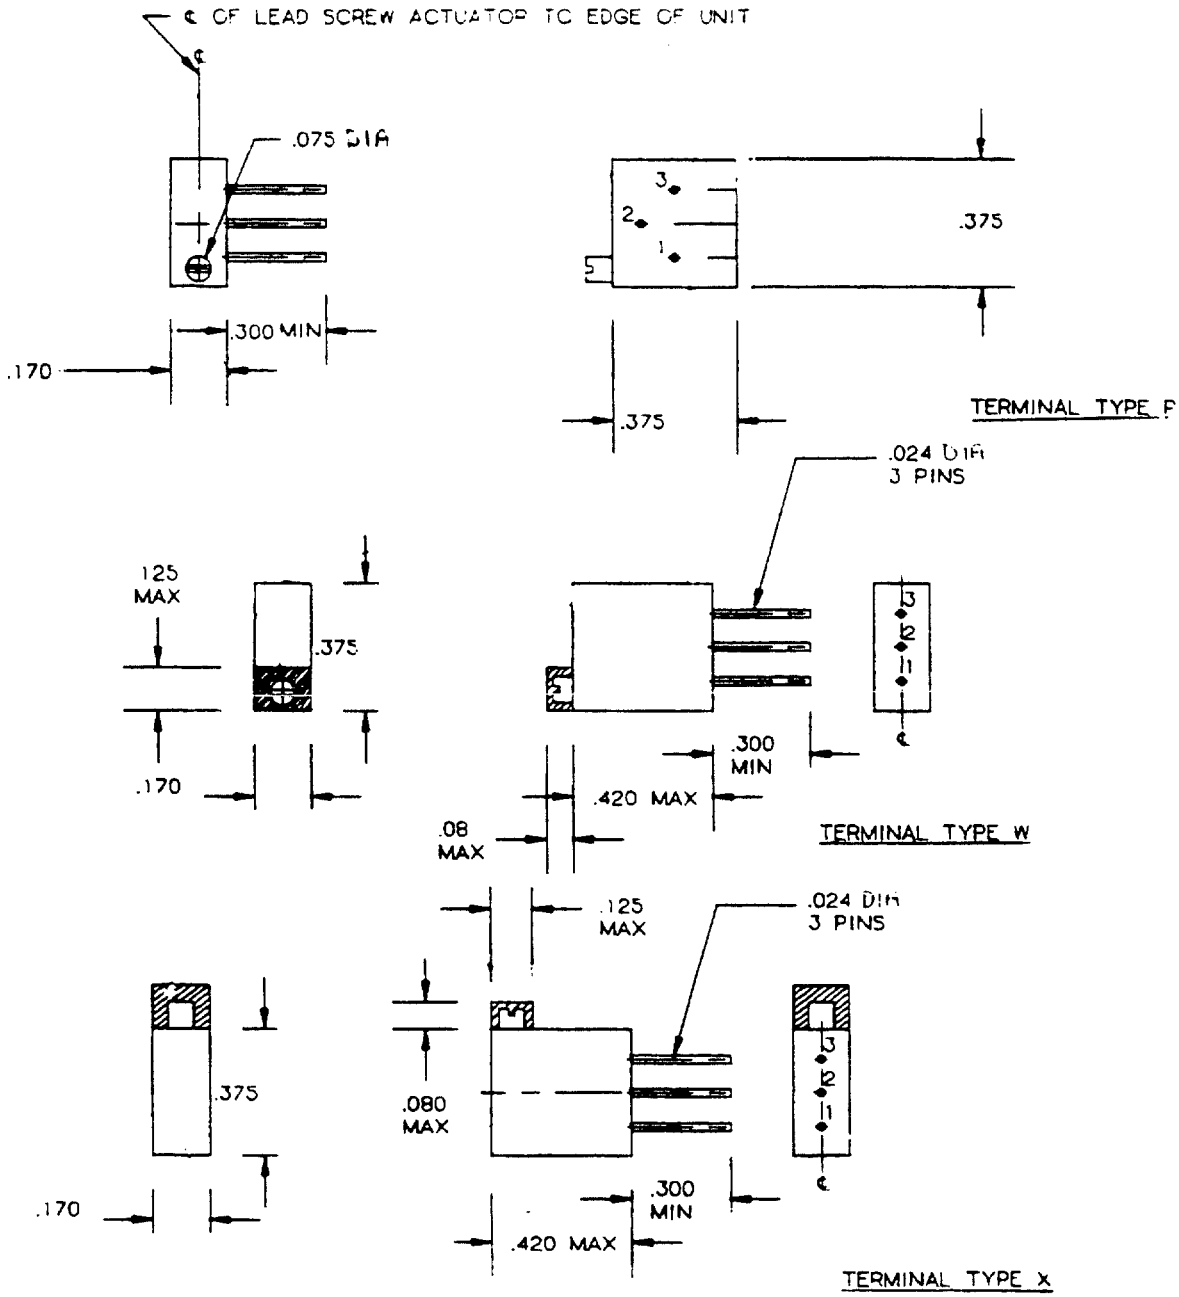



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND (ADJUSTABLE TYPE), ESTABLISHED RELIABILITY, STYLE RJR26

MIL-R-39035/3

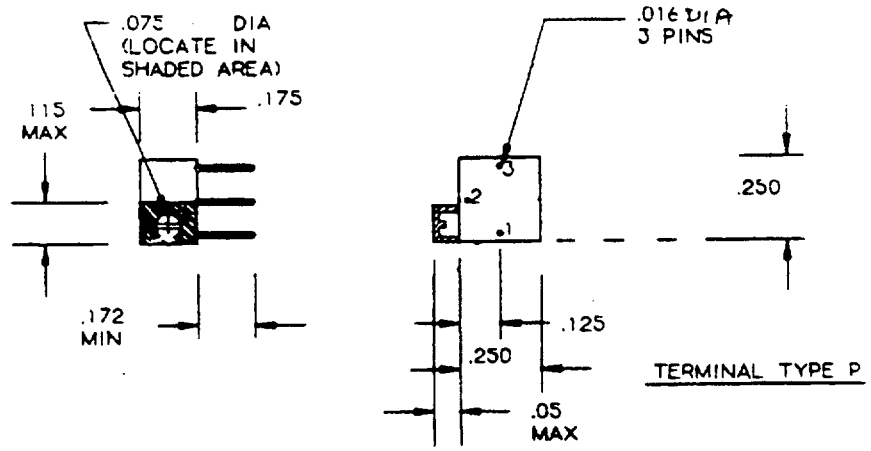

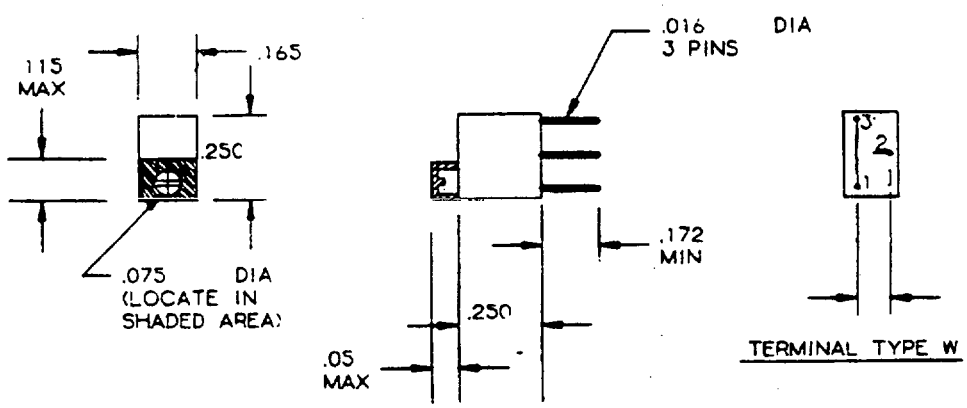


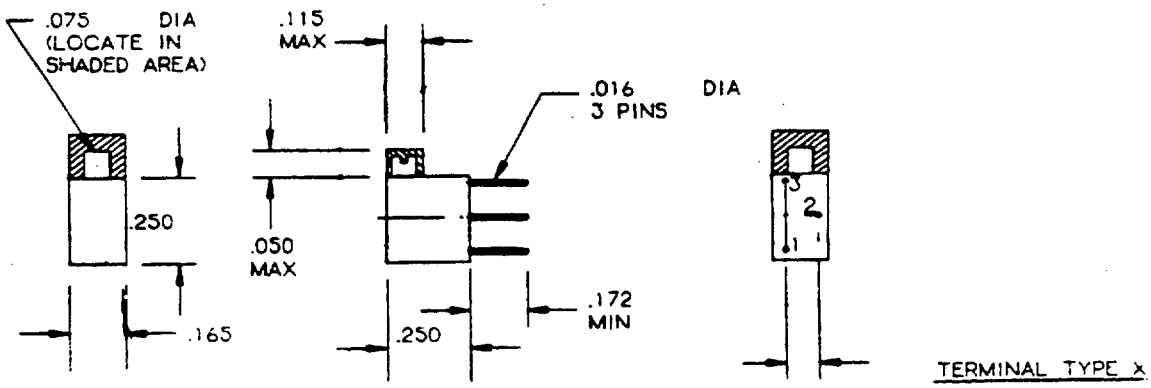


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, NONWIRE-WOUND (ADJUSTABLE TYPE), ESTABLISHED RELIABILITY, STYLE RJR28

MIL-R-39035/5

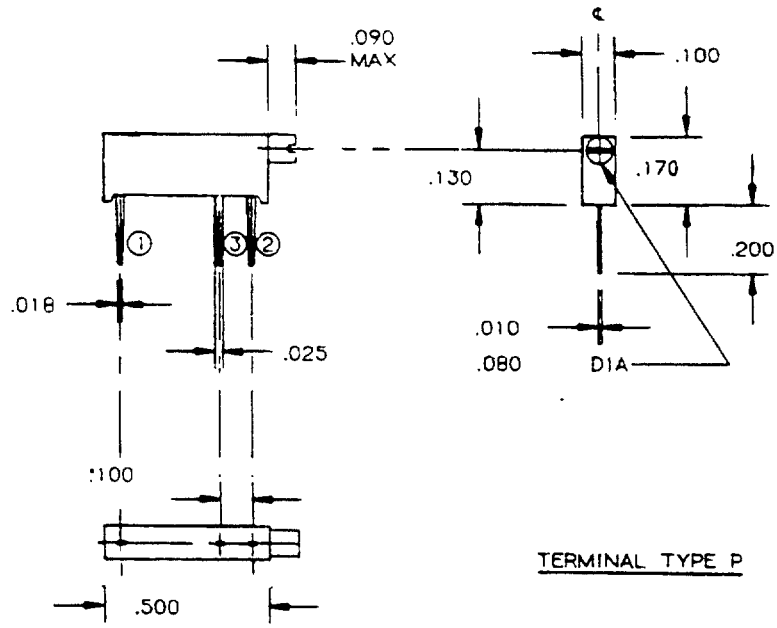

TERMINAL TYPE P

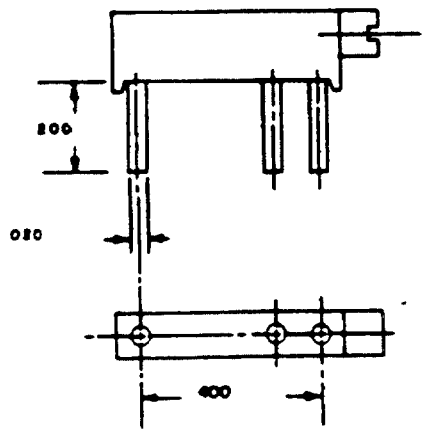

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, POWER TYPE, STYLES RP

MIL-R-22

SCOPE: VARIABLE, WIRE-WOUND POWER TYPE, STYLES RP05, RP06, RP10, RP15, RP20, RP25, AND RP30 PER MIL-R-22, ARE DESIGNED FOR MATCHING OR ADJUSTING CIRCUIT VARIABLES WHERE IT IS NECESSARY TO MAKE FINE ADJUSTMENTS TO ACHIEVE THE DESIRED SYSTEM ACCURACY. THE RESISTANCE TOLERANCE IS ±10%.


TEMPERATURE RANGE: -55°C TO +125, 25°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 15G, 10-2000 Hz (MIL-STD-202, METHOD 204)

SLASH		STYLE
1	UNENCLOSED	RP06
3	UNENCLOSED	RP10
5	UNENCLOSED	RP15
7	UNENCLOSED	RP20
8	UNENCLOSED	RP25
9	UNENCLOSED	RP30
15	ENCLOSED	RP05


PART NUMBER EXAMPLE: M22/15-00011SB

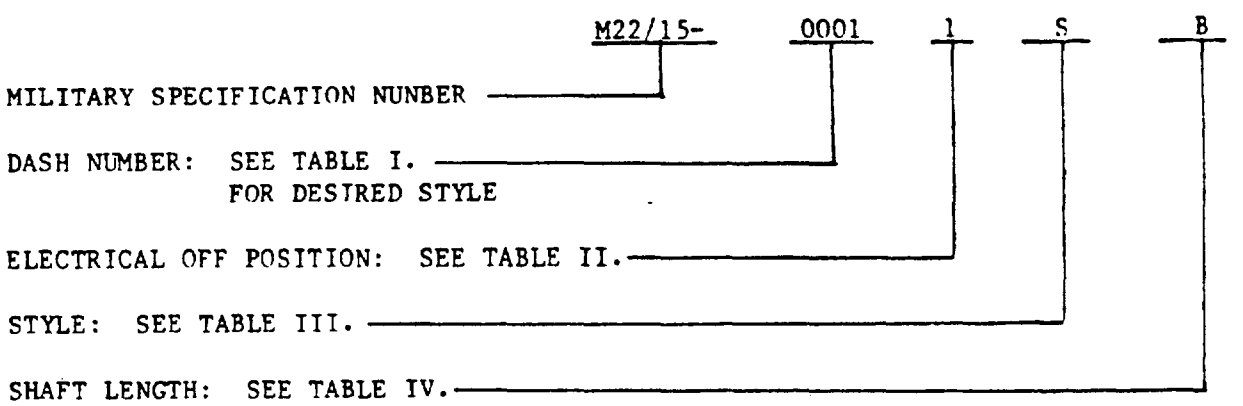


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, POWER TYPE, STYLES RP06, RP10, RP15, RP20, RP25, AND RP30

MIL-R-22

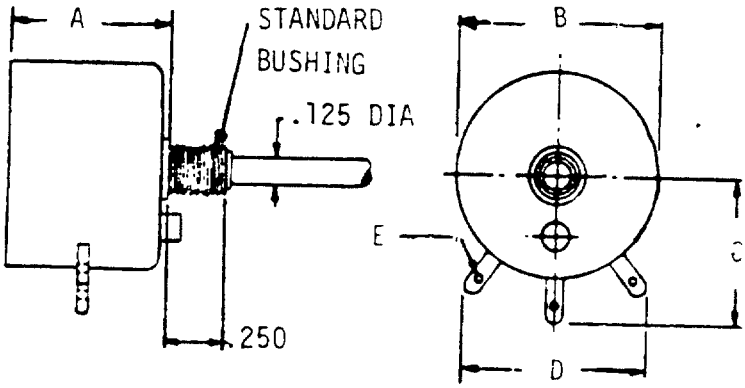



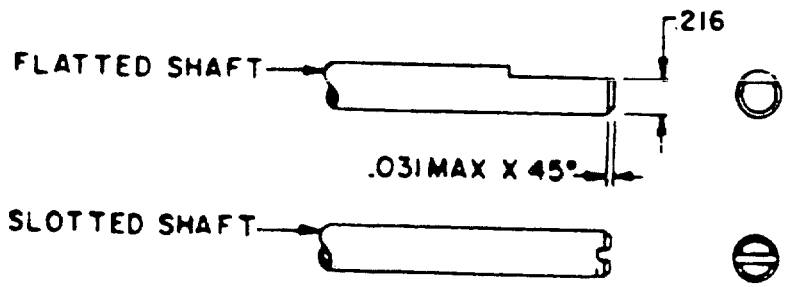


TABLE I. STYLE RP DIMENSIONS.


STYLE	DIMENSIONS				
	A	B	C	D	E
RP05	.656	.525	.250	–	–
RP06	.688	.875	.625	.781	.031
RP10	1.410	1.680	1.420	1.880	.080
RP15	1.440	2.410	2.000	2.500	.138
RP20	1.780	2.810	1.820	2.560	*
RP25	1.780	3.190	2.190	2.690	*
RP30	2.030	4.060	2.440	3.000	*


* TO CLEAR #8 SCREW


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND POWER TYPE, STYLE RP05

MIL-R-22

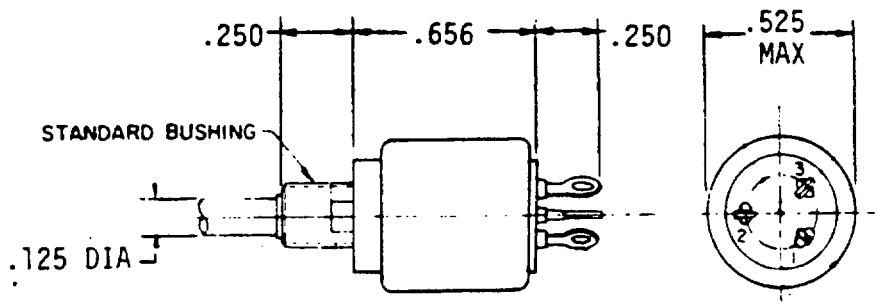



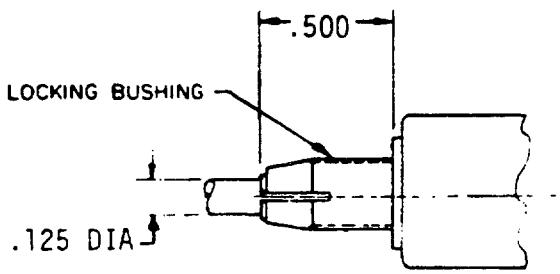

SLOTTED SHAFT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND POWER TYPE, STYLES RP05, RP06, RP10, RP15, RP20, RP25, AND RP30

MIL-R-22

TABLE II. ELECTRICAL OFF POSITION.

SYMBOL	ELECTRICAL OFF POSITION
1 *	NO ELECTRICAL OFF POSITION
2	ELECTRICAL OFF POSITION AT END OF ROTATION OF CONTROL KNOB IN A COUNTERCLOCKWISE DIRECTION.

* SYMBOL IS THE ONLY USED FOR STYLE RP05

TABLE III. SHAFT STYLE AND TYPE OF MOUNTING.

SYMBOL	SHAFT STYLE	STYLES RP10,RP15,RP20, RP25, AND RP30 1/4" DIA SHAFT		STYLES RP05, RP06 1/8" DIA SHAFT	
		STD BUSH	LOCK BUSH	STD BUSH	LOCK BUSH
F *	FLATTED	X	---	X	---
S	SLOTTED	X	---	X	---
T	FLATTED	---	X	---	X
U	SLOTTED	---	X	---	X

* SYMBOLS F AND T NOT USED FOR STYLES RP05 AND RP0

TABLE IV. LENGTH OF OPERATING SHAFT
STANDARD LENGTH OF SHAFT MEASURED
FROM MOUNTING SURFACE OF RESISTOR.

SYMBOL	STYLES RP10, 15, 20, 25, 30 1/4" DIA SHAFT				STYLES RP05, RP06 1/8" DIA SHAFT	
	FLATTED BUSHING		SLOTTED BUSHING		SLOTTED BUSHING	
	STD	LOCK	STD	LOCK	STD	LOCK
B *	---	---	---	5/8	5/8	5/8
D *	7/8	---	7/8	---	---	7/8
G	---	1-1/4	---	1-1/4	---	---
K	2-1/2	---	2-1/2	---	2-1/2	---

* SYMBOLS B AND D ARE THE ONLY ONES USED FOR RP05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, POWER TYPE, STYLES RP

MIL-R-22

TABLE I. TYPE AND CHARACTERISTICS.

TYPE DESIGNATION	PART NUMBER	NOMINAL TOTAL RESISTANCE VALUE (OHMS)	MAXIMUM CURRENT (AMPS)
RP05---100KK	M22/15-0001---	10	0.707
RP05---150KK	M22/15-0002---	15	0.583
RP05---250KK	M22/15-0003---	25	0.447
RP05---350KK	M22/15-0004---	35	0.347
RP05---500KK	M22/15-0005---	50	0.316
RP05---750KK	M22/15-0006---	75	0.264
RP05---101KK	M22/15-0007---	100	0.223
RP05---151KK	M22/15-0008---	150	0.132
RP05---201KK	M22/15-0009---	200	0.158
RP05---251KK	M22/15-0010---	250	0.141
RP05---351KK	M22/15-0011---	350	0.118
RP05---501KK	M22/15-0012---	500	0.100
RP05---751KK	M22/15-0013---	750	0.082
RP05---102KK	M22/15-0014---	1000	0.071
RP05---152KK	M22/15-0015---	1500	0.056
RP05---252KK	M22/15-0016---	2500	0.045
RP05---352KK	M22/15-0017---	3500	0.037
RP05---502KK	M22/15-0018---	5000	0.032
RP06---1R0KK	M22/01-0001---	1	3.53
RP06---2R0KK	M22/01-0002---	2	2.50
RP06---2R5KK	M22/01-0003---	2.5	2.23
RP06---3R0KK	M22/01-0004---	3	2.04
RP06---5R0KK	M22/01-0005---	5	1.58
RP06---6R0KK	M22/01-0006---	6	1.44
RP06---8R0KK	M22/01-0007---	8	1.25
RP06---100KK	M22/01-0008---	10	1.12
RP06---150KK	M22/01-0009---	15	0.91
RP06---250KK	M22/01-0010---	25	0.71
RP06---350KK	M22/01-0011---	35	0.62
RP06---500KK	M22/01-0012---	50	0.50
RP06---750KK	M22/01-0013---	75	0.41
RP06---101KK	M22/01-0014---	100	0.35
RP06---151KK	M22/01-0015---	150	0.29
RP06---201KK	M22/01-0016---	200	0.25
RP06---251KK	M22/01-0017---	250	0.22
RP06---351KK	M22/01-0018---	350	0.19
RP06---501KK	M22/01-0019---	500	0.16
RP06---751KK	M22/01-0020---	750	0.13
RP06---102KK	M22/01-0021---	1000	0.11
RP06---152KK	M22/01-0022---	1500	0.091
RP06---252KK	M22/01-0023---	2500	0.071
RP06---352KK	M22/01-0024---	3500	0.060

Source: https://assist.dla.mil -- Downloaded: 2026-01-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, POWER TYPE, STYLES RP

MIL-R-22

TABLE I. TYPE AND CHARACTERISITCS. (cont)

TYPE DESIGNATION	PART NUMBER	NOMINAL TOTAL RESISTANCE VALUE (OHMS)	MAXIMUM CURRENT (AMPS)
RP10---1R0KK	M22/03-0025---	1	5.00
RP10---2R0KK	M22/03-0001---	2	3.54
RP10---2R5KK	M22/03-0002---	2.5	3.16
RP10---3R0KK	M22/03-0003---	3	2.89
RP10---5R0KK	M22/03-0004---	5	2.24
RP10---6R0KK	M22/03-0005---	6	2.04
RP10---8R0KK	M22/03-0006---	8	1.77
RP10---10OKK	M22/03-0007---	10	1.58
RP10---15OKK	M22/03-0008---	15	1.29
RP10---25OKK	M22/03-0009---	25	1.00
RP10---35OKK	M22/03-0010---	35	0.85
RP10---50OKK	M22/03-0011---	50	0.71
RP10---75OKK	M22/03-0012---	75	0.58
RP10---101KK	M22/03-0013---	100	0.50
RP10---151KK	M22/03-0014---	150	0.41
RP10---201KK	M22/03-0015---	200	0.35
RP10---251KK	M22/03-0016---	250	0.32
RP10---351KK	M22/03-0017---	350	0.27
RP10---501KK	M22/03-0018---	500	0.22
RP10---751KK	M22/03-0019---	750	0.18
RP10---102KK	M22/03-0020---	1000	0.16
RP10---152KK	M22/03-0021---	1500	0.13
RP10---252KK	M22/03-0022---	2500	0.10
RP10---352KK	M22/03-0023---	3500	0.08
RP10---502KK	M22/03-0024---	5000	0.07
RP15---1R0KK	M22/05-0001---	1	7.07
RP15---2R0KK	M22/05-0002---	2	5.00
RP15---2R5KK	M22/05-0003---	2.5	4.47
RP15---3R0KK	M22/05-0004---	3	4.08
RP15---4R0KK	M22/05-0005---	4	3.54
RP15---5R0KK	M22/05-0006---	5	3.16
RP15---6R0KK	M22/05-0007---	6	2.99
RP15---8R0KK	M22/05-0008---	8	2.50
RP15---10OKK	M22/05-0009---	10	2.24
RP15---12OKK	M22/05-0010---	12	2.04
RP15---15OKK	M22/05-0011---	15	1.83
RP15---25OKK	M22/05-0012---	25	1.41
RP15---35OKK	M22/05-0013---	35	1.19
RP15---50OKK	M22/05-0014---	50	1.00
RP15---75OKK	M22/05-0015---	75	0.82
RP15---101KK	M22/05-0016---	100	0.71
RP15---151KK	M22/05-0017---	150	0.55

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, POWER TYPE, STYLES RP

MIL-R-22

TABLE I. TYPE AND CHARACTERISTICS. (cont)

TYPE DESIGNATION	PART NUMBER	NOMINAL TOTAL RESISTANCE VALUE (OHMS)	MAXIMUM CURRENT (AMPS)
RP15---201KK	M22/05-0018---	200	0.30
RP15---251KK	M22/05-0019---	250	0.43
RP15---351KK	M22/05-0020---	350	0.35
RP15---501KK	M22/05-0021---	500	0.32
RP15---751KK	M22/05-0022---	750	0.26
RP15---102KK	M22/05-0023---	1,000	0.22
RP15---152KK	M22/05-0024---	1,500	0.18
RP15---252KK	M22/05-0025---	2,500	0.14
RP15---352KK	M22/05-0026---	3,500	0.12
RP15---502KK	M22/05-0027---	5,000	0.10
RP15---802KK	M22/05-0028---	8,000	0.08
RP15---103KK	M22/05-0029---	10,000	0.07
RP20---2R0KK	M22/07-0001---	2	8.12
RP20---2R5KK	M22/07-0002---	2.5	5.50
RP20---3R0KK	M22/07-0003---	3	5.00
RP20---4R0KK	M22/07-0004---	4	4.34
RP20---5R0KK	M22/07-0005---	5	3.97
RP20---6R0KK	M22/07-0006---	6	3.54
RP20---8R0KK	M22/07-0007---	8	3.06
RP20---100KK	M22/07-0008---	10	2.74
RP20---120KK	M22/07-0009---	12	2.50
RP20---150KK	M22/07-0010---	15	2.24
RP20---250KK	M22/07-0011---	25	1.73
RP20---350KK	M22/07-0012---	35	1.46
RP20---500KK	M22/07-0013---	50	1.22
RP20---750KK	M22/07-0014---	75	1.00
RP20---101KK	M22/07-0015---	100	0.87
RP20---151KK	M22/07-0016---	150	0.71
RP20---201KK	M22/07-0017---	200	0.61
RP20---251KK	M22/07-0018---	250	0.55
RP20---351KK	M22/07-0019---	350	0.46
RP20---501KK	M22/07-0020---	500	0.39
RP20---751KK	M22/07-0021---	750	0.32
RP20---102KK	M22/07-0022---	1,000	0.27
RP20---152KK	M22/05-0023---	1,500	0.22
RP20---252KK	M22/07-0024---	2,500	0.17
RP20---352KK	M22/07-0025---	3,500	0.15
RP20---502KK	M22/07-0026---	5,000	0.12
RP20---802KK	M22/07-0027---	8,000	0.10
RP20---103KK	M22/07-0028---	10,000	0.09

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, POWER TYPE, STYLES RP

MIL-R-22

TABLE I. TYPE AND CHARACTERISTICS. (cont)

TYPE DESIGNATION	PART NUMBER	NOMINAL TOTAL RESISTANCE VALUE (OHMS)	MAXIMUM CURRENT (AMPS)
RP25---2R0KK	M22/08-0001---	2	7.07
RP25---2R5KK	M22/08-0002---	2.5	6.32
RP25---3R0KK	M22/08-0003---	3	5.77
RP25---4R0KK	M22/08-0004---	4	5.00
RP25---5R0KK	M22/08-0005---	5	4.47
RP25---6R0KK	M22/08-0006---	6	4.08
RP25---8R0KK	M22/08-0007---	8	3.53
RP25---100KK	M22/08-0008---	10	3.16
RP25---120KK	M22/08-0009---	12	2.89
RP25---150KK	M22/08-0010---	15	2.58
RP25---250KK	M22/08-0011---	25	2.00
RP25---350KK	M22/08-0012---	35	1.69
RP25---500KK	M22/08-0013---	50	1.41
RP25---750KK	M22/08-0014---	75	1.15
RP25---101KK	M22/08-0015---	100	1.00
RP25---151KK	M22/08-0016---	150	0.82
RP25---201KK	M22/08-0017---	200	0.71
RP25---251KK	M22/08-0018---	250	0.63
RP25---351KK	M22/08-0019---	350	0.54
RP25---501KK	M22/08-0020---	500	0.45
RP25---751KK	M22/08-0021---	750	0.37
RP25---102KK	M22/08-0022---	1,000	0.32
RP25---152KK	M22/08-0023---	1,500	0.26
RP25---252KK	M22/08-0024---	2,500	0.20
RP25---352KK	M22/08-0025---	3,500	0.17
RP25---502KK	M22/08-0026---	5,000	0.14
RP25---802KK	M22/08-0027---	8,000	0.11
RP25---103KK	M22/08-0028---	10,000	0.10
RP30---2R0KK	M22/09-0001---	2	8.66
RP30---2R5KK	M22/09-0002---	2.5	7.75
RP30---3R0KK	M22/09-0003---	3	7.07
RP30---4R0KK	M22/09-0004---	4	6.12
RP30---5R0KK	M22/09-0005---	5	5.48
RP30---6R0KK	M22/09-0006---	6	5.00
RP30---8R0KK	M22/09-0007---	8	4.33
RP30---100KK	M22/09-0008---	10	3.87
RP30---120KK	M22/09-0009---	12	3.54
RP30---150KK	M22/09-0010---	15	3.16
RP30---250KK	M22/09-0011---	25	2.45
RP30---350KK	M22/09-0012---	35	2.07
RP30---500KK	M22/09-0013---	50	1.73
RP30---750KK	M22/09-0014---	75	1.41

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, POWER TYPE, STYLES RP

MIL-R-22

TABLE I. TYPE AND CHARACTERISITCS. (cont)

TYPE DESIGNATION	PART NUMBER	NOMINAL TOTAL RESISTANCE VALUE (OHMS)	MAXIMUM CURRENT (AMPS)
RP30---101KK	M22/09-0015---	100	1.22
RP30---151KK	M22/09-0016---	150	1.00
RP30---201KK	M22/09-0017---	200	0.87
RP30---251KK	M22/09-0018---	250	0.77
RP30---351KK	M22/09-0019---	350	0.66
RP30---501KK	M22/09-0020---	500	0.55
RP30---751KK	M22/09-0021---	750	0.45
RP30---102KK	M22/09-0022---	1,000	0.39
RP30---152KK	M22/09-0023---	1,500	0.32
RP30---252KK	M22/09-0024---	2,500	0.25
RP30---352KK	M22/09-0025---	3,500	0.21
RP30---502KK	M22/09-0025---	5,000	0.17
RP30---702KK	M22/09-0027---	8,000	0.14
RP30---103KK	M22/09-0028---	10,000	0.12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, PRECISION, STYLES RR

MIL-R-12934


SCOPE: VARIABLE, WIRE-WOUND, PRECISION RESISTORS ARE DESIGNED FOR MATCHING, BALANCING, OR ADJUSTING CIRCUIT VARIABLES WHERE IT IS NECESSARY TO MAKE FINE ADJUSTMENTS TO ACHIEVE THE DESIRED SYSTEM ACCURACY. POWER RATING IS APPLICABLE TO +70°C AND DERATED TO ZERO AT +125°C RESPECTIVELY.

TEMPERATURE RANGE: -55°C TO +150°C

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 15G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: RR0900A2A7J101

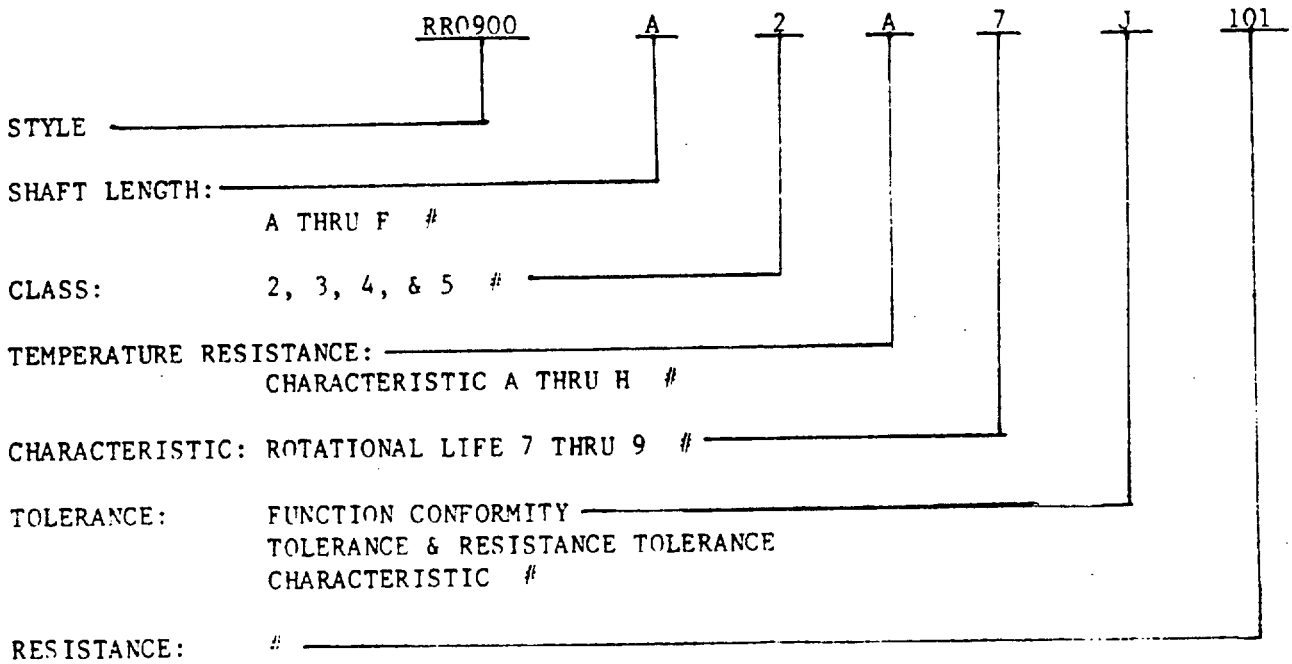

SEE TABLE I THRU VIII.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, PRECISION, STYLES RR

MIL-R-12934

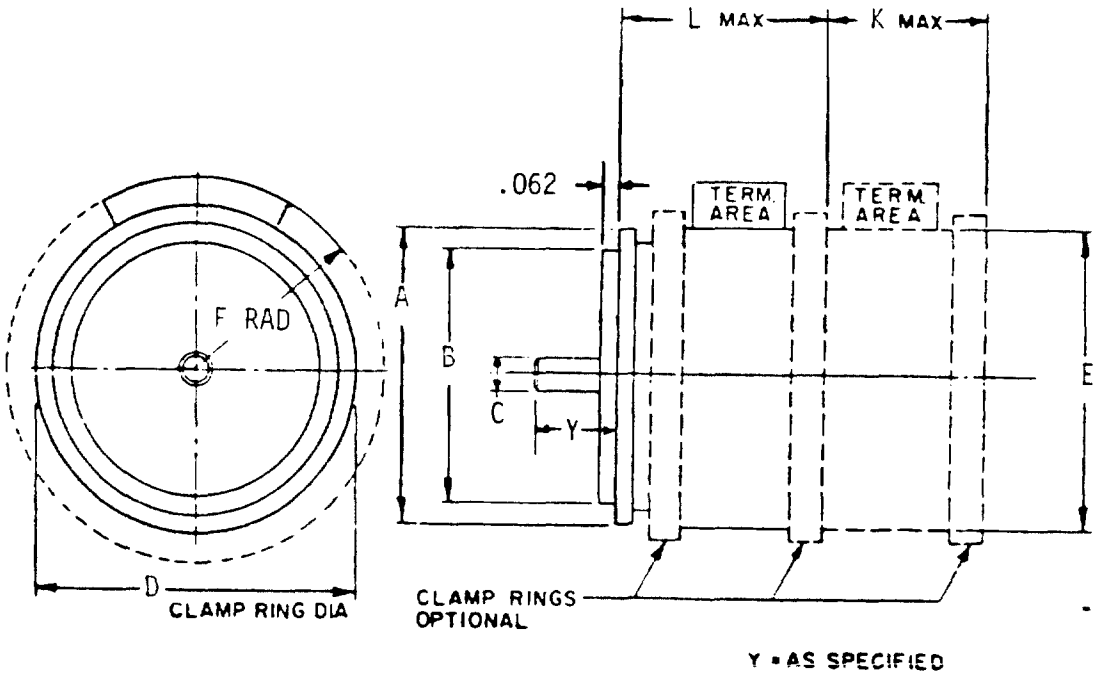


TABLE A. DIMENSION TABLE.

MIL-R-12934/	STYLE	A DIA	B DIA	C DIA	E MAX	K MAX	L MAX	F MAX	D MAX
1	RR0900	.875	.7500	.125	.906	.625	.812	.656	1.062
2	RR1100	1.062	.9688	.250	1.125	.625	.812	.781	1.160
4	RR2000	2.000	1.8750	.250	2.031	.875	1.312	1.375	2.250
5	RR3000	3.000	2.8750	.250	3.031	.875	1.312	1.750	3.250
6	RR1000	.875	.7500	.125	.906	1.438	1.625	.656	1.062
19	RR1300	1.437	1.3125	.250	1.468	.687	1.062	1.094	1.625
20	RR1400	1.437	1.3125	.250	1.468	2.000	2.250	1.094	1.625
9	RR2100	2.000	1.8750	.250	2.031	.031	2.250	1.375	2.250
27	RR3600	.875	.7500	.125	.906	.948	1.076	.656	1.062
29	RR3800	.875	.7500	.125	.906	.968	1.219	.656	1.062

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, PRECISION, STYLES RR

MIL-R-12934

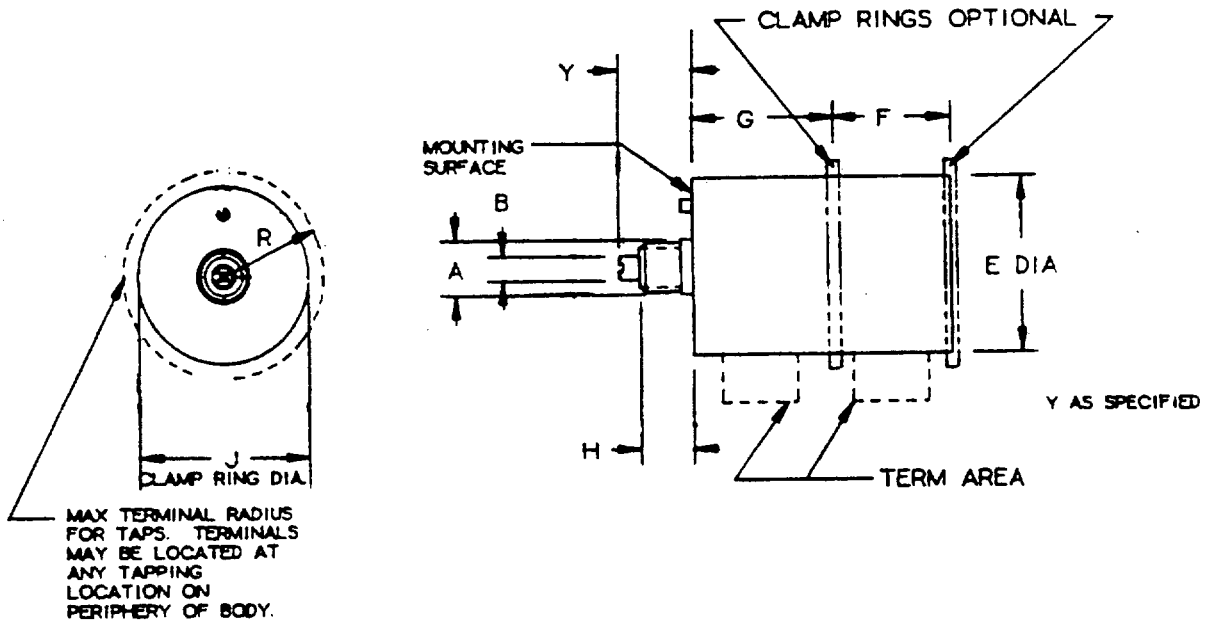


TABLE B. DIMENSION TABLE.

MIL-R-12934/	STYLE	A	B	E MAX	F MAX	G MAX	H MAX	J MAX	R MAX
10	RR3100	.281	.125	.906	.625	.750	.250	1.062	.625
15	RR3200	.281	.125	1.093	.625	.750	.250	1.160	.781
16	RR3300	.406	.250	1.468	.687	1.062	.375	1.625	1.094
17	RR3400	.406	.250	2.031	.875	1.156	.375	2.250	1.375
18	RR3500	.406	.250	3.031	.875	1.156	.375	3.250	1.750
28	RR3700	.281	.125	.906	.940	1.076	.250	1.062	.625
30	RR3900	.281	.125	.906	.968	1.219	.250	1.062	.625
31	RR4000	.281	.125	---	1.500	1.500	.313	.875	.625
32	RR4100	.406	.250	---	2.00	2.094	.313	1.844	1.375

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, PRECISION, STYLES RR

MIL-R-12934

TABLE I. FUNCTION AND SHAFT LENGTH

SYMBOL	LENGTH 1/ SERVO MOUNTED	BUSHING MOUNTED (SINGLE)	BUSHING MOUNTED (MULTI)	FUNCTION
A	3/8	3/4		LINEAR
B	1/2	7/8		LINEAR
C	5/8	1	5/8	LINEAR
D	3/4	1-1/8	3/4	LINEAR
E	7/8	1-1/4	7/8	LINEAR
F	1	1-3/8	1	LINEAR

1/ LENGTH OF SHAFT FROM MOUNTING SURFACE OF RESISTOR, NOMINAL.

TABLE II. CLASS

SYMBOL	CLASS MAXIMUM AMBIENT TEMPERATURE AT RATED WATTAGE °C	MAXIMUM AMBIENT OPERATING TEMPERATURE °C
2	70	125
3	85	150
4•	70	125
5•	85	150

• WITH CENTER TAP

TABLE III. RESISTANCE-TEMPERATURE CHARACTERISTIC

RESISTANCE-TEMPERATURE CHARACTERISTIC IN PERCENT PER °C	
SYMBOL	SYMBOL
A----------±0.003	E----------±0.026
B----------±0.005	F----------±0.04
C----------±0.01	G----------±0.07
D----------±0.016	H----------±0.1

TABLE IV. ROTATIONAL-LIFE CHARACTERISTIC

SYMBOL	ROTATIONAL-LIFE (CYCLES) SINGLE TURN	3 TURN	5 TURN	10 TURN
7	125,000	85,000	50,000	25,000
8	250,000	175,000	100,000	50,000
9	500,000	350,000	200,000	100,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, PRECISION, STYLES RR

MIL-R-12934

TABLE V. FUNCTION-CONFORMITY CHARACTERISTIC.

SYMBOL	FUNCTION CONFORMITY TOLERANCE PERCENT %	RESISTANCE TOLERANCE PERCENT %	SYMBOL	FUNCTION CONFORMITY TOLERANCE PERCENT %	RESISTANCE TOLERANCE PERCENT %
A---	1.0	5	M---	1.0	2
B---	0.5	5	N---	0.5	2
C---	0.25	5	O---	0.25	2
D---	0.10	5	P---	0.10	2
E---	0.05	5	Q---	0.05	2
F---	0.025	5	R---	0.025	2
G---	1.0	3	S---	1.0	1
H---	0.5	3	T---	0.5	1
I---	0.25	3	U---	0.25	1
J---	0.10	3	V---	0.10	1
K---	0.05	3	W---	0.05	1
L---	0.025	3	Y---	0.025	1
			X---	AS SPECIFIED	AS SPECIFIED

TABLE VI.

STYLE	SHAFT LENGTHS	CLASS	RESISTANCE TEMPERATURE CHARACTERISTIC
RR0900	A thru F	2 thru 5	A thru H
RR1000	A thru F	2 thru 5	A thru H
RR1004	D	2 thru 4	A
RR1100	A thru F	2 thru 5	A thru H
RR1300	A thru F	2 thru 5	A thru H
RR1400	A thru F	2 thru 5	A thru H
RR2000	A thru F	2 thru 5	A thru H
RR2002	H	2 thru 4	A
RR2100	A thru F	2 thru 5	A thru H
RR3000	A thru F	2 thru 5	A thru H
RR3100	A thru F	2 thru 5	A thru H
RR3200	A thru F	2 thru 5	A thru H
RR3300	A thru F	2 thru 5	A thru H
RR3400	A thru F	2 thru 5	A thru H
RR3500	A thru F	2 thru 5	A thru H
RR3600	A thru F	2 thru 5	A thru H
RR3601	D	2 thru 4	A
RR3700	C thru F	2 thru 5	A thru H
RR3800	A thru F	2 thru 5	A thru H
RR3900	C thru F	2 thru 5	A thru H
RR4000	C thru F	2 thru 5	A thru H
RR4100	C thru F	2 thru 5	A thru H
2RR2104	F	2 thru 4	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, PRECISION, STYLES RR

MIL-R-12934

TABLE VII.

STYLE	ROTA LIFE CHARACTERISTIC	FUNCTION CONFORMITY	TOTAL RESISTANCE VALUE
RR0900	7 thru 9	G thru L S thru X	100 thru 10000
RR1000	7 thru 9	G thru L S thru X	100 thru 50000
RR1004	9	B	100 thru 100000
RR1100	7 thru 9	G thru L S thru X	100 thru 20000
RR1300	7 thru 9	G thru L S thru X	100 thru 40000
RR1400	7 thru 9	G thru L S thru X	200 thru 200000
RR2000	7 thru 9	G thru L S thru X	100 thru 60000
RR2002	9	U	20000
RR2100	7 thru 9	G thru L S thru X	100 thru 250000
RR3000	7 thru 9	G thru L S thru X	200 thru 100000
RR3100	7 thru 9	A thru X	100 thru 10000
RR3200	7 thru 9	A thru X	100 thru 20000
RR3300	7 thru 9	A thru X	100 thru 40000
RR3400	7 thru 9	A thru X	100 thru 60000
RR3500	7 thru 9	A thru X	200 thru 100000
RR3600	7 thru 9	G thru L S thru X	100 thru 50000
RR3601	9	K	100 thru 10000
RR3700	7 thru 9	G thru L S thru X	100 thru 50000
RR3800	7 thru 9	G thru L S thru X	100 thru 100000
RR3900	7 thru 9	G thru L S thru X	100 thru 100000
RR4000	7 thru 9	G thru L S thru X	100 thru 50000
RR4100	7 thru 9	G thru L S thru X	200 thru 250000
2RR2104	8	L	20000 *

* EACH CUP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, PRECISION, STYLES RR

MIL-R-12934

TABLE VIII.

STYLE	TURNS	MAXIMUM CONTINUOUS WORKING VOLTAGE (VOLTS)	MAXIMUM CONTINUOUS POWER RATING (WATTS)	MAXIMUM STARTING AND RUNNING TORQUE (OUNCE-INCH)				STOP-TORQUE (LB-IN)
				SINGLE-TURN SINGLE-CUP		PER EACH ADDITIONAL		
				STARTING	RUNNING	STARTING	RUNNING	
RR0900	1	250	1.25	.3	.25	.2	.15	--
RR1100	1	250	1.5	.5	.3	.35	.25	--
RR1300	1	250	2.0	1.0	.75	.8	.6	--
RR2000	1	250	4.0	1.0	1.0	.8	.8	--
RR3000	1	250	6.0	1.5	1.0	1.0	.8	--
RR3100	1	250	1.25	.3	.25	.2	.15	--
RR3300	1	250	2.0	1.0	.75	.8	.7	--
RR3400	1	250	4.0	1.0	1.0	.8	.8	--
RR3500	1	250	6.0	1.5	1.0	1.0	.8	--
RR3200	1	250	1.5	.5	.4	.4	.3	--
				THREE-TURN SINGLE-CUP		PER EACH ADDITIONAL		
				STARTING	RUNNING	STARTING	RUNNING	
RR3600	3	423	1.5	.5	.4	.4	.3	3
RR3700	3	423	1.5	.5	.4	.4	.3	3
RR2002	3	250	4	1.0	1.0	--	--	4
RR3601	3	400	1.5	.5	.4	--	--	3
				FIVE-TURN SINGLE-CUP		PER EACH ADDITIONAL		
				STARTING	RUNNING	STARTING	RUNNING	
RR3800	5	500	1.5	.5	.4	.4	.3	3
RR3900	5	500	1.5	.5	.4	.4	.3	3
				TEN-TURN SINGLE-CUP		PER EACH ADDITIONAL		
				STARTING	RUNNING	STARTING	RUNNING	
RR1000	10	500	2.0	.7	.6	.6	.5	3
RR1400	10	500	3.0	1.0	.7	.8	.6	8
RR2100	10	500	5.0	2.0	1.0	2.0	1.0	37.5
RR4000	10	300	2.0	.7	.6	.6	.5	3
RR4100	10	500	5.0	2.0	1.0	2.0	1.0	10
RR1004	10	500	2.0	.7	.6	--	--	3
2RR2104	10	500	5.0	2.0	1.0	2.0	1.0	35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, SEMI-PRECISION, WIRE-WOUND, STYLE RK09

MIL-C-39002/1

SCOPE: SEMI-PRECISION, WIRE-WOUND VARIABLE RESISTOR STYLE RK09, PER MIL-R-39002/1, IS LINEAR WITH RESPECT TO THE ANGULAR POSITION OF THE CONTACT ARM. THE POWER RATING IS APPLICABLE TO +85°C AND DERATED TO ZERO AT +135°C. RESISTANCE TOLERANCE IS ±5%.

TEMPERATURE RANGE: -55°C TO +135°C, -55°C TO +85°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: M39002/01-0008


M39002/01 — MILITARY SPECIFICATION AND SLASH SHEET NUMBER:

-0008 — DASH NUMBER: SEE TABLE I.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, SEMI-PRECISION, WIRE-WOUND, STYLE RK09

MIL-R-39002/1

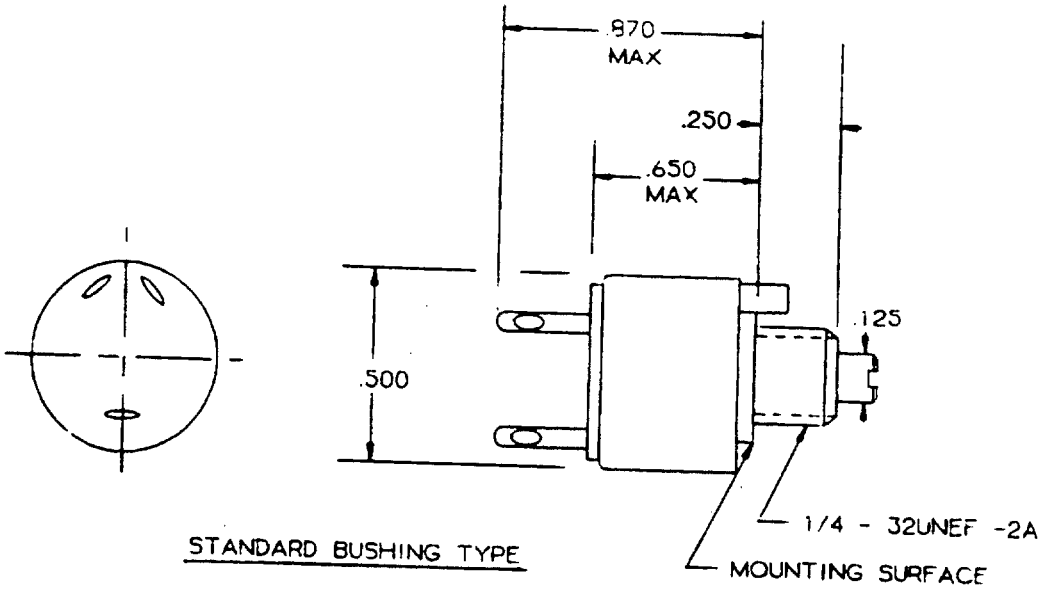

STANDARD BUSHING TYPE

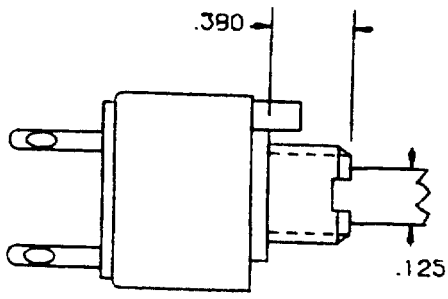

LOCKING BUSHING TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, SEMI-PRECISION, WIRE-WOUND, STYLE RK09

MIL-R-39002/1

TABLE I. STYLE RK09 RESISTOR

DASH NUMBER BUSHING LOCKING	DASH NUMBER BUSHING STD	TYPE DESIGNATION	SHAFT LENGTH SHAFT STYLE SLOTTED	NOMINAL TOTAL RESISTANCE VALUE	NOMINAL RESOLUTION (%)	RATED AC & DC WORKING VOLTAGE VOLTS	TERMINAL
0008	---	RK09UACS101	.500	100	.68	12	S
0009	---	RK09UACS151	.500	150	.41	14	S
0010	---	RK09UACS201	.500	200	.55	17.4	S
0011	---	RK09UACS251	.500	250	.39	19	S
0012	---	RK09UACS351	.500	350	.36	23	S
0013	---	RK09UACS501	.500	500	.42	27	S
0014	---	RK09UACS751	.500	750	.35	32	S
0015	---	RK09UACS102	.500	1000	.34	39	S
0016	---	RK09UACS152	.500	1500	.31	46	S
0017	---	RK09UACS202	.500	2000	.23	55	S
0018	---	RK09UACS252	.500	2500	.21	61	S
0019	---	RK09UACS352	.500	3500	.21	73	S
0020	---	RK09UACS502	.500	5000	.17	86	S
0021	---	RK09UACS752	.500	7500	.21	104	S
0022	---	RK09UACS103	.500	10000	.15	122	S
---	0035	RK09SACS101	.500	100	.68	12	S
---	0036	RK09SACS151	.500	150	.41	14	S
---	0037	RK09SACS201	.500	200	.55	17.4	S
---	0038	RK09SACS251	.500	250	.39	19	S
---	0039	RK09SACS351	.500	350	.36	23	S
---	0040	RK09SACS501	.500	500	.42	27	S
---	0041	RK09SACS751	.500	750	.35	32	S
---	0042	RK09SACS102	.500	1000	.34	39	S
---	0043	RK09SACS152	.500	1500	.31	46	S
---	0044	RK09SACS202	.500	2000	.23	55	S
---	0045	RK09SACS252	.500	2500	.21	61	S
---	0046	RK09SACS352	.500	3500	.21	73	S
---	0047	RK09SACS502	.500	5000	.17	86	S
---	0048	RK09SACS752	.500	7500	.21	104	S
---	0049	RK09SACS103	.500	10000	.15	122	S
---	0062	RK09SBCS101	.625	100	.68	12	S
---	0063	RK09SBCS151	.625	150	.41	14	S
---	0064	RK09SBCS201	.625	200	.55	17.4	S
---	0065	RK09SBCS251	.625	250	.39	19	S
---	0066	RK09SBCS351	.625	350	.36	23	S
---	0067	RK09SBCS501	.625	500	.42	27	S
---	0068	RK09SBCS751	.625	750	.35	32	S
---	0069	RK09SBCS102	.625	1000	.34	39	S
---	0070	RK09SBCS152	.625	1500	.31	46	S
---	0071	RK09SBCS202	.625	2000	.23	55	S
---	0072	RK09SBCS252	.625	2500	.21	61	S
---	0073	RK09SBCS352	.625	3500	.21	73	S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, SEMI-PRECISION, WIRE-WOUND, STYLE RK09

MIL-R-39002/1

TABLE I. STYLE RK09 RESISTOR (CONT).

DASH NUMBER BUSHING LOCKING	DASH NUMBER BUSHING STD	TYPE DESIGNATION	SHAFT LENGTH SHAFT STYLE SLOTTED	NOMINAL TOTAL RESISTANCE VALUE	NOMINAL RESOLUTION (%)	RATED AC & DC WORKING VOLTAGE VOLTS	TERMINAL
---	0074	RK09SBCS502	.625	5000	.17	86	S
---	0075	RK09SBCS752	.625	7500	.21	104	S
---	0076	RK09SBCS103	.625	10000	.15	122	S
0089	---	RK09UDCS101	.875	100	.68	12	S
0090	---	RK09UDCS151	.875	150	.41	14	S
0091	---	RK09UDCS201	.875	200	.55	17.4	S
0092	---	RK09UDCS251	.875	250	.39	19	S
0093	---	RK09UDCS351	.875	350	.36	23	S
0094	---	RK09UDCS501	.875	500	.42	27	S
0095	---	RK09UDCS751	.875	750	.35	32	S
0096	---	RK09UDCS102	.875	1000	.34	39	S
0097	---	RK09UDCS152	.875	1500	.31	46	S
0098	---	RK09UDCS202	.875	2000	.23	55	S
0099	---	RK09UDCS252	.875	2500	.21	61	S
0100	---	RK09UDCS352	.875	3500	.21	73	S
0101	---	RK09UDCS502	.875	5000	.17	86	S
0102	---	RK09UDCS752	.875	7500	.21	104	S
0103	---	RK09UDCS103	.875	10000	.15	122	S
---	0116	RK09SDCS101	.875	100	.68	12	S
---	0117	RK09SDCS151	.875	150	.41	14	S
---	0118	RK09SDCS201	.875	200	.55	17.4	S
---	0119	RK09SDCS251	.875	250	.39	19	S
---	0120	RK09SDCS351	.875	350	.36	23	S
---	0121	RK09SDCS501	.875	500	.42	27	S
---	0122	RK09SDCS751	.875	750	.35	32	S
---	0123	RK09SDCS102	.875	1000	.34	39	S
---	0124	RK09SDCS152	.875	1500	.31	46	S
---	0125	RK09SDCS202	.875	2000	.23	55	S
---	0126	RK09SDCS252	.875	2500	.21	61	S
---	0127	RK09SDCS352	.875	3500	.21	73	S
---	0128	RK09SDCS502	.875	5000	.17	86	S
---	0129	RK09SDCS752	.875	7500	.21	104	S
---	0130	RK09SDCS103	.875	10000	.15	122	S
---	0143	RK09SGCS101	1.250	100	.68	12	S
---	0144	RK09SGCS151	1.250	150	.41	14	S
---	0145	RK09SGCS201	1.250	200	.55	17.4	S
---	0146	RK09SGCS251	1.250	250	.39	19	S
---	0147	RK09SGCS351	1.250	350	.36	23	S
---	0148	RK09SGCS501	1.250	500	.42	27	S
---	0149	RK09SGCS751	1.250	750	.35	32	S
---	0150	RK09SGCS102	1.250	1000	.34	39	S
---	0151	RK09SGCS152	1.250	1500	.31	46	S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, SEMI-PRECISION, WIRE-WOUND, STYLE RK09

MIL-R-39002/1

TABLE I. STYLE RK09 RESISTOR (CONT).

DASH NUMBER BUSHING LOCKING	DASH NUMBER BUSHING STD	TYPE DESIGNATION	SHAFT LENGTH SHAFT STYLE SLOTTED	NOMINAL TOTAL RESISTANCE VALUE	NOMINAL RESOLUTION (%)	RATED AC & DC WORKING VOLTAGE VOLTS	TERMINAL
---	0152	RK09SGCS202	1.250	2000	.23	55	S
---	0153	RK09SGCS252	1.250	2500	.21	61	S
---	0154	RK09SGCS352	1.250	3500	.21	73	S
---	0155	RK09SGCS502	1.250	5000	.17	86	S
---	0156	RK09SGCS752	1.250	7500	.21	104	S
---	0157	RK09SGCS103	1.250	10000	.15	122	S
---	0170	RK09SKCS101	2.250	100	.68	12	S
---	0171	RK09SKCS151	2.500	150	.41	14	S
---	0172	RK09SKCS201	2.500	200	.55	17.4	S
---	0173	RK09SKCS251	2.500	250	.39	19	S
---	0174	RK09SKCS351	2.500	350	.36	23	S
---	0175	RK09SKCS501	2.500	500	.42	27	S
---	0176	RK09SKCS751	2.500	750	.35	32	S
---	0177	RK09SKCS102	2.500	1000	.34	39	S
---	0178	RK09SKCS152	2.500	1500	.31	46	S
---	0179	RK09SKCS202	2.500	2000	.23	55	S
---	0180	RK09SKCS252	2.500	2500	.21	61	S
---	0181	RK09SKCS352	2.500	3500	.21	73	S
---	0182	RK09SKCS502	2.500	5000	.17	86	S
---	0183	RK09SKCS752	2.500	7500	.21	104	S
---	0184	RK09SKCS103	2.500	10000	.15	122	S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, (LEAD SCREW ACTUATED), ESTABLISHED RELIABILITY, STYLES RTR12 AND RTR24

MIL-R-39015/1, /3

SCOPE: VARIABLE WIRE-WOUND ESTABLISHED RELIABILITY RESISTORS WHICH ARE LEAD SCREW ACTUATED AND ARE DESIGNED FOR MATCHING, BALANCING OR ADJUSTING CIRCUIT VARIABLES WHERE IT IS NECESSARY TO MAKE FINE ADJUSTMENTS TO ACHIEVE THE DESIRED SYSTEM ACCURACY. THE POWER RATING IS APPLICABLE TO +85°C AND DERATED TO ZERO AT +150°C. THE RESISTANCE TEMPERATURE CHARACTERISTIC IS ±50 PPM/°C MAXIMUM. THE RESISTANCE TOLERANCE IS ±5%.

TEMPERATURE RANGE: -55°C TO +150°C, -55°C TO +85°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: M39015/1001PP

M39015/1	1001	P	P

MILITARY SPECIFICATION: M39015/1

DASH NUMBER: 1001
SEE TABLE I


TERMINAL: P
RTR12 = L, P, Y
RTR24 = L, P, W, X

FAILURE RATE: P
P = 0.1%/1000 HRS
R = .01%/1000 HRS


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, (LEAD SCREW ACTUATED), ESTABLISHED RELIABILITY, STYLE RTR12

MIL-R-39015/1

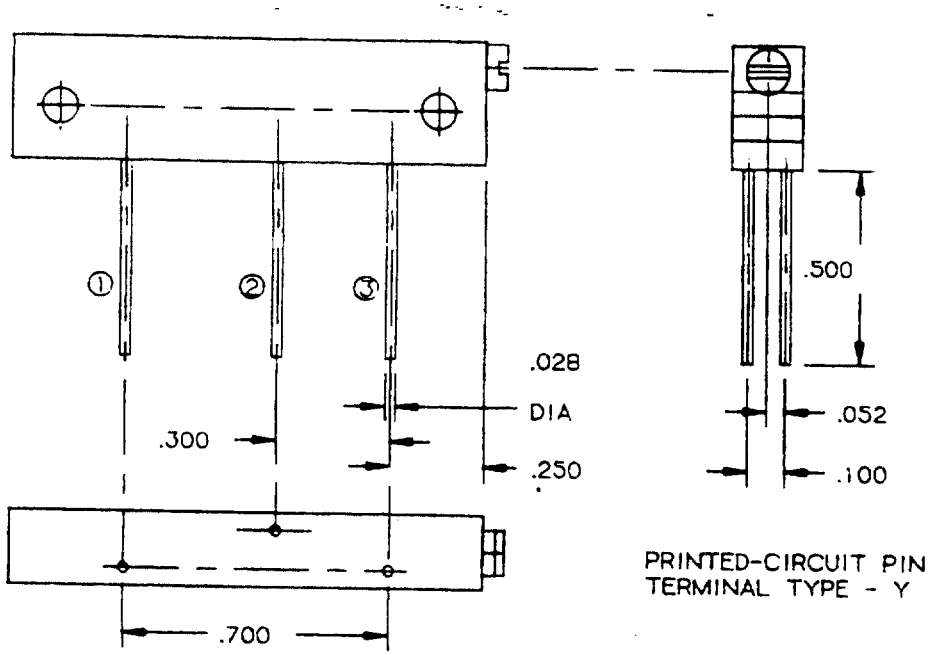

PRINTED-CIRCUIT PIN
TERMINAL TYPE - Y

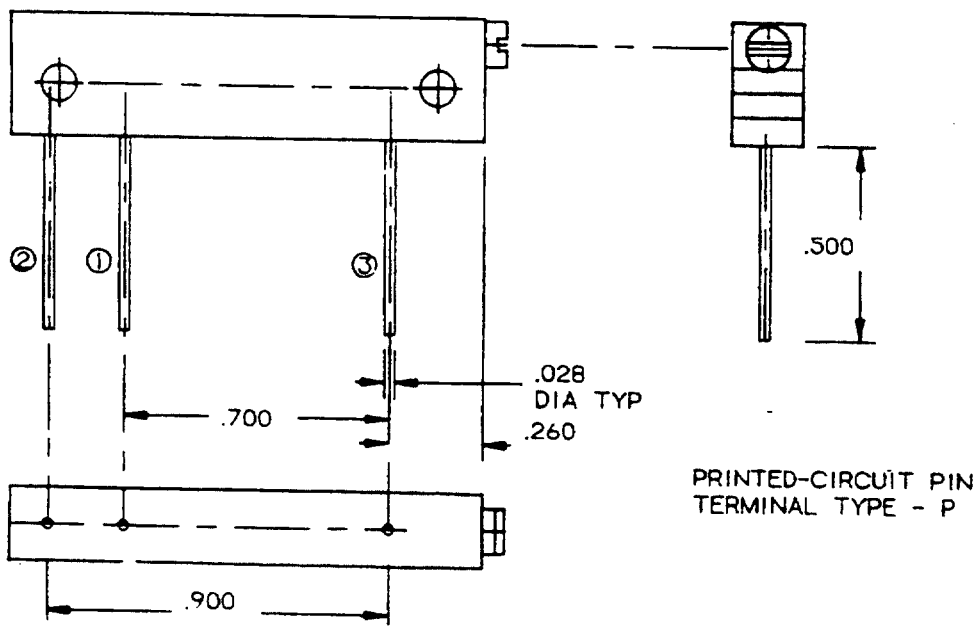


PRINTED-CIRCUIT PIN
TERMINAL TYPE - P

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, (LEAD SCREW ACTUATED), ESTABLISHED RELIABILITY, STYLE RTR12

MIL-R-39015/1

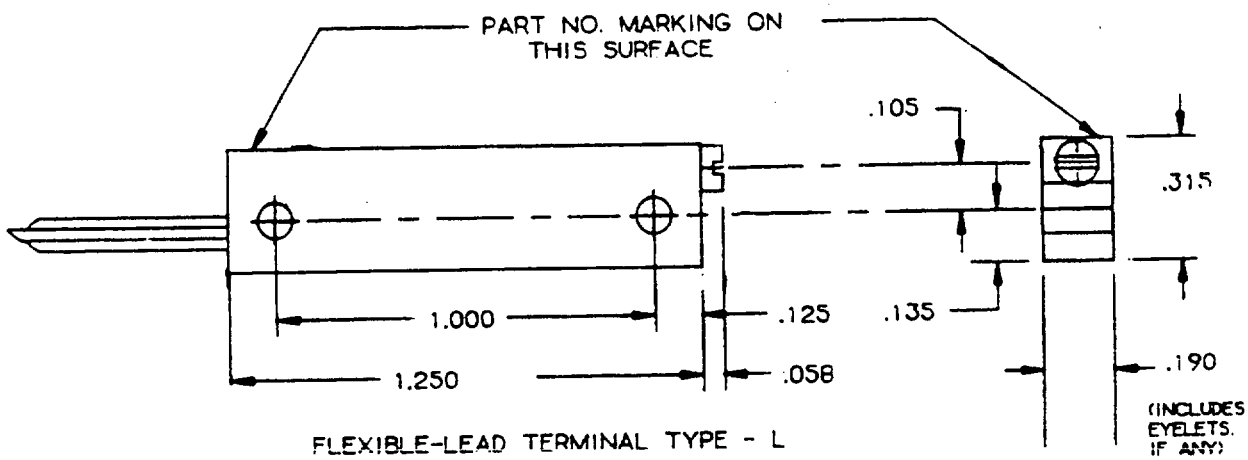

FLEXIBLE-LEAD TERMINAL TYPE - L


TABLE I. STYLE RTR12.


PART NO. M39015/1	TYPE DESIGNATION	NOMINAL RESISTANCE VALUE (OHMS)	MAXIMUM RESOLUTION (PERCENT)	MAXIMUM RATED AC OR DC WORKING VOLTAGE (VOLTS)
001	RTR12D-101-	100	1.1	8.7
002	RTR12D-201-	200	0.9	12.3
003	RTR12D-501-	500	0.6	19.4
004	RTR12D-102-	1000	0.5	27.5
005	RTR12D-202-	2000	0.4	38.7
006	RTR12D-502-	5000	0.3	61.3
007	RTR12D-103-	10000	0.3	86.7
008	RTR12D-203-	20000	0.3	122.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, (LEAD SCREW ACTUATED), ESTABLISHED RELIABILITY, STYLE RTR24

MIL-R-39015/3

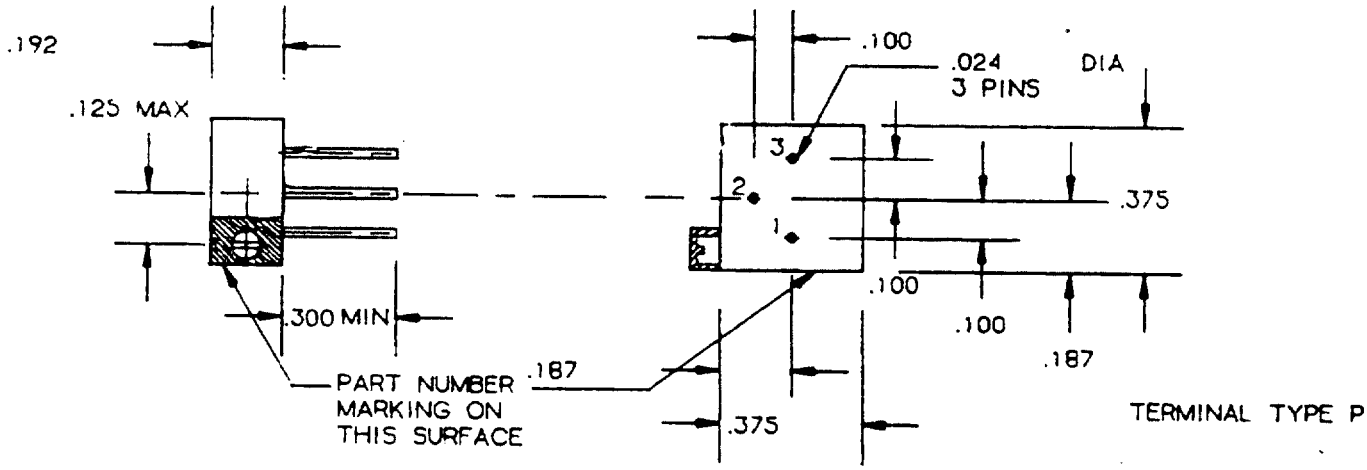


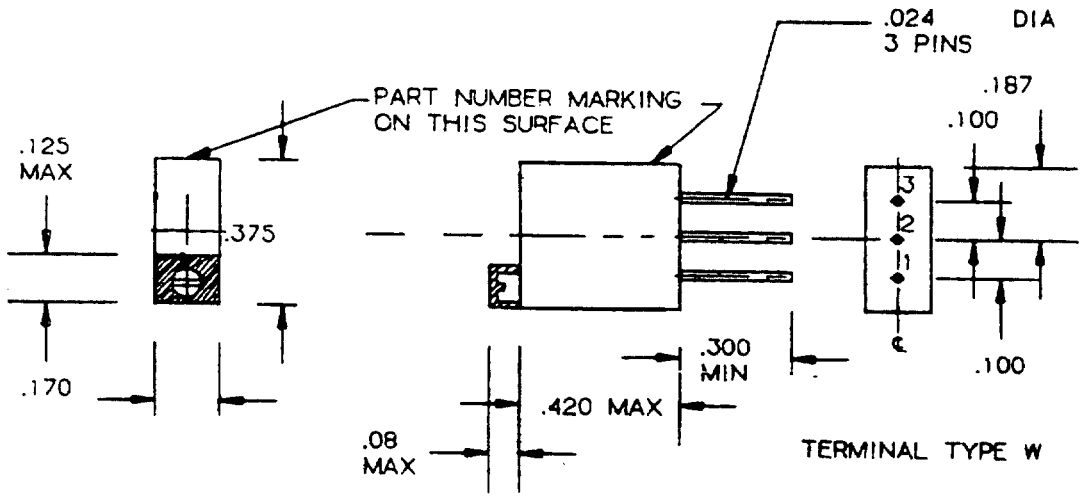

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, (LEAD SCREW ACTUATED), ESTABLISHED RELIABILITY, STYLE RTR24


MIL-R-39015/3

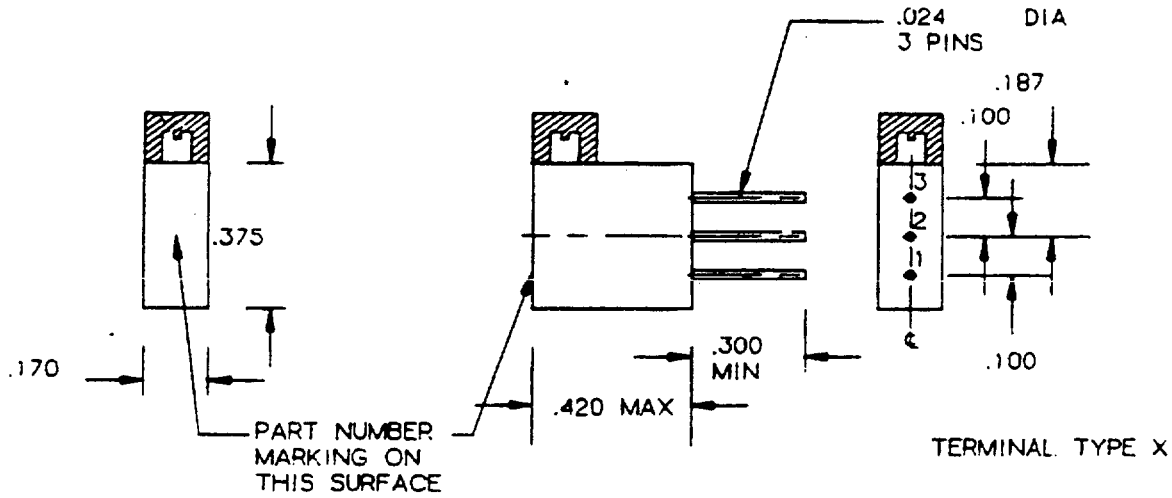

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, (LEAD SCREW ACTUATED), ESTABLISHED RELIABILITY, STYLE RTR24

MIL-R-39015/3

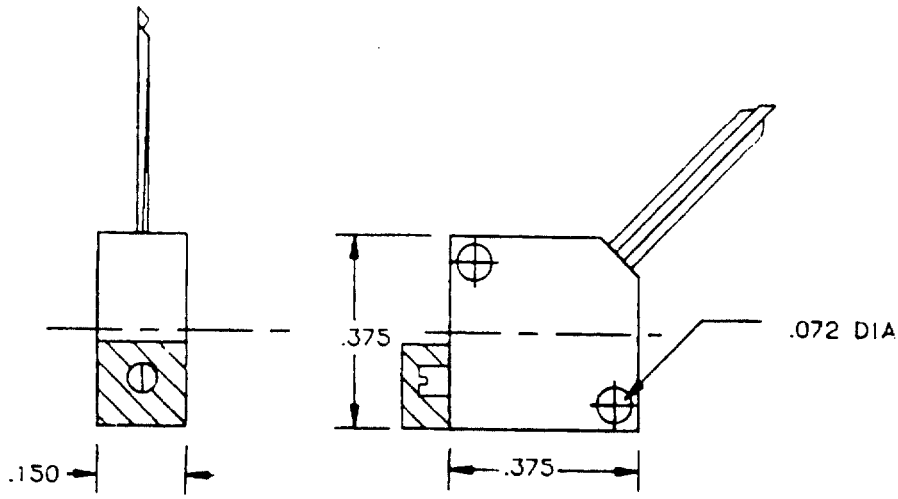

TERMINAL TYPE L

TABLE I. STYLE RTR24.

PART NO. M39015/3	TYPE DESIGNATION	NOMINAL RESISTANCE VALUE (VOLTS)	MAXIMUM RESOLUTION (PERCENT)	MAXIMUM RATED AC OR DC WORKING VOLTAGE (VOLTS)
001	RTR24D-100-	10	1.3	2.7
002	RTR24D-200-	20	1.1	3.8
003	RTR24D-500-	50	.77	6.1
004	RTR24D-101-	100	.62	8.7
005	RTR24D-201-	200	.55	12.3
006	RTR24D-501	500	.51	19.4
007	RTR24D-102-	1000	.37	27.4
008	RTR24D-202-	2000	.30	38.7
009	RTR24D-502-	5000	.25	61.3
010	RTR24D-103-	10000	.19	86.7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, ADJUSTMENT, (TYPE), LEAD-SCREW ACTUATED, STYLE RT26

MIL-R-27208/10


SCOPE: VARIABLE WIRE-WOUND RESISTORS, WHICH ARE LEAD-SCREW ACTUATED AND ARE DESIGNED FOR MATCHING, BALANCING, OR ADJUSTING CIRCUIT VARIABLES WHERE IT IS NECESSARY TO MAKE FINE ADJUSTMENTS TO ACHIEVE THE DESIRED SYSTEM ACCURACY. THE POWER RATING IS APPLICABLE TO +85°C AND DERATED TO ZERO AT +150°C. THE RESISTANCE-TEMPERATURE CHARACTERISTIC IS ±50 PPM/°C MAXIMUM. THE RESISTANCE TOLERANCE IS ±5%.

TEMPERATURE RANGE: -55°C TO +150°C, -55°C TO +85°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)


PART NUMBER EXAMPLE: RT26C2P102

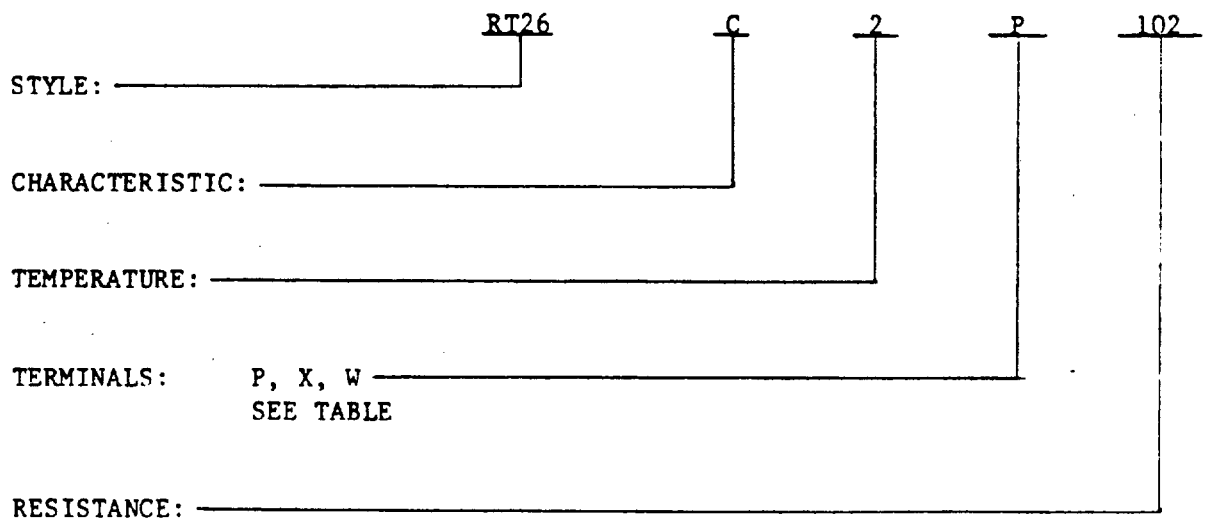


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, ADJUSTMENT, (TYPE), LEAD-SCREW ACTUATED, STYLE RT26


MIL-R-27208/10

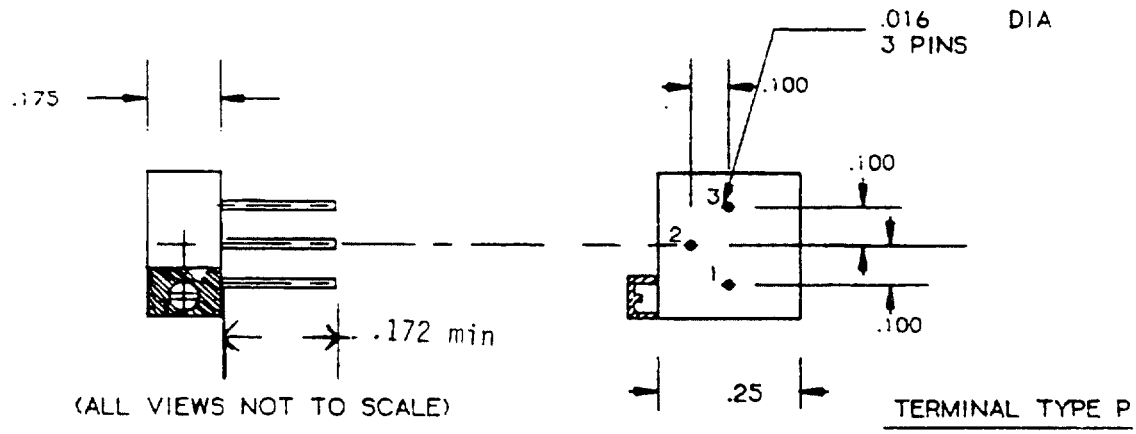

TERMINAL TYPE P

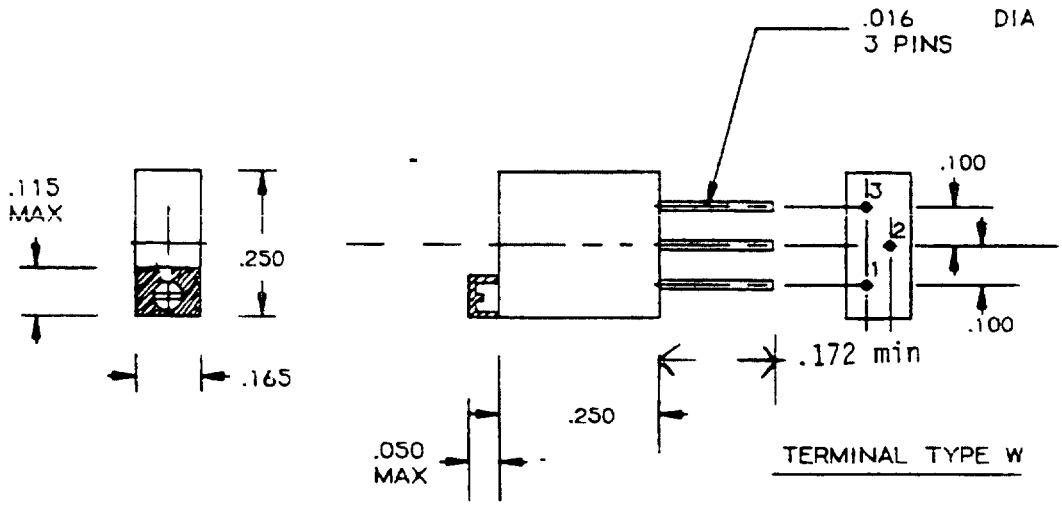

TERMINAL TYPE W

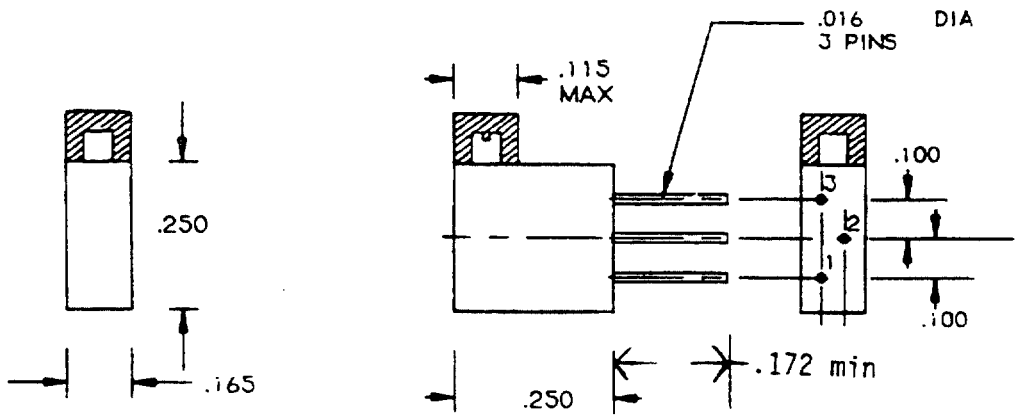

TERMINAL TYPE X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, VARIABLE, WIRE-WOUND, ADJUSTMENT, (TYPE), LEAD-SCREW ACTUATED, STYLE RT26

MIL-R-27208/10

PART NUMBER	RESISTANCE (OHMS 5%)	MAXIMUM RESOLU-TION(%)
RT26C2P100	10	1.85
RT26C2P200	20	1.50
RT26C2P500	50	1.39
RT26C2P101	100	1.05
RT26C2P201	200	.86
RT26C2P501	500	.65
RT26C2P102	1000	.57
RT26C2P202	2000	.44
RT26C2P502	5000	.35
RT26C2X100	10	1.85
RT26C2X200	20	1.50
RT26C2X500	50	1.39
RT26C2X101	100	1.05
RT26C2X201	200	.86
RT26C2X501	500	.65
RT26C2X102	1000	.57
RT26C2X202	2000	.44
RT26C2X502	5000	.35
RT26C2W100	10	1.85
RT26C2W200	20	1.50
RT26C2W500	50	1.39
RT26C2W101	100	1.05
RT26C2W201	200	.86
RT26C2W501	500	.65
RT26C2W102	1000	.57
RT26C2W202	2000	.44
RT26C2W502	5000	.35

NOMINAL RESISTANCE VALUE(OHMS)	MAXIMUM RESOLUTION (%)	MAXIMUM RATED AC OR DC WORKING VOLTAGE (VOLTS)
10	1.85	1.58
20	1.50	2.23
50	1.39	3.54
100	1.05	5.00
200	0.86	7.07
500	0.65	11.10
1000	0.57	15.80
2000	0.44	22.30
5000	0.35	35.40

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, NETWORK, FILM, STYLES RZ

MIL-R-83401

SCOPE: FIXED, FILM NETWORK RESISTORS FOR USE IN DIP AND SIP CIRCUITRY WHERE ELECTRONIC CIRCUIT, MINIATURIZATION IS REQUIRED. THE POWER RATING IS APPLICABLE TO +70°C AND DERATING TO ZERO AT +125°C.

TEMPERATURE RANGE: -55°C TO +125°C, -55°C TO +70°C AT RATED POWER

SHOCK: 100G SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER EXAMPLE: M83401/01K1002FA

M83401/ 01 K 1002 F A

STYLE: DETAIL SPECIFICATION NUMBER (INDICATING SLASH SHEET)

CHARACTERISTIC:
H = ± 50PPM/°C
K = ±100PPM/°C
M = ±300PPM/°C
C = ± 50PPM/°C
V = ± 50PPM/°C

RESISTANCE: FIRST THREE DIGITS OF RESISTANCE VALUE REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. SEE TABLE A

TOLERANCE:
F = ±1.0%
G = ±2.0%
J = ±5.0%
B = ±.10%*
D = ±.50%*


SCHEMATIC: A, B, C, G, H, J

* APPLICABLE TO RZ010 AND RZ020 ONLY.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, NETWORK, FIXED, FILM, 14 PIN DIP, STYLE RZ00


MIL-R-83401/1

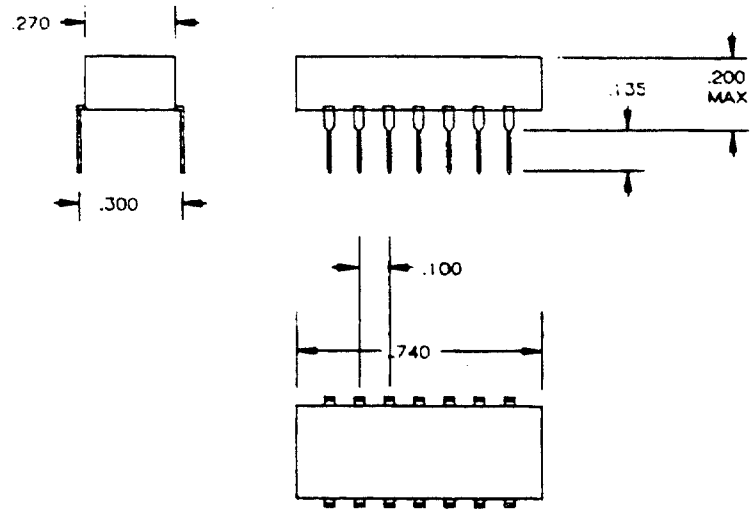

SCHEMATIC A



SCHEMATIC B



SCHEMATIC "J"




TABLE I. CHARACTERISTICS.


SCHEMATIC	RESISTANCE RANGE (OHMS)		POWER RATING (WATTS)		POWER RATING AT 25°C FOR 1000 HRS (WATTS)	
	MIN	MAX	ELEMENT	NETWORK	ELEMENT	NETWORK
A (CHARACTERISTICS H, K AND M)@	10	1.0M	0.2	1.4	0.250	1.750
A (CHARACTERISTICS C AND V)			0.1	0.7	0.125	0.875
B (CHARACTERISTICS H, K AND M)@	10	1.0M	0.1	1.3	0.125	1.625
B (CHARACTERISTICS C AND V)			0.05	0.65	0.063	0.813
J (CHARACTERISTICS K AND M)#	A001	A013	0.050	1.2	0.06	1.44

@ RESISTANCE TOLERANCE: B, D, F, G, J
RESISTANCE TOLERANCE: F, G, J


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, NETWORK, FIXED, FILM, 16 PIN DIP, STYLE RZ020


MIL-R-83401/2

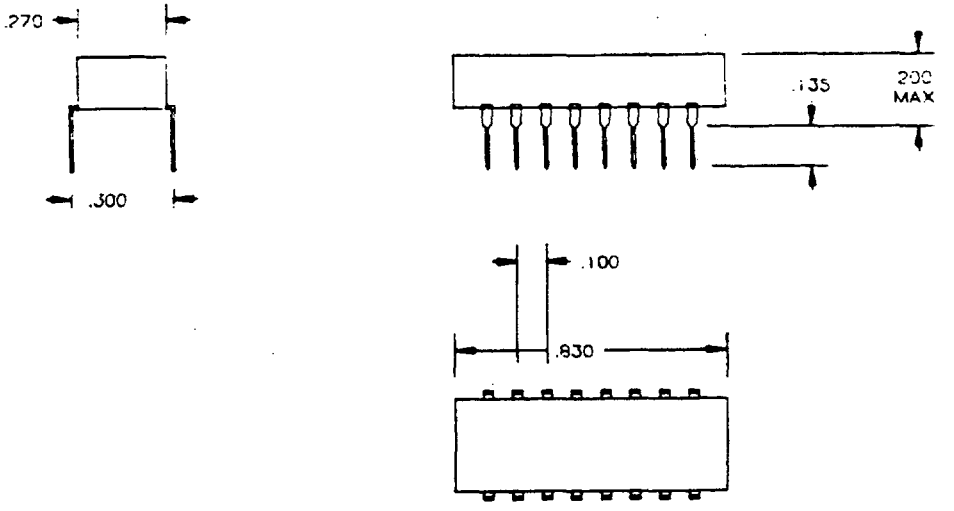

SCHEMATIC "A"



SCHEMATIC "B"



SCHEMATIC "J"




TABLE I. CHARACTERISTICS.


SCHEMATIC	RESISTANCE RANGE (OHMS)		POWER RATING (WATTS)		POWER RATING AT 25°C FOR 1000 HRS (WATTS)	
	MIN	MAX	ELEMENT	NETWORK	ELEMENT	NETWORK
A (CHARACTERISTICS H, K AND M)@	10	1.0M	0.2	1.6	0.250	2.00
A (CHARACTERISTICS C AND V)			0.1	0.8	0.125	1.00
B (CHARACTERISTICS H, K AND M)@	10	1.0M	0.1	1.5	0.125	1.875
B (CHARACTERISTICS C AND V)			0.05	0.75	0.063	0.938
J (CHARACTERISTICS K AND M)#	A001	A013	0.050	1.4	0.06	1.68

@ RESISTANCE TOLERANCE: B, D, F, G, J
RESISTANCE TOLERANCE: F, G, J


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, NETWORK, FIXED, FILM, 14 PIN FLAT PACK, STYLE RZ030


MIL-R-83401/3

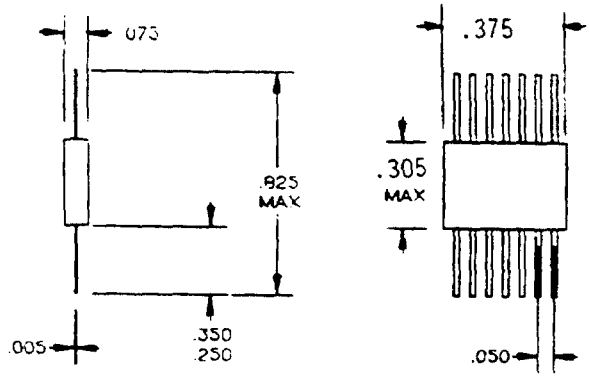

SCHEMATIC "A"



SCHEMATIC "B"



SCHEMATIC "J"




TABLE I. CHARACTERISTICS.


SCHEMATIC	RESISTANCE RANGE (OHMS)		POWER RATING (WATTS)		POWER RATING AT 25°C FOR 1000 HRS (WATTS)	
	MIN	MAX	ELEMENT	NETWORK	ELEMENT	NETWORK
C (CHARACTERISTICS H, K AND M)@	10	1.0M	0.05	0.35	0.063	0.438
G (CHARACTERISTICS H, K AND M)@	10	1.0M	0.025	0.325	0.031	0.406
H (CHARACTERISTICS K AND M)#	A001	A013	0.015	0.35	0.019	0.45

@ RESISTANCE TOLERANCE: D, F, G, J
RESISTANCE TOLERANCE: F, G, J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, NETWORK, FIXED, FILM, 6 PIN SIP, STYLE RZ040

MIL-R-83401/4

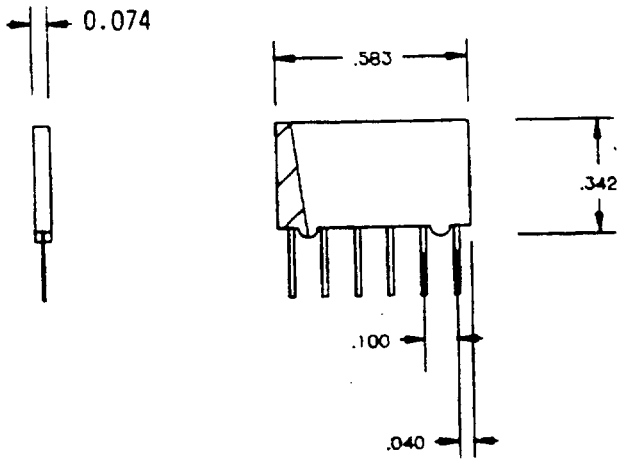

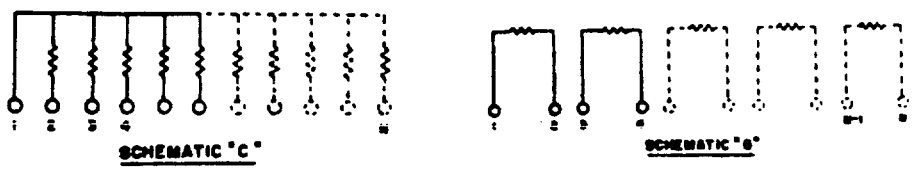


TABLE I. CHARACTERISTICS.


SCHEMATIC	RESISTANCE RANGE (OHMS)		POWER RATING (WATTS)		POWER RATING AT 25°C FOR 1000 HRS (WATTS)	
	MIN	MAX	ELEMENT	NETWORK	ELEMENT	NETWORK
C (CHARACTERISTICS H, K AND M)@	10	1.0M	0.2	1.8	0.25	2.25
G (CHARACTERISTICS H, K AND M)@	10	1.0M	0.2	1.0	0.25	1.25


@ RESISTANCE TOLERANCE: F, G, J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RESISTOR, NETWORK, FIXED, FILM, 8 PIN SIP, STYLE RZ050

MIL-R-83401/5

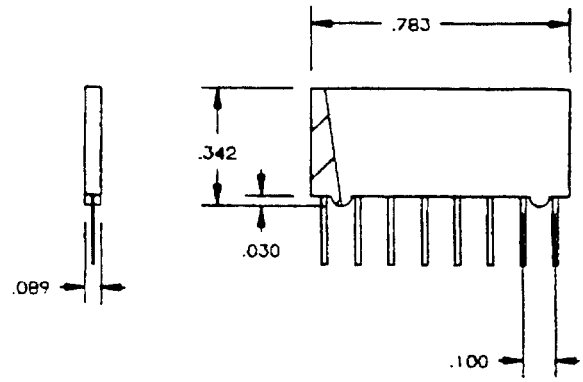

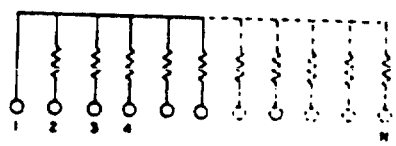

SCHEMATIC "C"

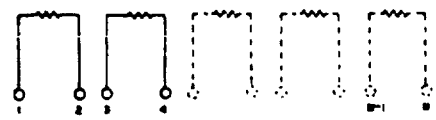

SCHEMATIC "G"

TABLE I. CHARACTERISTICS.


SCHEMATIC	RESISTANCE RANGE (OHMS)		POWER RATING (WATTS)		POWER RATING AT 25°C FOR 1000 HRS (NETWORK)	
	MIN	MAX	ELEMENT	NETWORK	ELEMENT	NETWORK
C (CHARACTERISTICS H, K AND M)@	10	1.0M	0.2	1.8	0.25	2.25
G (CHARACTERISTICS H, K AND M)@	10	1.0M	0.2	1.0	0.25	1.25


@ RESISTANCE TOLERANCE: F, G, J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, NETWORK, FIXED, FILM, 10 PIN SIP, STYLE RZ060

MIL-R-83401/6

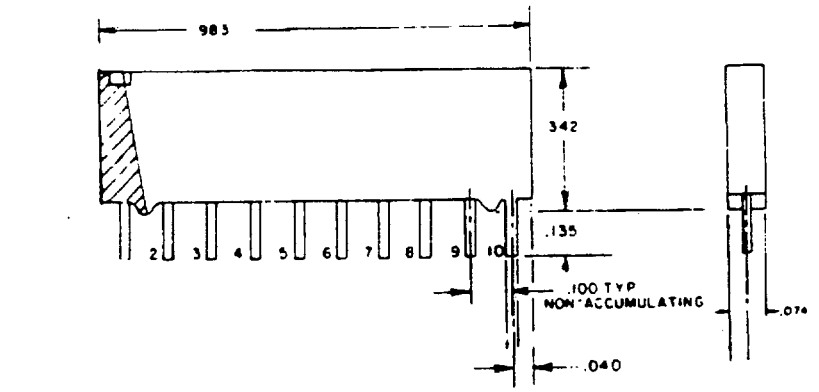


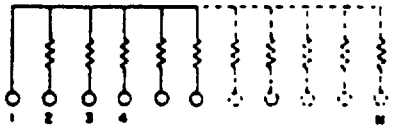

SCHEMATIC "C"



SCHEMATIC "G"



SCHEMATIC "H"

TABLE I. CHARACTERISTICS.


SCHEMATIC	RESISTANCE RANGE (OHMS)		POWER RATING (WATTS)		POWER RATING AT 25°C FOR 1000 HRS (WATTS)	
	MIN	MAX	ELEMENT	NETWORK	ELEMENT	NETWORK
C (CHARACTERISTICS H, K AND M)#	10	1.0M	0.2	1.8	0.25	2.25
G (CHARACTERISTICS H, K AND M)#	10	1.0M	0.2	1.0	0.25	1.25
H (CHARACTERISTICS K AND M)#	A001	A013	0.11	1.8	0.14	2.25


RESISTANCE TOLERANCE: F, G, J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, NETWORK, FIXED, FILM, 6 PIN SIP, STYLE RZ070

MIL-R-83401/7

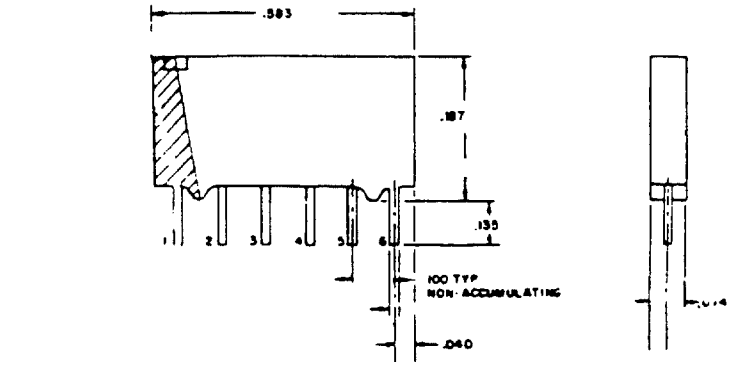

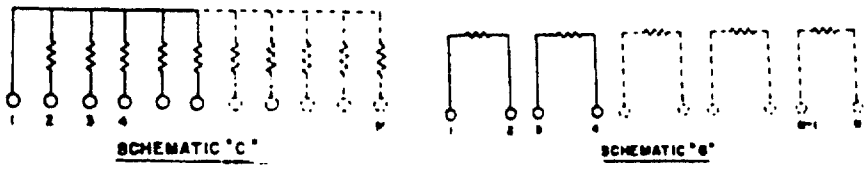




TABLE I. CHARACTERISTICS.


SCHEMATIC	RESISTANCE RANGE (OHMS)		POWER RATING (WATTS)		POWER RATING AT 25°C FOR 1000 HRS (WATTS)	
	MIN	MAX	ELEMENT	NETWORK	ELEMENT	NETWORK
C (CHARACTERISTICS H, K AND M)@	10	1.0M	0.12	0.60	0.15	0.75
G (CHARACTERISTICS H, K AND M)@	10	1.0M	0.12	0.36	0.15	0.45
H (CHARACTERISTICS K AND M)#	A001	A013	0.07	0.75	0.60	0.75

@ RESISTANCE TOLERANCE: B, D, F, G, J
RESISTANCE TOLERANCE: F, G, J


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, NETWORK, FIXED, FILM, 8 PIN SIP, STYLE RZ080


MIL-R-83401/8

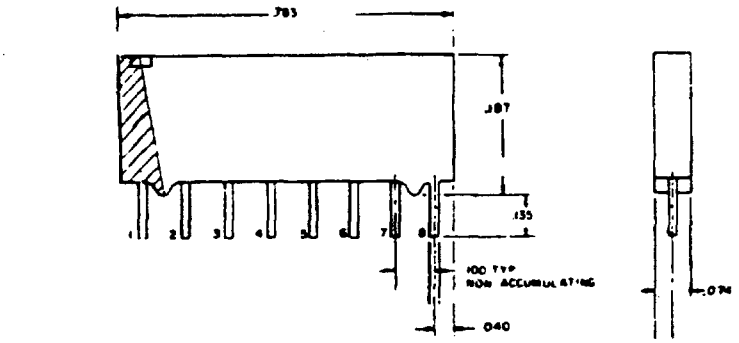

SCHEMATIC "C"

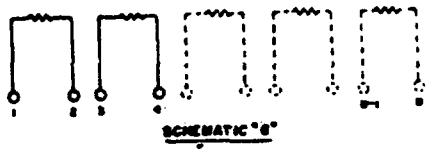

SCHEMATIC "G"



SCHEMATIC "H"

TABLE I. CHARACTERISTICS.


SCHEMATIC	RESISTANCE RANGE (OHMS)		POWER RATING (WATTS)		POWER RATING AT 25°C FOR 1000 HRS (WATTS)	
	MIN	MAX	ELEMENT	NETWORK	ELEMENT	NETWORK
C (CHARACTERISTICS H, K AND M)@	10	1.0M	0.12	0.84	0.15	1.05
G (CHARACTERISTICS H, K AND M)@	10	1.0M	0.12	0.48	0.15	0.60
H (CHARACTERISTICS K AND M)#	A001	A013	0.07	0.84	0.09	1.05


@ RESISTANCE TOLERANCE: B, D, F, G, J
RESISTANCE TOLERANCE: F, G, J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RESISTOR, NETWORK, FIXED, FILM, 10 PIN SIP, STYLE RZ090

MIL-R-83401/9

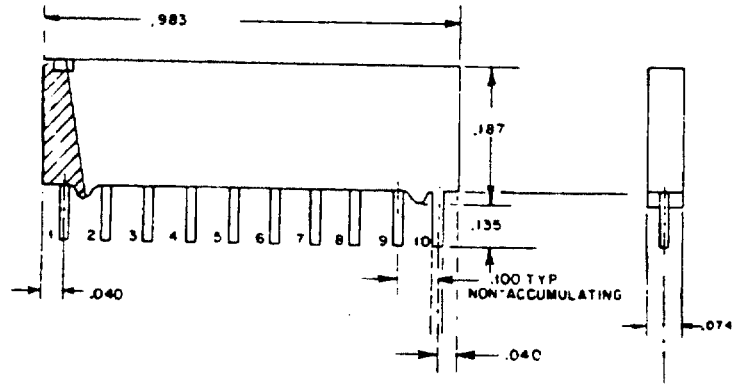


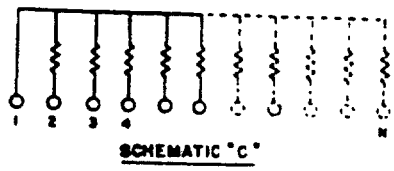

SCHEMATIC "C"

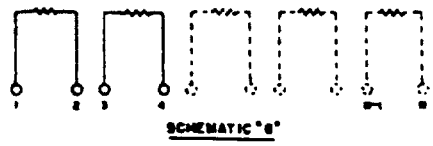

SCHEMATIC "G"



SCHEMATIC "H"

TABLE I. CHARACTERISTICS.

SCHEMATIC	RESISTANCE RANGE (OHMS)		POWER RATING (WATTS)		POWER RATING AT 25°C FOR 1000 HRS (WATTS)	
	MIN	MAX	ELEMENT	NETWORK	ELEMENT	NETWORK
C (CHARACTERISTICS K AND M)@	10	1.0M	0.12	1.08	0.15	1.35
G (CHARACTERISTICS K AND M)@	10	1.0M	0.12	0.60	0.15	0.75
H (CHARACTERISTICS K AND M)#	A001	A013	0.07	1.08	0.09	1.35

@ RESISTANCE TOLERANCE: B, D, F, G, J
RESISTANCE TOLERANCE: F, G, J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

THERMISTOR, INSULATED, STYLES RTH

MIL-T-23648/1 THRU /3, /9, /19

SCOPE: THERMISTORS ARE TEMPERATURE SENSITIVE RESISTORS, WHICH EXHIBIT A LARGE CHANGE IN ELECTRICAL RESISTANCE WHEN SUBJECTED TO A RELATIVELY MINUTE CHANGE IN BODY TEMPERATURE. INSULATED THERMISTORS ARE USED FOR TEMPERATURE COMPENSATION, CONTROL AND MEASUREMENT OVER THE VARIOUS TEMPERATURE RANGES.

SHOCK: MIL-STD-202, METHOD 213

VIBRATION: MIL-STD-202, METHOD 204

PART NUMBER EXAMPLE: RTH06AS102G

RTH06 A S 102 G

STYLE

RESISTANCE RATIO: SEE TABLE II.

LEAD TYPE: S = SOLDERABLE
W = WELDABLE


RESISTANCE ZERO POWER: THE FIRST TWO DIGITS REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES NUMBER OF ZEROS. SEE TABLE A

TOLERANCE: SEE TABLE III.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

THERMISTOR, INSULATED, STYLES RTH

MIL-T-23648/1 THRU /3, /9, /19

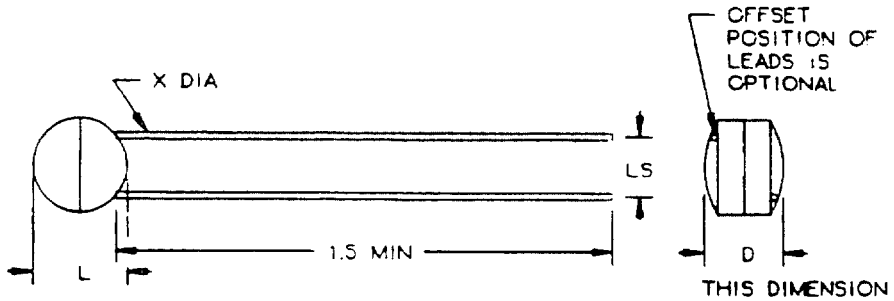

STYLES RTH06, RTH08, RTH10

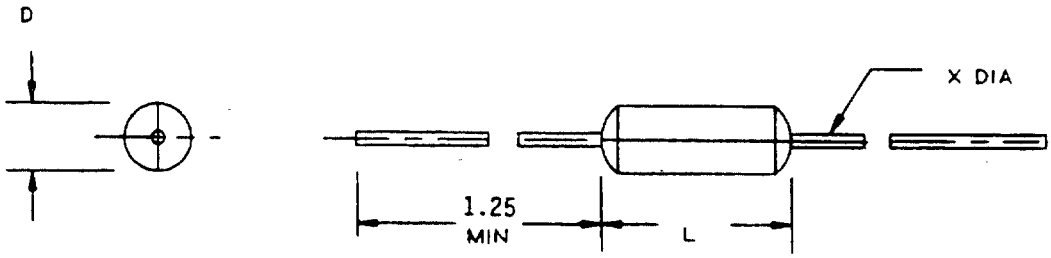

STYLES RTH22 AND RTH42

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

THERMISTOR, INSULATED, STYLES RTH

MIL-T-23648/1 THRU /3, /9, /19

TABLE I. STYLES AND CHARACTERISTICS.

MIL-T-23648/	STYLE	RESISTANCE VALUES AT 25°C (OHMS) RATIO 19.8 (A)	RESISTANCE VALUES AT 25°C (OHMS) RATIO 29.4 (B)	DIMENSIONS L	DIMENSIONS D (MAX)	DIMENSIONS X	DIMENSIONS LS	POWER RATING (MAX)
1	RTH06	68 MIN 560 MAX	680 MIN 4.7K MAX	.25	.26	.020	.18	.50
2	RTH08	27 MIN 180 MAX	180 MIN 1.8K MAX	.44	.36	.025	.24	1.00
3	RTH10	10 MIN 82 MAX	68 MIN 330 MAX	.85	.45	.032	.41	1.50
		RATIO 0.55 (E)						
9	RTH22	10 MIN 10K MAX		.41	.14	.025		.50
19	RTH42	10 MIN 10K MAX		.285	.10	.020		.25

TABLE II. RESISTANCE CHARACTERISTICS.

RESISTANCE TEMPERATURE CHARACTERISTIC			RESISTANCE RATIO	
TEMPERATURE (°C)	RATIO A	RATIO B	SYMBOL	RESISTANCE RATIO
-55	54.9	100.00	A	19.8
-15	5.77	7.38		
0	2.85	3.27	B	29.4
25	1.00	1.00		
50	.405	.360	E	0.55
75	.184	.148		
100	.0923	.0675		
125	.0503	.0340		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

THERMISTOR, INSULATED, STYLES RTH

MIL-T-23648/1 THRU /3, /9, /19

TABLE III. RESISTANCE TOLERANCE VS. TEMPERATURE.

FOR EACH RESISTANCE TOLERANCE CHARACTERISTIC			
SEQUENCE	TEMPERATURE (°C)	J (±%)	K (±%)
1	-55	15	20
2	-15	9	14
3	0	7	12
4	25	5	10
5	50	7	12
6	75	9	14
7	100	12	17
8	125	15	20

TABLE IV. FACTORS FOR DETERMINING RESISTANCE AT VARIOUS TEMPERATURES (RATIO E).

	RESISTANCE RANGE (OHMS)						
TEMPERATURE (°C)	10-68	82-150	180-560 180-470	680-1.8K 560-1.2K	1.8K-12K 1.5K-5.6K	6.8K-10K	FOR RTH22 FOR RTH42
-55	.615	.582	.560	.550	.515	.510	
-15	.790	.770	.755	.740	.730	.730	
0	.863	.847	.838	.835	.825	.825	
25	1.000	1.000	1.000	1.000	1.000	1.000	
50	1.160	1.170	1.180	1.200	1.230	1.190	
75	1.350	1.370	1.400	1.420	1.450	1.400	
100	1.545	1.584	1.623	1.656	1.670	1.610	
125	1.750	1.800	1.860	1.920	1.960	1.830	

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, FILM, CHIP, ESTABLISHED RELIABILITY, STYLE RM

MIL-R-55342/2 THRU /4, /6

SCOPE: FIXED, FILM CHIP, ESTABLISHED RALIABILITY RESISTORS, STYLES RM0505, RM0705, RM1005, AND RM1505, ARE UNCASED LEADLESS CHIP RESISTORS, USED FOR INCORPORATION INTO HUBRID CIRCUITS. THESE RESISTORS ARE INTENDED TO BE USED ONLY WHERE SUPPLEMENTAL MOISTURE PROTECTION IS PROVIDED BY POTTING OR ENCAPSULATING.

TEMPERATURE RANGE: -55°C TO +125°C, +25°C TO +70°C AT RATED POWER

PART NUMBER EXAMPLE: M55342/1-M1003FSR

M55342/1	M	1003	F	S	R

STYLE

CHARACTERISTIC:
K = ±100PPM/°C
M = ±300PPM/°C

RESISTANCE: FIRST TWO OR THREE DIGITS REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. WHEN R IS USED, SUCCEEDING DIGITS OF THE GROUP REPRESENT SIGNIFICANT FIGURES. R = DECIMAL POINT. SEE TABLE A.

TOLERANCE:
F = ±1.0%
J = ±5.0%
K = ±10.0%

TERMINATION: PRETINNED SOLDERABLE
S = ONE SURFACE
R = WRAP AROUND
PLATINUM W/GOLD
WELDABLE/SOLDERABLE
T = ONE SURFACE
U = WRAP AROUND

FAILURE RATE:
P = ±.1%/1000 HRS
R = ±.01%/1000 HRS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, FILM, CHIP, ESTABLISHED RELIABILITY, STYLE RM

MIL-R-55342/2 THRU /4, /6

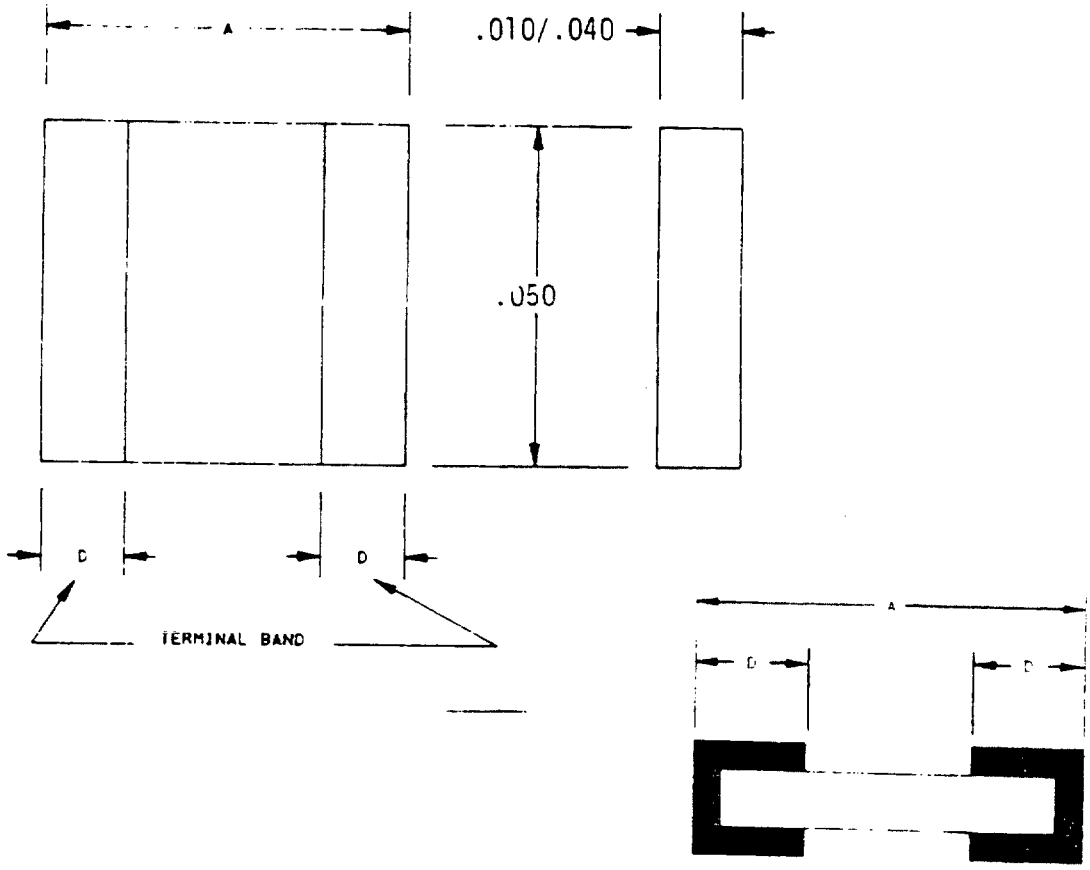


TABLE I. STYLES AND CHARACTERISTICS.

MIL-R-55342/	STYLE	DIMENSIONS A	DIMENSIONS D	RESISTANCE RANGE* (OHMS) MIN	RESISTANCE RANGE* (OHMS) MAX	POWER RATING (WATTS)
2	RM0505	.050	.010	10	.47M	.05
3	RM1005	.100	.015	10	1.0M	.1
4	RM1505	.150	.015	10	5.0M	.15
6	RM0705	.075	.015	10	1.0M	.1

* APPLICABLE TO TOLERANCE J (OTHER TOLERANCES MAY HAVE SLIGHTLY DIFFERENT RANGES).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RESISTOR, FIXED, FILM, CHIP, ESTABLISHED RELIABILITY, STYLE RM

MIL-R-55342/2 THRU /4, /6

TABLE I (A) DESIGNATION OF RESISTANCE VALUES FOR RESISTANCE TOLERANCES <±2%

DESIGNATION	RESISTANCE OHMS
1R00 TO 9R76 INCL.	1.00 TO 9.76 INCL.
10R0 TO 97R6 INCL.	10.0 TO 97.6 INCL.
1000 TO 9760 INCL.	100 TO 976 INCL.
1001 TO 9761 INCL.	1,000 TO 9,760 INCL.
1002 TO 9762 INCL.	10,000 TO 97,600 INCL.
1003 TO 9763 INCL.	100,000 TO 976,000 INCL.
1004 TO 9764 INCL.	1,000,000 TO 9,760,000 INCL.
1005	10,000,000

TABLE I (B) DESIGNATION OF RESISTANCE VALUES FOR RESISTANCE TOLERANCES >±2%

DESIGNATION	RESISTANCE OHMS
5R1 TO 9R1 INCL.	5.1 TO 9.1 INCL.
100 TO 910 INCL.	10.0 TO 91 INCL.
101 TO 911 INCL.	100 TO 910 INCL.
102 TO 912 INCL.	1,000 TO 9,100 INCL.
103 TO 913 INCL.	10,000 TO 91,000 INCL.
104 TO 914 INCL.	100,000 TO 910,000 INCL.
105	1,000,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.