MIL-STD-242G (NAVY) PART 4
17 SEPTEMBER 1981
SUPERSEDING
MIL-STD-242F (NAVY), PART IV

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS SELECTED STANDARDS

CAPACITORS

FSC 59GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

Electronic Equipment Parts, Selected Standards, Capacitors

MIL-STD-242G(NAVY) PART 4

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to: Commander, Naval Electronic Systems Command, Attn: ELEX 8111, Department of the Navy, Washington, D. C. 20360.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS

1. SCOPE.

1.1 SCOPE. THIS STANDARD ESTABLISHES THE REQUIREMENTS FOR THE SELECTION OF CAPACITORS USED IN THE DESIGN AND MANUFACTURE OF NAVY EQUIPMENT.

1.2 PURPOSE. THE PURPOSE OF THIS STANDARD IS TO CONTROL AND MINIMIZE THE VARIETY OF CAPACITORS IN NAVY EQUIPMENTS IN ORDER TO FACILITATE EFFECTIVE LOGISTIC SUPPORT, IMPROVE QUALITY AND REDUCE COST.

2. REFERENCED DOCUMENTS.

2.1 THE ISSUES OF THE FOLLOWING DOCUMENTS IN EFFECT ON THE DATE OF INVITATION FOR BIDS FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

SPECIFICATIONS

MILITARY

MIL-C-20 -CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-81 -CAPACITORS, VARIABLE CERAMIC DIELECTRIC, GENERAL SPECIFICATION FOR.

MIL-C-11015 -CAPACITORS, FIXED, CERAMIC DIELECTRIC (GENERAL PURPOSE), GENERAL SPECIFICATION FOR.

MIL-C-11693 -CAPACITORS, FEED THROUGH, RADIO-INTERFERENCE REDUCTION, AC AND DC (HERMETICALLY SEALED IN METAL CASES), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-14409 -CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER), GENERAL SPECIFICATION FOR.

MIL-C-19978 -CAPACITORS, FIXED, PLASTIC (OR PAPER-PLASTIC) DIELECTRIC, (HERMETICALLY SEALED IN METAL, CERAMIC, OR GLASS CASES), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-23183 -CAPACITORS, FIXED OR VARIABLE, VACUUM OR GAS DIELECTRIC, GENERAL SPECIFICATION FOR.

MIL-C-23269 -CAPACITORS, FIXED, GLASS DIELECTRIC, ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-39001 -CAPACITORS, FIXED, MICA DIELECTRIC, ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-39003 -CAPACITORS,FIXED, ELECTROLYTIC (SOLID ELECTROLYTE), TANTALUM,ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-39006 -CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-39014 -CAPACITORS, FIXED, CERAMIC DIELECTRIC (GENERAL PURPOSE), ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-39018 -CAPACITORS, FIXED, ELECTROLYTIC (ALUMINUM OXIDE), ESTABLISHED RELIABILITY AND NON-ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-39022 -CAPACITORS, FIXED, METALLIZED, PAPER-PLASTIC FILM, OR PLASTIC FILM DIELECTRIC, DIRECT AND ALTERNATING CURRENT, (HERMETICALY SEALED IN METAL CASES), ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-55365 -CAPACITORS, CHIP, FIXED, TANTALUM, ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

MIL-C-55681 -CAPACITORS, CHIP, MULTIPLE LAYER, FIXED, UNENCAPSULATED, CERAMIC DIELECTRIC, ESTABLISHED RELIABILITY, GENERAL SPECIFICATION FOR.

3. DEFINITIONS.

3.1 THE TERMS USED IN THIS STANDARD ARE DEFINED IN REFERENCED DOCUMENTS.

4. GENERAL REQUIREMENTS

4.1 SELECTION OF DEVICES. CAPACITORS SHALL BE SELECTED FROM THE TYPES LISTED IN THIS STANDARD. THE VARIETY OF TYPES USED IN ANY NAVY EQUIPMENT SHALLBE THE MINIMUM NECESSARY TO PROVIDE SATISFACTORY PERFORMANCE AND THE CONTRACTOR (HARDWARE DESIGNER/BUILDER) SHALL EXERCISE ALL REASONABLE DESIGN CHOICES TO ACHIEVE THIS OBJECTIVE.

4.2 CRITERIA FOR INCLUSION IN THIS STANDARD.

(A). THE DEVICE MUST SATISFY A WIDE RANGE OF DESIGN REQUIREMENTS.

(B). AT LEAST ONE MANUFACTURER IS QUALIFIED TO THE APPLICABLE DETAIL SPECIFICATION.

(C). THERE IS REASONABLE ASSURANCE THAT THE DEVICE WILL BE AVAILABLE FOR AT LEAST SEVEN YEARS.

4.3 CAPACITOR CHARACTERISTICS. THE CHARACTERISTICS LISTED LISTED HEREIN ARE FOR REFERENCE ONLY AND ARE INTENDED AS AN AID IN SELECTING DEVICES. THE APPLICABLE DETAIL SPECIFICATION SHALL BE USED FOR ALL FINAL DESIGN CRITERIA.

4.4 CONFLICT OF DATA. IN THE EVENT OF CONFLICT BETWEEN THE TECHNICAL DESCRIPTION OF DEVICES IN THIS STANDARD AND THE APPLICABLE DETAIL SPECIFICATION. THE DETAIL SPECIFICATION SHALL GOVERN.

5. CAPACITOR IDENTIFICATION

5.1 CAPACITOR IDENTIFICATION IS THE PART NUMBER OR TYPE DESIGNATION AS LISTED IN THIS STANDARD.

Review activities:
Navy - AS, OS, SH

User Activity:
Navy - MC

Preparing activity:
Navy - EC

(Project Number 59GP-N031-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

PART 4
CAPACITORS

PAGE NUMBER

100. CAPACITORS, FIXED

110. ELECTROLYTIC

111. ALUMINUMM

111.1 MIL-C-39018 (STYLES CUR13,17,19,71,91 AND STYLES CU15,81) 111.1 THROUGH 111.21

112. TANTALUM NON-SOLID ELECTROLYTE

112.1 MIL-C-39006 (STYLES CLR25,27,35,37,71,73,79) 112.1 " 112.19

113. TANTALUM SOLID ELECTROLYTE

113.1 MIL-C-39003(STYLES CSR09,13,23,33,91) 113.1 " 113.26

121. CERAMIC

121.1 MIL-C11015 (STYLES CK60,62,63,65,66,67) 121.1 " 121.4
MIL-C-39014 (STYLES CKR04,05,06,11,12,14,15,16,17,18,20,72,75 76,82,83) 121.5 " 121.22
MIL-C-20 (STYLES CCR05,06,07,08,09,75,76,77,78,79) 121.23 " 121.32

122. PLASTIC OR PAPER/PLASTIC

122.1 MIL-C-19978 (STYLES CQR07,09,12,13,29,32,33) 122.1 " 122.29

123. METALIZED PLASTIC

123.1 MIL-C-39022 (STYLES CHR09,10,19,49) 123.1 " 123.23

131. MICA

131.1 MIL-C-39001 (STYLES CMR03,04,05,06,07,08) 131.1 " 131.10

132. GLASS

132.1 MIL-C-23269 (STYLES CYR10,13,15,17,20,22,30,32,41,42,43,51,52,53) 132.1 " 132.25

133. PAPER OR PAPER/PLASTIC, FEEDTHROUGH

133.1 MIL-C-11693 (STYLES CZR23,24) 133.1 " 133.2

140. CHIP

141. TANTALUM

141.1 MIL-C-55365 (STYLES CWR01,02,03,04,06) 141.1 " 141.12

142. CERAMIC MIL-C-55681 (STYLES CDR01,02,03,04,05,06,11,12, 13,14,21,22,23,24,25) 142.2 " 142.16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

200. CAPACITORS,VARIABLE TRIMMER

211. CERAMIC

211.1 MIL-C-81 (STYLES CV11,21,31,32,34) 211.1 * 211.5

212. PISTON

212.1 MIL-C-14409 (STYLES PC25,26,38,39,41,42,43,48,51,52) 212.1 * 212.6

300. CAPACITORS, VARIABLE, GAS OR VACUUM DIELECTRIC

310.1 MIL-C-23183 (STYLES CG60,65,66) 310.1 * 310.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018(ESTABLISHED AND NON-ESTABLISHED RELIABILITY)

SCOPE: FIXED, ELECTROLYTIC CAPACITORS PER MIL-C-39018 ARE SUITABLE FOR OPERATION AT TEMPERATURES -45°C TO +105°C. STYLES CUR13, CUR17, CUR71, CU81, CUR91 AND CUR19 ARE POLARIZED DEVICES AND NOT DESIGNED FOR USE WHERE VOLTAGE REVERSAL WILL BE EXPERIENCED. STYLE CU15 IS A NONPOLARIZED DEVICE.

TEMP RANGE: -55°C TO +85°C(CU15, CUR13 AND CUR71)
-55°C TO +105°C(CUR19, CUR91 AND CUR17)
-40°C TO +85°C(CU81)


SHOCK: 100 G, SAWTOOTH,(MIL-STD-202, METHOD 213) STYLES CUR13, CU15, CUR19 AND CUR17
75 G, SAWTOOTH, (MIL-STD-202, METHOD 213) STYLES CUR71, CUR91 AND CU81

VIBRATION: 15 G, 10-2000 Hz(MIL-STD-202, METHOD 204) STYLES CUR13 AND CU15
10-55 Hz AND RETURN TO 10 Hz(MIL-STD-202, METHOD 201) STYLES CUR17, CUR71, CU81, CUR91 AND CUR19


PART NUMBER: M39018/01-1001

M39018	01	-1001	-
GENERAL REQUIREMENTS	DETAIL SPECIFICATION	DASH NUMBER	FAILURE RATE LEVEL (M 1.0%, P 0.1%)

MIL-C-39018/01

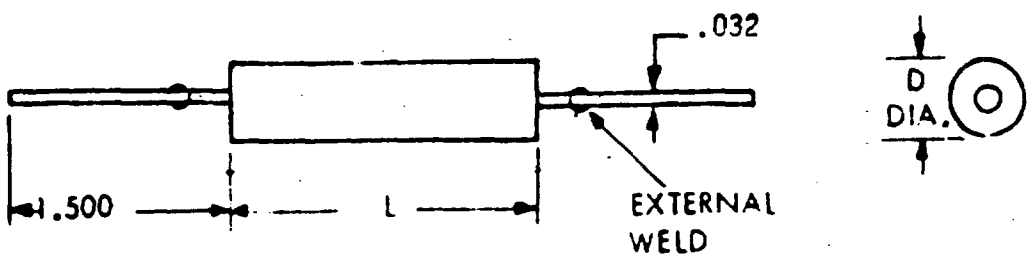

CASE SIZE	DIMENSIONS L	D
A0	.938	.281
A1	.938	.375
A2	1.125	.375
A3	1.375	.375
A4	1.625	.375
A5	2.188	.375
A6	2.688	.375



CASE
CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/01

TABLE I. STYLE CUR13 CHARACTERISTICS AND DASH NUMBERS.

CAPACI-TANCE	RATED VOLTAGE		SURGE VOLTAGE		ESR		MAXIMUM IMPEDANCE AT -55°C AND 120 Hz	LEAKAGE		MAXIMUM AC RIPPLE CURRENT 120 Hz @85°C	CASE SIZE	DASH NUMBER M39018/01-		
	85°C	125°C	85°C	125°C	25°C	85°C 125°C		25°C	85°C 125°C			CAPACITANCE TOLERANCE		
												-10+30	-10+50	-10+75
uF	V dc		V dc		OHM		OHM	uA		mA				
220	7	5	10	7	1.21	1.51	20	3	18	290	A1	1001-	---	1101-
270	7	5	10	7	.98	1.23	17	3	18	360	A2	1002-	---	1102-
390	7	5	10	7	.68	.85	12	4	24	520	A3	1003-	---	1103-
560	7	5	10	7	.47	.59	8	5	30	750	A4	1004-	---	1104-
820	7	5	10	7	.32	.40	5.5	7	42	1100	A5	1005-	---	1105-
1000	7	5	10	7	.27	.33	4.5	10	60	1350	A6	1006-	---	1106-
100	10	7	15	10	2.65	3.32	38	2	12	285	A0	1007-	---	1107-
180	10	7	15	10	1.47	1.84	25	3	18	438	A1	1008-	---	1108-
220	10	7	15	10	1.21	1.51	20	3	18	527	A2	1009-	---	1109-
330	10	7	15	10	.80	1.00	14	4	24	696	A3	1010-	---	1110-
470	10	7	15	10	.56	.71	9.6	5	30	892	A4	1011-	---	1111-
680	10	7	15	10	.39	.49	6.6	7	42	1210	A5	1012-	---	1112-
820	10	7	15	10	.32	.40	5.5	10	60	1490	A6	1013-	---	1113-
68	15	10	20	15	3.90	4.86	66	2	12	181	A0	1014-	---	1114-
82	15	10	20	15	3.23	4.04	55	2	12	219	A0	1015-	---	1115-
150	15	10	20	15	1.77	2.21	30	3	18	400	A1	1016-	---	1116-
180	15	10	20	15	1.47	1.84	25	3	18	475	A2	1017-	---	1117-
270	15	10	20	15	.98	1.23	17	4	24	628	A3	1018-	---	1118-
390	15	10	20	15	.68	.85	12	5	30	810	A4	1019-	---	1119-
560	15	10	20	15	.47	.59	8	7	42	1100	A5	1020-	---	1120-
680	15	10	20	15	.39	.49	6.6	10	60	1320	A6	1021-	---	1121-
33	30	20	40	30	8.04	10.05	91	2	12	164	A0	1022-	---	1122-
47	30	20	40	30	5.64	7.05	64	2	12	196	A0	1023-	---	1123-
82	30	20	40	30	3.23	4.04	36	3	18	297	A1	1024-	---	1124-
100	30	20	40	30	2.65	3.33	30	3	18	353	A2	1025-	---	1125-
120	30	20	40	30	2.21	2.76	25	4	24	419	A3	1026-	---	1126-
150	30	20	40	30	1.77	2.21	20	4	24	470	A3	1027-	---	1127-
220	30	20	40	30	1.20	1.51	14	5	30	607	A4	1028-	---	1128-
330	30	20	40	30	.80	1.00	9.1	7	42	848	A5	1029-	---	1129-
390	30	20	40	30	.68	.85	7.7	10	60	1000	A6	1030-	---	1130-
22	50	40	60	50	9.04	15.07	140	2	12	134	A0	1031-	---	1131-
33	50	40	60	50	5.03	10.05	91	3	18	188	A1	1032-	---	1132-
47	50	40	60	50	4.23	7.05	64	3	18	243	A2	1033-	---	1133-
56	50	40	60	50	3.55	5.92	54	4	24	286	A3	1034-	---	1134-
68	50	40	60	50	2.92	4.88	44	4	24	315	A3	1035-	---	1135-
100	50	40	60	50	1.99	3.32	30	5	30	410	A4	1036-	---	1136-
150	50	40	60	50	1.33	2.21	20	7	42	571	A5	1037-	---	1137-
180	50	40	60	50	1.11	1.84	17	10	60	680	A6	1038-	---	1138-
12	75	60	90	75	16.58	27.63	250	2	12	96	A0	1039-	---	1139-
22	75	60	90	75	9.04	15.07	140	3	18	153	A1	1040-	---	1140-
33	75	60	90	75	6.03	10.05	91	3	18	204	A2	1041-	---	1141-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/01


TABLE I. STYLE CUR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE	RATED VOLTAGE		SURGE VOLTAGE		ESR		MAXIMUM IMPEDANCE AT -55°C AND 120 Hz	LEAKAGE		MAXIMUM AC RIPPLE CURRENT 120 Hz @85°C	CASE SIZE	DASH NUMBER M39018/01-		
	85°C	125°C	85°C	125°C	25°C	85°C 125°C		25°C	85°C 125°C			CAPACITANCE TOLERANCE		
												-10+30	-10+50	-10+75
uF	V dc		V dc		OHM		OHM	uA		mA				
47	75	60	90	75	4.27	7.05	64	4	24	262	A3	1042-	---	1142-
68	75	60	90	75	2.92	4.88	44	5	30	337	A4	1043-	---	1143-
100	75	60	90	75	1.99	3.32	30	7	42	506	A5	1044-	---	1144-
120	75	60	90	75	1.65	2.76	25	10	60	555	A6	1045-	---	1145-
8.2	100	75	125	100	24.26	40.44	360	2	12	82	A0	1046-	---	1146-
12	100	75	125	100	16.54	27.63	250	3	18	109	A1	1047-	---	1147-
15	100	75	125	100	13.26	22.10	200	3	18	137	A2	1048-	---	1148-
22	100	75	125	100	9.04	15.07	140	4	24	179	A3	1049-	---	1149-
33	100	75	125	100	6.03	10.05	91	5	30	235	A4	1050-	---	1150-
47	100	75	125	100	4.23	7.05	64	7	42	319	A5	1051-	---	1151-
68	100	75	125	100	2.92	4.88	44	10	60	417	A6	1052-	---	1152-
4.7	150	100	175	125	28.22	56.44	640	2	12	69	A0	1053-	1153-	---
8.2	150	100	175	125	16.17	32.35	360	3	18	105	A1	1055-	1155-	---
12	150	100	175	125	11.05	22.10	250	3	18	137	A2	1056-	1156-	---
18	150	100	175	125	7.37	14.74	170	4	24	182	A3	1057-	1157-	---
22	150	100	175	125	6.03	12.06	140	5	30	214	A4	1058-	1158-	---
33	150	100	175	125	4.02	8.04	91	7	42	300	A5	1059-	1159-	---
56	150	100	175	125	2.37	4.74	54	10	60	423	A6	1060-	1160-	---
3.3	200	150	225	175	40.30	80.38	500	4	24	63	A0	1061-	1161-	---
5.6	200	150	225	175	23.68	47.37	333	6	36	86	A1	1062-	1162-	---
8.2	200	150	225	175	16.17	32.35	250	6	36	113	A2	1063-	1163-	---
12	200	150	225	175	11.05	22.10	154	8	48	148	A3	1064-	1164-	---
15	200	150	225	175	8.84	17.68	118	10	60	177	A4	1065-	1165-	---
27	200	150	225	175	4.91	9.82	77	14	84	271	A5	1066-	1166-	---
39	200	150	225	175	3.40	6.80	51	20	120	353	A6	1067-	1167-	---
2.2	250	200	275	225	60.45	120.57	910	4	24	58	A0	1068-	1168-	---
5.6	250	200	275	225	23.68	47.37	540	6	36	86	A1	1069-	1169-	---
6.8	250	200	275	225	19.50	39.01	440	6	36	103	A2	1070-	1170-	---
10	250	200	275	225	13.26	26.53	300	8	48	125	A3	1071-	1171-	---
12	250	200	275	225	11.05	22.10	250	10	60	159	A4	1072-	1172-	---
22	250	200	275	225	6.03	12.06	140	14	84	245	A5	1073-	1173-	---
27	250	200	275	225	4.91	9.82	110	20	120	294	A6	1074-	1174-	---
1.5	300	225	325	250	132.66	221.05	1300	16	96	42	A0	1075-	1175-	---
3.9	300	225	325	250	51.01	85.02	640	20	120	71	A1	1076-	1176-	---
5.6	300	225	325	250	35.53	59.21	440	22	132	84	A2	1077-	1177-	---
8.2	300	225	325	250	24.26	40.44	370	24	144	110	A3	1078-	1178-	---
10.0	300	225	325	250	19.89	33.16	300	26	156	130	A4	1079-	1179-	---
16.0	300	225	325	250	12.43	20.72	200	30	180	185	A5	1080-	1180-	---
18.0	300	225	325	250	11.05	18.42	170	36	216	217	A6	1081-	1181-	---


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/02
STYLE CU15

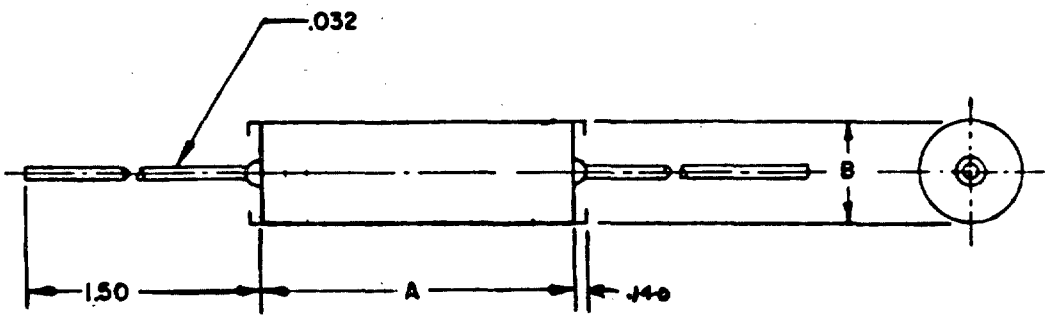

CASE SIZE	DIMENSIONS A	B
A0	.938	.281
A7	1.438	.375
A8	2.125	.375
A9	2.750	.375

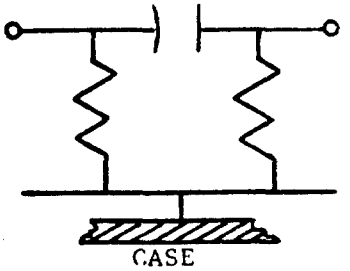

CASE
CIRCUIT DIAGRAM

TABLE I. STYLE CU15 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE	RATED VOLTAGE		SURGE VOLTAGE		ESR		MAXIMUM IMPEDANCE AT -55°C AND 120 Hz	LEAKAGE		CASE SIZE	DASH NUMBER M39018/02-		
	85°C	125°C	85°C	125°C	25°C	85°C 125°C		25°C	85°C 125°C		CAPACITANCE TOLERANCE		
											-10+30	-10+50	-10+75
uF	V dc		V dc		OHM		OHM	uA					
47	7	5	10	7	5.64	7.05	64	4	12	A0	0601	---	0701
220	7	5	10	7	1.21	1.51	14	10	30	A7	0602	---	0702
470	7	5	10	7	.56	.71	6.4	16	48	A8	0603	---	0703
680	7	5	10	7	.39	.49	4.4	24	72	A9	0604	---	0704
39	10	7	15	10	6.80	8.50	77	4	12	A0	0605	---	0705
180	10	7	15	10	1.47	1.84	17	10	30	A7	0606	---	0706
330	10	7	15	10	.80	1.00	9.1	16	48	A8	0607	---	0707
470	10	7	15	10	.56	.71	6.4	24	72	A9	0608	---	0708
33	15	10	20	15	8.04	10.05	91	4	12	A0	0609	---	0709
120	15	10	20	15	2.21	2.76	25	9	27	A7	0610	---	0710
150	15	10	20	15	1.77	2.21	20	10	30	A7	0611	---	0711
270	15	10	20	15	.98	1.23	11	16	48	A8	0612	---	0712
390	15	10	20	15	.68	.85	7.7	24	72	A9	0613	---	0713
15	30	20	40	30	17.68	22.10	130	5	15	A0	0614	---	0714
56	30	20	40	30	4.74	5.92	36	9	27	A7	0615	---	0715
68	30	20	40	30	3.90	4.88	30	10	30	A7	0616	---	0716
120	30	20	40	30	2.21	2.76	17	15	45	A8	0617	---	0717
150	30	20	40	30	1.77	2.21	13	16	48	A8	0618	---	0718

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/02

TABLE I. STYLE CU15 CHARACTERISTICS AND DASH NUMBERS(CONT).


CAPACI-TANCE	RATED VOLTAGE		SURGE VOLTAGE		ESR		MAXIMUM IMPEDANCE AT -55°C AND 120 Hz	LEAKAGE		CASE SIZE	DASH NUMBER M39018/02 – CAPACITANCE TOLERANCE		
	85°C	125°C	85°C	125°C	25°C	85°C 125°C		25°C	85°C 125°C		-10+30	-10+50	-10+75
µF	V dc		V dc		OHM		OHM	µA					
180	30	20	40	30	1.47	1.84	11	24	72	A9	0619	---	0719
6.8	50	40	60	50	19.50	39.01	300	6	18	A0	0620	---	0720
27	50	40	60	50	4.91	9.82	74	10	30	A7	0621	---	0721
56	50	40	60	50	2.37	4.74	36	16	48	A8	0622	---	0722
82	50	40	60	50	1.62	3.23	23	24	72	A9	0623	---	0723
3.9	75	60	90	75	34.01	68.01	510	7	21	A0	0624	---	0724
15	75	60	90	75	8.84	17.68	130	10	30	A7	0625	---	0725
18	75	60	90	75	7.37	14.74	110	11	33	A7	0626	---	0726
39	75	60	90	75	3.40	6.80	51	16	48	A8	0627	---	0727
56	75	60	90	75	2.37	4.74	36	24	72	A9	0628	---	0728
2.2	100	75	125	100	60.29	120.57	910	8	12	A0	0629	0729	---
12	100	75	125	100	10.05	22.10	170	16	48	A7	0630	0730	---
22	100	75	125	100	6.03	12.06	91	18	54	A8	0631	0731	---
33	100	75	125	100	4.02	8.04	61	28	84	A9	0632	0732	---
1.8	150	100	175	125	73.68	147.37	1100	10	30	A0	0633	0733	---
5.6	150	100	175	125	23.68	47.37	360	14	42	A7	0634	0734	---
8.2	150	100	175	125	16.17	32.35	230	16	48	A7	0635	0735	---
12	150	100	175	125	11.05	22.10	170	18	54	A8	0636	0736	---
15	150	100	175	125	8.84	17.68	130	20	60	A8	0637	0737	---
22	150	100	175	125	6.03	12.06	91	28	84	A9	0638	0738	---
1.0	200	150	225	175	132.63	265.26	2000	12	36	A0	0639	0739	---
4.7	200	150	225	175	28.22	56.44	400	20	60	A7	0640	0740	---
10	200	150	225	175	13.26	26.53	200	24	72	A8	0641	0741	---
15	200	150	225	175	8.84	17.68	130	32	96	A9	0642	0742	---
.68	250	200	275	225	195.04	390.09	3000	14	42	A0	0643	0743	---
3.3	250	200	275	225	40.19	80.38	610	22	66	A7	0644	0744	---
6.8	250	200	275	225	19.50	39.01	300	26	78	A8	0645	0745	---
10	250	200	275	225	13.26	26.53	200	36	108	A9	0646	0746	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/03

STYLE CUR17

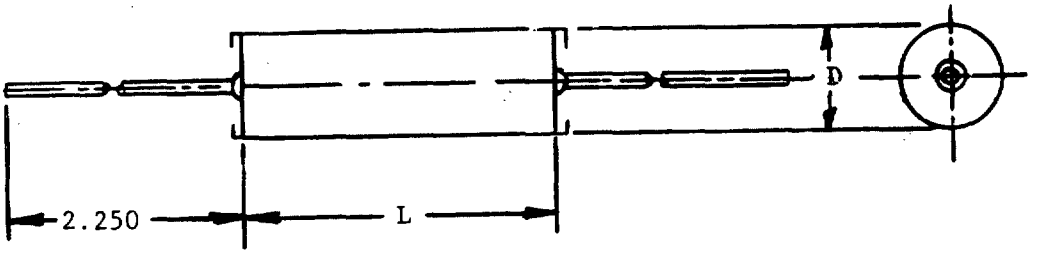

CASE SIZE	INSULATED DIMENSIONS INCHES		
	L		D
	MIN	MAX	MAX DIA
D1	1.125	1.328	.625
D3	1.125	1.328	.875
D4	1.625	1.828	.625
D5	1.625	1.828	.750
D7	1.625	1.828	1.000
E1	2.125	2.328	.625
E4	2.125	2.328	1.000
E5	2.625	2.828	.625
E6	2.625	2.828	.750
E7	2.625	2.828	.875
F1	2.625	2.828	1.000
F2	3.125	3.328	.625
F3	3.125	3.328	.875
F4	3.125	3.328	1.000
F6	3.625	3.828	.875
F7	3.625	3.828	1.000

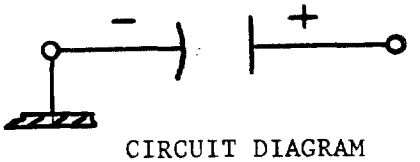

CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/03

STYLE CUR17

TABLE I. STYLE CUR19 CHARACTERISTICS AND DASH NUMBERS.


CAPACITANCE	RATED VOLTAGE 85°C AND 105°C	SURGE VOLTAGE 85°C AND 105°C	ESR 25°C	ESR 105°C	MAXIMUM IMPEDANCE AT -55°C AND 120 Hz	LEAKAGE 25°C	LEAKAGE 105°C	MAXIMUM AC RIPPLE CURRENT 120 Hz @85°C	CASE SIZE	DASH NUMBER M39018/03- CAPACITANCE TOLERANCE -10+30	-10+50	-10+75
µF	V dc	V dc	OHM	OHM	OHM	µA		mA				
18	150	175	7.37	22.10	150.00	25	155	103	D1	1260-	1360-	---
33	150	175	4.02	12.06	81.00	36	217	170	D4	1261-	1361-	---
47	150	175	2.82	8.47	57.00	41	246	192	D3	1262-	1362-	---
68	150	175	1.95	5.85	39.00	49	296	304	E5	1263-	1363-	---
100	150	175	1.33	3.98	27.00	61	367	362	D7	1264-	1364-	---
150	150	175	.88	2.65	18.00	77	464	528	E7	1265-	1365-	---
220	150	175	.60	1.81	12.00	86	519	627	F1	1266-	1366-	---
330	150	175	.40	1.21	8.00	114	687	966	F7	1267-	1367-	---
15	200	225	8.84	26.53	180.00	27	164	94	D1	1268-	1368-	---
33	200	225	4.02	12.06	81.00	41	244	162	D3	1269-	1369-	---
47	200	225	2.82	8.47	57.00	47	284	230	E1	1270-	1370-	---
68	200	225	1.95	5.85	39.00	59	354	304	E5	1271-	1371-	---
100	200	225	1.33	3.98	27.00	70	424	362	D7	1272-	1372-	---
150	200	225	.88	2.65	18.00	86	519	506	E4	1273-	1373-	---
220	200	225	.60	1.81	12.00	109	657	736	F4	1274-	1374-	---
270	200	225	.49	1.47	9.80	120	722	873	F7	1275-	1375-	---
10	250	275	13.26	39.79	250.00	25	150	96	D1	1276-	1376-	---
20	250	275	6.63	19.89	125.00	35	210	131	D4	1277-	1377-	---
33	250	275	4.02	12.06	80.00	45	270	212	E5	1278-	1378-	---
39	250	275	3.40	10.20	65.00	50	300	240	F2	1279-	1379-	---
68	250	275	1.95	5.85	40.00	67	402	299	D7	1280-	1380-	---
82	250	275	1.62	4.85	35.00	80	480	374	E4	1281-	1381-	---
120	250	275	1.11	3.32	25.00	94	564	548	F6	1282-	1382-	---
180	250	275	.74	2.21	15.00	111	666	712	F7	1283-	1383-	---
8.2	300	325	24.26	48.52	320.00	25	150	69	D1	1284-	1384-	---
15.0	300	325	13.26	26.53	170.00	35	210	114	D4	1285-	1385-	---
27.0	300	325	7.37	14.74	93.00	48	288	166	D5	1286-	1386-	---
47.0	300	325	4.23	8.47	54.00	63	378	275	E6	1287-	1387-	---
68.0	300	325	2.93	5.85	37.00	77	462	355	E7	1288-	1388-	---
82.0	300	325	2.43	4.85	31.00	87	522	423	F3	1289-	1389-	---
120.0	300	325	1.66	3.32	21.00	96	576	547	F6	1290-	1390-	---
150.0	300	325	1.33	2.65	17.00	112	672	650	F7	1291-	1391-	---
5.6	350	375	35.53	71.05	450.00	25	150	57	D1	1292-	1392-	---
20.0	350	375	9.95	19.89	125.00	42	252	150	E1	1293-	1393-	---
27.0	350	375	7.37	14.74	93.0	53	318	208	F2	1294-	1394-	---
47	350	375	4.23	8.47	54.0	66	396	248	D7	1295-	1395-	---
56	350	375	3.55	7.11	45.0	75	450	332	E7	1296-	1396-	---
82	350	375	2.43	4.25	31.0	86	516	422	F3	1297-	1397-	---
120	350	375	1.66	3.32	21.0	112	672	581	F7	1298-	1398-	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/04

STYLE CUR71

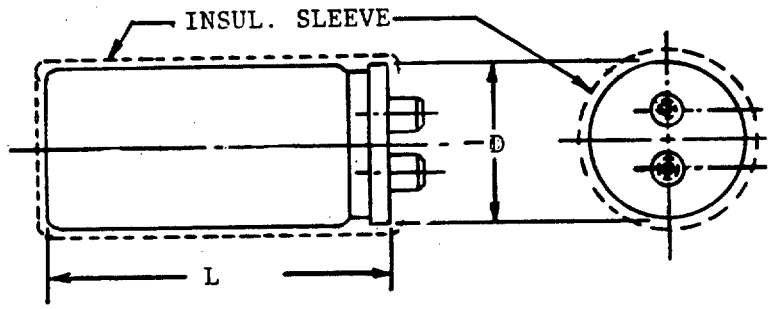

CASE SIZE	DIMENSIONS NOMINAL	
	L	D
A0	2.125	1.375
B0	3.125	1.375
C0	4.125	1.375
D0	4.625	1.375
E0	5.125	1.375
A1	2.125	2.000
B1	3.125	2.000
C1	4.125	2.000
D1	4.625	2.000
E1	5.125	2.000
C2	4.125	2.500
D2	4.625	2.500
C3	4.125	3.000
D3	4.625	3.000
F3	5.625	3.000



CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/04

STYLE CUR71

TABLE I. STYLE CUR71 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE	RATED VOLTAGE	SURGE VOLTAGE	ESR		MAXIMUM IMPEDANCE	LEAKAGE		MAXIMUM AC RIPPLE	CASE SIZE	DASH NUMBER
			25°C	85°C	AT -55°C AND 120 Hz	25°C	85°C	CURRENT		M39018/04-
		85°C AND 105°C						120 Hz @85°C		CAP TOL -10+30
	105°C									
μF	V dc	V dc	OHM	OHM	OHM	μA		mA		
220	150	200	.700	1.000	13.20	.27	1.60	.80	A0	2210-
330	150	200	.480	.680	9.00	.36	2.00	.98	A0	2211-
470	150	200	.340	.480	6.20	.42	2.39	1.46	B0	2212-
680	150	200	.230	.310	4.40	.47	2.82	1.88	D0	2213-
1000	150	200	.200	.225	2.90	.58	3.48	2.68	B1	2214-
1500	150	200	.130	.150	1.80	.71	4.26	3.12	C1	2215-
2200	150	200	.090	.100	1.35	.86	5.16	5.10	C2	2216-
3300	150	200	.060	.070	.90	1.10	6.30	6.80	C3	2217-
4700	150	200	.042	.056	.62	1.34	7.60	8.90	F3	2218-
150	200	250	1.000	1.500	18.30	.26	1.56	.66	A0	2219-
220	200	250	.700	1.000	12.80	.31	1.86	1.00	B0	2220-
330	200	250	.480	.680	8.30	.39	2.34	1.50	A1	2221-
470	200	250	.320	.480	5.80	.46	2.76	1.54	C0	2222-
680	200	250	.230	.320	4.00	.55	3.30	1.97	E0	2223-
1000	200	250	.200	.230	2.70	.72	4.02	2.74	C1	2224-
1500	200	250	.130	.150	1.70	.82	4.92	3.20	E1	2225-
2200	200	250	.090	.100	1.35	1.00	6.00	5.40	D2	2226-
3300	200	250	.060	.070	.90	1.20	7.20	7.00	D3	2227-
4100	200	250	.048	.065	.72	1.36	8.20	8.70	F3	2228-
100	250	300	1.300	2.000	27.50	.24	1.44	.60	A0	2229-
220	250	300	.600	.900	12.50	.35	2.10	1.10	A1	2230-
330	250	300	.400	.600	8.30	.43	2.58	1.40	C0	2231-
470	250	300	.420	.450	5.80	.51	3.06	1.90	B1	2232-
680	250	300	.300	.310	4.00	.62	3.72	2.50	C1	2233-
1000	250	300	.200	.210	2.70	.75	4.50	3.00	D1	2234-
1500	250	300	.130	.140	1.70	.92	5.52	3.70	C2	2235-
2200	250	300	.090	.110	1.20	1.10	6.60	5.20	C3	2236-
3300	250	300	.060	.075	.83	1.45	8.17	7.70	F3	2237-


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE


MIL-C-39018/05

STYLE CU81


SIZE
AA & AC

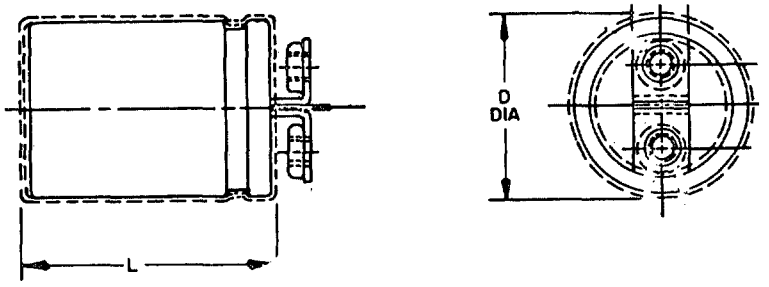

SIZE
DC & DF

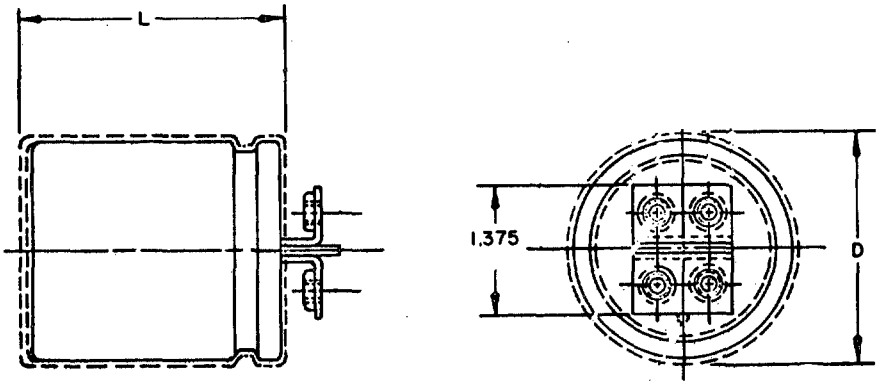

CASE SIZE	BASIC CASE D	BASIC CASE L	INSULATED CASE D (MAX)	INSULATED CASE L (MAX)
AA	1.375	2.125	1.453	2.250
AC	1.375	4.125	1.453	4.250
DC	3.000	4.125	3.078	4.250
DF	3.000	5.625	3.078	5.750



CASE
CIRCUIT DIAGRAM

TABLE I. STYLE CU81 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE	RATED VOLTAGE 85°C	SURGE VOLTAGE 85°C	ESR	MAXIMUM IMPEDANCE AT -55°C AND 120 Hz	LEAKAGE 25°C	LEAKAGE 105°C	RMS AC RIPPLE CURRENT 120 Hz @ 85°C			CASE SIZE	DASH NUMBER M39018/05- CAP TOL -10+30
								AMPS			
uF	V dc	V dc	OHM	OHM		uA					
3900	6	8	0.0500	0.0220	0.3	3.0	3.6	4.2	4.8	AA	0001
10000	6	8	0.0180	0.0080	0.3	3.0	7.7	9.1	10.4	AC	0002
56000	6	8	0.0020	0.0015	0.6	6.0	34.0	40.0	42.0	DC	0003
100000	6	8	0.0015	0.0010	0.6	6.0	44.2	52.0	54.6	DF	0004
2700	7.5	10	0.0720	0.0320	0.4	4.0	2.9	3.5	4.0	AA	0005
6800	7.5	10	0.0270	0.0120	0.4	4.0	5.5	6.6	7.7	AC	0006
47000	7.5	10	0.0025	0.0015	0.8	8.0	28.8	36.0	37.8	DC	0007
68000	7.5	10	0.0020	0.0010	0.8	8.0	36.0	45.0	47.2	DF	0008

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

TABLE I. STYLE CU81 CHARACTERISTICS AND DASH NUMBERS(CONT).


CAPACITANCE	RATED VOLTAGE 85°C	SURGE VOLTAGE 85°C	ESR	MAXIMUM IMPEDANCE AT -55°C AND 120 Hz	LEAKAGE 25°C	LEAKAGE 105°C	RMS AC RIPPLE CURRENT 120 Hz @ 85°C			CASE SIZE	DASH NUMBER M39018/05- CAP TOL -10+30
uF	V dc	V dc	OHM	OHM	uA		AMPS				
2200	10.0	15	0.0880	0.0400	0.5	5.0	2.7	3.2	3.7	AA	0009
5600	10.0	15	0.0320	0.0140	0.5	5.0	5.3	6.4	7.5	AC	0010
33000	10.0	15	0.0030	0.0015	1.0	10.0	26.4	33.0	34.7	DC	0011
56000	10.0	15	0.0025	0.0010	1.0	10.0	32.0	40.0	42.0	DF	0012
1800	15.0	20	0.1420	0.0710	.8	8.0	2.0	2.4	2.8	AA	0013
4700	15.0	20	0.0420	0.0250	.8	8.0	4.0	4.7	5.4	AC	0014
27000	15.0	20	0.0110	0.0070	1.6	15.0	13.6	17.0	18.7	DC	0015
39000	15.0	20	0.0055	0.0040	1.6	15.0	21.6	27.0	29.7	DF	0016
1200	20.0	30	0.2000	0.0070	1.0	10.0	1.7	2.0	2.3	AA	0017
3300	20.0	30	0.0600	0.0270	1.0	10.0	3.7	4.3	5.0	AC	0018
18000	20.0	30	0.0120	0.0070	2.0	15.0	12.0	16.0	17.6	DC	0019
27000	20.0	30	0.0060	0.0040	2.0	15.0	19.5	26.0	28.6	DF	0020
1000	25.0	40	0.2400	0.1100	1.3	12.5	1.5	1.9	2.2	AA	0021
2700	25.0	40	0.0700	0.0320	1.3	12.5	3.6	4.2	4.8	AC	0022
15000	25.0	40	0.0130	0.0100	2.5	15.0	12.0	16.0	17.6	DC	0023
22000	25.0	40	0.0070	0.0050	2.5	15.0	18.0	24.0	26.4	DF	0024
820	30.0	45	0.2500	0.1100	1.5	15.0	1.5	1.9	2.2	AA	0025
2200	30.0	45	0.0820	0.0370	1.5	15.0	3.3	3.8	4.4	AC	0026
12000	30.0	45	0.0140	0.0100	3.0	15.0	10.5	15.0	16.5	DC	0027
18000	30.0	45	0.0090	0.0050	3.0	15.0	14.7	21.1	23.1	DF	0028
560	40.0	55	0.2800	0.1200	2.0	15.0	1.4	1.8	2.2	AA	0029
1500	40.0	55	0.1200	0.0420	2.0	15.0	2.9	3.5	4.1	AC	0030
8200	40.0	55	0.0150	0.0100	4.0	15.0	10.5	15.0	18.0	DC	0031
12000	40.0	55	0.0100	0.0060	4.0	15.0	14.0	20.0	24.0	DF	0032
470	50.0	60	0.3000	0.1400	2.5	15.0	1.3	1.6	1.9	AA	0033
1000	50.0	60	0.1800	0.0470	2.5	15.0	2.6	3.2	3.8	AC	0034
6800	50.0	60	0.0180	0.0100	5.0	15.0	9.1	13.0	16.9	DC	0035
10000	50.0	60	0.0120	0.0060	5.0	15.0	12.6	18.0	23.4	DF	0036

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/06

STYLE CUR91

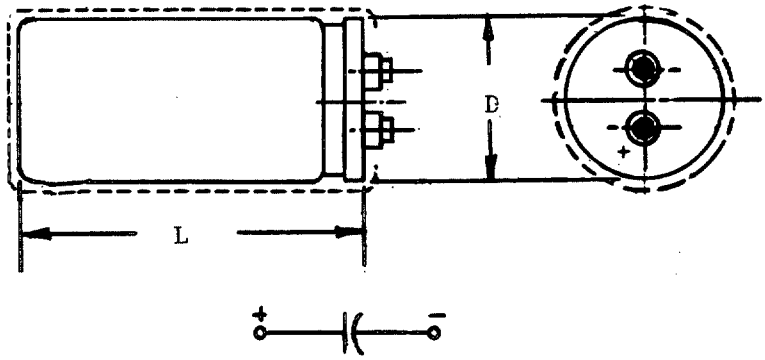

CIRCUIT DIAGRAM

CASE SIZE	BARE CASE DIMENSIONS D	BARE CASE DIMENSIONS L	CASE SIZE	BARE CASE DIMENSIONS D	BARE CASE DIMENSIONS L
AA	1.375	2.125	BF	2.000	5.625
AB	1.375	3.125	CB	2.500	3.125
AC	1.375	4.125	CC	2.500	4.125
AD	1.375	4.625	CD	2.500	4.625
AE	1.375	5.125	CE	2.500	5.125
AF	1.375	5.625	CF	2.500	5.625
BB	2.000	3.125	DC	3.000	4.125
BC	2.000	4.125	DD	3.000	4.625
BD	2.000	4.625	DE	3.000	5.125
BE	2.000	5.125	DF	3.000	5.625

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS.

RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX) 25°C	LEAKAGE (MAX) 105°C	MAX AC RIPPLE CURRENT 120 Hz @ 85°C	CASE SIZE	DASH NUMBER M39018/06- CAP TOL -10+50
V dc	uF	V dc	OHMS	OHMS	mA		AMPS		
8000	5	7	.080	1.280	.30	2.70	6.0	AA	0001-
17000	5	7	.040	.610	.44	3.96	8.0	AB	0002-
25000	5	7	.027	.410	.53	4.77	9.2	AC	0003-
29000	5	7	.023	.360	.57	5.13	10.4	AD	0004-
34000	5	7	.020	.310	.62	5.58	11.6	AE	0005-
37000	5	7	.018	.280	.65	5.85	12.2	AF	0006-
40000	5	7	.022	.280	.67	6.03	12.6	BB	0007-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/06

STYLE CUR91

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX) 25°C	LEAKAGE (MAX) 105°C	MAX AC RIPPLE CURRENT 120 Hz @ 85°C	CASE SIZE	DASH NUMBER M39018/06- CAP TOL -10+50
V dc	uF	V dc	OHMS	OHMS	mA		AMPS		
60000	5	7	.015	.190	.82	7.38	15.1	BC	0008-
67000	5	7	.014	.170	.87	7.83	16.3	CB	0009-
70000	5	7	.013	.160	.89	8.01	16.3	BD	0010-
80000	5	7	.011	.140	.95	8.55	16.6	BE	0011-
90000	5	7	.010	.130	1.00	9.00	16.9	BF	0012-
100000	5	7	.010	.120	1.06	9.54	19.1	CC	0013-
110000	5	7	.010	.110	1.11	9.99	21.5	CD	0014-
130000	5	7	.010	.100	1.21	10.90	23.0	CE	0015-
150000	5	7	.010	.091	1.30	11.70	23.8	CF	0016-
150000	5	7	.010	.091	1.30	11.70	24.1	DC	0017-
170000	5	7	.010	.091	1.38	12.40	24.7	DD	0018-
200000	5	7	.010	.084	1.50	13.50	26.6	DE	0019-
220000	5	7	.010	.084	1.57	14.10	26.8	DF	0020-
5000	10	15	.090	.840	.34	3.06	6.0	AA	0021-
10000	10	15	.045	.420	.47	4.23	8.2	AB	0022-
15000	10	15	.030	.280	.58	5.22	9.4	AC	0023-
17000	10	15	.026	.250	.62	5.58	10.4	AD	0024-
20000	10	15	.023	.210	.67	6.03	11.4	AE	0025-
22000	10	15	.020	.190	.70	6.30	12.2	AF	0026-
24000	10	15	.025	.180	.73	6.57	12.2	BB	0027-
37000	10	15	.017	.120	.91	8.21	14.6	BC	0028-
42000	10	15	.016	.110	.97	8.75	16.0	CB	0029-
43000	10	15	.014	.100	.98	8.85	15.4	BD	0030-
48000	10	15	.013	.093	1.04	9.35	16.3	BE	0031-
55000	10	15	.011	.081	1.11	9.99	16.8	BF	0032-
64000	10	15	.011	.069	1.20	10.80	19.0	CC	0033-
75000	10	15	.010	.060	1.30	11.70	21.5	CD	0034-
86000	10	15	.010	.054	1.39	12.50	22.2	CE	0035-
94000	10	15	.010	.051	1.45	13.10	20.0	DC	0036-
96000	10	15	.010	.051	1.47	13.20	23.0	CF	0037-
110000	10	15	.010	.048	1.57	14.10	22.7	DD	0038-
120000	10	15	.010	.045	1.64	14.80	23.4	DE	0039-
140000	10	15	.010	.042	1.77	16.00	24.2	DF	0040-
4000	15	20	.100	1.040	.37	3.31	6.5	AA	0041-
8000	15	20	.050	.520	.52	4.68	8.7	AB	0042-
12000	15	20	.034	.350	.64	5.73	9.8	AC	0043-
14000	15	20	.029	.300	.69	6.19	10.7	AD	0044-
16000	15	20	.025	.260	.74	6.61	12.0	AE	0045-
18000	15	20	.023	.230	.78	7.01	13.6	AF	0046-
20000	15	20	.028	.220	.82	7.39	13.0	BB	0047-
30000	15	20	.019	.140	1.00	9.05	15.2	BC	0048-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/06

STYLE CUR91

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX)		MAX AC RIPPLE CURRENT 120 Hz @ 85°C	CASE SIZE	DASH NUMBER M39018/06-
					25°C	105°C			CAP TOL
									-10+50
V dc	uF	V dc	OHMS	OHMS	mA		AMPS		
35000	15	20	.016	.120	1.09	9.78	17.1	BD	0049-
40000	15	20	.014	.110	1.16	10.50	18.2	BE	0050-
42000	15	20	.017	.110	1.19	10.70	18.2	CB	0051-
45000	15	20	.013	.096	1.23	11.10	19.5	BF	0052-
51000	15	20	.012	.087	1.31	11.80	20.7	CC	0053-
59000	15	20	.011	.075	1.41	12.70	21.8	CD	0054-
68000	15	20	.010	.066	1.51	13.60	23.1	CE	0055-
76000	15	20	.010	.060	1.60	14.40	24.5	CF	0056-
76000	15	20	.010	.060	1.60	14.40	23.1	DC	0057-
89000	15	20	.010	.054	1.73	15.60	25.7	DD	0058-
100000	15	20	.010	.051	1.84	16.50	26.6	DE	0059-
110000	15	20	.010	.048	1.93	17.30	27.5	DF	0060-
2800	20	30	.120	1.470	.35	3.19	6.1	AA	0061-
5100	20	30	.060	.810	.48	4.31	8.5	AB	0062-
8600	20	30	.040	.480	.62	5.60	9.9	AC	0063-
10000	20	30	.034	.410	.67	6.04	11.0	AD	0064-
11000	20	30	.030	.370	.70	6.33	11.7	AE	0065-
13000	20	30	.027	.320	.76	6.88	12.0	AF	0066-
20000	20	30	.020	.210	.95	8.54	15.4	BC	0067-
23000	20	30	.017	.180	1.02	9.16	15.8	BD	0068-
24000	20	30	.018	.170	1.04	9.35	16.0	CB	0069-
26000	20	30	.015	.160	1.08	9.73	16.5	BE	0070-
30000	20	30	.014	.140	1.16	10.50	17.2	BF	0071-
37000	20	30	.013	.110	1.29	11.60	18.8	CC	0072-
43000	20	30	.011	.100	1.39	12.50	19.9	CD	0073-
47000	20	30	.010	.090	1.45	13.10	21.2	CE	0074-
54000	20	30	.010	.081	1.56	14.00	22.0	DC	0075-
55000	20	30	.010	.078	1.57	14.20	22.6	CF	0076-
63000	20	30	.010	.069	1.68	15.20	24.5	DD	0077-
73000	20	30	.010	.063	1.81	16.30	25.9	DE	0078-
82000	20	30	.010	.057	1.92	17.30	26.5	DF	0079-
2500	25	40	.130	1.640	.38	3.38	5.7	AA	0080-
5500	25	40	.065	.750	.56	5.00	7.7	AB	0081-
7500	25	40	.044	.550	.65	5.85	9.6	AC	0082-
8700	25	40	.037	.470	.70	6.30	10.0	AD	0083-
10000	25	40	.033	.410	.75	6.75	11.0	AE	0084-
11000	25	40	.029	.370	.79	7.08	12.0	AF	0085-
17000	25	40	.024	.250	.98	8.80	14.5	BC	0086-
20000	25	40	.020	.210	1.06	9.54	16.1	BD	0087-
20000	25	40	.021	.210	1.06	9.54	16.8	CB	0088-
23000	25	40	.018	.018	1.14	10.20	16.8	BE	0089-

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/06

STYLE CUR91

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE @ 185°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 185°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX)		MAX AC RIPPLE CURRENT 120 Hz @ 85°C	CASE SIZE	DASH NUMBER M39018/06-
					25°C	105°C			CAP TOL -10+50
V dc	uF	V dc	OHMS	OHMS	mA		AMPS		
25000	25	40	.016	.017	1.19	10.70	17.4	BF	0090-
30000	25	40	.015	.014	1.30	11.70	19.6	CC	0091-
35000	25	40	.013	.012	1.40	12.60	20.7	CD	0092-
40000	25	40	.011	.011	1.50	13.50	22.1	CE	0093-
44000	25	40	.010	.100	1.57	14.20	19.4	DC	0094-
45000	25	40	.010	.093	1.59	14.30	23.2	CF	0095-
52000	25	40	.010	.081	1.71	15.40	25.5	DD	0096-
60000	25	40	.010	.072	1.84	16.50	26.5	DE	0097-
67000	25	40	.010	.066	1.94	17.50	27.5	DF	0098-
2200	30	45	.150	1.860	.39	3.47	5.5	AA	0099-
4400	30	45	.075	.930	.54	4.90	7.5	AB	0100-
6600	30	45	.050	.620	.67	6.00	8.8	AC	0101-
7700	30	45	.043	.530	.72	6.49	9.7	AD	0102-
8800	30	45	.038	.470	.77	6.94	11.5	AE	0103-
9900	30	45	.034	.410	.82	7.36	11.7	AF	0104-
10000	30	45	.038	.410	.82	7.39	12.0	BB	0105-
15000	30	45	.026	.280	1.00	9.06	14.3	BC	0106-
17000	30	45	.022	.240	1.07	9.64	15.1	BD	0107-
18000	30	45	.023	.230	1.10	9.92	15.8	CB	0108-
20000	30	45	.019	.210	1.16	10.50	15.9	BE	0109-
22000	30	45	.017	.190	1.22	11.00	17.0	BF	0110-
26000	30	45	.016	.160	1.32	11.90	18.6	CC	0111-
30000	30	45	.014	.140	1.42	12.80	20.3	CD	0112-
34000	30	45	.012	.120	1.51	13.60	21.0	CE	0113-
38000	30	45	.012	.110	1.60	14.40	19.2	DC	0114-
39000	30	45	.011	.110	1.62	14.60	21.8	CF	0115-
45000	30	45	.011	.093	1.74	15.70	23.3	DD	0116-
52000	30	45	.010	.081	1.87	16.90	25.3	DE	0117-
58000	30	45	.010	.075	1.98	17.80	27.0	DF	0118-
1800	40	55	.180	2.280	.40	3.62	5.0	AA	0119-
3700	40	55	.090	1.110	.58	5.19	8.0	AB	0120-
5500	40	55	.060	.750	.70	6.33	9.2	AC	0121-
6400	40	55	.051	.640	.76	6.83	10.7	AD	0122-
7400	40	55	.045	.560	.82	7.34	11.6	AE	0123
8200	40	55	.041	.500	.86	7.73	12.4	AF	0124-
9000	40	55	.045	.460	.90	8.10	12.4	BB	0125-
13000	40	55	.030	.320	1.08	9.73	14.7	BC	0126-
15000	40	55	.026	.280	1.16	10.50	16.0	BD	0127-
15000	40	55	.027	.280	1.16	10.50	16.8	CB	0128-
18000	40	55	.023	.230	1.27	11.50	17.9	BE	0129-
19000	40	55	.020	.220	1.31	11.80	18.1	BF	0130-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/06

STYLE CUR91

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX)		MAX AC RIPPLE CURRENT 120 Hz @ 85°C	CASE SIZE	DASH NUMBER M39018/06-
					25°C	105°C			CAP TOL -10+50
V dc	uF	V dc	OHMS	OHMS	mA		AMPS		
22000	40	55	.019	.190	1.41	12.70	19.6	CC	0131-
25000	40	55	.016	.170	1.50	13.50	21.0	CD	0132-
28000	40	55	.014	.150	1.59	14.30	22.3	CE	0133-
32000	40	55	.014	.130	1.70	15.30	22.2	DC	0134-
33000	40	55	.013	.130	1.72	15.50	23.1	CF	0135-
37000	40	55	.013	.110	1.82	16.40	24.2	DD	0136-
43000	40	55	.012	.100	1.97	17.70	25.5	DE	0137-
48000	40	55	.011	.090	2.08	18.70	27.1	DF	0138-
1400	50	75	.200	1.940	.40	3.57	4.6	AA	0139-
2900	50	75	.100	.940	.57	5.14	7.7	AB	0140-
4400	50	75	.067	.640	.70	6.33	8.8	AC	0141-
5100	50	75	.057	.530	.76	6.82	9.9	AD	0142-
5800	50	75	.050	.470	.81	7.27	10.9	AE	0143-
6600	50	75	.045	.410	.86	7.76	11.5	AF	0144-
9000	50	75	.036	.300	1.00	9.05	13.0	BC	0145-
11000	50	75	.029	.250	1.11	10.00	15.2	BD	0146-
12000	50	75	.029	.230	1.16	10.50	16.4	CB	0147-
13000	50	75	.025	.210	1.21	10.90	16.1	BE	0148-
15000	50	75	.023	.180	1.30	11.70	16.8	BF	0149-
17000	50	75	.021	.160	1.38	12.40	19.1	CC	0150-
20000	50	75	.018	.140	1.50	13.50	20.4	CD	0151-
22000	50	75	.016	.120	1.57	14.20	21.6	CE	0152-
25000	50	75	.014	.110	1.68	15.10	22.4	CF	0153-
25000	50	75	.016	.110	1.68	15.10	20.7	DC	0154-
30000	50	75	.015	.100	1.84	16.50	22.5	DD	0155-
34000	50	75	.013	.082	1.96	17.60	24.0	DE	0156-
39000	50	75	.012	.072	2.09	18.90	26.4	DF	0157-
820	75	100	.270	3.280	.30	2.69	4.0	AA	0158-
1600	75	100	.135	1.680	.41	3.70	6.6	AB	0159-
2300	75	100	.091	1.170	.52	4.68	7.7	AC	0160-
2600	75	100	.077	1.030	.55	4.96	8.6	AD	0161-
3000	75	100	.068	.900	.58	5.23	9.3	AE	0162-
3300	75	100	.061	.810	.64	5.73	10.3	AF	0163-
3700	75	100	.065	.730	.66	5.96	10.0	BB	0164-
5400	75	100	.044	.500	.81	7.30	12.9	BC	0165-
5700	75	100	.038	.480	.86	7.76	13.9	CB	0166-
6200	75	100	.037	.440	.87	7.84	13.4	BD	0167-
7100	75	100	.033	.380	.92	8.27	14.2	BE	0168-
7900	75	100	.029	.300	.99	8.90	15.1	BF	0169-
8500	75	100	.028	.320	1.06	9.50	16.7	CC	0170-
10000	75	100	.024	.270	1.14	10.30	18.6	CD	0171-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/06

STYLE CUR9i

TABLE I. STYLE CUR9i CHARACTERISTICS AND DASH NUMBERS(CONT).


RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX) 25°C	LEAKAGE (MAX) 105°C	MAX AC RIPPLE CURRENT 120 Hz @ 85°C	CASE SIZE	DASH NUMBER M39018/06- CAP TOL -10+50
V dc	uF	V dc	OHMS	OHMS	uA		AMPS		
11000	75	100	.021	.250	1.22	11.00	19.8	CE	0172-
13000	75	100	.019	.210	1.29	11.60	20.6	CF	0173-
13000	75	100	.020	.210	1.27	11.40	19.4	DC	0174-
15000	75	100	.019	.180	1.36	12.30	20.7	DD	0175-
17000	75	100	.017	.160	1.48	13.30	22.1	DE	0176-
19000	75	100	.015	.140	1.54	13.80	23.7	DF	0177-
410	100	150	.600	6.580	.24	2.13	3.5	AA	0178-
810	100	150	.300	3.330	.34	3.02	4.8	AB	0179-
1200	100	150	.200	2.250	.42	3.82	6.3	AC	0180-
1400	100	150	.170	1.930	.45	4.05	7.3	AD	0181-
1500	100	150	.150	1.790	.47	4.27	7.8	AF	0182-
1700	100	150	.135	1.590	.50	4.48	8.2	AF	0183-
1900	100	150	.135	1.420	.52	4.68	9.0	BB	0184-
2800	100	150	.091	.970	.64	5.73	10.8	BC	0185-
2900	100	150	.082	.740	.69	6.19	9.8	CB	0186-
3200	100	150	.077	.840	.69	6.19	12.0	BD	0187-
3600	100	150	.068	.760	.73	6.61	13.0	BE	0188-
4100	100	150	.061	.660	.76	6.88	13.8	BF	0189-
4400	100	150	.058	.620	.84	7.52	13.4	CC	0190-
5100	100	150	.050	.530	.90	8.10	14.0	CD	0191-
5900	100	150	.044	.460	.96	8.64	15.5	CE	0192-
6500	100	150	.041	.420	1.02	9.16	17.6	DC	0193-
6600	100	150	.039	.410	1.00	9.06	16.5	CF	0194-
7600	100	150	.039	.360	1.11	10.00	18.2	DD	0195-
8700	100	150	.034	.310	1.16	10.50	18.9	DE	0196-
9500	100	150	.030	.290	1.23	11.10	19.6	DF	0197-


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLTIC, ALUMINUM OXIDE

MIL-C-39018/07

STYLE CUR19

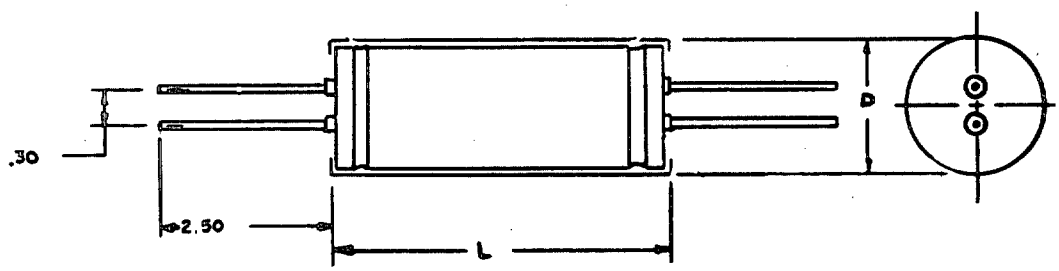



CIRCUIT DIAGRAM

CASE SIZE	INSULATED DIMENSIONS INCHES L MIN	L MAX	D MAX	CASE SIZE	INSULATED DIMENSIONS INCHES L MIN	L MAX	D MAX
H 1	1.625	1.843	.785	J 4	3.125	3.343	.910
H 2	2.125	2.343	.785	J 5	3.625	3.843	.910
H 3	2.625	2.843	.785	K 1	1.625	1.843	1.035
H 4	3.125	3.343	.785	K 2	2.125	2.343	1.035
H 5	3.625	3.843	.785	K 3	2.625	2.843	1.035
J 1	1.625	1.843	.910	K 4	3.125	3.343	1.035
J 2	2.125	2.243	.910	K 5	3.625	3.843	1.035
J 3	2.625	2.843	.910				

TABLE I. STYLE CUR19 CHARACTERISTICS AND DASH NUMBERS.

RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX) 25°C	IMPEDANCE (MAX) @ 25°C 10KHz-1MHz	LEAKAGE (MAX) 25°C	LEAKAGE (MAX) 85°C 105°C	MAX AC RIPPLE CURRENT 10°C RISE 10KHz-1MHz	CASE SIZE	DASH NUMBER M39018/07- CAP TOL -10+75 LOW FREQ	DASH NUMBER M39018/07- CAP TOL -10+75 HIGH FREQ
V dc	uF	V dc	OHMS	OHMS	mA		AMPS			
2400	5	7	.146	.110	55	330	1.50	H 1	0001-	0201-
3300	5	7	.106	.080	64	390	1.80	H 2	0002-	0202-
3700	5	7	.095	.071	68	410	1.90	J 1	0003-	0203-
4400	5	7	.080	.060	74	440	2.50	H 3	0004-	0204-
5000	5	7	.070	.053	80	480	2.50	J 2	0005-	0205-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/07

STYLE CUR19

TABLE I. STYLE CUR19 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX) 25°C	IMPEDANCE (MAX) 25°C 10KHz-1MHz	LEAKAGE (MAX) 25°C	LEAKAGE (MAX) 85°C 105°C	MAX AC RIPPLE CURRENT 10°C RISE 10KHz-1MHz	CASE SIZE	DASH NUMBER M39018/07- CAP TOL -10+75 LOW FREQ	DASH NUMBER M39018/07- CAP TOL -10+75 HIGH FREQ
V dc	uF	V dc	OHMS	OHMS	mA		AMPS			
5700	5	7	.062	.047	85	510	3.10	H 4	0006-	0206-
6700	5	7	.052	.039	92	550	3.20	J 3	0007-	0207-
7200	5	7	.049	.037	95	570	3.50	K 2	0008-	0208-
8800	5	7	.040	.030	105	630	4.00	J 4	0009-	0209-
10000	5	7	.035	.026	112	670	4.60	K 3	0010-	0210-
13000	5	7	.027	.020	128	770	5.60	K 4	0011-	0211-
16000	5	7	.022	.017	142	850	7.00	K 5	0012-	0212-
2000	7.5	10	.175	.130	61	370	1.40	H 1	0013-	0213-
3000	7.5	10	.117	.087	75	450	1.80	J 1	0014-	0214-
3800	7.5	10	.093	.070	85	510	2.40	H 3	0015-	0215-
4400	7.5	10	.080	.059	91	550	2.40	J 2	0016-	0216-
4800	7.5	10	.073	.055	95	570	2.40	K 1	0017-	0217-
5000	7.5	10	.070	.053	97	580	3.00	H 4	0018-	0218-
5800	7.5	10	.061	.046	105	630	3.10	J 3	0019-	0219-
6200	7.5	10	.057	.043	108	650	3.30	K 2	0020-	0220-
7500	7.5	10	.047	.035	119	710	3.80	J 4	0021-	0221-
9000	7.5	10	.039	.029	130	780	4.40	K 3	0022-	0222-
11000	7.5	10	.032	.024	144	860	5.30	K 4	0023-	0223-
14000	7.5	10	.025	.019	162	970	6.60	K 5	0024-	0224-
1700	10	15	.195	.144	65	390	1.30	H 1	0025-	0225-
2300	10	15	.144	.107	76	460	1.70	H 2	0026-	0226-
2600	10	15	.127	.094	81	490	1.70	J 1	0027-	0227-
3000	10	15	.110	.082	87	520	2.20	H 3	0028-	0228-
3600	10	15	.092	.068	95	570	2.20	J 2	0029-	0229-
4100	10	15	.081	.060	101	605	2.80	H 4	0030-	0230-
4800	10	15	.069	.051	110	660	2.90	J 3	0031-	0231-
5100	10	15	.065	.048	113	680	3.20	K 2	0032-	0232-
6300	10	15	.053	.039	126	760	3.60	J 4	0033-	0233-
7500	10	15	.044	.033	137	820	4.10	K 3	0034-	0234-
9700	10	15	.034	.025	156	940	5.00	K 4	0035-	0235-
12000	10	15	.028	.021	173	1040	6.20	K 5	0036-	0236-
1400	16	20	.207	.149	75	450	1.20	H 1	0037-	0237-
1900	16	20	.153	.110	87	520	1.60	H 2	0038-	0238-
2100	16	20	.138	.100	92	550	1.60	J 1	0039-	0239-
2700	16	20	.107	.077	104	620	2.00	J 2	0040-	0240-
3400	16	20	.085	.061	117	700	2.60	H 4	0041-	0241-
4200	16	20	.069	.050	130	780	2.90	K 2	0042-	0242-
5200	16	20	.056	.041	144	860	3.30	J 4	0043-	0243-
6100	16	20	.048	.035	156	940	3.90	K 3	0044-	0244-
6400	16	20	.046	.033	162	970	4.10	J 5	0045-	0245-
8000	16	20	.036	.026	179	1070	4.70	K 4	0046-	0246-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

25

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/07

STYLE CUR19

TABLE I. STYLE CUR19 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX) 25°C	IMPEDANCE (MAX) 25°C 10KHz-1MHz	LEAKAGE (MAX) 25°C	LEAKAGE (MAX) 85°C 105°C	MAX AC RIPPLE CURRENT 10°C RISE 10KHz-1MHz	CASE SIZE	DASH NUMBER M39018/07- CAP TOL -10+75 LOW FREQ	DASH NUMBER M39018/07- CAP TOL -10+75 HIGH FREQ
V dc	uF	V dc	OHMS	OHMS	mA		AMPS			
10000	16	20	.029	.021	200	1200	5.90	K 5	0047-	0247-
1200	20	25	.240	.170	78	470	1.20	H 1	0048-	0248-
1800	20	25	.160	.110	95	570	1.50	J 1	0049-	0249-
2200	20	25	.132	.092	105	630	2.00	H 3	0050-	0250-
2400	20	25	.120	.084	110	660	1.90	J 2	0051-	0251-
2900	20	25	.100	.070	120	720	2.50	H 4	0052-	0252-
3400	20	25	.085	.060	130	780	2.60	J 3	0053-	0253-
3700	20	25	.078	.055	136	820	2.70	K 2	0054-	0254-
4500	20	25	.064	.045	150	900	3.30	J 4	0055-	0255-
5300	20	25	.055	.039	163	980	3.50	K 3	0056-	0256-
7000	20	25	.042	.030	187	1120	4.50	K 4	0057-	0257-
8600	20	25	.034	.024	204	1220	5.50	K 5	0058-	0258-
900	25	30	.320	.224	75	450	1.05	H 1	0059-	0259-
1200	25	30	.240	.168	87	520	1.40	H 2	0060-	0260-
1600	25	30	.180	.126	100	600	1.75	H 3	0061-	0261-
2000	25	30	.145	.102	111	670	1.90	J 2	0062-	0262-
2500	25	30	.116	.081	125	750	2.40	K 2	0063-	0263-
2800	25	30	.103	.072	132	790	3.00	J 3	0064-	0264-
3600	25	30	.080	.056	150	900	3.25	K 3	0065-	0265-
4700	25	30	.062	.043	171	1030	4.00	K 4	0066-	0266-
5700	25	30	.051	.036	189	1130	4.65	K 5	0067-	0267-
700	30	40	.380	.262	72	430	1.00	H 1	0068-	0268-
900	30	40	.295	.204	82	490	1.25	H 2	0069-	0269-
1300	30	40	.204	.141	99	590	1.70	H 3	0070-	0270-
1600	30	40	.165	.114	110	660	1.75	J 2	0071-	0271-
2000	30	40	.133	.092	122	730	2.25	K 2	0072-	0272-
2200	30	40	.120	.083	128	770	2.35	J 3	0073-	0273-
2800	30	40	.095	.066	145	870	3.00	K 3	0074-	0274-
3000	30	40	.088	.061	150	900	2.90	J 4	0075-	0275-
3600	30	40	.074	.051	164	980	3.60	K 4	0076-	0276-
4500	30	40	.059	.041	184	1100	4.40	K 5	0077-	0277-
550	40	50	.480	.322	74	440	.90	H 1	0078-	0278-
700	40	50	.380	.255	84	500	1.15	H 2	0079-	0279-
900	40	50	.295	.197	95	570	1.20	J 1	0080-	0280-
1200	40	50	.220	.147	110	660	1.55	J 2	0081-	0281-
1500	40	50	.175	.117	120	720	2.05	K 2	0082-	0282-
1700	40	50	.155	.104	130	780	2.15	J 3	0083-	0283-
2300	40	50	.115	.077	150	900	2.60	J 4	0084-	0284-
2900	40	50	.091	.061	170	1020	3.40	K 4	0085-	0285-
3600	40	50	.074	.050	189	1130	4.10	K 5	0086-	0286-
300	50	75	.430	.280	61	370	.93	H 1	0087-	0287-

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE
MIL-C-39018/07

STYLE CUR19

TABLE I. STYLE CUR19 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX) 25°C	IMPEDANCE (MAX) 25°C 10KHz-1MHz	LEAKAGE (MAX) 25°C	LEAKAGE (MAX) 85°C 105°C	MAX AC RIPPLE CURRENT 10°C RISE 10KHz-1MHz	CASE SIZE	DASH NUMBER M39018/07- CAP TOL -10+75 LOW FREQ	DASH NUMBER M39018/07- CAP TOL -10+75 HIGH FREQ
V dc	uF	V dc	OHMS	OHMS	mA		AMPS			
400	50	75	.325	.212	71	430	1.15	H 2	0088-	0288-
530	50	75	.245	.160	82	490	1.25	J 1	0089-	0289-
700	50	75	.185	.120	94	560	1.60	J 2	0090-	0290-
870	50	75	.150	.098	104	620	2.10	K 2	0091-	0291-
1000	50	75	.130	.085	112	670	2.15	J 3	0092-	0292-
1200	50	75	.108	.070	122	730	2.80	K 3	0093-	0293-
1600	50	75	.081	.053	141	850	3.40	K 4	0094-	0294-
2000	50	75	.065	.042	159	950	4.25	K 5	0095-	0295-
200	75	100	.650	.384	64	380	.78	H 1	0096-	0296-
260	75	100	.500	.295	70	420	1.00	H 2	0097-	0297-
350	75	100	.370	.218	81	490	1.10	J 1	0098-	0298-
450	75	100	.290	.171	92	550	1.40	J 2	0099-	0299-
570	75	100	.230	.136	103	620	1.85	K 2	0100-	0300-
650	75	100	.200	.118	110	660	1.95	J 3	0101-	0301-
850	75	100	.153	.090	126	760	2.25	J 4	0102-	0302-
1000	75	100	.130	.077	137	820	2.95	K 4	0103-	0303-
1300	75	100	.100	.059	156	940	3.55	K 5	0104-	0304-
130	100	125	1.000	.530	57	340	.70	H 1	0105-	0305-
170	100	125	.765	.405	65	390	.90	H 2	0106-	0306-
230	100	125	.565	.300	76	460	.93	J 1	0107-	0307-
300	100	124	.435	.230	86	520	1.20	J 2	0108-	0308-
380	100	125	.340	.180	97	580	1.55	K 2	0109-	0309-
430	100	125	.300	.159	104	620	1.60	J 3	0110-	0310-
550	100	125	.235	.125	118	710	2.10	K 3	0111-	0311-
700	100	125	.185	.098	132	790	2.65	K 4	0112-	0312-
850	100	125	.150	.080	147	880	3.15	K 5	0113-	0313-
70	150	200	1.850	.780	51	310	.65	H 1	0114-	0314-
90	150	200	1.450	.610	58	350	.80	H 2	0115-	0315-
120	150	200	1.080	.455	67	400	.83	J 1	0116-	0316-
150	150	200	.860	.362	75	450	1.10	K 1	0117-	0317-
200	150	200	.650	.273	87	520	1.40	K 2	0118-	0318-
300	150	200	.430	.181	106	640	1.80	J 4	0119-	0319-
380	150	200	.340	.143	120	720	2.35	K 4	0120-	0320-
470	150	200	.280	.096	133	800	2.85	K 5	0121-	0321-
50	200	250	2.600	.780	50	300	.60	H 1	0122-	0322-
85	200	250	1.530	.460	65	390	.75	J 1	0123-	0323-
100	200	250	1.300	.390	71	430	.95	J 2	0124-	0324-
150	200	250	.865	.259	87	520	1.25	J 3	0125-	0325-
200	200	250	.650	.195	100	600	1.67	K 3	0126-	0326-
250	200	250	.520	.156	112	670	1.90	J 5	0127-	0327-
320	200	250	.405	.122	126	760	2.50	K 5	0128-	0328-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006(ESTABLISHED RELIABILITY)


SCOPE: FIXED, NONSOLID ELECTROLYTE TANTALUM CAPACITORS, PER MIL-C-39006 COVERS POLARIZED, HERMETICALLY SEALED CAPACITORS IN METAL CASES. THE POLARIZED FOIL TYPES ARE USED WHERE LOW-FREQUENCY PULSATING DC COMPONENTS ARE TO BY BYPASSED OR FILTERED OUT AND OTHER USES WHERE LARGE CAPACITANCE VALUES ARE REQUIRED AND COMPARATIVELY WIDE CAPACITANCE TOLERANCES CAN BE TOLERATED. NONPOLARIZED TYPES ARE SUITABLE FOR AC APPLICATIONS OR WHERE DC VOLTAGE REVERSALS OCCUR.

TEMP RANGE: -55°C TO +85°C (DERATING TO +125°C)

SHOCK: 100 G, SAWTOOTH (MIL-STD-202, METHOD 213)


VIBRATION: 20 G, 10-2000 Hz (MIL-STD-202, METHOD 204)

PART NUMBER:

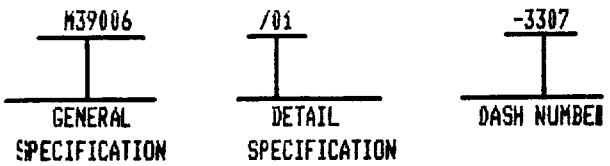


MIL-C-39006/01

STYLE CLR25

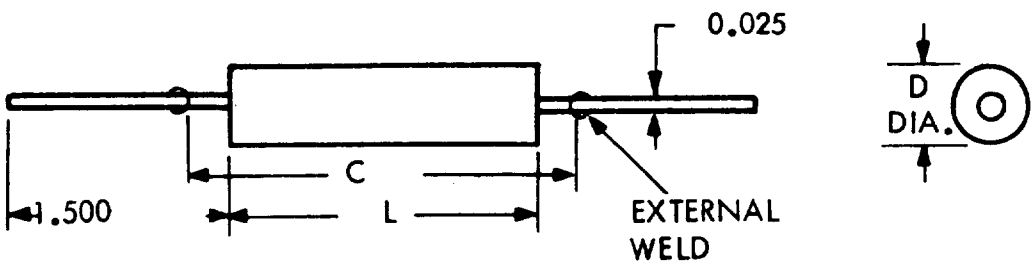

29

DIMENSIONS				
CASE SIZE	BASIC CASE		INSULATING CASE	
	L	D	D (MAX)	C (MAX)
G1	.688	.188	.219	1.188
G2	.969	.281	.312	1.469
G3	1.438	.375	.406	1.938
G4	2.125	.375	.406	2.625
G5	2.750	.375	.406	3.250



CASE CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/01

STYLE CLR25

TABLE I. STYLE CLR25 CHARACTERISTICS AND DASH NUMBERS (POLARIZED, ETCHED FOIL).


RATED VOLTAGE (85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DERATED VOLTAGE	SURGE VOLTAGE	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/01-		
			25°C	85°C & 125°C	(125°C)	(85°C)			M (1.0%)	P (0.1%)	R (0.01%)
V dc	uF	%	uA	uA	V dc	V dc	OHMS				
15	15.0	+75,-15	2	4	10	17.2	220	G1	3307	3314	3321
15	60.0	+75,-15	2	10	10	17.2	55	G2	3030	3059	3088
15	200.0	+75,-15	3	40	10	17.2	17	G3	3031	3060	3089
15	400.0	+75,-15	6	80	10	17.2	9	G4	3032	3061	3090
15	580.0	+75,-15	9	100	10	17.2	6	G5	3033	3062	3091
25	10.0	+75,-15	2	4	15	28.8	330	G1	3308	3315	3322
25	40.0	+75,-15	2	13	15	28.8	83	G2	3034	3063	3092
25	120.0	+75,-15	3	40	15	28.8	27	G3	3035	3064	3093
25	250.0	+75,-15	6	80	15	28.8	13	G4	3036	3065	3094
25	350.0	+75,-15	10	100	15	28.8	10	G5	3037	3066	3095
30	8.0	+75,-15	2	6	20	34.5	424	G1	3309	3316	3323
30	32.0	+75,-15	2	14	20	34.5	106	G2	3038	3067	3096
30	110.0	+75,-15	4	50	20	34.5	31	G3	3039	3068	3097
30	220.0	+75,-15	8	90	20	34.5	16	G4	3040	3069	3098
30	300.0	+75,-15	11	120	20	34.5	11	G5	3041	3070	3099
50	4.5	+50,-15	2	4	30	57.5	730	G1	3310	3317	3324
50	18.0	+50,-15	2	13	30	57.5	180	G2	3042	3071	3100
50	60.0	+50,-15	3	40	30	57.5	55	G3	3043	3072	3101
50	75.0	+50,-15	4	70	30	57.5	52	G3	3200	3201	3204
50	100.0	+50,-15	4	75	30	57.5	33	G4	3045	3074	3103
50	150.0	+50,-15	5	100	30	57.5	22	G5	3046	3075	3104
75	3.0	+50,-15	2	4	50	86.2	1000	G1	3311	3318	3325
75	12.0	+50,-15	2	13	50	86.2	270	G2	3047	3076	3105
75	30.0	+50,-15	3	34	50	86.2	110	G3	3048	3077	3106
75	70.0	+50,-15	6	80	50	86.2	47	G4	3049	3078	3107
75	100.0	+50,-15	10	100	50	86.2	33	G5	3050	3079	3108
100	2.0	+30,-15	2	4	65	115.0	1600	G1	3312	3319	3326
100	8.0	+30,-15	2	12	65	115.0	410	G2	3051	3080	3109
100	25.0	+30,-15	2.5	37	65	115.0	130	G3	3052	3081	3110
100	50.0	+30,-15	5	75	65	115.0	66	G4	3053	3082	3111
100	70.0	+30,-15	7	100	65	115.0	47	G5	3054	3083	3112
150	1.0	+30,-15	2	4	100	172.0	3000	G1	3313	3320	3327
150	4.0	+30,-15	2	13	100	172.0	750	G2	3055	3084	3113
150	13.0	+30,-15	3	30	100	172.0	250	G3	3056	3085	3114
150	25.0	+30,-15	5	80	100	172.0	130	G4	3057	3086	3115
150	36.0	+30,-15	8	100	100	172.0	94	G5	3058	3087	3116

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/02

STYLE CLR27

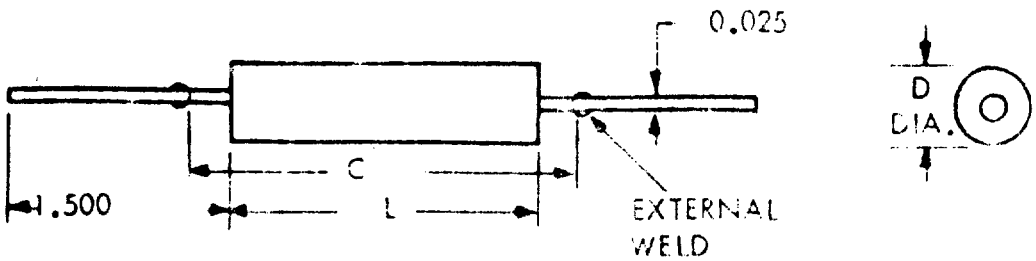

DIMENSIONS				
CASE SIZE	BASIC CASE		INSULATED CASE	
	L	D	D (MAX)	C (MAX)
G1	.688	.188	.219	1.188
G2	.969	.281	.312	1.469
G3	1.438	.375	.406	1.938
G4	2.125	.375	.406	2.625
G5	2.750	.375	.406	3.250



CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/02

STYLE CLR27

TABLE I. STYLE CLR27 CHARACTERISTICS AND DASH NUMBERS (NONPOLARIZED, ETCHED FOIL).


RATED VOLTAGE	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DERATED VOLTAGE	SURGE VOLTAGE	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/02-		
(85°C)			25°C	85°C & 125°C	(125°C)	(85°C)			M (1.0%)	P (0.1%)	R (0.01%)
V dc	uF	%	uA	uA	V dc	V dc	OHMS				
15	10.0	+75,-15	2	4	10	17.2	339	G1	2507	2514	2521
15	40.0	+75,-15	2	10	10	17.2	85	G2	1228	1256	1284
15	120.0	+75,-15	3	40	10	17.2	27	G3	1229	1257	1285
15	250.0	+75,-15	6	80	10	17.2	14	G4	1230	1258	1286
15	350.0	+75,-15	9	100	10	17.2	10	G5	1231	1259	1287
25	5.0	+75,-15	2	4	15	28.8	680	G1	2508	2515	2522
25	20.0	+75,-15	2	13	15	28.8	170	G2	1232	1260	1288
25	70.0	+75,-15	3	40	15	28.8	49	G3	1233	1261	1289
25	140.0	+75,-15	6	80	15	28.8	24	G4	1234	1262	1290
25	200.0	+75,-15	10	100	15	28.8	17	G5	1235	1263	1291
30	4.5	+75,-15	2	6	20	34.5	754	G1	2509	2516	2523
30	18.0	+75,-15	2	14	20	34.5	188	G2	1236	1264	1292
30	60.0	+75,-15	4	50	20	34.5	57	G3	1237	1265	1293
30	120.0	+75,-15	8	90	20	34.5	28	G4	1238	1266	1294
30	170.0	+75,-15	11	120	20	34.5	20	G5	1239	1267	1295
50	2.5	+50,-15	2	4	30	57.5	1355	G1	2510	2517	2531
50	10.0	+50,-15	2	13	30	57.5	339	G2	1240	1268	1296
50	30.0	+50,-15	3	40	30	57.5	113	G3	1241	1269	1297
50	60.0	+50,-15	4	75	30	57.5	57	G4	1242	1270	1298
50	80.0	+50,-15	5	100	30	57.5	41	G5	1243	1271	1299
75	1.5	+50,-15	2	4	50	86.2	2255	G1	2511	2518	2525
75	6.0	+50,-15	2	13	50	86.2	560	G2	1244	1272	1300
75	15.0	+50,-15	3	34	50	86.2	226	G3	1245	1273	1301
75	35.0	+50,-15	5	80	50	86.2	97	G4	1246	1274	1302
75	50.0	+50,-15	10	100	50	86.2	68	G5	1247	1275	1303
100	1.0	+30,-15	2	4	65	115.0	3385	G1	2512	2519	2526
100	4.0	+30,-15	2	13	65	115.0	845	G2	1248	1276	1304
100	12.0	+30,-15	3	37	65	115.0	283	G3	1249	1277	1305
100	25.0	+30,-15	5	75	65	115.0	135	G4	1250	1278	1306
100	35.0	+30,-15	7	100	65	115.0	97	G5	1251	1279	1307
150	0.5	+30,-15	2	4	100	172.0	6780	G1	2513	2520	2527
150	2.0	+30,-15	2	13	100	172.0	1693	G2	1252	1280	1308
150	6.0	+30,-15	3	30	100	172.0	565	G3	1253	1281	1309
150	12.0	+30,-15	5	80	100	172.0	283	G4	1254	1282	1310
150	18.0	+30,-15	8	100	100	172.0	188	G5	1255	1283	1311

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/03

STYLE CLR35

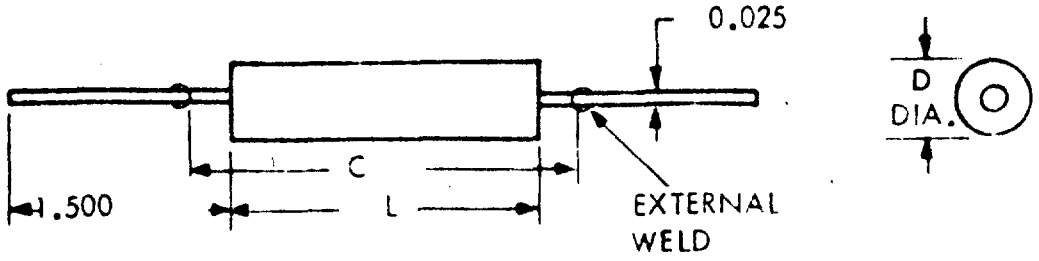

CASE SIZE	DIMENSIONS			
	BASIC CASE		INSULATED CASE	
	L	D	D (MAX)	C (MAX)
G1	.688	.188	.219	1.188
G2	.969	.281	.312	1.469
G3	1.438	.375	.406	1.938
G4	2.125	.375	.406	2.625
G5	2.750	.375	.406	3.250



CASE
CIRCUIT DIAGRAM

TABLE I. STYLE CLR35 CHARACTERISTICS AND DASH NUMBERS (POLARIZED, PLAIN FOIL).

RATED VOLTAGE (85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DERATED VOLTAGE (125°C)	SURGE VOLTAGE (85°C)	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/03-		
			25°C	85°C & 125°C					M (1.0%)	P (0.1%)	R (0.01%)
V dc	uF	±%	uA	uA	V dc	V dc	OHMS				
15	4.50	20	1	2.0	10	17.2	495	G1	2712	2724	2736
15	18.00	20	2	4.0	10	17.2	125	G2	1349	1398	1447
15	55.00	20	2	10.0	10	17.2	41	G3	1350	1399	1448
15	110.00	20	4	20.0	10	17.2	20	G4	1351	1400	1449
15	160.00	20	5	30.0	10	17.2	14	G5	1352	1401	1450
25	3.00	20	1	2.0	15	28.8	744	G1	2713	2725	2737
25	12.00	20	2	4.0	15	28.8	186	G2	1353	1402	1451
25	35.00	20	2	10.0	15	28.8	64	G3	1354	1403	1452
25	70.00	20	4	20.0	15	28.8	32	G4	1355	1404	1453
25	100.00	20	6	30.0	15	28.8	22	G5	1356	1405	1454

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/03

STYLE CLR35

TABLE I. STYLE CLR35 CHARACTERISTICS AND DASH NUMBERS (POLARIZED, PLAIN FOIL).


RATED VOLTAGE (85°)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX 25°C	DC LEAKAGE MAX 85°C & 125°C	DERATED VOLTAGE (125°C)	SURGE VOLTAGE (85°C)	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/03- M (1.0%)	P (0.1%)	R (0.01%)
V dc	uF	±%	uA	uA	V dc	V dc	OHMS				
30	2.50	20	2	5.0	20	34.5	893	G1	2714	2726	2738
30	10.00	20	2	6.0	20	34.5	265	G2	1357	1406	1455
30	30.00	20	2	13.0	20	34.5	75	G3	1358	1407	1456
30	60.00	20	4	26.0	20	34.5	37	G4	1359	1408	1457
30	85.00	20	6	38.0	20	34.5	27	G5	1360	1409	1458
35	68.00	20	5	25.0	25	40.2	40	G5	1361	1410	1459
50	1.50	20	1	4.0	30	57.5	1487	G1	2715	2727	2739
50	6.00	20	2	6.0	30	57.5	372	G2	1362	1411	1460
50	20.00	20	2	13.0	30	57.5	112	G3	1363	1412	1461
50	40.00	20	4	26.0	30	57.5	56	G4	1364	1413	1462
50	55.00	20	6	38.0	30	57.5	41	G5	1365	1414	1463
75	1.00	20	1	4.0	50	86.2	2232	G1	2716	2728	2740
75	4.00	20	2	16.0	50	86.2	558	G2	1366	1415	1464
75	14.00	20	2	13.0	50	86.2	159	G3	1367	1416	1465
75	28.00	20	4	26.0	50	86.2	80	G4	1368	1417	1466
75	40.00	20	6	38.0	50	86.2	56	G5	1369	1418	1467
100	.80	20	1	3.5	65	115.0	2790	G1	2717	2729	2741
100	3.00	20	2	6.0	65	115.0	743	G2	1370	1419	1468
100	10.00	20	2	13.0	65	115.0	223	G3	1371	1420	1469
100	20.00	20	3	25.0	65	115.0	112	G4	1372	1421	1470
100	30.00	20	6	38.0	65	115.0	74	G5	1373	1422	1471
150	.50	20	2	4.0	100	172.0	4454	G1	2718	2730	2742
150	2.00	20	2	6.0	100	172.0	1115	G2	1374	1423	1472
150	7.00	20	3	13.0	100	172.0	319	G3	1375	1424	1473
150	14.00	20	4	26.0	100	172.0	159	G4	1376	1425	1474
150	20.00	20	6	38.0	100	172.0	112	G5	1377	1426	1475
200	.35	15	4	25.0	150	230.0	5577	G1	2719	2731	2743
200	1.50	15	6	32.0	150	230.0	1300	G2	1378	1427	1476
200	5.00	15	16	64.0	150	230.0	400	G3	1379	1428	1477
200	10.00	15	28	100.0	150	230.0	200	G4	1380	1429	1478
200	15.00	15	40	160.0	150	230.0	130	G5	1381	1430	1479
250	.30	15	6	32.0	165	287.0	6600	G1	2720	2732	2744
250	1.20	15	8	40.0	165	287.0	1600	G2	1382	1431	1480
250	4.00	15	16	80.0	165	287.0	500	G3	1383	1432	1481
250	8.00	15	28	140.0	165	287.0	250	G4	1384	1433	1482
250	12.00	15	40	200.0	165	287.0	160	G5	1385	1434	1483
300	.27	15	6	40.0	200	345.0	9000	G1	2721	2733	2745
300	1.00	15	10	50.0	200	345.0	2250	G2	1386	1435	1484
300	3.00	15	20	100.0	200	345.0	750	G3	1387	1436	1485
300	7.00	15	35	175.0	200	345.0	322	G4	1388	1437	1486
300	10.00	15	50	250.0	200	345.0	225	G5	1389	1438	1487

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/04

STYLE CLR37

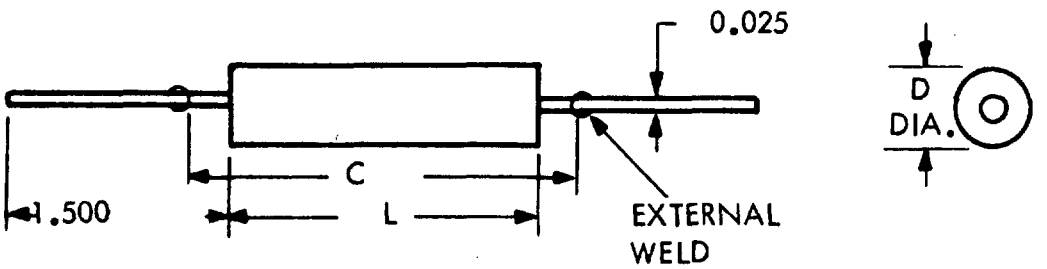

CASE SIZE	DIMENSIONS			
	BASIC CASE		INSULATED CASE	
	L	D	D (MAX)	C (MAX)
G1	.688	.188	.219	1.188
G2	.969	.281	.312	1.469
G3	1.438	.375	.406	1.938
G4	2.125	.375	.406	2.625
G5	2.750	.375	.406	3.250



CIRCUIT DIAGRAM

35

TABLE I. STYLE CLR37 CHARACTERISTICS AND DASH NUMBERS (NONPOLARIZED, PLAIN FOIL).

RATED VOLTAGE (85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DERATED VOLTAGE (125°C)	SURGE VOLTAGE (85°C)	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/04-		
			25°C	85°C & 125°C					M (1.0%)	P (0.1%)	R (0.01%)
V dc	uF	±%	uA	uA	V dc	V dc	OHMS				
15	2.50	20	1.0	2.0	10	17.2	893	G1	2711	2722	2733
15	10.00	20	2.0	4.0	10	17.2	223	G2	1245	1290	1335
15	35.00	20	2.0	10.0	10	17.2	64	G3	1246	1291	1336
15	70.00	20	4.0	20.0	10	17.2	32	G4	1247	1292	1337
15	100.00	20	5.0	30.0	10	17.2	23	G5	1248	1293	1338
25	1.50	20	1.0	3.0	15	28.8	1487	G1	2712	2723	2734
25	6.00	20	2.0	6.0	15	28.8	372	G2	1249	1294	1339
25	20.00	20	2.0	10.0	15	28.8	112	G3	1250	1295	1340
25	40.00	20	4.0	20.0	15	28.8	56	G4	1251	1296	1341

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/04

STYLE CLR37

TABLE I. STYLE CLR37 CHARACTERISTICS AND DASH NUMBERS (NONPOLARIZED, PLAIN FOIL)CONT.


RATED VOLTAGE (85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX 25°C	DC LEAKAGE MAX 85°C & 125°C	DERATED VOLTAGE (125°C)	SURGE VOLTAGE (85°C)	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/04- M (1.0%)	DASH NUMBER M39006/04- P (0.1%)	DASH NUMBER M39006/04- R (0.01%)
V dc	uF	+%	uA	uA	V dc	V dc	OHMS				
25	60.00	20	5.0	30.0	15	28.8	37	G5	1252	1297	1342
30	1.40	20	2.0	5.0	20	34.5	1594	G1	2713	2724	2735
30	5.50	20	2.0	6.0	20	34.5	406	G2	1253	1298	1343
30	18.00	20	2.0	12.0	20	34.5	124	G3	1254	1299	1344
30	36.00	20	4.0	26.0	20	34.5	62	G4	1255	1300	1345
30	45.00	20	6.0	36.0	20	34.5	50	G5	1256	1301	1346
50	.80	20	1.0	4.0	30	57.5	2790	G1	2714	2725	2736
50	3.00	20	2.0	6.0	30	57.5	743	G2	1257	1302	1347
50	10.00	20	2.0	12.0	30	57.5	223	G3	1258	1303	1348
50	20.00	20	4.0	24.0	30	57.5	112	G4	1259	1304	1349
50	30.00	20	6.0	36.0	30	57.5	75	G5	1260	1305	1350
75	.50	20	1.0	4.0	50	86.2	4460	G1	2715	2726	2737
75	2.00	20	2.0	6.0	50	86.2	1115	G2	1261	1306	1351
75	7.00	20	2.0	13.0	50	86.2	319	G3	1262	1307	1352
75	14.00	20	4.0	24.0	50	86.2	159	G4	1263	1308	1353
75	20.00	20	6.0	36.0	50	86.2	112	G5	1264	1309	1354
100	.40	20	1.0	3.5	65	115.0	5580	G1	2716	2727	2738
100	1.50	20	2.0	6.0	65	115.0	1487	G2	1265	1310	1355
100	5.00	20	2.0	13.0	65	115.0	446	G3	1266	1311	1356
100	10.00	20	4.0	24.0	65	115.0	223	G4	1267	1312	1357
100	15.00	20	6.0	36.0	65	115.0	149	G5	1268	1313	1358
150	.25	20	1.0	4.0	100	172.0	8909	G1	2717	2728	2739
150	1.00	20	2.0	6.0	100	172.0	2227	G2	1269	1314	1359
150	1.20	20	3.0	12.0	100	172.0	2000	G2	1270	1315	1360
150	3.50	20	3.0	13.0	100	172.0	638	G3	1271	1316	1361
150	7.00	20	4.0	24.0	100	172.0	319	G4	1272	1317	1362
150	10.00	20	6.0	36.0	100	172.0	223	G5	1273	1318	1363
200	.15	15	4.0	25.0	150	230.0	14000	G1	2718	2729	2740
200	.75	15	8.0	32.0	150	230.0	2700	G2	1274	1319	1364
200	2.50	15	16.0	64.0	150	230.0	800	G3	1275	1320	1365
200	5.00	15	28.0	112.0	150	230.0	400	G4	1276	1321	1366
200	7.50	15	40.0	160.0	150	230.0	260	G5	1277	1322	1367
250	.15	15	6.0	32.0	165	287.0	13000	G1	2719	2730	2741
250	.60	15	8.0	40.0	165	287.0	3300	G2	1278	1323	1368
250	2.60	15	16.0	80.0	165	287.0	1000	G3	1279	1324	1369
250	4.00	15	28.0	140.0	165	287.0	500	G4	1280	1325	1370
250	6.00	15	40.0	200.0	165	287.0	330	G5	1281	1326	1371
300	.12	15	4.0	25.0	200	345.0	17500	G1	2720	2731	2742
300	.47	15	10.0	50.0	200	345.0	4500	G2	1282	1327	1372
300	1.50	15	20.0	100.0	200	345.0	1500	G3	1283	1328	1373
300	3.30	15	35.0	175.0	200	345.0	643	G4	1284	1329	1374
300	4.70	15	50.0	250.0	200	345.0	450	G5	1285	1330	1375

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/16

STYLE CLR71

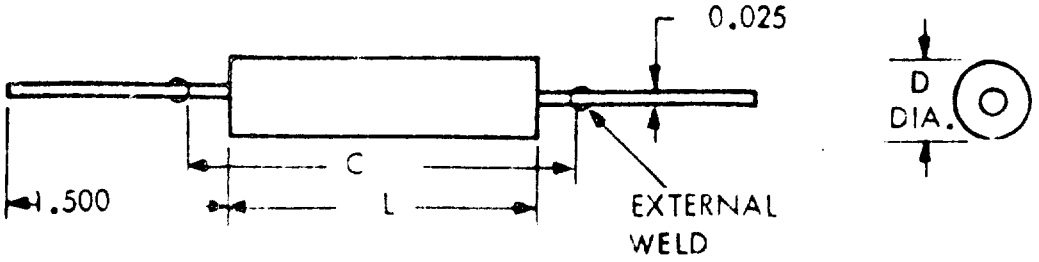

CASE SIZE	DIMENSIONS			
	BASIC CASE		INSULATED CASE	
	L	D	D (MAX)	C (MAX)
G1	.688	.188	.219	1.188
G2	.969	.281	.312	1.406
G3	1.438	.375	.406	1.938
G4	2.125	.375	.406	2.625
G5	2.750	.375	.406	3.250



CASE
CIRCUIT DIAGRAM

TABLE I. STYLE CLR71 CHARACTERISTICS AND DASH NUMBERS (POLARIZED, HIGH ETCHED FOIL).

RATED VOLTAGE (85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX			DERATED VOLTAGE (125°C)	SURGE VOLTAGE (85°C)	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/16-		
			25°C	85°C	125°C					M (1.0%)	P (0.1%)	R (0.01%)
V dc	uF	%	uA	uA	uA	V dc	V dc	OHMS				
15	29	+75,-15	7	35	23	10	17.2	137	G1	2035	2070	2105
15	100	+75,-15	23	100	80	10	17.2	37	G2	2036	2071	2106
15	310	+75,-15	61	370	250	10	17.2	10.8	G3	2037	2072	2107
15	650	+75,-15	130	780	520	10	17.2	5.1	G4	2038	2073	2108
15	920	+75,-15	185	1100	750	10	17.2	4.0	G5	2039	2074	2109
25	17	+75,-15	6	34	21	15	28.8	220.0	G1	2040	2075	2110
25	60	+75,-15	23	100	72	15	28.8	62.0	G2	2041	2076	2111
25	180	+75,-15	60	360	220	15	28.8	20.5	G3	2042	2077	2112
25	380	+75,-15	125	760	460	15	28.8	9.6	G4	2043	2078	2113
25	550	+75,-15	185	1100	660	15	28.8	6.7	G5	2044	2079	2114
30	15	+75,-15	6	34	22	20	34.5	250.0	G1	2045	2080	2115
30	52	+75,-15	23	120	80	20	34.5	71.0	G2	2046	2081	2116

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/16

STYLE CLR71

TABLE I. STYLE CLR71 CHARACTERISTICS AND DASH NUMBERS (POLARIZED, HIGH ETCHED FOIL)CONT.


RATED VOLTAGE (85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX			DERATED VOLTAGE (125°C)	SURGE VOLTAGE (85°C)	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/16-		
			25°C	85°C	125°C					M (1.0%)	P (0.1%)	R (0.01%)
V dc	uF	%	uA	uA	uA	V dc	V dc	OHMS				
30	150	+75,-15	60	360	240	20	34.5	25.0	G3	2047	2082	2117
30	320	+75,-15	125	750	500	20	34.5	11.5	G4	2048	2083	2118
30	460	+75,-15	165	1000	700	20	34.5	8.0	G5	2049	2084	2119
50	7	+50,-15	5	28	17	30	57.5	550.0	G1	2050	2085	2120
50	25	+50,-15	19	100	60	30	57.5	150.0	G2	2051	2086	2121
50	75	+50,-15	50	300	180	30	57.5	49.0	G3	2052	2087	2122
50	160	+50,-15	100	640	390	30	57.5	23.0	G4	2053	2088	2123
50	230	+50,-15	150	920	550	30	57.5	16.0	G5	2054	2089	2124
75	4	+50,-15	5	24	16	50	86.2	930.0	G1	2055	2090	2125
75	15	+50,-15	17	90	60	50	86.2	250.0	G2	2056	2091	2126
75	45	+50,-15	45	270	180	50	86.2	83.0	G3	2057	2092	2127
75	95	+50,-15	95	570	380	50	86.2	39.0	G4	2058	2093	2128
75	130	+50,-15	130	780	520	50	86.2	29.0	G5	2059	2094	2129
100	3	+30,-15	4	20	14	65	115.0	1210.0	G1	2060	2095	2130
100	10	+30,-15	15	80	52	65	115.0	370.0	G2	2061	2096	2131
100	30	+30,-15	40	230	150	65	115.0	121.0	G3	2062	2097	2132
100	63	+30,-15	80	480	310	65	115.0	58.0	G4	2063	2098	2133
100	90	+30,-15	120	720	470	65	115.0	41.0	G5	2064	2099	2134
150	1.6	+30,-15	3	18	12	100	172.0	2340.0	G1	2065	2100	2135
150	5.5	+30,-15	12	64	42	100	172.0	675.0	G2	2066	2101	2136
150	17	+30,-15	30	190	130	100	172.0	220.0	G3	2067	2102	2137
150	35	+30,-15	65	400	260	100	172.0	106.0	G4	2068	2103	2138
150	50	+30,-15	95	560	380	100	172.0	74.0	G5	2069	2104	2139

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/17

STYLE CLR73

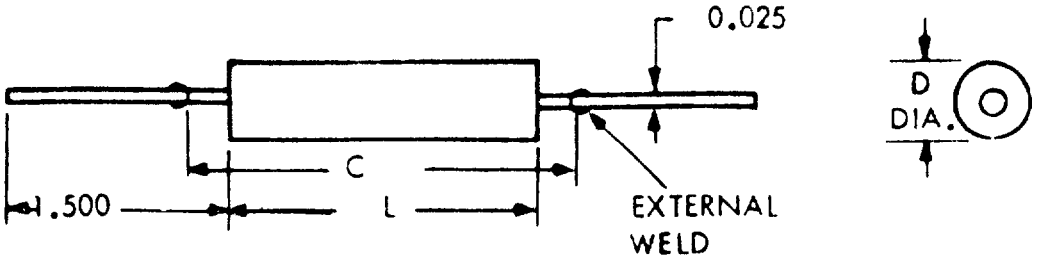

CASE SIZE	DIMENSIONS			
	BASIC CASE		INSULATED CASE	
	L	D	D (MAX)	C (MAX)
G1	.688	.188	.219	1.188
G2	.969	.281	.312	1.409
G3	1.438	.375	.406	1.938
G4	2.125	.375	.406	2.625
G5	2.750	.375	.406	3.250



CIRCUIT DIAGRAM

TABLE I. STYLE CLR73 CHARACTERISTICS AND DASH NUMBERS (NONPOLARIZED, HIGH ETCHED FOIL).

RATED VOLTAGE (85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX			DERATED VOLTAGE (125°C)	SURGE VOLTAGE (85°C)	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/17-		
			25°C	85°C	125°C					M (1.0%)	P (0.1%)	R (0.01%)
V dc	uF	%	uA	uA	uA	V dc	V dc	OHMS				
15	20.0	+75,-15	5	24	16	10	17.2	185	G1	2035	2070	2105
15	70.0	+75,-15	15	84	56	10	17.2	55	G2	2036	2071	2106
15	200.0	+75,-15	40	240	160	10	17.2	18.5	G3	2037	2072	2107
15	410.0	+75,-15	75	500	330	10	17.2	8.9	G4	2038	2073	2108
15	590.0	+75,-15	118	710	470	10	17.2	6.2	G5	2039	2074	2109
25	10.0	+75,-15	4	20	12	15	28.8	370.0	G1	2040	2075	2110
25	35.0	+75,-15	12	70	43	15	28.8	106.0	G2	2041	2076	2111
25	100.0	+75,-15	30	200	120	15	28.8	37.0	G3	2042	2077	2112
25	210.0	+75,-15	40	400	250	15	28.8	17.5	G4	2043	2078	2113
25	300.0	+75,-15	100	600	360	15	28.8	12.1	G5	2044	2079	2114

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/17

STYLE CLR73

TABLE I. STYLE CLR73 CHARACTERISTICS AND DASH NUMBERS (NONPOLARIZED, HIGH ETCHED FOIL)CONT.

RATED VOLTAGE (85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX			DERATED VOLTAGE (125°C)	SURGE VOLTAGE (85°C)	IMPEDANCE MAX	CASE SIZE	DASH NUMBER M39006/17-		
			25°C	85°C	125°C					M (1.0%)	P (0.1%)	R (0.01%)
V dc	uF	%	uA	uA	uA	V dc	V dc	OHMS				
30	8.0	+75,-15	3	19	12	20	34.5	455.0	G1	2045	2080	2115
30	29.0	+75,-15	11	60	40	20	34.5	137.0	G2	2046	2081	2116
30	80.0	+75,-15	30	180	120	20	34.5	45.5	G3	2047	2082	2117
30	170.0	+75,-15	65	390	260	20	34.5	22.0	G4	2048	2083	2118
30	240.0	+75,-15	90	550	370	20	34.5	7.8	G5	2049	2084	2119
50	3.5	+50,-15	3	14	9	30	57.5	1060.0	G1	2050	2085	2120
50	13.0	+50,-15	10	52	31	30	57.5	285.0	G2	2051	2086	2121
50	36.0	+50,-15	24	145	86	30	57.5	104.0	G3	2052	2087	2122
50	75.0	+50,-15	45	300	180	30	57.5	49.0	G4	2053	2088	2123
50	110.0	+50,-15	75	440	260	30	57.5	34.0	G5	2054	2089	2124
75	2.0	+50,-15	2	12	8	50	86.2	1850.0	G1	2055	2090	2125
75	7.0	+50,-15	8	42	28	50	86.2	550.0	G2	2056	2091	2126
75	20.0	+50,-15	23	120	80	50	86.2	185.0	G3	2057	2092	2127
75	43.0	+50,-15	45	260	170	50	86.2	86.0	G4	2058	2093	2128
75	60.0	+50,-15	60	360	240	50	86.2	62.0	G5	2059	2094	2129
100	1.4	+30,-15	2	11	7	65	115.0	2700.0	G1	2060	2095	2130
100	5.0	+30,-15	7	38	25	65	115.0	750.0	G2	2061	2096	2131
100	14.0	+30,-15	15	110	68	65	115.0	268.0	G3	2062	2097	2132
100	29.0	+30,-15	35	220	145	65	115.0	137.0	G4	2063	2098	2133
100	41.0	+30,-15	50	320	210	65	115.0	91.0	G5	2064	2099	2134
150	.75	+30,-15	2	9	6	100	172.0	5000.0	G1	2065	2100	2135
150	2.7	+30,-15	6	30	20	100	172.0	1380.0	G2	2066	2101	2136
150	7.5	+30,-15	15	84	56	100	172.0	490.0	G3	2067	2102	2137
150	15.0	+30,-15	30	180	120	100	172.0	250.0	G4	2068	2103	2138
150	22.0	+30,-15	45	270	175	100	172.0	170.0	G5	2069	2104	2139

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/22

STYLE CLR79


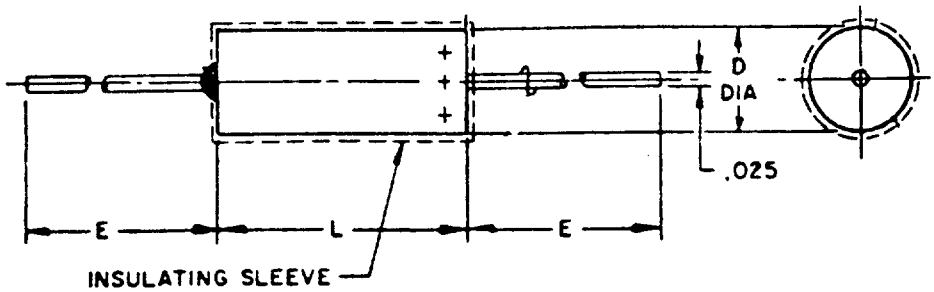


TABLE II. DERATED AND SURGE VOLTAGE

RATED VOLTAGE (+85°C)	DERATED VOLTAGE (+125°C)	SURGE VOLTAGE (+85°C)
V dc	V dc	V dc
*		
6	4	6.9
8	5	9.2
10	7	11.5
15	10	17.2
25	15	28.8
30	20	34.
50	30	57.5
60	40	69.0
75	50	86.2
100	65	115.0
125	85	144.0

* REVERSE VOLTAGE RATING AT 85°C IS 3 Vdc AND AT 125°C IS 2 V dc.

CASE SIZE	BASIC CASE		INSULATED CASE	
	L	D	D (MAX)	E
T1	.453	.188	.219	1.500
T2	.641	.281	.312	2.250
T3	.766	.375	.406	2.250
T4	1.062	.375	.406	2.250



CIRCUIT DIAGRAM

TABLE I. STYLE CLR79 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DISSIPATION FACTOR	IMPEDANCE (MAX)	CAPACITANCE CHANGE AT			MAX 85°C 40 kHz	CASE SIZE	PART NUMBER M39006/22-		
			+25°C	+85°C & +125°C			-55°C	+85°C	+125°C			M(1.0%)	P(0.1%)	R(0.01%)
* V dc	uF	±%	uA	uA	MAX %	OHMS	-%	+%	+%	uA rms				
6	30	20	1	2	9	100	40	10.5	12	820	T1	0001	0221	0441
6	30	5	1	2	9	100	40	10.5	12	820	T1	0002	0222	0442
6	30	5	1	2	9	100	40	10.5	12	820	T1	0003	0223	0443
6	68	20	1	2	15	60	40	14	16	960	T1	0004	0224	0444
6	68	10	1	2	15	60	40	14	16	960	T1	0005	0225	0445
6	68	5	1	2	15	60	40	14	16	960	T1	0006	0226	0446
6	140	20	1	3	21	40	40	14	16	1200	T2	0007	0227	0447
6	140	10	1	3	21	40	40	14	16	1200	T2	0008	0228	0448

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/22

STYLE CLR79

TABLE I. STYLE CLR79 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DISSIPATION FACTOR	IMPEDANCE (MAX)	CAPACITANCE CHANGE AT			MAX 85°C 40 kHz	CASE SIZE	PART NUMBER M39006/22-		
			+25°C	+85°C & +125°C			-55°C	+85°C	+125°C			M(1.0%)	P(0.1%)	R(0.01%)
* V dc	uF	±%	uA	uA	MAX %	OHMS	-%	+%	+%	uA rms				
6	140	5	1	3	21	40	40	14	16	1200	T2	0009	0229	0449
6	270	20	1	6.5	45	25	44	17.5	20	1275	T2	0010	0230	0450
6	270	10	1	6.5	45	25	44	17.5	20	1275	T2	0011	0231	0451
6	270	5	1	6.5	45	25	44	17.5	20	1275	T2	0012	0232	0452
6	330	20	2	7.9	36	20	44	14	16	1800	T3	0013	0233	0453
6	330	10	2	7.9	36	20	44	14	16	1800	T3	0014	0234	0454
6	330	5	2	7.9	36	20	44	14	16	1800	T3	0015	0235	0455
6	560	20	2	13	55	25	64	17.5	20	1900	T3	0016	0236	0456
6	560	10	2	13	55	25	64	17.5	20	1900	T3	0017	0237	0457
6	560	5	2	13	55	25	64	17.5	20	1900	T3	0018	0238	0458
6	1200	20	3	14	90	20	80	25	25	2265	T4	0019	0239	0459
6	1200	10	3	14	90	20	80	25	25	2265	T4	0020	0240	0460
8	25	20	1	2	7.5	100	40	10.5	12	820	T1	0021	0241	0461
8	25	10	1	2	7.5	100	40	10.5	12	820	T1	0022	0242	0462
8	25	5	1	2	7.5	100	40	10.5	12	820	T1	0023	0243	0463
8	56	20	1	2	14	59	40	14	16	900	T1	0024	0244	0464
8	56	10	1	2	14	59	40	14	16	900	T1	0025	0245	0465
8	56	5	1	2	14	59	40	14	16	900	T1	0026	0246	0466
8	120	20	1	2	20	50	44	17.5	20	1200	T2	0027	0247	0467
8	120	10	1	2	20	50	44	17.5	20	1200	T2	0028	0248	0468
8	120	5	1	2	20	50	44	17.5	20	1200	T2	0029	0249	0469
8	220	20	1	7	40	30	44	17.5	20	1370	T2	0030	0250	0470
8	220	10	1	7	40	30	44	17.5	20	1370	T2	0031	0251	0471
8	220	5	1	7	40	30	44	17.5	20	1370	T2	0032	0252	0472
8	290	20	2	6	40	30	64	17.5	20	1770	T3	0033	0253	0473
8	290	10	2	6	40	25	64	17.5	20	1770	T3	0034	0254	0474
8	290	5	2	6	40	25	64	17.5	20	1770	T3	0035	0255	0475
8	430	20	2	14	46	25	64	17.5	20	1825	T3	0036	0256	0476
8	430	10	2	14	46	25	64	17.5	20	1825	T3	0037	0257	0477
8	430	5	2	14	46	25	64	17.5	20	1825	T3	0038	0258	0478
8	850	20	4	16	60	22	80	25	25	2330	T4	0039	0259	0479
8	850	10	4	16	60	22	80	25	25	2330	T4	0040	0260	0480
10	20	20	1	2	6	175	32	10.5	12	820	T1	0041	0261	0481
10	20	10	1	2	6	175	32	10.5	12	820	T1	0042	0262	0482
10	20	5	1	2	6	175	32	10.5	12	820	T1	0043	0263	0483
10	47	20	1	2	13	100	36	14	16	855	T1	0044	0264	0484
10	47	10	1	2	13	100	36	14	16	855	T1	0045	0265	0485
10	47	5	1	2	13	100	36	14	16	855	T1	0046	0266	0486
10	100	20	1	4	15	60	36	14	16	1200	T2	0047	0267	0487
10	100	10	1	4	15	60	36	14	16	1200	T2	0048	0268	0488

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/22

STYLE CLR79

TABLE I. STYLE CLR79 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DISSIPATION FACTOR	IMPEDANCE (MAX)	CAPACITANCE CHANGE AT			MAX 85°C 40 kHz	CASE SIZE	PART NUMBER M39006/22-		
			+25°C	+85°C & +125°C			-55°C	+85°C	+125°C			M(1.0%)	P(0.1%)	R(0.01%)
V dc	uF	±%	uA	uA	MAX %	OHMS	-%	+%	+%	uA rms				
10	100	5	1	4	15	60	36	14	16	1200	T2	0049	0269	0489
10	180	20	1	7	30	40	36	14	16	1365	T2	0050	0270	0490
10	180	10	1	7	30	40	36	14	16	1365	T2	0051	0271	0491
10	180	5	1	7	30	40	36	14	16	1365	T2	0052	0272	0492
10	250	20	2	10	30	30	36	40	16	1720	T3	0053	0273	0493
10	250	10	2	10	30	30	36	40	16	1720	T3	0054	0274	0494
10	250	5	2	10	30	30	36	40	16	1720	T3	0055	0275	0495
10	390	20	2	16	44	25	64	17.5	20	1800	T3	0056	0276	0496
10	390	10	2	16	44	25	64	17.5	20	1800	T3	0057	0277	0497
10	390	5	2	16	44	25	64	17.5	20	1800	T3	0058	0278	0498
10	750	20	4	16	50	23	80	25	25	2360	T4	0059	0279	0499
10	750	10	4	16	50	23	80	25	25	2360	T4	0060	0280	0500
15	15	20	1	2	5	155	24	10.5	12	780	T1	0061	0281	0501
15	15	10	1	2	5	155	24	10.5	12	780	T1	0062	0282	0502
15	15	5	1	2	5	155	24	10.5	12	780	T1	0063	0283	0503
15	33	20	1	2	10	90	28	14	16	820	T1	0064	0284	0504
15	33	10	1	2	10	90	28	14	16	820	T1	0065	0285	0505
15	33	5	1	2	10	90	28	14	16	820	T1	0066	0286	0506
15	70	20	1	4	13	75	28	14	16	1150	T2	0067	0287	0507
15	70	10	1	4	13	75	28	14	16	1150	T2	0068	0288	0508
15	70	5	1	4	13	75	28	14	16	1150	T2	0069	0289	0509
15	120	20	1	7	18	50	28	17.5	20	1450	T2	0070	0290	0510
15	120	10	1	7	18	50	28	17.5	20	1450	T2	0071	0291	0511
15	120	5	1	7	18	50	28	17.5	20	1450	T2	0072	0292	0512
15	170	20	2	10	25	35	32	14	16	1480	T3	0073	0293	0513
15	170	10	2	10	25	35	32	14	16	1480	T3	0074	0294	0514
15	170	5	2	10	25	35	32	14	16	1480	T3	0075	0295	0515
15	270	20	2	16	32	30	56	17.5	20	1740	T3	0076	0296	0516
15	270	10	2	16	32	30	56	17.5	20	1740	T3	0077	0297	0517
15	270	5	2	16	32	30	56	17.5	20	1740	T3	0078	0298	0518
15	540	20	6	24	40	23	80	25	25	2300	T4	0079	0299	0519
15	540	10	6	24	40	23	80	25	25	2300	T4	0080	0300	0520
25	10	20	1	2	4	220	16	8	9	715	T1	0081	0301	0521
25	10	10	1	2	4	220	16	8	9	715	T1	0082	0302	0522
25	10	5	1	2	4	220	16	8	9	715	T1	0083	0303	0523
25	22	20	1	2	6.6	140	20	10.5	12	825	T1	0084	0304	0524
25	22	10	1	2	6.6	140	20	10.5	12	825	T1	0085	0305	0525
25	22	5	1	2	6.6	140	20	10.5	12	825	T1	0086	0306	0526
25	50	20	1	2	11	70	28	13	15	1130	T2	0087	0307	0527
25	50	10	1	2	11	70	28	13	15	1130	T2	0088	0308	0528

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/22

STYLE CLR79

TABLE I. STYLE CLR79 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DISSIPATION FACTOR	IMPEDANCE (MAX)	CAPACITANCE CHANGE AT			MAX 85°C 40 kHz	CASE SIZE	PART NUMBER M39006/22-		
			+25°C	+85°C & +125°C			-55°C	+85°C	+125°C			M(1.0%)	P(0.1%)	R(0.01%)
V dc	uF	±%	uA	uA	MAX %	OHMS	-%	+%	+%	uA rms				
25	50	5	1	2	11	70	28	13	15	1130	T2	0089	0309	0529
25	100	20	1	10	15	50	28	13	15	1435	T2	0090	0310	0530
25	100	10	1	10	15	50	28	13	15	1435	T2	0091	0311	0531
25	100	5	1	10	15	50	28	13	15	1435	T2	0092	0312	0532
25	120	20	2	6	21	38	32	13	15	1450	T3	0093	0313	0533
25	120	10	2	6	21	38	32	13	15	1450	T3	0094	0314	0534
25	120	5	2	6	21	38	32	13	15	1450	T3	0095	0315	0535
25	180	20	2	18	26	32	48	13	15	1525	T3	0096	0316	0536
25	180	10	2	18	26	32	48	13	15	1525	T3	0097	0317	0537
25	180	5	2	18	26	32	48	13	15	1525	T3	0098	0318	0538
25	350	20	7	28	35	24	70	25	25	1970	T4	0099	0319	0539
25	350	10	7	28	35	24	70	25	25	1970	T4	0100	0320	0540
30	8	20	1	2	4	275	16	8	12	640	T1	0101	0321	0541
30	8	10	1	2	4	275	16	8	12	640	T1	0102	0322	0542
30	8	5	1	2	4	275	16	8	12	640	T1	0103	0323	0543
30	15	20	1	2	5	175	20	10.5	12	780	T1	0104	0324	0544
30	15	10	1	2	5	175	20	10.5	12	780	T1	0105	0325	0545
30	15	5	1	2	5	175	20	10.5	12	780	T1	0106	0326	0546
30	40	20	1	5	10	65	24	10.5	12	1120	T2	0107	0327	0547
30	40	10	1	5	10	65	24	10.5	12	1120	T2	0108	0328	0548
30	40	5	1	5	10	65	24	10.5	12	1120	T2	0109	0329	0549
30	68	20	1	8	13	60	24	13	15	1285	T2	0110	0330	0550
30	68	10	1	8	13	60	24	13	15	1285	T2	0111	0331	0551
30	68	5	1	8	13	60	24	13	15	1285	T2	0112	0332	0552
30	100	20	2	12	17	40	28	10.5	12	1450	T3	0113	0333	0553
30	100	10	2	12	17	40	28	10.5	12	1450	T3	0114	0334	0554
30	100	5	2	12	17	40	28	10.5	12	1450	T3	0115	0335	0555
30	150	20	2	18	23	35	48	13	15	1525	T3	0116	0336	0556
30	150	10	2	18	23	35	48	13	15	1525	T3	0117	0337	0557
30	150	5	2	18	23	35	48	13	15	1525	T3	0118	0338	0558
30	300	20	8	32	31	25	60	25	25	1950	T4	0119	0339	0559
30	300	10	8	32	31	25	60	25	25	1950	T4	0120	0340	0560
50	5	20	1	2	3	400	16	5	6	580	T1	0121	0341	0561
50	5	10	1	2	3	400	16	5	6	580	T1	0122	0342	0562
50	5	5	1	2	3	400	16	5	6	580	T1	0123	0343	0563
50	10	20	1	2	4	250	24	8	9	715	T1	0124	0344	0564
50	10	10	1	2	4	250	24	8	9	715	T1	0125	0345	0565
50	10	5	1	2	4	250	24	8	9	715	T1	0126	0346	0566
50	25	20	1	5	8	95	20	10.5	12	1005	T2	0127	0347	0567
50	25	10	1	5	8	95	20	10.5	12	1005	T2	0128	0348	0568

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/22

STYLE CLR79

TABLE I. STYLE CLR79 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DISSIPATION FACTOR	IMPEDANCE (MAX)	CAPACITANCE CHANGE AT			MAX 85°C 40 kHz	CASE SIZE	PART NUMBER M39006/22-		
			+25°C	+85°C & +125°C			-55°C	+85°C	+125°C			M(1.0%)	P(0.1%)	R(0.01%)
V dc	uF	±%	uA	uA	MAX %	OHMS	-%	+%	+%	uA rms				
50	25	5	1	5	8	95	20	10.5	12	1005	T2	0129	0349	0569
50	47	20	1	9	11	70	28	13	15	1155	T2	0130	0350	0570
50	47	10	1	9	11	70	28	13	15	1155	T2	0131	0351	0571
50	47	5	1	9	11	70	28	13	15	1155	T2	0132	0352	0572
50	60	20	2	12	12	45	15	10.5	12	1335	T3	0133	0353	0573
50	60	10	2	12	12	45	15	10.5	12	1335	T3	0134	0354	0574
50	60	5	2	12	12	45	15	10.5	12	1335	T3	0135	0355	0575
50	82	20	2	16	15	45	32	13	15	1400	T3	0136	0356	0576
50	82	10	2	16	15	45	32	13	15	1400	T3	0137	0357	0577
50	82	5	2	16	15	45	32	13	15	1400	T3	0138	0358	0578
50	160	20	8	32	17	27	50	25	25	1900	T4	0139	0359	0579
50	160	10	8	32	17	27	50	25	25	1900	T4	0140	0360	0580
60	4	20	1	2	2.8	550	16	5	6	525	T1	0141	0361	0581
60	4	10	1	2	2.8	550	16	5	6	525	T1	0142	0362	0582
60	4	5	1	2	2.8	550	16	5	6	525	T1	0143	0363	0583
60	8.2	20	1	2	4	275	24	8	9	625	T1	0144	0364	0584
60	8.2	10	1	2	4	275	24	8	9	625	T1	0145	0365	0585
60	8.2	5	1	2	4	275	24	8	9	625	T1	0146	0366	0586
60	20	20	1	5	7	105	16	10.5	12	930	T2	0147	0367	0587
60	20	10	1	5	7	105	16	10.5	12	930	T2	0148	0368	0588
60	20	5	1	5	7	105	16	10.5	12	930	T2	0149	0369	0589
60	39	20	1	9	10	90	28	10.5	12	1110	T2	0150	0370	0590
60	39	10	1	9	10	90	28	10.5	12	1110	T2	0151	0371	0591
60	39	5	1	9	10	90	28	10.5	12	1110	T2	0152	0372	0592
60	50	20	2	12	10	50	16	10.5	12	1330	T3	0153	0373	0593
60	50	10	2	12	10	50	16	10.5	12	1330	T3	0154	0374	0594
60	50	5	2	12	10	50	16	10.5	12	1330	T3	0155	0375	0595
60	68	20	2	16	13	50	32	10.5	12	1365	T3	0156	0376	0596
60	68	10	2	16	13	50	32	10.5	12	1365	T3	0157	0377	0597
60	68	5	2	16	13	50	32	10.5	12	1365	T3	0158	0378	0598
60	140	20	8	32	16	28	40	20	20	1850	T4	0159	0379	0599
60	140	10	8	32	16	28	40	20	20	1850	T4	0160	0380	0600
75	3.5	20	1	2	2.5	650	16	5	6	525	T1	0161	0381	0601
75	3.5	10	1	2	2.5	650	16	5	6	525	T1	0162	0382	0602
75	3.5	5	1	2	2.5	650	16	5	6	525	T1	0163	0383	0603
75	6.8	20	1	2	3.5	300	20	8	9	610	T1	0164	0384	0604
75	6.8	10	1	2	3.5	300	20	8	9	610	T1	0165	0385	0605
75	6.8	5	1	2	3.5	300	20	8	9	610	T1	0166	0386	0606
75	15	20	1	5	6	150	16	8	9	890	T2	0167	0387	0607
75	15	10	1	5	6	150	16	8	9	890	T2	0168	0388	0608

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/22

STYLE CLR79

TABLE I. STYLE CLR79 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DISSIPATION FACTOR	IMPEDANCE (MAX)	CAPACITANCE CHANGE AT			MAX 85°C 40 kHz	CASE SIZE	PART NUMBER M39006/22-		
			+25°C	+85°C & +125°C			-55°C	+85°C	+125°C			M(1.0%)	P(0.1%)	R(0.01%)
V dc	uF	±%	uA	uA	MAX %	OHMS	-%	+%	+%	uA rms				
75	15	5	1	5	6	150	16	8	9	890	T2	0169	0389	0609
75	33	20	1	10	10	90	24	10.5	15	1000	T2	0170	0390	0610
75	33	10	1	10	10	90	24	10.5	15	1000	T2	0171	0391	0611
75	33	5	1	10	10	90	24	10.5	15	1000	T2	0172	0392	0612
75	40	20	2	12	9	60	16	10.5	12	1250	T3	0173	0393	0613
75	40	10	2	12	9	60	16	10.5	12	1250	T3	0174	0394	0614
75	40	5	2	12	9	60	16	10.5	12	1250	T3	0175	0395	0615
75	56	20	2	17	11	60	28	10.5	15	1335	T3	0176	0396	0616
75	56	10	2	17	11	60	28	10.5	15	1335	T3	0177	0397	0617
75	56	5	2	17	11	60	28	10.5	15	1335	T3	0178	0398	0618
75	110	20	9	36	12	29	35	20	20	1850	T4	0179	0399	0619
75	110	10	9	36	12	29	35	20	20	1850	T4	0180	0400	0620
100	2.5	20	1	2	2	950	16	7	8	505	T1	0181	0401	0621
100	2.5	10	1	2	2	950	16	7	8	505	T1	0182	0402	0622
100	2.5	5	1	2	2	950	16	7	8	505	T1	0183	0403	0623
100	4.7	20	1	2	3	500	16	7	8	565	T1	0184	0404	0624
100	4.7	10	1	2	3	500	16	7	8	565	T1	0185	0405	0625
100	4.7	5	1	2	3	500	16	7	8	565	T1	0186	0406	0626
100	11	20	1	4	5	200	16	8	8	835	T2	0187	0407	0627
100	11	10	1	4	5	200	16	8	8	835	T2	0188	0408	0628
100	11	5	1	4	5	200	16	8	8	835	T2	0189	0409	0629
100	22	20	1	9	7.5	100	16	8	8	935	T2	0190	0410	0630
100	22	10	1	9	7.5	100	16	8	8	935	T2	0191	0411	0631
100	22	5	1	9	7.5	100	16	8	8	935	T2	0192	0412	0632
100	30	20	2	12	7.0	80	16	8	8	1200	T3	0193	0413	0633
100	30	10	2	12	7.0	80	16	8	8	1200	T3	0194	0414	0634
100	30	15	2	12	7.0	80	16	8	8	1200	T3	0195	0415	0635
100	43	20	2	17	8.5	70	20	8	8	1335	T3	0196	0416	0636
100	43	10	2	17	8.5	70	20	8	8	1335	T3	0197	0417	0637
100	43	5	2	17	8.5	70	20	8	8	1335	T3	0198	0418	0638
100	86	20	9	36	10	30	25	15	15	1800	T4	0199	0419	0639
100	86	10	9	36	10	30	25	15	15	1800	T4	0200	0420	0640
125	1.7	20	1	2	2	1250	16	7	8	415	T1	0201	0421	0641
125	1.7	10	1	2	2	1250	16	7	8	415	T1	0202	0422	0642
125	1.7	5	1	2	2	1250	16	7	8	415	T1	0203	0423	0643
125	3.6	20	1	2	2.7	600	16	7	8	520	T1	0204	0424	0644
125	3.6	10	1	2	2.7	600	16	7	8	520	T1	0205	0425	0645
125	3.6	5	1	2	2.7	600	16	7	8	520	T1	0206	0426	0646
125	9	20	1	5	5	240	16	7	8	755	T2	0207	0427	0647
125	9	10	1	5	5	240	16	7	8	755	T2	0208	0428	0648

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(NONSOLID ELECTROLYTE), TANTALUM

MIL-C-39006/22

STYLE CLR79

TABLE I. STYLE CLR79 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE MAX		DISSIPATION FACTOR	IMPEDANCE (MAX)	CAPACITANCE CHANGE AT			MAX 85°C 40 kHz	CASE SIZE	PART NUMBER M39006/22-		
			+25°C	+85°C& +125°C			-55°C	+85°C	+125°C			M(1.0%)	P(0.1%)	R(0.01%)
V dc	uF	±%	uA	uA	MAX %	OHMS	-%	+%	+%	uA rms				
125	9	5	1	5	5	240	16	7	8	755	T2	0209	0429	0649
125	14	20	1	7	6	167	16	7	8	860	T2	0210	0430	0650
125	14	10	1	7	6	167	16	7	8	860	T2	0211	0431	0651
125	14	5	1	7	6	167	16	7	8	860	T2	0212	0432	0652
125	18	20	2	9	5	129	16	7	8	1130	T3	0213	0433	0653
125	18	10	2	9	5	129	16	7	8	1130	T3	0214	0434	0654
125	18	5	2	9	5	129	16	7	8	1130	T3	0215	0435	0655
125	25	20	2	13	6	93	16	7	8	1200	T3	0216	0436	0656
125	25	10	2	13	6	93	16	7	8	1200	T3	0217	0437	0657
125	25	5	2	13	6	93	16	7	8	1200	T3	0218	0438	0658
125	56	20	10	40	6.6	32	25	15	15	1800	T4	0219	0439	0659
125	56	10	10	40	6.6	32	25	15	15	1800	T4	0220	0440	0660

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003 (ESTABLISHED RELIABILITY)

SCOPE: FIXED, SOLID-ELECTROLYTE TANTALUM CAPACITORS, STYLES CSR09,CSR13, CSR23, CSR33 AND CSR91 PER MIL-C-39003 ARE SUITABLE FOR OPERATION AT TEMPERATURES FROM -55°C TO +85°C WITHOUT VOLTAGE DERATING. THESE CAPACITORS ARE POLAR DEVICES AND ARE NOT DESIGNED FOR USE WHERE VOLTAGE REVERSAL WILL BE EXPERIENCED. BECAUSE OF THE SMALL HEATING EFFECT, THE PERMISSIBLE RIPPLE CURRENT IS ALSO LIMITED, DEPENDING ON CAPACITANCE AND AMBIENT TEMPERATURE. OTHER USES ARE FOR FILTER, BYPASS, COUPLING, BLOCKING, ENERGY STORAGE, AND OTHER LOW VOLTAGE DC APPLICATIONS WHERE STABILITY SIZE, WEIGHT AND SHELF LIFE ARE IMPORTANT FACTORS.

TEMP RANGE: -55°C TO +85°C DERATED TO 125°C

SHOCK: 100 G, SAWTOOTH, (MIL-STD-202, METHOD 213)


VIBRATION: 20 G, 10-2000 Hz, (MIL-STD-202, METHOD 204)

PART NUMBER:


M39003	01	-2241
GENERAL SPECIFICATION	DETAIL SPECIFICATION	DASH NUMBER (SEE TABLE I)

MIL-C-39003/01

STYLE CSR13

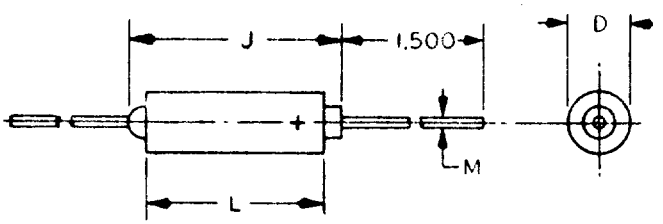

CIRCUIT DIAGRAM



SIZE	DIMENSIONS			
	L	D	M	J
A	.286	.135	.020	.422
B	.474	.185	.020	.610
C	.686	.289	.025	.822
D	.786	.351	.025	.922

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/01-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	±%	±%					
6	5.6	5	.3	6.0	7.5	4	4	A	5001	5201	5401	5601
6	5.6	10	.3	6.0	7.5	4	4	A	2241	2481	2721	2961
6	6.8	5	.3	6.0	7.5	6	6	A	5002	5202	5402	5602
6	6.8	10	.3	6.0	7.5	6	6	A	2242	2482	2722	2962
6	6.8	20	.3	6.0	7.5	6	6	A	2243	2843	2723	2963
6	47.0	5	1.5	24.0	30.0	6	6	B	5003	5203	5403	5603
6	47.0	10	1.5	24.0	30.0	6	6	B	2244	2484	2724	2964
6	47.0	20	1.5	24.0	30.0	6	6	B	2245	2485	2725	2965
6	56.0	5	1.5	24.0	30.0	6	6	B	5004	5204	5404	5604
6	56.0	10	1.5	24.0	30.0	6	6	B	2246	2486	2726	2966
6	150.0	5	4.5	90.0	113.0	8	8	C	5005	5205	5405	5605
6	150.0	10	4.5	90.0	113.0	8	8	C	2247	2487	2727	2967
6	150.0	20	4.5	90.0	113.0	8	8	C	2248	2488	2728	2968
6	180.0	5	5.5	110.0	138.0	8	8	C	5006	5206	5406	5606
6	180.0	10	5.5	110.0	138.0	8	8	C	2249	2489	2729	2969
6	270.0	5	6.5	130.0	163.0	8	8	D	5007	5207	5407	5607
6	270.0	10	6.5	130.0	163.0	8	8	D	2250	2490	2730	2970
6	330.0	5	7.5	150.0	188.0	8	8	D	5008	5208	5408	5608
6	330.0	10	7.5	150.0	188.0	8	8	D	2251	2491	2731	2971
6	330.0	20	7.5	150.0	188.0	8	8	D	2252	2492	2732	2972
10	3.9	5	.3	6.0	7.5	4	4	A	5009	5209	5409	5609
10	3.9	10	.3	6.0	7.5	4	4	A	2253	2493	2733	2973
10	4.7	5	.4	7.0	8.8	4	4	A	5010	5210	5410	5610
10	4.7	10	.4	7.0	8.8	4	4	A	2254	2494	2734	2974
10	4.7	20	.4	7.0	8.8	4	4	A	2255	2495	2735	2975
10	27.0	5	2.0	40.0	50.0	6	6	B	5011	5211	5411	5611
10	27.0	10	2.0	40.0	50.0	6	6	B	2256	2496	2736	2976
10	33.0	5	2.5	50.0	63.0	6	6	B	5012	5212	5412	5612
10	33.0	10	2.5	50.0	63.0	6	6	B	2257	2497	2737	2977
10	33.0	20	2.5	50.0	63.0	6	6	B	2258	2498	2738	2978
10	39.0	5	2.5	50.0	63.0	6	6	B	5013	5213	5413	5613
10	39.0	10	2.5	50.0	63.0	6	6	B	2259	2499	2739	2979
10	82.0	5	4.0	80.0	100.0	6	6	C	5014	5214	5414	5614
10	82.0	10	4.0	80.0	100.0	6	6	C	2260	2500	2740	2980
10	100.0	5	5.0	100.0	125.0	8	8	C	5015	5215	5415	5615
10	100.0	10	5.0	100.0	125.0	8	8	C	2261	2501	2741	2981
10	100.0	20	5.0	100.0	125.0	8	8	C	2262	2502	2742	2982
10	120.0	5	6.0	120.0	150.0	8	8	C	5016	5216	5416	5616
10	120.0	10	6.0	120.0	150.0	8	8	C	2263	2503	2743	2983
10	180.0	5	9.0	180.0	226.0	8	8	D	5017	5217	5417	5617

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/01*			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
10	180.0	10	9.0	180.0	226.0	8	8	D	2264	2504	2744	2984
10	220.0	5	10	200.0	250.0	8	8	D	5018	5218	5418	5618
10	220.0	10	10	200.0	250.0	8	8	D	2265	2505	2745	2985
10	220.0	20	10	200.0	250.0	8	8	D	2266	2506	2746	2986
15	2.7	5	.3	6.0	7.5	4	4	A	5019	5219	5419	5619
15	2.7	10	.3	6.0	7.5	4	4	A	2267	2507	2747	2987
15	3.3	5	.4	8.0	10.0	4	4	A	5020	5220	5420	5620
15	3.3	10	.4	8.0	10.0	4	4	A	2268	2508	2748	2988
15	3.3	20	.4	8.0	10.0	4	4	A	2269	2509	2749	2989
15	18.0	5	2.0	35.0	44.0	6	6	B	5021	5221	5421	5621
15	18.0	10	2.0	35.0	44.0	6	6	B	2270	2510	2750	2990
15	22.0	5	2.0	40.0	50.0	6	6	B	5022	5222	5422	5622
15	22.0	10	2.0	40.0	50.0	6	6	B	2271	2511	2751	2991
15	22.0	20	2.0	40.0	50.0	6	6	B	2272	2512	2752	2992
15	56.0	5	4.0	80.0	100.0	6	6	C	5023	5223	5423	5623
15	56.0	10	4.0	80.0	100.0	6	6	C	2273	2513	2753	2993
15	68.0	5	5.0	100.0	125.0	6	6	C	5024	5224	5424	5624
15	68.0	10	5.0	100.0	125.0	6	6	C	2274	2514	2754	2994
15	68.0	20	5.0	100.0	125.0	6	6	C	2275	2515	2755	2995
15	120.0	5	9.0	180.0	226.0	8	8	D	5025	5225	5425	5625
15	120.0	10	9.0	180.0	226.0	8	8	D	2276	2516	2756	2996
15	150.0	5	10.0	200.0	250.0	8	8	D	5026	5226	5426	5626
15	150.0	10	10.0	200.0	250.0	8	8	D	2277	2517	2757	2997
15	150.0	20	10.0	200.0	250.0	8	8	D	2278	2518	2758	2998
20	1.2	5	.3	6.0	7.5	4	4	A	5027	5227	5427	5627
20	1.2	10	.3	6.0	7.5	4	4	A	2279	2519	2759	2999
20	1.5	5	.3	6.0	7.5	4	4	A	5028	5228	5428	5628
20	1.5	10	.3	6.0	7.5	4	4	A	2280	2520	2760	3000
20	1.5	20	.3	6.0	7.5	4	4	A	2281	2521	2761	3001
20	1.8	5	.3	6.0	7.5	4	4	A	5029	5229	5429	5629
20	1.8	10	.3	6.0	7.5	4	4	A	2282	2522	2762	3002
20	2.2	5	.4	8.0	10.0	4	4	A	5030	5230	5430	5630
20	2.2	10	.4	8.0	10.0	4	4	A	2283	2523	2763	3003
20	2.2	20	.4	8.0	10.0	4	4	A	2284	2524	2764	3004
20	8.2	5	1.0	20.0	25.0	6	6	B	5031	5231	5431	5631
20	8.2	10	1.0	20.0	25.0	6	6	B	2285	2525	2765	3005
20	10.0	5	1.5	30.0	38.0	6	6	B	5032	5232	5432	5632
20	10.0	10	1.5	30.0	38.0	6	6	B	2286	2526	2766	3006
20	10.0	20	1.5	30.0	38.0	6	6	B	2287	2527	2767	3007
20	12.0	5	1.8	35.0	44.0	6	6	B	5033	5233	5433	5633

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT +25°C	DC LEAKAGE AT +85°C	DC LEAKAGE AT +125°C	DISSIPATION FACTOR AT -55°C +25°C	DISSIPATION FACTOR AT +85°C +125°C	CASE SIZE	DASH NUMBER M39003/01- M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
20	12.0	10	1.8	35.0	44.0	6	6	B	2288	2528	2768	3008
20	15.0	5	2.0	40.0	50.0	6	6	B	5034	5234	5434	5634
20	15.0	10	2.0	40.0	50.0	6	6	B	2289	2529	2769	3009
20	15.0	20	2.0	40.0	50.0	6	6	B	2290	2530	2770	3010
20	27.0	5	2.5	50.0	63.0	6	6	C	5035	5235	5435	5635
20	27.0	10	2.5	50.0	63.0	6	6	C	2291	2531	2771	3011
20	33.0	5	3.5	70.0	88.0	6	6	C	5036	5236	5436	5636
20	33.0	10	3.5	70.0	88.0	6	6	C	2292	2532	2772	3012
20	33.0	20	3.5	70.0	88.0	6	6	C	2293	2533	2773	3013
20	39.0	5	4.0	80.0	100.0	6	6	C	5037	5237	5437	5637
20	39.0	10	4.0	80.0	100.0	6	6	C	2294	2534	2774	3014
20	47.0	5	4.5	90.0	113.0	6	6	C	5038	5238	5438	5638
20	47.0	10	4.5	90.0	113.0	6	6	C	2295	2535	2775	3015
20	47.0	20	4.5	90.0	113.0	6	6	C	2296	2536	2776	3016
20	56.0	5	5.5	110.0	138.0	6	6	D	5039	5239	5439	5639
20	56.0	10	5.5	110.0	138.0	6	6	D	2297	2537	2777	3017
20	68.0	5	7.0	140.0	175.0	6	6	D	5040	5240	5440	5641
20	68.0	10	7.0	140.0	175.0	6	6	D	2298	2538	2778	3018
20	68.0	20	7.0	140.0	175.0	6	6	D	2299	2539	2779	3019
20	82.0	5	8.0	160.0	200.0	6	6	D	5041	5241	5441	5641
20	82.0	10	8.0	160.0	200.0	6	6	D	2300	2540	2780	3020
20	100.0	5	10	200.0	250.0	8	8	D	5042	5242	5442	5642
20	100.0	10	10	200.0	250.0	8	8	D	2301	2541	2781	3021
20	100.0	20	10	200.0	250.0	8	8	D	2302	2542	2782	3022
35	5.6	5	1.3	25.0	32.0	4	4	B	5043	5243	5443	5643
35	5.6	10	1.3	25.0	32.0	4	4	B	2303	2543	2783	3023
35	6.8	5	1.5	30.0	38.0	6	6	B	5044	5244	5444	5644
35	6.8	10	1.5	30.0	38.0	6	6	B	2304	2544	2784	3024
35	6.8	20	1.5	30.0	38.0	6	6	B	2305	2545	2785	3025
35	22.0	5	4.0	80.0	100.0	6	6	C	5045	5245	5445	5645
35	22.0	10	4.0	80.0	100.0	6	6	C	2306	2546	2786	3026
35	22.0	20	4.0	80.0	100.0	6	6	C	2307	2547	2787	3027
35	27.0	5	4.5	90.0	113.0	6	6	D	5046	5246	5446	5646
35	27.0	10	4.5	90.0	113.0	6	6	D	2308	2548	2788	3028
35	33.0	5	5.5	110.0	138.0	6	6	D	5047	5247	5447	5647
35	33.0	10	5.5	110.0	138.0	6	6	D	2309	2549	2789	3029
35	33.0	20	5.5	110.0	138.0	6	6	D	2310	2550	2790	3030
35	39.0	5	7.0	140.0	175.0	6	6	D	5048	5248	5448	5648
35	39.0	10	7.0	140.0	175.0	6	6	D	2311	2551	2791	3031
35	47.0	5	8.0	160.0	200.0	6	6	D	5049	5249	5449	5649

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/01-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
35	47.0	10	8.0	160.0	200.0	6	6	D	2312	2552	2792	3032
35	47.0	20	8.0	160.0	200.0	6	6	D	2313	2553	2793	3033
50	.0047	5	.3	5.0	6.3	2	4	A	5050	5250	5450	5650
50	.0047	10	.3	5.0	6.3	2	4	A	2314	2554	2794	3034
50	.0047	20	.3	5.0	6.3	2	4	A	2315	2555	2795	3035
50	.0056	5	.3	5.0	6.3	2	4	A	5051	5251	5451	5651
50	.0056	10	.3	5.0	6.3	2	4	A	2316	2556	2796	3036
50	.0068	5	.3	5.0	6.3	2	4	A	5052	5252	5452	5652
50	.0068	10	.3	5.0	6.3	2	4	A	2317	2557	2797	3037
50	.0068	20	.3	5.0	6.3	2	4	A	2318	2558	2798	3038
50	.0082	5	.3	5.0	6.3	2	4	A	5053	5253	5453	5653
50	.0082	10	.3	5.0	6.3	2	4	A	2319	2559	2799	3039
50	.01	5	.3	5.0	6.3	2	4	A	5054	5254	5454	5654
50	.01	10	.3	5.0	6.3	2	4	A	2320	2560	2800	3040
50	.01	20	.3	5.0	6.3	2	4	A	2321	2561	2801	3041
50	.012	5	.3	5.0	6.3	2	4	A	5055	5255	5455	5655
50	.012	10	.3	5.0	6.3	2	4	A	2322	2562	2802	3042
50	.015	5	.3	5.0	6.3	2	4	A	5056	5256	5456	5656
50	.015	10	.3	5.0	6.3	2	4	A	2323	2563	2803	3043
50	.015	20	.3	5.0	6.3	2	4	A	2324	2564	2804	3044
50	.018	5	.3	5.0	6.3	2	4	A	5057	5257	5457	5657
50	.018	10	.3	5.0	6.3	2	4	A	2325	2565	2805	3045
50	.022	5	.3	5.0	6.3	2	4	A	5058	5258	5458	5658
50	.022	10	.3	5.0	6.3	2	4	A	2326	2566	2806	3046
50	.022	20	.3	5.0	6.3	2	4	A	2327	2567	2807	3047
50	.027	5	.3	5.0	6.3	2	4	A	5059	5259	5459	5659
50	.027	10	.3	5.0	6.3	2	4	A	2328	2568	2808	3048
50	.033	5	.3	5.0	6.3	2	4	A	5060	5260	5460	5660
50	.033	10	.3	5.0	6.3	2	4	A	2329	2569	2809	3049
50	.033	20	.3	5.0	6.3	2	4	A	2330	2570	2810	3050
50	.039	5	.3	5.0	6.3	2	4	A	5062	5261	5461	5661
50	.039	10	.3	5.0	6.3	2	4	A	2331	2571	2811	3051
50	.047	5	.3	5.0	6.3	2	4	A	5062	5262	5462	5662
50	.047	10	.3	5.0	6.3	2	4	A	2332	2572	2812	3052
50	.047	20	.3	5.0	6.3	2	4	A	2333	2573	2813	3053
50	.056	5	.3	5.0	6.3	2	4	A	5063	5263	5463	5663
50	.056	10	.3	5.0	6.3	2	4	A	2334	2574	2814	3054
50	.068	5	.3	5.0	6.3	2	4	A	5064	5264	5464	5664
50	.068	10	.3	5.0	6.3	2	4	A	2335	2575	2815	3055
50	.068	20	.3	5.0	6.3	2	4	A	2336	2576	2816	3056

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT +25°C	DC LEAKAGE AT +85°C	DC LEAKAGE AT +125°C	DISSIPATION FACTOR AT -55°C +25°C	DISSIPATION FACTOR AT +85°C +125°C	CASE SIZE	DASH NUMBER M39003/01- M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
50	.082	5	.3	5.0	6.3	2	4	A	5065	5265	5465	5665
50	.082	10	.3	5.0	6.3	2	4	A	2337	2577	2817	3057
50	.1	5	.3	5.0	6.3	2	4	A	5066	5266	5466	5666
50	.1	10	.3	5.0	6.3	2	4	A	2338	3578	2818	3058
50	.1	20	.3	5.0	6.3	2	4	A	2339	2579	2819	3059
50	.12	5	.3	5.0	6.3	2	4	A	5067	5267	5467	5667
50	.12	10	.3	5.0	6.3	2	4	A	2340	2580	2820	3060
50	.15	5	.3	5.0	6.3	2	4	A	5068	5268	5468	5668
50	.15	10	.3	5.0	6.3	2	4	A	2341	2581	2821	3061
50	.15	20	.3	5.0	6.3	2	4	A	2342	2582	2822	3062
50	.18	5	.3	5.0	6.3	2	4	A	5069	5269	5469	5669
50	.18	10	.3	5.0	6.3	2	4	A	2343	2583	2823	3063
50	.22	5	.3	5.0	6.3	2	4	A	5070	5270	5470	5670
50	.22	10	.3	5.0	6.3	2	4	A	2344	2584	2824	3064
50	.22	20	.3	5.0	6.3	2	4	A	2345	2585	2825	3065
50	.27	5	.3	5.0	6.3	2	4	A	5071	5271	5471	5671
50	.27	10	.3	5.0	6.3	2	4	A	2346	2586	2826	3066
50	.33	5	.3	5.0	6.3	2	4	A	5072	5272	5472	5672
50	.33	10	.3	5.0	6.3	2	4	A	2347	2587	2827	3067
50	.33	20	.3	5.0	6.3	2	4	A	2348	2588	2828	3068
50	.39	5	.3	5.0	6.3	2	4	A	5073	5273	5473	5673
50	.39	10	.3	5.0	6.3	2	4	A	2349	2589	2829	3069
50	.47	5	.3	5.0	6.3	2	4	A	5074	5274	5474	5674
50	.47	10	.3	5.0	6.3	2	4	A	2350	2590	2830	3070
50	.47	20	.3	5.0	6.3	2	4	A	2351	2591	2831	3071
50	.56	5	.3	5.0	6.3	2	4	A	5075	5275	5475	5675
50	.56	10	.3	5.0	6.3	2	4	A	2352	2592	2832	3072
50	.68	5	.3	5.0	6.3	2	4	A	5076	5276	5476	5676
50	.68	10	.3	5.0	6.3	2	4	A	2353	2593	2833	3073
50	.68	20	.3	5.0	6.3	2	4	A	2354	2594	2834	3074
50	.82	5	.3	5.0	6.3	2	4	A	5077	5277	5477	5677
50	.82	10	.3	5.0	6.3	2	4	A	2355	2595	2835	3075
50	1.0	5	.4	8.0	10.0	2	4	A	5078	5278	5478	5678
50	1.0	10	.4	8.0	10.0	2	4	A	2356	2596	2836	3076
50	1.0	20	.4	8.0	10.0	2	4	A	2357	2597	2837	3077
50	1.2	5	.4	9.0	11.0	4	4	B	5079	5279	5479	5679
50	1.2	10	.4	9.0	11.0	4	4	B	2358	2598	2838	3078
50	1.5	5	.6	12.0	15.0	4	4	B	5080	5280	5480	5680
50	1.5	10	.6	12.0	15.0	4	4	B	2359	2599	2939	3079
50	1.5	20	.6	12.0	15.0	4	4	B	2360	2600	2840	3080

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/01-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M(1.0%)	P(0.1%)	R(0.01%)	S(0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
50	1.8	5	.7	14.0	18.0	4	4	B	5081	5281	5481	5681
50	1.8	10	.7	14.0	18.0	4	4	B	2361	2601	2841	3081
50	2.2	5	.8	17.0	22.0	4	4	B	5082	5282	5482	5682
50	2.2	10	.8	17.0	22.0	4	4	B	2362	2602	2842	3082
50	2.2	20	.8	17.0	22.0	4	4	B	2363	2603	2843	2083
50	2.7	5	1.0	20.0	25.0	4	4	B	5083	5283	5483	5683
50	2.7	10	1.0	20.0	25.0	4	4	B	2364	2604	2844	3084
50	3.3	5	1.2	25.0	32.0	4	4	B	5084	5284	5484	5684
50	3.3	10	1.2	25.0	32.0	4	4	B	2365	2605	2845	3085
50	3.3	20	1.2	25.0	32.0	4	4	B	2366	2606	2846	3086
50	3.9	5	1.5	30.0	38.0	4	4	B	5085	5285	5485	5685
50	3.9	10	1.5	30.0	38.0	4	4	B	2367	2607	2847	3087
50	4.7	5	1.7	35.0	44.0	4	4	B	5086	5286	5486	5686
50	4.7	10	1.7	35.0	44.0	4	4	B	2368	2608	2848	3088
50	4.7	20	1.7	35.0	44.0	4	4	B	2369	2609	2849	3089
50	5.6	5	2.2	45.0	56.0	4	4	C	5087	5287	5487	5687
50	5.6	10	2.2	45.0	56.0	4	4	C	2370	2610	2850	3090
50	6.8	5	2.2	45.0	56.0	6	6	C	5088	5288	5488	5688
50	6.8	10	2.2	45.0	56.0	6	6	C	2371	2611	2851	3091
50	6.8	20	2.2	45.0	56.0	6	6	C	2372	2612	2852	3092
50	8.2	5	2.5	50.0	63.0	6	6	C	5089	5289	5489	5689
50	8.2	10	2.5	50.0	63.0	6	6	C	2373	2613	2853	3093
50	10.0	5	2.5	50.0	63.0	6	6	C	5090	5290	5490	5690
50	10.0	10	2.5	50.0	63.0	6	6	C	2374	2614	2854	3094
50	10.0	20	2.5	50.0	63.0	6	6	C	2375	2615	2855	3095
50	12.0	5	3.0	60.0	75.0	6	6	C	5091	5291	5491	5691
50	12.0	10	3.0	60.0	75.0	6	6	C	2376	2616	2856	3096
50	15.0	5	4.0	80.0	100.0	6	6	C	5092	5292	5492	5692
50	15.0	10	4.0	80.0	100.0	6	6	C	2377	2617	2857	3097
50	15.0	20	4.0	80.0	100.0	6	6	C	2378	2618	2858	3098
50	18.0	5	4.5	90.0	113.0	6	6	C	5093	5293	5493	5693
50	18.0	10	4.5	90.0	113.0	6	6	C	2379	2619	2859	3099
50	22.0	5	5.5	110.0	138.0	6	6	D	5094	5294	5494	5694
50	22.0	10	5.5	110.0	138.0	6	6	D	2380	2620	2860	3100
50	22.0	20	5.5	110.0	138.0	6	6	D	2381	2621	2861	3101
75	.1	5	.3	5.0	6.3	2	4	A	5095	5295	5495	5695
75	.1	10	.3	5.0	6.3	2	4	A	2382	2622	2862	3102
75	.1	20	.3	5.0	6.3	2	4	A	2383	2623	2863	3103
75	.12	5	.3	5.0	6.3	2	4	A	5096	5296	5496	5696
75	.12	10	.3	5.0	6.3	2	4	A	2384	2624	2864	3104

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/01-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M(1.0%)	P(0.1%)	R(0.01%)	S(0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
75	.15	5	.3	5.0	6.3	2	4	A	5097	5297	5497	5697
75	.15	10	.3	5.0	6.3	2	4	A	2385	2625	2865	3105
75	.15	20	.3	5.0	6.3	2	4	A	2386	2626	2866	3106
75	.18	5	.3	5.0	6.3	2	4	A	5098	5298	5498	5698
75	.18	10	.3	5.0	6.3	2	4	A	2387	2627	2867	3107
75	.22	5	.3	5.0	6.3	2	4	A	5099	5299	5499	5699
75	.22	10	.3	5.0	6.3	2	4	A	2388	2628	2868	3108
75	.22	20	.3	5.0	6.3	2	4	A	2389	2629	2869	3109
75	.27	5	.3	5.0	6.3	2	4	A	5100	5300	5500	5700
75	.27	10	.3	5.0	6.3	2	4	A	2390	2630	2870	3110
75	.33	5	.3	5.0	6.3	2	4	A	5101	5301	5501	5701
75	.33	10	.3	5.0	6.3	2	4	A	2391	2631	2871	3111
75	.33	20	.3	5.0	6.3	2	4	A	2392	2632	2872	3112
75	.39	5	.3	5.0	6.3	2	4	A	5102	5302	5502	5702
75	.39	10	.3	5.0	6.3	2	4	A	2393	2633	2873	3113
75	.47	5	.3	5.0	6.3	2	4	A	5103	5303	5503	5703
75	.47	10	.3	5.0	6.3	2	4	A	2394	2634	2874	3114
75	.47	20	.3	5.0	6.3	2	4	A	2395	2635	2875	3115
75	.56	5	.3	5.0	6.3	2	4	A	5104	5304	5504	5704
75	.56	10	.3	5.0	6.3	2	4	A	2396	2636	2876	3116
75	.68	5	.3	5.0	6.3	2	4	A	5105	5305	5505	5705
75	.68	10	.3	5.0	6.3	2	4	A	2397	2637	2877	3117
75	.68	20	.3	5.0	6.3	2	4	A	2398	2638	2878	3118
75	.82	5	.3	5.0	6.3	2	4	B	5106	5306	5506	5706
75	.82	10	.3	5.0	6.3	2	4	B	2399	2639	2879	3119
75	1.0	5	.4	5.0	6.3	2	4	B	5107	5307	5507	5707
75	1.0	10	.4	5.0	6.3	2	4	B	2400	2640	2880	3120
75	1.0	20	.4	5.0	6.3	2	4	B	2401	2641	2881	3121
75	1.2	5	.4	5.0	6.3	4	4	B	5108	5308	5508	5708
75	1.2	10	.4	5.0	6.3	4	4	B	2402	2642	2882	3122
75	1.5	5	.6	10.0	13.0	4	4	B	5109	5309	5509	5709
75	1.5	10	.6	10.0	13.0	4	4	B	2403	2643	2883	3123
75	1.5	20	.6	10.0	13.0	4	4	B	2404	2644	2884	3124
75	1.8	5	.7	10.0	13.0	4	4	B	5110	5310	5510	5710
75	1.8	10	.7	10.0	13.0	4	4	B	2405	2645	2885	3125
75	2.2	5	.8	15.0	19.0	4	4	B	5111	5311	5511	5711
75	2.2	10	.8	15.0	19.0	4	4	B	2406	2646	2886	3126
75	2.2	20	.8	15.0	19.0	4	4	B	2407	2647	2887	3127
75	2.7	5	1.0	15.0	19.0	4	4	B	5112	5312	5512	5712
75	2.7	10	1.0	15.0	19.0	4	4	B	2408	2648	2888	3128

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/01-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M(1.0%)	P(0.1%)	R(0.01%)	S(0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
75	3.3	5	1.2	20.0	25.0	4	4	B	5113	5313	5513	5713
75	3.3	10	1.2	20.0	25.0	4	4	B	2409	2649	2889	3129
75	3.3	20	1.2	20.0	25.0	4	4	B	2410	2650	2890	3130
75	3.9	5	1.5	20.0	25.0	4	4	B	5114	5314	5514	5714
75	3.9	10	1.5	20.0	25.0	4	4	B	2411	2651	2891	3131
75	4.7	5	3.0	60.0	75.0	4	4	C	5115	5315	5515	5715
75	4.7	10	3.0	60.0	75.0	4	4	C	2412	2652	2892	3132
75	4.7	20	3.0	60.0	75.0	4	4	C	2413	2653	2893	3133
75	5.6	5	3.0	60.0	75.0	4	4	C	5116	5316	5516	5716
75	5.6	10	3.0	60.0	75.0	4	4	C	2414	2654	2894	3134
75	6.8	5	5.0	100.0	125.0	6	6	C	5117	5317	5517	5717
75	6.8	10	5.0	100.0	125.0	6	6	C	2415	2655	2895	3135
75	6.8	20	5.0	100.0	125.0	6	6	C	2416	2656	2896	3136
75	8.2	5	5.0	100.0	125.0	6	6	C	5118	5318	5518	5718
75	8.2	10	5.0	100.0	125.0	6	6	C	2417	2657	2897	3137
75	10.0	5	5.0	100.0	125.0	6	6	C	5119	5319	5519	5719
75	10.0	10	5.0	100.0	125.0	6	6	C	2418	2658	2898	3138
75	10.0	20	5.0	100.0	125.0	6	6	C	2419	2659	2899	3139
75	12.0	5	5.0	100.0	125.0	6	6	D	5120	5320	5520	5720
75	12.0	10	5.0	100.0	125.0	6	6	D	2420	2660	2990	3140
75	15.0	5	7.0	140.0	175.0	6	6	D	5121	5321	5521	5721
75	15.0	10	7.0	140.0	175.0	6	6	D	2421	2661	2901	3141
75	15.0	20	7.0	140.0	175.0	6	6	D	2422	2662	2902	3142
100	.0047	5	.3	5.0	6.3	2	4	A	5122	5322	5522	5722
100	.0047	10	.3	5.0	6.3	2	4	A	2423	2663	2903	3143
100	.0047	20	.3	5.0	6.3	2	4	A	2424	2664	2904	3144
100	.0056	5	.3	5.0	6.3	2	4	A	5123	5323	5523	5723
100	.0056	10	.3	5.0	6.3	2	4	A	2425	2665	2905	3145
100	.0068	5	.3	5.0	6.3	2	4	A	5124	5324	5524	5724
100	.0068	10	.3	5.0	6.3	2	4	A	2426	2666	2906	3146
100	.0068	20	.3	5.0	6.3	2	4	A	2427	2667	2907	3147
100	.0082	5	.3	5.0	6.3	2	4	A	5125	5325	5525	5725
100	.0082	10	.3	5.0	6.3	2	4	A	2428	2668	2908	3148
100	.01	5	.3	5.0	6.3	2	4	A	5126	5326	5526	5726
100	.01	10	.3	5.0	6.3	2	4	A	2429	2669	2909	3149
100	.012	5	.3	5.0	6.3	2	4	A	2430	2670	2910	3150
100	.012	5	.3	5.0	6.3	2	4	A	5127	5327	5527	5727
100	.012	10	.3	5.0	6.3	2	4	A	2431	2671	2911	3151
100	.015	5	.3	5.0	6.3	2	4	A	5128	5328	5528	5728
100	.015	10	.3	5.0	6.3	2	4	A	2432	2672	2912	3152

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/01-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M(1.0%)	P(0.1%)	R(0.01%)	S(0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
100	.015	20	.3	5.0	6.3	2	4	A	2433	2673	2913	3153
100	.018	5	.3	5.0	6.3	2	4	A	5129	5329	5529	5729
100	.018	10	.3	5.0	6.3	2	4	A	2434	2674	2914	3154
100	.022	5	.3	5.0	6.3	2	4	A	5130	5330	5530	5730
100	.022	10	.3	5.0	6.3	2	4	A	2435	2675	2915	3155
100	.022	20	.3	5.0	6.3	2	4	A	2436	2676	2916	3156
100	.027	5	.3	5.0	6.3	2	4	A	5131	5331	5531	5731
100	.027	10	.3	5.0	6.3	2	4	A	2437	2677	2917	3157
100	.033	5	.3	5.0	6.3	2	4	A	5132	5332	5532	5732
100	.033	10	.3	5.0	6.3	2	4	A	2438	2678	2918	3158
100	.033	20	.3	5.0	6.3	2	4	A	2439	2679	2919	3159
100	.039	5	.3	5.0	6.3	2	4	A	5133	5333	5533	5733
100	.039	10	.3	5.0	6.3	2	4	A	2440	2680	2920	3160
100	.047	5	.3	5.0	6.3	2	4	A	5134	5334	5534	5734
100	.047	10	.3	5.0	6.3	2	4	A	2441	2681	2921	3161
100	.047	20	.3	5.0	6.3	2	4	A	2442	2682	2922	3162
100	.056	5	.3	5.0	6.3	2	4	A	5135	5335	5535	5735
100	.056	10	.3	5.0	6.3	2	4	A	2443	2683	2923	3163
100	.068	5	.3	5.0	6.3	2	4	A	5136	5336	5536	5736
100	.068	10	.3	5.0	6.3	2	4	A	2444	2684	2924	3164
100	.068	20	.3	5.0	6.3	2	4	A	2445	2685	2925	3165
100	.082	5	.3	5.0	6.3	2	4	A	5137	5337	5537	5737
100	.082	10	.3	5.0	6.3	2	4	A	2446	2686	2926	3166
100	.1	5	.3	5.0	6.3	2	4	A	5138	5338	5538	5738
100	.1	10	.3	5.0	6.3	2	4	A	2447	2687	2927	3167
100	.1	20	.3	5.0	6.3	2	4	A	2448	2688	2928	3168
100	.12	5	.3	5.0	6.3	2	4	A	5139	5339	5539	5739
100	.12	10	.3	5.0	6.3	2	4	A	2449	2689	2929	3169
100	.15	5	.3	5.0	6.3	2	4	A	5140	5340	5540	5740
100	.15	10	.3	5.0	6.3	2	4	A	2450	2690	2930	3170
100	.15	20	.3	5.0	6.3	2	4	A	2451	2691	2931	3171
100	.18	5	.3	5.0	6.3	2	4	A	5141	5341	5541	5741
100	.18	10	.3	5.0	6.3	2	4	A	2452	2692	2932	3172
100	.22	5	.3	5.0	6.3	2	4	A	5172	5342	5542	5742
100	.22	10	.3	5.0	6.3	2	4	A	2453	2693	2933	3173
100	.22	20	.3	5.0	6.3	2	4	A	2454	2694	2934	3174
100	.27	5	.3	5.0	6.3	2	4	A	5143	5343	5543	5743
100	.27	10	.3	5.0	6.3	2	4	A	2455	2695	2935	3175
100	.33	5	.3	5.0	6.3	2	4	A	5514	5344	5544	5744
100	.33	10	.3	5.0	6.3	2	4	A	2456	2696	2936	3176

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/01

STYLE CSR13

TABLE I. STYLE CSR13 CHARACTERISTICS AND DASH NUMBERS(CONT).


RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/01-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M(1.0%)	P(0.1%)	R(0.01%)	S(0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
100	.33	20	.3	5.0	6.3	2	4	A	2457	2697	2937	3177
100	.39	5	.3	5.0	6.3	2	4	A	5145	5345	5545	5745
100	.39	10	.3	5.0	6.3	2	4	A	2458	2698	2938	3178
100	.47	5	.3	5.0	6.3	2	4	A	5146	5346	5546	5746
100	.47	10	.3	5.0	6.3	2	4	A	2459	2699	2939	3179
100	.47	20	.3	5.0	6.3	2	4	A	2460	2700	2940	3180
100	.56	5	.3	5.0	6.3	2	4	A	5147	5347	5547	5747
100	.56	10	.3	5.0	6.3	2	4	A	2461	2701	2941	3181
100	.68	5	.3	5.0	6.3	2	4	B	5148	5348	5548	5748
100	.68	10	.3	5.0	6.3	2	4	B	2462	2702	2942	3182
100	.68	20	.3	5.0	6.3	2	4	B	2463	2703	2943	3183
100	.82	5	.4	5.0	6.3	2	4	B	5149	5349	5549	5749
100	.82	10	.4	5.0	6.3	2	4	B	2464	2704	2944	3184
100	1.0	5	.5	5.0	6.3	2	4	B	5150	5350	5550	5750
100	1.0	10	.5	5.0	6.3	2	4	B	2465	2705	2945	3185
100	1.0	20	.5	5.0	6.3	2	4	B	2466	2706	2946	3186
100	1.2	5	.5	5.0	6.3	4	4	B	5151	5351	5551	5751
100	1.2	10	.5	5.0	6.3	4	4	B	2467	2707	2947	3187
100	1.5	5	.7	10.0	13.0	4	4	B	5152	5352	5552	5752
100	1.5	10	.7	10.0	13.0	4	4	B	2468	2708	2948	3188
100	1.5	20	.7	10.0	13.0	4	4	B	2469	2709	2949	3189
100	1.8	5	.7	10.0	13.0	4	4	B	5153	5353	5553	5753
100	1.8	10	.7	10.0	13.0	4	4	B	2470	2710	2950	3190
100	2.2	5	.9	15.0	19.0	4	4	B	5154	5354	5554	5754
100	2.2	10	.9	15.0	19.0	4	4	B	2471	2711	2951	3191
100	2.2	20	.9	15.0	19.0	4	4	B	2472	2712	2952	3192
100	2.7	5	1.1	15.0	19.0	4	4	B	5155	5355	5555	5755
100	2.7	10	1.1	15.0	19.0	4	4	B	2473	2713	2953	3193
100	3.3	5	1.5	30.0	38.0	6	6	C	5156	5356	5556	5756
100	3.3	10	1.5	30.0	38.0	6	6	C	5157	5357	5557	5757
100	3.3	20	1.5	30.0	38.0	6	6	C	5158	5358	5558	575
100	3.9	5	1.5	30.0	38.0	6	6	C	5159	5359	5559	5759
100	3.9	10	1.5	30.0	38.0	6	6	C	5160	5360	5560	5760
100	4.7	5	2.5	50.0	63.0	6	6	C	5161	5361	5561	5761
100	4.7	10	2.5	50.0	63.0	6	6	C	5162	5362	5562	5762
100	4.7	20	2.5	50.0	63.0	6	6	C	5163	5363	5563	5763
100	5.6	5	2.5	50.0	63.0	6	6	C	5164	5364	5564	5764
100	5.6	10	2.5	50.0	63.0	6	6	C	5165	5365	5565	5765
100	6.8	5	2.5	50.0	63.0	6	6	C	5166	5366	5566	5766
100	6.8	10	2.5	50.0	63.0	6	6	C	5167	5367	5567	5767
100	6.8	20	2.5	50.0	63.0	6	6	C	5168	5368	5568	5768

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/02

STYLE CSR09

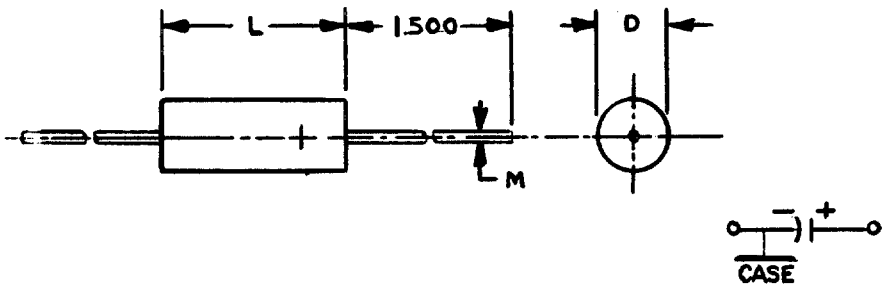

CASE SIZE	DIMENSIONS								
	L			D			M		
	MIN	NOM	MAX	MIN	NOM	MAX	MIN	NOM	MAX
A1	.235	.250	.281	.081	.090	.099	.015	.016	.021
B1	.375	.390	.405	.128	.138	.148	.015	.016	.021

TABLE I. STYLE CSR09 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG).

RATED VOLTAGE (+85°C)	CAPACITANCE (NOM)	CAPACITANCE TOLERANCE	DC LEAKAGE AT +25°C	DC LEAKAGE AT +85°C	DC LEAKAGE AT +125°C	DISSPATION FACTOR AT -55°C	DISSPATION FACTOR AT +25°C	DISSPATION FACTOR AT +85°C +125°C	CASE SIZE	DASH NUMBER M39003/01- M (1.0%)	P (0.1%)	R (0.01%) S	(0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%	+%					
6	2.7	5	.6	6.0	8.0	8	6	6	A1	1001	1061	1121	1181
6	2.7	10	.6	6.0	8.0	8	6	6	A1	0001	0061	0121	0181
6	18.0	5	1.4	21.6	36.7	8	6	6	B1	1002	1062	1122	1182
6	18.0	10	1.4	21.6	36.7	8	6	6	B1	0002	0062	0122	0182
10	1.8	5	.6	6.0	8.0	8	6	6	A1	1007	1067	1127	1187
10	1.8	10	.6	6.0	8.0	8	6	6	A1	0007	0067	0127	0187
10	2.2	5	.6	6.0	8.0	8	6	6	A1	1008	1068	1128	1188
10	2.2	10	.6	6.0	8.0	8	6	6	A1	0008	0068	0128	0188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/02

TABLE I. STYLE CSR09 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE (NOM)	CAPACITANCE TOLERANCE	DC LEAKAGE AT +25°C	DC LEAKAGE AT +85°C	DC LEAKAGE AT +125°C	DISSPATION FACTOR AT -55°C	DISSPATION FACTOR AT +25°C	DISSPATION FACTOR AT +85°C +125°C	CASE SIZE	DASH NUMBER M39003/02- M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%	+%					
10	10.0	5	2.5	20.0	34.0	8	6	6	B1	1009	1069	1129	1189
10	10.0	10	2.5	20.0	34.0	8	6	6	B1	0009	0069	0129	0189
10	12.0	5	2.5	24.0	40.8	8	6	6	B1	1010	1070	1130	1190
10	12.0	10	2.5	24.0	40.8	8	6	6	B1	0010	0070	0130	0190
10	15.0	5	2.5	30.0	51.0	8	6	6	B1	1011	1071	1131	1191
10	15.0	10	2.5	30.0	51.0	8	6	6	B1	0011	0071	0131	0191
15	1.0	5	.6	6.0	8.0	8	6	6	A1	1012	1072	1132	1192
15	1.0	10	.6	6.0	8.0	8	6	6	A1	0012	0072	0132	0192
15	1.2	5	.6	6.0	8.0	8	6	6	A1	1013	1073	1133	1193
15	1.2	10	.6	6.0	8.0	8	6	6	A1	0013	0073	0133	0193
15	1.5	5	.6	6.0	8.0	8	6	6	A1	1014	1074	1134	1194
15	1.5	10	.6	6.0	8.0	8	6	6	A1	0014	0074	0134	0194
15	8.2	5	1.8	24.6	42.0	8	6	6	B1	1015	1075	1135	1195
15	8.2	10	1.8	24.6	42.0	8	6	6	B1	0015	0075	0135	0195
20	.56	5	.6	6.0	8.0	4	3	4	A1	1016	1076	1136	1196
20	.56	10	.6	6.0	8.0	4	3	4	A1	0016	0076	0136	0196
20	.68	5	.6	6.0	8.0	4	3	4	A1	1017	1077	1137	1197
20	.68	10	.6	6.0	8.0	4	3	4	A1	0017	0077	0137	0197
20	.82	5	.6	6.0	8.0	4	3	4	A1	1018	1078	1138	1198
20	.82	10	.6	6.0	8.0	4	3	4	A1	0018	0078	0138	0198
20	1.0	5	.6	6.0	8.0	4	3	4	A1	1019	1079	1139	1199
20	1.0	10	.6	6.0	8.0	4	3	4	A1	0019	0079	0139	0199
20	3.3	5	1.0	13.2	22.4	4	3	4	B1	1020	1080	1140	1200
20	3.3	10	1.0	13.2	22.4	4	3	4	B1	0020	0080	0140	0200
20	3.9	5	2.0	15.6	26.5	4	3	4	B1	1021	1081	1141	1201
20	3.9	10	2.0	15.6	26.5	4	3	4	B1	0021	0081	0141	0201
20	4.7	5	2.0	18.8	32.0	4	3	4	B1	1022	1082	1142	1202
20	4.7	10	2.0	18.8	32.0	4	3	4	B1	0022	0082	0142	0202
20	5.6	5	2.0	22.4	38.1	4	3	4	B1	1023	1083	1143	1203
20	5.6	10	2.0	22.4	38.1	4	3	4	B1	0023	0083	0143	0203
20	6.8	5	2.0	27.2	46.2	4	3	4	B1	1024	1084	1144	1204
20	6.8	10	2.0	27.2	46.2	4	3	4	B1	0024	0084	0144	0204
35	.33	5	.6	6.0	8.0	4	3	4	A1	1025	1085	1145	1205
35	.33	10	.6	6.0	8.0	4	3	4	A1	0025	0085	0145	0205
35	.39	5	.6	6.0	8.0	4	3	4	A1	1026	1086	1146	1206
35	.39	10	.6	6.0	8.0	4	3	4	A1	0026	0086	0146	0206
35	.47	5	.6	6.0	8.0	4	3	4	A1	1027	1087	1147	1207
35	.47	10	.6	6.0	8.0	4	3	4	A1	0027	0087	0147	0207
35	2.2	5	1.4	15.4	26.2	4	3	4	B1	1028	1088	1148	1208
35	2.2	10	1.4	15.4	26.2	4	3	4	B1	0028	0088	0148	0208
35	2.7	5	1.4	18.9	32.1	4	3	4	B1	1029	1089	1149	1209

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/02

TABLE I. STYLE CSR09 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.


RATED VOLTAGE (+85°C)	CAPACITANCE (NOM)	CAPACITANCE TOLERANCE	DC LEAKAGE AT +25°C	DC LEAKAGE AT +85°C	DC LEAKAGE AT +125°C	DISSPATION FACTOR AT -55°C	DISSPATION FACTOR AT +25°C	DISSPATION FACTOR AT +85°C +125°C	CASE SIZE	DASH NUMBER M39003/02- M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%	+%					
35	2.7	10	1.4	18.9	32.1	4	3	4	Bi	0029	0089	0149	0209
50	.22	5	.6	6.0	8.0	4	3	4	Ai	1030	1090	1150	1210
50	.22	10	.6	6.0	8.0	4	3	4	Ai	0030	0090	0150	0210
50	.27	5	.6	6.0	8.0	4	3	4	Ai	1031	1091	1151	1211
50	.27	10	.6	6.0	8.0	4	3	4	Ai	0031	0091	0151	0211
50	1.5	5	1.4	15.0	25.5	4	3	4	Bi	1032	1092	1152	1212
50	1.5	10	1.4	15.0	25.5	4	3	4	Bi	0032	0092	0152	0212
50	1.8	5	1.4	18.0	30.6	4	3	4	Bi	1033	1093	1153	1213
50	1.8	10	1.4	18.0	30.6	4	3	4	Bi	0033	0093	0153	0213
75	.047	5	.6	6.0	8.0	4	3	4	Ai	1034	1094	1154	1214
75	.047	10	.6	6.0	8.0	4	3	4	Ai	0034	0094	0154	0214
75	.056	5	.6	6.0	8.0	4	3	4	Ai	1035	1095	1155	1215
75	.056	10	.6	6.0	8.0	4	3	4	Ai	0035	0095	0155	0215
75	.068	5	.6	6.0	8.0	4	3	4	Ai	1036	1096	1156	1216
75	.068	10	.6	6.0	8.0	4	3	4	Ai	0036	0096	0156	0216
75	.082	5	.6	6.0	8.0	4	3	4	Ai	1037	1097	1157	1217
75	.082	10	.6	6.0	8.0	4	3	4	Ai	0037	0097	0157	0217
75	.10	5	.6	6.0	8.0	4	3	4	Ai	1038	1098	1158	1218
75	.10	10	.6	6.0	8.0	4	3	4	Ai	0038	0098	0158	0218
75	.12	5	.6	6.0	8.0	4	3	4	Ai	1039	1099	1159	1219
75	.12	10	.6	6.0	8.0	4	3	4	Ai	0039	0099	0159	0219
75	.15	5	.6	6.0	8.0	4	3	4	Ai	1040	1100	1160	1220
75	.15	10	.6	6.0	8.0	4	3	4	Ai	0040	0100	0160	0220
75	.18	5	.6	6.0	8.0	4	3	4	Ai	1041	1101	1161	1221
75	.18	10	.6	6.0	8.0	4	3	4	Ai	0041	0101	0161	0221
75	.22	5	.6	6.0	8.0	4	3	4	Bi	1042	1102	1162	1222
75	.22	10	.6	6.0	8.0	4	3	4	Bi	0042	0102	0162	0222
75	.27	5	.6	6.0	8.0	4	3	4	Bi	1043	1103	1163	1223
75	.27	10	.6	6.0	8.0	4	3	4	Bi	0043	0103	0163	0223
75	.33	5	.6	6.0	8.4	4	3	4	Bi	1044	1104	1164	1224
75	.33	10	.6	6.0	8.4	4	3	4	Bi	0044	0104	0164	0224
75	.39	5	.6	6.0	9.9	4	3	4	Bi	1045	1105	1165	1225
75	.39	10	.6	6.0	9.9	4	3	4	Bi	0045	0105	0165	0225
75	.47	5	.6	7.0	12.0	4	3	4	Bi	1046	1106	1166	1226
75	.47	10	.6	7.0	12.0	4	3	4	Bi	0046	0106	0166	0226
75	.56	5	.6	8.4	14.3	4	3	4	Bi	1047	1107	1167	1227
75	.56	10	.6	8.4	14.3	4	3	4	Bi	0047	0107	0167	0227
75	.68	5	.6	10.2	17.3	4	3	4	Bi	1048	1108	1168	1228
75	.68	10	.6	10.2	17.3	4	3	4	Bi	0048	0108	0168	0228
75	.82	5	.7	12.3	20.9	4	3	4	Bi	1049	1109	1169	1229
75	.82	10	.7	12.3	20.9	4	3	4	Bi	0049	0109	0169	0229
75	1.0	5	.9	15.0	25.5	4	3	4	Bi	1050	1110	1170	1230
75	1.0	10	.9	15.0	25.5	4	3	4	Bi	0050	0110	0170	0230
75	1.2	5	.9	18.0	30.6	4	3	4	Bi	1051	1111	1171	1231
75	1.2	10	.9	18.0	30.6	4	3	4	Bi	0051	0111	0171	0231


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/03

STYLE CSR23

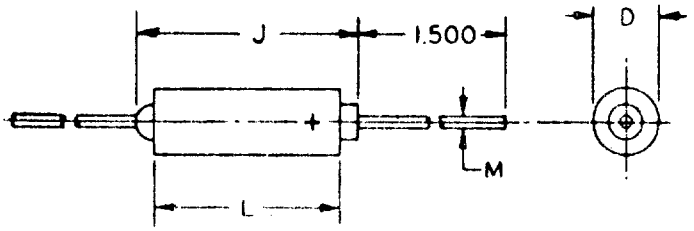



CIRCUIT DIAGRAM

DIMENSIONS				
CASE SIZE	L	D	M	J
A	.286	.135	.020	.422
B	.474	.185	.020	.610
C	.686	.289	.025	.822
D	.786	.351	.025	.922

TABLE I. STYLE CSR23 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/03-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
6	10.0	10	0.9	9.0	11.0	6	6	A	0101	0201	0301	0401
6	10.0	20	0.9	9.0	11.0	6	6	A	0102	0202	0302	0402
6	12.0	10	1.0	10.0	12.5	6	6	A	0103	0203	0303	0403
6	100.0	10	6.0	60.0	75.0	8	8	B	0104	0204	0304	0404
6	100.0	20	6.0	60.0	75.0	8	8	B	0105	0205	0305	0405
6	330.0	10	15.0	150.0	188.0	8	8	C	0106	0206	0306	0406
6	330.0	20	15.0	150.0	188.0	8	8	C	0107	0207	0307	0407
6	390.0	10	15.0	150.0	188.0	10	10	C	0108	0208	0308	0408
6	470.0	10	15.0	150.0	188.0	10	10	C	0109	0209	0309	0409
6	470.0	20	15.0	150.0	188.0	10	10	C	0110	0210	0310	0410
6	680.0	10	20.0	200.0	250.0	10	10	D	0111	0211	0311	0411
6	680.0	20	20.0	200.0	250.0	10	10	D	0112	0212	0312	0412
6	820.0	10	20.0	200.0	250.0	10	10	D	0113	0213	0313	0413
6	1000.0	10	30.0	300.0	375.0	10	10	D	0114	0214	0314	0414

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/03

TABLE I. STYLE CSR23 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/03-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
6	1000.0	20	30.0	300.0	375.0	10	10	D	0115	0215	0315	0415
10	6.8	10	1.0	10.0	12.5	6	6	A	0116	0216	0316	0416
10	6.8	20	1.0	10.0	12.5	6	6	A	0117	0217	0317	0417
10	8.2	10	1.2	12.0	15.0	6	6	A	0118	0218	0318	0418
10	47.0	10	5.0	50.0	63.0	6	6	B	0119	0219	0319	0419
10	47.0	20	5.0	50.0	63.0	6	6	B	0120	0220	0320	0420
10	56.0	10	6.0	60.0	75.0	6	6	B	0121	0221	0321	0421
10	68.0	10	7.0	70.0	88.0	6	6	B	0122	0222	0322	0422
10	68.0	20	7.0	70.0	88.0	6	6	B	0123	0223	0323	0423
10	82.0	10	8.0	80.0	100.0	6	6	B	0124	0224	0324	0424
10	220.0	10	15.0	150.0	188.0	8	8	C	0125	0225	0325	0425
10	220.0	20	15.0	150.0	188.0	8	8	C	0126	0226	0326	0426
10	270.0	10	15.0	150.0	188.0	8	8	C	0127	0227	0317	0427
10	390.0	10	20.0	200.0	250.0	10	10	D	0128	0228	0328	0428
10	470.0	10	20.0	200.0	250.0	10	10	D	0129	0229	0329	0429
10	470.0	20	20.0	200.0	250.0	10	10	D	0130	0230	0330	0430
10	560.0	10	30.0	300.0	375.0	10	10	D	0131	0231	0331	0431
15	4.7	10	1.0	10.0	12.5	4	4	A	0132	0232	0332	0432
15	4.7	20	1.0	10.0	12.5	4	4	A	0133	0233	0333	0433
15	5.6	10	1.3	13.0	16.5	4	4	A	0134	0234	0334	0434
15	33.0	10	6.0	60.0	75.0	6	6	B	0135	0235	0335	0435
15	33.0	20	6.0	60.0	75.0	6	6	B	0136	0236	0336	0436
15	39.0	10	6.0	60.0	75.0	6	6	B	0137	0237	0337	0437
15	150.0	10	15.0	150.0	188.0	8	8	C	0138	0238	0338	0438
15	150.0	20	15.0	150.0	188.0	8	8	C	0139	0239	0339	0439
15	180.0	10	15.0	150.0	188.0	8	8	C	0140	0240	0340	0440
15	220.0	10	20.0	200.0	250.0	8	8	D	0141	0241	0341	0441
15	220.0	20	20.0	200.0	250.0	8	8	D	0142	0242	0342	0442
15	270.0	10	20.0	200.0	250.0	8	8	D	0143	0243	0343	0443
15	330.0	10	20.0	200.0	250.0	8	8	D	0144	0244	0344	0444
15	330.0	20	20.0	200.0	250.0	8	8	D	0145	0245	0345	0445
20	2.7	10	0.8	8.0	10.0	4	4	A	0146	0246	0346	0446
20	3.3	10	1.0	10.0	12.5	4	4	A	0147	0247	0347	0447
20	3.3	20	1.0	10.0	12.5	4	4	A	0148	0248	0348	0448
20	3.9	10	1.2	12.0	15.0	4	4	A	0149	0249	0349	0449
20	18.0	10	4.0	40.0	50.0	6	6	B	0150	0250	0350	0450
20	22.0	10	4.0	40.0	50.0	6	6	B	0151	0251	0351	0451
20	22.0	20	4.0	40.0	50.0	6	6	B	0152	0252	0352	0452
20	27.0	10	5.0	50.0	63.0	6	6	B	0153	0253	0353	0453
20	56.0	10	9.0	90.0	110.0	6	6	C	0154	0254	0354	0454

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/03

TABLE I. STYLE CSR23 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.


RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/03-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
20	68.0	10	10.0	100.0	125.0	6	6	C	0155	0255	0355	0455
20	68.0	20	10.0	100.0	125.0	6	6	C	0156	0256	0356	0456
20	82.0	10	10.0	100.0	125.0	6	6	C	0157	0257	0357	0457
20	100.0	10	15.0	150.0	188.0	6	6	C	0158	0258	0358	0458
20	100.0	20	15.0	150.0	188.0	6	6	C	0159	0259	0359	0459
20	120.0	10	15.0	150.0	188.0	6	6	C	0160	0260	0360	0460
20	150.0	10	20.0	200.0	250.0	8	8	D	0161	0261	0361	0461
20	150.0	20	20.0	200.0	250.0	8	8	D	0162	0262	0362	0462
20	180.0	10	20.0	200.0	250.0	8	8	D	0163	0263	0363	0463
35	1.8	10	1.0	10.0	12.5	4	4	A	0164	0264	0364	0464
35	8.2	10	3.5	35.0	44.0	6	6	B	0165	0265	0365	0465
35	10.0	10	4.0	40.0	50.0	6	6	B	0166	0266	0366	0466
35	10.0	20	4.0	40.0	50.0	6	6	B	0167	0267	0367	0467
35	33.0	10	10.0	100.0	125.0	6	6	C	0168	0268	0368	0468
35	33.0	20	10.0	100.0	125.0	6	6	C	0169	0269	0369	0469
35	39.0	10	10.0	100.0	125.0	6	6	C	0170	0270	0370	0470
35	47.0	10	10.0	100.0	125.0	6	6	C	0171	0271	0371	0471
35	47.0	20	10.0	100.0	125.0	6	6	C	0172	0272	0372	0472
35	56.0	10	15.0	150.0	188.0	6	6	D	0173	0273	0373	0473
35	68.0	10	15.0	150.0	188.0	6	6	D	0174	0274	0374	0474
35	68.0	20	15.0	150.0	188.0	6	6	D	0175	0275	0375	0475
50	1.2	10	0.9	9.0	11.0	4	4	A	0176	0276	0376	0476
50	1.5	10	1.2	12.0	15.0	4	4	A	0177	0277	0377	0477
50	1.5	20	1.2	12.0	15.0	4	4	A	0178	0278	0378	0478
50	5.6	10	4.5	45.0	56.0	4	4	B	0179	0279	0379	0479
50	6.8	10	4.5	45.0	56.0	6	6	B	0180	0280	0380	0480
50	6.8	20	4.5	45.0	56.0	6	6	B	0181	0281	0381	0481
50	22.0	10	10.0	100.0	125.0	6	6	C	0182	0282	0382	0482
50	22.0	20	10.0	100.0	125.0	6	6	C	0183	0283	0383	0483
50	27.0	10	10.0	100.0	125.0	6	6	C	0184	0284	0384	0484
50	33.0	10	10.0	100.0	125.0	6	6	D	0185	0285	0385	0485
50	33.0	20	10.0	100.0	125.0	6	6	D	0186	0286	0386	0486
50	39.0	10	10.0	100.0	125.0	6	6	D	0187	0287	0387	0487

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECYROLYTE), TANTALUM

MIL-C-39003/04

STYLE CSR91

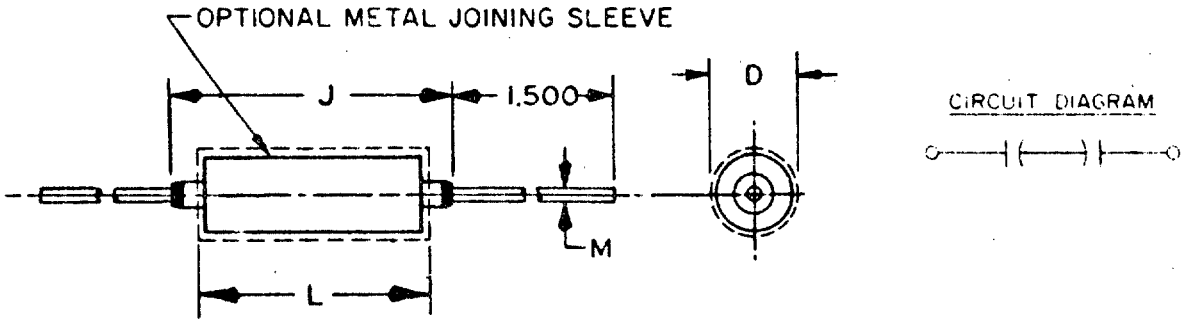

DIMENSIONS				
CASE SIZE	L	D	M	J
W	.575	.161	.020	.750
X	.955	.207	.020	1.130
Y	1.350	.314	.025	1.525
Z	1.550	.376	.025	1.725

TABLE I. STYLE CSR91 CHARACTERISTICS AND DASH NUMBER(NONPOLARIZED, SINTERED SLUG).

RATED VOLTAGE	CAPACITANCE (NOM)	CAPACITANCE TOLERANCE	DC LEAKAGE (MAX)	DISSIPATION FACTOR (MAX)	CASE SIZE	DASH NUMBER M39003/04-			
V dc	uF	±%	uA	%		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
6	2.8	10	.3	4	W	0221	0441	0661	0881
6	3.4	10	.3	6	W	0222	0442	0662	0882
6	3.4	20	.3	6	W	0223	0443	0663	0883
6	23.0	10	1.5	6	X	0224	0444	0664	0884
6	23.0	20	1.5	6	X	0225	0445	0665	0885
6	28.0	10	1.5	6	X	0226	0446	0666	0886
6	75.0	10	4.5	8	Y	0227	0447	0667	0887
6	75.0	20	4.5	8	Y	0228	0448	0668	0888
6	90.0	10	5.5	8	Y	0229	0449	0669	0889
6	130.0	10	6.5	8	Z	0231	0451	0671	0891
6	160.0	10	7.5	8	Z	0233	0453	0673	0893
6	160.0	20	7.5	8	Z	0234	0454	0674	0894
10	1.9	10	.3	4	W	0235	0455	0675	0895
10	2.3	10	.4	4	W	0236	0456	0676	0896
10	2.3	20	.4	4	W	0237	0457	0677	0897

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECYROLYTE), TANTALUM

MIL-C-39003/04

TABLE I. STYLE CSR91 CHARACTERISTICS AND DASH NUMBER(NONPOLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE	CAPACITANCE (NOM)	CAPACITANCE TOLERANCE	DC LEAKAGE (MAX)	DISSIPATION FACTOR (MAX)	CASE SIZE	DASH NUMBER M39003/04-			
V dc	uF	±%	uA	%		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
10	13.0	10	2.0	6	X	0238	0458	0678	0898
10	16.0	10	2.5	6	X	0239	0459	0679	0899
10	16.0	20	2.5	6	X	0240	0460	0680	0900
10	19.0	10	2.5	6	X	0241	0461	0681	0901
10	41.0	10	4.0	6	Y	0242	0462	0682	0902
10	50.0	10	5.0	8	Y	0243	0463	0683	0903
10	50.0	20	5.0	8	Y	0244	0464	0684	0904
10	60.0	10	6.0	8	Y	0245	0465	0685	0905
10	90.0	10	9.0	8	Z	0247	0467	0687	0907
10	110.0	10	10.0	8	Z	0248	0468	0688	0908
10	110.0	20	10.0	8	Z	0249	0469	0689	0909
15	1.3	10	.3	4	W	0250	0470	0690	0910
15	1.6	10	.4	4	W	0251	0471	0691	0911
15	1.6	20	.4	4	W	0252	0472	0692	0912
15	9.0	10	2.0	6	X	0253	0473	0693	0913
15	11.0	10	2.0	6	X	0254	0474	0694	0914
15	11.0	20	2.0	6	X	0255	0475	0695	0915
15	28.0	10	4.0	6	Y	0256	0476	0696	0916
15	34.0	10	5.0	6	Y	0257	0477	0697	0917
15	34.0	20	5.0	6	Y	0258	0478	0698	0918
15	60.0	10	9.0	8	Z	0259	0479	0699	0919
15	75.0	10	10.0	8	Z	0260	0480	0700	0920
15	75.0	20	10.0	8	Z	0261	0481	0701	0921
20	.6	10	.3	4	W	0262	0482	0702	0922
20	.75	10	.3	4	W	0263	0483	0703	0923
20	.75	20	.3	4	W	0264	0484	0704	0924
20	.9	10	.3	4	W	0265	0485	0705	0925
20	1.1	10	.4	4	W	0266	0486	0706	0926
20	1.1	20	.4	4	W	0267	0487	0707	0927
20	4.1	10	1.0	6	X	0268	0488	0708	0928
20	5.0	10	1.5	6	X	0269	0489	0709	0929
20	5.0	20	1.5	6	X	9270	0490	0710	0930
20	6.0	10	1.8	6	X	0271	0491	0711	0931
20	7.5	10	2.0	6	X	0272	0492	0712	0932
20	7.5	20	2.0	6	X	0273	0493	0713	0933
20	13.0	10	2.5	6	Y	0274	0494	0714	0934
20	16.0	10	3.5	6	Y	0275	0495	0715	0935
20	16.0	20	3.5	6	Y	0276	0496	0716	0936
20	19.0	10	4.0	6	Y	0277	0497	0717	0937
20	23.0	10	4.5	6	Y	0278	0498	0718	0938
20	23.0	20	4.5	6	Y	0279	0499	0719	0939
20	28.0	10	5.5	6	Z	0280	0500	0720	0940
20	34.0	10	7.0	6	Z	0281	0501	0721	0941

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECYROLYTE), TANTALUM

MIL-C-39003/04

TABLE I. STYLE CSR91 CHARACTERISTICS AND DASH NUMBER(NONPOLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE	CAPACITANCE (NOM)	CAPACITANCE TOLERANCE	DC LEAKAGE (MAX)	DISSIPATION FACTOR (MAX)	CASE SIZE	DASH NUMBER M39003/04-			
V dc	uF	±%	uA	%		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
20	34.0	20	7.0	6	Z	0282	0502	0722	0942
20	41.0	10	8.0	6	Z	0283	0503	0723	0943
20	50.0	10	10.0	8	Z	0284	0504	0724	0924
20	50.0	20	10.0	8	Z	0285	0505	0725	0925
35	2.8	10	1.3	4	X	0289	0509	0729	0949
35	3.4	10	1.5	6	X	0290	0510	0730	0950
35	3.4	20	1.5	6	X	0291	0511	0731	0951
35	11.0	10	4.0	6	Y	0292	0512	0732	0952
35	11.0	20	4.0	6	Y	0293	0513	0733	0953
35	13.0	10	4.5	6	Z	0294	0514	0734	0954
35	16.0	10	5.5	6	Z	0295	0515	0735	0955
35	16.0	20	5.5	6	Z	0296	0516	0736	0956
35	19.0	10	7.0	6	Z	0297	0517	0737	0957
35	23.0	10	8.0	6	Z	0298	0518	0738	0958
35	23.0	20	8.0	6	Z	0299	0519	0739	0959
50	.0023	10	.3	2	W	1171	1241	1311	1381
50	.0023	20	.3	2	W	1172	1242	1312	1382
50	.0028	10	.3	2	W	1173	1243	1313	1383
50	.0034	10	.3	2	W	1174	1244	1314	1384
50	.0034	20	.3	2	W	1175	1245	1315	1385
50	.0041	10	.3	2	W	1176	1246	1316	1386
50	.005	10	.3	2	W	1177	1247	1317	1387
50	.005	20	.3	2	W	1178	1248	1318	1388
50	.006	10	.3	2	W	1179	1249	1319	1389
50	.0075	10	.3	2	W	1180	1250	1320	1390
50	.0075	20	.3	2	W	1181	1251	1321	1891
50	.009	10	.3	2	W	1182	1252	1322	1892
50	.011	10	.3	2	W	1183	1253	1323	1393
50	.011	20	.3	2	W	1184	1254	1324	1394
50	.013	10	.3	2	W	1185	1255	1325	1395
50	.013	10	.3	2	W	1186	1256	1326	1396
50	.016	20	.3	2	W	1187	1257	1327	1397
50	.019	10	.3	2	W	1188	1258	1328	1398
50	.023	10	.3	2	W	1189	1259	1329	1399
50	.023	20	.3	2	W	1190	1260	1330	1400
50	.028	10	.3	2	W	1191	1261	1331	1401
50	.034	10	.3	2	W	1192	1262	1332	1402
50	.034	20	.3	2	W	1193	1263	1333	1403
50	.041	10	.3	2	W	1194	1264	1334	1404
50	.05	10	.3	2	W	1195	1265	1335	1405
50	.05	20	.3	2	W	1196	1266	1336	1406
50	.06	10	.3	2	W	1197	1267	1337	1407
50	.075	10	.3	2	W	1198	1268	1338	1408

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECYROLYTE), TANTALUM

MIL-C-39003/04

TABLE I. STYLE CSR91 CHARACTERISTICS AND DASH NUMBER(NONPOLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE	CAPACITANCE (NOM)	CAPACITANCE TOLERANCE	DC LEAKAGE (MAX)	DISSIPATION FACTOR (MAX)	CASE SIZE	DASH NUMBER M39003/04-			
V dc	uF	±%	uA	%		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
50	.075	20	.3	2	W	1199	1269	1339	1409
50	.09	10	.3	2	W	1200	1270	1340	1410
50	.11	10	.3	2	W	1201	1271	1341	1411
50	.11	20	.3	2	W	1202	1272	1342	1412
50	.13	10	.3	2	W	1203	1273	1343	1413
50	.16	10	.3	2	W	1204	1274	1344	1414
50	.16	20	.3	2	W	1205	1275	1345	1415
50	.19	10	.3	2	W	1206	1276	1346	1416
50	.23	10	.3	2	W	1207	1277	1347	1417
50	.23	20	.3	2	W	1208	1278	1348	1418
50	.28	10	.3	2	W	1209	1279	1349	1419
50	.34	10	.3	2	W	1210	1280	1350	1420
50	.34	20	.3	2	W	1211	1281	1351	1421
50	.41	10	.3	2	W	0300	0520	0740	0960
50	.50	10	.4	2	W	0301	0521	0741	0961
50	.50	20	.4	2	W	0302	0522	0742	0962
50	.60	10	.4	4	X	1212	1282	1352	1422
50	.75	10	.6	4	X	2001	2101	2201	2301
50	.75	20	.6	4	X	2002	2102	2202	2302
50	.90	10	.7	4	X	1215	1285	1355	1425
50	1.1	10	.8	4	X	1216	1286	1356	1426
50	1.1	20	.8	4	X	1217	1287	1357	1427
50	1.3	10	1.0	4	X	1218	1288	1358	1428
50	1.6	10	1.2	4	X	1219	1289	1359	1429
50	1.6	20	1.2	4	X	1220	1290	1360	1430
50	1.9	10	1.5	4	X	1221	1291	1361	1431
50	2.3	10	1.7	4	X	1222	1292	1362	1432
50	2.3	20	1.7	4	X	1223	1293	1363	1333
50	2.8	10	2.2	4	Y	1224	1294	1364	1434
50	3.4	10	2.2	6	Y	1225	1295	1365	1435
50	3.4	20	2.2	6	Y	1226	1296	1366	1436
50	4.1	10	2.5	6	Y	1227	1297	1367	1437
50	5.0	10	2.5	6	Y	1228	1298	1368	1438
50	5.0	20	2.5	6	Y	1229	1299	1369	1439
50	6.0	10	3.0	6	Y	0303	0523	0743	0963
50	7.5	10	4.0	6	Y	0304	0524	0744	0964
50	7.5	20	4.0	6	Y	0305	0525	0745	0965
50	9.0	10	4.5	6	Y	0306	0526	0746	0966
50	11.0	10	5.5	6	Z	0307	0527	0747	0967
50	11.0	20	5.5	6	Z	0308	0528	0748	0968
75	.34	10	.3	2	W	0309	0529	0749	0969
75	.34	20	.3	2	W	0310	0530	0750	0970
75	.41	10	.3	2	X	2008	2108	2208	2308

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECYROLYTE), TANTALUM

MIL-C-39003/04

TABLE I. STYLE CSR91 CHARACTERISTICS AND DASH NUMBER(NONPOLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE	CAPACITANCE (NOM)	CAPACITANCE TOLERANCE	DC LEAKAGE (MAX)	DISSIPATION FACTOR (MAX)	CASE SIZE	DASH NUMBER M39003/04-			
V dc	uF	±%	uA	%		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
75	.50	10	.4	2	X	2009	2109	2209	2309
75	.50	20	.4	2	X	2010	2110	2210	2310
75	.60	10	.4	4	X	2011	2111	2211	2311
75	.75	10	.6	4	X	2012	2112	2212	2312
75	.75	20	.6	4	X	2013	2113	2213	2313
75	.90	10	.7	4	X	2014	2114	2214	2314
75	1.1	10	.8	4	X	2015	2115	2215	2315
75	1.1	20	.8	4	X	2016	2116	2216	2316
75	1.3	10	1.0	4	X	2017	2117	2217	2317
75	1.6	10	1.2	4	X	0311	0531	0751	0971
75	1.6	20	1.2	4	X	0312	0532	0752	0972
75	1.9	10	1.5	4	X	0313	0533	0753	0973
75	2.3	10	3.0	4	Y	2003	2103	2203	2303
75	2.3	20	3.0	4	Y	2004	2104	2204	2304
75	2.8	10	3.0	6	Y	2005	2105	2205	2305
75	3.4	10	5.0	6	Y	2006	2106	2206	2306
75	3.4	20	5.0	6	Y	2007	2107	2207	2307
75	4.1	10	5.0	6	Y	0314	0534	0754	0974
75	5.0	10	5.0	6	Y	0315	0535	0755	0975
75	5.0	20	5.0	6	Y	0316	0536	0756	0976
75	6.0	10	5.0	6	Z	0317	0537	0757	0977
75	7.5	10	7.0	6	Z	0318	0538	0758	0978
75	7.5	20	7.0	6	Z	0319	0539	0759	0979
100	.0023	10	.3	2	W	0320	0540	0760	0980
100	.0023	20	.3	2	W	0321	0541	0761	0981
100	.0028	10	.3	2	W	0322	0542	0762	0982
100	.0034	10	.3	2	W	0323	0543	0763	0983
100	.0034	20	.3	2	W	0324	0544	0764	0984
100	.0041	10	.3	2	W	0325	0545	0765	0985
100	.005	10	.3	2	W	0326	0546	0766	0986
100	.005	20	.3	2	W	0327	0547	0767	0987
100	.006	20	.3	2	W	0328	0548	0768	0988
100	.0075	10	.3	2	W	0329	0549	0769	0989
100	.0075	20	.3	2	W	0330	0550	0770	0990
100	.009	10	.3	2	W	0331	0551	0771	0991
100	.011	10	.3	2	W	0332	0552	0772	0992
100	.011	20	.3	2	W	0333	0553	0773	0993
100	.013	10	.3	2	W	0334	0554	0774	0994
100	.016	10	.3	2	W	0335	0555	0775	0995
100	.016	20	.3	2	W	0336	0556	0776	0996
100	.019	10	.3	2	W	0337	0557	0777	0997
100	.023	10	.3	2	W	0338	0558	0778	0998
100	.023	20	.3	2	W	0339	0559	0779	0999

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECYROLYTE), TANTALUM

MIL-C-39003/04

TABLE I. STYLE CSR91 CHARACTERISTICS AND DASH NUMBER(NONPOLARIZED, SINTERED SLUG)CONT.


RATED VOLTAGE	CAPACITANCE (NOM)	CAPACITANCE TOLERANCE	DC LEAKAGE (MAX)	DISSIPATION FACTOR (MAX)	CASE SIZE	DASH NUMBER M39003/04-			
V dc	uF	±%	uA	%		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
100	.028	10	.3	2	W	0340	0560	0780	1000
100	.034	10	.3	2	W	0341	0561	0781	1001
100	.034	20	.3	2	W	0342	0562	0782	1002
100	.041	10	.3	2	W	0343	0563	0783	1003
100	.05	10	.3	2	W	0344	0564	0784	1004
100	.05	20	.3	2	W	0345	0565	0785	1005
100	.06	10	.3	2	W	0346	0566	0786	1006
100	.075	10	.3	2	W	0347	0567	0787	1007
100	.075	20	.3	2	W	0348	0568	0788	1008
100	.09	10	.3	2	W	0349	0569	0789	1009
100	.11	10	.3	2	W	0350	0570	0790	1010
100	.11	20	.3	2	W	0351	0571	0791	1011
100	.13	10	.3	2	W	0352	0572	0792	1012
100	.16	10	.3	2	W	0353	0573	0793	1013
100	.16	20	.3	2	W	0354	0574	0794	1014
100	.19	10	.3	2	W	0355	0575	0795	1015
100	.23	10	.3	2	W	0356	0576	0796	1016
100	.23	20	.3	2	W	0357	0577	0797	1017
100	.28	10	.3	2	W	0358	0578	0798	1018
100	.34	10	.3	2	X	0359	0579	0799	1019
100	.34	20	.3	2	X	0360	0580	0800	1020
100	.41	10	.4	2	X	0361	0581	0801	1021
100	.50	10	.5	2	X	0362	0582	0802	1022
100	.50	20	.5	2	X	0363	0583	0803	1023
100	.60	10	.5	4	X	0364	0584	0804	1024
100	.75	10	.7	4	X	0365	0585	0805	1025
100	.75	20	.7	4	X	0366	0586	0806	1026
100	.90	10	.7	4	X	0367	0587	0807	1027
100	1.1	10	.9	4	X	0368	0588	0808	1028
100	1.1	20	.9	4	X	0369	0589	0809	1029
100	1.3	10	1.1	4	X	0370	0590	0810	1030

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/06

STYLE CSR33

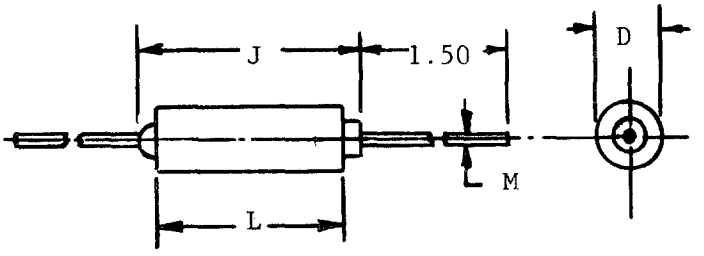

CASE SIZE	DIMENSIONS			
	L	D	M	J
A	.286	.135	.020	.422
B	.474	.185	.020	.610
C	.686	.289	.025	.822
D	.786	.351	.025	.922



CIRCUIT DIAGRAM

TABLE I. STYLE CSR33 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG).

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSIPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/06-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	±%					
6	10.0	10	.5	2.0	2.0	6	6	A	0001	0101	0201	0301
6	10.0	20	.5	2.0	2.0	6	6	A	0002	0102	0202	0302
6	12.0	10	.5	2.0	2.0	6	6	A	0003	0103	0203	0303
6	100.0	10	1.0	3.0	3.0	8	8	B	0004	0104	0204	0304
6	100.0	20	1.0	3.0	3.0	8	8	B	0005	0105	0205	0305
6	330.0	10	2.0	8.0	8.0	8	8	C	0006	0106	0206	0306
6	330.0	20	2.0	8.0	8.0	8	8	C	0007	0107	0207	0307
6	390.0	10	2.0	8.0	8.0	10	10	C	0008	0108	0208	0308
6	470.0	10	2.0	8.0	8.0	10	10	C	0009	0109	0209	0309
6	470.0	20	2.0	8.0	8.0	10	10	C	0010	0110	0210	0310
6	680.0	10	5.0	10.0	10.0	10	10	D	0011	0111	0211	0311
6	680.0	20	5.0	10.0	10.0	10	10	D	0012	0112	0212	0312
6	820.0	10	5.0	10.0	10.0	10	10	D	0013	0113	0213	0313
6	1000.0	10	5.0	10.0	10.0	10	10	D	0014	0114	0214	0314
6	1000.0	20	5.0	10.0	10.0	10	10	D	0015	0115	0215	0315
10	6.8	10	.5	2.0	2.0	6	6	A	0016	0116	0216	0316
10	6.8	20	.5	2.0	2.0	6	6	A	0017	0117	0217	0317
10	8.2	10	.5	2.0	2.0	6	6	A	0018	0118	0218	0318
10	47.0	10	1.0	2.0	2.0	6	6	B	0019	0119	0219	0319
10	47.0	20	1.0	2.0	2.0	6	6	B	0020	0120	0220	0320
10	56.0	10	1.0	4.0	4.0	6	6	B	0021	0121	0221	0321
10	68.0	10	1.0	4.0	4.0	6	6	B	0022	0122	0222	0322
10	68.0	20	1.0	4.0	4.0	6	6	B	0023	0123	0223	0323
10	82.0	10	1.0	4.0	4.0	6	6	B	0024	0124	0224	0324
10	220.0	10	1.0	7.0	7.0	8	8	C	0025	0125	0225	0325

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/06

STYLE CSR33

TABLE I. STYLE CSR33 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/06-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
10	220.0	20	1.0	7.0	7.0	8	8	C	0026	0126	0226	0326
10	270.0	10	2.0	10.0	10.0	8	8	C	0027	0127	0227	0327
10	390.0	10	2.0	16.0	16.0	10	10	D	0028	0128	0228	0328
10	470.0	10	4.0	16.0	16.0	10	10	D	0029	0129	0229	0329
10	470.0	20	4.0	16.0	16.0	10	10	D	0030	0130	0230	0330
10	560.0	10	4.0	16.0	16.0	10	10	D	0031	0131	0231	0331
15	4.7	10	.5	2.0	2.0	4	4	A	0032	0132	0232	0332
15	4.7	20	.5	2.0	2.0	4	4	A	0033	0133	0233	0333
15	5.6	10	.5	2.0	2.0	4	4	A	0034	0134	0234	0334
15	33.0	10	1.0	2.0	2.0	6	6	B	0035	0135	0235	0335
15	33.0	20	1.0	2.0	2.0	6	6	B	0036	0136	0236	0336
15	39.0	10	1.0	2.0	2.0	6	6	B	0037	0137	0237	0337
15	150.0	10	1.0	7.0	7.0	8	8	C	0038	0138	0238	0338
15	150.0	20	1.0	7.0	7.0	8	8	C	0039	0139	0239	0339
15	180.0	10	2.0	10.0	10.0	8	8	C	0040	0140	0240	0340
15	220.0	10	2.0	10.0	10.0	8	8	D	0041	0141	0241	0341
15	220.0	20	2.0	10.0	10.0	8	8	D	0042	0142	0242	0342
15	270.0	10	2.0	16.0	16.0	8	8	D	0043	0143	0243	0343
15	330.0	10	2.0	16.0	16.0	8	8	D	0044	0144	0244	0344
15	330.0	20	2.0	16.0	16.0	8	8	D	0045	0145	0245	0345
20	2.7	10	.5	2.0	2.0	4	4	A	0046	0146	0246	0346
20	3.3	10	.5	2.0	2.0	4	4	A	0047	0147	0247	0347
20	3.3	20	.5	2.0	2.0	4	4	A	0048	0148	0248	0348
20	3.9	10	.5	2.0	2.0	4	4	A	0049	0149	0249	0349
20	18.0	10	1.0	2.0	2.0	6	6	B	0050	0150	0250	0350
20	22.0	10	1.0	2.0	2.0	6	6	B	0051	0151	0251	0351
20	22.0	20	1.0	2.0	2.0	6	6	B	0052	0152	0252	0352
20	27.0	10	1.0	2.0	2.0	6	6	B	0053	0153	0253	0353
20	56.0	10	1.0	10.0	10.0	6	6	C	0054	0154	0254	0354
20	68.0	10	1.0	10.0	10.0	6	6	C	0055	0155	0255	0355
20	68.0	20	1.0	10.0	10.0	6	6	C	0056	0156	0256	0356
20	82.0	10	1.0	10.0	10.0	6	6	C	0057	0157	0257	0357
20	100.0	10	1.0	10.0	10.0	6	6	C	0058	0158	0258	0358
20	100.0	20	1.0	10.0	10.0	6	6	C	0059	0159	0259	0359
20	120.0	10	1.0	10.0	10.0	6	6	C	0060	0160	0260	0360
20	150.0	10	2.0	10.0	10.0	8	8	D	0061	0161	0261	0361
20	150.0	20	2.0	10.0	10.0	8	8	D	0062	0162	0262	0362
20	180.0	10	2.0	10.0	10.0	8	8	D	0063	0163	0263	0363

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC(SOLID ELECTROLYTE), TANTALUM

MIL-C-39003/06

STYLE CSR33

TABLE I. STYLE CSR33 CHARACTERISTICS AND DASH NUMBERS(POLARIZED, SINTERED SLUG)CONT.

RATED VOLTAGE (+85°C)	CAPACITANCE	CAPACITANCE TOLERANCE	DC LEAKAGE AT			DISSPATION FACTOR AT		CASE SIZE	DASH NUMBER M39003/06-			
			+25°C	+85°C	+125°C	-55°C +25°C	+85°C +125°C		M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
V dc	uF	±%	uA	uA	uA	+%	+%					
35	1.8	10	.5	2.0	2.0	4	4	A	0064	0164	0264	0364
35	8.2	10	1.0	2.0	2.0	6	6	B	0065	0165	0265	0365
35	10.0	10	1.0	2.0	2.0	6	6	B	0066	0166	0266	0366
35	10.0	20	1.0	2.0	2.0	6	6	B	0067	0167	0267	0367
35	33.0	10	1.0	5.0	5.0	6	6	C	0068	0168	0268	0368
35	33.0	20	1.0	5.0	5.0	6	6	C	0069	0169	0269	0369
35	39.0	10	1.0	5.0	5.0	6	6	C	0070	0170	0270	0370
35	47.0	10	1.0	5.0	5.0	6	6	C	0071	0171	0271	0371
35	47.0	20	1.0	5.0	5.0	6	6	C	0072	0172	0272	0372
35	56.0	10	2.0	10.0	10.0	6	6	D	0073	0173	0273	0373
35	68.0	10	2.0	10.0	10.0	6	6	D	0074	0174	0274	0374
35	68.0	20	2.0	10.0	10.0	6	6	D	0075	0175	0275	0375
50	1.2	10	.5	2.0	2.0	4	4	A	0076	0176	0276	0376
50	1.5	10	.5	2.0	2.0	4	4	A	0077	0177	0277	0377
50	1.5	20	.5	2.0	2.0	4	4	A	0078	0178	0278	0378
50	5.6	10	1.0	2.0	2.0	4	4	B	0079	0179	0279	0379
50	6.8	10	1.0	2.0	2.0	6	6	B	0080	0180	0280	0380
50	6.8	20	1.0	2.0	2.0	6	6	B	0081	0181	0281	0381
50	22.0	10	1.0	5.0	5.0	6	6	C	0082	0182	0282	0382
50	22.0	20	1.0	5.0	5.0	6	6	C	0083	0183	0283	0383
50	27.0	10	1.0	5.0	5.0	6	6	C	0084	0184	0284	0384
50	33.0	10	1.0	9.0	9.0	6	6	D	0085	0185	0285	0385
50	33.0	20	1.0	9.0	9.0	6	6	D	0086	0186	0286	0386
50	39.0	10	1.0	9.0	9.0	6	6	D	0087	0187	0287	0387

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC


MIL-C-11015

SCOPE: FIXED INSULATED, GENERAL PURPOSE CERAMIC CAPACITORS, PER MIL-C-11015 ARE SUITABLE FOR GENERAL USAGE IN APPLICATIONS WHICH CAN TOLERATE APPRECIABLE VARIATIONS IN CAPACTANCE WITH RESPECT TO TEMPERATURE, VOLTAGE, FREQUENCY AND LIFE.

TEMP RANGE: A= -55° C TO +85° C
B= -55° C TO +125° C
C= -55° C TO +150° C

SHOCK: 50 G, (MIL-STD-202 - METHOD 205) EXCEPT STYLES CK21, CK22, CK26 AND CK27

VIBRATION: 15 G, (MIL-STD-202 CONDITION B, METHOD 204) STYLES CK21, CK22, CK26 AND CK27
20 G, (MIL-STD-202, METHOD 204) ALL OTHER STYLES

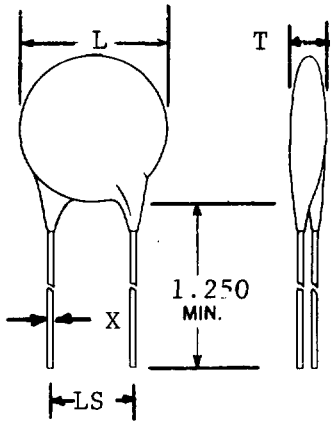

STYLE	DIMENSIONS			
	L	T	X	LS
CK60	.280	.120	.025	.250
CK62	.550	.120	.025	.375
CK63	.660	.120	.032	.375
CK65	.790	.167	.032	.375
CK66	.890	.167	.032	.375
CK67	.950	.167	.032	.375

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-11015

TYPE DESIGNATION.

CK65	BX	100	K	E
STYLE	RATED TEMPERATURE AND VOLTAGE-TEMPERATURE LIMITS (SEE TABLE I AND II)	CAPACITANCE	CAPACITANCE TOLERANCE K= ± 10% M= ± 20%	EPOXY COATED
			*	*

* COMPLETE TYPE DESIGNATION REQUIRES ADDITIONAL SYMBOLS CAPACITANCE TOLERANCE AND EPOXY COATED.

TABLE I. RATED TEMPERATURE

SYMBOL	TEMPERATURE (RANGE) °C
A	-55 TO +85
B	-55 TO +125
C	-55 TO +150

TABLE II. VOLTAGE-TEMPERATURE LIMITS

SYMBOL	CAPACITANCE CHANGE/REF. TO 25 C		RATED TEMPERATURE SYMBOL
	WITHOUT VOLTS (%)	WITH VOLTS (%)	
W	+22, -56	+22, -66	B
X	+15, -15	+15, -25	A
Y	+30, -70	+30, -80	A,B
Z	+20, -20	+20, -30	A

MIL-C-11015/09

TABLE III. STYLE CK60 CHARACTERISTICS.

TYPE DESIGNATION	RATED VOLTAGE VOLTS dc	RATED TEMPERATURE AND VOLTAGE-TEMPERATURE LIMITS	CAPACITANCE pF	CAPACITANCE TOLERANCE
CK60BX2R2K-	1000	BX	2.2	K
CK60BX3R3K-	1000	BX	3.3	K
CK60BX4R7K-	1000	BX	4.7	K
CK60BX6R8K-	1000	BX	6.8	K
CK60BX100K-	1000	BX	10.0	K
CK60BX150K-	1000	BX	15.0	K
CK60BX220K-	1000	BX	22.0	K
CK60BX330--	1000	BX	33.0	K,M
CK60BX470--	1000	BX	47.0	K,M
CK60BX680--	1000	BX	68.0	K,M
CK60BX101--	1000	BX	100.0	K,M
CK60BX151--	500	BX	150.0	K,M
CK60AX221--	1000	AX	220.0	K,M
CK60AX331--	500	AX	330.0	K,M
CK60AX471--	500	AX	470.0	K,M
CK60AW471M-	1000	AW	470.0	M
CK60AW681M-	1000	AW	680.0	M
CK60AW102M-	1000	AW	1000.0	M
CK60AW152M-	500	AW	1500.0	M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-11015/11

TABLE III. STYLE CK62 CHARACTERISTICS.

TYPE DESIGNATION	RATED VOLTAGE	RATED TEMPERATURE AND VOLTAGE-TEMPERATURE LIMITS	CAPACITANCE	CAPACITANCE TOLERANCE
	VOLTS dc		pF	
CK62AY220M-	1500	AY	22	M
CK62AY470M-	1500	AY	47	M
CK62AY101M-	1500	AY	100	M
CK62AY221M-	1500	AY	220	M
CK62AY471M-	1500	AY	470	M
CK62BX821K-	500	BX	820	K
CK62BX102--	500	BX	1000	K,M
CK62BX152--	500	BX	1500	K,M
CK62AX222--	500	AX	2200	K,M
CK62AW332M-	500	AW	3300	M
CK62AW472M-	500	AW	4700	M
CK62AW682M-	500	AW	6800	M

MIL-C-11015/12

TABLE III. STYLE CK63 CHARACTERISTICS.

TYPE DESIGNATION	RATED VOLTAGE	RATED TEMPERATURE AND VOLTAGE-TEMPERATURE LIMITS	CAPACITANCE	CAPACITANCE TOLERANCE
	VOLTS dc		pF	
CK63CZ681--	500	CZ	680	K,M
CK63CZ821K-	500	CZ	820	K
CK63CZ102--	500	CZ	1000	K,M
CK63CZ152--	500	CZ	1500	K,M
CK63CZ222--	500	CZ	2200	K,M
CK63BX222--	500	BX	2200	K,M
CK63CZ332--	500	CZ	3300	K,M
CK63BX332--	500	BX	3300	K,M
CK63AW472M-	1000	AW	4700	M
CK63AY103M-	1000	AY	10000	M
CK63AW103M-	500	AW	10000	M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-11015/21

TABLE III. STYLES CK65, CK66 AND CK67 CHARACTERISTICS.

TYPE DESIGNATION	RATED VOLTAGE	RATED TEMPERATURE AND VOLTAGE-TEMPERATURE LIMITS	CAPACITANCE	CAPACITANCE TOLERANCE
	VOLTS dc		pF	
CK65AW472M-	1600	AW	4700	M
CK66AW562M-	1600	AW	5600	M
CK67AW682M-	1600	AW	6800	M
CK67AW752M-	1600	AW	7500	M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014

SCOPE: FIXED, INSULATED, GENERAL PURPOSE, CERAMIC DIELECTRIC CAPACITORS, PER MIL-C-39014 ARE SUITABLE FOR GENERAL USAGE IN APPLICATIONS WHICH CAN TOLERATE APPRECIABLE VARIATIONS IN CAPACITANCE WITH RESPECT TO TEMPERATURE, VOLTAGE, FREQUENCY AND LIFE.

TEMP RANGE: -55°C TO +85°C(STYLES CKR72, 75, 76, 82, 83)
-55°C TO +125°C(STYLES CKR04, 05, 06, 11, 12, 14, 15, 16, 17, 18 AND 20)

SHOCK: 100 G, SAWTOOTH (MIL-STD-202,METHOD 213)

VIBRATION: 20 G, 10-2000 Hz (MIL-STD-202, METHOD 204)


PART NUMBER EXAMPLE: M39014 /07 -XXXX

- M39014 — GENERAL SPECIFICATION
- /07 — DETAIL SPECIFICATION
- -XXXX — DASH NUMBER (SEE TABLE I)

VOLTAGE-TEMPERATURE LIMITS		
STYLE	CAPACITANCE CHANGE WITH REFERENCE TO +25°C	
	WITHOUT VOLTS	WITH VOLTS
CKR04, 05, 06 & 72	+ 15 %	+ 15, -25 %
CKR75, 76, 82 & 83	+ 15 %	+ 15, -25 % <1000 pF
	+ 22, -56 %	+ 22, -66 % >1000 pF

MIL-C-39014/01

CKR05

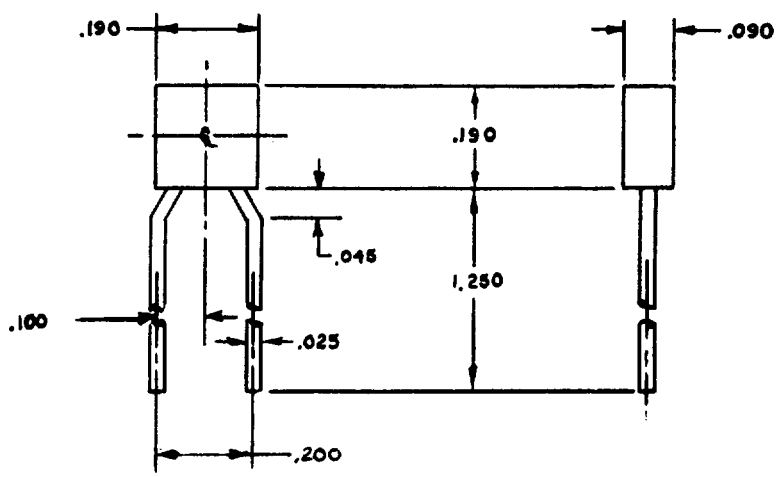

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/01

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/01-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
pF	± PERCENT	VOLTS				
10	10	200	1201	1241	1281	1321
10	20	200	1202	1242	1282	1322
12	10	200	1203	1243	1283	1323
15	10	200	1204	1244	1284	1324
15	20	200	1205	1245	1285	1325
18	10	200	1206	1246	1286	1326
22	10	200	1207	1247	1287	1327
22	20	200	1208	1248	1288	1328
27	10	200	1209	1249	1289	1329
33	10	200	1210	1250	1290	1330
33	20	200	1211	1251	1291	1331
39	10	200	1212	1252	1292	1332
47	10	200	1213	1253	1293	1333
47	20	200	1214	1254	1294	1334
56	10	200	1215	1255	1295	1335
68	10	200	1216	1256	1296	1336
68	20	200	1217	1257	1297	1337
82	10	200	1218	1258	1298	1338
100	10	200	1219	1259	1299	1339
100	20	200	1220	1260	1300	1340
120	10	200	1221	1261	1301	1341
150	10	200	1222	1262	1302	1342
150	20	200	1223	1263	1303	1343
180	10	200	1224	1264	1304	1344
220	10	200	1225	1265	1305	1345
220	20	200	1226	1266	1306	1346
270	10	200	1227	1267	1307	1347
330	10	200	1228	1268	1308	1348
330	20	200	1229	1269	1309	1349
390	10	200	1230	1270	1310	1350
470	10	200	1231	1271	1311	1351
470	20	200	1232	1272	1312	1352
560	10	200	1233	1273	1313	1353
680	10	200	1234	1274	1314	1354
680	20	200	1235	1275	1315	1355
820	10	200	1236	1276	1316	1356
1000	10	200	1237	1277	1317	1357
1000	20	200	1238	1278	1318	1358
1200	10	100	1239	1279	1319	1359
1500	10	100	1240	1280	1320	1360
1500	20	100	1441	1481	1521	1561
1800	10	100	1442	1482	1522	1562

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/01

CKR05


CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/01-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
pF	± PERCENT	VOLTS				
2200	10	100	1443	1483	1523	1563
2200	20	100	1444	1484	1524	1564
2700	10	100	1445	1485	1525	1565
3300	10	100	1446	1486	1526	1566
3300	20	100	1447	1487	1527	1567
3900	10	100	1448	1488	1528	1568
4700	10	100	1449	1489	1529	1569
4700	20	100	1450	1490	1530	1570
5600	10	100	1451	1491	1531	1571
6800	10	100	1452	1492	1532	1572
6800	20	100	1453	1493	1533	1573
8200	10	100	1454	1494	1534	1574
10000	10	100	1455	1495	1535	1575
10000	20	100	1456	1496	1536	1576
12000	10	50	1457	1497	1537	1577
15000	10	50	1458	1498	1538	1578
15000	20	50	1459	1499	1539	1579
18000	10	50	1460	1500	1540	1580
22000	10	50	1461	1501	1541	1581
22000	20	50	1462	1502	1542	1582
27000	10	50	1463	1503	1543	1583
33000	10	50	1464	1504	1544	1584
33000	20	50	1465	1505	1545	1585
39000	10	50	1466	1506	1546	1586
47000	10	50	1467	1507	1547	1587
47000	20	50	1468	1508	1548	1588
56000	10	50	1469	1509	1549	1589
68000	10	50	1470	1510	1550	1590
68000	20	50	1471	1511	1551	1591
82000	10	50	1472	1512	1552	1592
100000	10	50	1473	1513	1553	1593
100000	20	50	1474	1514	1554	1594

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/02

CKR06

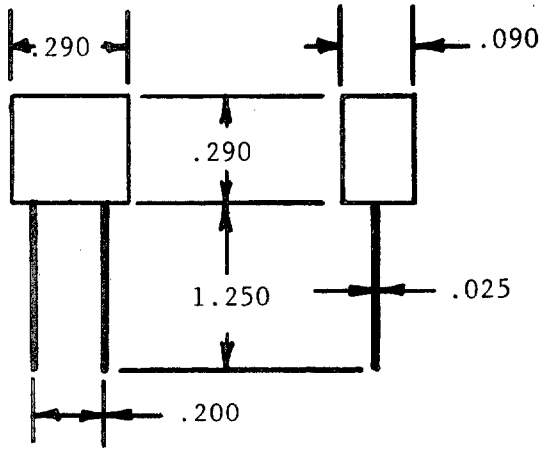

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/02-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
pF	± PERCENT	VOLTS				
1200	10	200	1201	1241	1281	1321
1500	10	200	1202	1242	1282	1322
1500	20	200	1203	1243	1283	1323
1800	10	200	1204	1244	1284	1324
2200	10	200	1206	1246	1286	1326
2200	20	200	1207	1247	1287	1327
2700	10	200	1208	1248	1288	1328
3300	10	200	1209	1249	1289	1329
3300	20	200	1210	1250	1290	1330
3900	10	200	1211	1251	1291	1331
4700	10	200	1212	1252	1292	1332
4700	20	200	1213	1253	1293	1333
5600	10	200	1214	1254	1294	1334
6800	10	200	1215	1255	1295	1335
6800	20	200	1216	1256	1296	1336
8200	10	200	1217	1257	1297	1337
10000	10	200	1218	1258	1298	1338
10000	20	200	1219	1259	1299	1339
12000	10	100	1231	1271	1311	1351
15000	10	100	1220	1260	1300	1340
18000	10	100	1221	1261	1301	1341
22000	10	100	1222	1262	1302	1342
27000	10	100	1232	1272	1312	1352

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/02

CKR06

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/02-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
pF	± PERCENT	VOLTS				
33000	10	100	1223	1263	1303	1343
39000	10	100	1224	1264	1304	1344
47000	10	100	1225	1265	1305	1345
56000	10	100	1226	1266	1306	1346
68000	10	100	1227	1267	1307	1347
82000	10	100	1229	1269	1309	134P
100000	10	100	1230	1270	1310	1350
120000	10	50	1233	1273	1313	1353
150000	10	50	1234	1274	1314	1354
180000	10	50	1235	1275	1315	1355
220000	10	50	1236	1276	1316	1356
270000	10	50	1237	1277	1317	1357
330000	10	50	1238	1278	1318	1358
390000	10	50	1239	1279	1319	1359
470000	10	50	1240	1280	1320	1360
560000	10	50	1404	1408	1412	1416
680000	10	50	1405	1409	1413	1417
820000	10	50	1406	1410	1414	1418
1000000	10	50	1407	1411	1415	1419


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/05

STYLES CKR11, CKR12, CKR14, CKR15 AND CKR16

STYLE	DIMENSIONS		
	L	D	C
CKR11	.169	.090	.019
CKR12	.250	.090	.019
CKR14	.390	.140	.025
CKR15	.500	.250	
CKR16	.690	.250	.025

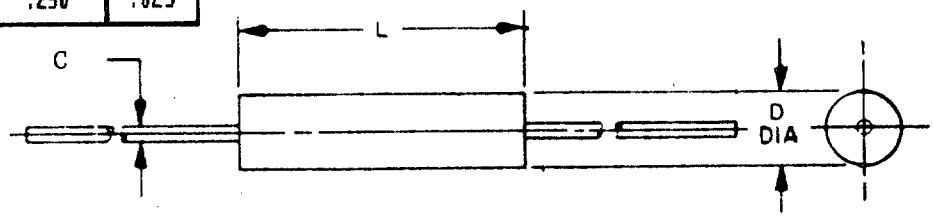

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/05-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
STYLE CKR11, VOLTAGE-TEMPERAYURE LIMITS +15% AND +15, -25%						
pF	± PERCENT	VOLTS				
10	10	100	2601	2801	2001	2201
10	20	100	2602	2802	2002	2202
12	10	100	2603	2803	2003	2203
15	10	100	2604	2804	2004	2204
15	20	100	2605	2805	2005	2205
18	10	100	2606	2806	2006	2206
22	10	100	2607	2807	2007	2207
22	20	100	2608	2808	2008	2208
27	10	100	2609	2809	2009	2209
33	10	100	2610	2810	2010	2210
33	20	100	2611	2811	2011	2211
39	10	100	2612	2812	2012	2212
47	10	100	2613	2813	2013	2213
47	20	100	2614	2814	2014	2214
56	10	100	2615	2815	2015	2215
68	10	100	2616	2816	2016	2216
68	20	100	2617	2817	2017	2217
82	10	100	2618	2818	2018	2218
100	10	100	2619	2819	2019	2219

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/05

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/05-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
STYLE CKR11, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -25%(CONT).						
pF	± PERCENT	VOLTS				
100	20	100	2620	2820	2020	2220
120	10	100	2621	2821	2021	2221
150	10	100	2622	2822	2022	2222
150	20	100	2623	2823	2023	2223
180	10	100	2624	2824	2024	2224
220	10	100	2625	2825	2025	2225
220	20	100	2626	2826	2026	2226
270	10	100	2627	2827	2027	2227
330	10	100	2628	2828	2028	2228
330	20	100	2629	2829	2029	2229
390	10	100	2630	2830	2030	2230
470	10	100	2631	2831	2031	2231
470	20	100	2632	2832	2032	2232
560	10	100	2633	2833	2033	2233
680	10	100	2634	2834	2034	2234
680	20	100	2635	2835	2035	2235
820	10	100	2636	2836	2036	2236
1000	10	100	2637	2837	2037	2237
1000	20	100	2638	2838	2038	2238
1200	10	100	2639	2839	2039	2239
1500	10	100	2640	2840	2040	2240
1500	20	100	2641	2841	2041	2241
1800	10	100	2642	2842	2042	2242
2200	10	100	2643	2843	2043	2243
2200	20	100	2644	2844	2044	2244
2700	10	100	2645	2845	2045	2245
3300	10	100	2646	2846	2046	2246
3300	20	100	2647	2847	2047	2247
3900	10	100	2648	2848	2048	2248
4700	10	100	2649	2849	2049	2249
4700	20	100	2650	2850	2050	2250
5600	10	50	2651	2851	2051	2251
6800	10	50	2652	2852	2052	2252
6800	20	50	2653	2853	2053	2253
8200	10	50	2654	2854	2054	2254
10000	10	50	2655	2855	2055	2255
10000	20	50	2656	2856	2056	2256
STYLE CKR12, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -25%						
5600	10	100	2657	2857	2057	2257
6800	10	100	2658	2858	2058	2258

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/05

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/05-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
STYLE CKR12, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -25%						
pF	± PERCENT	VOLTS				
6800	20	100	2659	2859	2059	2259
8200	10	100	2660	2860	2060	2260
10000	10	100	2661	2861	2061	2261
10000	20	100	2662	2862	2062	2262
12000	10	50	2663	2863	2063	2263
15000	10	50	2664	2864	2064	2264
15000	20	50	2665	2865	2065	2265
18000	10	50	2666	2866	2066	2266
22000	10	50	2667	2867	2067	2267
22000	20	50	2668	2868	2068	2268
27000	10	50	2669	2869	2069	2269
33000	10	50	2670	2870	2070	2270
33000	20	50	2671	2871	2071	2271
39000	10	50	2672	2872	2072	2272
47000	10	50	2673	2873	2073	2273
47000	20	50	2674	2874	2074	2274
STYLE CKR14, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -25%						
12000	10	100	2675	2875	2075	2275
15000	10	100	2676	2876	2076	2276
15000	20	100	2677	2877	2077	2277
18000	10	100	2678	2878	2078	2278
22000	10	100	2679	2879	2079	2279
22000	20	100	2680	2880	2080	2280
27000	10	100	2681	2881	2081	2281
33000	10	100	2682	2882	2082	2282
33000	20	100	2683	2883	2083	2283
39000	10	100	2684	2884	2084	2284
47000	10	100	2685	2885	2085	2285
47000	20	100	2686	2886	2086	2286
56000	10	50	2687	2887	2087	2287
68000	10	50	2688	2888	2088	2288
68000	20	50	2689	2889	2089	2289
82000	10	50	2690	2890	2090	2290
100000	10	50	2691	2891	2091	2291
100000	20	50	2692	2892	2092	2292
STYLE CKR14, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -40%						
56000	10	100	2693	2893	2093	2293
68000	10	100	2694	2894	2094	2294
68000	20	100	2695	2895	2095	2295
82000	10	100	2696	2896	2096	2296
100000	10	100	2697	2897	2097	2297

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/05

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/05-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
STYLE CKR14, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -40%(CONT).						
pF	± PERCENT	VOLTS				
100000	20	100	2698	2898	2098	2298
120000	10	50	2699	2899	2099	2299
150000	10	50	2700	2900	2100	2300
150000	20	50	2701	2901	2101	2301
180000	10	50	2702	2902	2102	2302
220000	10	50	2703	2903	2103	2303
220000	20	50	2704	2904	2104	2304
270000	10	50	2705	2905	2105	2305
STYLE CKR15, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -25%						
56000	10	100	2706	2906	2106	2306
68000	10	100	2707	2907	2107	2307
68000	20	100	2708	2908	2108	2308
82000	10	100	2709	2909	2109	2309
100000	10	100	2710	2910	2110	2310
100000	20	100	2711	2911	2111	2311
STYLE CKR15, VOLTAGE-TEMPERATURE LIMITS +15% AND+15, -40%						
120000	10	100	2712	2912	2112	2312
150000	10	100	2713	2913	2113	2313
150000	20	100	2714	2914	2114	2314
180000	10	100	2715	2915	2115	2315
220000	10	100	2716	2916	2116	2316
220000	20	100	2717	2917	2117	2317
270000	10	100	2718	2918	2118	2318
330000	10	100	2719	2919	2119	2319
330000	20	100	2720	2920	2120	2320
470000	10	50	2721	2921	2121	2321
470000	20	50	2722	2922	2122	2322
680000	10	50	2723	2923	2123	2323
680000	20	50	2724	2924	2124	2324
1000000	10	50	2725	2925	2125	2325
1000000	20	50	2726	2926	2126	2326
STYLE CKR16, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -40%						
470000	10	100	2727	2927	2127	2327
470000	20	100	2728	2928	2128	2328
680000	10	100	2729	2929	2129	2329
680000	20	100	2730	2930	2130	2330
1000000	10	100	2731	2931	2131	2331
1000000	20	100	2732	2932	2132	2332
2200000	10	50	2733	2933	2133	2333
2200000	20	50	2734	2934	2134	2334
3300000	10	50	2735	2935	2135	2335
3300000	20	50	2736	2936	2136	2336


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

87

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/08

STYLE CKR72(FEEDTHROUGH)

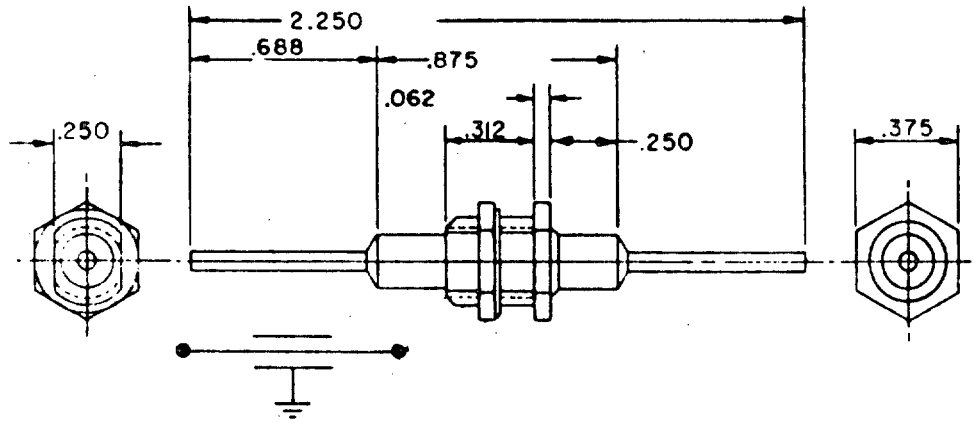

CIRCUIT DIAGRAM


CAPACITANCE	DC RATED VOLTAGE	DASH NUMBER M39014/08	
		M (1.0%)	P (0.1%)
100	1500	0201	0211
470	1500	0202	0212
680	1500	0203	0213
1000	1500	0204	0214

CAPACITANCE TOLERANCE ± 20%

MIL-C-39014/13

STYLES CKR17, CKR18 AND CKR20

STYLE	DIMENSIONS		
	L	D	M
CKR17	.250	.090	.019
CKR18	.390	.145	.025
CKR20	.160	.090	.019

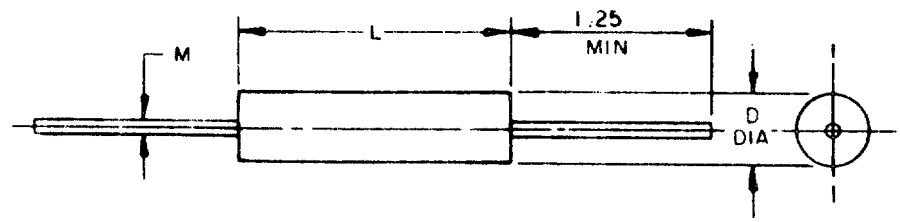

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/13

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/13-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
STYLE CKR17, VOLTAGE-TEMPERATURE LIMITS OF +15% AND +15, -25%						
pF	± PERCENT	VOLTS				
5600	10	100	0397	0457	0517	0577
6800	10	100	0398	0458	0518	0578
6800	20	100	0399	0459	0519	0579
8200	10	100	0400	0460	0520	0580
10000	10	100	0401	0461	0521	0581
10000	20	100	0402	0462	0522	0582
12000	10	50	1163	1263	1363	1463
15000	10	50	1164	1264	1364	1464
15000	20	50	1165	1265	1365	1465
18000	10	50	1166	1266	1366	1466
22000	10	50	1167	1267	1367	1467
22000	20	50	1168	1268	1368	1468
STYLE CKR18, VOLTAGE-TEMPERATURE LIMITS OF +15% AND +15, -25%						
12000	10	100	1169	1269	1369	1469
15000	10	100	0403	0463	0523	0583
15000	20	100	0404	0464	0524	0584
18000	10	100	1172	1272	1372	1472
22000	10	100	0405	0465	0525	0585
22000	20	100	0406	0466	0526	0586
27000	10	100	0407	0467	0527	0587
33000	10	100	0408	0468	0528	0588
33000	20	100	0409	0469	0529	0589
39000	10	100	0410	0470	0530	0590
47000	10	100	0411	0471	0531	0591
47000	20	100	0412	0472	0532	0592
56000	10	100	0413	0473	0533	0593
68000	10	100	0414	0474	0534	0594
68000	20	100	0415	0475	0535	0595
82000	10	100	0416	0476	0536	0596
100000	10	100	0417	0477	0537	0597
100000	20	100	0418	0478	0538	0598
120000	10	50	1187	1287	1387	1487
150000	10	50	1188	1288	1388	1488
150000	20	50	1189	1289	1389	1489
180000	10	50	1190	1290	1390	1490
STYLE CKR20, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -25%						
10	10	100	1101	1201	1301	1401
10	20	100	1102	1202	1302	1402
12	10	100	1103	1203	1303	1403

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

89

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/13

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/13-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
STYLE CKR20, VOLTAGE-TEMPERATURE LIMITS OF +15% AND +15, -25%(CUNT).						
pF	± PERCENT	VOLTS				
15	10	100	1104	1204	1304	1404
15	20	100	1105	1205	1305	1405
18	10	100	1106	1206	1306	1406
22	10	100	1107	1207	1307	1407
22	20	100	1108	1208	1308	1408
27	10	100	1109	1209	1309	1409
33	10	100	1110	1210	1310	1410
33	20	100	1111	1211	1311	1411
39	10	100	1112	1212	1312	1412
47	10	100	1113	1213	1313	1413
47	20	100	1114	1214	1314	1414
56	10	100	1115	1215	1315	1415
68	10	100	1116	1216	1316	1416
68	20	100	1117	1217	1317	1417
82	10	100	1118	1218	1318	1418
100	10	100	1119	1219	1319	1419
100	20	100	1120	1220	1320	1420
120	10	100	1121	1221	1321	1421
150	10	100	1122	1222	1322	1422
150	20	100	1123	1223	1323	1423
180	10	100	1124	1224	1324	1424
220	10	100	1125	1225	1325	1425
220	20	100	1126	1226	1326	1426
270	10	100	1127	1227	1327	1427
330	10	100	1128	1228	1328	1428
330	20	100	1129	1229	1329	1429
390	10	100	1130	1230	1330	1430
470	10	100	1131	1231	1331	1431
470	20	100	1132	1232	1332	1432
560	10	100	1133	1233	1333	1433
680	10	100	1134	1234	1334	1434
680	20	100	1135	1235	1335	1435
820	10	100	1136	1236	1336	1436
1000	10	100	1137	1237	1337	1437
1000	20	100	1138	1238	1338	1438
1200	10	100	1139	1239	1339	1439
1500	10	100	1140	1240	1340	1440
1500	20	100	1141	1241	1341	1441
1800	10	100	1142	1242	1342	1442
2200	10	100	1143	1243	1343	1443
2200	20	100	1144	1244	1344	1444
2700	10	100	1145	1245	1345	1445
3300	10	100	1146	1246	1346	1446
3300	20	100	1147	1247	1347	1447

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/13

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/13-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
STYLE CKR20, VOLTAGE-TEMPERATURE LIMITS +15% AND +15, -25%(CONT).						
pF	± PERCENT	VOLTS				
3900	10	100	1148	1248	1348	1448
4700	10	100	1149	1249	1347	1449
4700	20	100	1150	1250	1350	1450
5600	10	50	1151	1251	1351	1451
6800	10	50	1152	1252	1352	1452
6800	20	50	1153	1253	1353	1453
8200	10	50	1154	1254	1354	1454
10000	10	50	1155	1255	1355	1455
10000	20	50	1156	1256	1356	1456

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/16

STYLE CKR75(FEEDTHROUGH)



CIRCUIT DIAGRAM

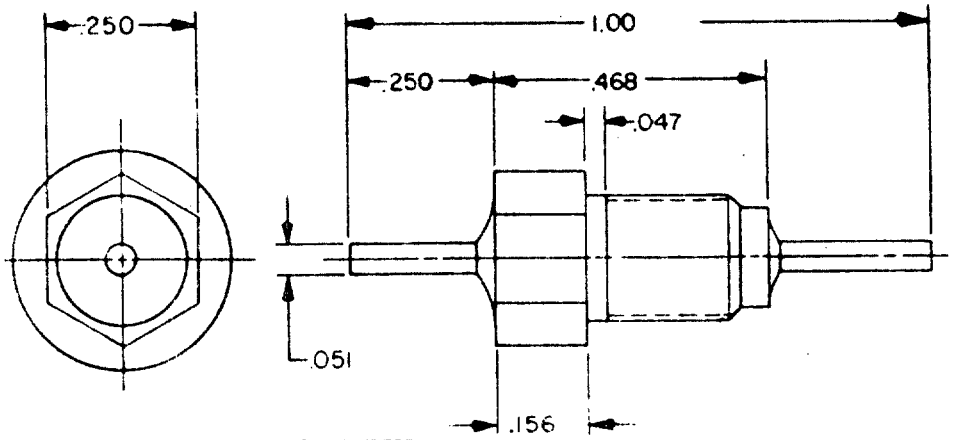


TABLE I. STYLE CKR75 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE	CAPACITANCE TOLERANCE	DASH NUMBER M39014/16	CAPACITANMCE	CAPACITANCE TOLERANCE	DASH NUMBER M39014/16-
pF	± PERCENT		pF	± PERCENT	
500 VOLTS dc			500 VOLTS dc		
10	10	0051	120	20	0071
10	20	0052	150	10	0072
12	10	0053	150	20	0073
15	10	0054	180	10	0074
15	20	0055	220	10	0075
18	10	0056	220	20	0076
22	10	0057	270	10	0077
22	20	0058	330	10	0078
27	10	0059	330	20	0079
33	10	0060	390	10	0080
33	20	0061	470	10	0081
39	10	0062	470	20	0082
47	10	0063	560	10	0083
47	20	0064	680	10	0084
56	10	0065	680	20	0085
68	10	0066	820	10	0086
68	20	0067	1000	+80 -20	0087
82	10	0068	1200	+80 -20	0088
100	10	0069	1500	+80 -20	0089
100	20	0070			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/17

STYLE CKR82(STANDOFF)

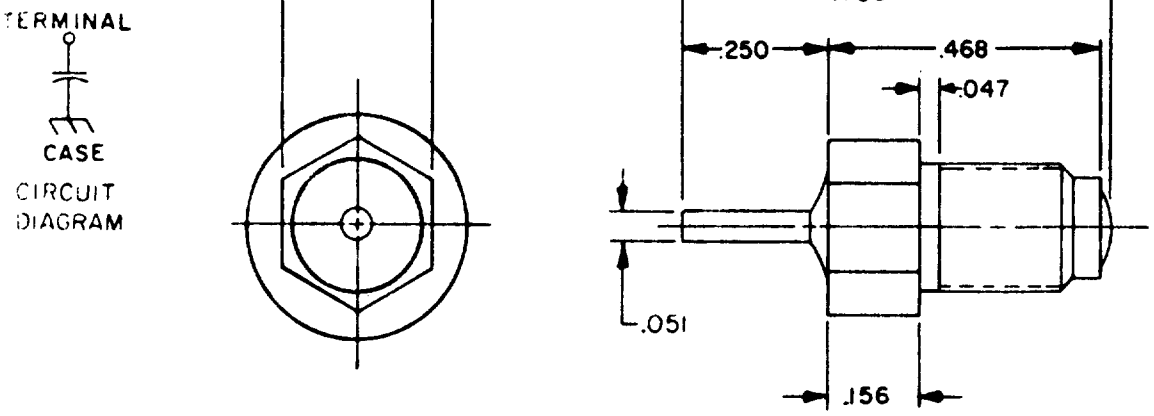


TABLE I. STYLE CKR82, CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE	CAPACITANCE TOLERANCE	DASH NUMBER M39014/17		CAPACITANMCE	CAPACITANCE TOLERANCE	DASH NUMBER M39014/17-
pF	± PERCENT			pF	± PERCENT	
500 VOLTS dc				500 VOLTS dc		
10	10	0051		120	10	0071
10	20	0052		150	10	0072
12	10	0053		150	20	0073
15	10	0054		180	10	0074
15	20	0055		220	10	0075
18	10	0056		220	20	0076
22	10	0057		270	10	0077
22	20	0058		330	10	0078
27	10	0059		330	20	0079
33	10	0060		390	10	0080
33	20	0061		470	10	0081
39	10	0062		470	20	0082
47	10	0063		560	10	0083
47	20	0064		680	10	0084
56	10	0065		680	20	0085
68	10	0066		820	10	0086
68	20	0067		1000	+80 -20	0087
82	10	0068		1200	+80 -20	0088
100	10	0069		1500	+80 -20	0089
100	20	0070				


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

93

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/18


STYLE CKR76(FEEDTHROUGH)

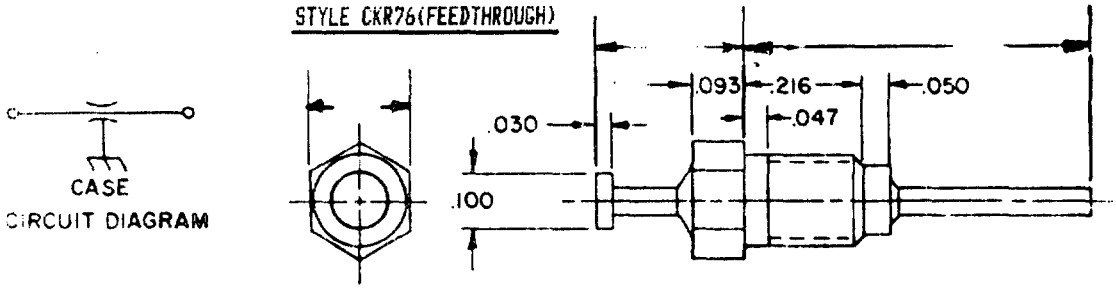

CAPACITANCE	CAPACITANCE TOLERANCE	RATED VOLTAGE	DASH NUMBER M39014/18-
pF	PERCENT	VOLTS	M (1.0%)
10	+80,-20	500	0321
22	+80,-20	500	0322
47	+80,-20	500	0323
100	+80,-20	500	0324
220	+80,-20	500	0325
470	+80,-20	500	0326
1000	+80,-20	500	0327
1500	+80,-20	500	0328

MIL-C-39014/19

STYLE CKR83(STANDOFF)

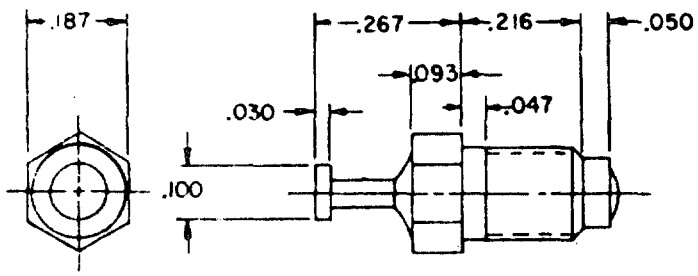

CAPACITANCE	CAPACITANCE TOLERANCE	RATED VOLTAGE	DASH NUMBER M39014/19-
pF	PERCENT	VOLTS	M (1.0%)
10	+80 -20	200	0321
22	+80 -20	200	0322
47	+80 -20	200	0323
100	+80 -20	200	0324
220	+80 -20	200	0325
470	+80 -20	200	0326
1000	+80 -20	200	0327
1500	+80 -20	200	0328

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/23

STYLE CKR04

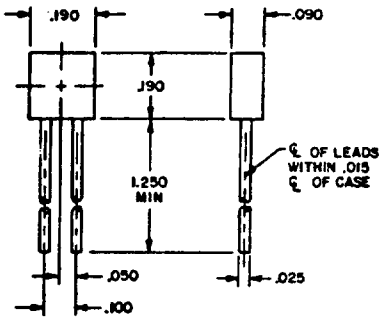


TABLE I. STYLE CKR04, CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/23-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
pF	± PERCENT	VOLTS				
10	10	200	0001	0101	0201	0301
10	20	200	0002	0102	0202	0302
12	10	200	0003	0103	0203	0303
15	10	200	0004	0104	0204	0304
15	20	200	0005	0105	0205	0305
18	10	200	0006	0106	0206	0306
22	10	200	0007	0107	0207	0307
22	20	200	0008	0108	0208	0308
27	10	200	0009	0109	0209	0309
33	10	200	0010	0110	0210	0310
33	20	200	0011	0111	0211	0311
39	10	200	0012	0112	0212	0312
47	10	200	0013	0113	0213	0313
47	20	200	0014	0114	0214	0314
56	10	200	0015	0115	0215	0315
68	10	200	0016	0116	0216	0316
68	20	200	0017	0117	0217	0317
82	10	200	0018	0118	0218	0318
100	10	200	0019	0119	0219	0319
100	20	200	0020	0120	0220	0320
120	10	200	0021	0121	0221	0321
150	10	200	0022	0122	0222	0322
150	20	200	0023	0123	0223	0323
180	10	200	0024	0124	0224	0324
220	10	200	0025	0125	0225	0325
220	20	200	0026	0126	0226	0326
270	10	200	0027	0127	0227	0327
330	10	200	0028	0128	0228	0328

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/23

TABLE I. STYLE CKR04 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE	CAPACITANCE TOLERANCE	DC RATED VOLTAGE	DASH NUMBER M39014/23-			
			M (1.0%)	P (0.1%)	R (0.01%)	S (0.001%)
pF	±PERCENT	VOLTS				
330	20	200	0029	0129	0229	0329
390	10	200	0030	0130	0230	0330
470	10	200	0031	0131	0231	0331
470	20	200	0032	0132	0232	0332
560	10	200	0033	0133	0233	0333
680	10	200	0034	0134	0234	0334
680	20	200	0035	0135	0235	0335
820	10	200	0036	0136	0236	0336
1000	10	200	0037	0137	0237	0337
1000	20	200	0038	0138	0238	0338
1200	10	100	0039	0139	0239	0339
1500	10	100	0040	0140	0240	0340
1500	20	100	0041	0141	0241	0341
1800	10	100	0042	0142	0242	0342
2200	10	100	0043	0143	0243	0343
2200	20	100	0044	0144	0244	0344
2700	10	100	0045	0145	0245	0345
3300	10	100	0046	0146	0246	0346
3300	20	100	0047	0147	0247	0347
3900	10	100	0048	0148	0248	0348
4700	10	100	0049	0149	0249	0349
4700	20	100	0050	0150	0250	0350
5600	10	100	0051	0151	0251	0351
6800	10	100	0052	0152	0252	0352
6800	20	100	0053	0153	0253	0353
8200	10	100	0054	0154	0254	0354
10000	10	100	0055	0155	0255	0355
10000	20	100	0056	0156	0256	0356
12000	10	50	0057	0157	0257	0357
15000	10	50	0058	0158	0258	0358
15000	20	50	0059	0159	0259	0359
18000	10	50	0060	0160	0260	0360
22000	10	50	0061	0161	0261	0361
22000	20	50	0062	0162	0262	0362
27000	10	50	0063	0163	0263	0363
33000	10	50	0064	0164	0264	0364
33000	20	50	0065	0165	0265	0365
39000	10	50	0066	0166	0266	0366
47000	10	50	0067	0167	0267	0367
47000	20	50	0068	0168	0268	0368
56000	10	50	0069	0169	0269	0369
68000	10	50	0070	0170	0270	0370
68000	20	50	0071	0171	0271	0371
82000	10	50	0072	0172	0272	0372
100000	10	50	0073	0173	0273	0373
100000	20	50	0074	0174	0274	0374

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-20(ESTABLISHED RELIABILITY)


SCOPE: FIXED INSULATED, CERAMIC DIELECTRIC CAPACITORS USED PRIMARILY WHERE COMPENSATION IS NECESSARY FOR CIRCUIT VARIATION DUE TO TEMPERATURE CHANGE AND IN BYPASS AND COUPLING APPLICATION. THESE STYLES INCLUDED ARE CCR05, CCR06, CCR07, CCR08, CCR09, CCR75, CCR76, CCR77, CCR78 AND CCR79 PER MIL-C-20.

TEMP RANGE: -55°C TO +125°C

SHOCK: 100G, SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 15G, 10-2000 Hz (MIL-STD-202, METHOD 204)

TYPE DESIGNATION: THE TYPE DESIGNATION SHALL BE IN THE FOLLOWING FORM,

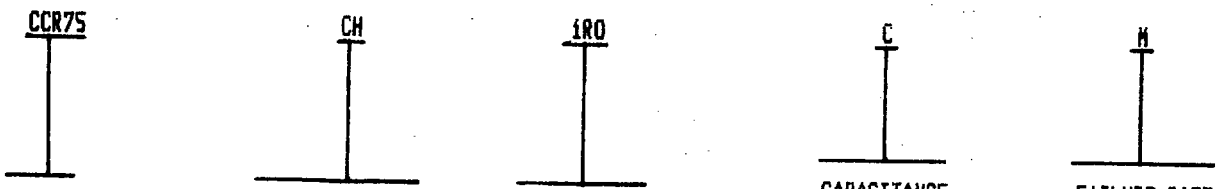

STYLE	CHARACTERISTIC	CAPACITANCE	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL
CCR	ppm°C CG 0±30 CG 0±60	THE FIRST TWO DIGITS REPRESENT SIGNIFICANT FIGURES AND LAST DIGITS SPECIFIES NUMBER OF ZEROS. R SHALL BE USED TO INDICATE THE DECIMAL POINT AND IS EXPRESSED IN PICOFARADS.	B---0.1pF C---0.25 pF D---0.5pF F--±1% G--±2% J--±5% K--±10%	M (1.0%) P (0.1%) R (0.01%)
*	*			*


* COMPLETE PART NUMBER INCLUDES ADDITIONAL SYMBOLS TO INDICATE STYLE, CAPACITANCE TOLERANCE AND FAILURE RATE LEVEL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-20

STYLES CCR75, CCR76, CCR77, CCR78 AND CCR79

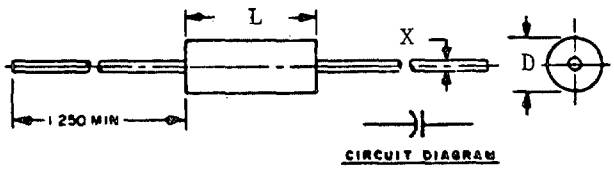

STYLE	DIMENSIONS		
	L	D	X
CCR75	.160	.090	.016
CCR76	.250	.090	.015
CCR77	.390	.140	.015
CCR78	.500	.250	.015
CCR79	.690	.350	.015

MIL-C-20/27

TABLE I. STYLE CCR75 CHARACTERISTICS.

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE	TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc			200 VOLTS dc		
	pF			pF	
CCR75CGR10--	0.10	B	CCR75CGR68--	0.68	B
CCR75CGR11--	0.11	B	CCR75CGR75--	0.75	B
CCR75CGR12--	0.12	B	CCR75CGR82--	0.82	B
CCR75CGR13--	0.13	B	CCR75CGR91--	0.91	B
CCR75CGR15--	0.15	B	CCR75CG1R0--	1.00	BC
CCR75CGR16--	0.16	B	CCR75CG1R1--	1.10	BC
CCR75CGR18--	0.18	B	CCR75CG1R2--	1.20	BC
CCR75CGR20--	0.20	B	CCR75CG1R3--	1.30	BC
CCR75CGR22--	0.22	B	CCR75CG1R5--	1.50	BC
CCR75CGR24--	0.24	B	CCR75CG1R6--	1.60	BC
CCR75CGR27--	0.27	B	CCR75CG1R8--	1.80	BC
CCR75CGR30--	0.30	B	CCR75CG2R0--	2.00	BC
CCR75CGR33--	0.33	B	CCR75CG2R2--	2.20	BC
CCR75CGR36--	0.36	B	CCR75CG2R4--	2.40	BC
CCR75CGR39--	0.39	B	CCR75CG2R7--	2.70	BCD
CCR75CGR43--	0.43	B	CCR75CG3R0--	3.00	BCD
CCR75CGR47--	0.47	B	CCR75CG3R3--	3.30	BCD
CCR75CGR51--	0.51	B	CCR75CG3R6--	3.60	BCD
CCR75CGR56--	0.56	B	CCR75CG3R9--	3.90	BCD
CCR75CGR62--	0.62	B	CCR75CG4R3--	4.30	BCD
			CCR75CG4R7--	4.70	BCD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

TABLE I. STYLE CCR75 CHARACTERISTICS (CONT).

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc pF		
CCR75CG5R1--	5.10	BCD
CCR75CG5R6--	5.60	BCD
CCR75CG6R8--	6.80	BCD
CCR75CG7R5--	7.50	BCD
CCR75CG8R2--	8.20	BCD
CCR75CG9R1--	9.10	BCD
CCR75CG100--	10.00	BCD
CCR75CG110--	11.00	BCD
CCR75CG120--	12.00	FGJ
CCR75CG130--	13.00	FGJ
CCR75CG150--	15.00	FGJ
CCR75CG160--	16.00	FGJ
CCR75CG180--	18.00	FGJ
CCR75CG200--	20.00	FGJ
CCR75CG220--	22.00	FGJ
CCR75CG240--	24.00	FGJ
CCR75CG270--	27.00	FGJ
CCR75CG300--	30.00	FGJ
CCR75CG330--	30.00	FGJ
CCR75CG360--	36.00	FGJ
CCR75CG390--	39.00	FGJ
CCR75CG430--	43.00	FGJ
CCR75CG470--	47.00	FGJ
CCR75CG510--	51.00	FGJ
CCR75CG560--	56.00	FGJ
CCR75CG620--	62.00	FGJ
CCR75CG680--	68.00	FGJ
CCR75CG750--	75.0	FGJ
100 VOLTS dc		
CCR75CG820--	82.0	FGJ
CCR75CG910--	91.0	FGJ
CCR75CG101--	100.0	FGJ
CCR75CG111--	110.0	FGJ
CCR75CG121--	120.0	FGJ
CCR75CG131--	130.0	FGJ
CCR75CG151--	150.0	FGJ
CCR75CG161--	160.0	FGJ
CCR75CG181--	180.0	FGJ
CCR75CG201--	200.0	FGJ
CCR75CG221--	220.0	FGJ
CCR75CG241--	240.0	FGJ
50 VOLTS dc		
CCR75CG271--	270.0	FGJ
CCR75CG301--	300.0	FGJ
CCR75CG331--	330.0	FGJ
CCR75CG361--	360.0	FGJ
CCR75CG391--	390.0	FGJ
CCR75CG431--	430.0	FGJ
CCR75CG471--	470.0	FGJ
CCR75CG511--	510.0	FGJ
CCR75CG561--	560.0	FGJ
CCR75CG621--	620.0	FGJ
CCR75CG681--	680.0	FGJ

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

99

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-20/28

TABLE I. STYLE CCR76 CHARACTERISTICS.

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc pF		
CCR76CG820--	82	FGJ
CCR76CG910--	91	FGJ
CCR76CG101--	100	FGJ
CCR76CG111--	110	FGJ
CCR76CG121--	120	FGJ
CCR76CG131--	130	FGJ
100 VOLTS dc pF		
CCR76CG271--	270	FGJ
CCR76CG301--	300	FGJ
CCR76CG331--	330	FGJ
CCR76CG361--	360	FGJ
CCR76CG391--	390	FGJ
100 VOLTS dc pF		
CCR76CG431--	430	FGJ
CCR76CG471--	470	FGJ
CCR76CG511--	510	FGJ
CCR76CG561--	560	FGJ
CCR76CG621--	620	FGJ
CCR76CG681--	680	FGJ
50 VOLTS dc pF		
CCR76CG751--	750	FGJ
CCR76CG821--	820	FGJ
CCR76CG911--	910	FGJ
CCR76CG102--	1000	FGJ

MIL-C-20/29

TABLE I. STYLE CCR77 CHARACTERISTICS

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc pF		
CCR77CG151--	150	FGJ
CCR77CG161--	160	FGJ
CCR77CG181--	180	FGJ
CCR77CG201--	200	FGJ
CCR77CG221--	220	FGJ
CCR77CG241--	240	FGJ
CCR77CG271--	270	FGJ
CCR77CG301--	300	FGJ
CCR77CG331--	330	FGJ
CCR77CG361--	360	FGJ
CCR77CG391--	390	FGJ
CCR77CG431--	430	FGJ
CCR77CG511--	510	FGJ
CCR77CG561--	560	FGJ
CCR77CG621--	620	FGJ
CCR77CG681--	680	FGJ
100 VOLTS dc pF		FGJ
CCR77CG751--	750	FGJ
CCR77CG821--	820	FGJ
CCR77CG911--	910	FGJ
100 VOLTS dc pF		
CCR77CG102--	1000	FGJ
CCR77CG112--	1100	FGJ
CCR77CG122--	1200	FGJ
CCR77CG132--	1300	FGJ
CCR77CG152--	1500	FGJ
CCR77CG162--	1600	FGJ
CCR77CG182--	1800	FGJ
CCR77CG202--	2000	FGJ
CCR77CG222--	2200	FGJ
50 VOLTS dc pF		
CCR77CG242--	2400	FGJ
CCR77CG272--	2700	FGJ
CCR77CG302--	3000	FGJ
CCR77CG332--	3300	FGJ
CCR77CG362--	3600	FGJ
CCR77CG392--	3900	FGJ
CCR77CG432--	4300	FGJ
CCR77CG472--	4700	FGJ
CCR77CG512--	5100	FGJX
CCR77CG562--	5600	FGJX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-20/30

TABLE I. STYLE CCR78 CHARACTERISTICS.

TYPE DESIGNATON	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc	pF	
CCR78CG821--	820	FGJK
CCR78CG102--	1000	FGJK
CCR78CG122--	1200	FGJK
CCR78CG152--	1500	FGJK
CCR78CG182--	1800	FGJK
CCR78CG222--	2200	FGJK
CCR78CG272--	2700	FGJK
CCR78CG332--	3300	FGJK
100 VOLTS dc	pF	
CCR78CG392--	3900	FGJK
CCR78CG472--	4700	FGJK

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
100 VOLTS dc	pF	
CCR78CG562--	5600	FGJK
CCR78CG682--	6800	FGJK
CCR78CG822--	8200	FGJK
CCR78CG103--	10000	FGJK
CCR78CG123--	12000	FGJK
50 VOLTS dc	pF	
CCR78CG153--	15000	FGJK
CCR78CG183--	18000	FGJK
CCR78CG223--	22000	FGJK
CCR78CG273--	27000	FGJK

MIL-C-20/31

TABLE I. STYLE CCR79 CHARACTERISTICS.


TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc	pF	
CCR79CG392--	3900	FGJK
CCR79CG472--	4700	FGJK
CCR79CG562--	5600	FGJK
CCR79CG682--	6800	FGJK
CCR79CG822--	8200	FGJK
CCR79CG103--	10000	FGJK
100 VOLTS dc	pF	
CCR79CG153--	15000	FGJK
CCR79CG183--	18000	FGJK

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
100 VOLTS dc	pF	
CCR79CG223--	22000	FGJK
CCR79CG273--	27000	FGJK
CCR79CG333--	33000	FGJK
CCR79CG393--	39000	FGJK
50 VOLTS dc	pF	
CCR79CG473--	47000	FGJK
CCR79CG563--	56000	FGJK
CCR79CG683--	68000	FGJK
CCR79CG823--	82000	FGJK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC
MIL-C-20

STYLES CCR05, CCR06, CCR07, CCR08 AND CCR09

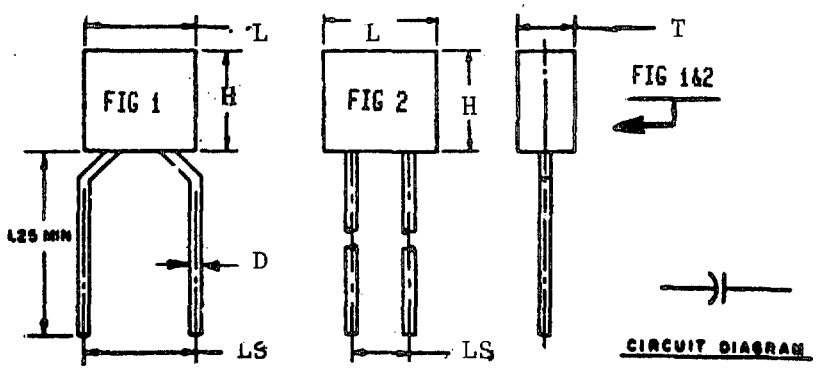

STYLE	FIGURE	DIMENSIONS			LS	LEAD DIAMETER
		L	H	T		D
CCR05	1	.190	.190	.090	.200	.020
CCR09	2	.190	.190	.090	.100	.020
CCR06	2	.290	.290	.090	.200	.021
CCR07	2	.480	.480	.200max	.400	.025
CCR08	2	.480	.480	.240	.400	.025

MIL-C-20/35

TABLE I. STYLES CCR05 AND CCR09 CAPACITOR CHARACTERISTICS.

TYPE DESIGNATON	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE	TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc	pF		200 VOLTS dc	pF	
CCR0-CH1R0--	1.0	BC	CCR0-CH3R0--	3.0	BCC
CCR0-CH1R1--	1.1	BC	CCR0-CH3R3--	3.3	BCC
CCR0-CH1R2--	1.2	BC	CCR0-CH3R6--	3.6	BCC
CCR0-CH1R3--	1.3	BC	CCR0-CH3R9--	3.9	BCC
CCR0-CH1R5--	1.5	BC	CCR0-CH4R3--	4.3	BCC
CCR0-CH1R6--	1.6	BC	CCR0-CH4R7--	4.7	BCC
CCR0-CH1R8--	1.8	BC	CCR0-CH5R1--	5.1	BCC
CCR0-CH2R0--	2.0	BC	CCR0-CH5R6--	5.6	BCC
CCR0-CH2R1--	2.2	BC	CCR0-CH6R2--	6.2	BCC
CCR0-CH2R4--	2.4	BC	CCR0-CH6R8--	6.8	BCC
CCR0-CH2R7--	2.7	BCC	CCR0-CH7R5--	7.5	BCC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-20/35


TABLE I. STYLES CCR05 AND CCR09 CAPACITOR CHARACTERISTICS(CONT).

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE	TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc	pF		200 VOLTS dc	pF	
CCR0-CH8R2--	8.2	BCC	CCR0-CG181--	180.0	FGJ
CCR0-CH9R1--	9.1	BCC	CCR0-CG201--	200.0	FGJ
CCR0-CG100--	10.0	FGJ	CCR0-CG221--	220.0	FGJ
CCR0-CG110--	11.0	FGJ	CCR0-CG241--	240.0	FGJ
CCR0-CG120--	12.0	FGJ	CCR0-CG271--	270.0	FGJ
CCR0-CG130--	13.0	FGJ	CCR0-CG301--	300.0	FGJ
CCR0-CG150--	15.0	FGJ	CCR0-CG331--	330.0	FGJ
CCR0-CG160--	16.0	FGJ	CCR0-CG361--	360.0	FGJ
CCR0-CG180--	18.0	FGJ	CCR0-CG391--	390.0	FGJ
CCR0-CG200--	20.0	FGJ	CCR0-CG431--	430.0	FGJ
CCR0-CG220--	22.0	FGJ	CCR0-CG471--	470.0	FGJ
CCR0-CG240--	24.0	FGJ	CCR0-CG511--	510.0	FGJ
CCR0-CG270--	27.0	FGJ	CCR0-CG561--	560.0	FGJ
CCR0-CG300--	30.0	FGJ	CCR0-CG621--	620.0	FGJ
CCR0-CG330--	33.0	FGJ	CCR0-CG681--	680.0	FGJ
CCR0-CG360--	36.0	FGJ	CCR0-CG751--	750.0	FGJ
CCR0-CG390--	39.0	FGJ	CCR0-CG821--	820.0	FGJ
CCR0-CG430--	43.0	FGJ	CCR0-CG911--	910.0	FGJ
CCR0-CG470--	47.0	FGJ	CCR0-CG102--	1000.0	FGJ
CCR0-CG510--	51.0	FGJ	CCR0-CG112--	1100.0	FGJ
CCR0-CG560--	56.0	FGJ	CCR0-CG122--	1200.0	FGJ
CCR0-CG620--	62.0	FGJ	CCR0-CG132--	1300.0	FGJ
CCR0-CG680--	68.0	FGJ	CCR0-CG152--	1500.0	FGJ
CCR0-CG750--	75.0	FGJ	CCR0-CG162--	1600.0	FGJ
CCR0-CG820--	82.0	FGJ	CCR0-CG182--	1800.0	FGJ
CCR0-CG910--	91.0	FGJ	CCR0-CG202--	2000.0	FGJ
CCR0-CG101--	100.0	FGJ	CCR0-CG222--	2200.0	FGJ
CCR0-CG111--	110.0	FGJ	CCR0-CG242--	2400.0	FGJ
CCR0-CG121--	120.0	FGJ	CCR0-CG272--	2700.0	FGJ
CCR0-CG131--	130.0	FGJ	CCR0-CG302--	3000.0	FGJ
CCR0-CG151--	150.0	FGJ	CCR0-CG332--	3300.0	FGJ
CCR0-CG161--	160.0	FGJ			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-20/36

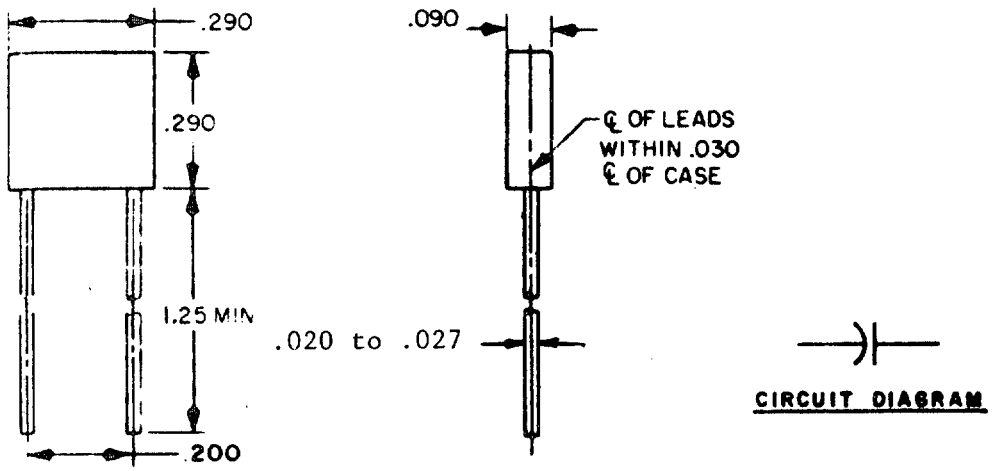

CIRCUIT DIAGRAM

TABLE I. STYLE CCR06 CHARACTERISTICS.


TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc pF		
CCR06CG361--	360	FGJ
CCR06CG391--	390	FGJ
CCR06CG431--	430	FGJ
CCR06CG471--	470	FGJ
CCR06CG511--	510	FGJ
CCR06CG561--	560	FGJ
CCR06CG621--	620	FGJ
CCR06CG681--	680	FGJ
CCR06CG751--	750	FGJ
CCR06CG821--	820	FGJ
CCR06CG911--	910	FGJ
CCR06CG102--	1000	FGJ
CCR06CG112--	1100	FGJ
CCR06CG122--	1200	FGJ
CCR06CG132--	1300	FGJ
CCR06CG152--	1500	FGJ
CCR06CG162--	1600	FGJ
CCR06CG182--	1800	FGJ
100 VOLTS dc		
CCR06CG202--	2000	FGJ
CCR06CG222--	2200	FGJ

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
100 VOLTS dc pF		
CCR06CG242--	2400	FGJ
CCR06CG272--	2700	FGJ
CCR06CG302--	3000	FGJ
CCR06CG332--	3300	FGJ
CCR06CG362--	3600	FGJ
CCR06CG392--	3900	FGJ
CCR06CG432--	4300	FGJ
CCR06CG472--	4700	FGJ
50 VOLTS dc		
CCR06CG512--	5100	FGJ
CCR06CG562--	5600	FGJ
CCR06CG622--	6200	FGJK
CCR06CG682--	6800	FGJK
CCR06CG752--	7500	FGJK
CCR06CG822--	8200	FGJK
CCR06CG912--	9100	FGJK
CCR06CG103--	10000	FGJK
CCR06CG123--	12000	FGJK
CCR06CG153--	15000	FGJK
CCR06CG183--	18000	FGJK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-20/37

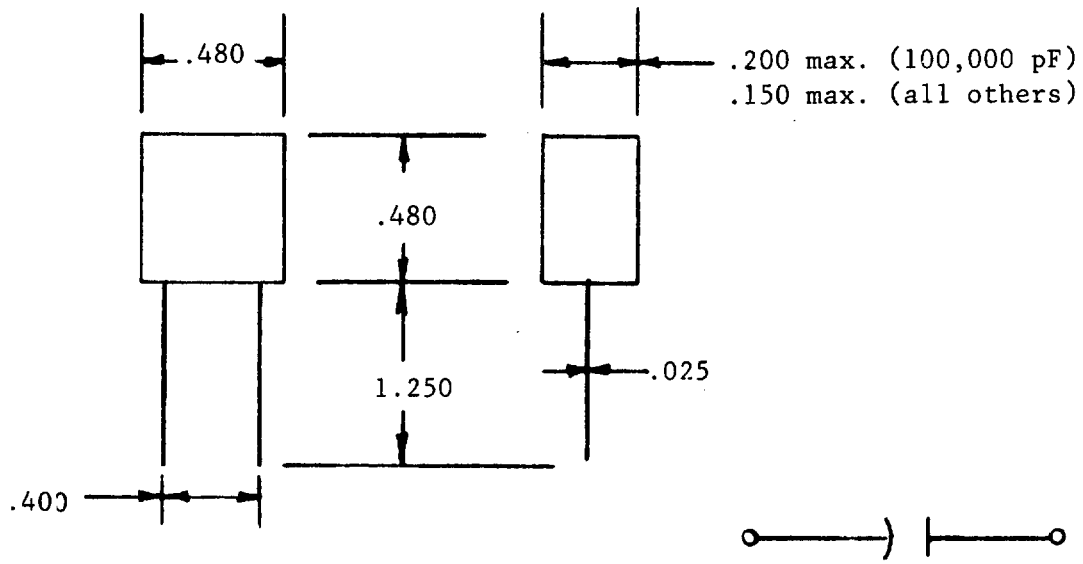

CIRCUIT DIAGRAM


TABLE I. STYLE CCR07 CHARACTERISTICS.


TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE	TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
200 VOLTS dc pF			50 VOLTS dc pF		
CCR07CG222--	2200	FGJK	CCR07CG153--	15,000	FGJK
CCR07CG272--	2700	FGJK	CCR07CG223--	22,000	FGJK
CCR07CG332--	3300	FGJK	CCR07CG333--	33,000	FGJK
CCR07CG392--	3900	FGJK	CCR07CG393--	39,000	FGJK
CCR07CG472--	4700	FGJK	CCR07CG473--	47,000	FGJK
CCR07CG562--	5600	FGJK	CCR07CG563--	56,000	FGJK
CCR07CG682--	6800	FGJK	CCR07CG683--	68,000	FGJK
CCR07CG822--	8200	FGJK	CCR07CG823--	82,000	FGJK
CCR07CG103--	10000	FGJK	CCR07CG904--	100,000	FGJK
CCR07CG123--	12000	FGJK			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-20/38

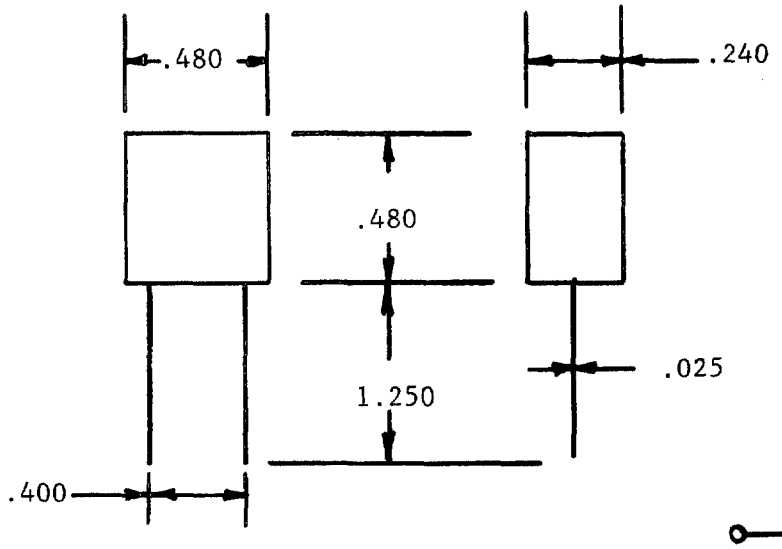



CIRCUIT DIAGRAM

TABLE I. STYLE CCR08 CHARACTERISTICS.

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
300 VOLTS dc pF		
CCR08CG393--	3900	GJK
200 VOLTS dc		
CCR08CG472--	4700	GJK

TYPE DESIGNATION	NOMINAL CAPACITANCE	CAPACITANCE TOLERANCE
100 VOLTS dc pF		
CCR08CG153-- CCR08CG183--	15000 16000	GJK GJK
50 VOLTS dc		
CCR08CG563-- CCR08CG683--	56000 68000	GJK GJK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITOR, FIXED
PLASTIC DIELECTRIC
MIL-C-19978(ESTABLISHED RELIABILITY)


SCOPE: FIXED, PLASTIC (OR PAPER PLASTIC) DIELECTRIC CAPACITORS, STYLES, CQR07, CQR09 CQR12, CQR13, CQR29, CQR32, AND CQR33 PER MIL-C-19978 ARE HERMETICALLY SEALED AND SUITABLE FOR GENERAL USE IN CIRCUIT APPLICATIONS REQUIRING HIGH INSULATION RESISTANCE, LOW DIELECTRIC ABSORBTION OR LOW LOSS FACTOR OVER WIDE TEMPERATURE RANGES.

TEMP RANGE: CHARACTERISTIC K= -65°C TO +125°C (PAPER AND POLYETHYLENE TEREPHTHALATE)
Q= -55°C TO +125°C (POLYCARBONATE)
M= -65°C TO +85°C (POLYTHYLENE TEREPHTHATE)


SHOCK: 100 G, PEAK(MIL-STD-202, METHOD 213)

VIBRATION: 15 G, 10-2000Hz (MIL-STD-202, METHOD 204)

LEAD DIA	CASE DIA
.025	.235 .312
.032	.400 AND ABOVE

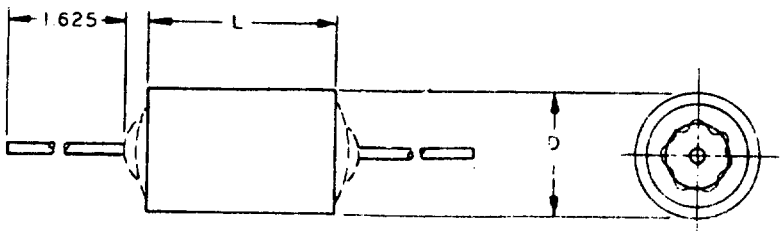

Circuit diagram - 1



PART NUMBER:

CQR09	A	1	K	C	392	K	3	M
ER STYLE	TERMINAL	CIRCUIT	CHARAC-TERISTIC	VOLTAGE	CAPACITANCE	CAPACITANCE TOLERANCE	VIBRATION GRADE	FAILURE RATE
	AXIAL LEAD	1,3	K	C=200 E=400 F=600 G=1000		F=±1% G=±2% J=±5% K=±10%	3	M=1.0 % P=.1 % R=.01 %
		*				*		*

* COMPLETE PART NUMBER INCLUDES ADDITIONAL SYMBOLS TO INDICATE CIRCUIT, CAPACITANCE TOLERANCE AND FAILURE RATE LEVEL. THIS NOTE APPLIES TO ALL TABLE I OF MIL-C-19978.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CQR09 CAPACITORS(PAPER AND POLYETHYLENE TEREPHTHALATE)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR09A-KC392-3-	200	.0039	G,J,K	M,P,R	.750	.688	.235
CQR09A-KC472-3-	200	.0047	G,J,K	M,P,R	.750	.688	.235
CQR09A-KC562-3-	200	.0056	G,J,K	M,P,R	.750	.688	.235
CQR09A-KC682-3-	200	.0068	G,J,K	M,P,R	.750	.688	.235
CQR09A-KC183-3-	200	.0180	G,J,K	M,P,R	.875	.812	.312
CQR09A-KC223-3-	200	.0220	G,J,K	M,P,R	.875	.812	.312
CQR09A-KC273-3-	200	.0270	G,J,K	M,P,R	.875	.812	.312
CQR09A-KC333-3-	200	.0330	G,J,K	M,P,R	.875	.812	.312
CQR09A-KC393-3-	200	.0390	G,J,K	M,P,R	.875	.812	.401
CQR09A-KC473-3-	200	.0470	G,J,K	M,P,R	.875	.812	.400
CQR09A-KC563-3-	200	.0560	G,J,K	M,P,R	.875	.812	.400
CQR09A-KC683-3-	200	.0680	G,J,K	M,P,R	.875	.812	.400
CQR09A-KC823-3-	200	.0820	G,J,K	M,P,R	1.125	1.062	.400
CQR09A-KC104-3-	200	.1000	G,J,K	M,P,R	1.125	1.062	.400
CQR09A-KC124-3-	200	.1200	G,J,K	M,P,R	1.375	1.312	.400
CQR09A-KC154-3-	200	.1500	G,J,K	M,P,R	1.375	1.312	.400
CQR09A-KC184-3-	200	.1800	G,J,K	M,P,R	1.125	1.062	.562
CQR09A-KC224-3-	200	.2200	G,J,K	M,P,R	1.125	1.062	.562
CQR09A-KC274-3-	200	.2700	G,J,K	M,P,R	1.375	1.312	.562
CQR09A-KC334-3-	200	.3300	G,J,K	M,P,R	1.375	1.312	.562
CQR09A-KC394-3-	200	.3900	G,J,K	M,P,R	1.625	1.562	.562
CQR09A-KC474-3-	200	.4700	G,J,K	M,P,R	1.625	1.562	.562
CQR09A-KC564-3-	200	.5600	G,J,K	M,P,R	1.625	1.562	.670
CQR09A-KC684-3-	200	.6800	G,J,K	M,P,R	1.625	1.562	.670
CQR09A-KC824-3-	200	.8200	G,J,K	M,P,R	2.125	2.062	.750
CQR09A-KC105-3-	200	1.0000	G,J,K	M,P,R	2.125	2.062	.750
CQR09A-KE272-3-	400	.0027	G,J,K	M,P,R	.750	.688	.235
CQR09A-KE332-3-	400	.0033	G,J,K	M,P,R	.750	.688	.235
CQR09A-KE123-3-	400	.0120	G,J,K	M,P,R	.875	.812	.312
CQR09A-KE153-3-	400	.0150	G,J,K	M,P,R	.875	.812	.312
CQR09A-KE273-3-	400	.0270	G,J,K	M,P,R	.875	.812	.400
CQR09A-KE333-3-	400	.0330	G,J,K	M,P,R	.875	.812	.400
CQR09A-KE393-3-	400	.0390	G,J,K	M,P,R	1.125	1.062	.400
CQR09A-KE473-3-	400	.0470	G,J,K	M,P,R	1.125	1.062	.400
CQR09A-KE563-3-	400	.0560	G,J,K	M,P,R	1.375	1.312	.400
CQR09A-KE683-3-	400	.0680	G,J,K	M,P,R	1.375	1.312	.400
CQR09A-KE823-3-	400	.0820	G,J,K	M,P,R	1.125	1.062	.562
CQR09A-KE104-3-	400	.1000	G,J,K	M,P,R	1.125	1.062	.562
CQR09A-KE124-3-	400	.1200	G,J,K	M,P,R	1.375	1.312	.562
CQR09A-KE154-3-	400	.1500	G,J,K	M,P,R	1.375	1.312	.562
CQR09A-KE184-3-	400	.1800	G,J,K	M,P,R	1.625	1.562	.562
CQR09A-KE224-3-	400	.2200	G,J,K	M,P,R	1.625	1.562	.562

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/9

TABLE I. STYLE CQR09 CAPACITORS (CONTINUE).

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	µF			INCHES	INCHES	INCHES
CQR09A-KE274-3-	400	.2700	G,J,K	M,P,R	1.625	1.562	.670
CQR09A-KE334-3-	400	.3300	G,J,K	M,P,R	1.625	1.562	.670
CQR09A-KE394-3-	400	.3900	G,J,K	M,P,R	2.125	2.062	.750
CQR09A-KE474-3-	400	.4700	G,J,K	M,P,R	2.125	2.062	.750
CQR09A-KF102-3-	600	.0010	G,J,K	M,P,R	.750	.688	.235
CQR09A-KF122-3-	600	.0012	G,J,K	M,P,R	.750	.688	.235
CQR09A-KF152-3-	600	.0015	G,J,K	M,P,R	.750	.688	.235
CQR09A-KF182-3-	600	.0018	G,J,K	M,P,R	.750	.688	.235
CQR09A-KF222-3-	600	.0022	G,J,K	M,P,R	.750	.688	.235
CQR09A-KF272-3-	600	.0027	G,J,K	M,P,R	.875	.812	.312
CQR09A-KF332-3-	600	.0033	G,J,K	M,P,R	.875	.812	.312
CQR09A-KF392-3-	600	.0039	G,J,K	M,P,R	.875	.812	.312
CQR09A-KF472-3-	600	.0047	G,J,K	M,P,R	.875	.812	.312
CQR09A-KF562-3-	600	.0056	G,J,K	M,P,R	.875	.812	.312
CQR09A-KF682-3-	600	.0068	G,J,K	M,P,R	.875	.812	.312
CQR09A-KF822-3-	600	.0082	G,J,K	M,P,R	.875	.812	.312
CQR09A-KF103-3-	600	.0100	G,J,K	M,P,R	.875	.812	.312
CQR09A-KF123-3-	600	.0120	G,J,K	M,P,R	.875	.812	.400
CQR09A-KF153-3-	600	.0150	G,J,K	M,P,R	.875	.812	.400
CQR09A-KF183-3-	600	.0180	G,J,K	M,P,R	.875	.812	.400
CQR09A-KF223-3-	600	.0220	G,J,K	M,P,R	.875	.812	.400
CQR09A-KF273-3-	600	.0270	G,J,K	M,P,R	1.125	1.062	.400
CQR09A-KF333-3-	600	.0330	G,J,K	M,P,R	1.125	1.062	.400
CQR09A-KF393-3-	600	.0390	G,J,K	M,P,R	1.375	1.312	.400
CQR09A-KF473-3-	600	.0470	G,J,K	M,P,R	1.375	1.312	.400
CQR09A-KF563-3-	600	.0560	G,J,K	M,P,R	1.125	1.062	.562
CQR09A-KF683-3-	600	.0680	G,J,K	M,P,R	1.125	1.062	.562
CQR09A-KF823-3-	600	.0820	G,J,K	M,P,R	1.375	1.312	.562
CQR09A-KF104-3-	600	.1000	G,J,K	M,P,R	1.375	1.312	.562
CQR09A-KF124-3-	600	.1200	G,J,K	M,P,R	1.625	1.562	.562
CQR09A-KF154-3-	600	.1500	G,J,K	M,P,R	1.625	1.562	.562
CQR09A-KF184-3-	600	.1800	G,J,K	M,P,R	1.625	1.562	.670
CQR09A-KF224-3-	600	.2200	G,J,K	M,P,R	1.625	1.562	.670
CQR09A-KF274-3-	600	.2700	G,J,K	M,P,R	2.125	2.062	.750
CQR09A-KF334-3-	600	.3300	G,J,K	M,P,R	2.125	2.062	.750
CQR09A-KF394-3-	600	.3900	G,J,K	M,P,R	2.375	2.312	.750
CQR09A-KF474-3-	600	.4700	G,J,K	M,P,R	2.375	2.312	.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/9

TABLE I. STYLE CQR09 CAPACITORS (CONTINUE).


PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR09A-KG102-3-	1000	.0010	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG122-3-	1000	.0012	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG152-3-	1000	.0015	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG182-3-	1000	.0018	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG222-3-	1000	.0022	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG272-3-	1000	.0027	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG332-3-	1000	.0033	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG392-3-	1000	.0039	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG472-3-	1000	.0047	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG562-3-	1000	.0056	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG682-3-	1000	.0068	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG822-3-	1000	.0082	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG103-3-	1000	.0100	G,J,K	M,P,R	.875	.812	.400
CQR09A-KG123-3-	1000	.0120	G,J,K	M,P,R	1.125	1.062	.400
CQR09A-KG153-3-	1000	.0150	G,J,K	M,P,R	1.125	1.062	.400
CQR09A-KG183-3-	1000	.0180	G,J,K	M,P,R	1.375	1.312	.400
CQR09A-KG223-3-	1000	.0220	G,J,K	M,P,R	1.375	1.312	.400
CQR09A-KG273-3-	1000	.0270	G,J,K	M,P,R	1.125	1.062	.562
CQR09A-KG333-3-	1000	.0330	G,J,K	M,P,R	1.125	1.062	.562
CQR09A-KG393-3-	1000	.0390	G,J,K	M,P,R	1.375	1.312	.562
CQR09A-KG473-3-	1000	.0470	G,J,K	M,P,R	1.375	1.312	.562
CQR09A-KG563-3-	1000	.0560	G,J,K	M,P,R	1.625	1.562	.562
CQR09A-KG683-3-	1000	.0680	G,J,K	M,P,R	1.625	1.562	.562
CQR09A-KG823-3-	1000	.0820	G,J,K	M,P,R	1.625	1.562	.670
CQR09A-KG104-3-	1000	.1000	G,J,K	M,P,R	1.625	1.562	.670
CQR09A-KG124-3-	1000	.1200	G,J,K	M,P,R	1.875	1.812	.670
CQR09A-KG154-3-	1000	.1500	G,J,K	M,P,R	1.875	1.812	.670
CQR09A-KG184-3-	1000	.1800	G,J,K	M,P,R	2.125	2.062	.750
CQR09A-KG224-3-	1000	.2200	G,J,K	M,P,R	2.125	2.062	.750
CQR09A-KG274-3-	1000	.2700	G,J,K	M,P,R	2.125	2.062	1.000
CQR09A-KG334-3-	1000	.3300	G,J,K	M,P,R	2.125	2.062	1.000
CQR09A-KG394-3-	1000	.3900	G,J,K	M,P,R	2.375	2.312	1.000
CQR09A-KG474-3-	1000	.4700	G,J,K	M,P,R	2.375	2.312	1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, PLASTIC DIELECTRIC, AXIAL-WIRE TERMINAL

MIL-C-19978/8

STYLE CQR07

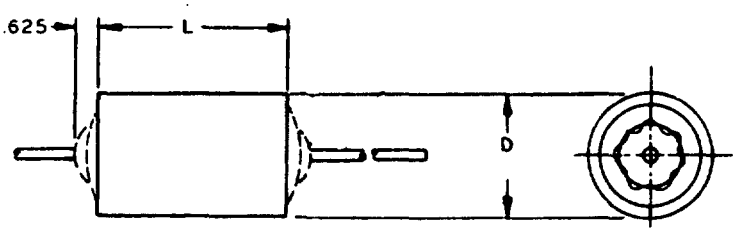

LEAD DIA	CASE DIA
.020	.175 .195
.025	.235 .312
.032	.400 AND ABOVE

Circuit diagram - 1

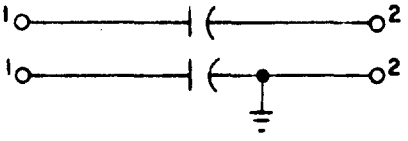


TABLE I. STYLE CQR07 CAPACITORS(POLYCARBONATE).

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAIURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR07A-QA392-3-	50	.0039	J,K	M,P,R	.750	.688	.175
CQR07A-QA472-3-	50	.0047	J,K	M,P,R	.750	.688	.175
CQR07A-QA562-3-	50	.0056	J,K	M,P,R	.750	.688	.195
CQR07A-QA682-3-	50	.0068	J,K	M,P,R	.750	.688	.195
CQR07A-QA393-3-	50	.0390	J,K	M,P,R	.875	.812	.312
CQR07A-QA473-3-	50	.0470	J,K	M,P,R	.875	.812	.312
CQR07A-QA563-3-	50	.0560	J,K	M,P,R	.875	.812	.400
CQR07A-QA683-3-	50	.0680	J,K	M,P,R	.875	.812	.400
CQR07A-QA823-3-	50	.0820	J,K	M,P,R	.875	.812	.400
CQR07A-QA104-3-	50	.1000	J,K	M,P,R	.875	.812	.400
CQR07A-QA124-3-	50	.1200	J,K	M,P,R	1.375	1.312	.400
CQR07A-QA154-3-	50	.1500	J,K	M,P,R	1.375	1.312	.400
CQR07A-QA184-3-	50	.1800	J,K	M,P,R	1.125	1.062	.562
CQR07A-QA224-3-	50	.2200	J,K	M,P,R	1.125	1.062	.562
CQR07A-QA274-3-	50	.2700	J,K	M,P,R	1.375	1.312	.562
CQR07A-QA334-3-	50	.3300	J,K	M,P,R	1.375	1.312	.562
CQR07A-QA394-3-	50	.3900	J,K	M,P,R	1.875	1.812	.562
CQR07A-QA474-3-	50	.4700	J,K	M,P,R	1.875	1.812	.562
CQR07A-QA564-3-	50	.5600	J,K	M,P,R	1.875	1.812	.670
CQR07A-QA684-3-	50	.6800	J,K	M,P,R	1.875	1.812	.670

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CQR07 CAPACITORS (CONTINUE).

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR07A-QA824-3-	50	.8200	J,K	M,P,R	1.875	1.812	.750
CQR07A-QA105-3-	50	1.0000	J,K	M,P,R	1.875	1.812	.750
CQR07A-QB222-3-	100	.0022	J,K	M,P,R	.750	.688	.175
CQR07A-QB272-3-	100	.0027	J,K	M,P,R	.750	.688	.175
CQR07A-QB332-3-	100	.0033	J,K	M,P,R	.750	.688	.175
CQR07A-QB392-3-	100	.0039	J,K	M,P,R	.750	.688	.195
CQR07A-QB472-3-	100	.0047	J,K	M,P,R	.750	.688	.195
CQR07A-QB562-3-	100	.0056	J,K	M,P,R	.750	.688	.235
CQR07A-QB682-3-	100	.0068	J,K	M,P,R	.750	.688	.235
CQR07A-QB822-3-	100	.0082	J,K	M,P,R	.750	.688	.235
CQR07A-QB103-3-	100	.0100	J,K	M,P,R	.750	.688	.235
CQR07A-QB183-3-	100	.0180	J,K	M,P,R	.875	.812	.312
CQR07A-QB223-3-	100	.0220	J,K	M,P,R	.875	.812	.312
CQR07A-QB273-3-	100	.0270	J,K	M,P,R	.875	.812	.312
CQR07A-QB333-3-	100	.0330	J,K	M,P,R	.875	.812	.312
CQR07A-QB393-3-	100	.0390	J,K	M,P,R	.875	.812	.400
CQR07A-QB473-3-	100	.0470	J,K	M,P,R	.875	.812	.400
CQR07A-QB563-3-	100	.0560	J,K	M,P,R	1.125	1.062	.400
CQR07A-QB683-3-	100	.0680	J,K	M,P,R	1.125	1.062	.400
CQR07A-QB823-3-	100	.0820	J,K	M,P,R	1.125	1.062	.400
CQR07A-QB104-3-	100	.1000	J,K	M,P,R	1.125	1.062	.400
CQR07A-QB124-3-	100	.1200	J,K	M,P,R	1.375	1.312	.562
CQR07A-QB154-3-	100	.1500	J,K	M,P,R	1.375	1.312	.562
CQR07A-QB184-3-	100	.1800	J,K	M,P,R	1.625	1.562	.562
CQR07A-QB224-3-	100	.2200	J,K	M,P,R	1.625	1.562	.562
CQR07A-QB274-3-	100	.2700	J,K	M,P,R	1.625	1.562	.670
CQR07A-QB334-3-	100	.3300	J,K	M,P,R	1.625	1.562	.670
CQR07A-QB394-3-	100	.3900	J,K	M,P,R	1.875	1.812	.750
CQR07A-QB474-3-	100	.4700	J,K	M,P,R	1.875	1.812	.750
CQR07A-QB564-3-	100	.5600	J,K	M,P,R	2.375	2.312	.750
CQR07A-QB684-3-	100	.6800	J,K	M,P,R	2.375	2.312	.750
CQR07A-QB824-3-	100	.8200	J,K	M,P,R	1.875	1.812	1.000
CQR07A-QB105-3-	100	1.0000	J,K	M,P,R	1.875	1.812	1.000
CQR07A-QC102-3-	200	.0010	J,K	M,P,R	.750	.688	.175
CQR07A-QC122-3-	200	.0012	J,K	M,P,R	.750	.688	.195
CQR07A-QC152-3-	200	.0015	J,K	M,P,R	.750	.688	.195
CQR07A-QC182-3-	200	.0018	J,K	M,P,R	.750	.688	.195
CQR07A-QC222-3-	200	.0022	J,K	M,P,R	.750	.688	.195
CQR07A-QC272-3-	200	.0027	J,K	M,P,R	.750	.688	.235
CQR07A-QC332-3-	200	.0033	J,K	M,P,R	.750	.688	.235
CQR07A-QC822-3-	200	.0082	J,K	M,P,R	.875	.812	.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CQR07 CAPACITORS (CONTINUED).

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	µF			INCHES	INCHES	INCHES
CQR07A-QC103-3-	200	.0100	J,K	M,P,R	.875	.812	.312
CQR07A-QC123-3-	200	.0120	J,K	M,P,R	.875	.812	.312
CQR07A-QC153-3-	200	.0150	J,K	M,P,R	.875	.812	.312
CQR07A-QC183-3-	200	.0180	J,K	M,P,R	.875	.812	.400
CQR07A-QC223-3-	200	.0220	J,K	M,P,R	.875	.812	.400
CQR07A-QC273-3-	200	.0270	J,K	M,P,R	1.125	1.062	.400
CQR07A-QC333-3-	200	.0330	J,K	M,P,R	1.125	1.062	.400
CQR07A-QC393-3-	200	.0390	J,K	M,P,R	1.125	1.062	.400
CQR07A-QC473-3-	200	.0470	J,K	M,P,R	1.125	1.062	.400
CQR07A-QC563-3-	200	.0560	J,K	M,P,R	1.125	1.062	.500
CQR07A-QC683-3-	200	.0680	J,K	M,P,R	1.125	1.062	.500
CQR07A-QC823-3-	200	.0820	J,K	M,P,R	1.125	1.062	.562
CQR07A-QC104-3-	200	.1000	J,K	M,P,R	1.125	1.062	.562
CQR07A-QC124-3-	200	.1200	J,K	M,P,R	1.875	1.812	.562
CQR07A-QC154-3-	200	.1500	J,K	M,P,R	1.875	1.812	.562
CQR07A-QC184-3-	200	.1800	J,K	M,P,R	1.875	1.812	.670
CQR07A-QC224-3-	200	.2200	J,K	M,P,R	1.875	1.812	.670
CQR07A-QC274-3-	200	.2700	J,K	M,P,R	2.125	2.062	.750
CQR07A-QC334-3-	200	.3300	J,K	M,P,R	2.125	2.062	.750
CQR07A-QC394-3-	200	.3900	J,K	M,P,R	1.875	1.812	1.000
CQR07A-QC474-3-	200	.4700	J,K	M,P,R	1.875	1.812	1.000
CQR07A-QC564-3-	200	.5600	J,K	M,P,R	2.125	2.062	1.000
CQR07A-QC684-3-	200	.6800	J,K	M,P,R	2.125	2.062	1.000
CQR07A-QE122-3-	400	.0012	J,K	M,P,R	.750	.688	.235
CQR07A-QE152-3-	400	.0015	J,K	M,P,R	.750	.688	.235
CQR07A-QE392-3-	400	.0039	J,K	M,P,R	.875	.812	.312
CQR07A-QE472-3-	400	.0047	J,K	M,P,R	.875	.812	.312
CQR07A-QE562-3-	400	.0056	J,K	M,P,R	.875	.812	.312
CQR07A-QE682-3-	400	.0068	J,K	M,P,R	.875	.812	.31
CQR07A-QE822-3-	400	.0082	J,K	M,P,R	.875	.812	.400
CQR07A-QE103-3-	400	.0100	J,K	M,P,R	.875	.812	.400
CQR07A-QE123-3-	400	.0120	J,K	M,P,R	1.125	1.062	.400
CQR07A-QE153-3-	400	.0150	J,K	M,P,R	1.125	1.062	.400
CQR07A-QE183-3-	400	.0180	J,K	M,P,R	1.375	1.312	.400
CQR07A-QE223-3-	400	.0220	J,K	M,P,R	1.375	1.312	.400
CQR07A-QE273-3-	400	.0270	J,K	M,P,R	1.125	1.062	.500
CQR07A-QE333-3-	400	.0330	J,K	M,P,R	1.125	1.062	.500
CQR07A-QE393-3-	400	.0390	J,K	M,P,R	1.125	1.062	.562
CQR07A-QE473-3-	400	.0470	J,K	M,P,R	1.125	1.062	.56
CQR07A-QE563-3-	400	.0560	J,K	M,P,R	1.375	1.312	.562
CQR07A-QE683-3-	400	.0680	J,K	M,P,R	1.375	1.312	.562
CQR07A-QE823-3-	400	.0820	J,K	M,P,R	1.625	1.562	.670
CQR07A-QE104-3-	400	.1000	J,K	M,P,R	1.625	1.562	.67

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


TABLE I. STYLE CQR07 CAPACITORS (CONTINUED).

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L+.031	CIRCUIT 3 L+.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR07A-QE124-3-	400	.1200	J,K	M,P,R	2.125	2.062	.750
CQR07A-QE154-3-	400	.1500	J,K	M,P,R	2.125	2.062	.750
CQR07A-QE184-3-	400	.1800	J,K	M,P,R	2.625	2.562	.750
CQR07A-QE224-3-	400	.2200	J,K	M,P,R	2.625	2.562	.750
CQR07A-QE274-3-	400	.2700	J,K	M,P,R	2.125	2.062	1.000
CQR07A-QE334-3-	400	.3300	J,K	M,P,R	2.125	2.062	1.000
CQR07A-QE394-3-	400	.3900	J,K	M,P,R	2.625	2.562	1.000
CQR07A-QE474-3-	400	.4700	J,K	M,P,R	2.625	2.562	1.000
CQR07A-QF102-3-	600	.0010	J,K	M,P,R	.750	.688	.235
CQR07A-QF122-3-	600	.0012	J,K	M,P,R	.875	.812	.312
CQR07A-QF152-3-	600	.0015	J,K	M,P,R	.875	.812	.312
CQR07A-QF182-3-	600	.0018	J,K	M,P,R	.875	.812	.312
CQR07A-QF222-3-	600	.0022	J,K	M,P,R	.875	.812	.312
CQR07A-QF272-3-	600	.0027	J,K	M,P,R	.875	.812	.312
CQR07A-QF332-3-	600	.0033	J,K	M,P,R	.875	.812	.312
CQR07A-QF392-3-	600	.0039	J,K	M,P,R	.875	.812	.400
CQR07A-QF472-3-	600	.0047	J,K	M,P,R	.875	.812	.400
CQR07A-QF562-3-	600	.0056	J,K	M,P,R	1.125	1.062	.400
CQR07A-QF682-3-	600	.0068	J,K	M,P,R	1.125	1.062	.400
CQR07A-QF822-3-	600	.0082	J,K	M,P,R	1.125	1.062	.400
CQR07A-QF103-3-	600	.0100	J,K	M,P,R	1.125	1.062	.400
CQR07A-QF123-3-	600	.0120	J,K	M,P,R	1.125	1.062	.500
CQR07A-QF153-3-	600	.0150	J,K	M,P,R	1.125	1.062	.500
CQR07A-QF183-3-	600	.0180	J,K	M,P,R	1.125	1.062	.562
CQR07A-QF223-3-	600	.0220	J,K	M,P,R	1.125	1.062	.562
CQR07A-QF273-3-	600	.0270	J,K	M,P,R	1.375	1.312	.562
CQR07A-QF333-3-	600	.0330	J,K	M,P,R	1.375	1.312	.562
CQR07A-QF393-3-	600	.0390	J,K	M,P,R	1.625	1.562	.562
CQR07A-QF473-3-	600	.0470	J,K	M,P,R	1.625	1.562	.562
CQR07A-QF563-3-	600	.0560	J,K	M,P,R	1.625	1.562	.670
CQR07A-QF683-3-	600	.0680	J,K	M,P,R	1.625	1.562	.670
CQR07A-QF823-3-	600	.0820	J,K	M,P,R	1.875	1.812	.750
CQR07A-QF104-3-	600	.1000	J,K	M,P,R	1.875	1.812	.750
CQR07A-QF124-3-	600	.1200	J,K	M,P,R	1.875	1.812	1.000
CQR07A-QF154-3-	600	.1500	J,K	M,P,R	1.875	1.812	1.000
CQR07A-QF184-3-	600	.1800	J,K	M,P,R	2.625	2.562	1.000
CQR07A-QF224-3-	600	.2200	J,K	M,P,R	2.625	2.562	1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, PLASTIC DIELECTRIC, AXIAL-WIRE TERMINAL
MIL-C-19978/10

STYLE CQR12

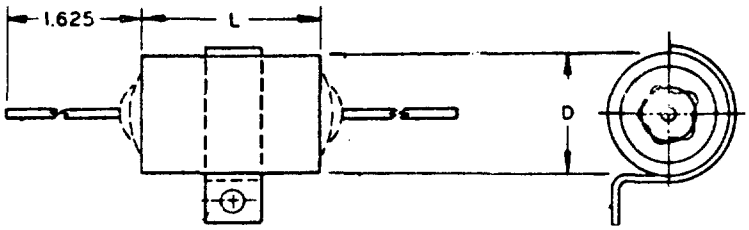

LEAD DIA	CASE DIA
.025	.235 .312
.032	.400 AND ABOVE

Circuit diagram - 1

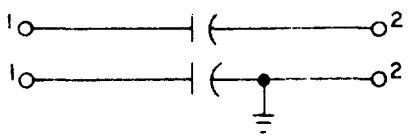


TABLE I. STYLE CQR12 CAPACITOR(PAPER AND POLYETHYLENE TEREPHTHALATE).

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR12A-KC392-3-	200	.0039	G,J,K	M,P,R	.750	.688	.235
CQR12A-KC472-3-	200	.0047	G,J,K	M,P,R	.750	.688	.235
CQR12A-KC562-3-	200	.0056	G,J,K	M,P,R	.750	.688	.235
CQR12A-KC682-3-	200	.0068	G,J,K	M,P,R	.750	.688	.235
CQR12A-KC183-3-	200	.0180	G,J,K	M,P,R	.875	.812	.312
CQR12A-KC223-3-	200	.0220	G,J,K	M,P,R	.875	.812	.312
CQR12A-KC273-3-	200	.0270	G,J,K	M,P,R	.875	.812	.312
CQR12A-KC333-3-	200	.0330	G,J,K	M,P,R	.875	.812	.312
CQR12A-KC393-3-	200	.0390	G,J,K	M,P,R	.875	.812	.400
CQR12A-KC473-3-	200	.0470	G,J,K	M,P,R	.875	.812	.400
CQR12A-KC563-3-	200	.0560	G,J,K	M,P,R	.875	.812	.400
CQR12A-KC683-3-	200	.0680	G,J,K	M,P,R	.875	.812	.400
CQR12A-KC823-3-	200	.0820	G,J,K	M,P,R	1.125	1.062	.400
CQR12A-KC104-3-	200	.1000	G,J,K	M,P,R	1.125	1.062	.400
CQR12A-KC124-3-	200	.1200	G,J,K	M,P,R	1.375	1.312	.400
CQR12A-KC154-3-	200	.1500	G,J,K	M,P,R	1.375	1.312	.400
CQR12A-KC184-3-	200	.1800	G,J,K	M,P,R	1.125	1.062	.562
CQR12A-KC224-3-	200	.2200	G,J,K	M,P,R	1.125	1.062	.562
CQR12A-KC274-3-	200	.2700	G,J,K	M,P,R	1.375	1.312	.562
CQR12A-KC334-3-	200	.3300	G,J,K	M,P,R	1.375	1.312	.562
CQR12A-KC394-3-	200	.3900	G,J,K	M,P,R	1.625	1.562	.562
CQR12A-KC474-3-	200	.4700	G,J,K	M,P,R	1.625	1.562	.562
CQR12A-KC564-3-	200	.5600	G,J,K	M,P,R	1.625	1.562	.670
CQR12A-KC684-3-	200	.6800	G,J,K	M,P,R	1.625	1.562	.670
CQR12A-KC824-3-	200	.8200	G,J,K	M,P,R	2.125	2.062	.750
CQR12A-KC105-3-	200	1.0000	G,J,K	M,P,R	2.125	2.062	.750

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL- C- 19978/10

TABLE I. STYLE CQR12 CAPACITORS (CONTINUED).

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR12A-KE272-3-	400	.0027	G,J,K	M,P,R	.750	.688	.235
CQR12A-KE332-3-	400	.0033	G,J,K	M,P,R	.750	.688	.235
CQR12A-KE123-3-	400	.0120	G,J,K	M,P,R	.875	.812	.312
CQR12A-KE153-3-	400	.0150	G,J,K	M,P,R	.875	.812	.312
CQR12A-KE273-3-	400	.0270	G,J,K	M,P,R	.875	.812	.400
CQR12A-KE333-3-	400	.0330	G,J,K	M,P,R	.875	.812	.400
CQR12A-KE393-3-	400	.0390	G,J,K	M,P,R	1.125	1.062	.400
CQR12A-KE473-3-	400	.0470	G,J,K	M,P,R	1.125	1.062	.400
CQR12A-KE563-3-	400	.0560	G,J,K	M,P,R	1.375	1.312	.400
CQR12A-KE683-3-	400	.0680	G,J,K	M,P,R	1.375	1.312	.400
CQR12A-KE823-3-	400	.0820	G,J,K	M,P,R	1.125	1.062	.562
CQR12A-KE104-3-	400	.1000	G,J,K	M,P,R	1.125	1.062	.562
CQR12A-KE124-3-	400	.1200	G,J,K	M,P,R	1.375	1.312	.562
CQR12A-KE154-3-	400	.1500	G,J,K	M,P,R	1.375	1.312	.562
CQR12A-KE184-3-	400	.1800	G,J,K	M,P,R	1.625	1.562	.562
CQR12A-KE224-3-	400	.2200	G,J,K	M,P,R	1.625	1.562	.562
CQR12A-KE274-3-	400	.2700	G,J,K	M,P,R	1.625	1.562	.670
CQR12A-KE334-3-	400	.3300	G,J,K	M,P,R	1.625	1.562	.670
CQR12A-KE394-3-	400	.3900	G,J,K	M,P,R	2.125	2.062	.750
CQR12A-KE474-3-	400	.4700	G,J,K	M,P,R	2.125	2.062	.750
CQR12A-KF102-3-	600	.0010	G,J,K	M,P,R	.750	.688	.235
CQR12A-KF122-3-	600	.0012	G,J,K	M,P,R	.750	.688	.235
CQR12A-KF152-3-	600	.0015	G,J,K	M,P,R	.750	.688	.235
CQR12A-KF182-3-	600	.0018	G,J,K	M,P,R	.750	.688	.235
CQR12A-KF222-3-	600	.0022	G,J,K	M,P,R	.750	.688	.235
CQR12A-KF272-3-	600	.0027	G,J,K	M,P,R	.875	.812	.312
CQR12A-KF332-3-	600	.0033	G,J,K	M,P,R	.875	.812	.312
CQR12A-KF392-3-	600	.0039	G,J,K	M,P,R	.875	.812	.312
CQR12A-KF472-3-	600	.0047	G,J,K	M,P,R	.875	.812	.312
CQR12A-KF562-3-	600	.0056	G,J,K	M,P,R	.875	.812	.312
CQR12A-KF682-3-	600	.0068	G,J,K	M,P,R	.875	.812	.312
CQR12A-KF822-3-	600	.0082	G,J,K	M,P,R	.875	.812	.312
CQR12A-KF103-3-	600	.0100	G,J,K	M,P,R	.875	.812	.312
CQR12A-KF123-3-	600	.0120	G,J,K	M,P,R	.875	.812	.400
CQR12A-KF153-3-	600	.0150	G,J,K	M,P,R	.875	.812	.400
CQR12A-KF183-3-	600	.0180	G,J,K	M,P,R	.875	.812	.400
CQR12A-KF223-3-	600	.0220	G,J,K	M,P,R	.875	.812	.400
CQR12A-KF273-3-	600	.0270	G,J,K	M,P,R	1.125	1.062	.400
CQR12A-KF333-3-	600	.0330	G,J,K	M,P,R	1.125	1.062	.400
CQR12A-KF393-3-	600	.0390	G,J,K	M,P,R	1.375	1.312	.400
CQR12A-KF473-3-	600	.0470	G,J,K	M,P,R	1.375	1.312	.400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CQR12 CAPACITORS (CONTINUED).


PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR12A-KF563-3-	600	.0560	G,J,K	M,P,R	1.125	1.062	.562
CQR12A-KF683-3-	600	.0680	G,J,K	M,P,R	1.125	1.062	.562
CQR12A-KF823-3-	600	.0820	G,J,K	M,P,R	1.375	1.312	.562
CQR12A-KF104-3-	600	.1000	G,J,K	M,P,R	1.375	1.312	.562
CQR12A-KF124-3-	600	.1200	G,J,K	M,P,R	1.625	1.562	.562
CQR12A-KF154-3-	600	.1500	G,J,K	M,P,R	1.625	1.562	.562
CQR12A-KF184-3-	600	.1800	G,J,K	M,P,R	1.625	1.562	.670
CQR12A-KF224-3-	600	.2200	G,J,K	M,P,R	1.625	1.562	.670
CQR12A-KF274-3-	600	.2700	G,J,K	M,P,R	2.125	2.062	.750
CQR12A-KF334-3-	600	.3300	G,J,K	M,P,R	2.125	2.062	.750
CQR12A-KF394-3-	600	.3900	G,J,K	M,P,R	2.375	2.312	.750
CQR12A-KF474-3-	600	.4700	G,J,K	M,P,R	2.375	2.312	.750
CQR12A-KG102-3-	1000	.0010	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG122-3-	1000	.0012	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG152-3-	1000	.0015	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG182-3-	1000	.0018	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG222-3-	1000	.0022	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG272-3-	1000	.0027	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG332-3-	1000	.0033	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG392-3-	1000	.0039	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG472-3-	1000	.0047	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG562-3-	1000	.0056	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG682-3-	1000	.0068	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG822-3-	1000	.0082	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG103-3-	1000	.0100	G,J,K	M,P,R	.875	.812	.400
CQR12A-KG123-3-	1000	.0120	G,J,K	M,P,R	1.125	1.062	.400
CQR12A-KG153-3-	1000	.0150	G,J,K	M,P,R	1.125	1.062	.400
CQR12A-KG183-3-	1000	.0180	G,J,K	M,P,R	1.375	1.312	.400
CQR12A-KG223-3-	1000	.0220	G,J,K	M,P,R	1.375	1.312	.400
CQR12A-KG273-3-	1000	.0270	G,J,K	M,P,R	1.125	1.062	.562
CQR12A-KG333-3-	1000	.0330	G,J,K	M,P,R	1.125	1.062	.562
CQR12A-KG393-3-	1000	.0390	G,J,K	M,P,R	1.375	1.312	.562
CQR12A-KG473-3-	1000	.0470	G,J,K	M,P,R	1.375	1.312	.562
CQR12A-KG563-3-	1000	.0560	G,J,K	M,P,R	1.625	1.562	.562
CQR12A-KG683-3-	1000	.0680	G,J,K	M,P,R	1.625	1.562	.562
CQR12A-KG823-3-	1000	.0820	G,J,K	M,P,R	1.625	1.562	.670
CQR12A-KG104-3-	1000	.1000	G,J,K	M,P,R	1.625	1.562	.670
CQR12A-KG124-3-	1000	.1200	G,J,K	M,P,R	1.875	1.812	.670
CQR12A-KG154-3-	1000	.1500	G,J,K	M,P,R	1.875	1.812	.670
CQR12A-KG184-3-	1000	.1800	G,J,K	M,P,R	2.125	2.062	.750
CQR12A-KG224-3-	1000	.2200	G,J,K	M,P,R	2.125	2.062	.750
CQR12A-KG274-3-	1000	.2700	G,J,K	M,P,R	2.125	2.062	1.000
CQR12A-KG334-3-	1000	.3300	G,J,K	M,P,R	2.125	2.062	1.000
CQR12A-KG394-3-	1000	.3900	G,J,K	M,P,R	2.375	2.312	1.000
CQR12A-KG474-3-	1000	.4700	G,J,K	M,P,R	2.375	2.312	1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, FIXED, PLASTIC (OR PAPER-PLASTIC) DIELECTRIC

MIL-C-19978/11

STYLE CQR13

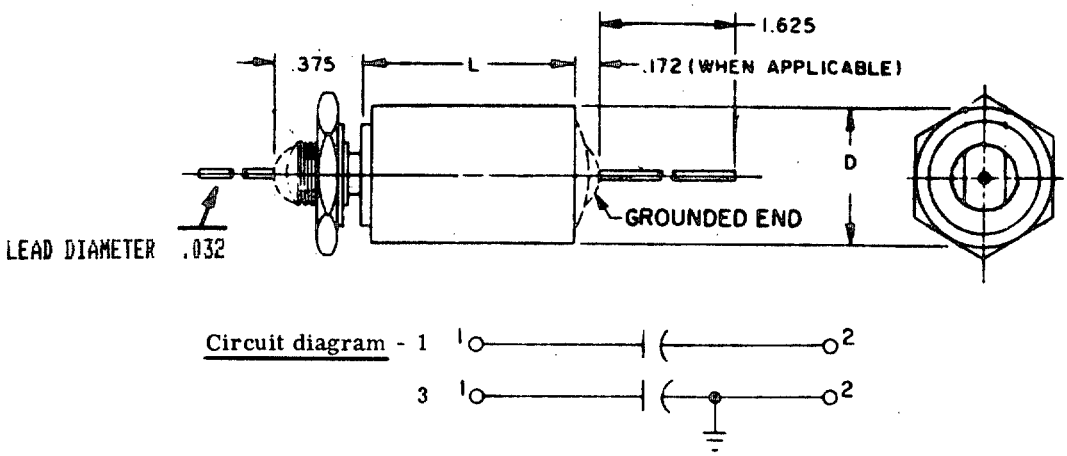

Circuit diagram - 1

3

TABLE I. STYLE CQR13 CAPACITORS(PAPER AND POLYETHYLENE TEREPHTHALATE)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	µF			INCHES	INCHES	INCHES
CQR13A-KC392-3-	200	.0039	G,J,K	M,P,R	.750	.688	.400
CQR13A-KC472-3-	200	.0047	G,J,K	M,P,R	.750	.688	.400
CQR13A-KC562-3-	200	.0056	G,J,K	M,P,R	.750	.688	.400
CQR13A-KC682-3-	200	.0068	G,J,K	M,P,R	.750	.688	.400
CQR13A-KC183-3-	200	.0180	G,J,K	M,P,R	.875	.812	.400
CQR13A-KC223-3	200	.0220	G,J,K	M,P,R	.875	.812	.400
CQR13A-KC273-3-	200	.0270	G,J,K	M,P,R	.875	.812	.400
CQR13A-KC333-3-	200	.0330	G,J,K	M,P,R	.875	.812	.400
CQR13A-KC393-3-	200	.0390	G,J,K	M,P,R	.875	.812	.400
CQR13A-KC473-3-	200	.0470	G,J,K	M,P,R	.875	.812	.400
CQR13A-KC563-3-	200	.0560	G,J,K	M,P,R	.875	.812	.400
CQR13A-KC683-3-	200	.0680	G,J,K	M,P,R	.875	.812	.400
CQR13A-KC823-3-	200	.0820	G,J,K	M,P,R	1.125	1.062	.400
CQR13A-KC104-3-	200	.1000	G,J,K	M,P,R	1.125	1.062	.400
CQR13A-KC124-3-	200	.1200	G,J,K	M,P,R	1.375	1.312	.400
CQR13A-KC154-3-	200	.1500	G,J,K	M,P,R	1.375	1.312	.400
CQR13A-KC184-3-	200	.1800	G,J,K	M,P,R	1.125	1.062	.562

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CQR13 CAPACITORS(PAPER AND POLYETHYLENE TEREPHTHALATE) CONTINUED.

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR13A-KC224-3-	200	.2200	G,J,K	M,P,R	1.125	1.062	.562
CQR13A-KC274-3-	200	.2700	G,J,K	M,P,R	1.375	1.312	.562
CQR13A-KC334-3-	200	.3300	G,J,K	M,P,R	1.375	1.312	.562
CQR13A-KC394-3-	200	.3900	G,J,K	M,P,R	1.625	1.562	.562
CQR13A-KC474-3-	200	.4700	G,J,K	M,P,R	1.625	1.562	.562
CQR13A-KC564-3-	200	.5600	G,J,K	M,P,R	1.625	1.562	.670
CQR13A-KC684-3-	200	.6800	G,J,K	M,P,R	1.625	1.562	.670
CQR13A-KC824-3-	200	.8200	G,J,K	M,P,R	2.125	2.062	.750
CQR13A-KC105-3-	200	1.0000	G,J,K	M,P,R	2.125	2.062	.750
CQR13A-KE272-3-	400	.0027	G,J,K	M,P,R	.750	.688	.400
CQR13A-KE332-3-	400	.0033	G,J,K	M,P,R	.750	.688	.400
CQR13A-KE123-3-	400	.0120	G,J,K	M,P,R	.875	.812	.400
CQR13A-KE153-3-	400	.0150	G,J,K	M,P,R	.875	.812	.400
CQR13A-KE273-3-	400	.0270	G,J,K	M,P,R	.875	.812	.400
CQR13A-KE333-3-	400	.0330	G,J,K	M,P,R	.875	.812	.400
CQR13A-KE393-3-	400	.0390	G,J,K	M,P,R	1.125	1.062	.400
CQR13A-KE473-3-	400	.0470	G,J,K	M,P,R	1.125	1.062	.400
CQR13A-KE563-3-	400	.0560	G,J,K	M,P,R	1.375	1.312	.400
CQR13A-KE683-3-	400	.0680	G,J,K	M,P,R	1.375	1.312	.400
CQR13A-KE823-3-	400	.0820	G,J,K	M,P,R	1.125	1.062	.562
CQR13A-KE104-3-	400	.1000	G,J,K	M,P,R	1.125	1.062	.562
CQR13A-KE124-3-	400	.1200	G,J,K	M,P,R	1.375	1.312	.562
CQR13A-KE154-3-	400	.1500	G,J,K	M,P,R	1.375	1.312	.562
CQR13A-KE184-3-	400	.1800	G,J,K	M,P,R	1.625	1.562	.562
CQR13A-KE224-3-	400	.2200	G,J,K	M,P,R	1.625	1.562	.562
CQR13A-KE274-3-	400	.2700	G,J,K	M,P,R	1.625	1.562	.670
CQR13A-KE334-3-	400	.3300	G,J,K	M,P,R	1.625	1.562	.670
CQR13A-KE394-3-	400	.3900	G,J,K	M,P,R	2.125	2.062	.750
CQR13A-KE474-3-	400	.4700	G,J,K	M,P,R	2.125	2.062	.750
CQR13A-KF102-3-	600	.0010	G,J,K	M,P,R	.750	.688	.400
CQR13A-KF122-3-	600	.0012	G,J,K	M,P,R	.750	.688	.400
CQR13A-KF152-3-	600	.0015	G,J,K	M,P,R	.750	.688	.400
CQR13A-KF182-3-	600	.0018	G,J,K	M,P,R	.750	.688	.400
CQR13A-KF222-3-	600	.0022	G,J,K	M,P,R	.750	.688	.400
CQR13A-KF272-3-	600	.0027	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF332-3-	600	.0033	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF392-3-	600	.0039	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF472-3-	600	.0047	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF562-3-	600	.0056	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF682-3-	600	.0068	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF822-3-	600	.0082	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF103-3-	600	.0100	G,J,K	M,P,R	.875	.812	.400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


TABLE I. STYLE CQR13 CAPACITORS(PAPER AND POLYETHYLENE TEREPHTHALATE) CONTINUED.

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	µF			INCHES	INCHES	INCHES
CQR13A-KF123-3-	600	.0120	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF153-3-	600	.0150	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF183-3-	600	.0180	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF223-3-	600	.0220	G,J,K	M,P,R	.875	.812	.400
CQR13A-KF273-3-	600	.0270	G,J,K	M,P,R	1.125	1.062	.400
CQR13A-KF333-3-	600	.0330	G,J,K	M,P,R	1.125	1.062	.400
CQR13A-KF393-3-	600	.0390	G,J,K	M,P,R	1.375	1.312	.400
CQR13A-KF473-3-	600	.0470	G,J,K	M,P,R	1.375	1.312	.400
CQR13A-KF563-3-	600	.0560	G,J,K	M,P,R	1.125	1.062	.562
CQR13A-KF683-3-	600	.0680	G,J,K	M,P,R	1.125	1.062	.562
CQR13A-KF823-3-	600	.0820	G,J,K	M,P,R	1.375	1.312	.562
CQR13A-KF104-3-	600	.1000	G,J,K	M,P,R	1.375	1.312	.562
CQR13A-KF124-3-	600	.1200	G,J,K	M,P,R	1.625	1.562	.562
CQR13A-KF154-3-	600	.1500	G,J,K	M,P,R	1.625	1.562	.562
CQR13A-KF184-3-	600	.1800	G,J,K	M,P,R	1.625	1.562	.670
CQR13A-KF224-3-	600	.2200	G,J,K	M,P,R	1.625	1.562	.670
CQR13A-KF274-3-	600	.2700	G,J,K	M,P,R	2.125	2.062	.750
CQR13A-KF334-3-	600	.3300	G,J,K	M,P,R	2.125	2.062	.750
CQR13A-KF394-3-	600	.3900	G,J,K	M,P,R	2.375	2.312	.750
CQR13A-KF474-3-	600	.4700	G,J,K	M,P,R	2.375	2.312	.750
CQR13A-KG184-3-	1000	.1800	G,J,K	M,P,R	2.125	2.062	.750
CQR13A-KG224-3-	1000	.2200	G,J,K	M,P,R	2.125	2.062	.750
CQR13A-KG274-3-	1000	.2700	G,J,K	M,P,R	2.125	2.062	1.00
CQR13A-KG334-3-	1000	.3300	G,J,K	M,P,R	2.125	2.062	1.000
CQR13A-KG394-3-	1000	.3900	G,J,K	M,P,R	2.375	2.312	1.000
CQR13A-KG474-3-	1000	.4700	G,J,K	M,P,R	2.375	2.312	1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, PLASTIC DIELECTRIC, AXIAL-WIRE TERMINAL
MIL-C-19978/13

STYLE CQR29

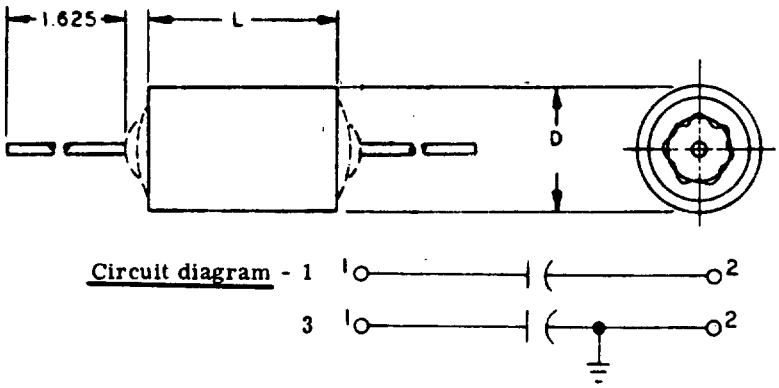

LEAD DIA	CASE DIA
.020	.175 .195
.025	.235 .312
.032	.400 AND ABOVE

TABLE I. STYLE CQR29 CAPACITORS(POLYETHYLENE TEREPHTHALATE)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	µF			INCHES	INCHES	INCHES
CQR29A-MZ155-3-	30	1.5000	G,J,K	M,P,R	1.625	1.531	.562
CQR29A-MZ225-3-	30	2.2000	G,J,K	M,P,R	1.875	1.781	.670
CQR29A-MZ335-3-	30	3.3000	G,J,K	M,P,R	1.875	1.781	.750
CQR29A-MZ475-3-	30	4.7000	G,J,K	M,P,R	2.625	2.531	.750
CQR29A-MZ685-3-	30	6.8000	G,J,K	M,P,R	2.125	2.031	1.000
CQR29A-MZ106-3-	30	10.0000	G,J,K	M,P,R	2.375	2.281	1.000
CQR29A-MA102-3-	50	.0010	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA122-3-	50	.0012	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA152-3-	50	.0015	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA182-3-	50	.0018	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA222-3-	50	.0022	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA272-3-	50	.0027	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA332-3-	50	.0033	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA392-3-	50	.0039	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA472-3-	50	.0047	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA562-3-	50	.0056	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA682-3-	50	.0068	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA822-3-	50	.0082	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA103-3-	50	.0100	G,J,K	M,P,R	.500	.406	.175
CQR29A-MA123-3-	50	.0120	G,J,K	M,P,R	.500	.406	.235
CQR29A-MA153-3-	50	.0150	G,J,K	M,P,R	.500	.406	.235
CQR29A-MA183-3-	50	.0180	G,J,K	M,P,R	.500	.406	.235
CQR29A-MA223-3-	50	.0220	G,J,K	M,P,R	.500	.406	.235
CQR29A-MA273-3-	50	.0270	G,J,K	M,P,R	.500	.406	.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/13
TABLE I. STYLE CQR29 CAPACITORS (CONTINUED)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR29A-MA333-3-	50	.0330	G,J,K	M,P,R	.500	.406	.312
CQR29A-MA393-3-	50	.0390	G,J,K	M,P,R	.500	.406	.312
CQR29A-MA473-3-	50	.0470	G,J,K	M,P,R	.500	.406	.312
CQR29A-MA563-3-	50	.0560	G,J,K	M,P,R	.562	.468	.312
CQR29A-MA683-3-	50	.0680	G,J,K	M,P,R	.562	.468	.312
CQR29A-MA124-3-	50	.1200	G,J,K	M,P,R	.875	.781	.312
CQR29A-MA154-3-	50	.1500	G,J,K	M,P,R	.875	.781	.312
CQR29A-MA184-3-	50	.1800	G,J,K	M,P,R	.875	.781	.400
CQR29A-MA224-3-	50	.2200	G,J,K	M,P,R	.875	.781	.400
CQR29A-MA274-3-	50	.2700	G,J,K	M,P,R	.875	.781	.400
CQR29A-MA334-3-	50	.3300	G,J,K	M,P,R	1.000	.906	.401
CQR29A-MA394-3-	50	.3900	G,J,K	M,P,R	1.125	1.031	.400
CQR29A-MA474-3-	50	.4700	G,J,K	M,P,R	1.125	1.031	.400
CQR29A-MA564-3-	50	.5600	G,J,K	M,P,R	1.375	1.281	.400
CQR29A-MA684-3-	50	.6800	G,J,K	M,P,R	1.375	1.281	.401
CQR29A-MA824-3-	50	.8200	G,J,K	M,P,R	1.125	1.031	.562
CQR29A-MA105-3-	50	1.0000	G,J,K	M,P,R	1.125	1.031	.562
CQR29A-MA125-3-	50	1.2000	G,J,K	M,P,R	1.375	1.281	.562
CQR29A-MB125-3-	100	1.2000	G,J,K	M,P,R	1.625	1.531	.670
CQR29A-MB155-3-	100	1.5000	G,J,K	M,P,R	1.625	1.531	.670
CQR29A-MB185-3-	100	1.8000	G,J,K	M,P,R	1.625	1.531	.670
CQR29A-MB225-3-	100	2.2000	G,J,K	M,P,R	1.875	1.781	.750
CQR29A-MB275-3-	100	2.7000	G,J,K	M,P,R	2.125	2.031	.750
CQR29A-MB335-3-	100	3.3000	G,J,K	M,P,R	2.375	2.281	.750
CQR29A-MB395-3-	100	3.9000	G,J,K	M,P,R	1.875	1.781	1.000
CQR29A-MB475-3-	100	4.7000	G,J,K	M,P,R	2.125	2.031	1.000
CQR29A-MB565-3-	100	5.6000	G,J,K	M,P,R	2.375	2.281	1.000
CQR29A-MB685-3-	100	6.8000	G,J,K	M,P,R	2.625	2.531	1.000
CQR29A-MC102-3-	200	.0010	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC122-3-	200	.0012	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC152-3-	200	.0015	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC182-3-	200	.0018	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC222-3-	200	.0022	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC272-3-	200	.0027	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC332-3-	200	.0033	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC392-3-	200	.0039	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC472-3-	200	.0047	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC562-3-	200	.0056	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC682-3-	200	.0068	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC822-3-	200	.0082	G,J,K	M,P,R	.750	.656	.175

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/13

TABLE I. STYLE CQR29 CAPACITORS (CONTINUED)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L+.031	DIMENSIONS CIRCUIT 3 L+.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR29A-MC103-3-	200	.0100	G,J,K	M,P,R	.750	.656	.175
CQR29A-MC123-3-	200	.0120	G,J,K	M,P,R	.719	.625	.195
CQR29A-MC153-3-	200	.0150	G,J,K	M,P,R	.719	.625	.195
CQR29A-MC183-3-	200	.0180	G,J,K	M,P,R	.719	.625	.235
CQR29A-MC223-3-	200	.0220	G,J,K	M,P,R	.719	.625	.235
CQR29A-MC273-3-	200	.0270	G,J,K	M,P,R	.719	.625	.235
CQR29A-MC333-3-	200	.0330	G,J,K	M,P,R	.719	.625	.235
CQR29A-MC393-3-	200	.0390	G,J,K	M,P,R	.719	.625	.312
CQR29A-MC473-3-	200	.0470	G,J,K	M,P,R	.719	.625	.312
CQR29A-MC563-3-	200	.0560	G,J,K	M,P,R	.844	.750	.312
CQR29A-MC683-3-	200	.0680	G,J,K	M,P,R	.844	.750	.312
CQR29A-MC823-3-	200	.0820	G,J,K	M,P,R	.844	.750	.312
CQR29A-MC104-3-	200	.1000	G,J,K	M,P,R	.844	.750	.312
CQR29A-MC124-3-	200	.1200	G,J,K	M,P,R	.812	.718	.400
CQR29A-MC154-3-	200	.1500	G,J,K	M,P,R	.812	.718	.400
CQR29A-MC184-3-	200	.1800	G,J,K	M,P,R	1.062	.969	.400
CQR29A-MC224-3-	200	.2200	G,J,K	M,P,R	1.062	.969	.400
CQR29A-MC274-3-	200	.2700	G,J,K	M,P,R	1.250	1.156	.400
CQR29A-MC334-3-	200	.3300	G,J,K	M,P,R	1.250	1.156	.400
CQR29A-MC394-3-	200	.3900	G,J,K	M,P,R	1.188	1.094	.500
CQR29A-MC474-3-	200	.4700	G,J,K	M,P,R	1.188	1.094	.500
CQR29A-MC564-3-	200	.5600	G,J,K	M,P,R	1.375	1.281	.562
CQR29A-MC684-3-	200	.6800	G,J,K	M,P,R	1.375	1.281	.562
CQR29A-MC824-3-	200	.8200	G,J,K	M,P,R	1.875	1.781	.562
CQR29A-MC105-3-	200	1.0000	G,J,K	M,P,R	1.875	1.781	.562
CQR29A-ME102-3-	400	.0010	G,J,K	M,P,R	.812	.718	.235
CQR29A-ME122-3-	400	.0012	G,J,K	M,P,R	.812	.718	.235
CQR29A-ME152-3-	400	.0015	G,J,K	M,P,R	.812	.718	.235
CQR29A-ME182-3-	400	.0018	G,J,K	M,P,R	.812	.718	.235
CQR29A-ME222-3-	400	.0022	G,J,K	M,P,R	.812	.718	.235
CQR29A-ME272-3-	400	.0027	G,J,K	M,P,R	.812	.718	.235
CQR29A-ME332-3-	400	.0033	G,J,K	M,P,R	.812	.718	.235
CQR29A-ME392-3-	400	.0039	G,J,K	M,P,R	.812	.718	.235
CQR29A-ME472-3-	400	.0047	G,J,K	M,P,R	.812	.718	.235
CQR29A-ME562-3-	400	.0056	G,J,K	M,P,R	.938	.844	.312
CQR29A-ME682-3-	400	.0068	G,J,K	M,P,R	.938	.844	.312
CQR29A-ME822-3-	400	.0082	G,J,K	M,P,R	.938	.844	.312
CQR29A-ME103-3-	400	.0100	G,J,K	M,P,R	.938	.844	.312
CQR29A-ME123-3-	400	.0120	G,J,K	M,P,R	.938	.844	.312
CQR29A-ME153-3-	400	.0150	G,J,K	M,P,R	.938	.844	.312
CQR29A-ME183-3-	400	.0180	G,J,K	M,P,R	1.062	.969	.312
CQR29A-ME223-3-	400	.0220	G,J,K	M,P,R	1.062	.969	.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/13

TABLE I. STYLE CQR29 CAPACITORS (CONTINUED)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	µF			INCHES	INCHES	INCHES
CQR29A-ME273-3-	400	.0270	G,J,K	M,P,R	.938	.844	.400
CQR29A-ME333-3-	400	.0330	G,J,K	M,P,R	.938	.844	.400
CQR29A-ME393-3-	400	.0390	G,J,K	M,P,R	1.062	.969	.400
CQR29A-ME473-3-	400	.0470	G,J,K	M,P,R	1.062	.969	.400
CQR29A-ME563-3-	400	.0560	G,J,K	M,P,R	1.250	1.156	.400
CQR29A-ME683-3-	400	.0680	G,J,K	M,P,R	1.250	1.156	.400
CQR29A-ME823-3-	400	.0820	G,J,K	M,P,R	1.562	1.469	.400
CQR29A-ME104-3-	400	.1000	G,J,K	M,P,R	1.562	1.469	.400
CQR29A-ME124-3-	400	.1200	G,J,K	M,P,R	1.281	1.188	.562
CQR29A-ME154-3-	400	.1500	G,J,K	M,P,R	1.281	1.188	.562
CQR29A-ME184-3-	400	.1800	G,J,K	M,P,R	1.531	1.438	.562
CQR29A-ME224-3-	400	.2200	G,J,K	M,P,R	1.531	1.438	.562
CQR29A-ME274-3-	400	.2700	G,J,K	M,P,R	1.906	1.812	.562
CQR29A-ME334-3-	400	.3300	G,J,K	M,P,R	1.906	1.812	.562
CQR29A-ME394-3-	400	.3900	G,J,K	M,P,R	1.906	1.812	.670
CQR29A-ME474-3-	400	.4700	G,J,K	M,P,R	1.906	1.812	.670
CQR29A-ME564-3-	400	.5600	G,J,K	M,P,R	2.156	2.062	.750
CQR29A-ME684-3-	400	.6800	G,J,K	M,P,R	2.156	2.062	.750
CQR29A-ME824-3-	400	.8200	G,J,K	M,P,R	2.656	2.562	.750
CQR29A-ME105-3-	400	1.0000	G,J,K	M,P,R	2.656	2.562	.750
CQR29A-MF102-3-	600	.0010	G,J,K	M,P,R	.812	.718	.235
CQR29A-MF122-3-	600	.0012	G,J,K	M,P,R	.812	.718	.235
CQR29A-MF152-3-	600	.0015	G,J,K	M,P,R	.812	.718	.235
CQR29A-MF182-3-	600	.0018	G,J,K	M,P,R	.812	.718	.235
CQR29A-MF222-3-	600	.0022	G,J,K	M,P,R	.812	.718	.235
CQR29A-MF272-3-	600	.0027	G,J,K	M,P,R	.812	.718	.235
CQR29A-MF332-3-	600	.0033	G,J,K	M,P,R	.938	.844	.312
CQR29A-MF392-3-	600	.0039	G,J,K	M,P,R	.938	.844	.312
CQR29A-MF472-3-	600	.0047	G,J,K	M,P,R	.938	.844	.312
CQR29A-MF562-3-	600	.0056	G,J,K	M,P,R	.938	.844	.312
CQR29A-MF682-3-	600	.0068	G,J,K	M,P,R	.938	.844	.312
CQR29A-MF822-3-	600	.0082	G,J,K	M,P,R	1.062	.969	.312
CQR29A-MF103-3-	600	.0100	G,J,K	M,P,R	1.062	.969	.312
CQR29A-MF123-3-	600	.0120	G,J,K	M,P,R	.938	.844	.400
CQR29A-MF153-3-	600	.0150	G,J,K	M,P,R	.938	.844	.400
CQR29A-MF183-3-	600	.0180	G,J,K	M,P,R	1.062	.969	.400
CQR29A-MF223-3-	600	.0220	G,J,K	M,P,R	1.062	.969	.400
CQR29A-MF273-3-	600	.0270	G,J,K	M,P,R	1.312	1.219	.400
CQR29A-MF333-3-	600	.0330	G,J,K	M,P,R	1.312	1.219	.400
CQR29A-MF393-3-	600	.0390	G,J,K	M,P,R	1.562	1.469	.400
CQR29A-MF473-3-	600	.0470	G,J,K	M,P,R	1.562	1.469	.400
CQR29A-MF563-3-	600	.0560	G,J,K	M,P,R	1.250	1.156	.562

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/13


TABLE I. STYLE CQR29 CAPACITORS (CONTINUED)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR29A-MF683-3-	600	.0680	G,J,K	M,P,R	1.250	1.156	.562
CQR29A-MF823-3-	600	.0820	G,J,K	M,P,R	1.500	1.406	.562
CQR29A-MF104-3-	600	.1000	G,J,K	M,P,R	1.500	1.406	.562
CQR29A-MF124-3-	600	.1200	G,J,K	M,P,R	1.875	1.781	.562
CQR29A-MF154-3-	600	.1500	G,J,K	M,P,R	1.875	1.781	.562
CQR29A-MF184-3-	600	.1800	G,J,K	M,P,R	1.875	1.781	.670
CQR29A-MF224-3-	600	.2200	G,J,K	M,P,R	1.875	1.781	.670
CQR29A-MF274-3-	600	.2700	G,J,K	M,P,R	2.125	2.031	.750
CQR29A-MF334-3-	600	.3300	G,J,K	M,P,R	2.125	2.031	.750
CQR29A-MF394-3-	600	.3900	G,J,K	M,P,R	2.625	2.531	.750
CQR29A-MF474-3-	600	.4700	G,J,K	M,P,R	2.625	2.531	.750
CQR29A-MF564-3-	600	.5600	G,J,K	M,P,R	2.125	2.031	1.000
CQR29A-MF684-3-	600	.6800	G,J,K	M,P,R	2.125	2.031	1.000
CQR29A-MG102-3-	1000	.0010	G,J,K	M,P,R	.938	.844	.312
CQR29A-MG122-3-	1000	.0012	G,J,K	M,P,R	.938	.844	.312
CQR29A-MG152-3-	1000	.0015	G,J,K	M,P,R	.938	.844	.312
CQR29A-MG182-3-	1000	.0018	G,J,K	M,P,R	.938	.844	.312
CQR29A-MG222-3-	1000	.0022	G,J,K	M,P,R	.938	.844	.312
CQR29A-MG272-3-	1000	.0027	G,J,K	M,P,R	.938	.844	.312
CQR29A-MG332-3-	1000	.0033	G,J,K	M,P,R	.938	.844	.312
CQR29A-MG392-3-	1000	.0039	G,J,K	M,P,R	.938	.844	.400
CQR29A-MG472-3-	1000	.0047	G,J,K	M,P,R	.938	.844	.400
CQR29A-MG562-3-	1000	.0056	G,J,K	M,P,R	1.062	.969	.400
CQR29A-MG682-3-	1000	.0068	G,J,K	M,P,R	1.062	.969	.400
CQR29A-MG822-3-	1000	.0082	G,J,K	M,P,R	1.312	1.219	.400
CQR29A-MG103-3-	1000	.0100	G,J,K	M,P,R	1.312	1.219	.400
CQR29A-MG123-3-	1000	.0120	G,J,K	M,P,R	1.562	1.469	.400
CQR29A-MG183-3-	1000	.0180	G,J,K	M,P,R	1.250	1.156	.562
CQR29A-MG223-3-	1000	.0220	G,J,K	M,P,R	1.250	1.156	.562
CQR29A-MG273-3-	1000	.0270	G,J,K	M,P,R	1.250	1.156	.562
CQR29A-MG333-3-	1000	.0330	G,J,K	M,P,R	1.500	1.406	.562
CQR29A-MG393-3-	1000	.0390	G,J,K	M,P,R	1.875	1.781	.562
CQR29A-MG473-3-	1000	.0470	G,J,K	M,P,R	1.875	1.781	.562
CQR29A-MG563-3-	1000	.0560	G,J,K	M,P,R	1.875	1.781	.670
CQR29A-MG683-3-	1000	.0680	G,J,K	M,P,R	1.875	1.781	.670
CQR29A-MG823-3-	1000	.0820	G,J,K	M,P,R	2.125	2.031	.750
CQR29A-MG104-3-	1000	.1000	G,J,K	M,P,R	2.125	2.031	.750
CQR29A-MG124-3-	1000	.1200	G,J,K	M,P,R	1.875	1.781	1.000
CQR29A-MG154-3-	1000	.1500	G,J,K	M,P,R	1.875	1.781	1.000
CQR29A-MG184-3-	1000	.1800	G,J,K	M,P,R	2.375	2.281	1.000
CQR29A-MG224-3-	1000	.2200	G,J,K	M,P,R	2.375	2.281	1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, PLASTIC DIELECTRIC, AXIAL-WIRE TERMINAL
MIL-C-19978/14

STYLE CQR32

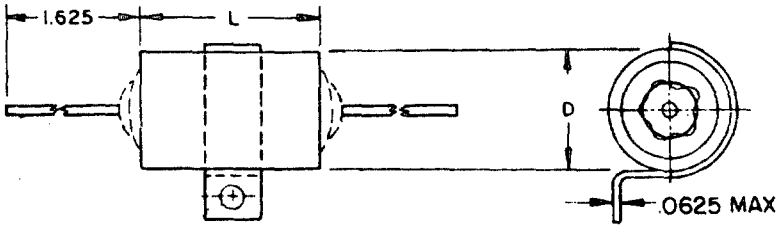

LEAD DIA	CASE DIA
.020	.175 .195
.025	.235 .312
.032	.400 AND ABOVE

Circuit diagram - 1

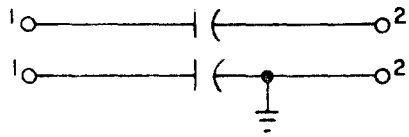


TABLE I. STYLE CQR32 CAPACITORS(POLYETHYLENE TEREPHTHALATE)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR32A-MZ155-3-	30	1.5000	G,J,K	M,P,R	1.625	1.531	.562
CQR32A-MZ225-3-	30	2.2000	G,J,K	M,P,R	1.875	1.781	.670
CQR32A-MZ335-3-	30	3.3000	G,J,K	M,P,R	1.875	1.781	.750
CQR32A-MZ475-3-	30	4.7000	G,J,K	M,P,R	2.625	2.531	.750
CQR32A-MZ685-3-	30	6.8000	G,J,K	M,P,R	2.125	2.031	1.000
CQR32A-MZ106-3-	30	10.0000	G,J,K	M,P,R	2.375	2.281	1.000
CQR32A-MA102-3-	50	.0010	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA122-3-	50	.0012	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA152-3-	50	.0015	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA182-3-	50	.0018	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA222-3-	50	.0022	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA272-3-	50	.0027	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA332-3-	50	.0033	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA392-3-	50	.0039	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA472-3-	50	.0047	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA562-3-	50	.0056	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA682-3-	50	.0068	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA822-3-	50	.0082	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA103-3-	50	.0100	G,J,K	M,P,R	.500	.406	.175
CQR32A-MA123-3-	50	.0120	G,J,K	M,P,R	.500	.406	.235
CQR32A-MA153-3-	50	.0150	G,J,K	M,P,R	.500	.406	.235
CQR32A-MA183-3-	50	.0180	G,J,K	M,P,R	.500	.406	.235
CQR32A-MA223-3-	50	.0220	G,J,K	M,P,R	.500	.406	.235
CQR32A-MA273-3-	50	.0270	G,J,K	M,P,R	.500	.406	.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/14

TABLE I. STYLE CQR32 CAPACITORS (CONTINUED)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR32A-MA333-3-	50	.0330	G,J,K	M,P,R	.500	.406	.312
CQR32A-MA393-3-	50	.0390	G,J,K	M,P,R	.500	.406	.312
CQR32A-MA473-3-	50	.0470	G,J,K	M,P,R	.500	.406	.312
CQR32A-MA563-3-	50	.0560	G,J,K	M,P,R	.562	.468	.312
CQR32A-MA683-3-	50	.0680	G,J,K	M,P,R	.562	.468	.312
CQR32A-MA124-3-	50	.1200	G,J,K	M,P,R	.875	.781	.312
CQR32A-MA154-3-	50	.1500	G,J,K	M,P,R	.875	.781	.312
CQR32A-MA184-3-	50	.1800	G,J,K	M,P,R	.875	.781	.400
CQR32A-MA224-3-	50	.2200	G,J,K	M,P,R	.875	.781	.400
CQR32A-MA274-3-	50	.2700	G,J,K	M,P,R	.875	.781	.400
CQR32A-MA334-3-	50	.3300	G,J,K	M,P,R	1.000	.906	.400
CQR32A-MA394-3-	50	.3900	G,J,K	M,P,R	1.125	1.031	.400
CQR32A-MA474-3-	50	.4700	G,J,K	M,P,R	1.125	1.031	.400
CQR32A-MA564-3-	50	.5600	G,J,K	M,P,R	1.375	1.281	.400
CQR32A-MA684-3-	50	.6800	G,J,K	M,P,R	1.375	1.281	.400
CQR32A-MA824-3-	50	.8200	G,J,K	M,P,R	1.125	1.031	.562
CQR32A-MA105-3-	50	1.0000	G,J,K	M,P,R	1.125	1.031	.562
CQR32A-MA125-3-	50	1.2000	G,J,K	M,P,R	1.375	1.281	.562
CQR32A-MB125-3-	100	1.2000	G,J,K	M,P,R	1.625	1.531	.670
CQR32A-MB155-3-	100	1.5000	G,J,K	M,P,R	1.625	1.531	.670
CQR32A-MB185-3-	100	1.8000	G,J,K	M,P,R	1.625	1.531	.670
CQR32A-MB225-3-	100	2.2000	G,J,K	M,P,R	1.875	1.781	.750
CQR32A-MB275-3-	100	2.7000	G,J,K	M,P,R	2.125	2.031	.750
CQR32A-MB335-3-	100	3.3000	G,J,K	M,P,R	2.375	2.281	.750
CQR32A-MB395-3-	100	3.9000	G,J,K	M,P,R	1.875	1.781	1.000
CQR32A-MB475-3-	100	4.7000	G,J,K	M,P,R	2.125	2.031	1.000
CQR32A-MB565-3-	100	5.6000	G,J,K	M,P,R	2.375	2.281	1.000
CQR32A-MB685-3-	100	6.8000	G,J,K	M,P,R	2.625	2.531	1.000
CQR32A-MC102-3-	200	.0010	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC122-3-	200	.0012	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC152-3-	200	.0015	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC182-3-	200	.0018	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC222-3-	200	.0022	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC272-3-	200	.0027	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC332-3-	200	.0033	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC392-3-	200	.0039	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC472-3-	200	.0047	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC562-3-	200	.0056	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC682-3-	200	.0068	G,J,K	M,P,R	.750	.656	.175

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

127

TABLE I. STYLE CQR32 CAPACITORS (CONTINUED)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CITCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR32A-MC822-3-	200	.0082	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC183-3-	200	.0100	G,J,K	M,P,R	.750	.656	.175
CQR32A-MC123-3-	200	.0120	G,J,K	M,P,R	.719	.625	.195
CQR32A-MC153-3-	200	.0150	G,J,K	M,P,R	.719	.625	.195
CQR32A-MC183-3-	200	.0180	G,J,K	M,P,R	.719	.625	.235
CQR32A-MC223-3-	200	.0220	G,J,K	M,P,R	.719	.625	.235
CQR32A-MC273-3-	200	.0270	G,J,K	M,P,R	.719	.625	.235
CQR32A-MC333-3-	200	.0330	G,J,K	M,P,R	.719	.625	.235
CQR32A-MC393-3-	200	.0390	G,J,K	M,P,R	.719	.625	.312
CQR32A-MC473-3-	200	.0470	G,J,K	M,P,R	.719	.625	.312
CQR32A-MC563-3-	200	.0560	G,J,K	M,P,R	.844	.750	.312
CQR32A-MC683-3-	200	.0680	G,J,K	M,P,R	.844	.750	.312
CQR32A-MC823-3-	200	.0820	G,J,K	M,P,R	.844	.750	.312
CQR32A-MC104-3-	200	.1000	G,J,K	M,P,R	.844	.750	.312
CQR32A-MC124-3-	200	.1200	G,J,K	M,P,R	.812	.719	.400
CQR32A-MC154-3-	200	.1500	G,J,K	M,P,R	.812	.719	.400
CQR32A-MC184-3-	200	.1800	G,J,K	M,P,R	1.062	.969	.400
CQR32A-MC224-3-	200	.2200	G,J,K	M,P,R	1.062	.969	.400
CQR32A-MC274-3-	200	.2700	G,J,K	M,P,R	1.250	1.156	.400
CQR32A-MC334-3-	200	.3300	G,J,K	M,P,R	1.250	1.156	.400
CQR32A-MC394-3-	200	.3900	G,J,K	M,P,R	1.188	1.094	.500
CQR32A-MC474-3-	200	.4700	G,J,K	M,P,R	1.188	1.094	.500
CQR32A-MC564-3-	200	.5600	G,J,K	M,P,R	1.375	1.281	.562
CQR32A-MC684-3-	200	.6800	G,J,K	M,P,R	1.375	1.281	.562
CQR32A-MC824-3-	200	.8200	G,J,K	M,P,R	1.875	1.781	.562
CQR32A-MC105-3-	200	1.0000	G,J,K	M,P,R	1.875	1.781	.562
CQR32A-ME102-3-	400	.0010	G,J,K	M,P,R	.812	.719	.235
CQR32A-ME122-3-	400	.0012	G,J,K	M,P,R	.812	.719	.235
CQR32A-ME152-3-	400	.0015	G,J,K	M,P,R	.812	.719	.235
CQR32A-ME182-3-	400	.0018	G,J,K	M,P,R	.812	.719	.235
CQR32A-ME222-3-	400	.0022	G,J,K	M,P,R	.812	.719	.235
CQR32A-ME272-3-	400	.0027	G,J,K	M,P,R	.812	.719	.235
CQR32A-ME332-3-	400	.0033	G,J,K	M,P,R	.812	.719	.235
CQR32A-ME392-3-	400	.0039	G,J,K	M,P,R	.812	.719	.235
CQR32A-ME472-3-	400	.0047	G,J,K	M,P,R	.812	.719	.235
CQR32A-ME562-3-	400	.0056	G,J,K	M,P,R	.938	.844	.312
CQR32A-ME682-3-	400	.0068	G,J,K	M,P,R	.938	.844	.312
CQR32A-ME822-3-	400	.0082	G,J,K	M,P,R	.938	.844	.312
CQR32A-ME103-3-	400	.0100	G,J,K	M,P,R	.938	.844	.312
CQR32A-ME123-3-	400	.0120	G,J,K	M,P,R	.938	.844	.312
CQR32A-ME153-3-	400	.0150	G,J,K	M,P,R	.938	.844	.312
CQR32A-ME183-3-	400	.0180	G,J,K	M,P,R	1.062	.969	.312
CQR32A-ME223-3-	400	.0220	G,J,K	M,P,R	1.062	.969	.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CQR32 CAPACITORS (CONTINUED)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	µF			INCHES	INCHES	INCHES
CQR32A-ME223-3-	400	.0220	G,J,K	M,P,R	1.062	.969	.312
CQR32A-ME273-3-	400	.0270	G,J,K	M,P,R	.938	.844	.400
CQR32A-ME333-3-	400	.0330	G,J,K	M,P,R	.938	.844	.400
CQR32A-ME393-3-	400	.0390	G,J,K	M,P,R	1.062	.969	.400
CQR32A-ME473-3-	400	.0470	G,J,K	M,P,R	1.062	.969	.400
CQR32A-ME563-3-	400	.0560	G,J,K	M,P,R	1.250	1.156	.400
CQR32A-ME683-3-	400	.0680	G,J,K	M,P,R	1.250	1.156	.400
CQR32A-ME823-3-	400	.0820	G,J,K	M,P,R	1.562	1.469	.400
CQR32A-ME104-3-	400	.1000	G,J,K	M,P,R	1.562	1.469	.400
CQR32A-ME124-3-	400	.1200	G,J,K	M,P,R	1.281	1.188	.562
CQR32A-ME154-3-	400	.1500	G,J,K	M,P,R	1.281	1.188	.562
CQR32A-ME184-3-	400	.1800	G,J,K	M,P,R	1.531	1.438	.562
CQR32A-ME224-3-	400	.2200	G,J,K	M,P,R	1.531	1.438	.562
CQR32A-ME274-3-	400	.2700	G,J,K	M,P,R	1.906	1.812	.562
CQR32A-ME334-3-	400	.3300	G,J,K	M,P,R	1.906	1.812	.562
CQR32A-ME394-3-	400	.3900	G,J,K	M,P,R	1.906	1.812	.670
CQR32A-ME474-3-	400	.4700	G,J,K	M,P,R	1.906	1.812	.670
CQR32A-ME564-3-	400	.5600	G,J,K	M,P,R	2.156	2.062	.750
CQR32A-ME684-3-	400	.6800	G,J,K	M,P,R	2.156	2.062	.750
CQR32A-ME824-3-	400	.8200	G,J,K	M,P,R	2.656	2.562	.750
CQR32A-ME105-3-	400	1.0000	G,J,K	M,P,R	2.656	2.562	.750
CQR32A-MF102-3-	600	.0010	G,J,K	M,P,R	.812	.719	.235
CQR32A-MF122-3-	600	.0012	G,J,K	M,P,R	.812	.719	.235
CQR32A-MF152-3-	600	.0015	G,J,K	M,P,R	.812	.719	.235
CQR32A-MF182-3-	600	.0018	G,J,K	M,P,R	.812	.719	.235
CQR32A-MF222-3-	600	.0022	G,J,K	M,P,R	.812	.719	.235
CQR32A-MF272-3-	600	.0027	G,J,K	M,P,R	.812	.719	.235
CQR32A-MF332-3-	600	.0033	G,J,K	M,P,R	.938	.844	.312
CQR32A-MF392-3-	600	.0039	G,J,K	M,P,R	.938	.844	.312
CQR32A-MF472-3-	600	.0047	G,J,K	M,P,R	.938	.844	.312
CQR32A-MF562-3-	600	.0056	G,J,K	M,P,R	.938	.844	.312
CQR32A-MF682-3-	600	.0068	G,J,K	M,P,R	.938	.844	.312
CQR32A-MF822-3-	600	.0082	G,J,K	M,P,R	1.062	.969	.312
CQR32A-MF103-3-	600	.0100	G,J,K	M,P,R	1.062	.969	.312
CQR32A-MF123-3-	600	.0120	G,J,K	M,P,R	.938	.844	.400
CQR32A-MF153-3-	600	.0150	G,J,K	M,P,R	.938	.844	.400
CQR32A-MF183-3-	600	.0180	G,J,K	M,P,R	1.062	.969	.400
CQR32A-MF223-3-	600	.0220	G,J,K	M,P,R	1.062	.969	.400
CQR32A-MF273-3-	600	.0270	G,J,K	M,P,R	1.312	1.219	.400
CQR32A-MF333-3-	600	.0330	G,J,K	M,P,R	1.312	1.219	.400
CQR32A-MF393-3-	600	.0390	G,J,K	M,P,R	1.562	1.469	.400

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/14


TABLE I. STYLE CQR32 CAPACITORS (CONTINUED)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	µF			INCHES	INCHES	INCHES
CQR32A-MF473-3-	600	.0470	G,J,K	M,P,R	1.562	1.469	.400
CQR32A-MF563-3-	600	.0560	G,J,K	M,P,R	1.250	1.156	.562
CQR32A-MF683-3-	600	.0680	G,J,K	M,P,R	1.250	1.156	.562
CQR32A-MF823-3-	600	.0820	G,J,K	M,P,R	1.500	1.406	.562
CQR32A-MF104-3-	600	.1000	G,J,K	M,P,R	1.500	1.406	.562
CQR32A-MF124-3-	600	.1200	G,J,K	M,P,R	1.875	1.781	.562
CQR32A-MF154-3-	600	.1500	G,J,K	M,P,R	1.875	1.781	.562
CQR32A-MF184-3-	600	.1800	G,J,K	M,P,R	1.875	1.781	.670
CQR32A-MF224-3-	600	.2200	G,J,K	M,P,R	1.875	1.781	.670
CQR32A-MF274-3-	600	.2700	G,J,K	M,P,R	2.125	2.031	.750
CQR32A-MF334-3-	600	.3300	G,J,K	M,P,R	2.125	2.031	.750
CQR32A-MF394-3-	600	.3900	G,J,K	M,P,R	2.625	2.531	.750
CQR32A-MF474-3-	600	.4700	G,J,K	M,P,R	2.625	2.531	.750
CQR32A-MF564-3-	600	.5600	G,J,K	M,P,R	2.125	2.031	1.000
CQR32A-MF684-3-	600	.6800	G,J,K	M,P,R	2.125	2.031	1.000
CQR32A-MG102-3-	1000	.0010	G,J,K	M,P,R	.938	.844	.312
CQR32A-MG122-3-	1000	.0012	G,J,K	M,P,R	.938	.844	.312
CQR32A-MG152-3-	1000	.0015	G,J,K	M,P,R	.938	.844	.312
CQR32A-MG182-3-	1000	.0018	G,J,K	M,P,R	.938	.844	.312
CQR32A-MG222-3-	1000	.0022	G,J,K	M,P,R	.938	.844	.312
CQR32A-MG272-3-	1000	.0027	G,J,K	M,P,R	.938	.844	.312
CQR32A-MG332-3-	1000	.0033	G,J,K	M,P,R	.938	.844	.312
CQR32A-MG392-3-	1000	.0039	G,J,K	M,P,R	.938	.844	.400
CQR32A-MG472-3-	1000	.0047	G,J,K	M,P,R	.938	.844	.400
CQR32A-MG562-3-	1000	.0056	G,J,K	M,P,R	1.062	.969	.400
CQR32A-MG682-3-	1000	.0068	G,J,K	M,P,R	1.062	.969	.400
CQR32A-MG822-3-	1000	.0082	G,J,K	M,P,R	1.312	1.219	.400
CQR32A-MG103-3-	1000	.0100	G,J,K	M,P,R	1.312	1.219	.400
CQR32A-MG123-3-	1000	.0120	G,J,K	M,P,R	1.562	1.469	.400
CQR32A-MG183-3-	1000	.0180	G,J,K	M,P,R	1.562	1.469	.400
CQR32A-MG223-3-	1000	.0220	G,J,K	M,P,R	1.250	1.156	.562
CQR32A-MG273-3-	1000	.0270	G,J,K	M,P,R	1.250	1.156	.562
CQR32A-MG333-3-	1000	.0330	G,J,K	M,P,R	1.500	1.406	.562
CQR32A-MG393-3-	1000	.0390	G,J,K	M,P,R	1.875	1.781	.562
CQR32A-MG473-3-	1000	.0470	G,J,K	M,P,R	1.875	1.781	.562
CQR32A-MG563-3-	1000	.0560	G,J,K	M,P,R	1.875	1.781	.670
CQR32A-MG683-3-	1000	.0680	G,J,K	M,P,R	1.875	1.781	.670
CQR32A-MG823-3-	1000	.0820	G,J,K	M,P,R	2.125	2.031	.750
CQR32A-MG104-3-	1000	.1000	G,J,K	M,P,R	2.125	2.031	.750
CQR32A-MG124-3-	1000	.1200	G,J,K	M,P,R	1.875	1.781	1.000
CQR32A-MG154-3-	1000	.1500	G,J,K	M,P,R	1.875	1.781	1.000
CQR32A-MG184-3-	1000	.1800	G,J,K	M,P,R	2.375	2.281	1.000
CQR32A-MG224-3-	1000	.2200	G,J,K	M,P,R	2.375	2.281	1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, PLASTIC DIELECTRIC, AXIAL-WIRE TERMINAL
MIL-C-19978/15

STYLE CQR33

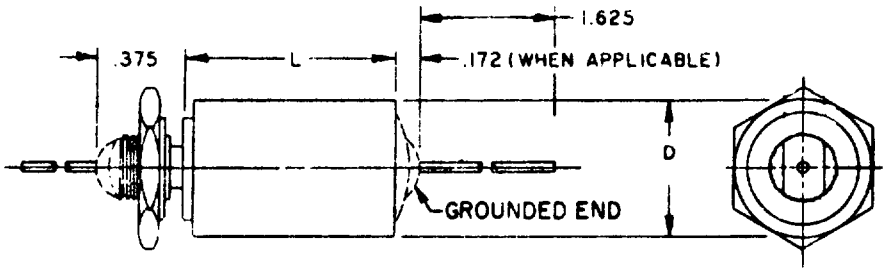

LEAD DIAMETER .032

Circuit diagram - 1

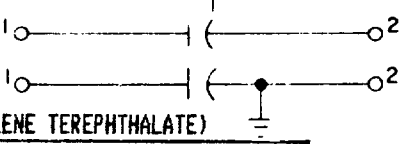


TABLE I. STYLE CQR33 CAPACITORS(POLYETHYLENE TEREPHTHALATE)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	DIMENSIONS CIRCUIT 3 L±.031	DIMENSIONS CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR33A-MZ155-3-	30	1.500	G,J,K	M,P,R	1.625	1.531	.562
CQR33A-MZ225-3-	30	2.200	G,J,K	M,P,R	1.875	1.781	.670
CQR33A-MZ335-3-	30	3.300	G,J,K	M,P,R	1.875	1.781	.750
CQR33A-MZ475-3-	30	4.700	G,J,K	M,P,R	2.625	2.531	.750
CQR33A-MZ685-3-	30	6.800	G,J,K	M,P,R	2.125	2.031	1.000
CQR33A-MZ106-3-	30	10.000	G,J,K	M,P,R	2.375	2.281	1.000
CQR33A-MA102-3-	50	.0010	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA122-3-	50	.0012	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA152-3-	50	.0015	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA182-3-	50	.0018	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA222-3-	50	.0022	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA272-3-	50	.0027	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA332-3-	50	.0033	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA392-3-	50	.0039	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA472-3-	50	.0047	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA562-3-	50	.0056	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA682-3-	50	.0068	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA822-3-	50	.0082	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA103-3-	50	.010	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA123-3-	50	.012	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA153-3-	50	.015	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA183-3-	50	.018	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA223-3-	50	.022	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA273-3-	50	.027	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA333-3-	50	.033	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA393-3-	50	.039	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA473-3-	50	.047	G,J,K	M,P,R	.500	.406	.400
CQR33A-MA563-3-	50	.056	G,J,K	M,P,R	.562	.468	.400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/15

TABLE I. STYLE CQR33 CAPACITORS(POLYETHYLENE TEREPHTHALATE)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR33A-MA683-3-	50	.068	G,J,K	M,P,R	.562	.468	.400
CQR33A-MA124-3-	50	.120	G,J,K	M,P,R	.875	.781	.400
CQR33A-MA154-3-	50	.150	G,J,K	M,P,R	.875	.781	.400
CQR33A-MA184-3-	50	.180	G,J,K	M,P,R	.875	.781	.400
CQR33A-MA224-3-	50	.220	G,J,K	M,P,R	.875	.781	.400
CQR33A-MA274-3-	50	.270	G,J,K	M,P,R	.875	.781	.400
CQR33A-MA334-3-	50	.330	G,J,K	M,P,R	1.000	.906	.400
CQR33A-MA394-3-	50	.390	G,J,K	M,P,R	1.125	1.031	.400
CQR33A-MA474-3-	50	.470	G,J,K	M,P,R	1.125	1.031	.400
CQR33A-MA564-3-	50	.560	G,J,K	M,P,R	1.375	1.281	.400
CQR33A-MA684-3-	50	.680	G,J,K	M,P,R	1.375	1.281	.400
CQR33A-MA824-3-	50	.820	G,J,K	M,P,R	1.125	1.031	.562
CQR33A-MA105-3-	50	1.000	G,J,K	M,P,R	1.125	1.031	.562
CQR33A-MA125-3-	50	1.200	G,J,K	M,P,R	1.375	1.281	.562
CQR33A-MB125-3-	100	1.200	G,J,K	M,P,R	1.625	1.531	.670
CQR33A-MB155-3-	100	1.500	G,J,K	M,P,R	1.625	1.531	.670
CQR33A-MB185-3-	100	1.800	G,J,K	M,P,R	1.625	1.531	.670
CQR33A-MB225-3-	100	2.200	G,J,K	M,P,R	1.875	1.781	.750
CQR33A-MB275-3-	100	2.700	G,J,K	M,P,R	2.125	2.031	.750
CQR33A-MB335-3-	100	3.300	G,J,K	M,P,R	2.375	2.281	.750
CQR33A-MB395-3-	100	3.900	G,J,K	M,P,R	1.875	1.781	1.000
CQR33A-MB475-3-	100	4.700	G,J,K	M,P,R	2.125	2.031	1.000
CQR33A-MB565-3-	100	5.600	G,J,K	M,P,R	2.375	2.281	1.000
CQR33A-MB685-3-	100	6.800	G,J,K	M,P,R	2.625	2.531	1.000
CQR33A-MC102-3-	200	.0010	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC122-3-	200	.0012	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC152-3-	200	.0015	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC182-3-	200	.0018	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC222-3-	200	.0022	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC272-3-	200	.0027	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC332-3-	200	.0033	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC392-3-	200	.0039	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC472-3-	200	.0047	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC562-3-	200	.0056	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC682-3-	200	.0068	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC822-3-	200	.0082	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC103-3-	200	.010	G,J,K	M,P,R	.750	.656	.400
CQR33A-MC123-3-	200	.012	G,J,K	M,P,R	.719	.625	.400
CQR33A-MC153-3-	200	.015	G,J,K	M,P,R	.719	.625	.400
CQR33A-MC183-3-	200	.018	G,J,K	M,P,R	.719	.625	.400
CQR33A-MC223-3-	200	.022	G,J,K	M,P,R	.719	.625	.400
CQR33A-MC273-3-	200	.027	G,J,K	M,P,R	.719	.625	.400

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CQR33 CAPACITORS(POLYETHYLENE TEREPHTHALATE)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERENCE	FAILURE RATE LEVEL	DIMENSIONS		
					CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR33A-MC333-3-	200	.033	G,J,K	M,P,R	.719	.625	.400
CQR33A-MC393-3-	200	.039	G,J,K	M,P,R	.719	.625	.400
CQR33A-MC473-3-	200	.047	G,J,K	M,P,R	.719	.625	.400
CQR33A-MC563-3-	200	.056	G,J,K	M,P,R	.844	.750	.400
CQR33A-MC683-3-	200	.068	G,J,K	M,P,R	.844	.750	.400
CQR33A-MC823-3-	200	.082	G,J,K	M,P,R	.844	.750	.400
CQR33A-MC104-3-	200	.100	G,J,K	M,P,R	.844	.750	.400
CQR33A-MC124-3-	200	.120	G,J,K	M,P,R	.812	.719	.400
CQR33A-MC154-3-	200	.150	G,J,K	M,P,R	.812	.719	.400
CQR33A-MC184-3-	200	.180	G,J,K	M,P,R	1.062	.969	.400
CQR33A-MC224-3-	200	.220	G,J,K	M,P,R	1.062	.969	.400
CQR33A-MC274-3-	200	.270	G,J,K	M,P,R	1.250	1.156	.400
CQR33A-MC334-3-	200	.330	G,J,K	M,P,R	1.250	1.156	.400
CQR33A-MC394-3-	200	.390	G,J,K	M,P,R	1.188	1.094	.500
CQR33A-MC474-3-	200	.470	G,J,K	M,P,R	1.188	1.094	.500
CQR33A-MC564-3-	200	.560	G,J,K	M,P,R	1.375	1.281	.562
CQR33A-MC684-3-	200	.680	G,J,K	M,P,R	1.375	1.281	.562
CQR33A-MC824-3-	200	.820	G,J,K	M,P,R	1.875	1.781	.562
CQR33A-MC105-3-	200	1.000	G,J,K	M,P,R	1.875	1.781	.562
CQR33A-ME102-3-	400	.0010	G,J,K	M,P,R	.812	.719	.400
CQR33A-ME122-3-	400	.0012	G,J,K	M,P,R	.812	.719	.400
CQR33A-ME152-3-	400	.0015	G,J,K	M,P,R	.812	.719	.400
CQR33A-ME182-3-	400	.0018	G,J,K	M,P,R	.812	.719	.400
CQR33A-ME222-3-	400	.0022	G,J,K	M,P,R	.812	.719	.400
CQR33A-ME272-3-	400	.0027	G,J,K	M,P,R	.812	.719	.400
CQR33A-ME332-3-	400	.0033	G,J,K	M,P,R	.812	.719	.400
CQR33A-ME392-3-	400	.0039	G,J,K	M,P,R	.812	.719	.400
CQR33A-ME472-3-	400	.0047	G,J,K	M,P,R	.812	.719	.400
CQR33A-ME562-3-	400	.0056	G,J,K	M,P,R	.938	.844	.400
CQR33A-ME682-3-	400	.0068	G,J,K	M,P,R	.938	.844	.400
CQR33A-ME822-3-	400	.0082	G,J,K	M,P,R	.938	.844	.400
CQR33A-ME103-3-	400	.010	G,J,K	M,P,R	.938	.844	.400
CQR33A-ME123-3-	400	.012	G,J,K	M,P,R	.938	.844	.400
CQR33A-ME153-3-	400	.015	G,J,K	M,P,R	.938	.844	.400
CQR33A-ME183-3-	400	.018	G,J,K	M,P,R	1.062	.969	.400
CQR33A-ME223-3-	400	.022	G,J,K	M,P,R	1.062	.969	.400
CQR33A-ME273-3-	400	.027	G,J,K	M,P,R	.938	.844	.400
CQR33A-ME333-3-	400	.033	G,J,K	M,P,R	.938	.844	.400
CQR33A-ME393-3-	400	.039	G,J,K	M,P,R	1.062	.969	.400
CQR33A-ME473-3-	400	.047	G,J,K	M,P,R	1.062	.969	.400
CQR33A-ME563-3-	400	.056	G,J,K	M,P,R	1.250	1.156	.400
CQR33A-ME683-3-	400	.068	G,J,K	M,P,R	1.250	1.156	.400
CQR33A-ME823-3-	400	.082	G,J,K	M,P,R	1.562	1.469	.400

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:29Z
Check the source to verify that this is the current version before use.

133

MIL-C-19978/15

TABLE I. STYLE CQR33 CAPACITORS(POLYETHYLENE TEREPHTHALATE)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 143 D+.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR33A-ME104-3-	400	.100	G,J,K	M,P,R	1.562	1.469	.400
CQR33A-ME124-3-	400	.120	G,J,K	M,P,R	1.281	1.188	.562
CQR33A-ME154-3-	400	.150	G,J,K	M,P,R	1.281	1.188	.562
CQR33A-ME184-3-	400	.180	G,J,K	M,P,R	1.531	1.438	.562
CQR33A-ME224-3-	400	.220	G,J,K	M,P,R	1.531	1.438	.562
CQR33A-ME274-3-	400	.270	G,J,K	M,P,R	1.906	1.812	.562
CQR33A-ME334-3-	400	.330	G,J,K	M,P,R	1.906	1.812	.562
CQR33A-ME394-3-	400	.390	G,J,K	M,P,R	1.906	1.812	.670
CQR33A-ME474-3-	400	.470	G,J,K	M,P,R	1.906	1.812	.670
CQR33A-ME564-3-	400	.560	G,J,K	M,P,R	2.156	2.062	.750
CQR33A-ME684-3-	400	.680	G,J,K	M,P,R	2.156	2.062	.750
CQR33A-ME824-3-	400	.820	G,J,K	M,P,R	2.656	2.562	.750
CQR33A-ME105-3-	400	1.000	G,J,K	M,P,R	2.656	2.562	.750
CQR33A-MF102-3-	600	.0010	G,J,K	M,P,R	.812	.719	.400
CQR33A-MF122-3-	600	.0012	G,J,K	M,P,R	.812	.719	.400
CQR33A-MF152-3-	600	.0015	G,J,K	M,P,R	.812	.719	.400
CQR33A-MF182-3-	600	.0018	G,J,K	M,P,R	.812	.719	.400
CQR33A-MF222-3-	600	.0022	G,J,K	M,P,R	.812	.719	.400
CQR33A-MF272-3-	600	.0027	G,J,K	M,P,R	.812	.719	.400
CQR33A-MF332-3-	600	.0033	G,J,K	M,P,R	.938	.844	.400
CQR33A-MF392-3-	600	.0039	G,J,K	M,P,R	.938	.844	.400
CQR33A-MF472-3-	600	.0047	G,J,K	M,P,R	.938	.844	.400
CQR33A-MF562-3-	600	.0056	G,J,K	M,P,R	.938	.844	.400
CQR33A-MF682-3-	600	.0068	G,J,K	M,P,R	.938	.844	.400
CQR33A-MF822-3-	600	.0082	G,J,K	M,P,R	1.062	.969	.400
CQR33A-MF103-3-	600	.010	G,J,K	M,P,R	1.062	.969	.400
CQR33A-MF123-3-	600	.012	G,J,K	M,P,R	.938	.844	.400
CQR33A-MF153-3-	600	.015	G,J,K	M,P,R	.938	.844	.400
CQR33A-MF183-3-	600	.018	G,J,K	M,P,R	1.062	.969	.400
CQR33A-MF223-3-	600	.022	G,J,K	M,P,R	1.062	.969	.400
CQR33A-MF273-3-	600	.027	G,J,K	M,P,R	1.312	1.219	.400
CQR33A-MF333-3-	600	.033	G,J,K	M,P,R	1.312	1.219	.400
CQR33A-MF393-3-	600	.039	G,J,K	M,P,R	1.562	1.469	.400
CQR33A-MF473-3-	600	.047	G,J,K	M,P,R	1.562	1.469	.400
CQR33A-MF563-3-	600	.056	G,J,K	M,P,R	1.250	1.156	.562
CQR33A-MF683-3-	600	.068	G,J,K	M,P,R	1.250	1.156	.562
CQR33A-MF823-3-	600	.082	G,J,K	M,P,R	1.500	1.406	.562
CQR33A-MF104-3-	600	.100	G,J,K	M,P,R	1.500	1.406	.562
CQR33A-MF124-3-	600	.120	G,J,K	M,P,R	1.875	1.781	.562
CQR33A-MF154-3-	600	.150	G,J,K	M,P,R	1.875	1.781	.562
CQR33A-MF184-3-	600	.180	G,J,K	M,P,R	1.875	1.781	.670
CQR33A-MF224-3-	600	.220	G,J,K	M,P,R	1.875	1.781	.670
CQR33A-MF274-3-	600	.270	G,J,K	M,P,R	2.125	2.031	.750

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-19978/15

TABLE I. STYLE CQR33 CAPACITORS(POLYETHYLENE TEREPHTHALATE)

PART NUMBER	DC VOLTAGE RATING	CAPACITANCE RATING	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL	DIMENSIONS CIRCUIT 1 L±.031	CIRCUIT 3 L±.031	CIRCUIT 1&3 D±.015 -.005
	VOLTS	uF			INCHES	INCHES	INCHES
CQR33A-MF334-3-	600	.330	G,J,K	M,P,R	2.125	2.031	.750
CQR33A-MF394-3-	600	.390	G,J,K	M,P,R	2.625	2.531	.750
CQR33A-MF474-3-	600	.470	G,J,K	M,P,R	2.625	2.531	.750
CQR33A-MF564-3-	600	.560	G,J,K	M,P,R	2.125	2.031	1.000
CQR33A-MF684-3-	600	.680	G,J,K	M,P,R	2.125	2.031	1.000
CQR33A-MG823-3-	1000	.082	G,J,K	M,P,R	2.125	2.031	.750
CQR33A-MG104-3-	1000	.100	G,J,K	M,P,R	2.125	2.031	.750
CQR33A-MG124-3-	1000	.120	G,J,K	M,P,R	1.875	1.781	1.000
CQR33A-MG154-3-	1000	.150	G,J,K	M,P,R	1.875	1.781	1.000
CQR33A-MG184-3-	1000	.180	G,J,K	M,P,R	2.375	2.281	1.000
CQR33A-MG224-3-	1000	.220	G,J,K	M,P,R	2.375	2.281	1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022 (ESTABLISHED RELIABILITY)


SCOPE: FIXED, INSULATED, METALLIZED PAPER-PLASTIC FILM CAPACITORS STYLES CHR09, CHR10, CHR19 AND CHR49 PER MIL-C-39022 ARE ESTABLISHED RELIABILITY PARTS SUITABLE FOR AC APPLICATIONS OR DC APPLICATIONS WITH HIGH AC RIPPLE CONTENT. THESE ARE PRIMARILY INTENDED FOR USE IN POWER SUPPLY FILTER CIRCUITS, BYPASS APPLICATIONS AND OTHER APPLICATION WHERE THE AC COMPONENT OF VOLTAGE IS SMALL WITH RESPECT TO THE DC VOLTAGE RATING AND WHERE OCCASIONAL PERIODS LOW INSULATION RESISTANCE AND MOMENTARY BREAKDOWNS CAN BE TOLERATED.


TEMP RANGE: -55°C TO +85°C (STYLE CHR09 AND CHR49)
-55°C TO +125°C (STYLE CHR10 AND CHR19)

SHOCK: 100 G, SAWTOOTH (MIL-STD-202, METHOD 213)

VIBRATION: 20 G, 10-2000 Hz (MIL-STD-202, METHOD 204) STYLES CHR09,10 AND 19
15 G, 10-2000 Hz (MIL-STD-202, METHOD 204) STYLE CHR49

STYLES CHR09 AND CHR19

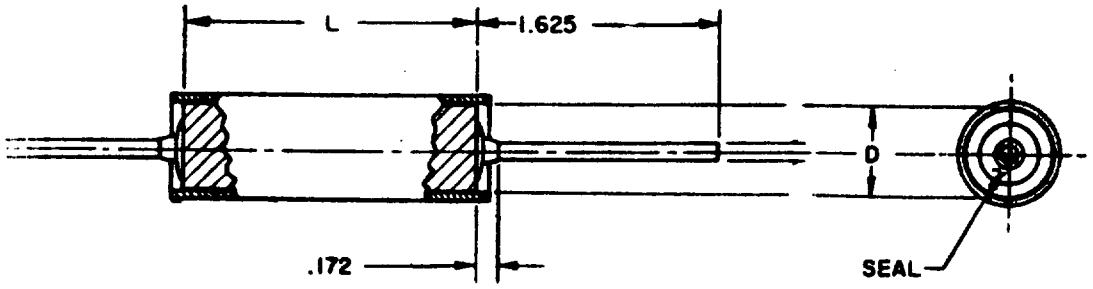

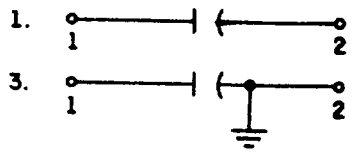

CIRCUIT DIAGRAM

LEAD DIA	CASE DIA
.020	.175 .195
.025	.235 .312
.032	.400 AND ABOVE

PART NUMBER:

M39022	/01	-XXXX
GENERAL SPECIFICATION	DETAIL SPECIFICATION	DASH NUMBER (SEE TABLE I)

137

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

137

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/01

TABLE I. STYLE CHR09, CHARACTERISTICS, DIMENSIONS AND DASH NUMBER.

CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS NOMINAL (IN.)		DASH NUMBER M39022/01-		
uF		±PERCENT	L	D	M (1.0%)	P (0.1%)	R (0.01%)
50 VOLTS dc RATED							
0.018	1	5	0.750	0.175	1261	1521	1781
0.018	1	10	0.750	0.175	1262	1522	1782
0.018	3	5	0.688	0.175	1263	1523	1783
0.018	3	10	0.688	0.175	1264	1524	1784
0.022	1	5	0.750	0.175	1265	1525	1785
0.022	1	10	0.750	0.175	1266	1526	1786
0.022	3	5	0.688	0.175	1267	1527	1787
0.022	3	10	0.688	0.175	1268	1528	1788
0.027	1	5	0.750	0.175	1269	1529	1789
0.027	1	10	0.750	0.175	1270	1530	1790
0.027	3	5	0.688	0.175	1271	1531	1791
0.027	3	10	0.688	0.175	1272	1532	1792
0.033	1	5	0.750	0.175	1273	1533	1793
0.033	1	10	0.750	0.175	1274	1534	1794
0.033	3	5	0.688	0.175	1275	1535	1795
0.033	3	10	0.688	0.175	1276	1536	1796
0.039	1	5	0.750	0.195	1277	1537	1797
0.039	1	10	0.750	0.195	1278	1538	1798
0.039	3	5	0.688	0.195	1279	1539	1799
0.039	3	10	0.688	0.195	1280	1540	1800
0.047	1	5	0.750	0.195	1281	1541	1801
0.047	1	10	0.750	0.195	1282	1542	1802
0.047	3	5	0.688	0.195	1283	1543	1803
0.047	3	10	0.688	0.195	1284	1544	1804
0.056	1	5	0.750	0.235	1285	1545	1805
0.056	1	10	0.750	0.235	1286	1546	1806
0.056	3	5	0.688	0.235	1287	1547	1807
0.056	3	10	0.688	0.235	1288	1548	1808
0.068	1	5	0.750	0.235	1289	1549	1809
0.068	1	10	0.750	0.235	1290	1550	1810
0.068	3	5	0.688	0.235	1291	1551	1811
0.068	3	10	0.688	0.235	1292	1552	1812
0.082	1	5	0.750	0.235	1293	1553	1813
0.082	1	10	0.750	0.235	1294	1554	1814
0.082	3	5	0.688	0.235	1295	1555	1815
0.082	3	10	0.688	0.235	1296	1556	1816
0.10	1	5	0.750	0.235	1297	1557	1817
0.10	1	10	0.750	0.235	1298	1558	1818
0.10	3	5	0.688	0.235	1299	1559	1819
0.10	3	10	0.688	0.235	1300	1560	1820
0.12	1	5	0.750	0.235	1301	1561	1821
0.12	1	10	0.750	0.235	1302	1562	1822
0.12	3	5	0.688	0.235	1303	1563	1823
0.12	3	10	0.688	0.235	1304	1564	1824

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/01

TABLE I. STYLE CHR09, CHARACTERISTICS, DIMENSIONS AND DASH NUMBER.

CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS NOMINAL (IN.)		DASH NUMBER M39022/01-		
uF		±PERCENT	L	D	M (1.0%)	P (0.1%)	R (0.01%)
50 VOLTS dc RATED							
0.15	1	5	0.875	0.312	1305	1565	1825
0.15	1	10	0.875	0.312	1306	1566	1826
0.15	3	5	0.812	0.312	1307	1567	1827
0.15	3	10	0.812	0.312	1308	1568	1828
0.18	1	5	0.875	0.312	1309	1569	1829
0.18	1	10	0.875	0.312	1310	1570	1830
0.18	3	5	0.812	0.312	1311	1571	1831
0.18	3	10	0.812	0.312	1312	1572	1832
0.22	1	5	0.875	0.312	1313	1573	1833
0.22	1	10	0.875	0.312	1314	1574	1834
0.22	3	5	0.812	0.312	1315	1575	1835
0.22	3	10	0.812	0.312	1316	1576	1836
0.27	1	5	0.875	0.312	1317	1577	1837
0.27	1	10	0.875	0.312	1318	1578	1838
0.27	3	5	0.812	0.312	1319	1579	1839
0.27	3	10	0.812	0.312	1320	1580	1840
0.33	1	5	0.875	0.312	1321	1581	1841
0.33	1	10	0.875	0.312	1322	1582	1842
0.33	3	5	0.812	0.312	1323	1583	1843
0.33	3	10	0.812	0.312	1324	1584	1844
0.39	1	5	1.125	0.312	1325	1585	1845
0.39	1	10	1.125	0.312	1326	1586	1846
0.39	3	5	1.062	0.312	1327	1587	1847
0.39	3	10	1.062	0.312	1328	1588	1848
0.47	1	5	1.125	0.312	1329	1589	1849
0.47	1	10	1.125	0.312	1330	1590	1850
0.47	3	5	1.062	0.312	1331	1591	1851
0.47	3	10	1.062	0.312	1332	1592	1852
0.56	1	5	1.125	0.400	1333	1593	1853
0.56	1	10	1.125	0.400	1334	1594	1854
0.56	3	5	1.062	0.400	1335	1595	1855
0.56	3	10	1.062	0.400	1336	1596	1856
0.68	1	5	1.125	0.400	1337	1597	1857
0.68	1	10	1.125	0.400	1338	1598	1858
0.68	3	5	1.062	0.400	1339	1599	1859
0.68	3	10	1.062	0.400	1340	1600	1860
0.82	1	5	1.125	0.400	1341	1601	1861
0.82	1	10	1.125	0.400	1342	1602	1862
0.82	3	5	1.062	0.400	1343	1603	1863
0.82	3	10	1.062	0.400	1344	1604	1864
1.0	1	5	1.125	0.400	1345	1605	1865
1.0	1	10	1.125	0.400	1346	1606	1866
1.0	3	5	1.062	0.400	1347	1607	1867
1.0	3	10	1.062	0.400	1348	1608	1868

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/01

TABLE I. STYLE CHR09, CHARACTERISTICS, DIMENSIONS AND DASH NUMBER.

CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS NOMINAL (IN.)		DASH NUMBER M39022/01-		
uF		±PERCENT	L	D	M (1.0%)	P (0.1%)	R (0.01%)
50 VOLTS dc RATED							
1.2	1	5	1.375	0.400	1349	1609	1869
1.2	1	10	1.375	0.400	1350	1610	1870
1.2	3	5	1.312	0.400	1351	1611	1871
1.2	3	10	1.312	0.400	1352	1612	1872
1.5	1	5	1.125	0.500	1353	1613	1873
1.5	1	10	1.125	0.500	1354	1614	1874
1.5	3	5	1.062	0.500	1355	1615	1875
1.5	3	10	1.062	0.500	1356	1616	1876
1.8	1	5	1.375	0.500	1357	1617	1877
1.8	1	10	1.375	0.500	1358	1618	1878
1.8	3	5	1.312	0.500	1359	1619	1879
1.8	3	10	1.312	0.500	1360	1620	1880
2.2	1	5	1.125	0.562	1361	1621	1881
2.2	1	10	1.125	0.562	1362	1622	1882
2.2	3	5	1.062	0.562	1363	1623	1883
2.2	3	10	1.062	0.562	1364	1624	1884
2.7	1	5	1.375	0.562	1365	1625	1885
2.7	1	10	1.375	0.562	1366	1626	1886
2.7	3	5	1.312	0.562	1367	1627	1887
2.7	3	10	1.312	0.562	1368	1628	1888
3.3	1	5	1.375	0.562	1369	1629	1889
3.3	1	10	1.375	0.562	1370	1630	1890
3.3	3	5	1.312	0.562	1371	1631	1891
3.3	3	10	1.312	0.562	1372	1632	1892
3.9	1	5	1.625	0.562	1373	1633	1893
3.9	1	10	1.625	0.562	1374	1634	1894
3.9	3	5	1.562	0.562	1375	1635	1895
3.9	3	10	1.562	0.562	1376	1636	1896
4.7	1	5	1.750	0.562	1377	1637	1897
4.7	1	10	1.750	0.562	1378	1638	1898
4.7	3	5	1.688	0.562	1379	1639	1899
4.7	3	10	1.688	0.562	1380	1640	1900
5.6	1	5	1.875	0.562	1381	1641	1901
5.6	1	10	1.875	0.562	1382	1642	1902
5.6	3	5	1.812	0.562	1383	1643	1903
5.6	3	10	1.812	0.562	1384	1644	1904
6.8	1	5	1.625	0.672	1385	1645	1905
6.8	1	10	1.625	0.672	1386	1646	1906
6.8	3	5	1.562	0.672	1387	1647	1907
6.8	3	10	1.562	0.672	1388	1648	1908
8.2	1	5	1.875	0.672	1389	1649	1909
8.2	1	10	1.875	0.672	1390	1650	1910
8.2	3	5	1.812	0.672	1391	1651	1911
8.2	3	10	1.812	0.672	1392	1652	1912

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/01

TABLE I. STYLE CHR09, CHARACTERISTICS, DIMENSIONS AND DASH NUMBER.

CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS NOMINAL (IN.)		DASH NUMBER M39022/01-		
uF		±PERCENT	L	D	M (1.0%)	P (0.1%)	R (0.01%)
50 VOLTS dc RATED							
10.0	1	5	1.875	0.750	1393	1653	1913
10.0	1	10	1.875	0.750	1394	1654	1914
10.0	3	5	1.812	0.750	1395	1655	1915
10.0	3	10	1.812	0.750	1396	1656	1916
12.0	1	5	2.375	0.750	1397	1657	1917
12.0	1	10	2.375	0.750	1398	1658	1918
12.0	3	5	2.312	0.750	1399	1659	1919
12.0	3	10	2.312	0.750	1400	1660	1920
200 VOLTS dc RATED							
0.10	1	10	0.844	0.312	1401	1661	1921
0.10	1	20	0.844	0.312	1402	1662	1922
0.10	3	10	0.781	0.312	1403	1663	1923
0.10	3	20	0.781	0.312	1404	1664	1924
0.22	1	10	1.125	0.312	1405	1665	1925
0.22	1	20	1.125	0.312	1406	1666	1926
0.22	3	10	1.062	0.312	1407	1667	1927
0.22	3	20	1.062	0.312	1408	1668	1928
0.47	1	10	1.125	0.400	1409	1669	1929
0.47	1	20	1.125	0.400	1410	1670	1930
0.47	3	10	1.062	0.400	1411	1671	1931
0.47	3	20	1.062	0.400	1412	1672	1932
1.0	1	10	1.125	0.562	1413	1673	1933
1.0	1	20	1.125	0.562	1414	1674	1934
1.0	3	10	1.062	0.562	1415	1675	1935
1.0	3	20	1.062	0.562	1416	1676	1936
1.5	1	10	1.844	0.562	1417	1677	1937
1.5	1	20	1.844	0.562	1418	1678	1938
1.5	3	10	1.781	0.562	1419	1679	1939
1.5	3	20	1.781	0.562	1420	1680	1940
2.2	1	10	1.844	0.562	1421	1681	1941
2.2	1	20	1.844	0.562	1422	1682	1942
2.2	3	10	1.781	0.562	1423	1683	1943
2.2	3	20	1.781	0.562	1424	1684	1944
3.3	1	10	1.875	0.670	1425	1685	1945
3.3	1	20	1.875	0.670	1426	1686	1946
3.3	3	10	1.812	0.670	1427	1687	1947
3.3	3	20	1.812	0.670	1428	1688	1948
4.7	1	10	1.875	1.000	1429	1689	1949
4.7	1	20	1.875	1.000	1430	1690	1950
4.7	3	10	1.812	1.000	1431	1691	1951
4.7	3	20	1.812	1.000	1432	1692	1952
6.8	1	10	1.875	1.000	1433	1693	1953
6.8	1	20	1.875	1.000	1434	1694	1954

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/01

TABLE I. STYLE CHR09, CHARACTERISTICS, DIMENSIONS AND DASH NUMBER.

CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS NOMINAL (IN.)		DASH NUMBER M39022/01-		
uF		±PERCENT	L	D	M (1.0%)	P (0.1%)	R (0.01%)
200 VOLTS dc RATED							
6.8	3	10	1.812	1.000	1435	1695	1955
6.8	3	20	1.812	1.000	1436	1696	1956
10.0	1	10	2.375	1.000	1437	1697	1957
10.0	1	20	2.375	1.000	1438	1698	1958
10.0	3	10	2.312	1.000	1439	1699	1959
10.0	3	20	2.312	1.000	1440	1700	1960
12.0	1	10	2.625	1.000	1441	1701	1961
12.0	1	20	2.625	1.000	1442	1702	1962
12.0	3	10	2.562	1.000	1443	1703	1963
12.0	3	20	2.562	1.000	1444	1704	1964
400 VOLTS dc RATED							
0.047	1	10	1.125	0.312	1445	1705	1965
0.047	1	20	1.125	0.312	1446	1706	1966
0.047	3	10	1.062	0.312	1447	1707	1967
0.047	3	20	1.062	0.312	1448	1708	1968
0.10	1	10	1.125	0.400	1449	1709	1969
0.10	1	20	1.125	0.400	1450	1710	1970
0.10	3	10	1.062	0.400	1451	1711	1971
0.10	3	20	1.062	0.400	1452	1712	1972
0.22	1	10	1.125	0.562	1453	1713	1973
0.22	1	20	1.125	0.562	1454	1714	1974
0.22	3	10	1.062	0.562	1455	1715	1975
0.47	1	10	1.625	0.562	1456	1716	1976
0.47	1	10	1.625	0.562	1457	1717	1977
0.47	1	20	1.625	0.562	1458	1718	1978
0.47	3	10	1.562	0.562	1459	1719	1979
0.47	3	20	1.562	0.562	1460	1720	1980
1.0	1	10	1.875	0.750	1461	1721	1981
1.0	1	20	1.875	0.750	1462	1722	1982
1.0	3	10	1.812	0.750	1463	1723	1983
1.0	3	20	1.812	0.750	1464	1724	1984
2.2	1	10	1.875	1.000	1465	1725	1985
2.2	1	20	1.875	1.000	1466	1726	1986
2.2	3	10	1.812	1.000	1467	1727	1987
2.2	3	20	1.812	1.000	1468	1728	1988
3.3	1	10	2.625	1.000	1469	1729	1989
3.3	1	20	2.625	1.000	1470	1730	1990
3.3	3	10	2.562	1.000	1471	1731	1991
3.3	3	20	2.562	1.000	1472	1732	1992

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/01

TABLE I. STYLE CHR09, CHARACTERISTICS, DIMENSIONS AND DASH NUMBER.

CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS NOMINAL (IN.)		DASH NUMBER M39022/01-		
uF		±PERCENT	L	D	M (1.0%)	P (0.1%)	R (0.01%)
600 VOLTS dc RATED							
0.01	1	10	0.812	0.312	1473	1733	1993
0.01	1	20	0.812	0.312	1474	1734	1994
0.01	3	10	0.750	0.312	1475	1735	1995
0.01	3	20	0.750	0.312	1476	1736	1996
0.022	1	10	0.812	0.312	1477	1737	1997
0.022	1	20	0.812	0.312	1478	1738	1998
0.022	3	10	0.750	0.312	1479	1739	1999
0.022	3	20	0.750	0.312	1480	1740	2000
0.047	1	10	1.125	0.400	1481	1741	2001
0.047	1	20	1.125	0.400	1482	1742	2002
0.047	3	10	1.062	0.400	1483	1743	2003
0.047	3	20	1.062	0.400	1484	1744	2004
0.10	1	10	1.125	0.500	1485	1745	2005
0.10	1	20	1.125	0.500	1486	1746	2006
0.10	3	10	1.062	0.500	1487	1747	2007
0.10	3	20	1.062	0.500	1488	1748	2008
0.15	1	10	1.125	0.562	1509	1769	2029
0.15	1	20	1.125	0.562	1510	1770	2030
0.15	3	10	1.062	0.562	1511	1771	2031
0.15	3	20	1.062	0.562	1512	1772	2032
0.22	1	10	1.375	0.562	1489	1749	2009
0.22	1	20	1.375	0.562	1490	1750	2010
0.22	3	10	1.312	0.562	1491	1751	2011
0.22	3	20	1.312	0.562	1492	1752	2012
0.47	1	10	1.625	0.670	1493	1753	2013
0.47	1	20	1.625	0.670	1494	1754	2014
0.47	3	10	1.562	0.670	1495	1755	2015
0.47	3	20	1.562	0.670	1496	1756	2016
1.0	1	10	1.844	1.000	1497	1757	2017
1.0	1	20	1.844	1.000	1498	1758	2018
1.0	3	10	1.781	1.000	1499	1759	2019
1.0	3	20	1.781	1.000	1500	1760	2020
1.5	1	10	1.875	1.000	1501	1761	2021
1.5	1	20	1.875	1.000	1502	1762	2022
1.5	3	10	1.812	1.000	1503	1763	2023
1.5	3	20	1.812	1.000	1504	1764	2024
2.2	1	10	2.625	1.000	1505	1765	2025
2.2	1	20	2.625	1.000	1506	1766	2026
2.2	3	10	2.562	1.000	1507	1767	2027
2.2	3	20	2.562	1.000	1508	1768	2028

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/02

TABLE I. STYLE CHR19 CHARACTERISTICS, DIMENSIONS AND DASH NUMBERS.

CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS NOMINAL (IN.)		DASH NUMBER M39022/02-		
uF		±PERCENT	L	D	M (1.0%)	P (0.1%)	R (0.01%)
200 VOLTS dc RATED							
0.10	1	5	1.125	0.312	1111	1221	1331
0.10	1	10	1.125	0.312	1112	1222	1332
0.10	3	5	1.062	0.312	1113	1223	1333
0.10	3	10	1.062	0.312	1114	1224	1334
0.15	1	5	1.125	0.312	1115	1225	1335
0.15	1	10	1.125	0.312	1116	1226	1336
0.15	3	5	1.062	0.312	1117	1227	1337
0.15	3	10	1.062	0.312	1118	1228	1338
0.22	1	5	1.125	0.400	1119	1229	1339
0.22	1	10	1.125	0.400	1120	1230	1340
0.22	3	5	1.062	0.400	1121	1231	1341
0.22	3	10	1.062	0.400	1122	1232	1342
0.33	1	5	1.125	0.500	1123	1233	1343
0.33	1	10	1.125	0.500	1124	1234	1344
0.33	3	5	1.062	0.500	1125	1235	1345
0.33	3	10	1.062	0.500	1126	1236	1346
0.47	1	5	1.125	0.500	1127	1237	1347
0.47	1	10	1.125	0.500	1128	1238	1348
0.47	3	5	1.062	0.500	1129	1239	1349
0.47	3	10	1.062	0.500	1130	1240	1350
0.68	1	5	1.375	0.562	1131	1241	1351
0.68	1	10	1.375	0.562	1132	1242	1352
0.68	3	5	1.312	0.562	1133	1243	1353
0.68	3	10	1.312	0.562	1134	1244	1354
1.0	1	5	1.625	0.562	1135	1245	1355
1.0	1	10	1.625	0.562	1136	1246	1356
1.0	3	5	1.562	0.562	1137	1247	1357
1.0	3	10	1.562	0.562	1138	1248	1358
1.5	1	5	1.844	0.562	1139	1249	1359
1.5	1	10	1.844	0.562	1140	1250	1360
1.5	3	5	1.781	0.562	1141	1251	1361
1.5	3	10	1.781	0.562	1142	1252	1362
2.0	1	5	1.844	0.672	1143	1253	1363
2.0	1	10	1.844	0.672	1144	1254	1364
2.0	3	5	1.781	0.672	1145	1255	1365
2.0	3	10	1.781	0.672	1146	1256	1366
3.0	1	5	2.125	0.750	1147	1257	1367
3.0	1	10	2.125	0.750	1148	1258	1368
3.0	3	5	2.062	0.750	1149	1259	1369
3.0	3	10	2.062	0.750	1150	1260	1370
4.3	1	5	2.625	0.750	1151	1261	1371
4.3	1	10	2.625	0.750	1152	1262	1372
4.3	3	5	2.562	0.750	1153	1263	1373
4.3	3	10	2.562	0.750	1154	1264	1374

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/02

TABLE I. STYLE CHR19, CHARACTERISTICS, DIMENSIONS AND DASH NUMBER.

CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS NOMINAL (IN.)		DASH NUMBER M39022/02-		
uF		±PERCENT	L	D	M (1.0%)	P (0.1%)	R (0.01%)
200 VOLTS dc RATED							
5.1	1	5	1.875	1.000	1155	1265	1375
5.1	1	10	1.875	1.000	1156	1266	1376
5.1	3	5	1.812	1.000	1157	1267	1377
5.1	3	10	1.812	1.000	1158	1268	1378
6.2	1	5	2.125	1.000	1159	1269	1379
6.2	1	10	2.125	1.000	1160	1270	1380
6.2	3	5	2.062	1.000	1161	1271	1381
6.2	3	10	2.062	1.000	1162	1272	1382
8.2	1	5	2.625	1.000	1163	1273	1383
8.2	1	10	2.625	1.000	1164	1274	1384
8.2	3	5	2.562	1.000	1165	1275	1385
8.2	3	10	2.562	1.000	1166	1276	1386
400 VOLTS dc RATED							
0.047	1	5	1.125	0.400	1167	1277	1387
0.047	1	10	1.125	0.400	1168	1278	1388
0.047	3	5	1.062	0.400	1169	1279	1389
0.047	3	10	1.062	0.400	1170	1280	1390
0.068	1	5	1.125	0.400	1171	1281	1391
0.068	1	10	1.125	0.400	1172	1282	1392
0.068	3	5	1.062	0.400	1173	1283	1393
0.068	3	10	1.062	0.400	1174	1284	1394
0.1	1	5	1.125	0.500	1175	1285	1395
0.1	1	10	1.125	0.500	1176	1286	1396
0.1	3	5	1.062	0.500	1177	1287	1397
0.1	3	10	1.062	0.500	1178	1288	1398
0.15	1	5	1.125	0.562	1179	1289	1399
0.15	1	10	1.125	0.562	1180	1290	1400
0.15	3	5	1.062	0.562	1181	1291	1401
0.15	3	10	1.062	0.562	1182	1292	1402
0.22	1	5	1.375	0.562	1183	1293	1403
0.22	1	10	1.375	0.562	1184	1294	1404
0.22	3	5	1.312	0.562	1185	1295	1405
0.22	3	10	1.312	0.562	1186	1296	1406
0.33	1	5	1.375	0.672	1187	1297	1407
0.33	1	10	1.375	0.672	1188	1298	1408
0.33	3	5	1.312	0.672	1189	1299	1409
0.33	3	10	1.312	0.672	1190	1300	1410
0.47	1	5	1.625	0.672	1191	1301	1411
0.47	1	10	1.625	0.672	1192	1302	1412
0.47	3	5	1.562	0.672	1193	1303	1413
0.47	3	10	1.562	0.672	1194	1304	1414

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/02

TABLE I. STYLE CHR19, CHARACTERISTICS, DIMENSIONS AND DASH NUMBER.


CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS NOMINAL (IN.)		DASH NUMBER M39022/02-		
uF		±PERCENT	L	D	M (1.0%)	P (0.1%)	R (0.01%)
400 VOLTS dc RATED							
0.68	1	5	1.625	0.750	1195	1305	1415
0.68	1	10	1.625	0.750	1196	1306	1416
0.68	3	5	1.562	0.750	1197	1307	1417
0.68	3	10	1.562	0.750	1198	1308	1418
1.0	1	5	1.875	0.750	1199	1309	1419
1.0	1	10	1.875	0.750	1200	1310	1420
1.0	3	5	1.812	0.750	1201	1311	1421
1.0	3	10	1.812	0.750	1202	1312	1422
1.5	1	5	1.625	1.000	1203	1313	1423
1.5	1	10	1.625	1.000	1204	1314	1424
1.5	3	5	1.562	1.000	1205	1315	1425
1.5	3	10	1.562	1.000	1206	1316	1426
2.2	1	5	2.125	1.000	1207	1317	1427
2.2	1	10	2.125	1.000	1208	1318	1428
2.2	3	5	2.062	1.000	1209	1319	1429
2.2	3	10	2.062	1.000	1210	1320	1430
3.3	1	5	2.625	1.000	1211	1321	1431
3.3	1	10	2.625	1.000	1212	1322	1432
3.3	3	5	2.562	1.000	1213	1323	1433
3.3	3	10	2.562	1.000	1214	1324	1434


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/07

STYLE CHR49

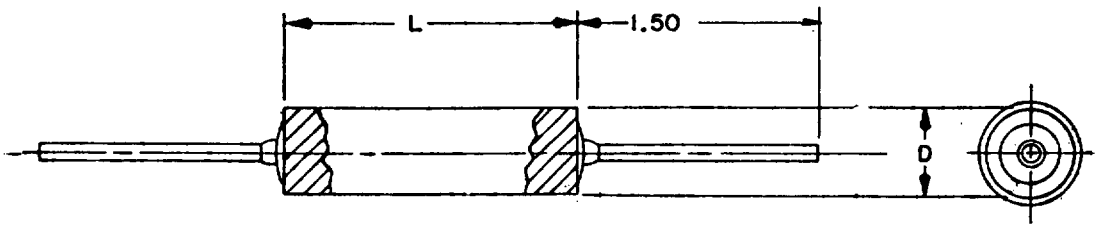



CIRCUIT DIAGRAM

TABLE I. STYLE CHR49 CHARACTERISTICS AND DASH NUMBERS(PLASTIC DIELECTRIC)

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES		DASH NUMBER
V (rms)	uF		±%	L	D	M (1.0%)
165	0.10	1	10	0.312	0.875	1061
165	0.15	1	10	0.312	1.125	1062
165	0.22	1	10	0.400	0.875	1063
165	0.33	1	10	0.400	1.125	1064
165	0.47	1	10	0.400	1.375	1065
165	0.68	1	10	0.562	1.125	1066
165	1.00	1	10	0.562	1.375	1067
155	1.50	1	10	0.562	1.625	1068
150	2.20	1	10	0.670	1.625	1069
140	3.30	1	10	0.750	1.875	1070
130	4.70	1	10	0.750	2.375	1071
110	6.80	1	10	1.000	1.875	1072
80	10.00	1	10	1.000	2.625	1073
300	0.10	1	10	0.500	1.125	1074
300	0.15	1	10	0.562	1.375	1075
300	0.22	1	10	0.562	1.625	1076
300	0.33	1	10	0.562	1.875	1077
300	0.47	1	10	0.670	1.625	1078
290	0.68	1	10	0.750	1.875	1079
270	1.00	1	10	0.750	2.125	1080
235	1.50	1	10	1.000	1.875	1081
200	2.20	1	10	1.000	2.625	1082

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

PART NUMBER: M39022/10-(TYPE DESIGNATION AS DETAILED BELOW)

TYPE DESIGNATION: A156KP

A — CIRCUIT AND VOLTAGE CODE

CODE	CIRCUIT	VOLTAGE
A	1	50
B	3	50
C	1	100
D	3	100
E	1	200
F	3	200
G	1	400
H	3	400
J	1	600
K	3	600
L	1	300
M	3	300

156 — CAPACITANCE


EXPRESSED IN PICOFARADS. THE FIRST TWO DIGITS ARE SIGNIFICANT FIGURES, THE THIRD IS THE NUMBER OF ZEROS TO FOLLOW.


K — CAPACITANCE TOLERANCE

K= ±10 PERCENT
J= ±5 PERCENT
G= ±2 PERCENT
F= ±1 PERCENT

P — FAILURE RATE LEVEL

M (1.0%)
P (0.1%)
R (0.01%)

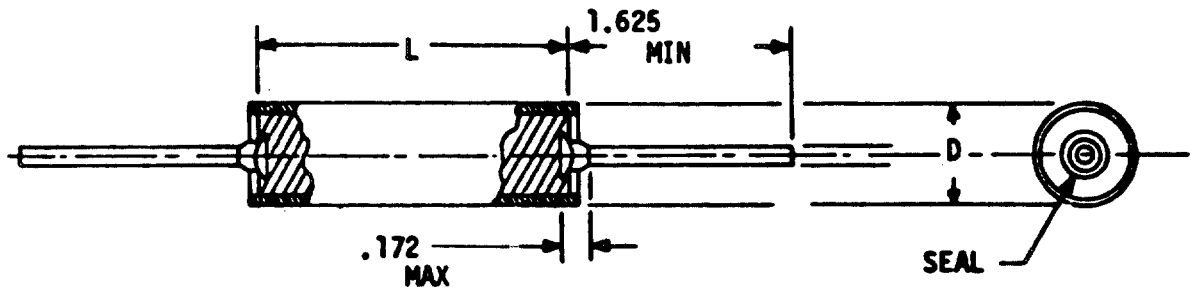



CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS.

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
50	.047	1	10	.174	.531
50	.047	3	10	.174	.469
50	.056	1	10	.174	.531
50	.056	3	10	.174	.469
50	.068	1	10	.174	.625
50	.068	3	10	.174	.563
50	.082	1	10	.174	.625
50	.082	3	10	.174	.563
50	.10	1	10	.174	.625
50	.10	3	10	.174	.563
50	.12	1	10	.174	.625
50	.12	3	10	.174	.563
50	.15	1	10	.193	.625
50	.15	3	10	.193	.563
50	.18	1	10	.193	.625
50	.18	3	10	.193	.563
50	.22	1	10	.235	.625
50	.22	3	10	.235	.563
50	.27	1	10	.235	.625
50	.27	3	10	.235	.563
50	.33	1	10	.312	.625
50	.33	3	10	.312	.563
50	.39	1	10	.312	.625
50	.39	3	10	.312	.563
50	.47	1	10	.312	.625
50	.47	3	10	.312	.563
50	.56	1	10	.312	.625
50	.56	3	10	.312	.563
50	.68	1	10	.312	.843
50	.68	3	10	.312	.781
50	.82	1	10	.312	.843
50	.82	3	10	.312	.781
50	1.0	1	10	.312	.843
50	1.0	3	10	.312	.781
50	1.2	1	10	.400	.843
50	1.2	3	10	.400	.781
50	1.5	1	10	.400	.843
50	1.5	3	10	.400	.781
50	1.8	1	10	.400	.843
50	1.8	3	10	.400	.781
50	2.0	1	10	.400	.843
50	2.0	3	10	.400	.781

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T0[illegible]
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
50	2.2	1	10	.400	1.124
50	2.2	3	10	.400	1.063
50	2.7	1	10	.400	1.125
50	2.7	3	10	.400	1.063
50	3.0	1	10	.400	1.125
50	3.0	3	10	.400	1.063
50	3.3	1	10	.400	1.125
50	3.3	3	10	.400	1.063
50	3.9	1	10	.500	1.125
50	3.9	3	10	.500	1.063
50	4.7	1	10	.500	1.125
50	4.7	3	10	.500	1.063
50	5.0	1	10	.500	1.125
50	5.0	3	10	.500	1.063
50	5.6	1	10	.500	1.125
50	5.6	3	10	.500	1.063
50	6.8	1	10	.562	1.125
50	6.8	3	10	.562	1.063
50	8.2	1	10	.562	1.312
50	8.2	3	10	.562	1.250
50	10.0	1	10	.670	1.125
50	10.0	3	10	.670	1.250
50	12.0	1	10	.670	1.312
50	12.0	3	10	.670	1.250
50	15.0	1	10	.750	1.375
50	15.0	3	10	.750	1.313
50	18.0	1	10	.750	1.375
50	18.0	3	10	.750	1.313
50	20.0	1	10	.750	1.625
50	20.0	3	10	.750	1.563
50	22.0	1	10	.750	1.625
50	22.0	3	10	.750	1.563
100	.01	1	10	.174	.625
100	.01	3	10	.174	.563
100	.012	1	10	.174	.625
100	.012	3	10	.174	.563
100	.015	1	10	.174	.625
100	.015	3	10	.174	.563
100	.018	1	10	.174	.625
100	.018	3	10	.174	.563
100	.022	1	10	.174	.625
100	.022	3	10	.174	.563

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
100	.027	1	10	.174	.625
100	.027	3	10	.174	.563
100	.033	1	10	.174	.625
100	.033	3	10	.174	.563
100	.039	1	10	.174	.625
100	.039	3	10	.174	.563
100	.047	1	10	.193	.625
100	.047	3	10	.193	.563
100	.056	1	10	.193	.625
100	.056	3	10	.193	.563
100	.068	1	10	.235	.625
100	.068	3	10	.235	.563
100	.082	1	10	.235	.625
100	.082	3	10	.235	.563
100	.10	1	10	.235	.688
100	.10	3	10	.235	.626
100	.12	1	10	.235	.688
100	.12	3	10	.235	.626
100	.15	1	10	.312	.625
100	.15	3	10	.312	.563
100	.18	1	10	.312	.625
100	.18	3	10	.312	.563
100	.22	1	10	.312	.688
100	.22	3	10	.312	.626
100	.27	1	10	.312	.688
100	.27	3	10	.312	.626
100	.33	1	10	.312	.812
100	.33	3	10	.312	.750
100	.39	1	10	.312	.812
100	.39	3	10	.312	.750
100	.47	1	10	.400	.688
100	.47	3	10	.400	.626
100	.56	1	10	.400	.812
100	.56	3	10	.400	.750
100	.68	1	10	.400	.812
100	.68	3	10	.400	.750
100	.82	1	10	.400	.938
100	.82	3	10	.400	.876
100	1.0	1	10	.400	.938
100	1.0	3	10	.400	.876
100	1.2	1	10	.500	.938
100	1.2	3	10	.500	.876

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
100	1.5	1	10	.500	.938
100	1.5	3	10	.500	.876
100	1.8	1	10	.500	1.125
100	1.8	3	10	.500	1.063
100	2.0	1	10	.500	1.125
100	2.0	3	10	.500	1.125
100	2.2	1	10	.500	1.063
100	2.2	3	10	.500	1.125
100	2.7	1	10	.562	1.063
100	2.7	3	10	.562	1.312
100	3.0	1	10	.562	1.250
100	3.0	3	10	.562	1.250
100	3.3	1	10	.562	1.312
100	3.3	3	10	.562	1.250
100	4.0	1	10	.562	1.562
100	4.0	3	10	.562	1.500
100	4.7	1	10	.670	1.312
100	4.7	3	10	.670	1.250
100	5.0	1	10	.670	1.312
100	5.0	3	10	.670	1.250
100	5.6	1	10	.670	1.312
100	5.6	3	10	.670	1.250
100	6.8	1	10	.670	1.562
100	6.8	3	10	.670	1.500
100	8.2	1	10	.670	1.812
100	8.2	3	10	.670	1.750
100	10.0	1	10	.750	1.812
100	10.0	3	10	.750	1.750
100	12.0	1	10	.750	1.812
100	12.0	3	10	.750	1.750
100	15.0	1	10	1.000	1.875
100	15.0	3	10	1.000	1.813
100	18.0	1	10	1.000	1.875
100	18.0	3	10	1.000	1.813
100	20.0	1	10	1.000	1.875
100	20.0	3	10	1.000	1.813
100	22.0	1	10	1.000	1.875
100	22.0	3	10	1.000	1.813
200	.01	1	10	.174	.625
200	.01	3	10	.174	.563
200	.012	1	10	.174	.625
200	.012	3	10	.174	.563

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
200	.015	1	10	.174	.625
200	.015	3	10	.174	.563
200	.018	1	10	.193	.625
200	.018	3	10	.193	.563
200	.022	1	10	.193	.625
200	.022	3	10	.193	.563
200	.027	1	10	.235	.625
200	.027	3	10	.235	.563
200	.033	1	10	.235	.625
200	.033	3	10	.235	.563
200	.039	1	10	.235	.688
200	.039	3	10	.235	.626
200	.047	1	10	.235	.688
200	.047	3	10	.235	.626
200	.056	1	10	.312	.625
200	.056	3	10	.312	.563
200	.068	1	10	.312	.625
200	.068	3	10	.312	.563
200	.082	1	10	.312	.688
200	.082	3	10	.312	.626
200	.10	1	10	.312	.688
200	.10	3	10	.312	.626
200	.12	1	10	.312	.812
200	.12	3	10	.312	.750
200	.15	1	10	.312	.812
200	.15	3	10	.312	.750
200	.18	1	10	.400	.688
200	.18	3	10	.400	.626
200	.22	1	10	.400	.812
200	.22	3	10	.400	.750
200	.27	1	10	.400	.812
200	.27	3	10	.400	.750
200	.33	1	10	.400	.938
200	.33	3	10	.400	.876
200	.39	1	10	.400	.938
200	.39	3	10	.400	.876
200	.47	1	10	.400	1.125
200	.47	3	10	.400	1.063
200	.56	1	10	.400	1.312
200	.56	3	10	.400	1.250
200	.68	1	10	.500	1.125
200	.68	3	10	.500	1.063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
200	.82	1	10	.500	1.125
200	.82	3	10	.500	1.063
200	1.0	1	10	.562	1.125
200	1.0	3	10	.562	1.063
200	1.2	1	10	.562	1.312
200	1.2	3	10	.562	1.250
200	1.5	1	10	.562	1.312
200	1.5	3	10	.562	1.250
200	1.8	1	10	.562	1.812
200	1.8	3	10	.562	1.750
200	2.0	1	10	.562	1.812
200	2.0	3	10	.562	1.750
200	2.2	1	10	.562	1.812
200	2.2	3	10	.562	1.750
200	2.7	1	10	.670	1.562
200	2.7	3	10	.670	1.500
200	3.0	1	10	.750	1.562
200	3.0	3	10	.750	1.500
200	3.3	1	10	.750	1.812
200	3.3	3	10	.750	1.750
200	4.0	1	10	.750	1.812
200	4.0	3	10	.750	1.750
200	4.7	1	10	.750	2.062
200	4.7	3	10	.750	2.000
200	5.0	1	10	.750	2.062
200	5.0	3	10	.750	2.000
200	5.6	1	10	.750	2.312
200	5.6	3	10	.750	2.250
200	6.0	1	10	.750	2.312
200	6.0	3	10	.750	2.250
200	7.0	1	10	1.000	1.812
200	7.0	3	10	1.000	1.750
200	8.2	1	10	1.000	2.062
200	8.2	3	10	1.000	2.000
200	10.0	1	10	1.000	2.312
200	10.0	3	10	1.000	2.250
300	.01	1	10	.193	.688
300	.01	3	10	.193	.626
300	.012	1	10	.235	.688
300	.012	3	10	.235	.626
300	.015	1	10	.235	.688
300	.015	3	10	.235	.626

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
300	.018	1	10	.235	.812
300	.018	3	10	.235	.750
300	.022	1	10	.235	.812
300	.022	3	10	.235	.750
300	.027	1	10	.312	.688
300	.027	3	10	.312	.626
300	.033	1	10	.312	.688
300	.033	3	10	.312	.626
300	.039	1	10	.312	.812
300	.039	3	10	.312	.750
300	.047	1	10	.312	.812
300	.047	3	10	.312	.750
300	.056	1	10	.312	.938
300	.056	3	10	.312	.876
300	.068	1	10	.312	.938
300	.068	3	10	.312	.876
300	.082	1	10	.400	.812
300	.082	3	10	.400	.750
300	.10	1	10	.400	.938
300	.10	3	10	.400	.876
300	.12	1	10	.400	.938
300	.12	3	10	.400	.876
300	.15	1	10	.400	1.125
300	.15	3	10	.400	1.063
300	.18	1	10	.400	1.312
300	.18	3	10	.400	1.250
300	.22	1	10	.400	1.312
300	.22	3	10	.400	1.250
300	.27	1	10	.562	1.125
300	.27	3	10	.562	1.063
300	.33	1	10	.562	1.125
300	.33	3	10	.562	1.063
300	.39	1	10	.562	1.125
300	.39	3	10	.562	1.063
300	.47	1	10	.562	1.562
300	.47	3	10	.562	1.500
300	.56	1	10	.562	1.562
300	.56	3	10	.562	1.500
300	.68	1	10	.670	1.312
300	.68	3	10	.670	1.250
300	.82	1	10	.670	1.562
300	.82	3	10	.670	1.500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
300	1.0	1	10	.670	1.812
300	1.0	3	10	.670	1.750
300	1.2	1	10	.670	1.812
300	1.2	3	10	.670	1.750
300	1.5	1	10	.750	2.062
300	1.5	3	10	.750	2.000
300	1.8	1	10	.750	2.062
300	1.8	3	10	.750	2.000
300	2.0	1	10	.750	2.312
300	2.0	3	10	.750	2.250
300	2.2	1	10	1.000	1.812
300	2.2	3	10	1.000	1.750
300	2.7	1	10	1.000	1.812
300	2.7	3	10	1.000	1.750
300	3.0	1	10	1.000	2.062
300	3.0	3	10	1.000	2.000
300	3.3	1	10	1.000	2.312
300	3.3	3	10	1.000	2.250
300	3.9	1	10	1.000	2.562
300	3.9	3	10	1.000	2.500
400	.01	1	10	.235	.688
400	.01	3	10	.235	.626
400	.012	1	10	.235	.812
400	.012	3	10	.235	.750
400	.015	1	10	.235	.812
400	.015	3	10	.235	.750
400	.018	1	10	.235	.812
400	.018	3	10	.235	.750
400	.022	1	10	.312	.688
400	.022	3	10	.312	.626
400	.027	1	10	.312	.812
400	.027	3	10	.312	.812
400	.033	1	10	.312	.812
400	.033	3	10	.312	.750
400	.039	1	10	.312	.938
400	.039	3	10	.312	.876
400	.047	1	10	.400	.812
400	.047	3	10	.400	.750
400	.056	1	10	.400	.812
400	.056	3	10	.400	.750
400	.068	1	10	.400	.938
400	.068	3	10	.400	.876

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
400	.082	1	10	.400	.938
400	.082	3	10	.400	.876
400	.10	1	10	.400	1.125
400	.10	3	10	.400	1.063
400	.12	1	10	.400	1.312
400	.12	3	10	.400	1.250
400	.15	1	10	.400	1.312
400	.15	3	10	.400	1.250
400	.18	1	10	.562	1.125
400	.18	3	10	.562	1.063
400	.22	1	10	.562	1.125
400	.22	3	10	.562	1.063
400	.27	1	10	.562	1.312
400	.27	3	10	.562	1.250
400	.33	1	10	.562	1.562
400	.33	3	10	.562	1.500
400	.39	1	10	.562	1.562
400	.39	3	10	.562	1.500
400	.47	1	10	.562	1.812
400	.47	3	10	.562	1.500
400	.56	1	10	.670	1.562
400	.56	3	10	.670	1.500
400	.68	1	10	.670	1.812
400	.68	3	10	.670	1.750
400	.82	1	10	.750	1.812
400	.82	3	10	.750	1.750
400	1.0	1	10	.750	2.062
400	1.0	3	10	.750	2.000
400	1.2	1	10	1.000	1.812
400	1.2	3	10	1.000	1.750
400	1.5	1	10	1.000	1.812
400	1.5	3	10	1.000	1.750
400	1.8	1	10	1.000	2.062
400	1.8	3	10	1.000	2.000
400	2.0	1	10	1.000	2.062
400	2.0	3	10	1.000	2.000
400	2.2	1	10	1.000	2.312
400	2.2	3	10	1.000	2.250
400	2.5	1	10	1.000	2.562
400	2.5	3	10	1.000	2.500
400	2.7	1	10	1.000	2.562
400	2.7	3	10	1.000	2.500

123.21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
600	.01	1	10	.312	.812
600	.01	3	10	.312	.750
600	.012	1	10	.312	.812
600	.012	3	10	.312	.750
600	.015	1	10	.400	.812
600	.015	3	10	.400	.750
600	.018	1	10	.400	.812
600	.018	3	10	.400	.750
600	.022	1	10	.400	.812
600	.022	3	10	.400	.750
600	.027	1	10	.400	.937
600	.027	3	10	.400	.875
600	.033	1	10	.400	.937
600	.033	3	10	.400	.875
600	.039	1	10	.400	1.125
600	.039	3	10	.400	1.063
600	.047	1	10	.400	1.125
600	.047	3	10	.400	1.063
600	.056	1	10	.400	1.312
600	.056	3	10	.400	1.250
600	.068	1	10	.400	1.312
600	.068	3	10	.400	1.250
600	.082	1	10	.562	1.125
600	.082	3	10	.562	1.063
600	.10	1	10	.562	1.125
600	.10	3	10	.562	1.063
600	.12	1	10	.562	1.312
600	.12	3	10	.562	1.250
600	.15	1	10	.562	1.312
600	.15	3	10	.562	1.250
600	.18	1	10	.562	1.562
600	.18	3	10	.562	1.500
600	.22	1	10	.562	1.812
600	.22	3	10	.562	1.750
600	.27	1	10	.670	1.562
600	.27	3	10	.670	1.500
600	.33	1	10	.670	1.812
600	.33	3	10	.670	1.750
600	.39	1	10	.670	1.812
600	.39	3	10	.670	1.750
600	.47	1	10	.750	1.812
600	.47	3	10	.750	1.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, METALLIZED, PAPER-PLASTIC FILM

MIL-C-39022/10

STYLE CHR10

TABLE I. STYLE CHR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

RATED VOLTAGE	CAPACITANCE VALUE	CIRCUIT DIAGRAM	CAPACITANCE TOLERANCE	DIMENSIONS INCHES	
V dc	uF		±%	D	L
600	.56	1	10	.750	2.062
600	.56	3	10	.750	2.000
600	.68	1	10	.750	2.312
600	.68	3	10	.750	2.250
600	.82	1	10	1.000	1.812
600	.82	3	10	1.000	1.750
600	1.0	1	10	1.000	2.062
600	1.0	3	10	1.000	2.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001 (ESTABLISHED RELIABILITY)

SCOPE: FIXED, DIPPED, MICA DIELECTRIC CAPACITORS IN STYLES CMR03, CMR04, CMR05, CMR06, CMR07 AND CMR08 PER MIL-C-39001. THESE CAPACITORS ARE INTENDED FOR USE IN ANY EQUIPMENT WHERE KNOWN ORDERS OF RELIABILITY ARE REQUIRED.

TEMP RANGE: CHARACTERISTIC O-- -55°C TO +125°C
P-- -55°C TO +150°C

SHOCK: 100 G, SAWTOOTH, (MIL-STD-202, METHOD 213)

VIBRATION: 15 G, 10-2000 Hz, (MIL-STD-202, METHOD 204)

TYPE DESIGNATION: CMR03E300FOCM

CMR03	E	300	F	O	C	M
STYLE	CHARACTERISTICS	CAPACITANCE	CAPACITANCE TOLERANCE	OPERATING TEMPERATURE	RATED VOLTAGE	FAILURE RATE LEVEL
		FIRST TWO DIGITS ARE SIGNIFICANT DIGITS AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW. (SEE TABLE I FOR DIMENSIONS)	D---0.5 pF F---±1% G---±2% J---±5%	O--- -55°C TO +125°C P--- -55°C TO+150°C	Y-------50 A------100 C------300 D------500	M (1.0%) P (0.1%) R (0.01%)
			*	*	*	*

SYMBOL	TEMP COEFF. ppm/°C	CAP DRIFT
C	-200 TO +200	+(0.5% +0.1pF)
E	-20 TO +100	+(0.1% +0.1pF)
F	0 TO +70	+(0.05% +0.1pF)

* COMPLETE TYPE DESIGNATION NUMBER REQUIRES ADDITIONAL SYMBOLS FOR CAPACITANCE TOLERANCE, OPERATING TEMPERATURE, RATED VOLTAGE AND FAILURE RATE LEVEL. THIS NOTE APPLIES TO ALL TABLE II.


161


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001/05

STYLES CMR03, CMR04, CMR05, CMR06 AND CMR08

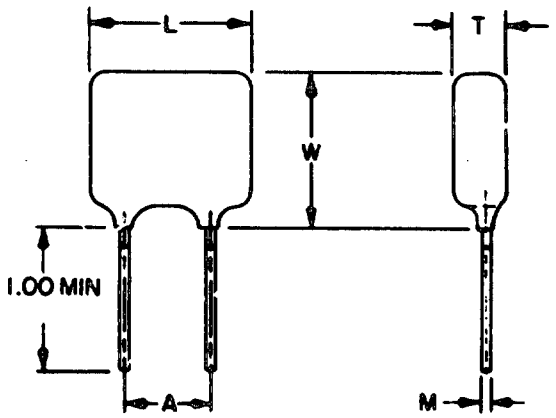



CIRCUIT DIAGRAM

TABLE I. DIMENSIONS.

CAPACITANCE (pF)	300 VOLTS			100 VOLTS			50 VOLTS			300 V, 100 V AND 50 V		
	L	W	T	L	W	T	L	W	T	R	A	M
	MAXIMUM			MAXIMUM			MAXIMUM			MAX	SPACING	DIA
			STYLE CMR03									
1 TO 12 INCL	.270	.190	.110							.078	.120	.016
15	.270	.190	.120									
18 & 20	.270	.200	.120	.270	.190	.110						
22 & 24	.270	.200	.120	.270	.190	.110	.270	.190	.110			
27	.270	.200	.130	.270	.190	.120	.270	.190	.110			
30 & 33	.270	.200	.130	.270	.200	.120	.270	.190	.110			
36	.270	.210	.130	.270	.200	.120	.270	.190	.110			
39	.270	.210	.130	.270	.200	.120	.270	.190	.120			
43	.270	.210	.140	.270	.200	.120	.270	.190	.120			
47 & 51	.270	.210	.140	.270	.200	.130	.270	.190	.120			
56	.270	.220	.150	.270	.200	.130	.270	.190	.120			
62	.270	.220	.150	.270	.210	.130	.270	.200	.120			
68	.270	.220	.150	.270	.210	.140	.270	.200	.120			
75 & 82	.270	.230	.160	.270	.210	.140	.270	.200	.120			
91	.270	.230	.170	.270	.210	.140	.270	.200	.130			
100 & 110	.270	.240	.188	.270	.220	.150	.270	.200	.130			
120	.270	.250	.190	.270	.220	.160	.270	.200	.130			
130				.270	.230	.160	.270	.210	.130			
150				.270	.230	.170	.270	.210	.140	.078	.120	.016

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001/05

TABLE I. DIMENSIONS (CONT).

CAPACITANCE (pF)	300 VOLTS	100 VOLTS			50 VOLTS			300 V, 100 V AND 50 V		
		L	W	T	L	W	T	R	A	M
	STYLE CMR03 (CONT)									
160		.270	.240	.170	.270	.210	.140	.078	.120	.016
170 & 180		.270	.240	.180	.270	.210	.140			
200		.270	.250	.190	.270	.220	.150			
220					.270	.220	.150			
240					.270	.220	.160			
270					.270	.230	.160			
300					.270	.230	.170			
390 & 400					.270	.250	.190	.078	.120	.016

CAPACITANCE (pF)	I		T		B	R	A	M
	MIN	MAX	MIN	MAX	MAX	MAX	SPACING	DIA
	STYLE CMR04							
1 & 24 INCL	.300	.360	.100	.190	.330	.125	.150	.016
27	.300	.370	.100	.190	.330	.125	.150	.016
30 TO 68 INCL	.300	.370	.100	.190	.340	.125	.150	.016
75	.300	.370	.110	.200	.340	.125	.150	.016
82	.300	.370	.110	.200	.350	.125	.150	.016
91 & 100	.300	.370	.110	.200	.350	.125	.150	.016
110 & 120	.300	.380	.110	.200	.350	.125	.150	.016
130	.300	.380	.110	.200	.360	.125	.150	.016
150 & 160	.300	.380	.120	.210	.360	.125	.150	.016
180	.300	.390	.120	.210	.370	.125	.150	.016
200 TO 390 INCL	.300	.390	.140	.220	.380	.125	.150	.016
	STYLE CMR05							
1 TO 62 INCL	.400	.450	.090	.170	.360	.125	.225	.025
68 TO 82 INCL	.400	.450	.095	.180	.360	.125	.225	.025
91 & 100	.400	.460	.095	.180	.360	.125	.225	.025
110 TOP 130 INCL	.400	.460	.095	.180	.370	.125	.225	.025
150 TO 180 INCL	.400	.460	.110	.190	.370	.125	.225	.025
200	.400	.460	.110	.190	.380	.125	.225	.025
220 &240	.400	.460	.110	.200	.380	.125	.225	.025
270 TO 330 INCL	.400	.470	.110	.210	.390	.125	.225	.025
360 & 390 INCL	.400	.470	.120	.220	.400	.125	.225	.025
	STYLE CMR06							
430 &470	.550	.640	.090	.200	.510	.140	.350	.032
510 TO 620 INCL	.560	.650	.090	.200	.510	.140	.350	.032
680 TO 910 INCL	.560	.650	.100	.210	.510	.140	.350	.032
1000 & 1100	.560	.650	.110	.220	.520	.140	.350	.032
1200 & 1300	.570	.660	.110	.220	.520	.140	.350	.032
1500	.570	.660	.120	.230	.520	.140	.350	.032
1600	.570	.660	.120	.230	.530	.140	.350	.032
1800 & 2000	.580	.670	.130	.240	.530	.140	.350	.032
2200	.580	.670	.140	.250	.530	.140	.350	.032
2400	.580	.670	.150	.260	.540	.140	.350	.032

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001/05

TABLE I. DIMENSIONS (CONT).

CAPACITANCE (pF)	I		T		B	R	A	M
	MIN	MAX	MIN	MAX	MAX	MAX	SPACING	DIA
STYLE CMR06 (CONT)								
2700	.590	.680	.160	.270	.540	.140	.350	.032
3000	.590	.680	.170	.280	.550	.140	.350	.032
3300	.590	.680	.180	.290	.550	.140	.350	.032
3600	.590	.680	.190	.300	.560	.140	.350	.032
3900	.600	.690	.200	.310	.560	.140	.350	.032
4300	.600	.690	.220	.330	.570	.140	.350	.032
4700	.610	.700	.220	.350	.580	.140	.350	.032
STYLE CMR07								
5100	.680	.780	.150	.280	.860	.141	.425	.040
5600 & 6200	.680	.780	.150	.290	.870	.141	.425	.040
6800	.680	.780	.150	.300	.870	.141	.425	.040
7500	.690	.790	.150	.310	.880	.141	.425	.040
8200	.690	.790	.150	.320	.880	.141	.425	.040
9100	.690	.790	.150	.330	.880	.141	.425	.040
10000	.700	.800	.200	.340	.890	.141	.425	.040
11000	.700	.800	.200	.350	.890	.141	.425	.040
12000	.700	.800	.200	.360	.890	.141	.425	.040
13000	.710	.810	.200	.370	.890	.141	.425	.040
15000	.710	.810	.250	.390	.900	.141	.425	.040
16000	.720	.820	.250	.410	.900	.141	.425	.041
18000	.720	.820	.250	.430	.910	.141	.425	.040
20000	.730	.830	.250	.450	.920	.141	.425	.040
STYLE CMR08								
22000	1.300	1.420	.180	.310	.880	.141	1.050	.040
24000	1.310	1.430	.180	.320	.880	.141	1.050	.040
27000	1.320	1.430	.180	.330	.880	.141	1.050	.040
30000	1.330	1.440	.180	.350	.890	.141	1.050	.041
33000	1.330	1.440	.180	.360	.890	.141	1.050	.040
36000	1.340	1.450	.180	.380	.900	.141	1.050	.040
39000	1.340	1.450	.220	.400	.900	.141	1.050	.040
43000	1.350	1.460	.225	.420	.910	.141	1.050	.040
47000	1.360	1.470	.250	.450	.910	.141	1.050	.040
51000	1.370	1.480	.250	.470	.920	.141	1.050	.041
56000	1.350	1.460	.225	.420	.910	.141	1.050	.040
62000	1.360	1.470	.250	.450	.920	.141	1.050	.040
68000	1.370	1.480	.260	.470	.910	.141	1.050	.040
75000	1.360	1.470	.240	.440	.910	.141	1.050	.040
82000	1.370	1.480	.310	.460	.920	.141	1.050	.040
91000	1.390	1.500	.340	.500	.940	.141	1.050	.040

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001/05

TABLE II. TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE VALUE	RATED VOLTAGE	OPERATING TEMPERATURE RANGE	CAPACITANCE TOLERANCE
	(pF)	V dc		
	STYLE CMR03			
CMR03C1R0DOC-	1.0	300	0	D
CMR03C1R5DOC-	1.5	300	0	D
CMR03C2R0DOC-	2.0	300	0	D
CMR03C2R5DOC-	2.5	300	0	D
CMR03C3R0DOC-	3.0	300	0	D
CMR03C3R5DOC-	3.5	300	0	D
CMR03C4R0DOC-	4.0	300	0	D
CMR03C4R5DOC-	4.5	300	0	D
CMR03C5R0DOC-	5.0	300	0	D
CMR03C6R0DOC-	6.0	300	0	D
CMR03C7R0DOC-	7.0	300	0	D
CMR03C8R0DOC-	8.0	300	0	D
CMR03C9R0DOC-	9.0	300	0	D
CMR03C100DOC-	10	300	0	D
CMR03C110DOC-	11	300	0	D
CMR03C120DOC-	12	300	0	D
CMR03C150DO--	15	300,100	0	D
CMR03C180DO--	18	300,100	0	D
CMR03E200DO--	20	300,100	0	D
CMR03E220DO--	22	300,100,50	0	D
CMR03E240DO--	24	300,100,50	0	D
CMR03E270-O--	27	300,100,50	0	G,J
CMR03E300-O--	30	300,100,50	0	G,J
CMR03E330-O--	33	300,100,50	0	G,J
CMR03E360-O--	36	300,100,50	0	G,J
CMR03E390-O--	39	300,100,50	0	G,J
CMR03E430-O--	43	300,100,50	0	G,J
CMR03E470-O--	47	300,100,50	0	G,J
CMR03E510-O--	51	300,100,50	0	G,J
CMR03E560JO--	56	300,100,50	0	G,J
CMR03E620JO--	62	300,100,50	0	G,J
CMR03E680JO--	68	300,100,50	0	G,J
CMR03E750JO--	75	300,100,50	0	G,J
CMR03E820JO--	82	300,100,50	0	G,J
CMR03F910JO--	91	300,100,50	0	G,J
CMR03F101JO--	100	300,100,50	0	G,J
CMR03F111JO--	110	300,100,50	0	G,J
CMR03F121JO--	120	300,100,50	0	G,J
CMR03F131JO--	130	100,50	0	G,J
CMR03F151JO--	150	100,50	0	G,J
CMR03F161JO--	160	100,50	0	G,J
CMR03F171JO--	170	100,50	0	G,J
CMR03F181JO--	180	100,50	0	G,J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001/05

TABLE II. TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE VALUE	RATED VOLTAGE	OPERATING TEMPERATURE RANGE	CAPACITANCE TOLERANCE
	(pF)	V dc		
STYLE CMR03 (CONT)				
CMR03F201JO--	200	100,50	0	G,J
CMR03F221JOY-	220	50	0	G,J
CMR03F241JOY-	240	50	0	G,J
CMR03F271JOY-	270	50	0	G,J
CMR03F301JOY-	300	50	0	G,J
CMR03F331JOY-	330	50	0	G,J
CMR03F361JOY-	360	50	0	G,J
CMR03F391JOY-	390	50	0	G,J
CMR03F401JOY-	400	50	0	G,J
STYLE CMR04				
CMR04C1R0D-D-	1.0	500	OP	D
CMR04C1R5D-D-	1.5	500	OP	D
CMR04C2R0D-D-	2.0	500	OP	D
CMR04C2R5D-D-	2.5	500	OP	D
CMR04C3R0D-D-	3.0	500	OP	D
CMR04C3R5D-D-	3.5	500	OP	D
CMR04C4R0D-D-	4.0	500	OP	D
CMR04C4R5D-D-	4.5	500	OP	D
CMR04C5R0D-D-	5.0	500	OP	D
CMR04C6R0D-D-	6.0	500	OP	D
CMR04C7R0D-D-	7.0	500	OP	D
CMR04C8R0D-D-	8.0	500	OP	D
CMR04C9R0D-D-	9.0	500	OP	D
CMR04C100D-D-	10	500	OP	D
CMR04C110D-D-	11	500	OP	D
CMR04C120J-D-	12	500	OP	J
CMR04C150J-D-	15	500	OP	J
CMR04C180J-D-	18	500	OP	J
CMR04E200J-D-	20	500	OP	J
CMR04E220J-D-	22	500	OP	J
CMR04E240J-D-	24	500	OP	J
CMR04E270--D-	27	500	OP	G,J
CMR04E300--D-	30	500	OP	G,J
CMR04E330--D-	33	500	OP	G,J
CMR04E360--D-	36	500	OP	G,J
CMR04E390--D-	39	500	OP	G,J
CMR04E430--D-	43	500	OP	G,J
CMR04E470--D-	47	500	OP	G,J
CMR04E510--D-	51	500	OP	F,G,J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001/05

TABLE II. TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE VALUE	RATED VOLTAGE	OPERATING TEMPERATURE RANGE	CAPACITANCE TOLERANCE
	(pF)	V dc		
STYLE CMR04				
CMR04E560--D-	56	500	OP	F,G,J
CMR04E620--D-	62	500	OP	F,G,J
CMR04E680--D-	68	500	OP	F,G,J
CMR04E750--D-	75	500	OP	F,G,J
CMR04E820--D-	82	500	OP	F,G,J
CMR04F910--D-	91	500	OP	F,G,J
CMR04F101--D-	100	500	OP	F,G,J
CMR04F111--D-	110	500	OP	F,G,J
CMR04F121--D-	120	500	OP	F,G,J
CMR04F131--D-	130	500	OP	F,G,J
CMR04F151--D-	150	500	OP	F,G,J
CMR04F161--D-	160	500	OP	F,G,J
CMR04F181--D-	180	500	OP	F,G,J
CMR04F201--D-	200	500	OP	F,G,J
CMR04F221--D-	220	500	OP	F,G,J
CMR04F241--D-	240	500	OP	F,G,J
CMR04F271--C-	270	300	OP	F,G,J
CMR04F301--C-	300	300	OP	F,G,J
CMR04F331--A-	330	100	OP	F,G,J
CMR04F361--A-	360	100	OP	F,G,J
CMR04F391--A-	390	100	OP	F,G,J
STYLE CMR05				
CMR05C1R0D-D-	1.0	500	OP	F,G,J
CMR05C1R5D-D-	1.5	500	OP	F,G,J
CMR05C2R0D-D-	2.0	500	OP	F,G,J
CMR05C2R5D-D-	2.5	500	OP	F,G,J
CMR05C3R0D-D-	3.0	500	OP	F,G,J
CMR05C3R5D-D-	3.5	500	OP	F,G,J
CMR05C4R0D-D-	4.0	500	OP	F,G,J
CMR05C4R5D-D-	4.5	500	OP	F,G,J
CMR05C5R0D-D-	5.0	500	OP	F,G,J
CMR05C6R0D-D-	6.0	500	OP	F,G,J
CMR05C7R0D-D-	7.0	500	OP	D
CMR05C8R0D-D-	8.0	500	OP	D
CMR05C9R0D-D-	9.0	500	OP	D
CMR05C100D-D-	10	500	OP	D
CMR05C110D-D-	11	500	OP	J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001/05

TABLE II. TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE VALUE	RATED VOLTAGE	OPERATING TEMPERATURE RANGE	CAPACITANCE TOLERANCE
	(pF)	V dc		
STYLE CMR05 (CONT)				
CMR05C120J-D-	12	500	OP	J
CMR05C150J-D-	15	500	OP	J
CMR05C180J-D-	18	500	OP	J
CMR05E200J-D-	20	500	OP	J
CMR05E220J-D-	22	500	OP	J
CMR05E240J-D-	24	500	OP	J
CMR05E270--D-	27	500	OP	G,J
CMR05E300--D-	30	500	OP	G,J
CMR05E330--D-	33	500	OP	G,J
CMR05E360--D-	36	500	OP	G,J
CMR05E390--D-	39	500	OP	G,J
CMR05E430--D-	43	500	OP	G,J
CMR05E470--D-	47	500	OP	G,J
CMR05E510--D-	51	500	OP	F,G,J
CMR05E560--D-	56	500	OP	F,G,J
CMR05E620--D-	62	500	OP	F,G,J
CMR05E680--D-	68	500	OP	F,G,J
CMR05E750--D-	75	500	OP	F,G,J
CMR05E820--D-	82	500	OP	F,G,J
CMR05F910--D-	91	500	OP	F,G,J
CMR05F101--D-	100	500	OP	F,G,J
CMR05F111--D-	110	500	OP	F,G,J
CMR05F121--D-	120	500	OP	F,G,J
CMR05F131--D-	130	500	OP	F,G,J
CMR05F151--D-	150	500	OP	F,G,J
CMR05F161--D-	160	500	OP	F,G,J
CMR05F181--D-	180	500	OP	F,G,J
CMR05F201--D-	200	500	OP	F,G,J
CMR05F221--D-	220	500	OP	F,G,J
CMR05F241--D-	240	500	OP	F,G,J
CMR05F271--D-	270	500	OP	F,G,J
CMR05F301--D-	300	500	OP	F,G,J
CMR05F331--D-	330	500	OP	F,G,J
CMR05F361--D-	360	500	OP	F,G,J
CMR05F391--D-	390	500	OP	F,G,J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001/05

TABLE II. TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE VALUE	RATED VOLTAGE	OPERATING TEMPERATURE RANGE	CAPACITANCE TOLERANCE
	(pF)	V dc		
STYLE CMR06				
CMR06F431--D-	430	500	OP	F,G,J
CMR06F471--D-	470	500	OP	F,G,J
CMR06F511--D-	510	500	OP	F,G,J
CMR06F561--D-	560	500	OP	F,G,J
CMR06F621--D-	620	500	OP	F,G,J
CMR06F581--D-	680	500	OP	F,G,J
CMR06F751--D-	750	500	OP	F,G,J
CMR06F821--D-	820	500	OP	F,G,J
CMR06F911--D-	910	500	OP	F,G,J
CMR06F102--D-	1000	500	OP	F,G,J
CMR06F112--D-	1100	500	OP	F,G,J
CMR06F122--D-	1200	500	OP	F,G,J
CMR06F132--D-	1300	500	OP	F,G,J
CMR06F152--D-	1500	500	OP	F,G,J
CMR06F162--D-	1600	500	OP	F,G,J
CMR06F182--D-	1800	500	OP	F,G,J
CMR06F202--D-	2000	500	OP	F,G,J
CMR06F222--D-	2200	500	OP	F,G,J
CMR06F242--D-	2400	500	OP	F,G,J
CMR06F272--D-	2700	500	OP	F,G,J
CMR06F302--D-	3000	500	OP	F,G,J
CMR06F332--D-	3300	500	OP	F,G,J
CMR06F362--D-	3600	500	OP	F,G,J
CMR06F392--D-	3900	500	OP	F,G,J
CMR06F432--D-	4300	500	OP	F,G,J
CMR06F472--D-	4700	500	OP	F,G,J
STYLE CMR07				
CMR07F512--D-	5100	500	OP	F,G,J
CMR07F562--D-	5600	500	OP	F,G,J
CMR07F622--D-	6200	500	OP	F,G,J
CMR07F682--D-	6800	500	OP	F,G,J
CMR07F752--D-	7500	500	OP	F,G,J
CMR07F822--D-	8200	500	OP	F,G,J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, MICA DIELECTRIC

MIL-C-39001/05

TABLE II. TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE VALUE	RATED VOLTAGE	OPERATING TEMPERATURE RANGE	CAPACITANCE TOLERANCE
	(pF)	V dc		
STYLE CMR07 (CONT)				
CMR07F912--D-	9100	500	OP	F,G,J
CMR07F103--D-	10000	500	OP	F,G,J
CMR07F113--D-	11000	500	OP	F,G,J
CMR07F123--D-	12000	500	OP	F,G,J
CMR07F133--D-	13000	500	OP	F,G,J
CMR07F153--D-	15000	500	OP	F,G,J
CMR07F163--D-	16000	500	OP	F,G,J
CMR07F183--D-	18000	500	OP	F,G,J
CMR07F203--D-	20000	500	OP	F,G,J
STYLE CMR08				
CMR08F223--D-	22000	500	OP	F,G,J
CMR08F243--D-	24000	500	OP	F,G,J
CMR08F273--D-	27000	500	OP	F,G,J
CMR08F303--D-	30000	500	OP	F,G,J
CMR08F333--D-	33000	500	OP	F,G,J
CMR08F363--D-	36000	500	OP	F,G,J
CMR08F393--D-	39000	500	OP	F,G,J
CMR08F433--D-	43000	500	OP	F,G,J
CMR08F473--D-	47000	500	OP	F,G,J
CMR08F513--D-	51000	500	OP	F,G,J
CMR08F563--C-	56000	300	OP	F,G,J
CMR08F623--C-	62000	300	OP	F,G,J
CMR08F683--C-	68000	300	OP	F,G,J
CMR08F753--A-	75000	100	OP	F,G,J
CMR08F823--A-	82000	100	OP	F,G,J
CMR08F913--A-	91000	100	OP	F,G,J

Source: https://assist.dla.mil downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, FIXED

GLASS DIELECTRIC


MIL-C-23269(ESTABLISHED RELIABILITY)

SCOPE: FIXED, INSULATED, GLASS DIELECTRIC CAPACITORS COVERED IN MIL-C-23269 ARE ESTABLISHED RELIABILITY PARTS INTENDED FOR USE IN HIGH-STABILITY, LOW LOSS RADIO FREQUENCY APPLICATIONS. THE PREDICTABLE TEMPERATURE COEFFICIENT PLUS THE UNIFORMITY OF T-C FROM PART TO PART IS A DESIRABLE ATTRIBUTE FOR HIGH-STABILITY CIRCUITRY.

TEMP RANGE: -55°C TO +125°C

SHOCK: 100G, (MIL-STD-202, METHOD 213)

VIBRATION: 20G, 10-2000 Hz (MIL-STD- 202, METHOD 204)

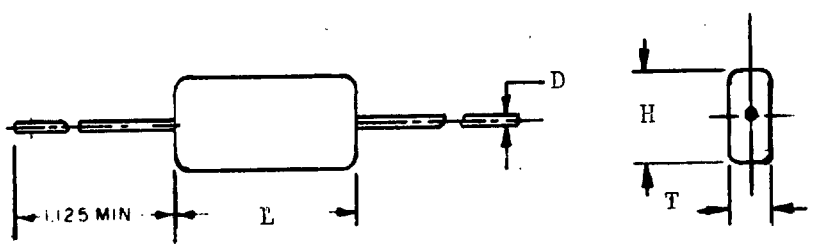

STYLE	DIMENSIONS			
	L	T	H	D
CYR10	.344	.078	.172	.020
CYR15	.469	.109	.266	.020
CYR20	.734	.141	.422	.025
CYR30	.766	.141	.750	.025

PART NUMBER:
EXAMPLE: M23269/01-3001

- M23269 — GENERAL SPECIFICATION
- /01 — DETAIL SPECIFICATION
- -3001 — DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-23269/1

TABLE I. STYLE CYR10 CHARACTERISTICS AND DASH NUMBERS

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/01 M(1.0 %)	CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/01 M(1.0 %)
	500 VOLTS			500 VOLTS	
0.5	0.25pF	3001	24	2%	3047
1.0	0.25pF	3002	24	5%	3048
1.5	0.25pF	3003	27	1%	3049
2.2	0.25pF	3004	27	2%	3050
2.2	0.50pF	3005	27	5%	3051
2.7	0.25pF	3006	30	1%	3052
3.0	0.25pF	3007	30	2%	3053
3.0	0.50pF	3008	30	5%	3054
3.3	0.25pF	3009	33	1%	3055
3.6	0.25pF	3010	33	2%	3056
3.6	0.50pF	3011	33	5%	3057
3.9	0.25pF	3012	36	1%	3058
4.3	0.25pF	3013	36	2%	3059
4.3	0.50pF	3014	36	5%	3060
4.7	0.25pF	3015	39	1%	3061
5.1	0.25pF	3016	39	2%	3062
5.6	0.25pF	3017	39	5%	3063
5.6	5%	3018	43	1%	3064
6.2	0.25pF	3019	43	2%	3065
6.2	5%	3020	43	5%	3066
6.8	0.25pF	3021	47	1%	3067
6.8	5%	3022	47	2%	3068
7.5	0.25pF	3023	47	5%	3069
7.5	5%	3024	51	1%	3070
8.2	0.25pF	3025	51	2%	3071
8.2	5%	3026	51	5%	3072
9.1	0.25pF	3027	56	1%	3073
9.1	5%	3028	56	2%	3074
10	0.25pF	3029	56	5%	3075
10	5%	3030	62	1%	3076
11	0.25pF	3031	62	2%	3077
11	5%	3032	62	5%	3078
12	0.25pF	3033	68	1%	3079
12	5%	3034	68	2%	3080
13	2%	3035	68	5%	3081
13	5%	3036	75	1%	3082
15	2%	3037	75	2%	3083
15	5%	3038	75	5%	3084
16	2%	3039	82	1%	3085
16	5%	3040	82	2%	3086
18	2%	3041	82	5%	3087
18	5%	3042	91	1%	3088
20	2%	3043	91	2%	3089
20	5%	3044	91	5%	3090
22	2%	3045	100	1%	3091
22	5%	3046	100	2%	3092

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-23269/1

TABLE I. STYLE CYR10 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/01 M(1.0 %)	CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/01 M(1.0 %)
	500 VOLTS			500 VOLTS	
100	5%	3093	180	5%	3111
110	1%	3094	200	1%	3112
110	2%	3095	200	2%	3113
110	5%	3096	200	5%	3114
120	1%	3097			
120	2%	3098		300 VOLTS	
120	5%	3099	220	1%	3115
130	1%	3100	220	2%	3116
130	2%	3101	220	5%	3117
130	5%	3102	240	1%	3118
150	1%	3103	240	2%	3119
150	2%	3104	240	5%	3120
150	5%	3105	270	1%	3121
160	1%	3106	270	2%	3122
160	2%	3107	270	5%	3123
160	5%	3108	300	1%	3124
180	1%	3109	300	2%	3125
180	2%	3110	300	5%	3126

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

GLASS DIELECTRIC

MIL-C-23269/02

TABLE I. STYLE CYR15 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE pF	CAPACITANCE TOLERANCE ±%	DASH NUMBER M (1.0%)	CAPACITANCE pF	CAPACITANCE TOLERANCE ±%	DASH NUMBER M (1.0%)
	500 VOLTS			300 VOLTS	
220	1	3001	560	1	3031
220	2	3002	560	2	3032
220	5	3003	560	5	3033
240	1	3004	620	1	3034
240	2	3005	620	2	3035
240	5	3006	620	5	3036
270	1	3007	680	1	3037
270	2	3008	680	2	3038
270	5	3009	680	5	3039
300	1	3010	750	1	3040
300	2	3011	750	2	3041
300	5	3012	750	5	3042
330	1	3013	820	1	3043
330	2	3014	820	2	3044
330	5	3015	820	5	3045
360	1	3016	910	1	3046
360	2	3017	910	2	3047
360	5	3018	910	5	3048
390	1	3019	1000	1	3049
390	2	3020	1000	2	3050
390	5	3021	1000	5	3051
430	1	3022	1100	1	3052
430	2	3023	1100	2	3053
430	5	3024	1100	5	3054
470	1	3025	1200	1	3055
470	2	3026	1200	2	3056
470	5	3027	1200	5	3057
510	1	3028			
510	2	3029			
510	5	3030			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

GLASS DIELECTRIC

MIL-C-23269/03

TABLE I. STYLE CYR20 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE pF	CAPACITANCE TOLERANCE +%	DASH NUMBER M (1.0%)	CAPACITANCE pF	CAPACITANCE TOLERANCE +%	DASH NUMBER M (1.0%)
	500 VOLTS			500 VOLTS	
560	1	3001	1800	2	3038
560	2	3002	1800	5	3039
560	5	3003	2000	1	3040
620	1	3004	2000	2	3041
620	2	3005	2000	5	3042
620	5	3006	2200	1	3043
680	1	3007	2200	2	3044
680	2	3008	2200	5	3045
680	5	3009	2400	1	3046
750	1	3010	2400	2	3047
750	2	3011	2400	5	3048
750	5	3012	2700	1	3049
820	1	3013	2700	2	3050
820	2	3014	2700	5	3051
820	5	3015	3000	1	3052
910	1	3016	3000	2	3053
910	2	3017	3000	5	3054
910	5	3018	3300	1	3055
1000	1	3019	3300	2	3056
1000	2	3020	3300	5	3057
1000	5	3021			
1100	1	3022		300 VOLTS	
1100	2	3023	3600	1	3058
1100	5	3024	3600	2	3059
1200	1	3025	3600	5	3060
1200	2	3026	3900	1	3061
1200	5	3027	3900	2	3062
1300	1	3028	3900	5	3063
1300	2	3029	4300	1	3064
1300	5	3030	4300	2	3065
1500	1	3031	4300	5	3066
1500	5	3033	4700	1	3067
1500	2	3032	4700	2	3068
1600	1	3034	4700	5	3069
1600	2	3035	5100	1	3070
1600	5	3036	5100	2	3071
1800	1	3037	5100	5	3072

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

GLASS DIELECTRIC

MIL-C-23269/04

TABLE I. STYLE CYR30 CHARACTERISTICS AND DASH NUMBERS

CAPACITANCE pF	CAPACITANCE TOLERANCE ±%	DASH NUMBER M (1.0%)	CAPACITANCE pF	CAPACITANCE TOLERANCE ±%	DASH NUMBER M (1.0%)
	500 VOLTS			300 VOLTS	
3.6	1	3001	6.8	1	3022
3.6	2	3002	6.8	2	3023
3.6	5	3003	6.8	5	3024
3.9	1	3004	7.5	1	3025
3.9	2	3005	7.5	2	3026
3.9	5	3006	7.5	5	3027
4.3	1	3007	8.2	1	3028
4.3	2	3008	8.2	2	3029
4.3	5	3009	8.2	5	3030
4.7	1	3010	9.1	1	3031
4.7	2	3011	9.1	2	3032
4.7	5	3012	9.1	5	3033
5.1	1	3013	10.0	1	3034
5.1	2	3014	10.0	2	3035
5.1	5	3015	10.0	5	3036
5.6	1	3016			
5.6	2	3017			
5.6	5	3018			
6.2	1	3019			
6.2	2	3020			
6.2	5	3021			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, GLASS DIELECTRIC

MIL-C-23269/05

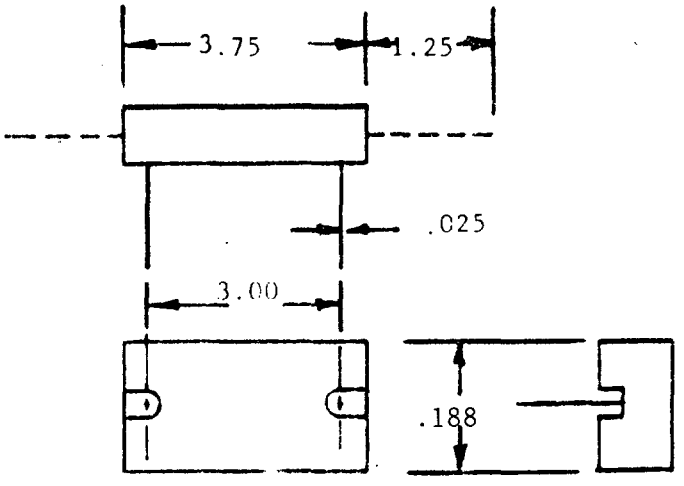


TABLE I. STYLE CYR13 CHARACTERISTICS AND DASH NUMBERS

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/05-		
		M(1.0%)	P(0.1%)	R(0.01%)
		500 VOLTS dc		
0.5	0.25pF	3001	4001	5001
1.0	0.25pF	3002	4002	5002
1.5	0.25pF	3003	4003	5003
2.2	0.25pF	3004	4004	5004
2.2	0.50pF	3005	4005	5005
2.7	0.25pF	3006	4006	5006
3.0	0.25pF	3007	4007	5007
3.0	0.50pF	3008	4008	5008
3.3	0.25pF	3009	4009	5009
3.6	0.25pF	3010	4010	5010
3.6	0.50pF	3011	4011	5011
3.9	0.25pF	3012	4012	5012
4.3	0.25pF	3013	4013	5013
4.3	0.50pF	3014	4014	5014
4.7	0.25pF	3015	4015	5015
5.1	0.25pF	3016	4016	5016
5.6	0.25pF	3017	4017	5017
5.6	5%	3018	4018	5018
6.2	0.25pF	3019	4019	5019
6.2	5%	3020	4020	5020
6.8	0.25pF	3021	4021	5021
6.8	5%	3022	4022	5022

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CYR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/05- M(1.0%)	P(0.1%)	R(0.01%)
		500 VOLTS dc		
7.5	0.25pF	3023	4023	5023
7.5	5%	3024	4024	5024
8.2	0.25pF	3025	4025	5025
8.2	5%	3026	4026	5026
9.1	0.25pF	3027	4027	5027
9.1	5%	3028	4028	5028
10	0.25pF	3029	4029	5029
10	5%	3030	4030	5030
11	0.25pF	3031	4031	5031
11	5%	3032	4032	5032
12	0.25pF	3033	4033	5033
12	5%	3034	4034	5034
13	2%	3035	4035	5035
13	5%	3036	4036	5036
15	2%	3037	4037	5037
15	5%	3038	4038	5038
16	2%	3039	4039	5039
16	5%	3040	4040	5040
18	2%	3041	4041	5041
18	5%	3042	4042	5042
20	2%	3043	4043	5043
20	5%	3044	4044	5044
22	2%	3045	4045	5045
22	5%	3046	4046	5046
24	2%	3047	4047	5047
24	5%	3048	4048	5048
27	1%	3049	4049	5049
27	2%	3050	4050	5050
27	5%	3051	4051	5051
30	1%	3052	4052	5052
30	2%	3053	4053	5053
30	5%	3054	4054	5054
33	1%	3055	4055	5055
33	2%	3056	4056	5056
33	5%	3057	4057	5057
36	1%	3058	4058	5058
36	2%	3059	4059	5059
36	5%	3060	4060	5060
39	1%	3061	4061	5061
39	2%	3062	4062	5062
39	5%	3063	4063	5063
43	1%	3064	4064	5064
43	2%	3065	4065	506
43	5%	3066	4066	5066

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-23269/05

TABLE I. STYLE CYR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/05- M(1.0%)	P(0.1%)	R(0.01%)
		500 VOLTS dc		
47	1%	3067	4067	5067
47	2%	3068	4068	5068
47	5%	3069	4069	5069
51	1%	3070	4070	5070
51	2%	3071	4071	5071
51	5%	3072	4072	5072
56	1%	3073	4073	5073
56	2%	3074	4074	5074
56	5%	3075	4075	5075
62	1%	3076	4076	5076
62	2%	3077	4077	5077
62	5%	3078	4078	5078
68	1%	3079	4079	5079
68	2%	3080	4080	5080
68	5%	3081	4081	5081
75	1%	3082	4082	5082
75	2%	3083	4083	5083
75	5%	3084	4084	5084
82	1%	3085	4085	5085
82	2%	3086	4086	5086
82	5%	3087	4087	5087
91	1%	3088	4088	5088
91	2%	3089	4089	5089
91	5%	3090	4090	5090
100	1%	3091	4091	5091
100	2%	3092	4092	5092
100	5%	3093	4093	5093
110	1%	3094	4094	5094
110	2%	3095	4095	5095
110	5%	3096	4096	5096
120	1%	3097	4097	5097
120	2%	3098	4098	5098
120	5%	3099	4099	5099
130	1%	3100	4100	5100
130	2%	3101	4101	5101
130	5%	3102	4102	5102
150	1%	3103	4103	5103
150	2%	3104	4104	5104
150	5%	3105	4105	5105
160	1%	3106	4106	5106
160	2%	3107	4107	5107
160	5%	3108	4108	5108

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-23269/05

TABLE I. STYLE CYR13 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/05-		
		M(1.0%)	P(0.1%)	R(0.01%)
		500 VOLTS dc		
180	1%	3109	4109	5109
180	2%	3110	4110	5100
180	5%	3111	4111	5111
200	1%	3112	4112	5112
200	2%	3113	4113	5113
200	5%	3114	4114	5114
		300 VOLTS dc		
220	1%	3115	4115	5115
220	2%	3116	4116	5116
220	5%	3117	4117	5117
240	1%	3118	4118	5118
240	2%	3119	4119	5119
240	5%	3120	4120	5120
270	1%	3121	4121	5121
270	2%	3122	4122	5122
270	5%	3123	4123	5123
300	1%	3124	4124	5124
300	2%	3125	4125	5125
300	5%	3126	4126	5126

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-23269/06

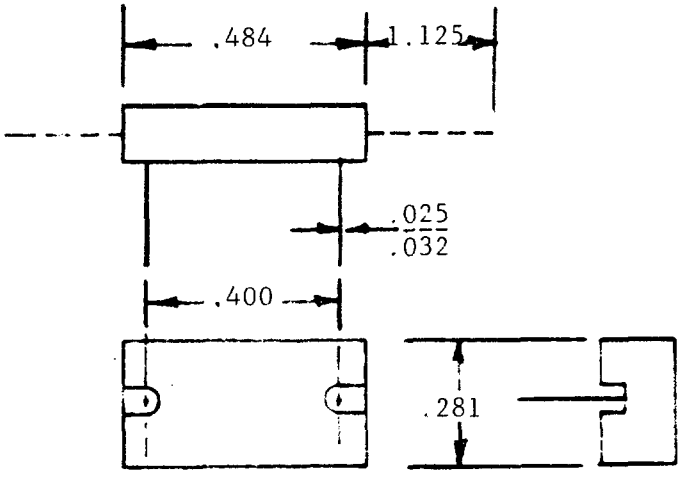


TABLE I. STYLE CYR17 CHARACTERISTICS AND DASH NUMBERS

CAPACITANCE	CAPACITANCE TOLERANCE	DASH NUMBER M23269/06-		
		M(1.0%)	P(0.1%)	R(0.01%)
pF	±%	500 VOLTS dc		
220	1	3001	4001	5001
220	2	3002	4002	5002
220	5	3003	4003	5003
240	1	3004	4004	5004
240	2	3005	4005	5005
240	5	3006	4006	5006
270	1	3007	4007	5007
270	2	3008	4008	5008
270	5	3009	4009	5009
300	1	3010	4010	5010
300	2	3011	4011	5011
300	5	3012	4012	5012
330	1	3013	4013	5013
330	2	3014	4014	5014
330	5	3015	4015	5015
360	1	3016	4016	5016
360	2	3017	4017	5017
360	5	3018	4018	5018
390	1	3019	4019	5019
390	2	3020	4020	5020
390	5	3021	4021	5021
430	1	3022	4022	5022

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-23269/06

TABLE I. STYLE CYR17 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE	CAPACITANCE TOLERANCE	DASH NUMBER M23269/06-		
		M(1.0%)	P(0.1%)	R(0.01%)
pF	±%			
		500 VOLTS dc		
430	2	3023	4023	5023
430	5	3024	4024	5024
470	1	3025	4025	5025
470	2	3026	4026	5026
470	5	3027	4027	5027
		300 VOLTS dc		
510	1	3028	4028	5028
510	2	3029	4029	5029
510	5	3030	4030	5030
560	1	3031	4031	5031
560	2	3032	4032	5032
560	5	3033	4033	5033
620	1	3034	4034	5034
620	2	3035	4035	5035
620	5	3036	4036	5036
680	1	3037	4037	5037
680	2	3038	4038	5038
680	5	3039	4039	5039
750	1	3040	4040	5040
750	2	3041	4041	5041
750	5	3042	4042	5042
820	1	3043	4043	5043
820	2	3044	4044	5044
820	5	3045	4045	5045
910	1	3046	4046	5046
910	2	3047	4047	5047
910	5	3048	4048	5048
1000	1	3049	4049	5049
1000	2	3050	4050	5050
1000	5	3051	4051	5051

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

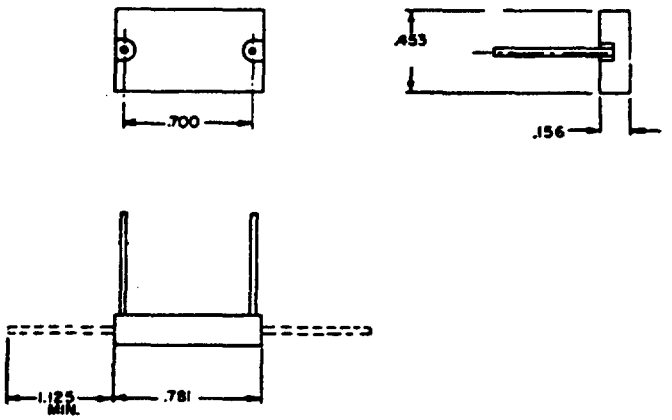


TABLE I. STYLE CYR22 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE pF	CAPACITANCE TOLERANCE ± %	DASH NUMBER M23269/07-		
		M(1.0%)	P(0.1%)	R(0.01%)
		500 VOLTS dc		
510	1	3001	4001	5001
510	2	3002	4002	5002
510	5	3003	4003	5003
560	1	3004	4004	5004
560	2	3005	4005	5005
560	5	3006	4006	5006
620	1	3007	4007	5007
620	2	3008	4008	5008
620	5	3009	4009	5009
680	1	3010	4010	5010
680	2	3011	4011	5011
680	5	3012	4012	5012
750	1	3013	4013	5013
750	2	3014	4014	5014
750	5	3015	4015	5015
820	1	3016	4016	5016
820	2	3017	4017	5017
820	5	3018	4018	5018
910	1	3019	4019	5019
910	2	3020	4020	5020
910	5	3021	4021	5021
1000	1	3022	4022	5022
1000	2	3023	4023	5023
1000	5	3024	4024	5024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CYR22 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE pF	CAPACITANCE TOLERANCE ± %	DASH NUMBER M23269/07- M(1.0%)	P(0.1%)	R(0.01%)
		300 VOLTS dc		
1100	1	3025	4025	5025
1100	2	3026	4026	5026
1100	5	3027	4027	5027
1200	1	3028	4028	5028
1200	2	3029	4029	5029
1200	5	3030	4030	5030
1300	1	3031	4031	5031
1300	2	3032	4032	5032
1300	5	3033	4033	5033
1500	1	3034	4034	5034
1500	2	3035	4035	5035
1500	5	3036	4036	5036
1600	1	3037	4037	5037
1600	2	3038	4038	5038
1600	5	3039	4039	5039
1800	1	3040	4040	5040
1800	2	3041	4041	5041
1800	5	3042	4042	5042
2000	1	3043	4043	5043
2000	2	3044	4044	5044
2000	5	3045	4045	5045
2200	1	3046	4046	5046
2200	2	3047	4047	5047
2200	5	3048	4048	5048
2400	1	3049	4049	5049
2400	2	3050	4050	5050
2400	5	3051	4051	5051

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, GLASS DIELECTRIC

MIL-C-23269/08

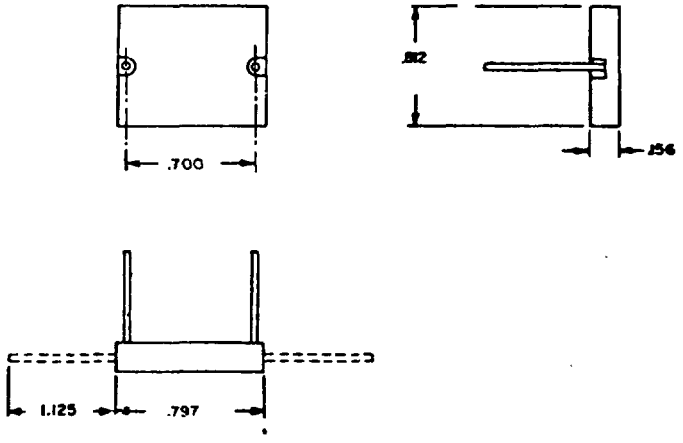


TABLE I. STYLE CYR32 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE pF	CAPACITANCE TOLERANCE ±%	DASH NUMBER M23269/08-		
		M(1.0%)	P(0.1%)	R(0.01%)
		500 VOLTS dc		
1.1	1	3001	4001	5001
1.1	2	3002	4002	5002
1.1	5	3003	4003	5003
1.2	1	3004	4004	5004
1.2	2	3005	4005	5005
1.2	5	3006	4006	5006
1.3	1	3007	4007	5007
1.3	2	3008	4008	5008
1.3	5	3009	4009	5009
1.5	1	3010	4010	5010
1.5	2	3011	4011	5011
1.5	5	3012	4012	5012
1.6	1	3013	4013	5013
1.6	2	3014	4014	5014
1.6	5	3015	4015	5015
1.8	1	3016	4016	5016
1.8	2	3017	4017	5017
1.8	5	3018	4018	5018
2.0	1	3019	4019	5019
2.0	2	3020	4020	5020
2.0	5	3021	4021	5021

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CYR32 CHARACTERISTICS AND DASH NUMBERS(CONT).


CAPACITANCE pF	CAPACITANCE TOLERANCE ±%	DASH NUMBER M23269/08- M(1.0%)	P(0.1%)	R(0.01%)
		500 VOLTS dc		
2.2	1	3022	4022	5022
2.2	2	3023	4023	5023
2.2	5	3024	4024	5024
2.4	1	3025	4025	5025
2.4	2	3026	4026	5026
2.4	5	3027	4027	5027
2.7	1	3028	4028	5028
2.7	2	3029	4029	5029
2.7	5	3030	4030	5030
3.0	1	3031	4031	5031
3.0	2	3032	4032	5032
3.0	5	3033	4033	5033
3.3	1	3034	4034	5034
3.3	2	3035	4035	5035
3.3	5	3036	4036	5036
		300 VOLTS dc		
3.6	1	3037	4037	5037
3.6	2	3038	4038	5038
3.6	5	3039	4039	5039
3.9	1	3040	4040	5040
3.9	2	3041	4041	5041
3.9	5	3042	4042	5042
4.3	1	3043	4043	5043
4.3	2	3044	4044	5044
4.3	5	3045	4045	5045
4.7	1	3046	4046	5046
4.7	2	3047	4047	5047
4.7	5	3048	4048	5048
5.1	1	3049	4049	5049
5.1	2	3050	4050	5050
5.1	5	3051	4051	5051
5.6	1	3052	4052	5052
5.6	2	3053	4053	5053
5.6	5	3054	4054	5054

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, GLASS DIELECTRIC

MIL-C-23269/09

STYLES CYR41, CYR42 AND CYR43

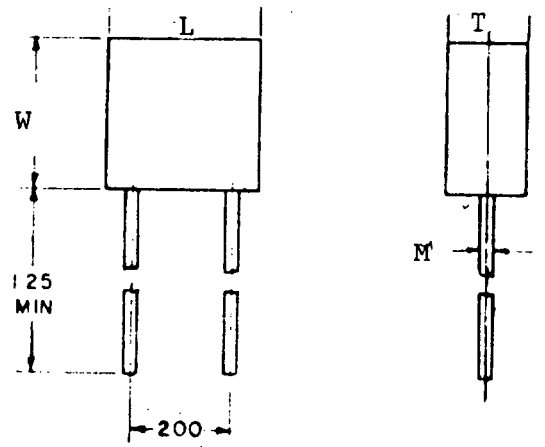

STYLE	DIMENSIONS			
	M	L max	W max	T max
CYR41	.025	.315	.315	.115(0.5 THRU 470 pF) .165(560 AND 680 pF) .215(820 AND 1000 pF)

TABLE I. STYLE CYR41 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/09-	
		M(1.0%)	P(0.1%)
	100 VOLTS dc		
.5	.25PF	3001	4001
1.5	.25PF	3002	4002
2.7	.25PF	3003	4003
3.3	.25PF	3004	4004
3.9	.25PF	3005	4005
4.7	.25PF	3006	4006
5.6	.25PF	3007	4007
6.8	.25PF	3008	4008
6.8	5%	3009	4009
8.2	.25PF	3010	4010
8.2	5%	3011	4011
10.0	.25PF	3012	4012
10.0	5%	3013	4013

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-23269/09

TABLE I. STYLE CYR41 CHARACTERISTICS AND DASH NUMBERS(CONT).


CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/09- M(1.0%)	DASH NUMBER M23269/09- P(0.1%)
	100 VOLTS dc		
12.0	.25PF	3014	4014
12.0	5%	3015	4015
15.0	.25PF	3016	4016
15.0	2%	3017	4017
15.0	5%	3018	4018
18.0	.25PF	3019	4019
18.0	2%	3020	4020
18.0	5%	3021	4021
22.0	.25PF	3022	4022
22.0	2%	3023	4023
22.0	5%	3024	4024
27.0	1%	3025	4025
27.0	2%	3026	4026
27.0	5%	3027	4027
33.0	1%	3028	4028
33.0	2%	3029	4029
33.0	5%	3030	4030
39.0	1%	3031	4031
39.0	2%	3032	4032
39.0	5%	3033	4033
47.0	1%	3034	4034
47.0	2%	3035	4035
47.0	5%	3036	4036
56.0	1%	3037	4037
56.0	2%	3038	4038
56.0	5%	3039	4039
68.0	1%	3040	4040
68.0	2%	3041	4041
68.0	5%	3042	4042
82.0	1%	3043	4043
82.0	2%	3044	4044
82.0	5%	3045	4045
100.0	1%	3046	4046
100.0	2%	3047	4047
100.0	5%	3048	4048
120.0	1%	3049	4049
120.0	2%	3050	4050
120.0	5%	3051	4051
150.0	1%	3052	4052
150.0	2%	3053	4053
150.0	5%	3054	4054
180.0	1%	3055	4055
180.0	2%	3056	4056

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-23269/09

TABLE I. STYLE CYR41 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/09-	
		M(1.0%)	P(0.1%)
	100 VOLTS		
180.0	5%	3057	4057
220.0	1%	3058	4058
220.0	2%	3059	4059
220.0	5%	3060	4060
270.0	1%	3061	4061
270.0	2%	3062	4062
270.0	5%	3063	4063
330.0	1%	3064	4064
330.0	2%	3065	4065
330.0	5%	3066	4066
390.0	1%	3067	4067
390.0	2%	3068	4068
390.0	5%	3069	4069
470.0	1%	3070	4070
470.0	2%	3071	4071
470.0	5%	3072	4072
560.0	1%	3073	4073
560.0	2%	3074	4074
560.0	5%	3075	4075
680.0	1%	3076	4076
680.0	2%	3077	4077
680.0	5%	3078	4078
820.0	1%	3079	4079
820.0	2%	3080	4080
820.0	5%	3081	4081
1000.0	1%	3082	4082
1000.0	2%	3083	4083
1000.0	5%	3084	4084

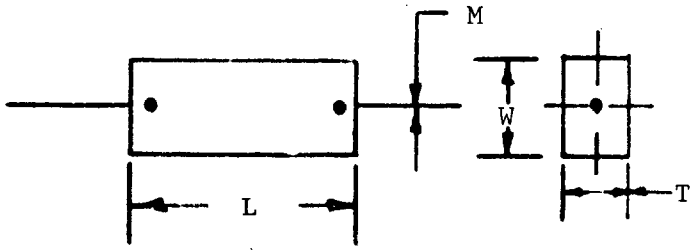

STYLE	DIMENSIONS			
	M	L max	W max	T
CYR42	.020	.405	.215	.109
CYR43	.025	.530	.310	.155

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CYR42 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/09-	
		M(1.0%)	P(0.1%)
	500 VOLTS dc		
.5	.25PF	3101	4101
1.5	.25PF	3102	4102
2.7	.25PF	3103	4103
3.3	.25PF	3104	4104
3.9	.25PF	3105	4105
4.7	.25PF	3106	4106
5.6	.25PF	3107	4107
6.8	.25PF	3108	4108
6.8	5%	3109	4109
8.2	.25PF	3110	4110
8.2	5%	3111	4111
10.0	.25PF	3112	4112
10.0	5%	3113	4113
12.0	.25PF	3114	4114
12.0	5%	3115	4115
15.0	.25PF	3116	4116
15.0	2%	3117	4117
15.0	5%	3118	4118
18.0	.25PF	3119	4119
18.0	2%	3120	4120
18.0	5%	3121	4121
22.0	.25PF	3122	4122
22.0	2%	3123	4123
22.0	5%	3124	4124
27.0	1%	3125	4125
27.0	2%	3126	4126
27.0	5%	3127	4127
33.0	1%	3128	4128
33.0	2%	3129	4129
33.0	5%	3130	4130
39.0	1%	3131	4131
39.0	2%	3132	4132
39.0	5%	3133	4133
47.0	1%	3134	4134
47.0	2%	3135	4135
47.0	5%	3136	4136
56.0	1%	3137	4137
56.0	2%	3138	4138
56.0	5%	3139	4139

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CYR42 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M23269/09-	
		M(1.0%)	P(0.1%)
	300 VOLTS dc		
68.0	1%	3140	4140
68.0	2%	3141	4141
68.0	5%	3142	4142
82.0	1%	3143	4143
82.0	2%	3144	4144
82.0	5%	3145	4145
	100 VOLTS dc		
100.0	1%	3146	4146
100.0	2%	3147	4147
100.0	5%	3148	4148
120.0	1%	3149	4149
120.0	2%	3150	4150
120.0	5%	3151	4151
150.0	1%	3152	4152
150.0	2%	3153	4153
150.0	5%	3154	4154
180.0	1%	3155	4155
180.0	2%	3156	4156
180.0	5%	3157	4157
220.0	1%	3158	4158
220.0	2%	3159	4159
220.0	5%	3160	4160
	50 VOLTS dc		
270.0	1%	3161	4161
270.0	2%	3162	4162
270.0	5%	3163	4163
300.0	1%	3164	4164
300.0	2%	3165	4165
300.0	5%	3166	4166

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-23269/09

TABLE I. STYLE CYR43 CHACACTERISTICS AND DASH NUMBERS.


CAPACITANCE pF	CAPACITANCE TOLERANCE − +	DASH NUMBER M23269/09- M(1.0%)	DASH NUMBER M23269/09- P(0.1%)
	300 VOLTS dc		
330.0	1%	3301	4301
330.0	2%	3302	4302
330.0	5%	3303	4303
390.0	1%	3304	4304
390.0	2%	3305	4305
390.0	5%	3306	4306
	100 VOLTS dc		
470.0	1%	3307	4307
470.0	2%	3308	4308
470.0	5%	3309	4309
560.0	1%	3310	4310
560.0	2%	3311	4311
560.0	5%	3312	4312
680.0	1%	3313	4313
680.0	2%	3314	4314
680.0	5%	3315	4315
	50 VOLTS dc		
820.0	1%	3316	4316
820.0	2%	3317	4317
820.0	5%	3318	4318
1000.0	1%	3319	4319
1000.0	2%	3320	4320
1000.0	5%	3321	4321
1200.0	1%	3322	4322
1200.0	2%	3323	4323
1200.0	5%	3324	4324

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, GLASS DIELECTRIC

MIL-C-23269/10

STYLES CYR51, CYR52 AND CYR53

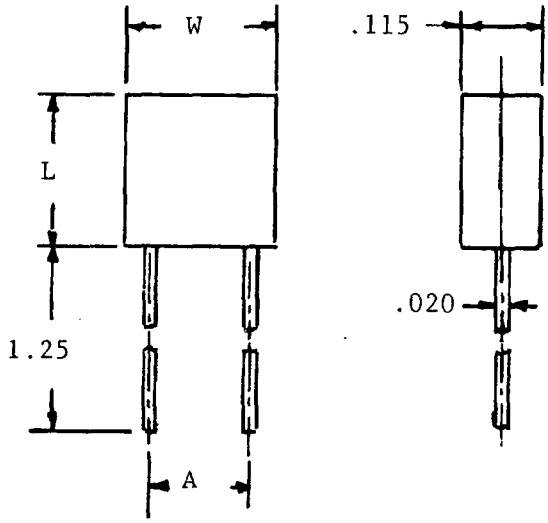

STYLE	DASH NUMBERS	DIMENSIONS		
		A	L	W
CYR51	SEE TABLE I	.200	.200	.300
CYR52	SEE TABLE II	.200	.300	.300
CYR53	SEE TABLE III	.400	.300	.500

TABLE I. STYLE CYR51 CAPACITORS CHARACTERISTICS AND DASH NUMBER

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M (1.0%)	CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M (1.0%)
300 VOLTS			300 VOLTS		
1.0	.25PF	3001	7.5	.25PF	3019
1.5	.25PF	3002	7.5	5%	3020
2.2	.25PF	3003	8.2	.25PF	3021
2.7	.25PF	3004	8.2	5%	3022
3.0	.25PF	3005	9.1	.25PF	3023
3.3	.25PF	3006	9.1	5%	3024
3.6	.25PF	3007	10.0	.25PF	3025
3.9	.25PF	3008	10.0	5%	3026
4.3	.25PF	3009	11.0	.25PF	3027
4.7	.25PF	3010	11.0	5PF	3028
5.1	.25PF	3011	12.0	.25PF	3029
5.1	5%	3012	12.0	5%	3030
5.6	.25PF	3013	13.0	.25PF	3031
5.6	5%	3014	13.0	2%	3032
6.2	.25PF	3015	13.0	5%	3033
6.2	5%	3016	15.0	.25PF	3034
6.8	.25PF	3017	15.0	2%	3035
6.8	5%	3018	15.0	5%	3036

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

GLASS DIELECTRIC

MIL-C-23269/10

TABLE I. STYLE CYR51 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M (1.0%)	CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M (1.0%)
300 VOLTS			300 VOLTS		
16.0	.25PF	3037	56.0	1%	3076
16.0	2%	3038	56.0	2%	3077
16.0	5%	3039	56.0	5%	3078
18.0	.25PF	3040	62.0	1%	3079
18.0	2%	3041	62.0	2%	3080
18.0	5%	3042	62.0	5%	3081
20.0	.25PF	3043	68.0	1%	3082
20.0	2%	3044	68.0	2%	3083
20.0	5%	3045	68.0	5%	3084
22.0	.25PF	3046	75.0	1%	3085
22.0	2%	3047	75.0	2%	3086
22.0	5%	3048	75.0	5%	3087
24.0	.25PF	3049	82.0	1%	3088
24.0	2%	3050	82.0	2%	3089
24.0	5%	3051	82.0	5%	3090
27.0	1%	3052	91.0	1%	3091
27.0	2%	3053	91.0	2%	3092
27.0	5%	3054	91.0	5%	3093
30.0	1%	3055	100.0	1%	3094
30.0	2%	3056	100.0	2%	3095
30.0	5%	3057	100.0	5%	3096
33.0	1%	3058	110.0	1%	3097
33.0	2%	3059	110.0	2%	3098
33.0	5%	3060	110.0	5%	3099
36.0	1%	3061	120.0	1%	3100
36.0	2%	3062	120.0	2%	3101
36.0	5%	3063	120.0	5%	3102
39.0	1%	3064	130.0	1%	3103
39.0	2%	3065	130.0	2%	3104
39.0	5%	3066	130.0	5%	3105
43.0	1%	3067	150.0	1%	3106
43.0	2%	3068	150.0	2%	3107
43.0	5%	3069	150.0	5%	3108
47.0	1%	3070	160.0	1%	3109
47.0	2%	3071	160.0	2%	3110
47.0	5%	3072	160.0	5%	3111
51.0	1%	3073	180.0	1%	3112
51.0	2%	3074	180.0	2%	3113
51.0	5%	3075	180.0	5%	3114

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

GLASS DIELECTRIC

MIL-C-23269/10

TABLE I. STYLE CYR51 CHARACTERISTICS AND DASH NUMBERS(CONT).

CAPCITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M (1.0%)	CAPACITANCE pF	CAPACITANCE TOLERANCE ±	DASH NUMBER M (1.0%)
	300 VOLTS dc			300 VOLTS dc	
200.0	1%	3115	360.0	1%	3133
200.0	2%	3116	360.0	2%	3134
200.0	5%	3117	360.0	5%	3135
220.0	1%	3118	390.0	1%	3136
220.0	2%	3119	390.0	2%	3137
220.0	5%	3120	390.0	5%	3138
240.0	1%	3121	430.0	1%	3139
240.0	2%	3122	430.0	2%	3140
240.0	5%	3123	430.0	5%	3141
270.0	1%	3124	470.0	1%	3142
270.0	2%	3125	470.0	2%	3143
270.0	5%	3126	470.0	5%	3144
300.0	1%	3127	510.0	1%	3145
300.0	2%	3128	510.0	2%	3146
300.0	5%	3129	510.0	5%	3147
330.0	1%	3130	560.0	1%	3148
330.0	2%	3131	560.0	2%	3149
330.0	5%	3132	560.0	5%	3150

TABLE II. STYLE CYR52 CHARACTERISTICS AND DASH NUMBERS.

620.0	1%	3201	820.0	1%	3210
620.0	2%	3202	820.0	2%	3211
620.0	5%	3203	820.0	5%	3212
680.0	1%	3204	910.0	1%	3213
680.0	2%	3205	910.0	2%	3214
680.0	5%	3206	910.0	5%	3215
750.0	1%	3207	1000.0	1%	3216
750.0	2%	3208	1000.0	2%	3217
750.0	5%	3209	1000.0	5%	3218

TABLE III. STYLE CYR53 CHARACTERISTICS AND DASH NUMBERS.

1100.0	1%	3301	1600.0	5%	3315
1100.0	2%	3302	1800.0	1%	3316
1100.0	5%	3303	1800.0	2%	3317
1200.0	1%	3304	1800.0	5%	3318
1200.0	2%	3305	2000.0	1%	3319
1200.0	5%	3306	2000.0	2%	3320
1300.0	1%	3307	2000.0	5%	3321
1300.0	2%	3308	2200.0	1%	3322
1300.0	5%	3309	2200.0	2%	3323
1500.0	1%	3310	2200.0	5%	3324
1500.0	2%	3311	2400.0	1%	3325
1500.0	5%	3312	2400.0	2%	3326
1600.0	1%	3313	2400.0	5%	3327
1600.0	2%	3314			

Source: https://assist.dla.mil -- Downloaded: 2025-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS

FEED THROUGH

MIL-C-11693(ESTABLISHED RELIABILITY)

SCOPE: FIXED, FEED THROUGH, METALLIZED PAPER OR PLASTIC CAPACITORS STYLES CZR23 AND CZR24 PER MIL-C-11693 ARE ESTABLISHED RELIABILITY PARTS, SUITABLE TO CARRY DC OR EQUIVALENT AC FEED THROUGH CURRENT. THESE PARTS ARE COMMONLY USED FOR RADIO-INTERFERENCE APPLICATIONS. THESE PARTS ARE HERMETICALLY SEALED IN METAL CASES.

TEMP RANGE: K -55°C TO +125°C
E -55°C TO +85°C


SHOCK: 100G, SAWTOOTH, (MIL-STD 202, METHOD 213)

VIBRATION: 20G, 10-2000 HZ, (MIL-STD-202, METHOD 204)


TYPE DESIGNATION: THE TYPE DESIGNATION SHALL BE IN THE FOLLOWING FORM,

CZR23	B	K	B	473	M
ER	CURRENT	CHARACTERISTIC	VOLTAGE	CAPACITANCE	FAILURE RATE LEVEL
STYLE 23 24	B=10AMP	K=-55°C TO +125°C E=-55°C TO +85°C	B= 100 C= 200 E= 400 F= 600		M= 1.0 %
*		*			*

* COMPLETE PART NUMBER INCLUDES ADDITIONAL SYMBOLS TO INDICATE STYLE, CHARACTERISTICS AND FAILURE RATE LEVEL.

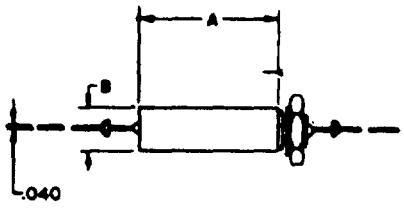

STYLES CZ23 AND CZR23

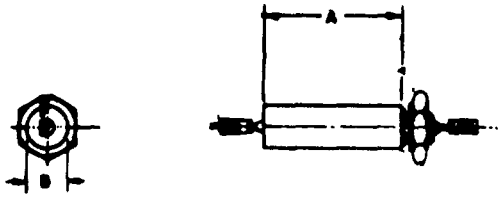

STYLES CZ24 AND CZR24

CIRCUIT DIAGRAM



197

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. STYLE CZR23 AND CZR24 CAPACITORS (PAPER, OR PAPER PLASTIC)

TYPE DESIGNATION	RATED VOLTAGE	NOMINAL CAPACITANCE	RATED CURRENT	CHARACTERISTICS	DIMENSIONS	
					A	B
	VOLTS, dc	uF	AMPERES			
CZR2-B-B473-	100	.0470	10	K,E	.75	.400
CZR2-B-B104-	100	.1000	10	K,E	.88	.400
CZR2-B-B224-	100	.2200	10	K,E	1.38	.400
CZR2-B-B474-	100	.4700	10	K,E	1.38	.562
CZR2-B-B105-	100	1.0000	10	K,E	1.88	.670
CZR2-B-B205-	100	2.0000	10	K,E	2.12	1.000
CZR2-B-C473-	200	0.0470	10	K,E	.88	.400
CZR2-B-C104-	200	0.1000	10	K,E	1.12	.400
CZR2-B-C224-	200	0.2200	10	K,E	1.12	.562
CZR2-B-C474-	200	0.4700	10	K,E	1.88	.562
CZR2-B-C105-	200	1.0000	10	K,E	2.12	.750
CZR2-B-E104-	400	.1000	10	K,E	1.12	.562
CZR2-B-E224-	400	.2200	10	K,E	1.88	.562
CZR2-B-E474-	400	.4700	10	K,E	2.12	.750
CZR2-B-F472-	600	.0047	10	K,E	.75	.400
CZR2-B-F103-	600	.0100	10	K,E	.75	.400
CZR2-B-F473-	600	.0470	10	K,E	1.38	.400
CZR2-B-F104-	600	.1000	10	K,E	1.38	.562
CZR2-B-F224-	600	.2200	10	K,E	1.88	.670
CZR2-B-F474-	600	.4700	10	K,E	2.38	.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365 (ESTABLISHED RELIABILITY)

SCOPE: CHIP, FIXED TANTALUM CAPACITORS PER MIL-C-55365 ARE SUITABLE FOR GENERAL UASGE IN THICK AND THIN FILM HYBRID CIRCUITS. THESE CAPACITORS ARE INTENDED TO BE USED ONLY WHERE SUPPLEMENTAL MOISTURE PROTECTION IS PROVIDED BY POTTING OR ENCAPSULATING OR FOR NON-CRITICAL APPLICTIONS WHERE HERMETIC MOISTURE PROTECTION IS NOT REQUIRED.

TEMP RANGE: -55°C TO +125°C

VIBRATION: 20 G, 10-200 Hz (MIL-STD-202, METHOD 204)

TYPE DESIGNATION: THE TYPE DESIGNATION SHALL BE IN THE FOLLOWING FORM.

CWR01	B	A	225	J	M
STYLE	VOLTAGE (SEE TABLE I)	TERMINATION FINISH	CAPACITANCE EXPRESSED IN pF FIRST TWO DIGITS SIGNIFICANT LAST ZEROS TO FOLLOW	CAPACITANCE TOLERANCE	FAILURE RATE LEVEL
		A- SOLDER-COATED NICKEL B- GOLD C- SOLDER-COATED GOLD		J= ±5% K= ±10% M= ±20%	M (1.0%) P (0.1%) R (0.01%)
*		*		*	*

* COMPLETE TYPE DESIGNATION NUMBER INCLUDES ADDITIONAL SYMBOLS TO INDICATE STYLE, TERMINATION FINISH, CAPACITANCE TOLERANCE AND FAILURE RATE LEVEL. THIS NOTE APPLIES TO ALL OF TABLE II.

TABLE I. VOLTAGE


SYMBOL	VOLTAGE		
	RATED (85°C)	DERATED (125°C)	SURGE (85°C)
	V dc	V dc	V dc
B	3	2.0	4.0
C	4	2.7	5.0
D	6	4.0	8.0
F	10	7.0	13.0
H	15	10.0	20.0
J	20	13.0	26.0
K	25	17.0	32.0
L	30	20.0	39.0
M	35	23.0	46.0
N	50	33.0	65.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM


MIL-C-55365/01

STYLES CWR01 AND CWR02

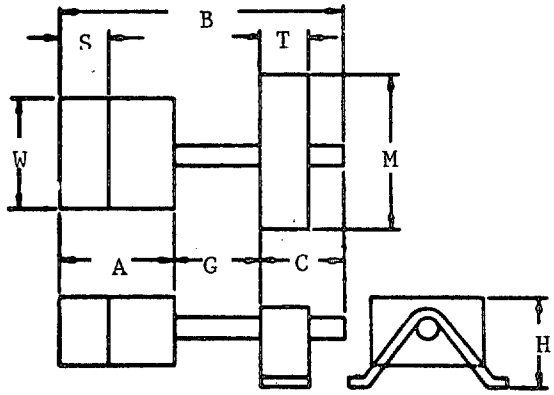

STYLE CWR01

CASE SIZE	DIMENSIONS								
	B	W	A	S	G	T	C	M	H
A	.160	.090	.065	.045	.080	.035	.040	.090	.055
B	.200	.115	.105	.085	.075	.040	.045	.140	.055
C	.235	.145	.145	.110	.075	.040	.045	.140	.055
D	.295	.155	.195	.155	.080	.045	.050	.140	.080
E	.300	.160	.200	.160	.080	.045	.050	.140	.130

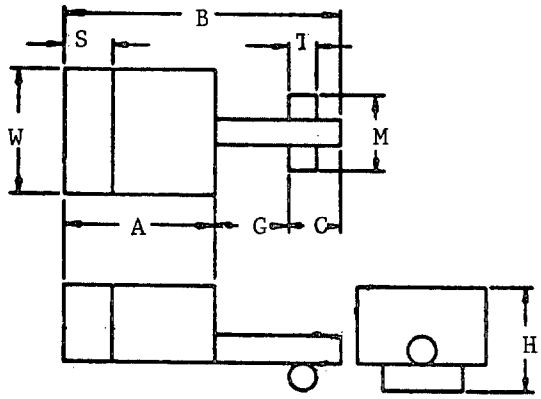

STYLE CWR02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365/01

STYLE CWR02

CASE SIZE	DIMENSIONS								
	B	W	A	S	G	T	C	M	H
A	.165	.060	.085	.065	.050	.040	.045	.060	.050
B	.180	.110	.105	.080	.050	.035	.040	.060	.050
C	.225	.150	.150	.110	.050	.035	.040	.070	.065
D	.280	.160	.200	.150	.050	.040	.045	.070	.095
E	.290	.160	.205	.150	.050	.045	.050	.070	.135

TABLE II. STYLES CWR01 AND CWR02 CHARACTERISTICS.

TYPE DESIGNATION	RATED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE CWR01	CASE SIZE CWR02
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
	V dc	uF	uA	uA	uA	%	%	%		
CWR0-BA225--	3	2.20	1.0	10	12.5	4	6	8	A	A
CWR0-BA475--	3	4.70	1.0	10	12.5	4	6	8	B	A
CWR0-BA156--	3	15.00	1.0	10	12.5	6	8	10	C	C
CWR0-BA476--	3	47.00	2.8	28	35.0	6	8	10	E	D
CWR0-CA335--	4	3.30	.5	5	6.3	6	8	10	A	A
CWR0-CA475--	4	4.70	.5	5	6.3	6	8	10	B	A
CWR0-CA685--	4	6.80	1.0	10	12.5	6	8	10	B	B
CWR0-CA106--	4	10.00	1.0	10	12.5	6	9	12	C	B
CWR0-CA156--	4	15.00	1.0	10	12.5	6	9	12	C	C
CWR0-CA336--	4	33.00	2.0	20	25.0	6	9	12	D	C
CWR0-CA686--	4	68.00	3.0	30	37.5	6	9	12	E	D
CWR02CA107--	4	100.00	3.0	30	37.5	6	9	12	-	E
CWR0-DA155--	6	1.50	.5	5	6.3	4	6	8	A	A
CWR0-DA225--	6	2.20	.5	5	6.3	6	8	10	A	A
CWR0-DA335--	6	3.30	1.0	10	12.5	4	6	8	B	A
CWR0-DA475--	6	4.70	1.0	10	12.5	6	8	10	B	B
CWR0-DA685--	6	6.80	1.0	10	12.5	6	8	10	C	B
CWR0-DA106--	6	10.00	1.0	10	12.5	6	9	12	C	C
CWR0-DA226--	6	22.00	2.0	20	25.0	6	9	12	D	C
CWR0-DA336--	6	33.00	3.0	30	37.5	6	8	10	E	D
CWR0-DA476--	6	47.00	3.0	30	37.5	6	9	12	E	D
CWR02DA686--	6	68.00	3.0	30	37.5	6	9	12	-	E
CWR0-FA105--	10	1.00	.5	5	6.3	4	6	8	A	A
CWR0-FA155--	10	1.50	.5	5	6.3	6	8	10	A	A
CWR0-FA225--	10	2.20	1.0	10	12.5	4	6	8	B	A
CWR0-FA335--	10	3.30	1.0	10	12.5	6	8	10	B	B
CWR0-FA475--	10	4.70	1.0	10	12.5	6	8	10	C	B
CWR0-FA685--	10	6.80	1.0	10	12.5	6	8	10	C	C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365/01

TABLE II. STYLES CWR01 AND CWR02 CHARACTERISTICS(CONT).

TYPE DESIGNATION	RATED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE CWR01	CASE SIZE CWR02
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
	V dc	uF	uA	uA	uA	%	%	%		
CWR0-FA156--	10	15.00	2.0	20	25.0	6	9	12	D	C
CWR0-FA206--	10	20.00	3.0	30	37.5	6	9	12	E	D
CWR0-FA226--	10	22.00	3.0	30	37.5	6	8	10	E	D
CWR0-FA336--	10	33.00	3.0	30	37.5	6	9	12	E	D
CWR02FA476--	10	47.00	3.0	30	37.5	6	8	10	-	E
CWR0-HA684--	15	.68	.5	5	6.3	4	6	8	A	A
CWR0-HA105--	15	1.00	.5	5	6.3	4	6	8	A	A
CWR0-HA155--	15	1.50	.5	5	6.3	6	8	10	B	A
CWR0-HA225--	15	2.20	1.0	10	12.5	6	8	10	B	B
CWR0-HA335--	15	3.30	1.0	10	12.5	6	9	12	C	B
CWR0-HA475--	15	4.70	1.0	10	12.5	6	8	10	C	C
CWR0-HA106--	15	10.00	2.0	20	25.0	6	9	12	D	C
CWR0-HA226--	15	22.00	3.0	30	37.5	6	9	12	E	D
CWR02HA336--	15	33.00	3.0	30	37.5	6	9	12	-	E
CWR0-JA334--	20	.33	.5	5	6.3	4	6	8	A	A
CWR0-JA474--	20	.47	.5	5	6.3	4	6	8	A	A
CWR0-JA684--	20	.68	.5	5	6.3	4	6	8	A	A
CWR0-JA105--	20	1.00	1.0	10	12.5	4	6	8	B	A
CWR0-JA155--	20	1.50	1.0	10	12.5	6	8	10	B	B
CWR0-JA225--	20	2.20	1.0	10	12.5	4	6	8	C	B
CWR0-JA335--	20	3.30	1.0	10	12.5	6	8	10	C	C
CWR0-JA475--	20	4.70	1.9	19	24.0	4	6	8	D	C
CWR0-JA685--	20	6.80	2.0	20	25.0	6	8	10	D	C
CWR0-JA106--	20	10.00	3.0	30	37.5	6	9	12	E	D
CWR0-JA156--	20	15.00	3.0	30	37.5	6	9	12	E	D
CWR02JA226--	20	22.00	3.0	30	37.5	6	9	12	-	E
CWR0-KA474--	25	.47	.5	5	6.3	4	6	8	A	A
CWR0-KA684--	25	.68	.5	5	6.3	4	6	8	B	A
CWR0-KA105--	25	1.00	1.0	10	12.5	4	6	8	B	B
CWR0-KA155--	25	1.50	1.0	10	12.5	6	8	10	C	B
CWR0-KA225--	25	2.20	1.0	10	12.5	6	8	10	C	C
CWR0-KA335--	25	3.30	2.0	20	25.0	6	8	10	D	C
CWR0-KA475--	25	4.70	2.0	20	25.0	6	8	10	D	D
CWR0-KA685--	25	6.80	3.0	30	37.5	6	9	12	E	D
CWR0-KA106--	25	10.00	3.0	30	37.5	6	9	12	E	E
CWR0-LA474--	30	.47	1.0	10	12.5	4	6	8	B	B
CWR0-LA684--	30	.68	1.0	10	12.5	4	6	8	B	B
CWR0-LA155--	30	1.50	1.0	10	12.5	6	8	10	C	C
CWR0-LA335--	30	3.30	2.0	20	25.0	6	8	10	D	D
CWR0-LA685--	30	6.80	3.0	30	37.5	6	8	10	E	E
CWR0-MA104--	35	.10	.5	5	6.3	4	6	8	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365/01

TABLE II. STYLES CWR01 AND CWR02 CHARACTERISTICS(CONT).


TYPE DESIGNATION	RATED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE CWR01	CASE SIZE CWR02
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
	V dc	uF	uA	uA	uA	%	%	%		
CWR0-MA224--	35	.22	.5	5	6.3	4	6	8	A	A
CWR0-MA334--	35	.33	.5	5	6.3	4	6	8	A	A
CWR0-MA474--	35	.47	1.0	10	12.5	4	6	8	B	B
CWR0-MA684--	35	.68	1.0	10	12.5	4	6	8	C	B
CWR0-MA105--	35	1.00	1.0	10	12.5	4	6	8	C	C
CWR0-MA155--	35	1.50	1.1	11	14.0	4	6	8	D	C
CWR0-MA225--	35	2.20	2.0	20	25.0	6	8	10	D	C
CWR0-MA335--	35	3.30	2.3	23	29.0	4	6	8	E	D
CWR0-MA475--	35	4.70	3.0	30	37.5	6	8	10	E	D
CWR02MA685--	35	6.80	3.0	30	37.5	6	8	10	-	E
CWR0-NA104--	50	.10	.5	5	6.3	4	6	8	A	A
CWR0-NA154--	50	.15	.5	5	6.3	4	6	8	A	A
CWR0-NA224--	50	.22	1.0	10	12.5	4	6	8	B	A
CWR0-NA334--	50	.33	1.0	10	12.5	4	6	8	B	B
CWR0-NA474--	50	.47	1.0	10	12.5	4	6	8	C	B
CWR0-NA684--	50	.68	2.0	20	25.0	4	6	8	C	C
CWR0-NA105--	50	1.00	2.0	20	25.0	4	6	8	D	C
CWR0-NA155--	50	1.50	2.0	20	25.0	6	8	10	D	C
CWR0-NA225--	50	2.20	3.0	30	37.5	6	8	10	E	D
CWR0-NA335--	50	3.30	3.0	30	37.5	6	8	10	E	D
CWR02NA475--	50	4.70	3.0	30	37.5	6	8	10	-	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, CHIP, TANTALUM

MIL-C-55365/02

STYLES CWR03 AND CWR04

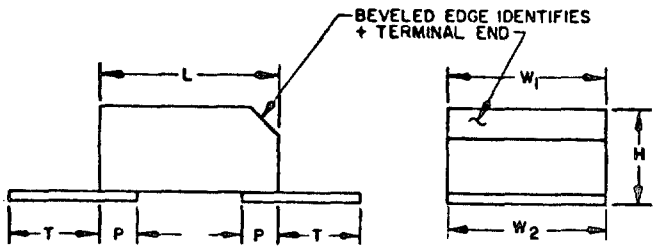

STYLE CWR03 (ENCAPSULATED)

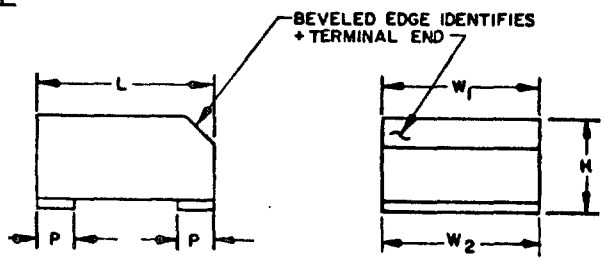

STYLE CWR04 (ENCAPSULATED)

TABLE I. DIMENSIONS

CASE SIZE	L	CASE W1	TABS W2	H	P	T
A	.180	.100	.090	.070	.030	.150
B	.180	.100	.090	.100	.030	.150
C	.320	.180	.170	.070	.050	.110
D	.320	.180	.170	.100	.050	.110
E	.320	.180	.170	.195	.050	.110

TABLE II. STYLES CWR03 AND CWR04 CHARACTERISTICS.

TYPE DESIGNATION	RATED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C	
	V dc	uF	uA	uA	uA	%	%	%	
CWR0-B-185--	3	1.80	1.0	10	15	4	6	8	A
CWR0-B-225--	3	2.20	1.0	10	15	4	6	8	A
CWR0-B-395--	3	3.90	1.0	10	15	4	6	8	B
CWR0-B-175--	3	4.70	1.0	10	15	4	6	8	B
CWR0-B-126--	3	12.00	1.0	10	15	6	8	10	C
CWR0-B-156--	3	15.00	1.0	10	15	6	8	10	C
CWR0-B-396--	3	39.00	2.3	23	35	6	8	10	D
CWR0-B-476--	3	47.00	2.8	28	42	6	8	10	D
CWR0-B-826--	3	82.00	4.9	49	74	8	10	12	E
CWR0-B-107--	3	100.00	6.0	60	90	8	10	12	E
CWR0-D-125--	6	1.20	1.0	10	15	4	6	8	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365/02

STYLES CWR03 AND CWR04

TABLE II. STYLES CWR03 AND CWR04 CHARACTERISTICS(CONT).

TYPE DESIGNATION	ED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C	
	V dc	uF	uA	uA	uA	%	%	%	
CWR0-D-155--	6	1.50	1.0	10	15	4	6	8	A
CWR0-D-275--	6	2.70	1.0	10	15	4	6	8	B
CWR0-D-335--	6	3.30	1.0	10	15	4	6	8	B
CWR0-D-825--	6	8.20	1.0	10	15	6	8	10	C
CWR0-D-106--	6	10.00	1.2	12	18	6	8	10	C
CWR0-D-276--	6	27.00	3.2	32	48	6	8	10	D
CWR0-D-336--	6	33.00	4.0	40	60	6	8	10	D
CWR0-D-566--	6	56.00	6.7	67	101	8	10	12	E
CWR0-D-686--	6	68.00	8.2	82	123	8	10	12	E
CWR0-F-824--	10	.82	1.0	10	15	4	6	8	A
CWR0-F-105--	10	1.00	1.0	10	15	4	6	8	A
CWR0-F-155--	10	1.50	1.0	10	15	4	6	8	B
CWR0-F-185--	10	1.80	1.0	10	15	4	6	8	B
CWR0-F-225--	10	2.20	1.0	10	15	4	6	8	B
CWR0-F-565--	10	5.60	1.1	11	17	4	6	8	C
CWR0-F-685--	10	6.80	1.4	14	21	6	8	10	C
CWR0-F-126--	10	12.00	2.4	24	36	6	8	10	D
CWR0-F-156--	10	15.00	3.0	30	45	6	8	10	D
CWR0-F-186--	10	18.00	3.6	36	54	6	8	10	D
CWR0-F-226--	10	22.00	4.4	44	66	6	8	10	D
CWR0-F-336--	10	33.00	6.6	66	99	6	8	10	E
CWR0-F-396--	10	39.00	7.8	78	117	6	8	10	E
CWR0-F-476--	10	47.00	9.4	94	141	6	8	10	E
CWR0-H-564--	15	.56	1.0	10	15	4	6	8	A
CWR0-H-684--	15	.68	1.0	10	15	4	6	8	A
CWR0-H-125--	15	1.20	1.0	10	15	4	6	8	B
CWR0-H-395--	15	3.90	1.2	12	18	4	6	8	C
CWR0-H-475--	15	4.70	1.4	14	21	4	6	8	C
CWR0-H-825--	15	8.20	2.5	25	38	6	8	10	D
CWR0-H-106--	15	10.00	3.0	30	45	6	8	10	D
CWR0-H-276--	15	27.00	8.1	81	122	6	8	10	E
CWR0-J-274--	20	.27	1.0	10	15	4	6	8	A
CWR0-J-334--	20	.33	1.0	10	15	4	6	8	A
CWR0-J-394--	20	.39	1.0	10	15	4	6	8	A
CWR0-J-474--	20	.47	1.0	10	15	4	6	8	A
CWR0-J-564--	20	.56	1.0	10	15	4	6	8	B
CWR0-J-684--	20	.68	1.0	10	15	4	6	8	B
CWR0-J-824--	20	.82	1.0	10	15	4	6	8	B
CWR0-J-105--	20	1.00	1.0	10	15	4	6	8	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365/02

STYLES CWR03 AND CWR04

TABLE II. STYLES CWR01 AND CWR02 CHARACTERISTICS.

TYPE DESIGNATION	RATED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C	
	V dc	uF	uA	uA	uA	%	%	%	
CWR0-J-185--	20	1.80	1.0	10	15	4	6	8	C
CWR0-J-225--	20	2.20	1.0	10	15	4	6	8	C
CWR0-J-275--	20	2.70	1.1	11	17	4	6	8	C
CWR0-J-335--	20	3.30	1.3	13	20	4	6	8	C
CWR0-J-475--	20	4.70	1.9	19	29	4	6	8	D
CWR0-J-565--	20	5.60	2.2	22	33	4	6	8	D
CWR0-J-685--	20	6.80	2.7	27	41	6	8	10	D
CWR0-J-126--	20	12.00	4.8	48	72	6	8	10	E
CWR0-J-156--	20	15.00	6.0	60	90	6	8	10	E
CWR0-J-186--	20	18.00	7.2	72	108	6	8	10	E
CWR0-J-226--	20	22.00	8.8	88	132	6	8	10	E
CWR0-M-104--	35	.10	1.0	10	15	4	6	8	A
CWR0-M-124--	35	.12	1.0	10	15	4	6	8	A
CWR0-M-154--	35	.15	1.0	10	15	4	6	8	A
CWR0-M-184--	35	.18	1.0	10	15	4	6	8	A
CWR0-M-224--	35	.22	1.0	10	15	4	6	8	A
CWR0-M-274--	35	.27	1.0	10	15	4	6	8	B
CWR0-M-334--	35	.33	1.0	10	15	4	6	8	B
CWR0-M-394--	35	.39	1.0	10	15	4	6	8	B
CWR0-M-474--	35	.47	1.0	10	15	4	6	8	B
CWR0-M-824--	35	.82	1.0	10	15	4	6	8	C
CWR0-M-105--	35	1.00	1.0	10	15	4	6	8	C
CWR0-M-125--	35	1.20	1.0	10	15	4	6	8	C
CWR0-M-155--	35	1.50	1.1	11	17	4	6	8	C
CWR0-M-185--	35	1.80	1.3	13	20	4	6	8	D
CWR0-M-225--	35	2.20	1.5	15	23	4	6	8	D
CWR0-M-275--	35	2.70	1.9	19	29	4	6	8	D
CWR0-M-335--	35	3.30	2.3	23	35	4	6	8	D
CWR0-M-395--	35	3.90	2.7	27	41	4	6	8	D
CWR0-M-475--	35	4.70	3.3	33	50	4	6	8	E
CWR0-M-565--	35	5.60	3.9	39	59	4	6	8	E
CWR0-M-685--	35	6.80	4.8	48	72	6	8	10	E
CWR0-M-825--	35	8.20	5.7	57	86	6	8	10	E
CWR0-M-106--	35	10.00	7.0	70	105	6	8	10	E
CWR0-N-683--	50	.068	1.0	10	15	4	6	8	A
CWR0-N-823--	50	.082	1.0	10	15	4	6	8	A
CWR0-N-104--	50	.100	1.0	10	15	4	6	8	B
CWR0-N-124--	50	.120	1.0	10	15	4	6	8	B
CWR0-N-154--	50	.150	1.0	10	15	4	6	8	B
CWR0-N-184--	50	.180	1.0	10	15	4	6	8	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365/02

STYLES CWR03 AND CWR04

TABLE II. STYLES CWR03 AND CWR04 CHARACTERISTICS(CONT).

TYPE DESIGNATION	RATED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C	
	V dc	uF	uA	uA	uA	%	%	%	
CWR0-N-224--	50	.220	1.0	10	15	4	6	8	C
CWR0-N-274--	50	.270	1.0	10	15	4	6	8	C
CWR0-N-334--	50	.330	1.0	10	15	4	6	8	C
CWR0-N-394--	50	.390	1.0	10	15	4	6	8	C
CWR0-N-474--	50	.470	1.0	10	15	4	6	8	C
CWR0-N-564--	50	.560	1.0	10	15	4	6	8	C
CWR0-N-684--	50	.680	1.0	10	15	4	6	8	C
CWR0-N-824--	50	.820	1.0	10	15	4	6	8	D
CWR0-N-105--	50	1.000	1.0	10	15	4	6	8	D
CWR0-N-125--	50	1.200	1.2	12	18	4	6	8	D
CWR0-N-155--	50	1.500	1.5	15	23	4	6	8	D
CWR0-N-185--	50	1.800	1.8	18	27	4	6	8	E
CWR0-N-225--	50	2.200	2.2	22	23	4	6	8	E
CWR0-N-275--	50	2.700	2.7	27	41	4	6	8	E
CWR0-N-335--	50	3.300	3.3	33	50	4	6	8	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365/04

STYLE CWR06

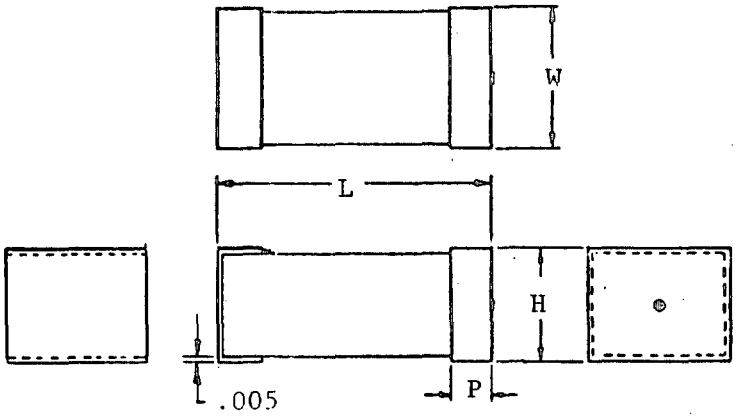


TABLE I. DIMENSIONS.

CASE SIZE	L	W	H	P
A	.100	.050	.050	.030
B	.150	.050	.050	.030
C	.200	.050	.050	.030
D	.150	.100	.050	.030
E	.200	.100	.050	.030
F	.220	.135	.070	.030
G	.265	.110	.110	.050
H	.285	.150	.110	.050

TABLE II. STYLE CWR06 CHARACTERISTICS.

TYPE DESIGNATION	RATED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C	
	V dc	uF	uA	uA	uA	%	%	%	
CWR06C-225--	4	2.2	1.0	10	12	6	8	8	A
CWR06C-475--	4	4.7	1.0	10	12	6	8	8	B
CWR06C-685--	4	6.8	1.0	10	12	6	8	8	C
CWR06C-106--	4	10.0	1.0	10	12	8	8	10	D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365/04

STYLE CWR06

TABLE II. STYLE CWR06 CHARACTERISTICS(CONT).

TYPE DESIGNATION	RATED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C	
	V dc	uF	uA	uA	uA	%	%	%	
CWR06C-156--	4	15.0	1.0	10	12	8	10	12	E
CWR06C-336--	4	33.0	2.0	20	24	8	10	12	F
CWR06C-686--	4	68.0	3.0	30	36	10	12	12	G
CWR06C-107--	4	100.0	4.0	40	48	10	12	12	H
CWR06D-155--	6	1.5	1.0	10	12	6	8	8	A
CWR06D-335--	6	3.3	1.0	10	12	6	8	8	B
CWR06D-475--	6	4.7	1.0	10	12	6	8	8	C
CWR06D-685--	6	6.8	1.0	10	12	6	8	8	D
CWR06D-106--	6	10.0	1.0	10	12	8	10	12	E
CWR06D-226--	6	22.0	2.0	20	24	8	10	12	F
CWR06D-476--	6	47.0	3.0	30	36	20	24	12	G
CWR06D-686--	6	68.0	4.0	40	48	10	12	12	H
CWR06F-105--	10	1.0	1.0	10	12	6	8	8	A
CWR06F-225--	10	2.2	1.0	10	12	6	8	8	B
CWR06F-335--	10	3.3	1.0	10	12	6	8	8	C
CWR06F-475--	10	4.7	1.0	10	12	6	8	8	D
CWR06F-685--	10	6.8	1.0	10	12	6	8	8	E
CWR06F-156--	10	15.0	2.0	20	24	8	8	10	F
CWR06F-336--	10	33.0	3.0	30	36	10	12	12	G
CWR06F-476--	10	47.0	5.0	50	60	10	12	12	H
CWR06H-684--	15	.68	1.0	10	12	6	8	8	A
CWR06H-155--	15	1.50	1.0	10	12	6	8	8	B
CWR06H-225--	15	2.20	1.0	10	12	6	8	8	C
CWR06H-335--	15	3.30	1.0	10	12	6	8	8	D
CWR06H-475--	15	4.70	1.0	10	12	6	8	8	E
CWR06H-106--	15	10.00	2.0	10	12	6	8	8	F
CWR06H-226--	15	22.00	4.0	40	48	8	10	10	G
CWR06H-336--	15	33.00	5.0	50	60	8	10	10	H
CWR06J-474--	20	.47	1.0	10	12	6	8	8	A
CWR06J-684--	20	.68	1.0	10	12	6	8	8	B
CWR06J-105--	20	1.00	1.0	10	12	6	8	8	B
CWR06J-155--	20	1.50	1.0	10	12	6	8	8	C
CWR06J-225--	20	2.20	1.0	10	12	6	8	8	D
CWR06J-335--	20	3.30	1.0	10	12	6	8	8	E
CWR06J-685--	20	6.80	2.0	20	24	6	8	8	F
CWR06J-156--	20	15.00	3.0	30	36	6	8	8	G
CWR06J-226--	20	22.00	4.0	40	48	6	8	8	H
CWR06K-334--	25	.33	1.0	10	12	6	8	8	A
CWR06K-684--	25	.68	1.0	10	12	6	8	8	B
CWR06K-105--	25	1.00	1.0	10	12	6	8	8	C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, TANTALUM

MIL-C-55365/04

STYLE CWR06

TABLE II. STYLE CWR06 CHARACTERISTICS(CONT).

TYPE DESIGNATION	RATED VOLTAGE (85°C)	CAPACITANCE NOMINAL	DC LEAKAGE(MAX)			DISSIPATION FACTOR(MAX)			CASE SIZE
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C	
	V dc	uF	uA	uA	uA	%	%	%	
CWR06K-155--	25	1.50	1.0	10	12	6	8	8	D
CWR06K-225--	25	2.20	1.0	10	12	6	8	8	E
CWR06K-475--	25	4.70	2.0	20	24	6	8	8	F
CWR06K-685--	25	6.80	2.0	20	24	6	8	8	G
CWR06K-106--	25	10.00	3.0	30	36	6	8	8	G
CWR06K-156--	25	15.00	4.0	40	48	6	8	8	H
CWR06M-224--	35	.22	1.0	10	12	6	8	8	A
CWR06M-474--	35	.47	1.0	10	12	6	8	8	B
CWR06M-684--	35	.68	1.0	10	12	6	8	8	C
CWR06M-155--	35	1.50	1.0	10	12	6	8	8	E
CWR06M-335--	35	3.30	1.0	10	12	6	8	8	F
CWR06M-475--	35	4.70	2.0	20	24	6	8	8	G
CWR06M-685--	35	6.80	3.0	30	36	6	8	8	H
CWR06N-104--	50	.10	1.0	10	12	6	8	8	A
CWR06N-154--	50	.15	1.0	10	12	6	8	8	A
CWR06N-224--	50	.22	1.0	10	12	6	8	8	B
CWR06N-334--	50	.33	1.0	10	12	6	8	8	B
CWR06N-474--	50	.47	1.0	10	12	6	8	8	C
CWR06N-684--	50	.68	1.0	10	12	6	8	8	D
CWR06N-105--	50	1.00	1.0	10	12	6	8	8	E
CWR06N-155--	50	1.50	1.0	10	12	6	8	8	F
CWR06N-225--	50	2.20	2.0	20	24	6	8	8	F
CWR06N-335--	50	3.30	2.0	20	24	6	8	8	G
CWR06N-475--	50	4.70	3.0	30	36	6	8	8	H

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681 (ESTABLISHED RELIABILITY)

SCOPE: CHIP, MULTIPLE LAYER, CERAMIC DIELECTRIC, CAPACITORS PER MIL-C-55681 ARE ESTABLISHED RELIABILITY PARTS USED IN THIN OR THICK FILM HYBRID CIRCUITS.

TEMP RANGE: -55°C TO +125°C

TYPE DESIGNATION: THE TYPE DESIGNATION SHALL BE IN THE FOLLOWING FORM.

CDR01	BX	221	B	F	S	M
STYLE	RATED TEMPERATURE AND VOLTAGE-TEMPERATURE LIMITS (SEE TABLE I)	CAPACITANCE EXPRESSED IN PICOFARADS. THE FIRST TWO DIGITS ARE SIGNIFICANT AND THE LAST DIGIT IS THE NUMBER OF ZEROS TO FOLLOW.	RATED VOLTAGE (SEE TABLE II)	CAPACITANCE TOLERANCE (SEE TABLE III)	TERMINATION FINISH (SEE TABLE IV)	FAILURE RATE LEVEL M(1.0%) P(0.1%) R(0.01%)
					*	*	*

* COMPLETE TYPE DESIGNATION NUMBER INCLUDES ADDITIONAL SYMBOLS TO INDICATE CAPACITANCE TOLERANCE, TERMINATION FINISH AND FAILURE RATE LEVEL. THIS NOTE APPLIES TO ALL TABLE V.

TABLE I. VOLTAGE-TEMPERATURE LIMITS.

SYMBOL	CAPACITANCE CHANGE WITH REFERENCE TO 25°C	
	WITHOUT VOLTS	WITH VOLTS
G	90 +20PPM/°C	90 +20 PPM/°C
P	0 +30PPM/°C	0 +30PPM/°C
X	+15 -15 PERCENT	+15 -25 PERCENT

TABLE II. RATED VOLTAGE

SYMBOL	RATED VOLTAGE
	V dc
A	50
B	100
C	200
D	300
E	500

TABLE III. CAPACITANCE TOLERANCE.

SYMBOL	CAPACITANCE TOLERANCE (±)
B	.10 pF
C	.25 pF
D	.50 pF
F	1 PERCENT
G	2 PERCENT
J	5 PERCENT
K	10 PERCENT
M	20 PERCENT

TABLE IV. TERMINATION FINISH.

SYMBOL	FINISH
M	PALLADIUM-SILVER
N	SILVER-NICHEL-GOLD
S	SOLDER-COATED
T	SILVER


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

211

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/01

STYLES CDR01, CDR02, CDR03 AND CDR04

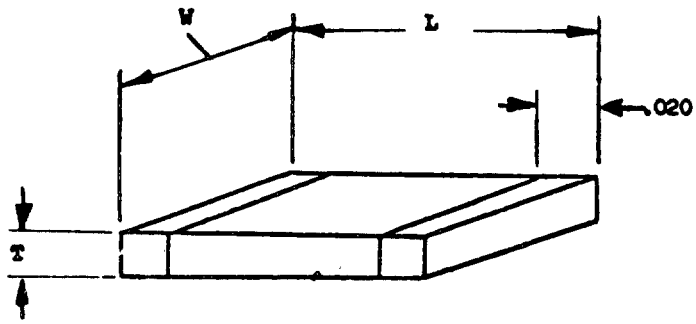

DIMENSIONS				
STYLE	L	W	T	
			MIN	MAX
CDR01	.080	.050	.020	.055
CDR02	.180	.050	.020	.055
CDR03	.180	.080	.020	.080
CDR04	.180	.125	.020	.080

TABLE V. TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR01BP100B---	10	J,K	BP	100
CDR01BP120BJ--	12	J	BP	100
CDR01BP150B---	15	J,K	BP	100
CDR01BP180BJ--	18	J	BP	100
CDR01BP220B---	22	J,K	BP	100
CDR01BP270BJ--	27	J	BP	100
CDR01BP330B---	33	J,K	BP	100
CDR01BP390BJ--	39	J	BP	100
CDR01BP470B---	47	J,K	BP	100
CDR01BP560BJ--	56	J	BP	100
CDR01BP680B---	68	J,K	BP	100
CDR01BP820BJ--	82	J	BP	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/01

STYLES CDR01, CDR02, CDR03 AND CDR04

TABLE V. STYLE CDR01 TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE pF	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE V dc
STYLE CDR01(CONT)				
CDR01BP101B---	100	J,K	BP	100
CDR01B-121B---	120	J,K	BP,BX	100
CDR01B-151B---	150	J,K	BP,BX	100
CDR01B-181B---	180	J,K	BP,BX	100
CDR01BX221B---	220	K,M	BX	100
CDR01BX271BK--	270	K	BX	100
CDR01BX331B---	330	K,M	BX	100
CDR01BX391BK--	390	K	BX	100
CDR01BX471B---	470	K,M	BX	100
CDR01BX561BK--	560	K	BX	100
CDR01BX681B---	680	K,M	BX	100
CDR01BX821BK--	820	K	BX	100
CDR01BX102B---	1000	K,M	BX	100
CDR01BX122BK--	1200	K	BX	100
CDR01BX152B---	1500	K,M	BX	100
CDR01BX182BK--	1800	K	BX	100
CDR01BX222B---	2200	K,M	BX	100
CDR01BX272BK--	2700	K	BX	100
CDR01BX332B---	3300	K,M	BX	100
CDR01BX392AK--	3900	K	BX	50
CDR01BX472A---	4700	K,M	BX	50
STYLE CDR02				
CDR02BP221B---	220	J,M	BP	100
CDR02BP271BJ--	270	J	BP	100
CDR02BX392BK--	3900	K	BX	100
CDR02BX472B---	4700	K,M	BX	100
CDR02BX562BK--	5600	K	BX	100
CDR02BX682B---	6800	K,M	BX	100
CDR02BX822BK--	8200	K	BX	100
CDR02BX103B---	10000	K,M	BX	100
CDR02BX123AK--	12000	K	BX	50
CDR02BX153A---	15000	K,M	BX	50
CDR02BX183AK--	18000	K	BX	50
CDR02BX223A---	22000	K,M	BX	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

213

CAPACITOR, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/01

STYLES CDR01, CDR02, CDR03 AND CDR04

TABLE IV. STYLE CDR03 TYPE DESIGNATION AND CHARACTERISTICS(CONT).


TYPE DESIGNATION	CAPACITANCE pF	CAPACITANCE TOLERANCE	RATED TEMP TEMP LIMITS	VOLTAGE V dc
STYLE CDR03				
CDR03BP331B---	330	J,K	BP	100
CDR03BP391BJ--	390	J	BP	100
CDR03BP471B---	470	J,K	BP	100
CDR03BP561BJ--	560	J	BP	100
CDR03BP681B---	680	J,K	BP	100
CDR03BP821BJ--	820	J	BP	100
CDR03BX103BK--	1000	J,K	BX	100
CDR03BX123BK--	12000	K	BX	100
CDR03BX153B---	15000	K,M	BX	100
CDR03BX183BK--	18000	K	BX	100
CDR03BX223B---	22000	K,M	BX	101
CDR03BX273BK--	27000	K	BX	100
CDR03BX333B---	33000	K,M	BX	100
CDR03BX393AK--	39000	K	BX	50
CDR03BX473A---	47000	K,M	BX	50
CDR03BX563AK--	56000	K	BX	50
CDR03BX683A---	68000	K,M	BX	50
STYLE CDR04				
CDR04BP122CJ--	1200	J	BP	200
CDR04BP152BP--	1500	J,K	BP	200
CDR04BP182CJ--	1800	J	BP	200
CDR04BP222C---	2200	J,K	BP	200
CDR04BP272CJ--	2700	J	BP	200
CDR04BP332C---	3300	J,K	BP	200
CDR04BX393BK--	39000	K	BX	100
CDR04BX473B---	47000	K,M	BX	100
CDR04BX563BK--	56000	K	BX	100
CDR04BX823AK--	82000	K	BX	50
CDR04BX104A---	100000	K,M	BX	50
CDR04BX124AK--	120000	K	BX	50
CDR04BX154A---	150000	K,M	BX	50
CDR04BX184AK--	180000	K	BX	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/02

STYLE CDR05

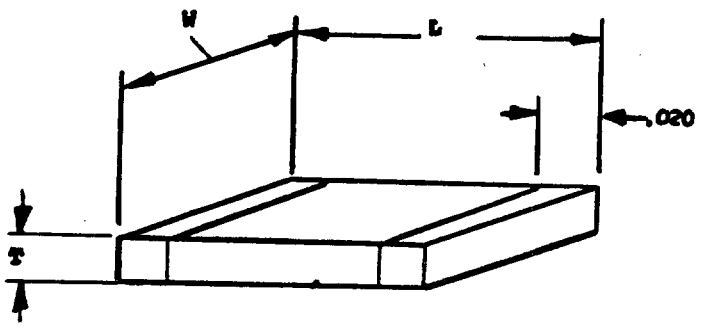

STYLE	DIMENSIONS			
	L	W	T	
			MIN	MAX
CDR05	.180	.250	.020	.080

TABLE V. TYPE DESIGNATION AND CHARACTERISTICS.


TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR05BP392B---	3900	J,K	BP	100
CDR05BP472B---	4700	J,K	BP	100
CDR05BP562B---	5600	J,K	BP	100
CDR05BX683B---	68000	K,M	BX	100
CDR05BX823BK--	82000	K	BX	100
CDR05BX104B---	100000	K,M	BX	100
CDR05BX124BK--	120000	K	BX	100
CDR05BX154B---	150000	K,M	BX	100
CDR05BX224A---	220000	K,M	BX	50
CDR05BX274AK--	270000	K	BX	50
CDR05BX334A---	330000	K,M	BX	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/03

STYLE CDR06

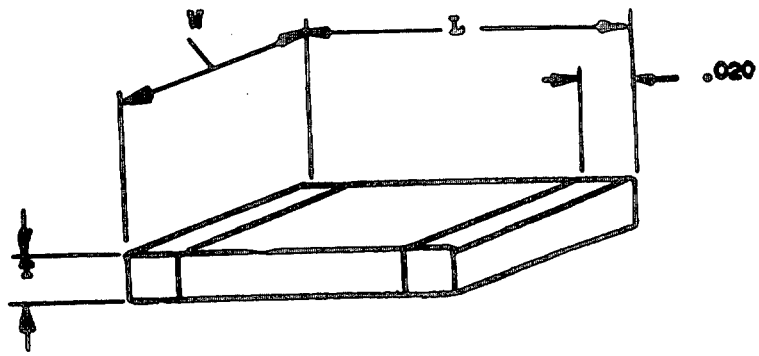

STYLE	DIMENSIONS			
	L	W	T	
			MIN	MAX
CDR06	.225	.250	.020	.080

TABLE V. TYPE DESIGNATION AND CHARACTERISTICS.


TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR06BP682B---	6800	J,K	BP	100
CDR06BP822B---	8200	J,K	BP	101
CDR06BP103B---	10000	J,K	BP	100
CDR06BX394AK--	390000	K	BX	50
CDR06BX474A---	470000	K,M	BX	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/04

STYLES CDR11, CDR12, CDR13 AND CDR14

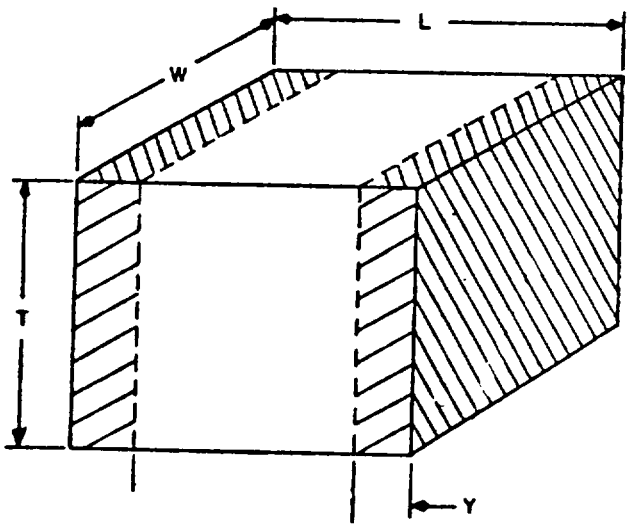

TERMINATION FINISH

(M) ONLY FOR STYLES CDR11 AND CDR13
(S) ONLY FOR STYLES CDR12 AND CDR14

DIMENSIONS					
STYLE	L	W	T		Y
			MIN	MAX	
CDR11	.055	.055	.028	.057	.010
CDR12	.055	.055	.028	.057	.010
CDR13	.110	.110	.058	.102	.015
CDR14	.110	.110	.058	.102	.015

TABLE V. STYLES CDR11 AND CDR12 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR1-B-0R1AB--	.1	B	BG,BP	50
CDR1-B-0R2AB--	.2	B	BG,BP	50
CDR1-B-0R3A---	.3	B,C	BG,BP	50
CDR1-B-0R4A---	.4	B,C	BG,BP	50
CDR1-B-0R5A---	.5	B,C,D	BG,BP	50
CDR1-B-0R6A---	.6	B,C,D	BG,BP	50
CDR1-B-0R7A---	.7	B,C,D	BG,BP	50
CDR1-B-0R8A---	.8	B,C,D	BG,BP	50
CDR1-B-0R9A---	.9	B,C,D	BG,BP	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/04

STYLES CDR11, CDR12, CDR13 AND CDR14

TABLE V. STYLES CDR11 AND CDR12 TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR1-B-1R0A---	1.0	B,C,D	BG,BP	50
CDR1-B-1R1A---	1.1	B,C,D	BG,BP	50
CDR1-B-1R2A---	1.2	B,C,D	BG,BP	50
CDR1-B-1R3A---	1.3	B,C,D	BG,BP	50
CDR1-B-1R4A---	1.4	B,C,D	BG,BP	50
CDR1-B-1R5A---	1.5	B,C,D	BG,BP	50
CDR1-B-1R6A---	1.6	B,C,D	BG,BP	50
CDR1-B-1R7A---	1.7	B,C,D	BG,BP	50
CDR1-B-1R8A---	1.8	B,C,D	BG,BP	50
CDR1-B-1R9A---	1.9	B,C,D	BG,BP	50
CDR1-B-2R0A---	2.0	B,C,D	BG,BP	50
CDR1-B-2R1A---	2.1	B,C,D	BG,BP	50
CDR1-B-2R2A---	2.2	B,C,D	BG,BP	50
CDR1-B-2R4A---	2.4	B,C,D	BG,BP	50
CDR1-B-2R7A---	2.7	B,C,D	BG,BP	50
CDR1-B-3R0A---	3.0	B,C,D	BG,BP	50
CDR1-B-3R3A---	3.3	B,C,D	BG,BP	50
CDR1-B-3R6A---	3.6	B,C,D	BG,BP	50
CDR1-B-3R9A---	3.9	B,C,D	BG,BP	50
CDR1-B-4R3A---	4.3	B,C,D	BG,BP	50
CDR1-B-4R7A---	4.7	B,C,D	BG,BP	50
CDR1-B-5R1A---	5.1	B,C,D	BG,BP	50
CDR1-B-5R6A---	5.6	B,C,D	BG,BP	50
CDR1-B-6R2A---	6.2	B,C,D	BG,BP	50
CDR1-B-6R8A---	6.8	B,C,J,K,M	BG,BP	50
CDR1-B-7R5A---	7.5	B,C,J,K,M	BG,BP	50
CDR1-B-8R2A---	8.2	B,C,J,K,M	BG,BP	50
CDR1-B-9R1A---	9.1	B,C,J,K,M	BG,BP	50
CDR1-B-100A---	10.0	F,G,J,K,M	BG,BP	50
CDR1-B-110A---	11.0	F,G,J,K,M	BG,BP	50
CDR1-B-120A---	11.0	F,G,J,K,M	BG,BP	50
CDR1-B-130A---	13.0	F,G,J,K,M	BG,BP	50
CDR1-B-150A---	15.0	F,G,J,K,M	BG,BP	50
CDR1-B-160A---	16.0	F,G,J,K,M	BG,BP	50
CDR1-B-180A---	18.0	F,G,J,K,M	BG,BP	50
CDR1-B-200A---	20.0	F,G,J,K,M	BG,BP	50
CDR1-B-220A---	22.0	F,G,J,K,M	BG,BP	50
CDR1-B-240A---	24.0	F,G,J,K,M	BG,BP	50
CDR1-B-270A---	27.0	F,G,J,K,M	BG,BP	50
CDR1-B-300A---	30.0	F,G,J,K,M	BG,BP	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/04

STYLES CDR11, CDR12, CDR13 ANND CDR14

TABLE V. TYPES CDR11 AND CDR12 TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR1-B-330A---	33.0	F,G,J,K,M	BG,BP	50
CDR1-B-360A---	36.0	F,G,J,K,M	BG,BP	50
CDR1-B-390A---	39.0	F,G,J,K,M	BG,BP	50
CDR1-B-430A---	43.0	F,G,J,K,M	BG,BP	51
CDR1-B-470A---	47.0	F,G,J,K,M	BG,BP	50
CDR1-B-510A---	51.0	F,G,J,K,M	BG,BP	50
CDR1-B-560A---	56.0	F,G,J,K,M	BG,BP	50
CDR1-B-620A---	62.0	F,G,J,K,M	BG,BP	51
CDR1-B-680A---	68.0	F,G,J,K,M	BG,BP	50
CDR1-B-750A---	75.0	F,G,J,K,M	BG,BP	51
CDR1-B-820A---	82.0	F,G,J,K,M	BG,BP	50
CDR1-B-910A---	91.0	F,G,J,K,M	BG,BP	50
CDR1-B-101A---	100.0	F,G,J,K,M	BG,BP	50
CDR1-BP111E---	110.0	F,G,J,K,M	BP	51
CDR1-BP121E---	120.0	F,G,J,K,M	BP	50
CDR1-BP131E---	130.0	F,G,J,K,M	BP	51
CDR1-BP151E---	150.0	F,G,J,K,M	BP	50
CDR1-BP161E---	160.0	F,G,J,K,M	BP	51
CDR1-BP181E---	180.0	F,G,J,K,M	BP	50
CDR1-BP201E---	200.0	F,G,J,K,M	BP	50
CDR1-BP221E---	220.0	F,G,J,K,M	BP	50
CDR1-BP241E---	240.0	F,G,J,K,M	BP	51
CDR1-BP271E---	270.0	F,G,J,K,M	BP	50
CDR1-BP301E---	300.0	F,G,J,K,M	BP	51
CDR1-BP331E---	330.0	F,G,J,K,M	BP	50
CDR1-BP361E---	360.0	F,G,J,K,M	BP	51
CDR1-BP391E---	390.0	F,G,J,K,M	BP	50
CDR1-BP431E---	430.0	F,G,J,K,M	BP	51
CDR1-BP471E---	470.0	F,G,J,K,M	BP	50
CDR1-BP511E---	510.0	F,G,J,K,M	BP	51
CDR1-BP561E---	560.0	F,G,J,K,M	BP	50
CDR1-BP621E---	620.0	F,G,J,K,M	BP	50
CDR1-BP681E---	680.0	F,G,J,K,M	BP	50
CDR1-BP751E---	750.0	F,G,J,K,M	BP	51
CDR1-BP821E---	820.0	F,G,J,K,M	BP	50
CDR1-BP911E---	910.0	F,G,J,K,M	BP	50
CDR1-BP102E---	1000.0	F,G,J,K,M	BP	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/04

STYLES CDR11, CDR12, CDR13 AND CDR14

TABLE V. STYLES CDR13 AND CDR14 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE pF	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE V dc
STYLES CDR13 & CDR14				
CDR1-B-0R1EB--	.1	B	BG,BP	500
CDR1-B-0R2EB--	.2	B	BG,BP	500
CDR1-B-0R3E---	.3	B,C	BG,BP	500
CDR1-B-0R4E---	.4	B,C	BG,BP	500
CDR1-B-0R5E---	.5	B,C,D	BG,BP	500
CDR1-B-0R6E---	.6	B,C,D	BG,BP	500
CDR1-B-0R7E---	.7	B,C,D	BG,BP	500
CDR1-B-0R8E---	.8	B,C,D	BG,BP	500
CDR1-B-0R9E---	.9	B,C,D	BG,BP	500
CDR1-B-1R0E---	1.0	B,C,D	BG,BP	500
CDR1-B-1R1E---	1.1	B,C,D	BG,BP	500
CDR1-B-1R2E---	1.2	B,C,D	BG,BP	500
CDR1-B-1R3E---	1.3	B,C,D	BG,BP	500
CDR1-B-1R4E---	1.4	B,C,D	BG,BP	500
CDR1-B-1R5E---	1.5	B,C,D	BG,BP	500
CDR1-B-1R6E---	1.6	B,C,D	BG,BP	500
CDR1-B-1R7E---	1.7	B,C,D	BG,BP	500
CDR1-B-1R8E---	1.8	B,C,D	BG,BP	500
CDR1-B-1R9E---	1.9	B,C,D	BG,BP	500
CDR1-B-2R0E---	2.0	B,C,D	BG,BP	500
CDR1-B-2R1E---	2.1	B,C,D	BG,BP	500
CDR1-B-2R2E---	2.2	B,C,D	BG,BP	500
CDR1-B-2R4E---	2.4	B,C,D	BG,BP	500
CDR1-B-2R7E---	2.7	B,C,D	BG,BP	500
CDR1-B-3R0E---	3.0	B,C,D	BG,BP	500
CDR1-B-3R3E---	3.3	B,C,D	BG,BP	500
CDR1-B-3R6E---	3.6	B,C,D	BG,BP	500
CDR1-B-3R9E---	3.9	B,C,D	BG,BP	500
CDR1-B-4R3E---	4.3	B,C,D	BG,BP	500
CDR1-B-4R7E---	4.7	B,C,D	BG,BP	500
CDR1-B-5R1E---	5.1	B,C,D	BG,BP	500
CDR1-B-5R6E---	5.6	B,C,D	BG,BP	500
CDR1-B-6R2E---	6.2	B,C,D	BG,BP	500
CDR1-B-6R8E---	6.8	B,C,J,K,M	BG,BP	500
CDR1-B-7R5E---	7.5	B,C,J,K,M	BG,BP	500
CDR1-B-8R2E---	8.2	B,C,J,K,M	BG,BP	500
CDR1-B-9R1E---	9.1	B,C,J,K,M	BG,BP	500

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/04

STYLES CDR11, CDR12, CDR13 AND CDR14

TABLE V. STYLES CDR13 AND CDR14 TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR1-B-100E---	10.0	F,G,J,K,M	BG,BP	500
CDR1-B-110E---	11.0	F,G,J,K,M	BG,BP	500
CDR1-B-120E---	12.0	F,G,J,K,M	BG,BP	500
CDR1-B-130E---	13.0	F,G,J,K,M	BG,BP	500
CDR1-B-150E---	15.0	F,G,J,K,M	BG,BP	500
CDR1-B-160E---	16.0	F,G,J,K,M	BG,BP	500
CDR1-B-180E---	18.0	F,G,J,K,M	BG,BP	500
CDR1-B-200E---	20.0	F,G,J,K,M	BG,BP	500
CDR1-B-220E---	22.0	F,G,J,K,M	BG,BP	500
CDR1-B-240E---	24.0	F,G,J,K,M	BG,BP	500
CDR1-B-270E---	27.0	F,G,J,K,M	BG,BP	500
CDR1-B-300E---	30.0	F,G,J,K,M	BG,BP	500
CDR1-B-330E---	33.0	F,G,J,K,M	BG,BP	500
CDR1-B-360E---	36.0	F,G,J,K,M	BG,BP	500
CDR1-B-390E---	39.0	F,G,J,K,M	BG,BP	500
CDR1-B-430E---	43.0	F,G,J,K,M	BG,BP	500
CDR1-B-470E---	47.0	F,G,J,K,M	BG,BP	500
CDR1-B-510E---	51.0	F,G,J,K,M	BG,BP	500
CDR1-B-560E---	56.0	F,G,J,K,M	BG,BP	500
CDR1-B-620E---	62.0	F,G,J,K,M	BG,BP	500
CDR1-B-680E---	68.0	F,G,J,K,M	BG,BP	500
CDR1-B-750E---	75.0	F,G,J,K,M	BG,BP	500
CDR1-B-820E---	82.0	F,G,J,K,M	BG,BP	500
CDR1-B-910E---	91.0	F,G,J,K,M	BG,BP	300
CDR1-B-101E---	100.0	F,G,J,K,M	BG,BP	300
CDR1-B-111D---	110.0	F,G,J,K,M	BG,BP	300
CDR1-B-121D---	120.0	F,G,J,K,M	BG,BP	300
CDR1-B-131D---	130.0	F,G,J,K,M	BG,BP	300
CDR1-B-151D---	150.0	F,G,J,K,M	BG,BP	300
CDR1-B-161D---	160.0	F,G,J,K,M	BG,BP	300
CDR1-B-181D---	180.0	F,G,J,K,M	BG,BP	300
CDR1-B-201D---	200.0	F,G,J,K,M	BG,BP	300
CDR1-B-221C---	220.0	F,G,J,K,M	BG,BP	200
CDR1-B-241C---	240.0	F,G,J,K,M	BG,BP	200
CDR1-B-271C---	270.0	F,G,J,K,M	BG,BP	200
CDR1-B-301C---	300.0	F,G,J,K,M	BG,BP	200
CDR1-B-331C---	330.0	F,G,J,K,M	BG,BP	200
CDR1-B-361C---	360.0	F,G,J,K,M	BG,BP	200
CDR1-B-391C---	390.0	F,G,J,K,M	BG,BP	200
CDR1-B-431C---	430.0	F,G,J,K,M	BG,BP	200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/04

STYLES CDR11, CDR12, CDR13 AND CDR14

TABLE V. STYLES CDR13 AND CDR14 TYPE DESIGNATION AND CHARACTERISTICS(CONT).


TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR1-B-471C---	470.0	F,G,J,K,M	BG,BP	200
CDR1-B-511B---	510.0	F,G,J,K,M	BG,BP	100
CDR1-B-561B---	560.0	F,G,J,K,M	BG,BP	100
CDR1-B-621B---	620.0	F,G,J,K,M	BG,BP	100
CDR1-B-681A---	680.0	F,G,J,K,M	BG,BP	50
CDR1-B-751A---	750.0	F,G,J,K,M	BG,BP	50
CDR1-B-821A---	820.0	F,G,J,K,M	BG,BP	50
CDR1-B-911A---	910.0	F,G,J,K,M	BG,BP	50
CDR1-B-102A---	1000.0	F,G,J,K,M	BG,BP	50
CDR1-BP112A---	1100.0	F,G,J,K,M	BP	50
CDR1-BP122A---	1200.0	F,G,J,K,M	BP	50
CDR1-BP132A---	1300.0	F,G,J,K,M	BP	50
CDR1-BP152A---	1500.0	F,G,J,K,M	BP	50
CDR1-BP162A---	1600.0	F,G,J,K,M	BP	50
CDR1-BP182A---	1800.0	F,G,J,K,M	BP	50
CDR1-BP202A---	2000.0	F,G,J,K,M	BP	50
CDR1-BP222A---	2200.0	F,G,J,K,M	BP	50
CDR1-BP242A---	2400.0	F,G,J,K,M	BP	50
CDR1-BP272A---	2700.0	F,G,J,K,M	BP	50
CDR1-BP302A---	3000.0	F,G,J,K,M	BP	50
CDR1-BP332A---	3300.0	F,G,J,K,M	BP	50
CDR1-BP362A---	3600.0	F,G,J,K,M	BP	50
CDR1-BP392A---	3900.0	F,G,J,K,M	BP	50
CDR1-BP432A---	4300.0	F,G,J,K,M	BP	50
CDR1-BP472A---	4700.0	F,G,J,K,M	BP	50
CDR1-BP502A---	5000.0	F,G,J,K,M	BP	50
CDR1-BP512A---	5100.0	F,G,J,K,M	BP	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/05


STYLES CDR21, CDR22, CDR23, CDR24 AND CDR25

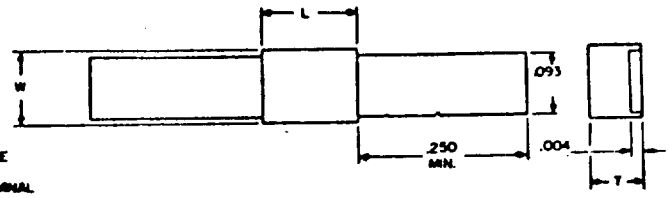


Style CDR21

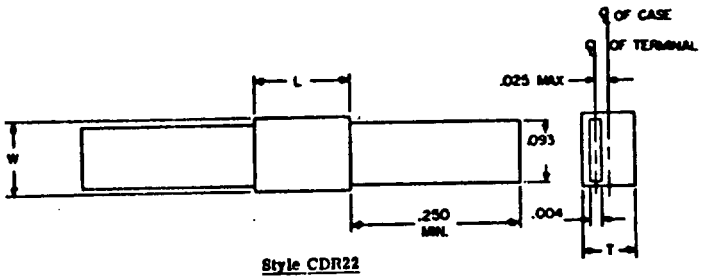


Style CDR22

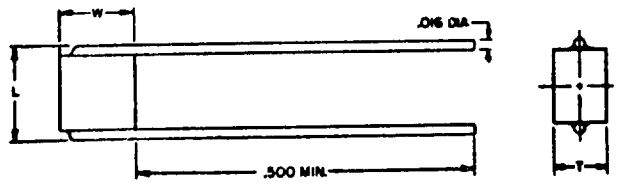

Style CDR23

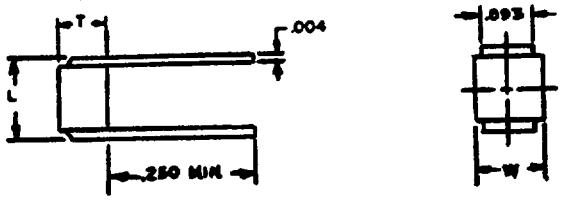

Style CDR24

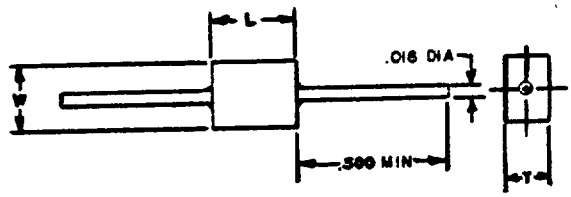

Style CDR25

CDR21,CDR22 AND CDR24 USE TERMINATION FINISH (T) ONLY.

CDR23 AND CDR25 USE TERMINATION FINISH (S) ONLY.

DIMENSIONS				
STYLE	L	W	T	
			MIN	MAX
CDR21	.135	.110	.060	.100
CDR22	.135	.110	.060	.100
CDR23	.135	.110	.060	.100
CDR24	.135	.110	.060	.100
CDR25	.135	.110	.060	.100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/05

STYLES CDR21, CDR22, CDR23, CDR24 AND CDR25

TABLE V. TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR2-B-0R1EB--	.1	B	BG,BP	500
CDR2-B-0R2EB--	.2	B	BG,BP	500
CDR2-B-0R3E---	.3	B,C	BG,BP	500
CDR2-B-0R4E---	.4	B,C	BG,BP	501
CDR2-B-0R5E---	.5	B,C,D	BG,BP	500
CDR2-B-0R6E---	.6	B,C,D	BG,BP	500
CDR2-B-0R7E---	.7	B,C,D	BG,BP	500
CDR2-B-0R8E---	.8	B,C,D	BG,BP	500
CDR2-B-0R9E---	.9	B,C,D	BG,BP	500
CDR2-B-1R0E---	1.0	B,C,D	BG,BP	500
CDR2-B-1R1E---	1.1	B,C,D	BG,BP	500
CDR2-B-1R2E---	1.2	B,C,D	BG,BP	501
CDR2-B-1R3E---	1.3	B,C,D	BG,BP	500
CDR2-B-1R4E---	1.4	B,C,D	BG,BP	500
CDR2-B-1R5E---	1.5	B,C,D	BG,BP	500
CDR2-B-1R6E---	1.6	B,C,D	BG,BP	500
CDR2-B-1R7E---	1.7	B,C,D	BG,BP	500
CDR2-B-1R8E---	1.8	B,C,D	BG,BP	500
CDR2-B-1R9E---	1.9	B,C,D	BG,BP	500
CDR2-B-2R0E---	2.0	B,C,D	BG,BP	500
CDR2-B-2R1E---	2.1	B,C,D	BG,BP	500
CDR2-B-2R2E---	2.2	B,C,D	BG,BP	500
CDR2-B-2R4E---	2.4	B,C,D	BG,BP	500
CDR2-B-2R7E---	2.7	B,C,D	BG,BP	500
CDR2-B-3R0E---	3.0	B,C,D	BG,BP	500
CDR2-B-3R3E---	3.3	B,C,D	BG,BP	500
CDR2-B-3R6E---	3.6	B,C,D	BG,BP	500
CDR2-B-3R9E---	3.9	B,C,D	BG,BP	501
CDR2-B-4R3E---	4.3	B,C,D	BG,BP	500
CDR2-B-4R7E---	4.7	B,C,D	BG,BP	500
CDR2-B-5R1E---	5.1	B,C,D	BG,BP	500
CDR2-B-5R6E---	5.6	B,C,D	BG,BP	500
CDR2-B-6R2E---	6.2	B,C,D	BG,BP	500
CDR2-B-6R8E---	6.8	B,C,J,K,M	BG,BP	500
CDR2-B-7R5E---	7.5	B,C,J,K,M	BG,BP	500
CDR2-B-8R2E---	8.2	B,C,J,K,M	BG,BP	500
CDR2-B-9R1E---	9.1	B,C,J,K,M	BG,BP	500
CDR2-B-100E---	10.0	F,G,J,K,M	BG,BP	500
CDR2-B-110E---	11.0	F,G,J,K,M	BG,BP	500
CDR2-B-120E---	12.0	F,G,J,K,M	BG,BP	501

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/05

STYLES CDR21, CDR22, CDR23, CDR24 AND CDR25

TABLE V. TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR2-B-130E---	13.0	F,G,J,K,M	BG,BP	500
CDR2-B-150E---	15.0	F,G,J,K,M	BG,BP	500
CDR2-B-160E---	16.0	F,G,J,K,M	BG,BP	500
CDR2-B-180E---	18.0	F,G,J,K,M	BG,BP	500
CDR2-B-200E---	20.0	F,G,J,K,M	BG,BP	500
CDR2-B-220E---	22.0	F,G,J,K,M	BG,BP	500
CDR2-B-240E---	24.0	F,G,J,K,M	BG,BP	500
CDR2-B-270E---	27.0	F,G,J,K,M	BG,BP	500
CDR2-B-300E---	30.0	F,G,J,K,M	BG,BP	500
CDR2-B-330E---	33.0	F,G,J,K,M	BG,BP	500
CDR2-B-360E---	36.0	F,G,J,K,M	BG,BP	500
CDR2-B-390E---	39.0	F,G,J,K,M	BG,BP	500
CDR2-B-430E---	43.0	F,G,J,K,M	BG,BP	500
CDR2-B-470E---	47.0	F,G,J,K,M	BG,BP	500
CDR2-B-510E---	51.0	F,G,J,K,M	BG,BP	500
CDR2-B-560E---	56.0	F,G,J,K,M	BG,BP	500
CDR2-B-620E---	62.0	F,G,J,K,M	BG,BP	500
CDR2-B-680E---	68.0	F,G,J,K,M	BG,BP	500
CDR2-B-750E---	75.0	F,G,J,K,M	BG,BP	500
CDR2-B-820E---	82.0	F,G,J,K,M	BG,BP	500
CDR2-B-910E---	91.0	F,G,J,K,M	BG,BP	500
CDR2-B-101E---	100.0	F,G,J,K,M	BG,BP	500
CDR2-B-111D---	110.0	F,G,J,K,M	BG,BP	300
CDR2-B-121D---	120.0	F,G,J,K,M	BG,BP	300
CDR2-B-131D---	130.0	F,G,J,K,M	BG,BP	300
CDR2-B-151D---	150.0	F,G,J,K,M	BG,BP	300
CDR2-B-161D---	160.0	F,G,J,K,M	BG,BP	300
CDR2-B-181D---	180.0	F,G,J,K,M	BG,BP	300
CDR2-B-201D---	200.0	F,G,J,K,M	BG,BP	300
CDR2-B-221C---	220.0	F,G,J,K,M	BG,BP	200
CDR2-B-241C---	240.0	F,G,J,K,M	BG,BP	200
CDR2-B-271C---	270.0	F,G,J,K,M	BG,BP	200
CDR2-B-301C---	300.0	F,G,J,K,M	BG,BP	200
CDR2-B-331C---	330.0	F,G,J,K,M	BG,BP	200
CDR2-B-361C---	360.0	F,G,J,K,M	BG,BP	200
CDR2-B-391C---	390.0	F,G,J,K,M	BG,BP	200
CDR2-B-431C---	430.0	F,G,J,K,M	BG,BP	200
CDR2-B-471C---	470.0	F,G,J,K,M	BG,BP	200
CDR2-B-511B---	510.0	F,G,J,K,M	BG,BP	100

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CHIP, CERAMIC DIELECTRIC

MIL-C-55681/05

STYLES CDR21, CDR22, CDR23, CDR24 AND CDR25

TABLE V. TYPE DESIGNATION AND CHARACTERISTICS(CONT).

TYPE DESIGNATION	CAPACITANCE	CAPACITANCE TOLERANCE	RATED TEMP AND VOLTAGE-TEMP LIMITS	RATED VOLTAGE
	pF			V dc
CDR2-B-561B---	560.0	F,G,J,K,M	BG,BP	100
CDR2-B-621B---	620.0	F,G,J,K,M	BG,BP	100
CDR2-B-681A---	680.0	F,G,J,K,M	BG,BP	50
CDR2-B-571A---	750.0	F,G,J,K,M	BG,BP	50
CDR2-B-821A---	820.0	F,G,J,K,M	BG,BP	50
CDR2-B-911A---	910.0	F,G,J,K,M	BG,BP	50
CDR2-B-102A---	1000.0	F,G,J,K,M	BG,BP	50
CDR2-B-112A---	1100.0	F,G,J,K,M	BG,BP	50
CDR2-B-122A---	1200.0	F,G,J,K,M	BG,BP	50
CDR2-B-132A---	1300.0	F,G,J,K,M	BG,BP	50
CDR2-B-152A---	1500.0	F,G,J,K,M	BG,BP	50
CDR2-B-162A---	1600.0	F,G,J,K,M	BG,BP	50
CDR2-B-182A---	1800.0	F,G,J,K,M	BG,BP	50
CDR2-B-202A---	2000.0	F,G,J,K,M	BG,BP	50
CDR2-B-222A---	2200.0	F,G,J,K,M	BG,BP	50
CDR2-B-242A---	2400.0	F,G,J,K,M	BG,BP	50
CDR2-B-272A---	2700.0	F,G,J,K,M	BG,BP	50
CDR2-B-302A---	3000.0	F,G,J,K,M	BG,BP	50
CDR2-B-332A---	3300.0	F,G,J,K,M	BG,BP	50
CDR2-B-362A---	3600.0	F,G,J,K,M	BG,BP	50
CDR2-B-392A---	3900.0	F,G,J,K,M	BG,BP	50
CDR2-B-432A---	4300.0	F,G,J,K,M	BG,BP	50
CDR2-B-472A---	4700.0	F,G,J,K,M	BG,BP	50
CDR2-B-502A---	5000.0	F,G,J,K,M	BG,BP	50
CDR2-B-512A---	5100.0	F,G,J,K,M	BG,BP	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE, CERAMIC DIELECTRIC

MIL-C-81

SCOPE: VARIABLE, CERAMIC DIELECTRIC CAPACITORS, PER MIL-C-81 ARE SMALL-SIZED TRIMMER CAPACCITORS DESIGNED FOR USE WHERE FINE TUNING ADJUSTMENTS ARE PERIODICALLY REQUIRED DURING THE LIFE OF THE EQUIPMENT. CAPACITANCE AND ADJUSTMENT ARE RELATIVELY LINEAR.

TEMP RANGE: -55°C TO +85°C

SHOCK: 100 G, SAWTOOTH, (MIL-STD-202, METHOD 213)

VIBRATION: 15 G, 10-2000 Hz, (MIL-STD-202, METHOD 204)

TYPE DESIGNATION.

CV11	A	070
STYLE	CHARACTERISTICS (SEE TABLE I)	CAPACITANCE

MAXIMUM CAPACITANCE VALUE EXPRESSED IN PICOFARADS(pF) IS IDENTIFIED BY A THREE DIGIT NUMBER. THE FIRST TWO DIGITS REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

227

CAPACITORS, VARIABLE, CERAMIC DIELECTRIC

MIL-C-81/01

STYLE CV11

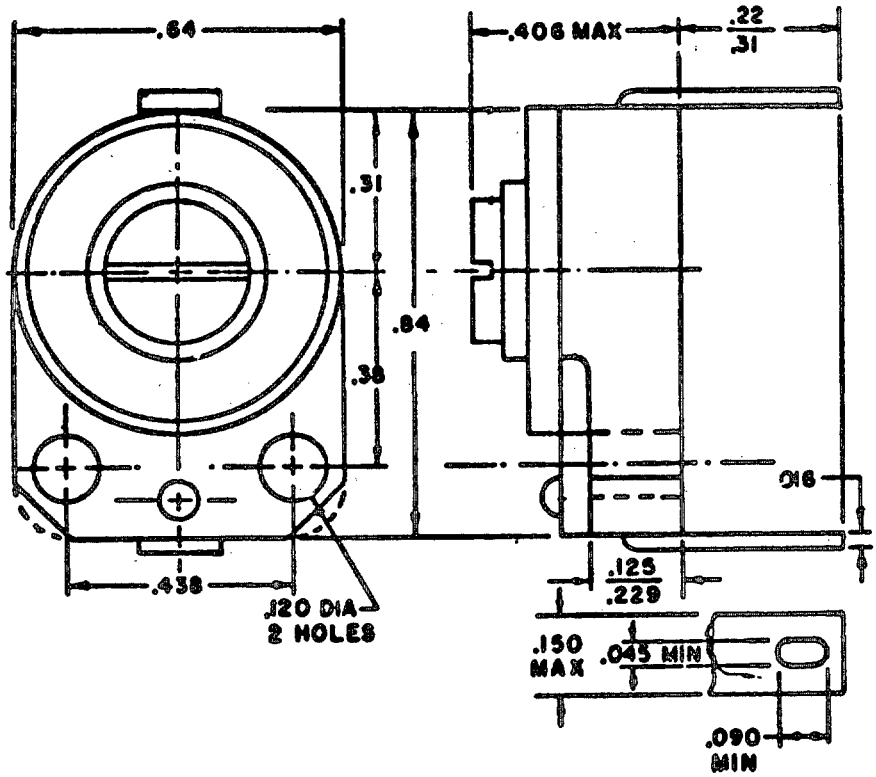


TABLE I. TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE pF		RATED VOLTAGE	SYMBOL	CHARACTERISTICS			
					CAPACITANCE CHANGE FROM VALUE AT 25°C			
					AT -55°C		AT +85°C	
	MIN	MAX	V dc		MIN %	MAX %	MIN %	MAX %
CV11A070	1.5	7.0	500	A	-4.5	+2.0	-2.5	+2.0
CV11A120	3.0	12.0	500	A	-4.5	+2.0	-2.5	+2.0
CV11A250	4.5	25.0	500	A	-4.5	+2.0	-2.5	+2.0
CV11C300	4.0	30.0	500	C	-1.0	+6.5	-4.0	-1.0
CV11C450	7.0	45.0	500	C	-1.0	+6.5	-4.0	-1.0
CV11D060	2.0	6.0	500	D	-1.5	+7.0	-5.0	-1.5
CV11D300	4.0	30.0	500	D	-1.5	+7.0	-5.0	-1.5
CV11D450	7.0	45.0	500	D	-1.5	+7.0	-5.0	-1.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE, CERAMIC DIELECTRIC

MIL-C-81/03

STYLE CV21

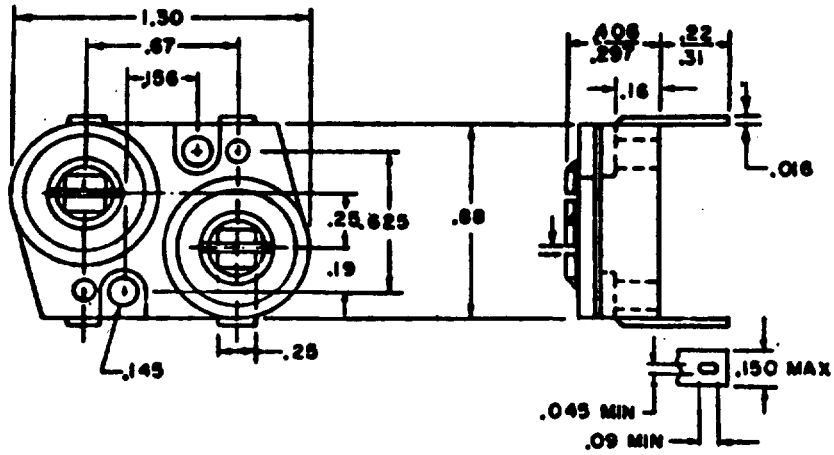


TABLE I. TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE pF		RATED VOLTAGE	SYMBOL	CHARACTERISTICS CAPACITANCE CHANGE FROM VALUE AT 25°C			
					AT -55°C		AT +85°C	
	MIN	MAX	V dc		MIN	MAX	MIN	MAX
					%	%	%	%
CV21A070	1.5	7.0	500	A	-4.5	+2.0	-2.5	+2.0
CV21A120	3.0	12.0	500	A	-4.5	+2.0	-2.5	+2.0
CV21A200	4.5	20.0	500	A	-4.5	+2.0	-2.5	+2.0
CV21C300	4.0	30.0	500	C	-1.0	+6.5	-4.0	-1.0
CV21C450	7.0	45.0	500	C	-1.0	+6.5	-4.0	-1.0
CV21D300	5.0	30.0	500	D	+1.5	+7.0	-5.0	-1.5
CV21D450	7.0	45.0	500	D	+1.5	+7.0	-5.0	-1.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE, CERAMIC DIELECTRIC

MIL-C-81/04

STYLE CV31 AND CV32

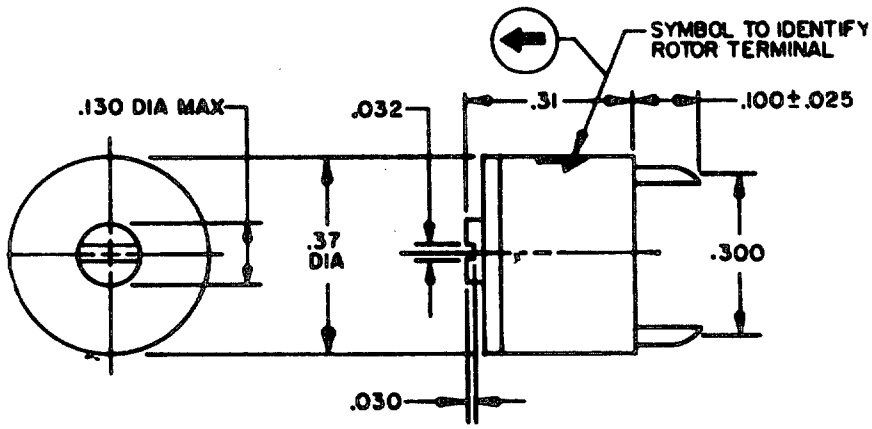


TABLE I. TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE pF		RATED VOLTAGE	CHARACTERISTICS				
				SYMBOL	CAPACITANCE CHANGE FROM VALUE AT 25°C			
					AT -55°C		AT +85°C	
	MIN	MAX	V dc		MIN	MAX	MIN	MAX
					%	%	%	%
CV3_A080	2.0	8.0	350	A	-4.5	+2.0	-2.5	+2.0
CV3_A180	5.5	18.0	350	A	-4.5	+2.0	-2.5	+2.0
CV3_B110	2.5	11.0	350	B	-1.0	+3.5	-2.5	-0.5
CV3_B250	7.0	25.0	350	B	-1.0	+3.5	-2.5	-0.5
CV3_C100	3.0	10.0	350	C	-1.0	+6.5	-4.0	-1.0
CV3_C250	8.0	25.0	350	C	-1.0	+6.5	-4.0	-1.0
CV3_D150	3.0	15.0	200	D	+1.5	+7.0	-5.0	-1.5
CV3_D350	9.0	35.0	200	D	+1.5	+7.0	-5.0	-1.5
CV3_E600	15.0	60.0	200	E	+3.0	+14.0	-10.0	-3.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE, CERAMIC DIELECTRIC

MIL-C-81/05

STYLE CV34

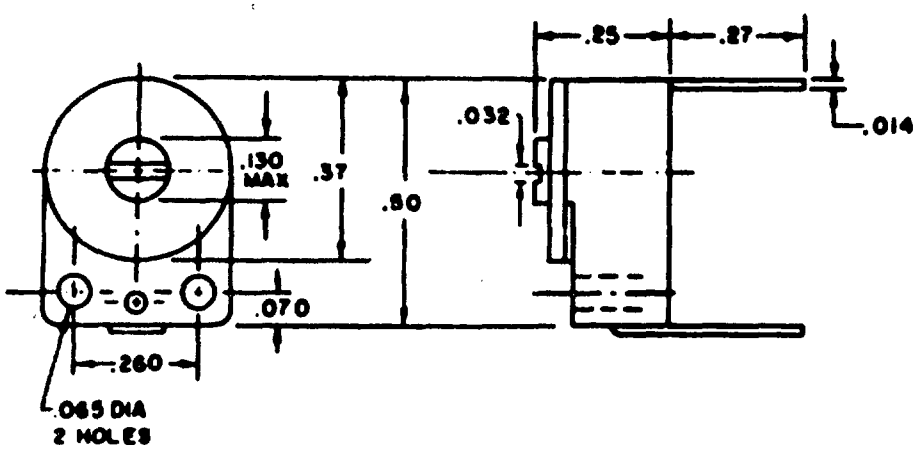


TABLE I. TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE pF		RATED VOLTAGE	CHARACTERISTICS				
				SYMBOL	CAPACITANCE CHANGE FROM VALUE AT 25°C			
					AT -55°C		AT +85°C	
	MIN	MAX	V dc		MIN	MAX	MIN	MAX
					%	%	%	%
CV34A080	1.5	8.0	350	A	-4.5	+2.0	-2.5	+2.0
CV34A150	4.0	15.0	350	A	-4.5	+2.0	-2.5	+2.0
CV34D200	4.0	20.0	200	D	+1.5	+7.0	-5.0	-1.5
CV34D350	8.0	35.0	200	D	+1.5	+7.0	-5.0	-1.5
CV34E600	15.0	60.0	200	E	+3.0	+14.0	-10.0	-3.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE

MIL-C-14409

SCOPE: THESE VARIABLE CAPACITORS, TUBULAR TRIMMER ARE FOR USE WHERE FINE TUNING ADJUSTMENTS ARE PERIODICALLY REQUIRED DURING THE LIFE OF EQUIPMENT. THE STYLES INCLUDED ARE PC38, PC39, PC41, PC42, PC43, PC48,PC51 AND PC52 PER MIL-C-14409.

TEMP RANGE: Q= -55°C TO +125°C
J= -55°C TO +125°C
H= -55°C TO +125°C
G= -55°C TO +125°C

SHOCK: 100G, SAWTOOTH, (MIL-STD-202, METHOD 213)

VIBRATION: 15G, 10-2000 HZ, (MIL-STD-202, METHOD 204)

TYPE DESIGNATION.

PC51 — STYLE

Q — CHARACTERISTIC


Q
J
H
G

38 — CAPACITANCE

EXPRESSED IN PICOFARADS FIRST 2 DIGITS ARE SIGNIFICANT AND THE LAST IS THE NUMBER OF ZEROS TO FOLLOW.

CAPACITOR, VARIABLE (PISTON TYPE, TUBULAR TRIMMER)

MIL-C-14409/04

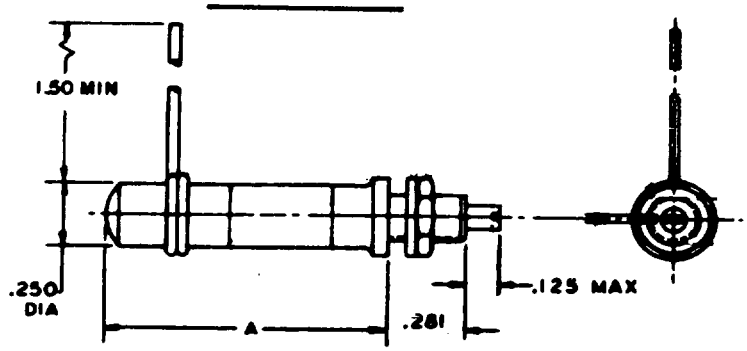

212.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-14409/4

TABLE I. STYLE PC38 AND PC48 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	DC RATED VOLTAGE	CAPACITANCE RANGE		DIMENSIONS A	Q	WIRE SIZE AWG	DIELECTRIC MATERIAL
		MIN	MAX				
PC3801R8	750	.6	1.8	.359	1500	24	QUARTZ
PC3805R5	1250	.6	5.5	.625	1500	22	QUARTZ
PC3809R5	1250	.6	9.5	1.062	1500	22	QUARTZ
PC3810160	1250	.8	16.0	1.656	1500	22	QUARTZ
PC48J5R5	750	.8	5.5	.359	1000	24	GLASS
PC48J110	1250	.8	11.0	.594	900	22	GLASS
PC48H160	1250	.8	16.0	.812	800	22	GLASS
PC48H230	1250	.8	23.0	1.062	700	22	GLASS
PC48H380	1250	1.0	38.0	1.656	500	22	GLASS

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER)

MIL-C-14409/05

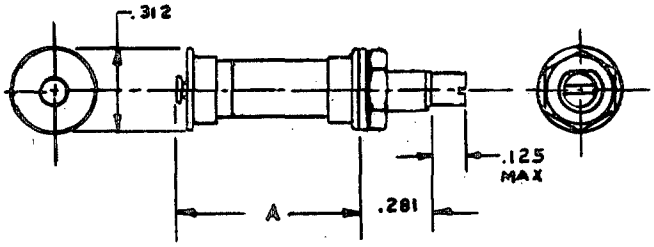


TABLE I. STYLE PC39 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE RANGE		DIMENSIONS A	Q	TEMPERATURE COEFFICIENT PARTS/MILLION/°C	DIELECTRIC MATERIAL
	MAX pF	MAX pF				
1000 VOLTS dc						
PC39G160	1.0	16.0	.469	750	+150	GLASS
PC39G360	1.0	36.0	.703	550	+150	GLASS
PC39G520	1.0	52.0	.922	350	+150	GLASS
PC39G750	1.0	75.0	1.172	250	+150	GLASS
PC39G121	1.0	120.0	1.766	250	+150	GLASS
PC39J121	1.0	120.0	1.766	250	+ 50	GLASS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER

MIL-C-14409/07

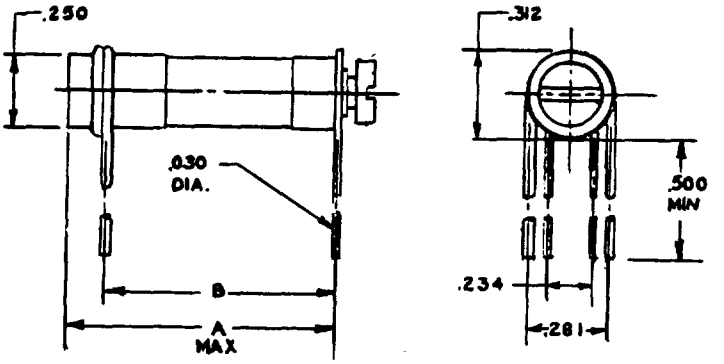


TABLE I. STYLE PC41 AND PC51 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE RANGE		DIMENSIONS		T(MAX)	Q	WIRE SIZE	DIELECTRIC MATERIAL
	MIN pF	MAX pF	B	A(MAX)			AWG	
			750 VOLTS dc					
PC41Q1R8	.2	1.8	.250	.312	.181	1500	24	QUARTZ
PC41Q5R5	.6	5.5	.438	.562	.186	1500	22	QUARTZ
PC41Q9R5	.2	9.1	.875	1.000	.211	1500	22	QUARTZ
PC41Q160	.8	16.0	1.375	1.609	.196	1500	22	QUARTZ
PC51J5R5	.8	5.5	.250	.312	.181	1000	24	GLASS
PC51J110	.8	11.0	.438	.562	.186	900	22	GLASS
PC51H160	.8	16.0	.625	.766	.231	800	22	GLASS
PC51H230	.8	23.0	.875	1.000	.211	700	.22	GLAS
PC51H380	.8	38.0	1.375	1.609	.196	500	22	GLASS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER)

MIL-C-14409/08

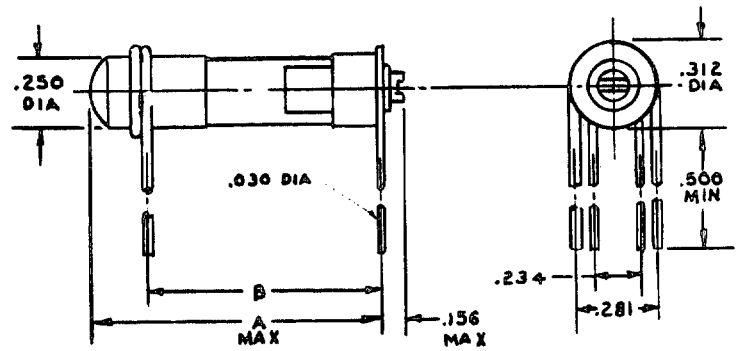


TABLE I. STYLES PC42 AND PC52 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	DC RATED VOLTAGE VOLTS	CAPACITANCE RANGE MIN pF	CAPACITANCE RANGE MAX pF	DIMENSIONS B	DIMENSIONS A(MAX)	Q	WIRE SIZE AWG	DIELECTRIC MATERIAL
PC42Q1R8	750	.6	1.8	.500	.656	1500	24	QUARTZ
PC42Q5R5	1250	.6	5.5	.703	.922	1500	22	QUARTZ
PC42Q9R5	1250	.6	9.5	1.016	1.359	1500	22	QUARTZ
PC42Q160	1250	.8	16.0	1.469	1.953	1500	22	QUARTZ
PC52J5R5	750	.8	5.5	.500	.656	1000	24	GLASS
PC52J110	1250	.8	11.0	.703	.906	900	22	GLASS
PC52H160	1250	.8	16.0	.844	1.109	800	22	GLASS
PC52H230	1250	.8	23.0	1.016	1.359	700	22	GLASS
PC52H380	1250	.8	38.0	1.469	1.953	500	22	GLASS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER)

MIL-C-14409/09

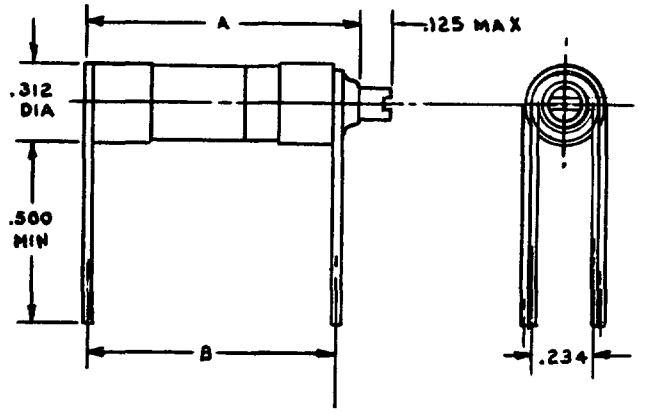



TABLE I. STYLE PC43 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE RANGE,		DIMENSIONS		Q	TEMP COEFF PART/ MILLION/°C	DIELECTRIC MATERIAL
	MIN pF	MAX pF	B	A			
			1000 VOLTS dc				
PC43G160	1.0	16.0	.688	.734	750	+150	GLASS
PC43G360	1.0	36.0	.922	.969	550	+150	GLASS
PC43G520	1.0	52.0	1.141	1.188	350	+150	GLASS
PC43G750	1.0	75.0	1.375	1.422	250	+150	GLASS
PC43G121	1.0	120.0	1.984	2.031	250	+150	GLASS
PC43J121	1.0	120.0	1.984	2.031	250	+ 50	GLASS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARAIBLE (PISTON TYPE, TUBULAR TRIMMER)

MIL-C-14409/12

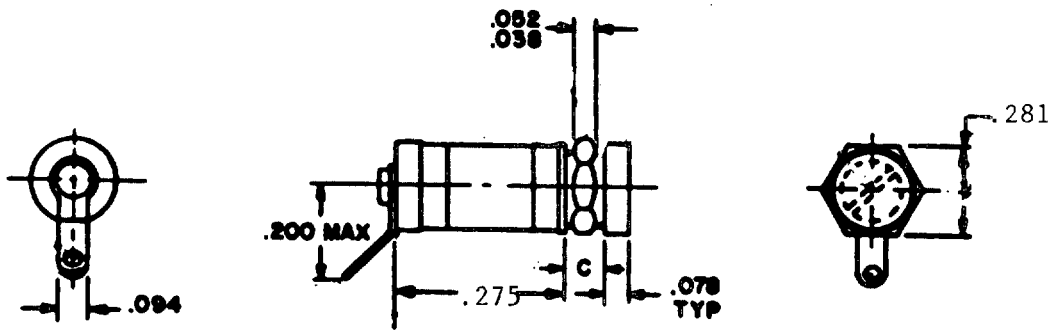

STYLE PC25

TABLE I. STYLE PC25 TYPE DESIGNATION AND CHARACTERISTICS

TYPE DESIGNATION	CAPACITANCE		Q	DIELECTRIC
	MIN pF	MAX pF		
			250 VOLTS dc	
PC25J100	0.8	10.0	2000	AIR

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER)

MIL-C-14409/13

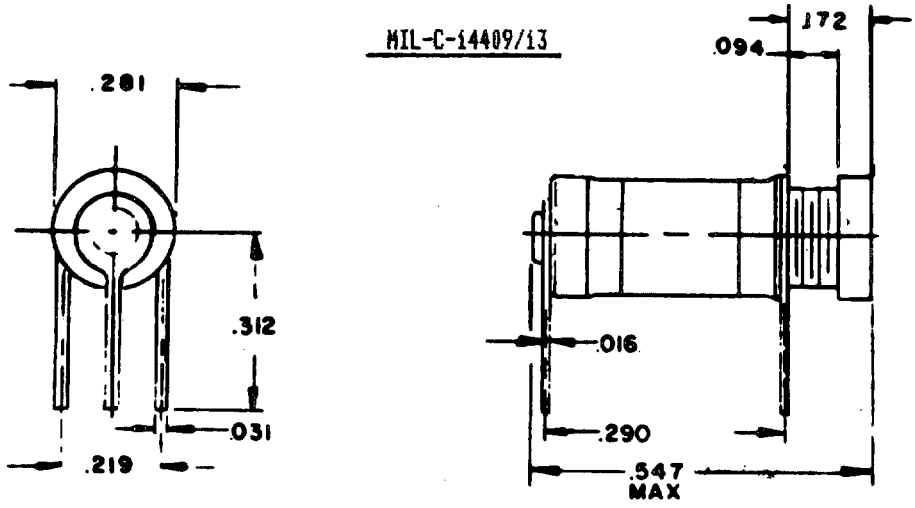


TABLE I. STYLE PC26 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE		Q	DIELECTRIC
	MIN pF	MAX pF		
			250 VOLTS dc	
PC26J100	0.8	10.0	2000	AIR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE, VACCUM OR GAS DIELECTRIC

MIL-C-23183

SCOPE: VARIABLE, VACUUM OR GAS DIELECTRIC CAPACITORS STYLES CG60, CG65, AND CG66 PER MIL-C-23i38 ARE INTENDED FOR USE IN HIGH VOLTAGE APPLICATION AND ARE RATED FOR USE OVER THE TEMPERATURE RANGE OF -55°C TO +85°C AND FROM -55°C TO +100°C AS APPLICABLE.

TEMP RANGE: -55°C TO +100°C (STYLES CG65 AND CG66)
-55°C TO +85°C (STYLE CG60)

SHOCK: 30G, SAWTOOTH, (MIL-STD-202, METHOD 213)

VIBRATION: 10-2000 Hz, (MIL-STD-202, METHOD 204)
10-55 Hz, (MIL-STD-202, METHOD 201)

TYPE DESIGNATION.

CG60	CE	050-750	H,G
STYLE	VOLTAGE	CAPACITANCE IS EXPRESSED IN PICOFARADS. THE FIRST TWO DIGITS ARE SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW.	CURRENT
	C= 3 KV E= 5		G= 40 Amps H= 42

MIL-C-23183/05

STYLE CG60 (CERAMIC)

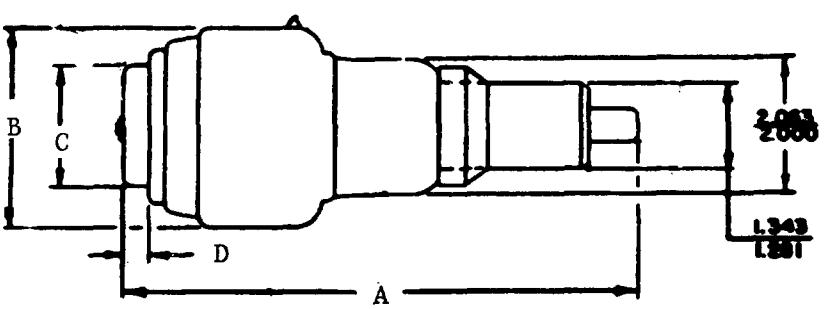


TABLE I. STYLE CG60 CHARACTERISTICS AND DIMENSIONS.


TYPE DESIGNATION	VOLTAGE PEAK	CAPACITANCE RANGE	DIMENSIONS							
			A		B		C		D	
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
	kV	pF								
CG60C050-751H	3	5-750	7.500	8.000	2.938	3.063	1.781	1.844	.344	.406
CG60C070-102H	3	7-1000	7.438	7.938	2.938	3.063	1.781	1.844	.344	.406

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CAPACITORS, VARIABLE, VACUUM OR GAS DIELECTRIC

MIL-C-23183/07


STYLES CG65 AND CG66
(CERAMIC)

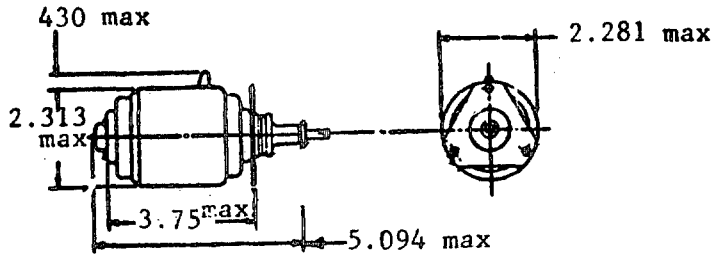

Capacitor assembly for CG65E050-471G and CG66E050-471G.

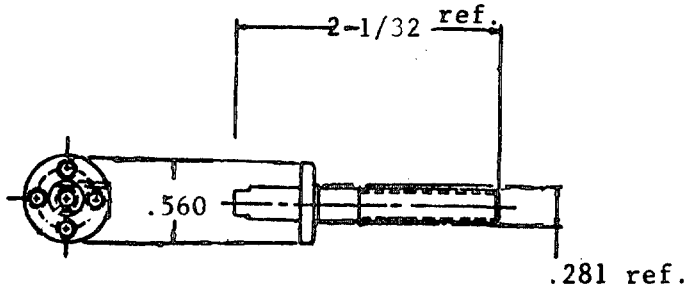

Style CG65 and CG66 capacitors.

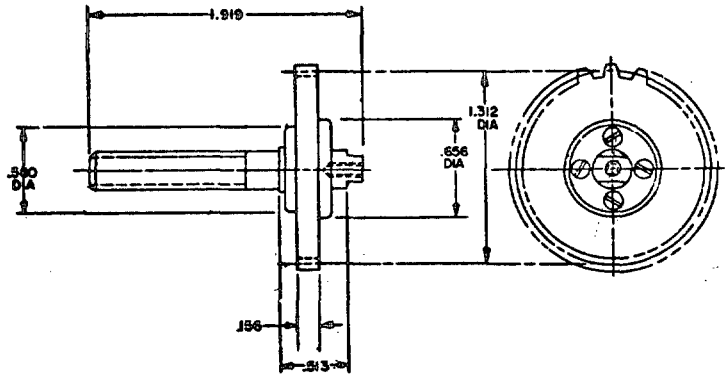

Lead screw detail for CG66E050-471G.

TABLE I. STYLE CG65 AND CG66 CHARACTERISTICS.

TYPE DESIGNATION	VOLTAGE PEAK		RATED CURRENT	
	MIN	MAX	(RMS)	
CG65E050-471G	10 KV	5 KV	40	WITH GEAR
CG66E050-471G	10 KV	5 KV	40	WITHOUT GEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND (ELEX 8111)
WASHINGTON, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.