MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS

CAPACITORS

TO ALL HOLDERS OF MIL-STD-242G(NAVY),PART 4:

1. THE FOLLOWING PAGES OF MIL-STD-242G(NAVY), PART 4 HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
111.11	17 September 1981	(REPRINTED WITHOUT CHANGE)	
111.12-111.17	16 December 1983	111.12-111.17	17 September 1981
111.18	17 September 1981	(REPRINTED WITHOUT CHANGE)	
121.19	17 September 1981	(REPRINTED WITHOUT CHANGE)	
121.20	16 December 1983	121.20	17 September 1981
211.1	17 September 1981	(REPRINTED WITHOUT CHANGE)	
211.2	16 December 1983	211.2	17 September 1981
212.5	17 September 1981	(REPRINTED WITHOUT CHANGE)	
212.6	16 December 1983	212.6	17 September 1981

2. MAKE PEN AND INK CHANGES TO THE FOLLOWING PAGES:

Page 111.3, TABLE I, RATED VOLTAGE column for 300 and 225: Delete all entries.

Page 111.7, TABLE I, Title: Delete "(CUR19)" and substitute "(CUR17)".

Page 111.5, TABLE I, ESR 25°C column for Capacitance 12: Delete "11.05" and substitute "10.05".

Page 111.8 through 111.21, TABLE I: Reverse column headings "CAPACITANCE NOMINAL" and "RATED VOLTAGE β 105°C".

Page 112.6, TABLE I, DC LEAKAGE MAX, 85°C and 125°C column for 75 Rated voltage, 4.00 capacitance: Delete "16.0" and substitute "6.0".

Page 112.8, TABLE I, CAPACITANCE column for 250 rated voltage: Deleted "2.60" and substitute "2.00".

Page 112.11, DIMENSIONS table, C(MAX) column for G2 case size: Delete "1.409" and substitute "1.406".

Page 112.13, TABLE I, CAPACITANCE TOLERANCE column for part numbers 0002, 0222, and 0442: Delete "5" and substitute "10".

Page 112.14, TABLE I, MAX 85°C 40 kHz column, Rated voltage 6, Capacitance 270: Delete "1275" in three places and substitute "1375".

Page 112.14, TABLE I, MAX 85°C 40 kHz column, Rated voltage 8, Capacitance 120: Delete "1200" in three places and substitute "1220".

FCS 59GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

Page 112.14, TABLE I, DISSIPATION FACTOR column, Rated voltage 8, Capacitance 220: Delete "40" in three places and substitute "37".

Page 112.14, TABLE I, IMPEDANCE (MAX) column, Rated voltage 8, Capacitance 290: Delete "30" and substitute "25".

Page 112.14, TABLE I, DISSIPATION FACTOR column, Rated voltage 8, Capacitance 290: Delete "40" in three places and substitute "34".

Page 112.15, TABLE I, CAPACITANCE CHANGE AT -55°C and +85°C columns, Rated voltage 10, Capacitance 250: Delete "36" and "40" in three places and substitute "40" and "14".

Page 112.17, TABLE I, CAPACITANCE CHANGE AT -55°C column, Rated voltage 50, Capacitance 60: Delete "15" in three places and substitute "16".

Page 112.18, TABLE I, MAX 85°C 40 kHz column, Rated voltage 100, Capacitance tolerance 22: Delete "935" in three places and substitute "965".

Page 112.18, TABLE I, CAPACITANCE TOLERANCE column, Rated voltage 100, Capacitance 30: Delete "15" and substitute "5".

Page 112.18, MAX 85°C 40kHz column, Rated voltage 100, Capacitance 30: Delete "1200" in three places and substitute "1240".

Page 112.19, TABLE I, DISSIPATION FACTOR column, Rated voltage 125, Capacitance 56: Delete "6.6" in two places and substitute "6.5".

Page 113.5, TABLE I, DASH NUMBER M column: Delete "5062" in two places and substitute "5061".

Page 113.10, TABLE I, DASH NUMBER M column: Delete "5172" and substitute "5142".

Page 113.10, TABLE I, DASH NUMBER M column: Delete "5514" and substitute "5144".

Page 113.11, TABLE I, DASH NUMBER S column: Delete "575" and substitute "5758".

Page 113.20, TABLE I, DASH NUMBER S column: Delete "0924" and "0925" and substitute "0944" and "0945".

Page 113.20, TABLE I, DASH NUMBER S column: Delete "1891" and "1892" and substitute "1391" and "1392".

Page 121.2, TABLE II, RATED TEMPERATURE SYMBOL column: Delete all entries and substitute:

"A
"A, B
"A
"C"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

Page 121.10, DIMENSIONS TABLE, STYLE CKR11, DIMENSION L: Delete ".169" and substitute ".160".

Page 121.18, TABLE I, DASH NUMBER 0071, CAPACITANCE TOLERANCE column: Delete "20" and substitute "10".

Page 121.23, TYPE DESIGNATION, Under CHARACTERISTIC: Delete "CG 0±60" and substitute "CH 0±60".

Page 121.25, TABLE I, under Title: Add "MIL-C-20/27".

Page 121.25, TABLE I, TYPE DESIGNATION CCR75CG100 and CCR75CG110, CAPACITANCE TOLERANCE: Delete "BCD" and substitute "FGJ".

Page 121.26, MIL-C-20/29, TABLE I, TYPE DESIGNATION CCR77CG512 and CCR77CG562, CAPACITANCE TOLERANCE: Delete "FGJX" and substitute "FGJK".

Page 121.28, STYLE CCR06, LEAD DIAMETER: Delete ".021" and substitute ".020".

Pages 121.28 and 121.29, TABLE I, CAPACITANCE TOLERANCE: Delete "BCC" in all places and substitute "BCD".

Pages 121.29, TABLE I, TYPE DESIGNATION CCR0-CG111--, NOMINAL CAPACITANCE: Delete "118.0" and substitute "110.0".

Page 121.29, TABLE I, under TYPE DESIGNATION CCR0-CG331--: Add "100 VOLTS dc".

Page 121.29, TABLE I, under TYPE DESIGNATION CCR0-CG182--: Add "50 VOLTS dc".

Page 121.30, TABLE I, 50 VOLTS dc, TYPE DESIGNATION CCR06CG512-- and CCR06CG562--, CAPACITANCE TOLERANCE: Add "K".

Page 121.31, TABLE I, 50 VOLTS dc, TYPE DESIGNATION: Delete CCR07CG904--" and substitute "CCR07CG104".

Page 121.31, TABLE I, under TYPE DESIGNATION CCR07CG472--: Add "100 VOLTS dc".

Page 121.32, TABLE I: Delete "300 VOLTS dc" and substitute "200 VOLTS dc".

Page 121.32, TABLE I, 200 VOLTS dc, TYPE DESIGNATION: Delete "CCR08CG393--" and substitute "CCR08CG392--".

Page 121.32, TABLE I, 100 VOLTS dc, TYPE DESIGNATION CCR08CG183--, NOMINAL CAPACITANCE: Delete "16000" and substitute "18000"

Page 122.7, PART NUMBER CQR07A-QE473-3-, DIMENSION CIRCUITS 1 and 3: Delete ".56" and substitute ".562".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

Page 122.7, PART NUMBER CQR07A-QE104-3-, DIMENSION CIRCUITS 1 and 3: Delete ".67" and substitute ".670".

Page 122.13, TABLE I, PART NUMBER KF series, above CIRCUIT 1 and 3 D column: Add "CIRCUIT 3 D".

Page 122.13, TABLE I, PART NUMBER KF series: Add column "CIRCUIT 1 D".

Page 122.13, TABLE I, PART NUMBER CQR13A-KF102-3-through CQR13A-KF222-3-: Add under CIRCUIT 1 D column ".235".

Page 122.13, TABLE I, PART NUMBER CQR13A-KF272-3-through CQR13A-KF103-3-: Add under CIRCUIT 1 D column: ".312".

Page 123.6, TABLE I, DASH NUMBER 1456, 1716, and 1976 line: Delete "0.47, 1, 10, 1.625" and substitute "0.22, 3, 20, 1.062".

Page 123.11, TABLE I, DASH NUMBER column: Delete "1061" through "1082" and substitute "1031" through "1052".

Page 123.12, TYPE DESIGNATION, FAILURE RATE LEVEL: Add "S (0.001%)".

Page 123.14, TABLE I, CAPACITANCE VALUE 2.2, DIMENSION L: Delete "1.124" and substitute "1.125".

Page 123.16, TABLE I, CAPACITANCE VALUE 2.0, CIRCUIT DIAGRAM 3, DIMENSION L: Delete "1.125" and substitute "1.063".

Page 123.16, TABLE I, CAPACITANCE VALUE 2.2, CIRCUIT DIAGRAM 1, DIMENSION L: Delete "1.063" and substitute "1.125".

Page 123.16, TABLE I, CAPACITANCE VALUE 2.2, CIRCUIT DIAGRAM 3, DIMENSION L: Delete "1.125" and substitute "1.063".

Page 123.16, TABLE I, CAPACITANCE VALUE 2.7, CIRCUIT DIAGRAM 1, DIMENSION L: Delete "1.063" and substitute "1.312".

Page 123.16, TABLE I, CAPACITANCE VALUE 2.7, CIRCUIT DIAGRAM 3, DIMENSION L: Delete "1.312" and substitute "1.250".

Page 123.16, TABLE I, CAPACITANCE VALUE 3.0, CIRCUIT DIAGRAM 1, DIMENSION L: Delete "1.250" and substitute "1.312".

Page 123.20, TABLE I, CAPACITANCE VALUE .027, CIRCUIT DIAGRAM 3, DIMENSION L: Delete ".812" and substitute ".750".

Page 123.21, TABLE I, CAPACITANCE VALUE .47, CIRCUIT DIAGRAM 3, DIMENSION L: Delete "1.500" and substitute "1.750".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

Page 131.2, TABLE I, CAPACITANCE VALUE 15, 100 VOLTS: Add L ".270", W ".190", and T ".110".

Page 131.2, TABLE I, CAPACITANCE VALUE 22 & 24, 100 VOLTS, T column: Delete ".110", and substitute ".120".

Page 131.3 and 131.4, TABLE I, STYLE CMR06, R MAX: Delete ".140" in all places and substitute ".141".

Page 131.7, TABLE II, STYLE CMR05, CAPACITANCE TOLERANCE: Delete "F, G, J" in all places an substitute "D".

Page 131.7, TABLE II, STYLE CMR05, CAPACITANCE TOLERANCE: Delete "J" and substitute "D".

Page 131.9, TABLE II, STYLE CMR06, TYPE DESIGNATION: Delete "CMR06F581--D-" and substitute "CMR06F681--D-".

Page 132.8, TABLE I, DASH NUMBER 3065, 4065: Delete "506" and substitute "5065".

Page 132.10, TABLE I, DASH NUMBER 3110, 4110: Delete "5100" and substitute "5110"

Pages 141.6 through 141.9, TABLE II, TYPE DESIGNATION: Delete second "-" and substitute "D". (for example, CWR0-BD185--)

Page 141.11, TABLE II, TYPE DESIGNATION CWR06D-467--, DISSIPATION FACTOR (MAX): Delete "20" and "24" and substitute "10" and "12".

Page 141.11, TABLE II, TYPE DESIGNATION CWR06H-106--, DC LEAKAGE (MAX): Delete "10" and "12" and substitute "20" and "24".

Page 141.11, TABLE II, TYPE DESIGNATION CWR06H-226-- and CWR06H-336--, DISSIPATION FACTOR (MAX) +85°C: Delete "10" and substitute "8".

Page 141.12, TABLE II, TYPE DESIGNATION: Delete "CWR06M-155--" and substitute "CWR06M-105--".

Page 141.12, TABLE II, TYPE DESIGNATION CWR06M-105--", CAPACITANCE NOMINAL: Delete "1.50" and substitute "1.00".

Page 141.12, TABLE II, TYPE DESIGNATION CWR06M-105--, CASE SIZE: Delete "E" and substitute "D".

Page 141.12, AFTER TYPE DESIGNATION CWR06M-105-- LINE: Add "CWR06M-155--", "35", "1.5", "1.0", "10", "12", "6", "8", "8", and "E".

Page 142.4, TABLE IV, STYLE CDR03, TYPE DESIGNATION: Delete "CDR03BX103BK--" and RATED TEMP "BX" and substitute "CDR03BP103BK--" and "BP".

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

Page 142.8, TABLE V, TYPE DESIGNATION CDR1-B-120A---, CAPACITANCE: Delete "11.0" and substitute "12.0"

Page 142.11, TABLE V, Type Designation CDR1-B-910E--- and CDR1-B101E---, RATED VOLTAGE: Delete "300" and substitute "500".

Page 211.3, TABLE I, TYPE DESIGNATION CV21A200: Delete "4.5", "A", "-4.5", "+2.0" "+2.0" substitute "5.0", "B", "-1.0", "±3.5", "+0.5".

Page 212.3, TABLE I, TYPE DESIGNATION PC41Q1R8 and PC41Q9R5, CAPACITANCE RANGE MIN: Delete ".2" and substitute ".6".

3. RETAIN THIS NOTICE AND INSERT BEFORE TABLE OF CONTENTS.

4. HOLDERS OF MIL-STD-242G(NAVY), PART 4, WILL VERIFY THAT PAGE CHANGES AND ADDITIONS INDICATED ABOVE HAVE BEEN ENTERED. THIS NOTICE PAGE WILL BE RETAINED AS A CHECK SHEET. THIS ISSUANCE, TOGETHER WITH APPENDED PAGES, IS A SEPARATE PUBLICATION. EACH NOTICE IS TO BE RETAINED BY STOCKING POINTS UNTIL THE MILITARY STANDARD IS COMPLETELY REVISED OR CANCELLED.

Review activities:
Navy - AS, OS, SH

User activity:
Navy - MC

Preparing activity
Navy - EC

(Project Number 59GP-N046)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

TABLE I. STYLE CU81 CHARACTERISTICS AND DASH NUMBERS(CONT).


CAPACITANCE	RATED VOLTAGE 85°C	SURGE VOLTAGE 85°C	ESR	MAXIMUM IMPEDANCE AT -55°C AND 120 Hz	LEAKAGE 25°C	LEAKAGE 105°C	RMS AC RIPPLE CURRENT 120 Hz @ 85°C			CASE SIZE	DASH NUMBER M39018/05- CAP TOL -10+30
uF	V dc	V dc	OHM	OHM	uA		AMPS				
2200	10.0	15	0.0880	0.0400	0.5	5.0	2.7	3.2	3.7	AA	0009
5600	10.0	15	0.0320	0.0140	0.5	5.0	5.3	6.4	7.5	AC	0010
33000	10.0	15	0.0030	0.0015	1.0	10.0	26.4	33.0	34.7	DC	0011
56000	10.0	15	0.0025	0.0010	1.0	10.0	32.0	40.0	42.0	DF	0012
1800	15.0	20	0.1420	0.0710	.8	8.0	2.0	2.4	2.8	AA	0013
4700	15.0	20	0.0420	0.0250	.8	8.0	4.0	4.7	5.4	AC	0014
27000	15.0	20	0.0110	0.0070	1.6	15.0	13.6	17.0	18.7	DC	0015
39000	15.0	20	0.0055	0.0040	1.6	15.0	21.6	27.0	29.7	DF	0016
1200	20.0	30	0.2000	0.0070	1.0	10.0	1.7	2.0	2.3	AA	0017
3300	20.0	30	0.0600	0.0270	1.0	10.0	3.7	4.3	5.0	AC	0018
18000	20.0	30	0.0120	0.0070	2.0	15.0	12.0	16.0	17.6	DC	0019
27000	20.0	30	0.0060	0.0040	2.0	15.0	19.5	26.0	28.6	DF	0020
1000	25.0	40	0.2400	0.1100	1.3	12.5	1.5	1.9	2.2	AA	0021
2700	25.0	40	0.0700	0.0320	1.3	12.5	3.6	4.2	4.8	AC	0022
15000	25.0	40	0.0130	0.0100	2.5	15.0	12.0	16.0	17.6	DC	0023
22000	25.0	40	0.0070	0.0050	2.5	15.0	18.0	24.0	26.4	DF	0024
820	30.0	45	0.2500	0.1100	1.5	15.0	1.5	1.9	2.2	AA	0025
2200	30.0	45	0.0820	0.0370	1.5	15.0	3.3	3.8	4.4	AC	0026
12000	30.0	45	0.0140	0.0100	3.0	15.0	10.5	15.0	16.5	DC	0027
18000	30.0	45	0.0090	0.0050	3.0	15.0	14.7	21.1	23.1	DF	0028
560	40.0	55	0.2800	0.1200	2.0	15.0	1.4	1.8	2.2	AA	0029
1500	40.0	55	0.1200	0.0420	2.0	15.0	2.9	3.5	4.1	AC	0030
8200	40.0	55	0.0150	0.0100	4.0	15.0	10.5	15.0	18.0	DC	0031
12000	40.0	55	0.0100	0.0060	4.0	15.0	14.8	20.0	24.0	DF	0032
470	50.0	60	0.3000	0.1400	2.5	15.0	1.3	1.6	1.9	AA	0033
1000	50.0	60	0.1800	0.0470	2.5	15.0	2.6	3.2	3.8	AC	0034
6800	50.0	60	0.0180	0.0100	5.0	15.0	9.1	13.0	16.9	DC	0035
10000	50.0	60	0.0120	0.0060	5.0	15.0	12.6	18.0	23.4	DF	0036

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE

MIL-C-39018/06

STYLE CUR91

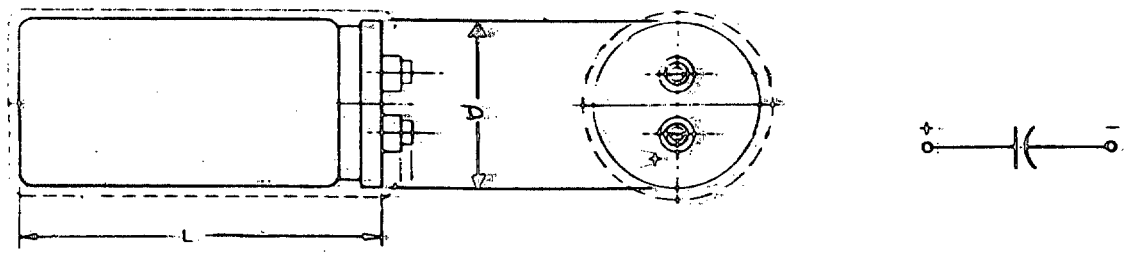

CASE SIZE	BARE CASE DIMENSIONS		CASE SIZE	BARE CASE DIMENSIONS	
	D	L		D	L
AA	1.375	2.125	BF	2.000	5.625
AB	1.375	3.125	CB	2.500	3.125
AC	1.375	4.125	CC	2.500	4.125
AD	1.375	4.625	CD	2.500	4.625
AE	1.375	5.125	CE	2.500	5.125
AF	1.375	5.625	CF	2.500	5.625
BB	2.000	3.125	DC	3.000	4.125
BC	2.000	4.125	DD	3.000	4.625
BD	2.000	4.625	DE	3.000	5.125
BE	2.000	5.125	DF	3.000	5.625

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS.

CAPACITANCE NOMINAL	RATED VOLTAGE @ 105°C	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX)		MAX AC RIPPLE CURRENT 120 Hz @ 85 C	CASE SIZE	DASH NUMBER M39018/06- CAP TOL -10 +50
					25°C	105°C			
µF	V dc	V dc	OHMS	OHMS	mA		AMPS		
8000	5	7	.045	1.280	.30	2.70	6.0	AA	0001-
17000	5	7	.029	.610	.44	3.96	8.0	AB	0002-
25000	5	7	.023	.410	.53	4.77	9.2	AC	0003-
29000	5	7	.018	.360	.57	5.13	10.4	AD	0004-
34000	5	7	.015	.310	.62	5.58	11.6	AE	0005-
37000	5	7	.013	.280	.65	5.85	12.2	AF	0006-
40000	5	7	.019	.280	.67	6.03	12.6	BB	0007-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE
MIL-C-39018/06
STYLE CUR91

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS (CONTINUED).

CAPACITANCE NOMINAL	RATED VOLTAGE @ 105°C	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX)		MAX AC RIPPLE CURRENT 120 Hz @ 85 C	CASE SIZE	DASH NUMBER M39018/06- CAP TOL -10 +50
					25°C	105°C			
µF	V dc	V dc	OHMS	OHMS	mA		AMPS		
60000	5	7	.014	.190	.82	7.38	15.1	BC	0008-
67000	5	7	.017	.170	.87	7.83	16.3	CB	0009-
70000	5	7	.012	.160	.89	8.01	16.3	BD	0010-
80000	5	7	.012	.140	.95	8.55	16.6	BE	0011-
90000	5	7	.010	.130	1.00	9.00	16.9	BF	0012-
100000	5	7	.010	.120	1.06	9.54	19.1	CC	0013-
110000	5	7	.010	.110	1.11	9.99	21.5	CD	0014-
130000	5	7	.009	.100	1.21	10.90	23.0	CE	0015-
150000	5	7	.008	.091	1.30	11.70	23.8	CF	0016-
150000	5	7	.010	.091	1.30	11.70	24.1	DC	0017-
170000	5	7	.010	.091	1.38	12.40	24.7	DD	0018-
200000	5	7	.009	.084	1.50	13.50	26.6	DE	0019-
220000	5	7	.008	.084	1.57	14.10	26.8	DF	0020-
5000	10	15	.045	.840	.34	3.06	6.0	AA	0021-
10000	10	15	.028	.420	.47	4.23	8.2	AB	0022-
15000	10	15	.022	.280	.58	5.22	9.4	AC	0023-
17000	10	15	.018	.250	.62	5.58	10.4	AD	0024-
20000	10	15	.015	.210	.67	6.03	11.4	AE	0025-
22000	10	15	.015	.190	.70	6.30	12.2	AF	0026-
24000	10	15	.020	.180	.73	6.57	12.2	BB	0027-
37000	10	15	.016	.120	.91	8.21	14.6	BC	0028-
42000	10	15	.016	.110	.97	8.75	16.0	CB	0029-
43000	10	15	.013	.100	.98	8.85	15.4	BD	0030-
48000	10	15	.012	.093	1.04	9.35	16.3	BE	0031-
55000	10	15	.011	.081	1.11	9.99	16.8	BF	0032-
64000	10	15	.011	.069	1.20	10.80	19.0	CC	0033-
75000	10	15	.010	.060	1.30	11.70	21.5	CD	0034-
86000	10	15	.009	.054	1.39	12.50	22.2	CE	0035-
94000	10	15	.014	.051	1.45	13.10	20.0	DC	0036-
96000	10	15	.010	.051	1.47	13.20	23.0	CF	0037-
110000	10	15	.010	.048	1.57	14.10	22.7	DD	0038-
120000	10	15	.010	.045	1.64	14.80	23.4	DE	0039-
140000	10	15	.010	.042	1.77	16.00	24.2	DF	0040-
4000	15	20	.043	1.040	.37	3.31	6.5	AA	0041-
8000	15	20	.025	.520	.52	4.68	8.7	AB	0042-
12000	15	20	.024	.350	.64	5.73	9.0	AC	0043-
14000	15	20	.019	.300	.69	6.19	10.7	AD	0044-
16000	15	20	.017	.260	.74	6.61	12.0	AE	0045-
18000	15	20	.016	.230	.78	7.01	13.6	AF	0046-
20000	15	20	.018	.220	.82	7.39	13.0	BB	0047-
30000	15	20	.014	.140	1.00	9.05	15.2	BC	0048-

Supersedes 111.13 of 17 September 1981.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE
MIL-C-39018/06
STYLE CUR91

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS (CONTINUED).

CAPACITANCE NOMINAL	RATED VOLTAGE @ 105°C	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX)		MAX AC RIPPLE CURRENT 120 Hz @ 85°C	CASE SIZE	DASH NUMBER M39018/06- CAP TOL -10 +50
					25°C	105°C			
µF	V dc	V dc	OHMS	OHMS	mA		AMPS		
35000	15	20	.011	.120	1.09	9.78	17.1	BD	0049-
40000	15	20	.010	.110	1.16	10.50	18.2	BE	0050-
42000	15	20	.012	.110	1.19	10.70	18.2	CB	0051-
45000	15	20	.010	.096	1.23	11.10	19.5	BF	0052-
51000	15	20	.010	.087	1.31	11.80	20.7	CC	0053-
59000	15	20	.010	.075	1.41	12.70	21.8	CD	0054-
68000	15	20	.009	.066	1.51	13.60	23.1	CE	0055-
76000	15	20	.008	.060	1.60	14.40	24.5	CF	0056-
76000	15	20	.010	.060	1.60	14.40	23.1	DC	0057-
89000	15	20	.009	.054	1.73	15.60	25.7	DD	0058-
100000	15	20	.009	.051	1.84	16.50	26.6	DE	0059-
110000	15	20	.008	.048	1.93	17.30	27.5	DF	0060-
2800	20	30	.044	1.470	.35	3.19	6.1	AA	0061-
5100	20	30	.026	.810	.48	4.31	8.5	AB	0062-
8600	20	30	.020	.480	.62	5.60	9.9	AC	0063-
10000	20	30	.041	.410	.67	6.04	11.0	AD	0064-
11000	20	30	.017	.370	.70	6.33	11.7	AE	0065-
13000	20	30	.016	.320	.76	6.88	12.0	AF	0066-
20000	20	30	.013	.210	.95	8.54	15.4	BC	0067-
23000	20	30	.013	.180	1.02	9.16	15.8	BD	0068-
24000	20	30	.016	.170	1.04	9.35	16.0	CB	0069-
26000	20	30	.012	.160	1.08	9.73	16.5	BE	0070-
30000	20	30	.012	.140	1.16	10.50	17.2	BF	0071-
37000	20	30	.012	.110	1.29	11.60	18.8	CC	0072-
43000	20	30	.011	.100	1.39	12.50	19.9	CD	0073-
47000	20	30	.010	.090	1.45	13.10	21.2	CE	0074-
54000	20	30	.012	.081	1.56	14.00	22.0	DC	0075-
55000	20	30	.009	.078	1.57	14.20	22.6	CF	0076-
63000	20	30	.009	.069	1.68	15.20	24.5	DD	0077-
73000	20	30	.009	.063	1.81	16.30	25.9	DE	0078-
82000	20	30	.008	.057	1.92	17.30	26.5	DF	0079-
2500	25	40	.050	1.640	.38	3.38	5.7	AA	0080-
5500	25	40	.031	.750	.56	5.00	7.7	AB	0081-
7500	25	40	.021	.550	.65	5.85	9.6	AC	0082-
8700	25	40	.020	.470	.70	6.30	10.0	AD	0083-
10000	25	40	.019	.410	.75	6.75	11.0	AE	0084-
11000	25	40	.018	.370	.79	7.08	12.0	AF	0085-
17000	25	40	.025	.250	.98	8.80	14.5	BC	0086-
20000	25	40	.012	.210	1.06	9.54	16.1	BD	0087-
20000	25	40	.011	.210	1.06	9.54	16.8	CB	0088-
23000	25	40	.011	.018	1.14	10.20	16.8	BE	0089-

Supersedes Page 111.14 of 17 September 1981.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE
MIL-C-39018/06
STYLE CUR91

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS (CONTINUED).

CAPACITANCE NOMINAL	RATED VOLTAGE @ 105°C	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX)		MAX AC RIPPLE CURRENT 120 Hz @ 85°C	CASE SIZE	DASH NUMBER M39018/06- CAP TOL -10 +50
					25°C	105°C			
µF	V dc	V dc	OHMS	OHMS	mA		AMPS		
25000	25	40	.011	.017	1.19	10.70	17.4	BF	0090-
30000	25	40	.011	.014	1.30	11.70	19.6	CC	0091-
35000	25	40	.010	.012	1.40	12.60	20.7	CD	0092-
40000	25	40	.009	.011	1.50	13.50	22.1	CE	0093-
44000	25	40	.015	.100	1.57	14.20	19.4	DC	0094-
45000	25	40	.009	.093	1.59	14.30	23.2	CF	0095-
52000	25	40	.009	.081	1.71	15.40	25.5	DD	0096-
60000	25	40	.009	.072	1.84	16.50	26.5	DE	0097-
67000	25	40	.008	.066	1.94	17.50	27.5	DF	0098-
2200	30	45	.054	1.860	.39	3.47	5.5	AA	0099-
4400	30	45	.033	.930	.54	4.90	7.5	AB	0100-
6600	30	45	.025	.620	.67	6.00	8.8	AC	0101-
7700	30	45	.020	.530	.72	6.49	9.7	AD	0102-
8800	30	45	.019	.470	.77	6.94	11.5	AE	0103-
9900	30	45	.017	.410	.82	7.36	11.7	AF	0104-
10000	30	45	.020	.410	.82	7.39	12.0	BB	0105-
15000	30	45	.015	.280	1.00	9.06	14.3	BC	0106-
17000	30	45	.014	.240	1.07	9.64	15.1	BD	0107-
18000	30	45	.016	.230	1.10	9.92	15.8	CB	0108-
20000	30	45	.012	.210	1.16	10.50	15.9	BE	0109-
22000	30	45	.012	.190	1.22	11.00	17.0	BF	0110-
26000	30	45	.012	.160	1.32	11.90	18.6	CC	0111-
30000	30	45	.010	.140	1.42	12.80	20.3	CD	0112-
34000	30	45	.010	.120	1.51	13.60	21.0	CF	0113-
38000	30	45	.015	.110	1.60	14.40	19.2	DC	0114-
39000	30	45	.010	.110	1.62	14.60	21.8	CF	0115-
45000	30	45	.010	.093	1.74	15.70	23.3	DD	0116-
52000	30	45	.009	.081	1.87	16.90	25.3	DE	0117-
58000	30	45	.008	.075	1.98	17.80	27.0	DF	0118-
1800	40	55	.065	2.280	.40	3.62	5.0	AA	0119-
3700	40	55	.038	1.110	.58	5.19	8.0	AB	0120-
5500	40	55	.033	.750	.70	6.33	9.2	AC	0121-
6400	40	55	.023	.640	.76	6.83	10.7	AD	0122-
7400	40	55	.020	.560	.82	7.34	11.6	AE	0123-
8200	40	55	.018	.500	.86	7.73	12.4	AF	0124-
9000	40	55	.019	.460	.90	8.10	12.4	BB	0125-
13000	40	55	.016	.320	1.08	9.73	14.7	BC	0126-
15000	40	55	.014	.280	1.16	10.50	16.0	BD	0127-
15000	40	55	.014	.280	1.16	10.50	16.8	CB	0128-
18000	40	55	.013	.230	1.27	11.50	17.9	BE	0129-
19000	40	55	.011	.220	1.31	11.80	18.1	BF	0130-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE
MIL-C-39018/06
STYLE CUR91

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS (CONTINUED).

CAPACITANCE NOMINAL	RATED VOLTAGE @ 105°C	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX)		MAX AC RIPPLE CURRENT 120 Hz @ 85 C	CASE SIZE	DASH NUMBER M39018/06- CAP TOL -10 +50
					25°C	105°C			
µF	V dc	V dc	OHMS	OHMS	mA		AMPS		
22000	40	55	.011	.190	1.41	12.70	19.6	CC	0131-
25000	40	55	.010	.170	1.50	13.50	21.0	CD	0132-
28000	40	55	.009	.150	1.59	14.30	22.3	CE	0133-
32000	40	55	.009	.130	1.70	15.30	22.2	DC	0134-
33000	40	55	.010	.130	1.72	15.50	23.1	CF	0135-
37000	40	55	.010	.110	1.82	16.40	24.2	DD	0136-
43000	40	55	.009	.100	1.97	17.70	25.5	DE	0137-
48000	40	55	.008	.090	2.08	18.70	27.1	DF	0138-
1400	50	75	.077	1.940	.40	3.57	4.6	AA	0139-
2900	50	75	.037	.940	.57	5.14	7.7	AB	0140-
4400	50	75	.027	.640	.70	6.33	8.8	AC	0141-
5100	50	75	.024	.530	.76	6.82	9.9	AD	0142-
5800	50	75	.021	.470	.81	7.27	10.9	AE	0143-
6600	50	75	.020	.410	.86	7.76	11.5	AF	0144-
9000	50	75	.018	.300	1.00	9.05	13.0	BC	0145-
11000	50	75	.017	.250	1.11	10.00	15.2	BD	0146-
12000	50	75	.016	.230	1.16	10.50	16.4	CB	0147-
13000	50	75	.014	.210	1.21	10.90	16.1	BE	0148-
15000	50	75	.012	.180	1.30	11.70	16.8	BF	0149-
17000	50	75	.012	.160	1.38	12.40	19.1	CC	0150-
20000	50	75	.010	.140	1.50	13.50	20.4	CD	0151-
22000	50	75	.009	.120	1.57	14.20	21.6	CE	0152-
25000	50	75	.009	.110	1.68	15.10	22.4	CF	0153-
25000	50	75	.013	.110	1.68	15.10	20.7	DC	0154-
30000	50	75	.011	.100	1.84	16.50	22.5	DD	0155-
34000	50	75	.010	.082	1.96	17.60	24.0	DE	0156-
39000	50	75	.009	.072	2.09	18.90	26.4	DF	0157-
820	75	100	.128	3.280	.30	2.69	4.0	AA	0158-
1600	75	100	.068	1.680	.41	3.70	6.6	AB	0159-
2300	75	100	.048	1.170	.52	4.68	7.7	AC	0160-
2600	75	100	.044	1.030	.55	4.96	8.6	AD	0161-
3000	75	100	.039	.900	.58	5.23	9.3	AE	0162-
3300	75	100	.035	.810	.64	5.73	10.3	AF	0163-
3700	75	100	.033	.730	.66	5.96	10.0	BB	0164-
5400	75	100	.021	.500	.81	7.30	12.9	BC	0165-
5700	75	100	.021	.480	.86	7.76	13.9	CB	0166-
6200	75	100	.020	.440	.87	7.84	13.4	BD	0167-
7100	75	100	.018	.380	.92	8.27	14.2	BE	0168-
7900	75	100	.017	.300	.99	8.90	15.1	BF	0169-
8500	75	100	.015	.320	1.06	9.50	16.7	CC	0170-
10000	75	100	.013	.270	1.14	10.30	18.6	CD	0171-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLYTIC, ALUMINUM OXIDE
MIL-C-39018/06
STYLE CUR91

TABLE I. STYLE CUR91 CHARACTERISTICS AND DASH NUMBERS (CONTINUED).

CAPACI-TANCE NOMINAL	RATED VOLTAGE @ 105°C	SURGE VOLTAGE @ 105°C	ESR (MAX)	IMPEDANCE (MAX) @ -55°C (120 Hz)	LEAKAGE (MAX)		MAX AC RIPPLE CURRENT 120 Hz @ 85 C	CASE SIZE	DASH NUMBER M39018/06- CAP TOL -10 +50
					25°C	105°C			
µF	V dc	V dc	OHMS	OHMS	mA		AMPS		
11000	75	100	.011	.250	1.22	11.00	19.8	CE	0172-
13000	75	100	.010	.210	1.29	11.60	20.6	CF	0173-
13000	75	100	.015	.210	1.27	11.40	19.4	DC	0174-
15000	75	100	.013	.180	1.36	12.30	20.7	DD	0175-
17000	75	100	.012	.160	1.48	13.30	22.1	DE	0176-
19000	75	100	.010	.140	1.54	13.80	23.7	DF	0177-
410	100	150	.200	6.580	.24	2.13	3.5	AA	0178-
810	100	150	.105	3.330	.34	3.02	4.8	AB	0179-
1200	100	150	.074	2.250	.42	3.82	6.3	AC	0180-
1400	100	150	.065	1.930	.45	4.05	7.3	AD	0181-
1500	100	150	.058	1.790	.47	4.27	7.8	AF	0182-
1700	100	150	.053	1.590	.50	4.48	8.2	AF	0183-
1900	100	150	.048	1.420	.52	4.68	9.0	BB	0184-
2800	100	150	.033	.970	.64	5.73	10.8	BC	0185-
2900	100	150	.045	.740	.69	6.19	9.8	CB	0186-
3200	100	150	.029	.840	.69	6.19	12.0	BD	0187-
3600	100	150	.026	.760	.73	6.61	13.0	BE	0188-
4100	100	150	.023	.660	.76	6.88	13.8	BF	0189-
4400	100	150	.025	.620	.84	7.52	13.4	CC	0190-
5100	100	150	.022	.530	.90	8.10	14.0	CD	0191-
5900	100	150	.020	.460	.96	8.64	15.5	CE	0192-
6500	100	150	.018	.420	1.02	9.16	17.6	DC	0193-
6600	100	150	.017	.410	1.00	9.06	16.5	CF	0194-
7600	100	150	.017	.360	1.11	10.00	18.2	DD	0195-
8700	100	150	.016	.310	1.16	10.50	18.9	DE	0196-
9500	100	150	.029	.290	1.23	11.10	19.6	DF	0197-


Supersedes Page 111.17 of 17 September 1981.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, ELECTROLTIC, ALUMINUM OXIDE

MIL-C-39018/07

STYLE CUR19

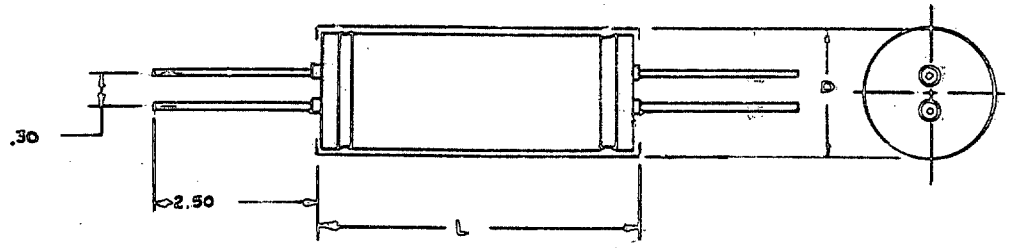



CIRCUIT DIAGRAM

CASE SIZE	INSULATED DIMENSIONS INCHES L MIN	L MAX	D MAX
H 1	1.625	1.843	.785
H 2	2.125	2.343	.785
H 3	2.625	2.843	.785
H 4	3.125	3.343	.785
H 5	3.625	3.843	.785
J 1	1.625	1.843	.910
J 2	2.125	2.243	.910
J 3	2.625	2.843	.910

CASE SIZE	INSULATED DIMENSIONS INCHES L MIN	L MAX	D MAX
J 4	3.125	3.343	.910
J 5	3.625	3.843	.910
K 1	1.625	1.843	1.035
K 2	2.125	2.343	1.035
K 3	2.625	2.843	1.035
K 4	3.125	3.343	1.035
K 5	3.625	3.843	1.035

TABLE I. STYLE CUR19 CHARACTERISTICS AND DASH NUMBERS.

RATED VOLTAGE @ 105°C	CAPACITANCE NOMINAL	SURGE VOLTAGE @ 105°C	ESR (MAX) 25°C	IMPEDANCE (MAX) @ 25°C 10KHz-1MHz	LEAKAGE (MAX) 25°C	LEAKAGE (MAX) 85°C 105°C	MAX AC RIPPLE CURRENT 10°C RISE 10KHz-1MHz	CASE SIZE	DASH NUMBER M39018/07- CAP TOL -10+75 LOW FREQ	DASH NUMBER M39018/07- CAP TOL -10+75 HIGH FREQ
V dc	uF	V dc	OHMS	OHMS	mA		AMPS			
2400	5	7	.146	.110	55	330	1.50	H 1	0001-	0201-
3300	5	7	.106	.080	64	390	1.80	H 2	0002-	0202-
3700	5	7	.095	.071	68	410	1.90	J 1	0003-	0203-
4400	5	7	.080	.060	74	440	2.50	H 3	0004-	0204-
5000	5	7	.070	.053	80	480	2.50	J 2	0005-	0205-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/17

STYLE CKR82(STANDOFF)

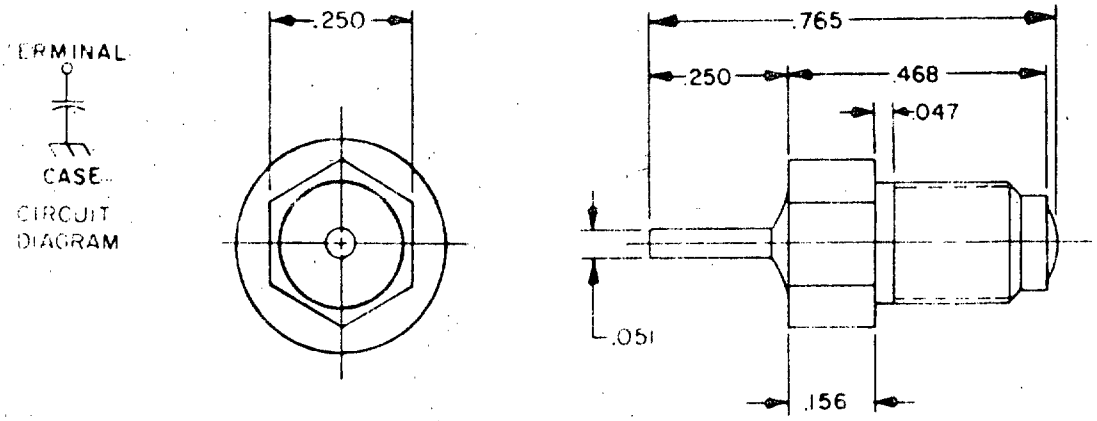



TABLE I. STYLE CKR82, CHARACTERISTICS AND DASH NUMBERS.


CAPACITANCE	CAPACITANCE TOLERANCE	DASH NUMBER M39014/17		CAPACITANMCE	CAPACITANCE TOLERANCE	DASH NUMBER M39014/17-
pF	± PERCENT			pF	± PERCENT	
500 VOLTS dc				500 VOLTS dc		
10	10	0051		120	10	0071
10	20	0052		150	10	0072
12	10	0053		150	20	0073
15	10	0054		180	10	0074
15	20	0055		220	10	0075
18	10	0056		220	20	0076
22	10	0057		270	10	0077
22	20	0058		330	10	0078
27	10	0059		330	20	0079
33	10	0060		390	10	0080
33	20	0061		470	10	0081
39	10	0062		470	20	0082
47	10	0063		560	10	0083
47	20	0064		680	10	0084
56	10	0065		680	20	0085
68	10	0066		820	10	0086
68	20	0067		1000	+80 -20	0087
82	10	0068		1200	+80 -20	0088
100	10	0069		1500	+80 -20	0089
100	20	0070				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, CERAMIC DIELECTRIC

MIL-C-39014/18
STYLE CKR76 (FEEDTHROUGH)

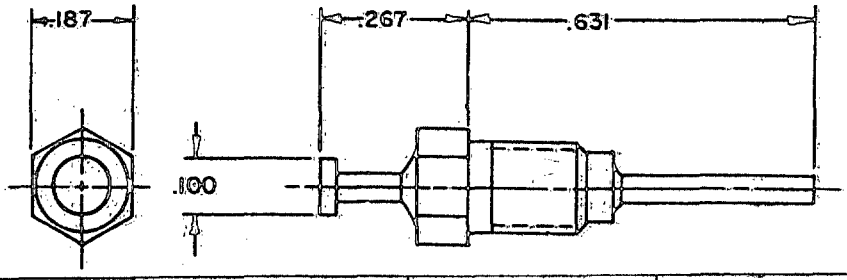





CIRCUIT DIAGRAM

CAPACITANCE pF	CAPACITANCE TOLERANCE PERCENT	RATED VOLTAGE VOLTS	DASH NUMBER M39014/18-	
			M (1.0%)	P (.1%)
10	+80,-20	200	0321	0341
22	+80,-20	200	0322	0342
47	+80,-20	200	0323	0343
100	+80,-20	200	0324	0344
220	+80,-20	200	0325	0345
470	+80,-20	200	0326	0346
1000	+80,-20	200	0327	0347
1500	+80,-20	200	0328	0348

MIL-C-39014/19
STYLE CKR83 (STANDOFF)

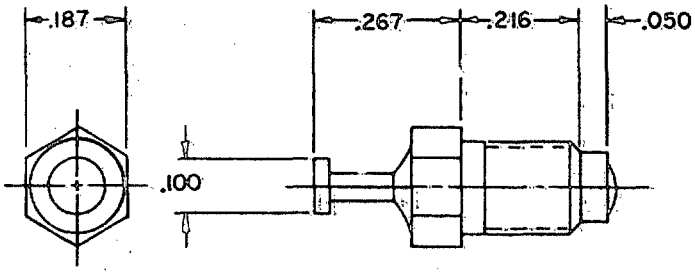



CIRCUIT DIAGRAM

CAPACITANCE pF	CAPACITANCE TOLERANCE PERCENT	RATED VOLTAGE VOLTS	DASH NUMBER M39014/19-	
			M (1.0%)	P (.1%)
10	+80,-20	200	0321	0341
22	+80,-20	200	0322	0342
47	+80,-20	200	0323	0343
100	+80,-20	200	0324	0344
220	+80,-20	200	0325	0345
470	+80,-20	200	0326	0346
1000	+80,-20	200	0327	0347
1500	+80,-20	200	0328	0348

Supersedes Page 121.20 of 17 September 1981.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE, CERAMIC DIELECTRIC

MIL-C-81


SCOPE: VARIABLE, CERAMIC DIELECTRIC CAPACITORS, PER MIL-C-81 ARE SMALL-SIZED TRIMMER CAPACCITORS DESIGNED FOR USE WHERE FINE TUNING ADJUSTMENTS ARE PERIODICALLY REQUIRED DURING THE LIFE OF THE EQUIPMENT. CAPACITANCE AND ADJUSTMENT ARE RELATIVELY LINEAR.

TEMP RANGE: -55°C TO +85°C

SHOCK: 100 G, SAWTOOTH, (MIL-STD-202, METHOD 213)

VIBRATION: 15 G, 10-2000 Hz, (MIL-STD-202, METHOD 204)

TYPE DESIGNATION:

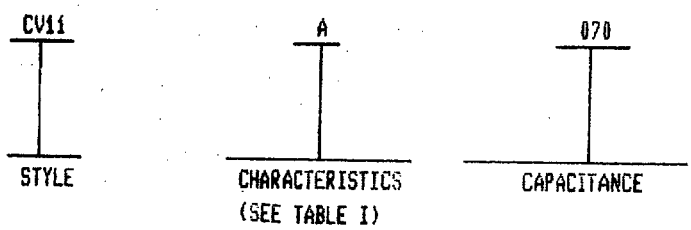

MAXIMUM CAPACITANCE VALUE EXPRESSED IN PICOFARADS(pF) IS IDENTIFIED BY A THREE DIGIT NUMBER. THE FIRST TWO DIGITS REPRESENT SIGNIFICANT FIGURES AND THE LAST DIGIT SPECIFIES THE NUMBER OF ZEROS TO FOLLOW.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE, CERAMIC DIELECTRIC

MIL-C-81/01

STYLE CV11

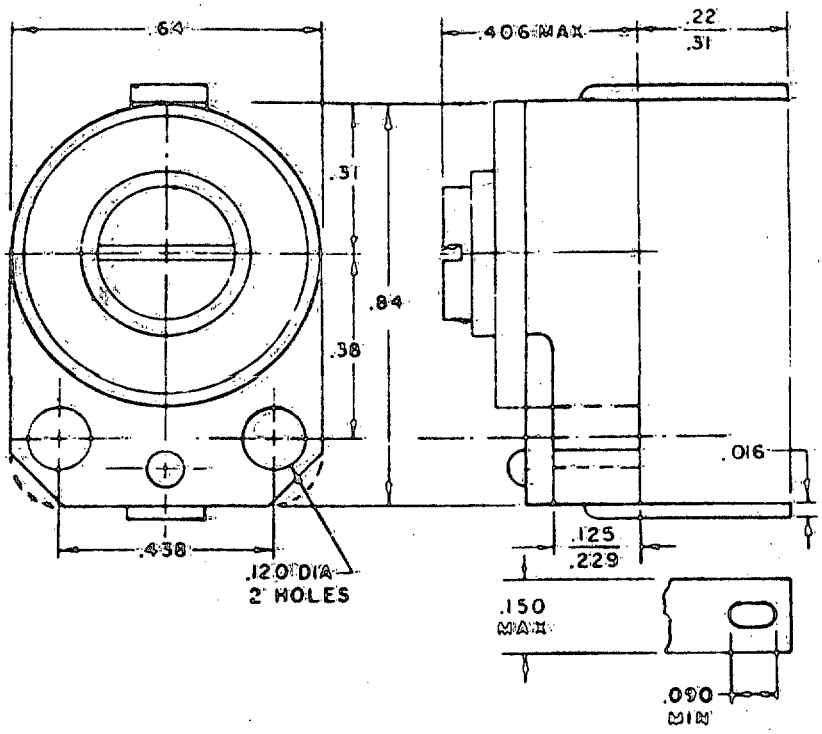


TABLE I. TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE pF		RATED VOLTAGE V dc	SYMBOL	CHARACTERISTICS CAPACITANCE CHANGE FROM VALUE AT 25°C			
					AT -55°C		AT +85°C	
	MIN	MAX			MIN %	MAX %	MIN %	MAX %
CV11A070	1.5	7.0	500	A	-4.5	+2.0	-2.5	+2.0
CV11A120	3.0	12.0	500	A	-4.5	+2.0	-2.5	+2.0
CV11A250	4.5	25.0	500	A	-4.5	+2.0	-2.5	+2.0
CV11B130	3.0	13.0	500	B	-1.0	+3.5	-2.5	+0.5
CV11B200	5.0	20.0	500	B	-1.0	+3.5	-2.5	+0.5
CV11C300	4.0	30.0	500	C	-1.0	+6.5	-4.0	-1.0
CV11C450	7.0	45.0	500	C	-1.0	+6.5	-4.0	-1.0
CV11D060	2.0	6.0	500	D	-1.5	+7.0	-5.0	-1.5
CV11D300	4.0	30.0	500	D	-1.5	+7.0	-5.0	-1.5
CV11D450	7.0	45.0	500	D	-1.5	+7.0	-5.0	-1.5

Supersedes Page 211.2 of 17 September 1981.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER)

MIL-C-14409/09

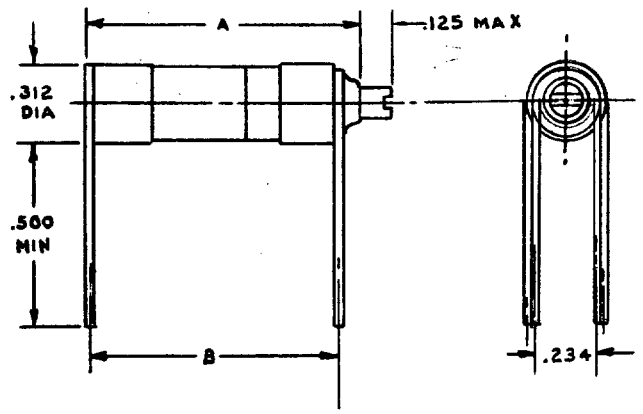


TABLE I. STYLE PC43 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE RANGE		DIMENSIONS		Q	TEMP COEFF PART/ MILLION/°C	DIELECTRIC MATERIAL
	MIN pF	MAX pF	B	A			
			1000 VOLTS dc				
PC43G160	1.0	16.0	.688	.734	750	+150	GLASS
PC43G360	1.0	36.0	.922	.969	550	+150	GLASS
PC43G520	1.0	52.0	1.141	1.188	350	+150	GLASS
PC43G750	1.0	75.0	1.375	1.422	250	+150	GLASS
PC43G121	1.0	120.0	1.984	2.031	250	+150	GLASS
PC43J121	1.0	120.0	1.984	2.031	250	+ 50	GLASS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER)

MIL-C-14409/12

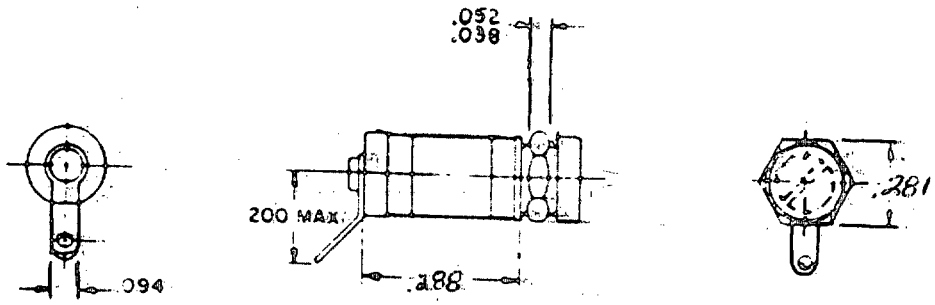


TABLE I. STYLE PC25 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE		Q	DIELECTRIC
	MIN pF	MAX pF		
250 VOLTS dc				
PC25J100	0.8	10.0	5000	AIR

CAPACITORS, VARIABLE (PISTON TYPE, TUBULAR TRIMMER)

MIL-C-14409/13

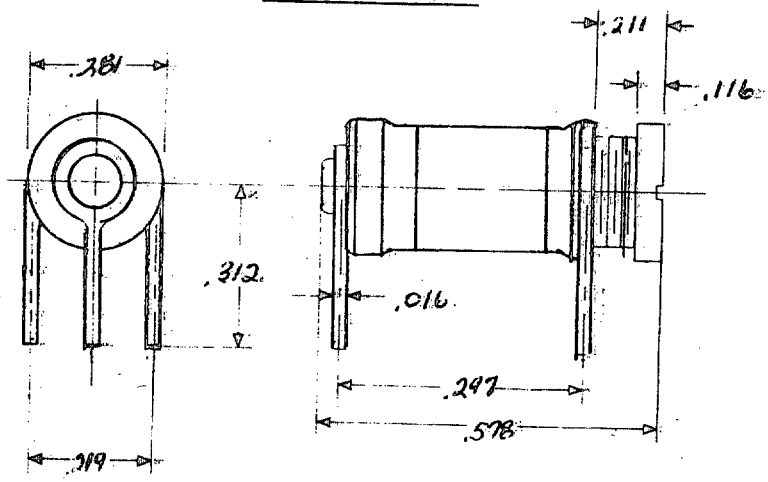


TABLE I. STYLE PC26 TYPE DESIGNATION AND CHARACTERISTICS.

TYPE DESIGNATION	CAPACITANCE		Q	DIELECTRIC
	MIN pF	MAX pF		
250 VOLTS dc				
PC26J100	0.8	10.0	5000	AIR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-242G	PT.4 NOT.1

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.