MIL-STD-242G (NAVY) PART 5
31 AUGUST 1981
SUPERSEDING
MIL-STD-242F (NAVY), PART III,
SECTION 300

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS SELECTED STANDARDS

MICROCIRCUITS AND SEMICONDUCTORS



FSC 59GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D. C. 20360

Electronic Equipment Parts, Selected Standards, Microcircuits and Semiconductors

MIL-STD-242G(NAVY)-PART 5

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to: Commander, Naval Electronic Systems Command, Attn: ELEX 81112, Department of the Navy, Washington, D.C. 20360.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS AND SEMICONDUCTORS

MIL-M-38510 AND MIL-S-19500

1. SCOPE.

1.1 SCOPE. THIS STANDARD ESTABLISHES THE REQUIREMENTS FOR THE SELECTION OF MICROCIRCUITS AND SEMICONDUCTORS USED IN THE DESIGN AND MANUFACTURE OF NAVY EQUIPMENT.

1.2 PURPOSE. THE PURPOSE OF THIS STANDARD IS TO CONTROL AND MINIMIZE THE VARIETY OF MICROCIRCUITS AND SEMICONDUCTORS IN NAVY EQUIPMENTS IN ORDER TO FACILITATE EFFECTIVE LOGISTIC SUPPORT, IMPROVE QUALITY AND REDUCE COST.

2. REFERENCED DOCUMENTS.

2.1 THE ISSUES OF THE FOLLOWING DOCUMENTS IN EFFECT ON THE DATE OF INVITATION FOR BIDS FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

SPECIFICATIONS

MILITARY

MIL-S-19500 - SEMICONDUCTOR DEVICES, GENERAL SPECIFICATION FOR

MIL-M-38510 - MICROCIRCUTS, GENERAL SPECIFICATION FOR

STANDARDS

MILITARY

MIL-STD-1313 - MICROELECTRONICS TERMS AND DEFINITIONS

3. DEFINITIONS

3.1 THE TERMS USED IN THIS STANDARD ARE DEFINED IN MIL-S-19500, MIL-M-38510 AND MIL-STD-1313.

4. GENERAL REQUIREMENTS

4.1 SELECTION OF DEVICES. MICROCIRCUITS AND SEMICONDUCTOR DEVICE TYPES SHALL BE SELECTED FROM THE TYPES LISTED IN THIS STANDARD. THE VARIETY OF TYPES USED IN ANY NAVY EQUIPMENT SHALL BE THE MINIMUM NECESSARY TO PROVIDE SATISFACTORY PERFORMANCE AND THE CONTRACTOR (HARDWARE DESIGNER/BUILDER) SHALL EXERCISE ALL REASONABLE DESIGN CHOICES TO ACHIEVE THIS OBJECTIVE.

4.2 CRITERIA FOR INCLUSION IN THIS STANDARD.

(a). THE DEVICE MUST SATISFY A WIDE RANGE OF DESIGN REQUIREMENTS.

(b). AT LEAST ONE MANUFACTURER IS QUALIFIED TO THE APPLICABLE DETAIL SPECIFICATION.

(c). THERE IS REASONABLE ASSURANCE THAT THE DEVICE WILL BE AVAILABLE FOR AT LEAST SEVEN YEARS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


4.3 SEMICONDUCTOR CASE OUTLINES. THE JEDEC CASE OUTLINE DRAWINGS ARE INCLUDED FOR REFERENCE ONLY AND ARE INTENDED AS AN AID IN SELECTING DEVICES. SOME DIMENSIONS ON THE OUTLINE DRAWING OF THE APPLICABLE DETAIL SPECIFICATION MAY DEVIATE FROM THE JEDEC OUTLINE. THE DETAIL SPECIFICATION SHALL BE USED FOR ALL FINAL DESIGN CRITERIA.

4.4 SEMICONDUCTOR RATINGS AND ELECTRICAL CHARACTERISTICS. THE RATINGS AND ELECTRICAL CHARACTERISTICS LISTED HEREIN ARE FOR REFERENCE ONLY AND ARE INTENDED AS AN AID IN SELECTING DEVICES. THE TEST CONDITIONS ON WHICH THESE RATINGS AND CHARACTERISTICS ARE BASED MAY VARY BETWEEN THE DETAIL SPECIFICATIONS. THE APPLICABLE DETAIL SPECIFICATION SHALL BE USED FOR ALL FINAL DESIGN CRITERIA.

4.5 CONFLICT OF DATA. IN THE EVENT OF CONFLICT BETWEEN THE TECHNICAL DESCRIPTION OF THE DEVICES IN THIS STANDARD AND THE APPLICABLE DETAIL SPECIFICATION, THE DETAIL SPECIFICATION SHALL GOVERN.

5. PART NUMBER

5.1 MICROCIRCUIT PART NUMBER. MICROCIRCUITS ARE NUMBERED AS DEFINED BY THE FOLLOWING EXAMPLE FOR PART NUMBER M38510/00101BAC.

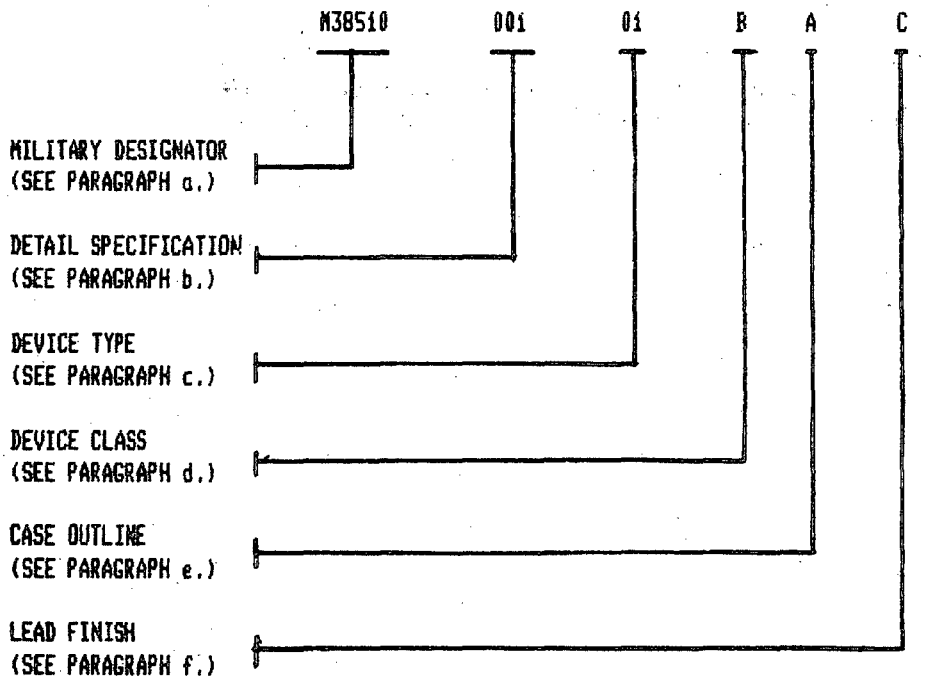

a. M38510 MILITARY DESIGNATOR FOR MICROCIRCUITS. THE MILITARY SPECIFICATION ITEM IS PRODUCED IN FULL COMPLIANCE WITH MIL-M-38510 AND THE REFERENCED MILITARY DETAIL SPECIFICATION.

b. DETAIL SPECIFICATION. THE DETAIL SPECIFICATION NUMBER CONSISTS OF THREE DIGITS FROM 001 TO 999, AS APPLICABLE.

c. DEVICE TYPE. THE DEVICE TYPE NUMBER IS SPECIFIED IN THE DETAIL SPECIFICATION. THE NUMBERS CONSIST OF TWO DIGITS ASSIGNED SEQUENTIALLY, FROM 01 TO 99, WITHIN EACH DETAIL SPECIFICATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

d. DEVICE CLASS. THE DEVICE CLASS IS DESIGNATED BY A SINGLE LETTER IDENTIFYING THE PRODUCT ASSURANCE LEVEL (B IS THE MINIMUM ACCEPTANCE LEVEL).

e. CASE OUTLINE. THE CASE OUTLINE IS DESIGNATED BY A SINGLE LETTER ASSIGNED TO EACH OUTLINE WITHIN EACH DETAIL SPECIFICATION.

f. LEAD FINISH. THE LEAD FINISH IS DESIGNATED BY A SINGLE LETTER AS FOLLOWS:

FINISH LETTER	LEAD FRAME MATERIAL AND FINISH
A	TYPES A OR B, WITH HOT SOLDER DIP
B	TYPES A OR B, WITH ACID TIN PLATE
C	TYPES A OR B, WITH GOLD PLATE
X	TYPES A OR B, WITH FINISHES A, B OR C

NOTES

1. THE LIST FOR MICROCIRCUITS DOES NOT SPECIFY THE FINAL TWO ELEMENTS OF THE PART NUMBER (PARAGRAPHS 5-1.e AND f.). ANY COMBINATION OF OUTLINE, AND LEAD FINISH IS APPROVED FOR USE. THE FINISH DESIGNATION "X" IS NOT MARKED ON THE MICROCIRCUIT OR ITS PACKAGING, BUT IS USED ONLY IN DRAWINGS, PARTS LISTS, PURCHASE ORDERS OR OTHER DOCUMENTS WHERE ANY OF THE LEAD FINISHES ARE CONSIDERED ACCEPTABLE AND INTERCHANGEABLE.

2. NO OUTLINE DRAWINGS ARE PROVIDED FOR THE MICROCIRCUITS BECAUSE THE PACKAGE CONFIGURATION IS INDICATED BY PART NUMBER. REFER TO THE DETAIL SPECIFICATION FOR COMPLETE CONFIGURATION INFORMATION.

Review activities:
Navy - AS, SH, OS

User activity:
Navy - MC

Preparing activity:
Navy - EC

(Project Number 59GP-N031-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE OF CONTENTS

SUBJECT/SECTION	PAGE
100 MICROCIRCUITS	
110 DIGITAL, TTL	110.1 THRU 110.3
111 DIGITAL, S-TTL	111
112 DIGITAL, LPS-TTL	112.1 THRU 112.3
113 DIGITAL, ECL	113
114 DIGITAL, CMOS	114
115 LINEAR	115.1 THRU 115.2
116 MEMORIES	116
117 MICROPROCESSORS	117
200 SEMICONDUCTORS, DIODES	
205 SEMICONDUCTOR OUTLINE DRAWINGS	205.1 THRU 205.29
210 VOLTAGE-VARIABLE CAPACITORS	210
211 GENERAL PURPOSE DIODES AND RECTIFIERS	211
212 VOLTAGE REFERENCE	212
213 VOLTAGE REGULATOR	213.1 THRU 213.4
214 CURRENT REGULATOR	214
215 SWITCHING AND FAST RECOVERY RECTIFIERS	215
216 TRANSIENT VOLTAGE SUPPRESSORS	216
217 LIGHT EMITTING	217
218 OPTICALLY COUPLED ISOLATORS	218
300 SEMICONDUCTORS, TRANSISTOR	
310 DARLINGTON	310
311 THYRISTOR(SILICON CONTROLLED RECTIFIER)	311
312 FIELD EFFECT	312
313 UNIJUNCTION	313
314 DUAL	314
315 HIGH FREQUENCY	315
316 NPN, LOW POWER(PC< 5 WATTS @ TA=25 C) GENERAL PURPOSE & SWITCH	316
317 PNP, LOW POWER(PC< 5 WATTS @ TA=25 C) GENERAL PURPOSE & SWITCH	317
318 NPN, POWER TRANSISTOR (PC) 5 WATTS)	318
319 PNP, POWER TRANSISTOR (PC) 5 WATTS)	319
320 CHOPPER	320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL,TTL MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
00601B--	ADDER	2-BIT, FULL	5482
00602B--		4-BIT, FULL	5483
00603B--		DUAL, FULL ADDER	9304
00604B--		GATED, FULL	5480
01101B--	ARITH.ELEMENT	ARITHMETIC LOGIC UNIT/FUNC GEN	54181,9341
01102B--		LOOKAHEAD CARRY GENERATOR	54182,9342
00301B--	BUFFER	NAND, DUAL, 4-INPUT	5440
00302B--		NAND, DUAL, 2-INPUT	5437
00303B--		NAND, QUAD, 2-INPUT	5438
15301B--		QUAD BUS, TS, W/COMMON ENABLE	54125
15302B--		QUAD BUS, TS	54126
16301B--		HEX, BUFFER TS W/COMMON ENABLE	54365
16303B--		HEX, BUFFER TS 4-BIT & 2-BIT	54367
00803B--	BUFFER/DRIVER	HEX, OC, 30V, 30MA	5407
00804B--		HEX, OC, 15V, 40MA	5417
15001B--	COMPARATOR	4-BIT	5485
15002B--		5-BIT	9324
01301B--	COUNTER	RIPPLE DIVIDE BY 12 (2 AND 6)	5492
01302B--		4-BIT, BINARY	5493
01303B--		SYNCHRONOUS,DECADE,PRESET INPUT,ASYN-CLR	54160
01304B--		DUAL SYN BINARY (UP)	54163
01305B--		SYN 4-BIT DECADE (ASYN-CLR)	54162
01306B--		SYN 4-BIT DECADE	54161
01307B--		DECADE COUNTER	5490
01308B--		SYN DECADE UP/DOWN PRESET INPUT (2 CLKS)	54192
01309B--		SYN BINARY UP/DOWN 4-BIT	54193
01001B--	DECODERS	BCD TO DECIMAL	5442
01002B--		EXCESS-3-TO DECIMAL	5443
01003B--		EXCESS-3-GRAY TO DECIMAL-SELECTOR	5444
01004B--		BCD TO DECIMAL, W/DRIVER	5445
01005B--		BCD-TO-DECIMAL/DECODER DRIVER, OC	54145
01006B--		BCD-TO-7 SEGMT/DECODER DRIVER, OC,AL,30V	5446
01007B--		BCD-TO-7 SEGMT/DECODER DRIVER,OC,AL,15V	5447
01008B--		BCD-TO-7 SEGMT DECODER,DRIVER,AH	5448
01009B--		BCD TO-7 SEGMT/DECODER, DRIVER,AH,OC	5449
01404B--		DUAL 4-INPUT COMPLEMENTARY OUTPUT,MUX	9309
01406B--		8-INPUT DATA SELECTOR/MUX	54151
15201B--		4-LINE-TO-16 LINE/DEMUX	54154,9311
15202B--		DUAL 2-LINE-TO-4-LINE/DEMUX	54155
15203B--		DUAL 2-LINE-TO-4-LINE, OC,DEMUX	54156
15206B--		BCD TO DECIMAL	82521
15802B--		BCD TO 7 SEGMT, DRIVER, AL, OC, 15V	9317

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL,TTL MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
15602B--	ENCODER	8-INPUT, PRIORITY	54148
15603B--		8-BIT, EXPANDABLE	9318
00201B--	FLIP-FLOP	J-K MASTER SLAVE	5472
00202B--		J-K, DUAL, W/CLEAR	5473
00203B--		J-K, DUAL, W/CLEAR(POSITIVE)	54107
00204B--		J-K, DUAL, W/PRESET & CLEAR	5476
00205B--		D-TYPE, DUAL, W/PRESET & CLEAR	5474
00206B--		J-K, EDGE TRIGGERED	5470
00207B--		D-TYPE, DUAL	5479
01701B--		D-TYPE, HEX	54174
01702B--		D-TYPE, QUAD	54175
00101B--	GATE	NAND, SINGLE, 8-INPUT	5430
00102B--		NAND, DUAL, 4-INPUT	5420
00103B--		NAND, TRIPLE, 3-INPUT	5410
00104B--		NAND, QUAD, 2-INPUT	540
00106B		NAND,TRIPLE,3-INPUT,OC	5412
00107B--		NAND, QUAD, 2-INPUT OPEN COLLECTOR	5401
00109B--		NAND, QUAD, 2-INPUT	5403
00401B--		NOR, QUAD, 2-INPUT, POSITIVE	5402
00402B--		NOR, DUAL EXPANDABLE, 4-INPUT, W/STROBE	5423
00403B--		NOR, DUAL, 4-INPUT, ACTIVE PULL-UP	5425
00501B--		AND-OR-INVERT, DUAL, 2-INPUT	5450
00502B--		AND-OR-INVERT, DUAL, 2-WIDE,2-INPUT, EX	5451
00503B--		AND-OR-INVERT,4-WIDE,2-INPUT,EXPANDABLE	5453
00504B--		AND-OR-INVERT, DUAL,4-WIDE	5454
00701B--		EXCLUSIVE-OR,QUAD,2-INPUT	5486
00805B--		NAND, QUAD,2-INPUT	5426
01601B--		AND, QUAD, 2-INPUT	5408
01602B--		AND, QUAD, 2-INPUT, OC	5409
15101B--		NAND, DUAL, 4-INPUT SCHMITT TR	5413
15103B--		NAND, QUAD, 2-INPUT, SCHMITT-TRIGGER	54132
16101B--		OR,QUAD, 2-INPUT	5432
00105B--	INVERTER	HEX, 1-INPUT	5404
00108B--		HEX, 1-INPUT, OC	5405
00801B--		HEX, BUFFER/DRIVER, OC, 30V, 30MA	5406
00802B--		HEX, BUFFER/DRIVER, OC, 15V, 40MA	5416
15102B--		HEX, 1-INPUT, SCHMITT-TRIGGER	541
16302B--		HEX, TS, W/COMMON ENABLE	54366
16304B--		HEX, TS, 4-BIT & 2-BIT	54368
01501B--	LATCH	QUAD BISTABLE	5475
01502B--		QUAD BISTABLE, SINGLE OUTPUT	5477
01503B--		DUAL 4-BIT W/CLEAR	54116
01504B--		QUAD MULTIFUNCTION	9314

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL,TTL MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
01401B--	MULTIPLEXER	16-BIT, DATA SELECTOR	54150
01402B--		8-INPUT	9312
01403B--		4-LINE TO-1-LINE SELECTOR, DUAL	54153
01405B--		QUAD, 2-LINE-TO-1-LINE	54157
01201B--	MULTIVIBRATOR	SINGLE, MONOSTABLE	54121
01202B--		SINGLE, RETRIGGERABLE	54122
01203B--		DUAL, RETRIGGERABLE	54123
01204B--		ONE SHOT	9601
01205B--		DUAL, ONE SHOT	9602
01901B--	PARITY GENERATOR	8-DATA BIT, ODD EVEN	54180
00901B--	SHIFT-REGISTER	4-BIT, RGT-SHIFT, LFT-SHIFT	5495
00902B--		5-BIT, ASYNCHRONOUS W/PRESET	5496
00903B--		8-BIT, PARALLEL-OUT	54164
00904B--		8-BIT, PARALLEL-LOAD	54165
00905B--		4-BIT, DIRECTIONAL	54194
00906B--		4-BIT, PARALLEL ACCESS	54195
15901B--		4-BIT	9300
15902B--		8-BIT, DUAL, SERIAL-IN-OUT	9328

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL,S-TTL MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
07801B--	ARITHMETIC	4-BIT ARITH LOGIC UNIT/FUNCTION GEN	54S181
07201B--	BUFFER	NAND, DUAL, 4-INPUT	54S40
08201B--	COMPARATOR	4-BIT	54S85
07702B--	DECODER	DUAL, 1-OF-4 DEC/DEMUX	54S139
08101B--	DRIVER	NAND, DUAL, 4-INPUT, 50 OHM	54S140
07101B--	FLIP-FLOP	D-TYPE,DUAL,EDGE-TRIGGERED	54S74
07102B--		DUAL, J-K NEG EDG-TRG	54S112
07105B--		HEX D-TYP W/RESET	54S174
07106B--		QUAD D-TYP W/RESET	54S175
07001B--	GATE	NAND, QUAD, 2-INPUT	54S00
07002B--		QUAD, NOR, 2-INPUT, OC	54S03
07003B--		QUAD, NAND, 2-INPUT, OC	54S04
07004B--		HEX, INVERTER, 1-INPUT	54S05
07005B--		NAND,TRIPLE,3-INPUT	54S10
07006B--		NAND, DUAL, 4-INPUT	54S20
07007B--		NAND,DUAL, 4-INPUT, OC	54S22
07008B--		NAND,SINGLE,8-INPUT	54S30
07009B--		NAND, SINGLE, 13-INPUT	54S133
07301B--		NOR, QUAD, 2-INPUT	54S02
07401B--		AND-OR-INVERT,DUAL, 2-WIDE	54S51
07402B--		4-2-3-2-INPUT AND-OR-INVERT	54S64
07501B--		EXCLUSIVE-OR, QUAD, 2-INPUT	54S86
08001B--		AND, TRIPLE,3-INPUT	54S11
08003B--		QUAD, AND, 2-INPUT	54S08
08004B--		QUAD, AND, 2-INPUT, OC	54S09
07901B--	MULTIPLEXER	ONE OF 8 DATA SELECTOR	54S151
07902B--		4-LINE-TO-1-LINE DATA SELECTOR, DUAL	54S153
07903B--		2-LINE-TO-1-LINE DATA SELECTOR, QUAD	54S157
07904B--		2-LINE-TO-1-LINE DATA SELECTOR	54S158
07906B--		QUAD, 2-TO-1 MUX, TS	54S257
07601B--	SHIFT REGISTER	4-BIT, BIDIRECTIONAL	54S194

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL, LPS-TTL MIL-M-38510 GPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
31201B--	ADDER	DUAL FULL	54LS183A
31202B--		4-BIT BINARY FULL, LOOKAHEAD AND CARRY	54LS283A
30801B--	ARITHMETIC	ARITH LOGIC UNIT/FUNCTION-GEN	54LS181
30201B--	BUFFER	DUAL 4-INPUT NAND BUFFER	54LS40
30202B--		QUAD, 2-INPUT NAND	54LS37
30203B--		QUAD, 2-INPUT, NAND, BUFFER, OC	54LS38
30204B--		QUAD, 2-INPUT, NOR BUFFER/GATE	54LS28
32301B--		QUAD BUS, BUFFER GATE, INVERTING	54LS125
32302B--		QUAD BUS, BUFFER GATE, NON-INVERTING	54LS126
32303B--		BUFFER, QUAD, TS OUT	54LS126
32401B--		OCTAL(SCH TRIG) INVERTING, TS	54LS240
32402B--		OCTAL(SCH TRIG) NON-INV, TS, SYN CTRLS	54LS241
32403B--		OCTAL(SCH TRIG) NON-INV, TS COM CTRLS	54LS244
32102B--	BUFFER DRIVERS	QUAD, 2-INPUT NAND, OC, TO 15V	54LS26
32201B--		HEX, TS	54LS365
32202B--		HEX, INVERTER, TS	54LS366
32203B--		HEX, TS W/2-BIT & 4-BIT SEC	54LS367
32204B--		HEX, INV,TS W/2-BIT & 4-BIT SEC	54LS368
31101B--	COMPARATOR	4-BIT	54LS85
31501B--	COUNTER	DECADE COUNTER	54LS90
31502B--		4-BIT BINARY COUNTER	54LS93
31503B--		BCD DECADE W/MR(OUTPUTS)	54LS160
31504B--		SYN BINARY W/MR(OUTPUTS)	54LS161
31507B--		UP/DOWN DECADE W/SEP CLKS	54LS192
31508B--		UP/DOWN BINARY W/SEP CLKS	54LS193
31509B--		UP/DOWN BINARY W/PRST & RIPPLE CLKS	54LS191
31510B--		DIVIDE BY 12	54LS92
31511B--		BCD DECADE W/MS	54LS162
31512B--		SYN BINARY W/MR	54LS163
31513B--		UP/DOWN DEC W/PRST & RIPPLE CLR	54LS190
32003B--		DEC ASYN W/CORNER PWR PINS	54LS290
32004B--		DIVIDE BY 16 W/CORNER PWR PINS	54LS293
32102B--		4-BIT BINARY COUNTER, RIPPLE	54LS293
32103B--		DECADE, DIVIDE BY 2 & BY 5	54LS290
32701B--		DUAL DECADE ASYN W/CORN PWR PINS	54LS390
32702B--		DUAL DIVIDE BY 16 W/CORN PWR PINS	54LS393
32703B--		DUAL DEC ASYN W/CORN PWR PINS & MS	54LS490
30701B--	DECODERS	SINGLE, 3-TO-8 LINE	54LS138
30702B--		DUAL, 2-TO-4 LINE DECODER/DEMUX	54LS139
30703B--		BCD TO DECIMAL	54LS42
30704B--		BCD TO SEVEN SEGMENT, AL, OC, 15V	54LS47
32601B--	DEMULTIPLEXERS	DUAL 2-TO-4-LINE DEC/DEMUX, TP OUT	54LS155
32602B--		DUAL 2-TO-4-LINE DEC/DEMUX, TP OUT, OC	54LS156
36001B--	ENCODERS	8 INPUT PRIORITY ENCODER	54LS148
36002B--		8-TO-3 LINE PRIORITY, TS OUTPUT	54LS348

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL, LPS-TTL MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
30101B--	FLIP-FLOP	DUAL "J-K", M-S, W/CLR	54LS73
30102B--		QUAD, D-TYPE, W/CLR & PRST	54LS74
30103B--		DUAL "J-K" W/CLR & PRST(NEG)	54LS112
30104B--		DUAL "J-K" W PRST(NEG)	54LS113
30105B--		DUAL "J-K" W/CLR, CLK & PRST(NRG)	54LS114
30106B--		D-TYPE HEX SINGLE OUTPUT/CLR	54LS174
30107B--		QUAD D-TYPE COMPL OUTPUT/CLR	54LS175
30108B--		DUAL J-K W/CLR(POS)	54LS107
30109B--		DUAL J-K W/PRST & CLR(POS)	54LS109
30110B--		DUAL J-K W/PRST & CLR	54LS76
32501B--		OCTAL D-TYPE, EDG TRIG, W/CLR	54LS273
32503B--		OCTAL D-TYPE EDG TRIG	54LS374
32504B--		OCTAL D-TYPE W/ENABLE	54LS377
33106B--		HEX D-TYPE, EDG TRIG W/CLR	25LS174
33107B--		QUAD D-TYPE, EDG TRIG W/CLR, COM OUT	25LS175
30001B--	GATE	NAND, QUAD, 2-INPUT	54LS00
30002B--		NAND, QUAD, 2-INPUT, OC	54LS03
30005B--		NAND, TRIPPLE, 3-INPUT	54LS10
30006B--		NAND, TRIPPLE, 3-INPUT, OC	54LS12
30007B--		NAND, DUAL, 4-INPUT	54LS20
30008B--		NAND, DUAL, 4-INPUT, OC	54LS22
30009B--		NAND, 8-INPUT	54LS30
30301B--		NOR, QUAD, 2-INPUT	54LS02
30302B--		NOR, TRIPPLE, 3-INPUT	54LS27
30303B--		EXCLUSIVE-NOR, QUAD, 2-INPUT	54LS226
30401B--		AND-OR-INVERT, DUAL, 2-WIDE	54LS51
30402B--		AND-OR-INVERT, 4-WIDE, 2-3-3-2-INPUT	54LS54
30501B--		OR, QUAD, 2-INPUT	54LS32
30502B--		EXCLUSIVE-OR, QUAD, 2-INPUT	54LS86
31001B--		AND, TRIPPLE, 3-INPUT	54LS11
31002B--		AND, TRIPPLE, 3-INPUT, OC	54LS15
31003B--		AND, DUAL, 4-INPUT	54LS21
31004B--		AND, QUAD, 2-INPUT	54LS08
31301B--		NAND, DUAL, 4-INPUT, SCH TRG	54LS13
31303B--		NAND, QUAD, 2-INPUT, SCH TRG	54LS132
30003B--	INVERTER	HEX, 1-INPUT	54LS04
30004B--		HEX, 1-INPUT, OC	54LS05
31302B--		HEX, SCHMITT TRIGGERED	54LS14
31601B--	LATCH	QUAD, BISTABLE, COMP OUT	54LS75
31602B--		QUAD, BISTABLE, COMP OUT, SET RESET	54LS279
31603B--		8-BIT, ADDRESSABLE, W/CLR	54LS259
31604B--		QUAD, BISTABLE, COMP OUT, TRANS	54LS375
32502B--		8-BIT, TRANSPARENT, D-TYPE, TS	54LS373

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL, LPS-TTL MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
30901B--	MULTIPLEXER	8-INPUT, COMP OUT, STROBE	54LS151
30902B--		DUAL, 4-INPUT	54LS153
30903B--		QUAD, 2-INPUT	54LS157
30904B--		QUAD, 2-INPUT, COMP OUT	54LS158
30905B--		8-INPUT, COMP OUT, STROBE, TS	54LS251
30906B--		QUAD, 2-INPUT, TS, OC	54LS257
30907B--		QUAD, 2-INPUT, TS, OC, COMP OUT	54LS258
30908B--		DUAL, 4-INPUT, TS	54LS253
30909B--		QUAD, 2-INPUT, CLKD INPUT, LATCH OUT	54LS298
31401B--	MULTIVIBRATER	DUAL RETRIG, RESETTABLE	54LS123
31402B--		DUAL, MONO, SCH TRG INPUT	54LS221
31403B--		RETRIG, RESETTABLE	54LS122
32901B--	PARITY GEN	8-DATA BIT, ODD, EVEN	54LS280
30601B--	SHIFT-REGISTER	4-BIT UNIVERSAL, BI DIR	54LS194
30602B--		4-BIT J,K, PARALLEL IN/OUT, SHFT, RGT	54LS195
30603B--		4-BIT D-TYPE PARALLEL IN/OUT, SHFT RGT	54LS95
30604B--		4-BIT PAR IN, SERIAL OUT	54LS96
30605B--		8-BIT GATED IN, PAST OUT	54LS164
30606B--		4-BIT, D-TYPE, PAR IN/OUT, TS, OC	54LS295
30607B--		4-BIT, D-TYPE, PAR IN/OUT, TS OC CMOS COMP	54LS395
32801B--	TRANSCEIVER	QUAD, BUS	54LS242
32802B--		QUAD, BUS	54LS243
32803B--		OCTAL BUS, TS	54LS245

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL, ECL MIL-M-38510 QPL-38510

PART NUMBER JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
06001B--	GATE	QUAD, 2-INPUT OR/NOR	10501
06002B--		QUAD, 2-INPUT NOR	10502
06003B--		TRIPPLE 2-3-2 INPUT OR/NOR	10505
06004B--		TRIPPLE 4-3-3 INPUT NOR	10506
06005B--		TRIPPLE 2-INPUT EXCL OR/EXCL NOR	10507
06006B--		DUAL 4-5-INPUT OR/NOR	10509

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL,CMOS MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
05401B--	ADDER	4-BIT	4008A
05501B--	BUFFER	HEX, INVERTER	4009A
05502B--		HEX, NON-INVERTING	4010A
05503B--		HEX, INVERTER	4049A
05504B--		HEX, NON-INVERTING	4050A
05601B--	COUNTER	DECADE COUNTER/DIVIDE	4017A
05602B--		PRESETTABLE DIVIDE BY N	4018A
05603B--		14-STAGE RIPPLE CARRY	4020A
05604B--		DIVIDE BY 8 COUNTER/DIVIDE	4022A
05605B--		7-STAGE BINARY COUNTER	4024A
05101B--	FLIP-FLOP	D-TYPE, DUAL, EDGE-TRIGGERED	4013A
05102B--		DUAL, J-K MASTER SLAVE	4027A
05001B--	GATE	QUAD, NAND, 2-INPUT	4011A
05002B--		DUAL, NAND, 4-INPUT	4012A
05003B--		TRIPPLE, NAND, 3-INPUT	4023A
05201B--		DUAL, NOR, 3-INPUT, PLUS INVERTER	4000A
05202B--		NOR, QUAD, 2-INPUT	4001A
05203B--		NOR, DUAL, 4-INPUT	4002A
05204B--		TRIPPLE, NOR, 3-INPUT	4025A
05301B--		DUAL COMPLEMENTARY PAIR PLUS INVERTER	4007A
05302B--		QUAD, AND-OR SELECT	4019A
05303B--		QUAD, EXCLUSIVE-OR	4030A
17001B--		QUAD, AND, 2-OUTPUT	4081B
17002B--		DUAL, AND, 4-INPUT	4082B
17003B--		TRIPPLE, AND, 3-INPUT	4073B
17101B--		QUAD, OR, 2-INPUT	4071B
17102B--		DUAL, OR, 4-INPUT	4072B
17103B--		TRIPPLE, OR, 3-INPUT	4075B
17201B--		DUAL, AND-OR-INVERT, 2-WIDE, 2-INPUT	4085B
17202B--		EXPANDABLE, AND-OR-INVERTER	4086B
17203B--		QUAD, EXCLUSIVE-OR	4070B
17204B--		QUAD, EXCLUSIVE-NOR	4077B
05701B--	SHIFT REGISTER	DUAL 4-STAGE, DUAL 5-STAGE, STATIC	4006A
05702B--		8-STAGE, SYN, PARALLEL OR SERIAL IN	4014A
05703B--		DUAL 4-STAGE, SER INPUT, PAR OUTPUT	4015A
05704B--		8-STAGE, ASYN	4021A
05705B--		64-STAGE STATIC	4031A
05801B--	SWITCH	QUAD, BILATERAL	4016A
05802B--		QUAD, BILATERAL, LOW ON RES	4066A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

LINEAR MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
10101B--	OP AMPLIFIERS	SINGLE, INTERNALLY COMP	741
10102B--		DUAL, INTERNALLY COMP	747
10103B--		SINGLE, EXTERNALLY COMP	LM101A
10104B--		SINGLE, EXTERNALLY COMP	LM108A
10105B--		OP, DUAL LM101	LH2101A
10107B--		SINGLE, HIGH SPEED	LM118
10108B--		DUAL, NO COMP	1558
10601B--		OP, VOLTAGE FOLLOWER	LM102
10602B--		OP, VOLTAGE FOLLOWER	LM110
11003B--		OP, QUAD D 741	4741,4156
11004B--		OP, QUAD	4136
11005B--		OP, LOW PWR, QUAD	LM124
11401B--		OP, GEN, FET, INPUT	LF155
11404B--		OP, BIPOLAR-JFET	LF155A
12202B--		HIGH SR, INTERNAL COMPENSATED	2600
12203B--		HIGH SR, EXTERNAL COMPENSATED	2620
12204B--		PRECISION HIGH SR, INTERNALLY COMPENSATED	2500
12205B--		HIGH SR, INTERNALLY COMPENSATED	2510
12206B--		HIGH SR, EXTERNALLY COMPENSATED	2520
10802B--	ARRAYS	3-ISOLATED NPN TRANS,1-NPN DIFF CON PR	3045
10301B--	COMPARATOR	HI-SPEED	710
10302B--		DIFFERENTIAL VOLTAGE, DUAL CHANNEL	711
10304B--		HIGH SP, SINGLE	LM111
10305B--		HIGH SP, DUAL	LH2111
11201B--		QUAD, BUFFER	LM139
11301B--	CONVERTER	8-BIT, HIGH SP, MULTIPLYING	DAC-08
11302B--		8-BIT, HIGH SP, MULTIPLYING	DAC-08A
10401B--	DRIVER REC	DUAL LINE	55107
10402B--		DUAL LINE	55108
10403B--		DUAL DIFFERENTIAL	9614
10404B--		DUAL DIFFERENTIAL	9615
10405B--		DIFFERENTIAL, OC, TS	55113
10201B--	REGULATOR	PRECISION VOLTAGE	723
10701B--		5-VOLT	LM109
10703B--		12-VOLT, 500MA	LM141H-12/7812
10707B--		12-VOLT, 1.5A	LM140K-12/7812

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

LINEAR MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
11101B--	SWITCH,ANALOG	2-SPST, 30ohm ON RES	DG181A
11102B--		2-SPST, 75ohm ON RES	DG182A
11103B--		2-DPST, 30ohm ON RES(-7.5 TO 15 SIG)	DG184A
11104B--		2-DPST, 75ohm ON RES(-10 TO 15 SIG)	DG185A
11105B--		SPDT, 50ohm ON RES(+7.5 SIG)	DG187A
11106B--		SPDT, 75ohm ON RES(-15 TO 10 SIG)	DG188A
11107B--		2-SPDT, HIGH SP	DG190A
11108B--		2-SPDT, HIGH SP	DG191A
10901B--	TIMER	SINGLE PRECISION	555
10902B--		DUAL PRECISION	556
10903B--		PRECISION TIMER	557

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS

DIGITAL, MEMORIES MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
20101B--	PROM	512-BIT, 64-WORDS/8-BITS/WORD OC, TTL	54186,HPROM 512 MCM5303
20301B--		1024-BIT(256 X4), OC, S-TTL	7610, 5300-1 82S126,93417
20302B--		1024-BIT(256 X4), TS, S-TTL	7611, 5301-1, 82S129,93427
20401B--		2048-BIT(512 X4), OC, S-TTL	7620,5303-1, 82S130,93436
20402B--		2048-BIT(512 X4), TS S-TTL	7621,5306-1 82S131,93446
20601B--		4096-BIT(1024 X4), OC, S-TTL	7642,5352-1 82S136,93452
20602B--		4096-BIT(1024 X4), TS, S-TTL	7643,5353-1, 82S137,93453
20603B--		4096-BIT(1024 X4), S-TTL	7644
20701B--		256-BIT(32 X 8), OC, S-TTL	7602,5330, 82S23
20702B--		256-BIT(32 X 8), TS, S-TTL	7603, 5331, 82S123
20801B--		4096-BIT(512 X 8), OC, S-TTL	7640,5340-1, 82S140, 93438
20802B--		4096-BIY(512 X 8), TS, S-TTL	7641,5341-1, 82S141,93448
20803B--		4096-BIT(512 X 8), TS, S-TTL	82S115
20903B--		8192-BIT(1024 X 8), OC, S-TTL(LOW PWR)	7680,5380-1, 82S180,93450
20904B--		8192-BIT(1024 X 8), TS, S-TTL(LOW PWR)	7681,5381-1, 82S181,93451
20905B--		8192-BIT(1024 X 8), TS, S-TTL	82S2708, 93461
21002B--		16,384-BIT(2048 X 8), TS, S-TTL	76161, 53S1681 82S191,93511
23101B--	RAM	1024 X 1-BIT, UCO, S-TTL	93415
23102B--		1024 X 1-BIT, TS, S-TTL	93425
23103B--		1024 X 1-BIT, UCO, S-TTL(LOW PWR)	93L415
23104B--		1024 X1-BIT, TS, S-TTL(LOW PWR)	93L425
24001B--		16384 X 1-BIT, TS, NMOS(200NS)	2117,4116
24002B--		16384 X 1-BIT, TS, NMOS(250NS)	2117,4116

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MICROCIRCUITS


DIGITAL,8-BIT MICROPROCESSOR MIL-M-38510 QPL-38510

PART NO. JM38510/	FUNCTION	CIRCUIT	COMMERCIAL TYPE
42001B--	MICROPROCESSOR	8-BIT,N-CHANNEL,SILICON GATE	8080A
44001B--		4-BIT,MICROPROCESSOR,SLICE	2901A
46001B--		16-BIT, IIL	9900A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

DO-4

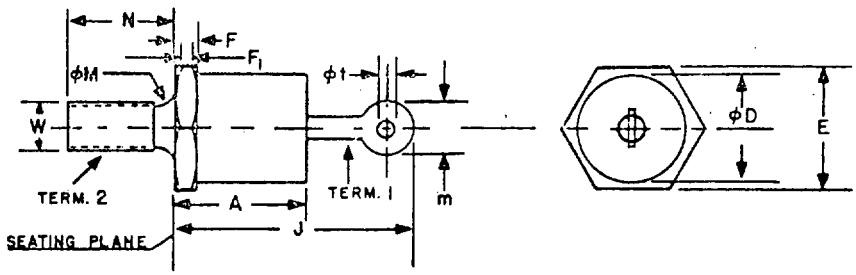

SYMBOL	INCHES MIN.	MAX.	NOTES
A		.405	
ØD		.424	
E	.424	.437	
F	.075	.175	
F_1	.060		
J		.800	
ØM	.163	.189	1
m		.250	2
N	.422	.453	
Øt	.060		
W			3


NOTES:

1. COMPLETE THREADS TO EXTEND TO WITHIN 2-1/2 THREADS OF SEATING PLANE.
2. ANGULAR ORIENTATION OF THIS TERMINAL IS UNDEFINED.
3. 10-32 UNF-2A MAXIMUM PITCH DIAMETER OF PLATED THREADS SHALL BE BASIC PITCH DIAMETER (.1697") REF. (SCREW THREAD STANDARDS FOR FEDERAL SERVICES 1957) HANDBOOK H28 P1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

DO-5

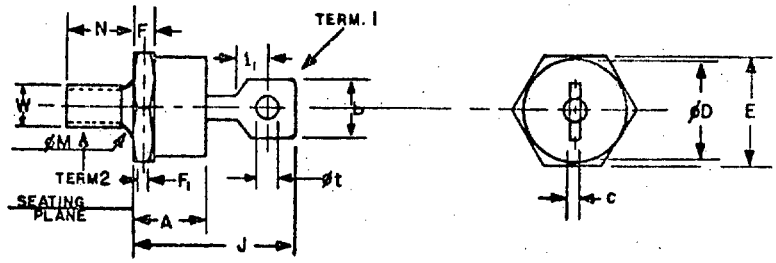

SYMBOL	INCHES MIN.	MAX.	NOTES
A		.450	
b		.375	2
c		.080	
øD		.667	
E	.667	.687	
F	.115	.200	
F_1	.060		
J		1.000	
l	.156		4
øM	.220	.249	1
N	.422	.453	
øt	.140	.175	
W			1, 3


NOTES:

1. COMPLETE THREADS TO EXTEND TO WITHIN 2-1/2 THREADS OF SEATING PLANE.
2. ANGULAR ORIENTATION OF THIS TERMINAL IS UNDEFINED.
3. 1/4-28 UNF-2A. MAXIMUM PITCH DIAMETER OF PLATED THREADS SHALL BE BASIC PITCH DIAMETER (.2268") REF. (SCREW THREAD STANDARDS FOR FEDERAL SERVICES 1957) HANDBOOK H28 1957 P1.
4. MINIMUM FLAT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

DO-7

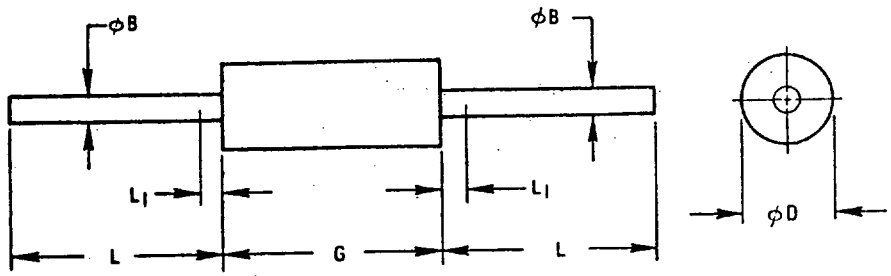

SYMBOL	INCHES MIN.	MAX.	NOTES
ØB	.018	.022	-
ØD	.085	.107	1
G	.230	.300	1
L	1.000	-	-
L_1	-	.050	2


NOTES:

1. PACKAGE CONTOUR OPTIONAL WITHIN CYLINDER OF DIAMETER ØD AND LENGTH G. SLUGS, IF ANY, SHALL BE INCLUDED WITHIN THIS CYLINDER BUT SHALL NOT BE SUBJECT TO THE MINIMUM LIMIT OF ØD
2. LEAD DIAMETER NOT CONTROLLED IN THIS ZONE TO ALLOW FOR FLASH, LEAD FINISH BUILD-UP, AND MINOR IRREGULARITIES OTHER THAN SLUGS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

DO-13

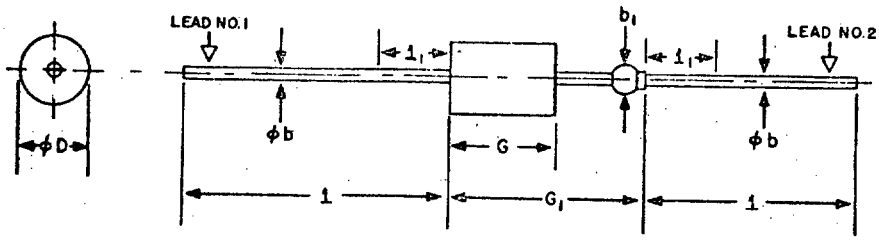

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
ϕb	.025	.035	
b_1	.045	.100	3
ϕD	.215	.235	1
G	.293	.357	
G_1		.570	
l	1.000	1.625	
l_1		.188	2


NOTES:

1. THE MAJOR DIAMETER IS ESSENTIALLY CONSTANT ALONG ITS LENGTH.
2. WITHIN THIS ZONE DIAMETER MAY VARY TO ALLOW FOR LEAD FINISHES AND IRREGULARITIES.
3. DIMENSION TO ALLOW FOR PINCH OR SEAL DEFORMATION ANYWHERE ALONG TUBULATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

DO-35

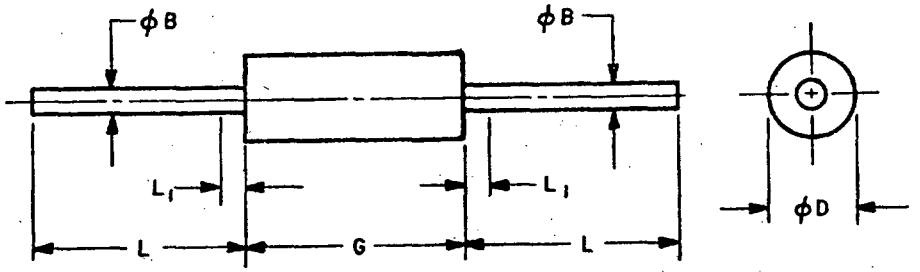

SYMBOL	INCHES MIN.	MAX.	NOTES
ØB	.018	.022	-
ØD	.060	.090	1
G	.120	.200	1
L	.500	-	-
L_1	-	.050	2


NOTES:

1. PACKAGE CONTOUR OPTIONAL WITHIN CYLINDER OF DIAMETER ØD AND LENGTH G. SLUGS, IF ANY, SHALL BE INCLUDED WITHIN THIS CYLINDER BUT SHALL NOT BE SUBJECT TO THE MINIMUM LIMIT OF ØD.
2. LEAD DIAMETER NOT CONTROLLED IN THIS ZONE TO ALLOW FOR FLASH, LEAD FINISH BUILD-UP, AND MINOR IRREGULARITIES OTHER THAN SLUGS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

DO-204

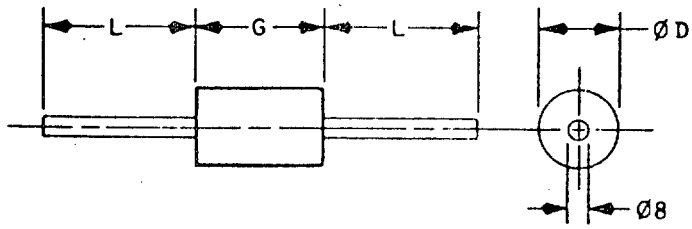

SPEC SLASH NO.	DECIMAL/METRIC		DIMENSIONS ØD	ØB	G	L
116	IN		.056- .075	.018- .022	.140- .180	1.000- 1.500
	MM		1.420-1.910	.460- .560	3.560-4.570	25.400-38.100
127	IN		.060- .090	.018- .023	.120- .200	1.000- 1.500
	MM		1.52- 2.29	.46- .58	3.05- 5.08	25.40- 38.10
144	IN		.056- .075	.018- .022	.140- .180	1.000- 1.500
	MM		1.420-1.910	.460- .560	3.560-4.570	25.400-38.100
169	IN		.056- .074	.019- .021	.075- .180	1.000- 1.500
	MM		1.420-1.880	.480- .530	1.910-4.570	25.400-38.100
240	IN		.055- .130	.018- .023	.140- .300	1.000- 1.500
	MM		1.400-3.300	.460- .584	5.840-7.620	25.400-38.100
279	IN		.090- .145	.025- .035	.230- .315	1.000- 1.250
	MM		2.290-3.680	.635- .890	5.840-9.000	25.400-31.750
282	IN		.085- .107	.018- .022	.230- .300	1.000- 1.500
	MM		2.160-2.720	.460- .560	5.840-7.620	25.400-38.100
356	IN		.090- .145	.038- .042	.140- .300	1.000- 1.500
	MM		2.280-3.680	.970-1.070	3.560-8.890	25.400-38.100
406	IN		.060- .085	.028- .032	.125- .160	.800- 1.300
	MM		1.520-2.160	.710- .810	3.180-4.060	20.320-33.020
411	IN		.110- .180	.037- .042	.130- .260	.900- 1.300
	MM		2.794-4.572	.939-1.067	3.320-6.600	22.860-33.020
420	IN		.115- .180	.037- .042	.130- .300	.900- 1.300
	MM		2.920-4.570	.940-1.070	3.300-7.620	22.860-33.020
429	IN		.065- .110	.026- .033	.130- .225	1.000- 1.300
	MM		1.900-2.540	.660- .838	3.300-5.710	25.400-33.020
443	IN		.450- .076	.014- .016	.100- .170	.975- 1.500
	MM		1.140-1.930	.360- .410	2.540-4.320	24.770-38.100
444	IN		.068- .076	.014- .020	.150- .170	1.000- 1.250
	MM		1.730-1.930	.360- .410	3.810-4.320	25.400-31.750
445	IN		.068- .076	.014- .016	.150- .170	1.000- 1.250
	MM		1.730-1.930	.360- .410	3.810-4.320	25.400-31.750
503	1N6073 thru 1N6075	IN	.055- .077	.027- .031	.140- .165	1.000- 1.250
		MM	.140-1.960	.690- .790	3.560-4.190	25.400-31.750
	1N6076 thru 1N6078	IN	.065- .110	.036- .040	.140- .165	.900- 1.100
		MM	1.650-2.790	.920-1.020	3.560-4.190	22.860-27.940
	1N6079 thru 1N6081	IN	.135- .165	.036- .040	.140- .165	.900- 1.100
		MM	3.430-4.190	.920-1.020	3.560-4.190	22.860-27.940
Notes		1,2		3	4	


NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Dimensions ØB shall be measured at the largest diameter.
4. The G dimension shall include all uncontrolled areas of the device leads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-3

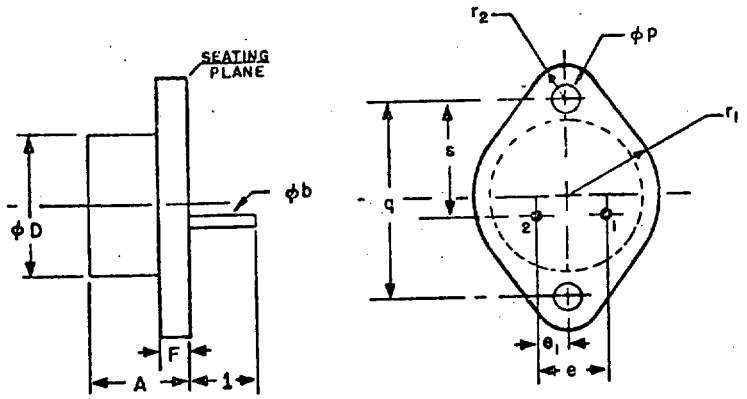

SYMBOL	INCHES MIN.	MAX.	NOTES
A	.250	.450	
Øb	.038	.043	2 ,3
ØD		.875	
e	.420	.440	
e_1	.205	.225	
F		.135	
1	.312		2
Øp	.151	.161	
q	1.177	1.197	
r_1		.525	
r_2		.188	
s	.655	.675	1

NOTES:

1. THESE DIMENSIONS SHOULD BE MEASURED AT POINTS .050" TO .055" BELOW SEATING PLANE. WHEN GAGE IS NOT USED, MEASUREMENT WILL BE MADE AT SEATING PLANE.


2. TWO LEADS.

3. A LARGER LEAD DIAMETER IS SPECIFIED ON SLASH SHEETS(/) 114, /379, /433, /464, /466, /510 and /528 SPECIFICATIONS. CONSULT INDIVIDUAL SPECIFICATION FOR EXACT DIMENSIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-5

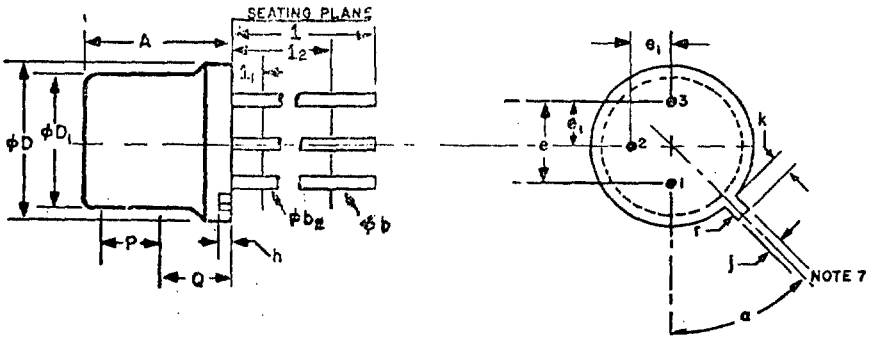

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
A	.240	.260	
øb	.016	.021	2
$øb_2$	.016	.019	2
ØD	.335	.370	
$ØD_1$	.305	.335	
e	.200 T.P.		4, 5
e_1	.100 T.P.		5
h	.009	.125	
j	.028	.034	5
k	.029	.045	3, 5
l	1.500		2
l_1		.050	2
l_2	.250		2
P	.100		1
Q			6
r		.007	
α	45° T.P.		5, 7


NOTES:

1. THIS ZONE IS CONTROLLED FOR AUTOMATIC HANDLING. THE VARIATION IN ACTUAL DIAMETER WITHIN THE ZONE SHALL NOT EXCEED .010"
2. (THREE LEADS) $øb_2$ APPLIES BETWEEN l_1 AND l_2. øb APPLIES BETWEEN l_2 AND 1.5" FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN l_1 AND BEYOND 1.5" FROM SEATING PLANE.
3. MEASURED FROM MAXIMUM DIAMETER OF THE ACTUAL DEVICE.
4. LEADS HAVING MAXIMUM DIAMETER .019" + .001" - .000" MEASURED IN GAGING PLANE .054" BELOW THE SEATING PLANE OF THE DEVICE SHALL BE WITHIN .007" OF THEIR TRUE POSITIONS RELATIVE TO THE MAXIMUM-WIDTH TAB.
5. THE DEVICE MAY BE MEASURED BY DIRECT METHODS OR BY THE GAGE AND GAGING PROCEDURE DESCRIBED ON GAGE DRAWING GS-1.
6. DETAILS OF OUTLINE IN THIS ZONE OPTIONAL.
7. TAB CENTERLINE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-18

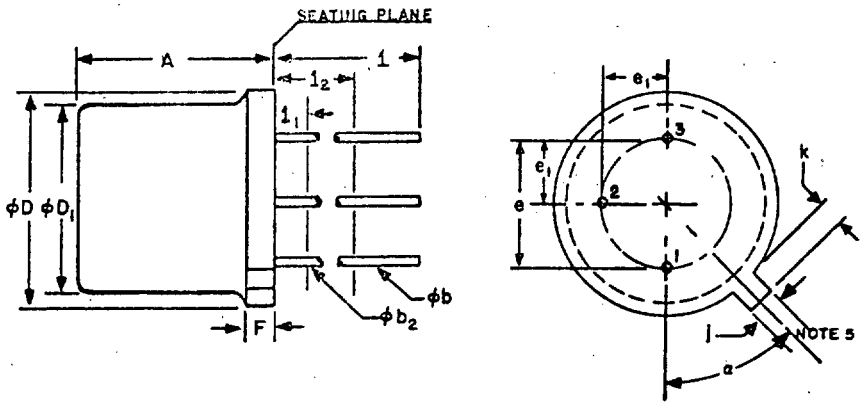

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
A	.170	.210	
ϕb	.016	.021	1
ϕb_2	.016	.019	1
ØD	.209	.230	
ØD_1	.178	.195	
e	.100 T.P.		2, 4
e_1	.050 T.P.		2, 4
F		.030	
j	.036	.046	4
k	.028	.048	3
1	.500		1
1_1		.050	1
1_2	.250		1
α	45° T.P.		5


NOTES:

1. (THREE LEADS) ϕb_2 APPLIES BETWEEN 1_1 AND 1_2. ϕb APPLIES BETWEEN 1_2 AND .5" FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN 1_1 AND BEYOND .5" FROM SEATING PLANE.
2. LEADS HAVING MAXIMUM DIAMETER .019" + .001" - .000" MEASURED IN GAGING PLANE .054" BELOW THE SEATING PLANE OF THE DEVICE SHALL BE WITHIN .007" OF THEIR TRUE POSITIONS RELATIVE TO A MAXIMUM-WIDTH TAB.
3. MEASURED FROM MAXIMUM DIAMETER OF THE ACTUAL DEVICE.
4. THE DEVICE MAY BE MEASURED BY DIRECT METHODS OR BY THE GAGE AND GAGING PROCEDURE DESCRIBED ON GAGE DRAWING GS-2.
5. TAB CENTERLINE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-33

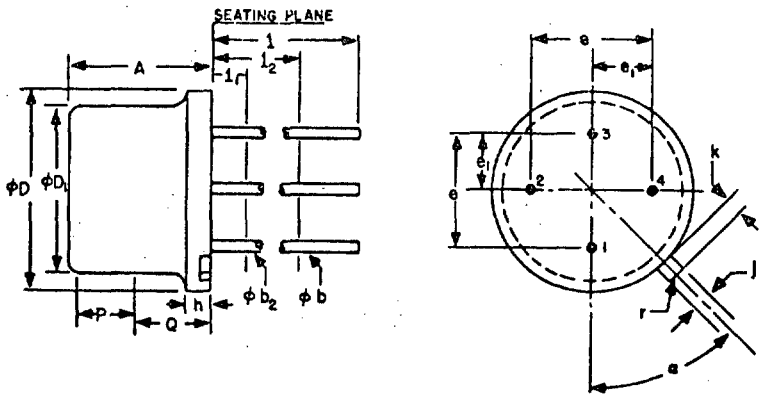

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
A	.240	.260	
Øb	.016	.021	2
$Øb_2$	.016	.019	2
ØD	.335	.370	
$ØD_1$	.305	.335	
e	.200 T.P.		4, 5
e_1	.100 T.P.		4, 5
h	.009	.125	
j	.028	.034	5
k	.029	.045	3, 5
l	1.500		2
l_1		.050	2
l_2	.250		2
P	.100		1
Q			6
r		.007	
α	45° T.P.		4, 5, 7


NOTES:

1. THIS DEVICE IS CONTROLLED FOR AUTOMATIC HANDLING. THE VARIATION IN ACTUAL DIAMETER WITHIN THE ZONE SHALL NOT EXCEED .010"
2. (FOUR LEADS) $Øb_2$ APPLIES BETWEEN l_1 AND l_2. Øb APPLIES BETWEEN l_2 AND 1.5" FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN l_1 AND BEYOND 1.5" FROM SEATING PLANE.
3. MEASURED FROM MAXIMUM DIAMETER OF THE ACTUAL DEVICE.
4. LEADS HAVING MAXIMUM DIAMETER .019" + .001" - .000" MEASURED IN GAGING PLANE .054" BELOW THE SEATING PLANE OF THE DEVICE SHALL BE WITHIN .007" OF THEIR TRUE POSITIONS RELATIVE TO A MAXIMUM-WIDTH TAB.
5. THE DEVICE MAY BE MEASURED BY DIRECT METHODS OR BY THE GAGE AND GAGING PROCEDURE DESCRIBED ON GAGE DRAWING GS-1.
6. DETAILS OF OUTLINE IN THIS ZONE OPTIONAL.
7. TAB CENTERLINE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-39

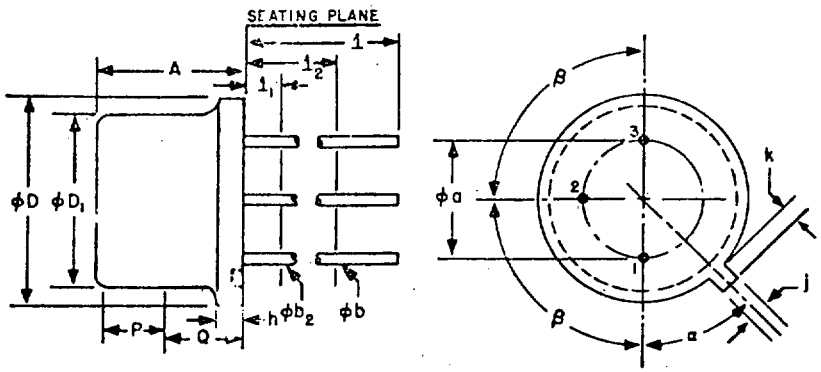

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
ϕa	.190	.210	
A	.240	.260	
ϕb	.016	.021	2
ϕb_2	.016	.019	2
ØD	.350	.370	
$ØD_1$	.315	.335	
h	.009	.125	
j	.028	.034	
k	.029	.040	3
1	.500		2
1_1		.050	2
1_2	.250		2
P	.100		1
Q			4
α	45° NOMINAL		
β	90° NOMINAL		


NOTES:

1. THIS ZONE IS CONTROLLED FOR AUTOMATIC HANDLING. THE VARIATION IN ACTUAL DIAMETER WITHIN THIS ZONE SHALL NOT EXCEED .010"
2. (THREE LEADS) $Øb_2$ APPLIES BETWEEN 1_1 AND 1_2. Øb APPLIES BETWEEN 1_2 AND .5" FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN 1_1 AND BEYOND .5" FROM SEATING PLANE.
3. MEASURED FROM MAXIMUM DIAMETER OF THE ACTUAL DEVICE.
4. DETAILS OF OUTLINE IN THIS ZONE OPTIONAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-46

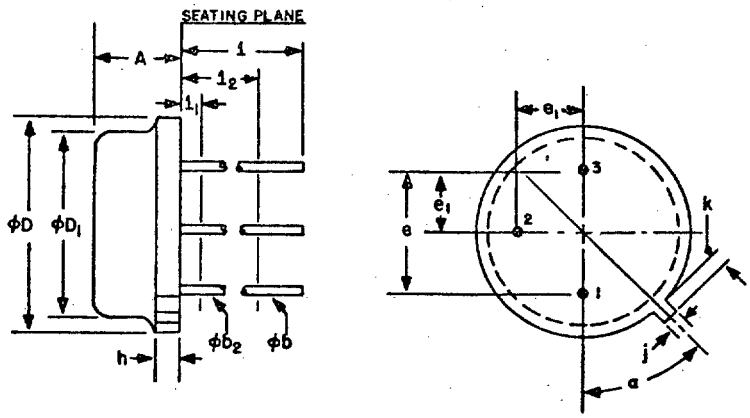

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
A	.065	.085	
ϕb	.016	.021	1
$ϕb_2$	.012	.019	1
ϕD	.209	.230	
$ϕD_1$	.178	.195	
e	.100 T.P.		2
e_1	.050 T.P.		2
h		.040	
j	.036	.046	
k	.028	.048	4
l	.500		1
l_1		.050	1
l_2	.250		1
a	45° T.P.		3, 5


NOTES:

1. (THREE LEADS) $ϕb_2$ APPLIES BETWEEN l_1 AND l_2. ϕb APPLIES BETWEEN l_2 AND .5" FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN l_1 AND BEYOND .5" FROM SEATING PLANE.
2. MAXIMUM DIAMETER LEADS AT A GAGING PLANE .054" + .001" - .000" BELOW SEATING PLANE TO BE WITHIN .007" OF THEIR TRUE POSITION RELATIVE TO MAXIMUM-WIDTH TAB AND TO THE MAXIMUM .230" DIAMETER MEASURED WITH A SUITABLE GAGE. WHEN GAGE IS NOT USED, MEASUREMENT WILL BE MADE AT SEATING PLANE.
3. INDEX TAB FOR VISUAL ORIENTATION ONLY.
4. MEASURED FROM MAXIMUM DIAMETER OF THE ACTUAL DEVICE.
5. TAB CENTERLINE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-48

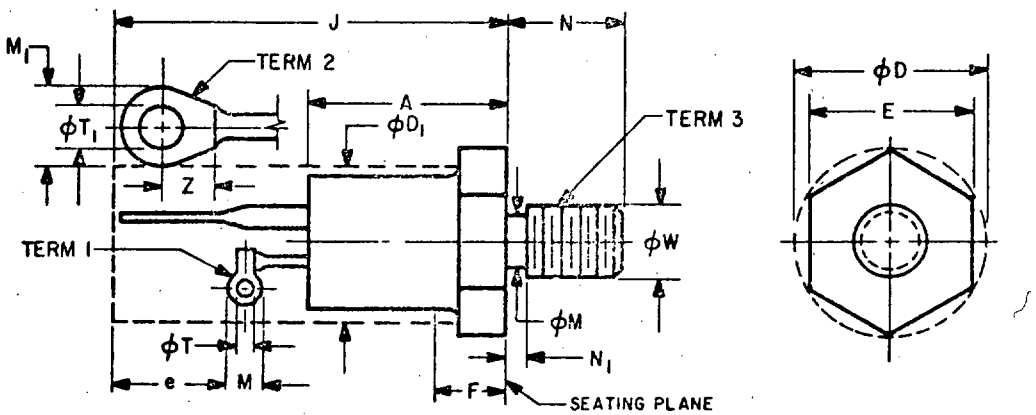

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
A	.330	.505	-
ØD	-	.650	-
ØD1	-	.544	5
e	.125	-	4
E	.544	.562	-
F	.113	.200	3
J	-	1.193	5
ØM	.220	.249	6
M	.115	.140	1
M1	.210	.300	1
N	.422	.453	-
N1	-	.090	6
ØT	.060	.075	-
ØT1	.125	.165	-
ØW	.2225	.2268	2
Z	.120	-	7


NOTES:

1. CONTOUR & ANGULAR ORIENTATION OF THESE TERMINALS IS OPTIONAL.
2. PITCH DIAMETER OF 1/4-28 UNF-2A (COATED) THREADS (ASA B1.1-1960).
3. A CHAMFER OR UNDERCUT ON ONE OR BOTH ENDS OF HEXAGONAL PORTION IS OPTIONAL.
4. MINIMUM DIFFERENCE IN TERMINAL LENGTHS TO ESTABLISH DATUM LINE FOR NUMBERING TERMINALS.
5. THE DEVICE WITH EXCEPTION OF THE HEXAGON AND THREAD LIES WITHIN THE CYLINDER DEFINED BY ØD1 AND LENGTH J.
6. LENGTH OF INCOMPLETE OR UNDERCUT THREAD OF ØM.
7. MINIMUM FLAT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-60

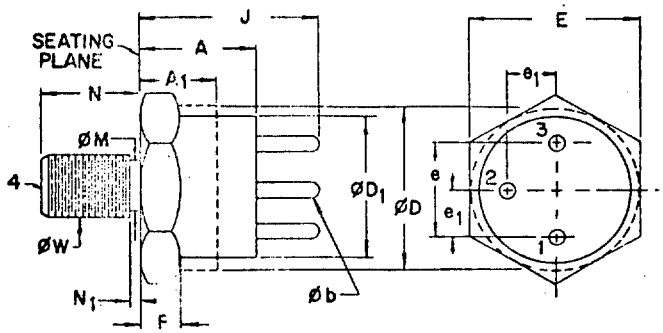

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
A	.215	.320	
A_1		.165	2
Øb	.030	.046	
ØD	.360	.437	2
$ØD_1$	.320	.360	
E	.424	.437	
e	.185	.215	
e_1	.090	.110	
F	.090	.135	1
J	.355	.480	
ØM	.163	.189	
N	.375	.455	
N_1		.078	
ØW	.1658	.1697	3


NOTES:

1. DIMENSION DOES NOT INCLUDE SEALING FLANGES.
2. PACKAGE CONTOUR OPTIONAL WITHIN DIMENSIONS SPECIFIED.
3. PITCH DIAMETER - THREAD 10-32 UNF-2A (COATED). REFERENCE (SCREW THREAD STANDARDS FOR FEDERAL SERVICES - HANDBOOK H-28).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-61

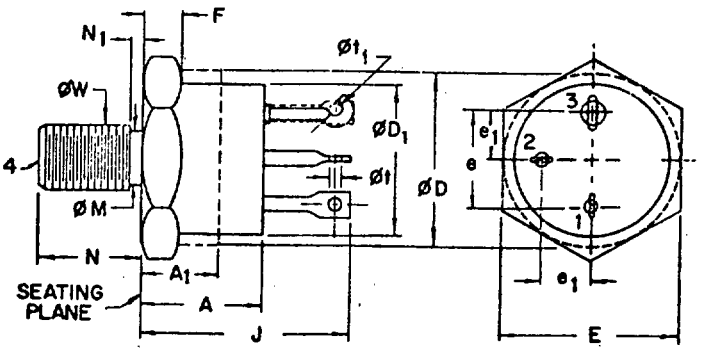

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
A	.325	.460	
A_1		.270	2
ØD	.610	.687	2
$ØD_1$	.570	.610	
E	.667	.687	
e	.340	.415	5
e_1	.170	.213	5
F	.090	.150	1
J	.640	.875	
ØM	.220	.249	
N	.422	.455	
N_1		.090	
Øt	.047	.072	
$Øt_1$	.046	.077	4
ØW	.2225	.2268	3


NOTES:

1. DIMENSION DOES NOT INCLUDE SEALING FLANGES.
2. PACKAGE CONTOUR OPTIONAL WITHIN DIMENSIONS SPECIFIED.
3. PITCH DIAMETER - THREAD 1/4-28 UNF-2A (COATED). REFERENCE (SCREW THREAD STANDARDS FOR FEDERAL SERVICES - HANDBOOK H-28).
4. THIS TERMINAL CAN BE FLATTENED AND PIERCED OR HOOK TYPE.
5. POSITION OF LEADS IN RELATION TO THE HEXAGON IS NOT CONTROLLED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-64

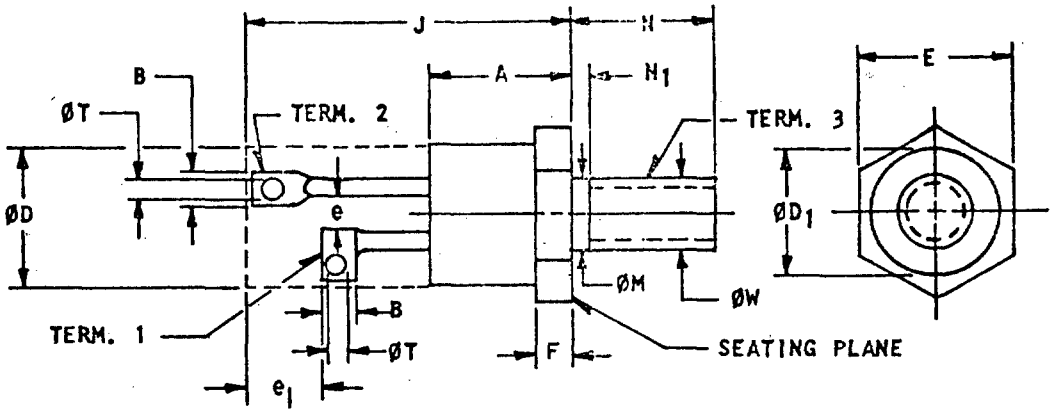

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
A	.300	.400	
B	.080	.136	1
ØD		.424	2
$ØD_1$	.400		3, 4
E	.424	.437	
e	.013		7
e_1	.060		5
F	.060	.175	4
J	.700	.855	2
ØM	.163	.189	
N	.400	.453	
N_1		.078	
ØT	.040	.075	
ØW	.1658	.1697	6


NOTES:

1. CONTOUR AND ORIENTATION OF FIXED TERMINAL LUGS ARE OPTIONAL.
2. THE OUTLINE CONTOUR (WITH EXCEPTION OF HEXAGON) IS OPTIONAL WITHIN ZONE DEFINED BY ØD AND J.
3. MINIMUM DIAMETER OF SEATING PLANE.
4. A CHAMFER (OR UNDERCUT) ON ONE OR BOTH ENDS OF HEXAGONAL PORTION IS OPTIONAL.
5. MINIMUM DIFFERENCE IN TERMINAL LENGTHS TO ESTABLISH DATUM LINE FOR NUMBERING TERMINALS.
6. PITCH DIAMETER - THREAD 10-32 NF-2A (COATED). REFERENCE (SCREW THREAD STANDARDS FOR FEDERAL SERVICES 1957) HANDBOOK 1957 H28.
7. MINIMUM SPACING BETWEEN TERMINALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-66

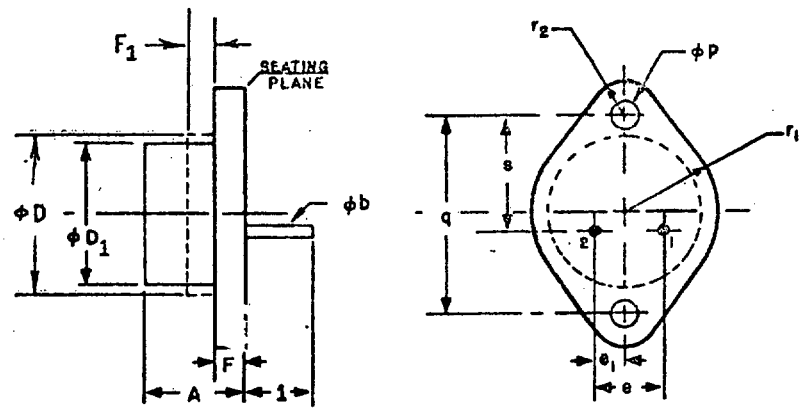

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
A	.250	.340	
Øb	.028	.034	
ØD		.620	
$ØD_1$	.470	.500	
e	.190	.210	
e_1	.093	.107	
F	.050	.075	2
F_1		.050	1
l	.360		
Øp	.142	.152	
q	.958	.962	
r_1		.350	
r_2		.145	
s	.570	.590	


NOTES:

1. THE OUTLINE CONTOUR IS OPTIONAL WITHIN ZONE DEFINED BY ØD AND F_1.
2. DIMENSION DOES NOT INCLUDE SEALING FLANGES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-72

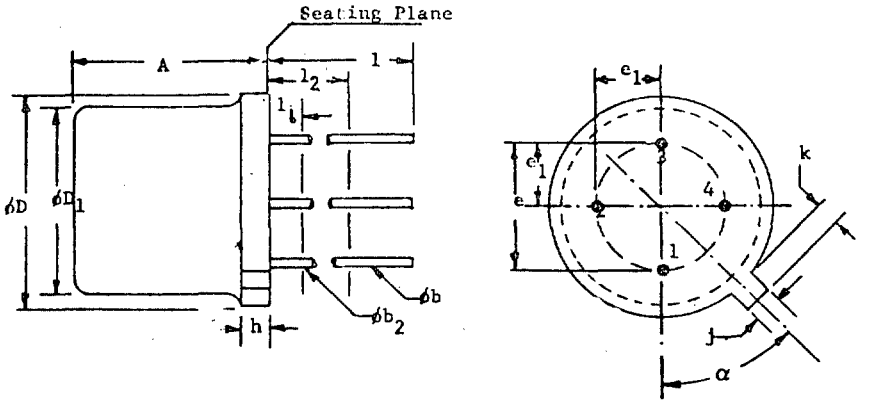

SYMBOL	INCHES MIN.	MAX.	NOTES
A	.170	.210	
øb	.016	.021	2
$øb_2$	.016	.019	2
øD	.209	.230	
$øD_1$	.178	.195	
e	.100 T.P.		4
e_1	.050 T.P.		4
h		.030	
j	.036	.046	
k	.028	.048	3
l	.500		2
l_1		.050	2
l_2	.250		2
α	45° T.P.		4, 6


NOTES:

1. (FOUR LEADS). MAXIMUM NUMBER OF LEADS OMITTED IN THIS OUTLINE, "NONE" (0). THE NUMBER AND POSITION OF LEADS ACTUALLY PRESENT ARE INDICATED IN THE PRODUCT REGISTRATION. OUTLINE DESIGNATION DETERMINED BY THE LOCATION AND MINIMUM ANGULAR OR LINEAR SPACING OF ANY TWO ADJACENT LEADS.
2. (ALL LEADS) $øb_2$ APPLIES BETWEEN l_1 AND l_2. øb APPLIES BETWEEN l_2 AND .500" FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN l_1 AND BEYOND .500" FROM SEATING PLANE.
3. MEASURED FROM MAXIMUM DIAMETER OF THE PRODUCT.
4. LEADS HAVING MAXIMUM DIAMETER .019" + .001" - .000" MEASURED IN GAGING PLANE .054" BELOW THE SEATING PLANE OF THE PRODUCT SHALL BE WITHIN .007" OF THEIR TRUE POSITION RELATIVE TO A MAXIMUM WIDTH TAB.
5. THE PRODUCT MAY BE MEASURED BY DIRECT METHODS OR BY GAGE.
6. TAB CENTERLINE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-77

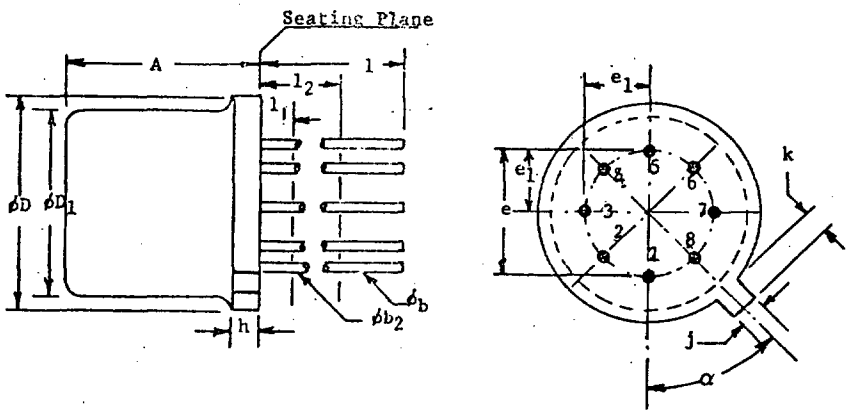

SYMBOL	INCHES MIN.	MAX.	NOTES
A	.240	.260	
Øb	.016	.021	2
$Øb_2$	.016	.019	2
ØD	.335	.370	
$ØD_1$	.305	.335	
e	.200 T.P.		4
e_1	.100 T.P.		4
h		.040	
j	.028	.034	
k	.029	.045	3
l	.500		2
l		.050	2
l_2	.250		2
α	45° T.P.		4, 6


NOTES:

1. (EIGHT LEADS). MAXIMUM NUMBER OF LEADS OMITTED IN THIS OUTLINE, "THREE" (3). THE NUMBER AND POSITION OF LEADS ACTUALLY PRESENT ARE INDICATED IN THE PRODUCT REGISTRATION. OUTLINE DESIGNATION DETERMINED BY THE LOCATION AND MINIMUM ANGULAR OR LINEAR SPACING OF ANY TWO ADJACENT LEADS.
2. (ALL LEADS) $Øb_2$ APPLIES BETWEEN l_1 AND l_2. Øb APPLIES BETWEEN l_2 AND .500" (12.70 MM) FROM SEATING PLANE. DIAMETER IS UNCONTROLLED IN l_1 AND BEYOND .500" (12.70 MM) FROM SEATING PLANE.
3. MEASURED FROM MAXIMUM DIAMETER OF THE PRODUCT.
4. LEADS HAVING MAXIMUM DIAMETER .019" + .001" - .000" MEASURED IN GAGING PLANE .054" BELOW THE SEATING PLANE OF THE PRODUCT SHALL BE WITHIN .007" OF THEIR TRUE POSITION RELATIVE TO A MAXIMUM WIDTH TAB.
5. THE PRODUCT MAY BE MEASURED BY DIRECT METHODS OR BY GAGE.
6. TAB CENTERLINE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-83

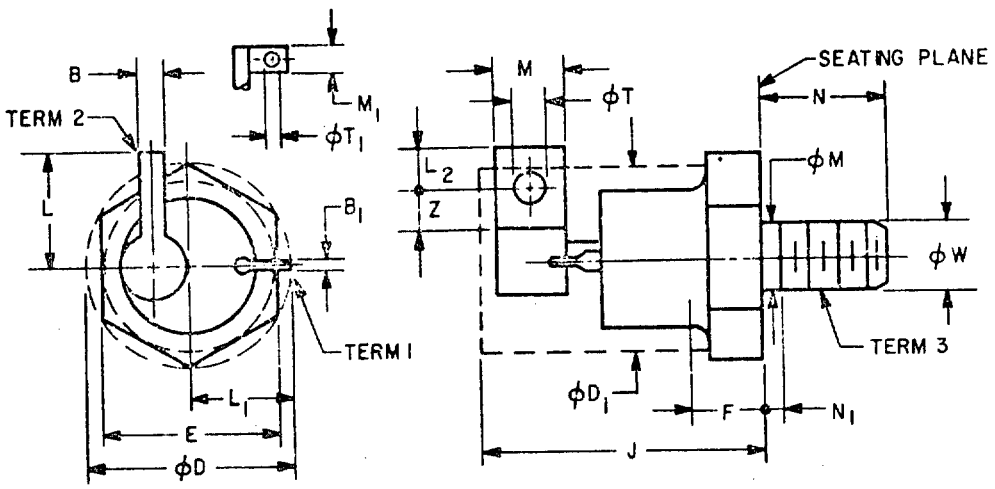

SYMBOL	INCHES MIN.	INCHES MAX.	NOTES
B	.060	.115	1
B_1	.012	.050	1
ØD	-	1.227	-
$ØD_1$	-	1.031	2
E	1.031	1.063	-
F	.170	.500	3
J	-	1.810	2
L	-	.650	2
L_1	-	.575	2
L_2	.180	-	-
M	.360	.470	1
M_1	.115	.160	1
ØM	.425	.499	4
N	.797	.827	-
N_1	-	.125	4
ØT	.180	.260	-
$ØT_1$	.060	.080	-
ØW	.4619	.4675	5
Z	.180	-	6


NOTES:

1. CONTOUR AND ORIENTATION OF FIXED TERMINAL LUGS ARE UNDEFINED.
2. THE BODY AND TERMINALS OF THE DEVICE, WITH THE EXCEPTION OF THE EXTENDED LUG LENGTH L AND L1, LIES WITHIN THE CYLINDER DEFINED BY ØD1 AND LENGTH J.
3. A CHAMFER (OR UNDERCUT) ON ONE OR BOTH ENDS OF THE HEXAGONAL PORTIONS IS OPTIONAL.
4. LENGTH OF INCOMPLETE OR UNDERCUT THREADS OF ØM.
5. PITCH DIA. OF 1/2-20 UNF -2A (COATED) THREADS (ASA B1.1-1960).
6. MINIMUM FLAT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-94

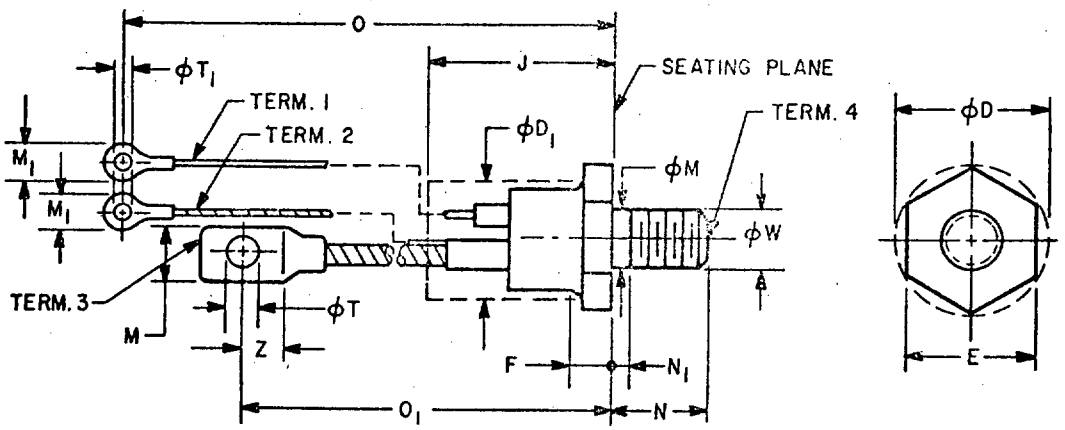

SYMBOL	INCHES MIN.	MAX.	NOTES
ØD	-	1.227	-
$ØD_1$	-	1.031	1
E	1.031	1.063	-
F	.170	.500	5
J	-	2.500	1,7
M	.437	.650	2
ØM	.425	.499	3
M_1	.215	.300	2,8
N	.797	.827	-
N_1	-	.125	3
O	6.850	7.500	-
O_1	5.775	6.265	-
ØT	.260	.310	-
$ØT_1$	.140	.150	-
ØW	.4619	.4675	4
Z	.250	-	6


NOTES:

1. THE DEVICE WITH THE EXCEPTION OF THE HEXAGON, THREAD, AND FLEXIBLE LEAD EXTENSION LIES WITHIN THE CYLINDER DEFINED BY $ØD_1$ AND LENGTH J.
2. ANGULAR ORIENTATION OF THESE TERMINALS WITH RESPECT TO HEXAGONAL PORTION IS UNDEFINED. SQUARE OR RADIUS ON END OF TERMINALS IS OPTIONAL.
3. LENGTH OF INCOMPLETE OR UNDERCUT THREADS OF ØM.
4. PITCH DIAMETER OF 1/2-20 UNF-2A (COATED) THREADS (ASA B1.1-1960).
5. A CHAMFER (OR UNDERCUT) ON ONE OR BOTH ENDS OF HEXAGONAL PORTION IS OPTIONAL.
6. MINIMUM FLAT.
7. SEATED HEIGHT WITH LEADS BENT AT RIGHT ANGLES.
8. FLEXIBLE LEADS FOR TERM 1 AND 2 ARE IDENTIFIED BY COLOR CODING FOR SPECIFIC APPLICATIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-99

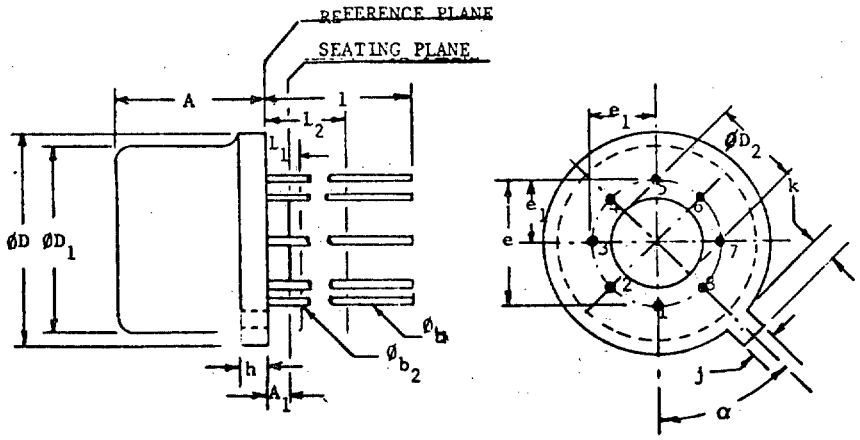

SYMBOL	INCHES MIN.	MAX.	NOTES
A	.165	.185	
A_1	.010	.040	
$Øb_1$	.016	.021	2
$Øb_2$	.016	.019	2
$ØD_2$	.335	.370	
$ØD_1$	.305	.335	
$ØD_2$	.140	.160	
e	.200 T.P.		4
e_1	.100 T.P.		4
h_1		.040	
j	.028	.034	
k	.029	.045	3
l	.500		2
l_1		.050	2
l_2	.250		2
α	45° T.P.		4,6


NOTES:

1. (EIGHT LEADS). MAXIMUM NUMBER OF LEADS OMITTED IN THIS OUTLINE, "THREE" (3). THE NUMBER AND POSITION OF LEADS ACTUALLY PRESENT ARE INDICATED IN THE PRODUCT REGISTRATION. OUTLINE DESIGNATION DETERMINED BY THE LOCATION AND MINIMUM ANGULAR SPACING OF ANY TWO ADJACENT LEADS.
2. (ALL LEADS) $Øb_2$ APPLIES BETWEEN l_1 and l_2. Øb APPLIES BETWEEN l_2 AND .500" FROM REFERENCE PLANE. DIAMETER IS UNCONTROLLED IN l_1 and BEYOND .500" FROM REFERENCE PLANE.
3. MEASURED FROM MAXIMUM DIAMETER OF THE PRODUCT.
4. LEADS HAVING MAXIMUM DIAMETER .019" MEASURED IN GAGING PLANE .054" + .001" - .000" BELOW THE REFERENCE PLANE OF THE PRODUCT SHALL BE WITHIN .007" OF THEIR TRUE POSITION RELATIVE TO A MAXIMUM WIDTH TAB.
5. THE PRODUCT MAY BE MEASURED BY DIRECT METHODS OR BY GAGE.
6. TAB CENTERLINE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-111

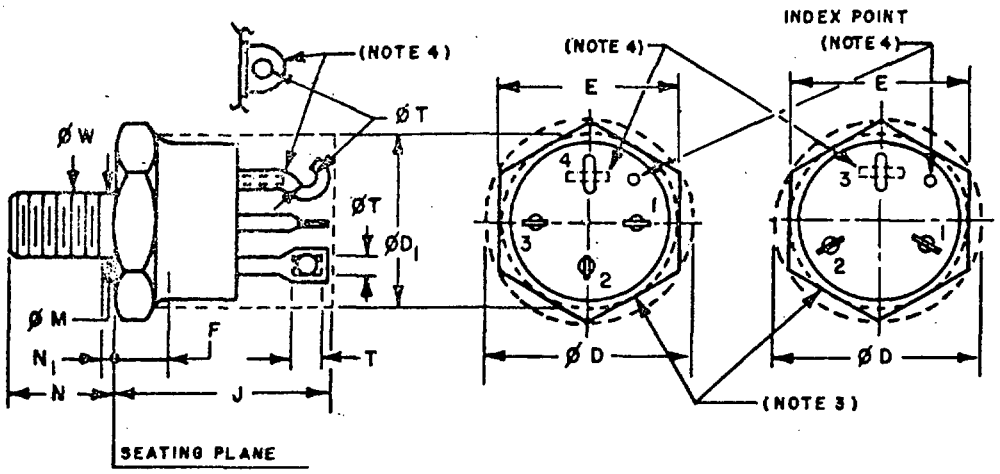

SYMBOL	INCHES MIN	INCHES MAX	NOTES
ØD	—	.505	
$ØD_1$	.330	.423	1
E	.423	.438	2
F	.090	.250	5
J	.570	.763	1
ØM	.155	.189	6
N	.400	.455	
N_1	—	.078	6
ØT	.040	.070	
T	—	.090	7
ØW	.1658	.1697	8


NOTES:

1. Device body and terminals (with exception of hexagon) lie within the cylinder diameter $ØD_1$ and length J.
2. Position of terminals in relation to the hexagon is not controlled.
3. Four terminals. Omission of a maximum of one terminal is optional. Position of the terminals is optional. The number and position of terminals actually present are indicated in the product registration.
4. The use of either a hook, short tab, or tall tab terminal contour is optional. An index point is required when the tall tab terminal contour (identical to the adjacent terminals) option is used.
5. A chamfer (or undercut) on one or both ends of hexagonal portion is optional.
6. Incomplete or undercut threads.
7. Elongated hole in tab is optional.
8. Pitch diameter of 10-32 UNF-2A coated threads (ASA B1.1-1960).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-114

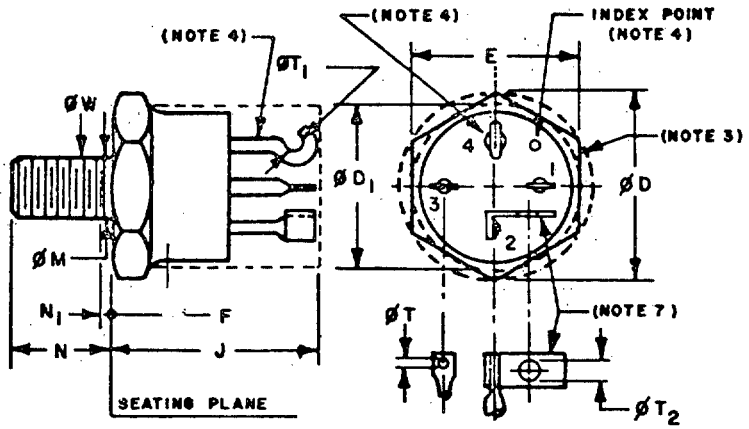


SYMBOL	INCHES MIN	INCHES MAX	NOTES
ØD	—	1.227	
$ØD_1$	.885	1.031	1
E	1.031	1.063	2
F	.090	.400	5
J	1.048	1.750	1
ØM	.425	.500	6
N	.781	.828	
N_1	—	.156	6
ØT	.078	.109	
$ØT_1$	.234	.281	
$ØT_2$	.180	.210	7
ØW	.4619	.4675	8

NOTES:
1. Device body and terminals (with exception of hexagon) lie within the cylinder diameter $ØD_1$ and length J.
2. Position of terminals in relation to the hexagon is not controlled.
3. Four terminals. Omission of a maximum of one terminal is optional. Position of the terminals is optional. The number and position of terminals actually present are indicated in the product registration.
4. The use of either a hook or tab terminal contour is optional. An index point is required when the tab terminal (identical to the adjacent terminals) contour option is used.
5. A chamfer (or undercut) on one or both ends of hexagonal portion is optional.
6. Incomplete or undercut threads.
7. Use of tab extension is optional.
8. Pitch diameter of $\frac{1}{2}$-20 UNF-2A (coated) threads (ASA B1.1-1960).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-208

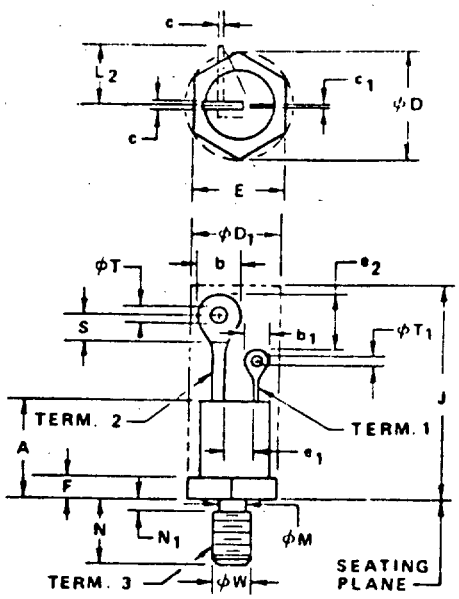

NOTES:


1. Refer to applicable symbol list.
2. Dimensioning and tolerancing per ANSI Y14.5-1966.
3. Device contour except on noted dimensions is optional within zone defined by ϕD_1 and J. ϕD_1 not to exceed actual E.
4. A chamfer (or undercut) on one or both ends of the hexagonal portion is optional.
5. Position of leads in relation to hexagon is not controlled.
6. Angular orientation of terminal(s) is optional.
7. Minimum flat.
8. Minimum difference in terminal lengths to establish datum line for numbering terminals.
9. Coated threads shall meet the requirements of ANSI B1.1-1960.

SYMBOL	DIMENSIONS		NOTE
	IN INCHES		
	MIN.	MAX.	
A	.330	.505	
b	.210	.300	5,6
b_1	-	.140	5,6
c	-	-	
c_1	-	-	
φD	-	.650	
ϕD_1	-	.544	3
E	.545	.563	
e_1	-	-	
e_2	.125	-	8
F	.075	.200	4
J	-	1.193	3
L_2	-	-	
φM	.223	.249	
N	.422	.453	
N_1	-	.089	
S	.120	-	7
S_1	-	-	
φT	.125	.165	
ϕT_1	.060	-	
φW	1/4-28 UNF-2A		9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-209

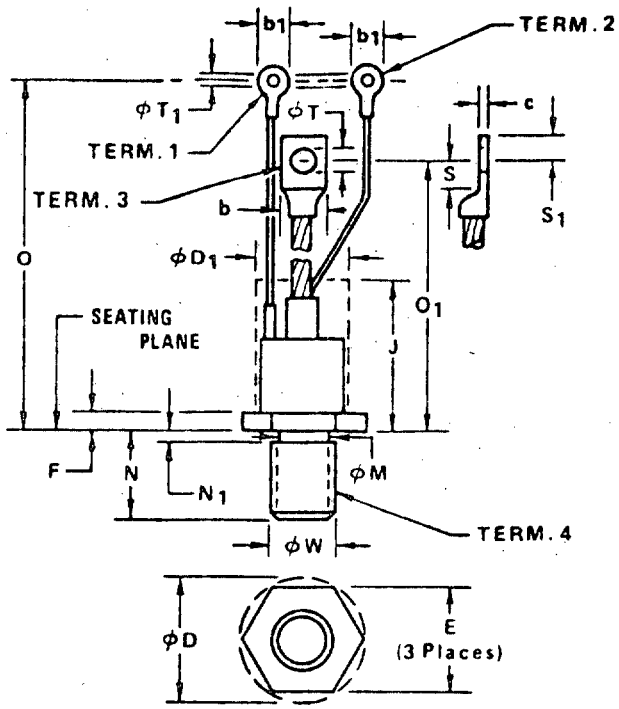

NOTES:


1. Refer to applicable symbol list.
2. Dimensioning and tolerancing per ANSI Y14.5-1966.
3. Device contour except on noted dimensions is optional within zone defined by ϕD_1 and J. ϕD_1 not to exceed actual E.
4. A chamfer (or undercut) on one or both ends of the hexagonal portion is optional.
5. Seated height with lead bent at right angles.
6. Flexible leads for terminals 1 & 2 are identified by color coding for specific applications.
7. Position of leads in relation to hexagon is not controlled.
8. Angular orientation of terminal(s) is optional.
9. Terminal 2 omitted.
10. Minimum flat.
11. Coated threads shall meet the requirements of ANSI B1.1-1960.
12. Controlling dimensions: inch.

SYMBOL	DIMENSIONS		NOTE
	INCHES		
	MIN.	MAX.	
b	.437	.650	8
b_1	.215	.300	7,8
c	.055	.110	
φD	-	1.227	
ϕD_1	-	1.031	3
E	1.031	1.063	
F	.170	.500	4
J	-	2.500	3,5
φM	.462	.499	
N	.797	.827	
N_1	-	.125	
O	6.850	7.500	
O_1	5.775	6.265	
S	.250	-	10
S_1	-	.325	
φT	.250	.310	
ϕT_1	.140	.150	
φW	1/2-20 UNF-2A		11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-212

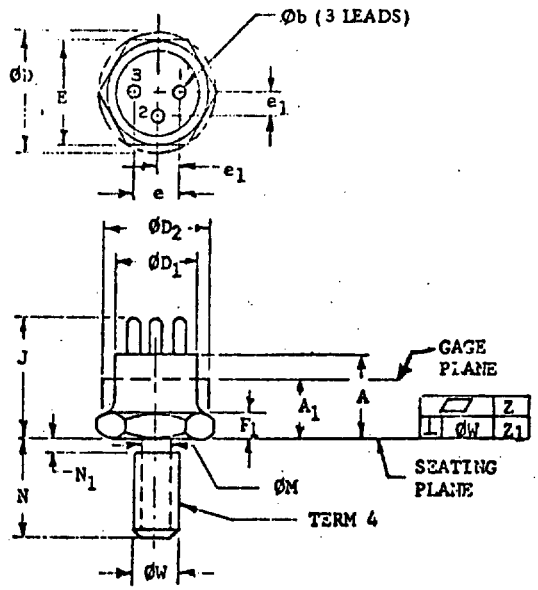

NOTES:


1. Refer to rules for dimensioning semiconductor product outlines in Publication No. 76.
2. Chamfer or undercut on one or both ends of hexagonal portion is optional.
3. The device contour with the exception of the hexagon is optional within cylinder defined by $ØD_2$ and A_1, $ØD_2$ not to exceed actual E.
4. Angular orientation of terminals with respect to hexagon is optional.
5. Pins within .203 DIA of True Position (TP) at Maximum Material Condition (MMC) relative to $ØD_1$ at MMC and $ØD_2$ at MMC.
6. ØW is pitch diameter of coated threads. Ref: Screw Thread Standards for Federal Services, Handbook H28 Part 1.

SYMBOL	DIMENSIONS IN INCHES MIN.	MAX.	NOTE
A	.215	.320	
A_1	—	.165	3
Øb	.035	.045	
ØD	—	.505	
$ØD_1$	.320	.360	
$ØD_2$	.360	.437	3
E	.423	.438	
e	.200 TP		4, 5
e_1	.100 TP		4, 5
F_1	.115	.135	2
J	.385	.455	
ØM	.163	.189	
N	.422	.455	
N_1	—	.078	
ØW	10-32 UNF-2A		6
Z	—	.002	
Z_1	—	.006	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

TO-214

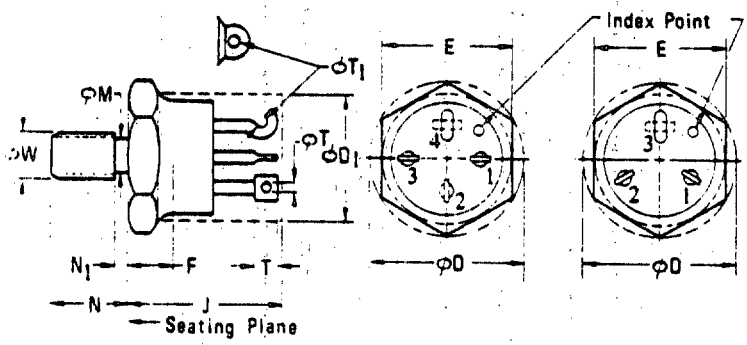

SYMBOL	DIMENSIONS IN INCHES		NOTE
	MIN.	MAX.	
ØD	-	.505	
$ØD_1$	.330	.423	3
E	.423	.438	4
F	.090	.250	5
J	.570	.763	3
ØM	.155	.189	
N	.400	.455	
N_1	-	.078	9
ØT	.040	.070	
$ØT_1$	.040	.070	6
$ØT_2$	-	-	
T	-	.090	7
ØW	10-32	UNF-2A	

NOTES:


1. REFER TO APPLICABLE SYMBOL LIST.
2. DIMENSIONING & TOLERANCING PER ANSI Y14.5-1973.
3. DEVICE BODY AND TERMINALS (WITH EXCEPTION OF HEXAGON) LIE WITHIN THE CYLINDER DIAMETER ØD AND THE LENGTH J.
4. ORIENTATION OF TERMINAL GROUPING IN RELATION TO HEXAGON IS NOT CONTROLLED.
5. A CHAMFER (OR UNDERCUT) ON ONE OR BOTH ENDS OF HEXAGONAL PORTION IS OPTIONAL.
6. THE USE OF EITHER A HOOK, A SHORT TAB, OR TALL TAB TERMINAL CONTOUR IS OPTIONAL. AN INDEX POINT IS REQUIRED WHEN THE TALL TAB TERMINAL CONTOUR (IDENTICAL TO THE ADJACENT TERMINALS) OPTION IS USED.
7. ELONGATED HOLE IN TAB IS OPTIONAL.
8. FOUR TERMINALS. OMISSION OF A MAXIMUM OF ONE TERMINAL IS OPTIONAL. POSITION OF THE TERMINALS ACTUALLY PRESENT ARE INDICATED IN THE PRODUCT REGISTRATION.
9. LENGTH OF INCOMPLETE OR UNDERCUT THREADS AT ØM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

OUTLINE DRAWING

V-503

SEMICONDUCTOR DEVICE, DIODE, LIGHT EMITTING

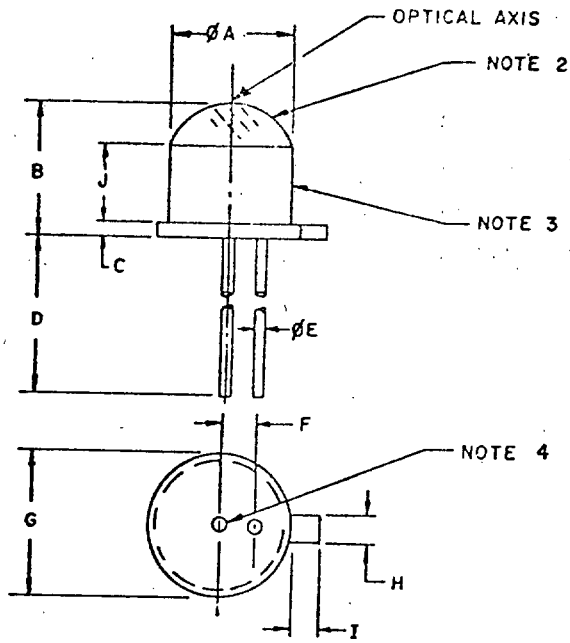

DIMENSIONS		
LTR	INCHES	
	MIN	MAX
ØA	.176	.190
B	.180	.225
C	.016	.024
D	.970	1.030
ØE	.016	.019
F	.045	.055
G	.200	.220
H	.035	.045
I	.032	.042
J	.139	

NOTES:

1. Red lens.
2. Glass/metal hermetic can.
3. Cathode lead; both leads isolated from case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTERS,DIODE

VOLTAGE-VARIABLE CAPACITOR MIL-S-19500 QPL-19500

TYPE PART NO	SPEC	OUT DWG	CAP @ Vr=4Vdc			CAP(RATIO)VR1 TO VR2				VRWM	VBR	Q AT 50MHz
			NOM	MIN	MAX	MIN	MAX	Vdc	Vdc	Vpk	Vdc	VR=4Vdc
			pF	pF	pF							MIN
JANTX*1N5139A	383	D07	6.8	6.46	7.14	2.7		4	60	60	65	350
JANTX*1N5140A	383	D07	10.0	9.50	10.50	2.8		4	60	60	65	300
JANTX*1N5141A	383	D07	12.0	11.40	12.60	2.8		4	60	60	65	300
JANTX*1N5142A	383	D07	15.0	14.30	15.70	2.8		4	60	60	65	250
JANTX*1N5143A	383	D07	18.0	17.10	18.90	2.8		4	60	60	65	250
JANTX*1N5144A	383	D07	22.0	20.09	23.10	3.2		4	60	60	65	200
JANTX*1N5145A	383	D07	27.0	25.70	28.30	3.2		4	60	60	65	200
JANTX*1N5146A	383	D07	33.0	31.40	30.60	3.2		4	60	60	65	200
JANTX*1N5147A	383	D07	39.0	37.10	40.90	3.2		4	60	60	65	200
JANTX*1N5148A	383	D07	47.0	44.70	49.30	3.2		4	60	60	65	200
JANTX *N5473C	436	D07	56.0	54.88	57.12	2.9	3.3	2	30	30	30	300
JANTX 1N5474C	436	D07	68.0	66.64	69.36	2.9	3.3	2	30	30	30	250
JANTX 1N5475C	436	D07	82.0	80.36	83.64	2.9	3.3	2	30	30	30	225
JANTX 1N5476C	436	D07	100.0	98.00	102.0	2.9	3.3	2	30	30	30	200

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, DIODE

GENERAL PURPOSE DIODES AND RECTIFIERS MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	VRM Vpk	VR Vdc	VRWM Vpk	IO Adc	IFSM a	VF @ IF MAX Vdc	VF @ IF MAX Adc	IR uAdc	MAX IR @ VRWM 100°C mAdc	MAX IR @ VRWM 150°C mAdc
JANTX 1N1186R*	297	D05	240	200	200	35.00	500	1.4	110			3.0
JANTX 1N1188R*	297	D05	480	400	400	35.00	500	1.4	110			3.0
JANTX 1N1190R*	297	D05	720	600	600	35.00	500	1.4	110			3.0
JANTX 1N1202A**	260	D04	240		200	12.00	240	1.35	38	50		1.000
JANTX 1N1204A**	260	D04	480		400	12.00	240	1.35	38	50		1.000
JANTX 1N1206A**	260	D04	720		600	12.00	240	1.35	38	50		1.000
JANTX 1N3644	279	D0204		1500		.250	14	5.00	.250	5	.100	
JANTX 1N3645	279	D0204		2000		.250	14	5.00	.250	5	.100	
JANTX 1N3646	279	D0204		2500		.250	14	5.00	.250	5	.100	
JANTX 1N3647	279	D0204		3000		.250	14	5.00	.250	5	.100	
JANTX 1N3671A**	260	D04	960		800	12	240	1.35	38	50		1.000
JANTX 1N3673A**	260	D04	1200		1000	12	240	1.35	38	50		1.000
JANTXR1N3766**	297	D05	960	800	800	35	500	1.40	110			3
JANTX 1N3768R*	297	D05	1200	1000	1000	35	500	1.40	110			3
JANTXR1N5551	420	D0204	440	400	400	3	100	1.2	9	1	.075	
JANTXR1N5552	420	D0204	660	600	600	3	100	1.2	9	1	.075	
JANTXR1N5553	420	D0204	880	800	800	3	100	1.2	9	1	.075	
JANTXR1N5554	420	D0204	1100	1000	1000	3	100	1.2	9	1	.075	
JANTXR1N5616	427	D0204	440	400	400	1	30	1.3	3	.5	.025	
JANTXR1N5618	427	D0204	660	600	600	1	30	1.3	3	.5	.025	
JANTXR1N5620	427	D0204	880	800	800	1	30	1.3	3	.5	.025	
JANTXR1N5622	427	D0204	1100	1000	1000	1	30	1.3	3	.5	.025	

R--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
**-PARTS OF EITHER POLARITY ARE APPROVED FOR USE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTERS,DIODE

VOLTAGE REFERENCE MIL-S-19500 GPL-19500

TYPE PART NO	SPEC	OUT DWG	PT	Vz @ Iz		TEMP STAB	MAX Iz	Zz AT Iz	
				MIN	MAX				
			mW	VOLTS	VOLTS	VOLTS	mAdc	OHMS	mAdc
JANTX*1N821-1	159	D07	250	5.90	6.50	.096	35	15	7.5
JANTX*1N823-1	159	D07	250	5.90	6.50	.048	35	15	7.5
JANTX*1N825-1	159	D07	250	5.90	6.50	.019	35	15	7.5
JANTX*1N827-1	159	D07	250	5.90	6.50	.009	35	15	7.5
JANTX*1N829-1	159	D07	250	5.90	6.50	.005	35	15	7.5
JANTX*1N935B	156	D07	500	8.55	9.45	.184	50	20	7.5
JANTX*1N937B	156	D07	500	8.55	9.45	.037	50	20	7.5
JANTX*1N938B	156	D07	500	8.55	9.45	.018	50	20	7.5
JANTX*1N939B	156	D07	500	8.55	9.45	.009	50	20	7.5
JANTX*1N940B	156	D07	500	8.55	9.45	.0037	50	20	7.5
JANTX 1N941B	157	D07	500	11.12	12.28	.239	45	30	7.5
JANTX 1N943B	157	D07	500	11.12	12.28	.047	45	30	7.5
JANTX 1N944B	157	D07	500	11.12	12.28	.024	45	30	7.5
JANTX 1N945B	157	D07	500	11.12	12.28	.012	45	30	7.5
JANTX*1N3154	158	D07	500	7.98	8.82	.130	55	15	10
JANTX*1N3155	158	D07	500	7.98	8.82	.065	55	15	10
JANTX*1N3156	158	D07	500	7.98	8.82	.026	55	15	10
JANTX*1N3157	158	D07	500	7.98	8.82	.013	55	15	10
JANTX*1N4565A	452	D07	400	6.08	6.72	.100	60	200	.5
JANTX*1N4566A	452	D07	400	6.08	6.72	.050	60	200	.5
JANTX*1N4567A	452	D07	400	6.08	6.72	.020	60	200	.5
JANTX*1N4568A	452	D07	400	6.08	6.72	.010	60	200	.5
JANTX*1N4569A	452	D07	400	6.08	6.72	.005	60	200	.5
JANTX*1N4570A	452	D07	400	6.08	6.72	.100	60	100	1.0
JANTX*1N4571A	452	D07	400	6.08	6.72	.050	60	100	1.0
JANTX*1N4572A	452	D07	400	6.08	6.72	.020	60	100	1.0
JANTX*1N4573A	452	D07	400	6.08	6.72	.010	60	100	1.0
JANTX*1N4574A	452	D07	400	6.08	6.72	.005	60	100	1.0

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, DIODE

VOLTAGE REGULATOR — MIL-S-19500 — QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT	Vz			Vz (REG)	αVz	Zz @ Iz		IRSM
				NOM	MIN	MAX		%/°C			
			W	Vdc	Vdc	Vdc	Vdc		OHMS	mAdc	A
JANTX*1N746A-1	127	D0204	.40	3.3	3.14	3.46	1.0	-.070	24	20	1.0
JANTX*1N747A-1	127	D0204	.40	3.6	3.42	3.78	1.0	-.065	22	20	1.0
JANTX*1N748A-1	127	D0204	.40	3.9	3.71	4.09	1.0	-.060	20	20	1.0
JANTX*1N749A-1	127	D0204	.40	4.3	4.09	4.51	1.0	-.055,+.020	18	20	.990
JANTX*1N750A-1	127	D0204	.40	4.7	4.47	4.93	1.0	-.043,+.025	16	20	.980
JANTX*1N751A-1	127	D0204	.40	5.1	4.85	5.35	0.8	-.030,+.030	14	20	.960
JANTX*1N752A-1	127	D0204	.40	5.6	5.32	5.88	0.8	-.028,+.038	8	20	.950
JANTX*1N753A-1	127	D0204	.40	6.2	5.89	6.51	0.6	+.045	3	20	.910
JANTX*1N754A-1	127	D0204	.40	6.8	6.46	7.14	0.4	+.050	3	20	.870
JANTX*1N755A-1	127	D0204	.40	7.5	7.13	7.87	0.4	+.058	4	20	.810
JANTX*1N756A-1	127	D0204	.40	8.2	7.79	8.61	0.4	+.062	5	20	.740
JANTX*1N757A-1	127	D0204	.40	9.1	8.65	9.55	0.5	+.068	6	20	.650
JANTX*1N758A-1	127	D0204	.40	10.0	9.50	10.50	0.7	+.075	7	20	.540
JANTX*1N759A-1	127	D0204	.40	12.0	11.40	12.60	1.0	+.08	10	20	.400
JANTX*1N2804B**	114	T03	50	6.8	6.46	7.14	.4	.057	.2	1850	37.0
JANTX*1N2805B**	114	T03	50	7.5	7.13	7.87	.5	.067	.3	1700	33.0
JANTX*1N2806B**	114	T03	50	8.2	7.79	8.61	.6	.070	.4	1500	29.0
JANTX*1N2807B**	114	T03	50	9.1	8.65	9.55	.7	.075	.5	1370	26.5
JANTX*1N2808B**	114	T03	50	10.0	9.50	10.50	.9	.081	.6	1200	24.0
JANTX*1N2809B**	114	T03	50	11.0	10.45	11.55	1.0	.085	.8	1100	21.5
JANTX*1N2810B**	114	T03	50	12.0	11.40	12.60	1.1	.079	1.0	1000	20.0
JANTX*1N2811B**	114	T03	50	13.0	12.35	13.65	1.2	.080	1.1	960	18.5
JANTX*1N2813B**	114	T03	50	15.0	14.25	15.75	1.5	.082	1.4	830	15.5
JANTX*1N2814B**	114	T03	50	16.0	15.20	16.80	1.6	.083	1.6	780	14.75
JANTX*1N2816B**	114	T03	50	18.0	17.10	18.90	1.9	.085	2.0	700	12.75
JANTX*1N2818B**	114	T03	50	20.0	19.00	21.00	2.3	.086	2.4	630	11.75
JANTX*1N2819B**	114	T03	50	22.0	20.00	23.10	2.5	.087	2.5	570	10.5
JANTX*1N2820B**	114	T03	50	24.0	22.80	25.25	2.6	.088	2.6	520	9.75
JANTX*1N2822B**	114	T03	50	27.0	25.65	28.35	2.9	.090	2.8	460	8.25
JANTX*1N2823B**	114	T03	50	30.0	28.50	31.50	3.0	.091	3.0	420	7.75
JANTX*1N2824B**	114	T03	50	33.0	31.35	34.65	3.2	.092	3.2	380	7.25
JANTX*1N2825B**	114	T03	50	36.0	34.20	37.80	3.4	.093	3.5	350	6.50
JANTX*1N2826B**	114	T03	50	39.0	37.10	40.90	3.6	.094	4.0	320	5.88
JANTX*1N2827B**	114	T03	50	43.0	40.90	45.10	3.8	.095	4.5	290	5.38
JANTX*1N2829B**	114	T03	50	47.0	44.65	49.35	4.0	.095	5.2	270	4.90
JANTX*1N2831B**	114	T03	50	51.0	48.45	53.55	4.4	.096	6.0	245	4.63
JANTX*1N2832B**	114	T03	50	56.0	53.20	58.80	4.75	.096	7.0	220	4.13
JANTX*1N2833B**	114	T03	50	62	58.90	65.10	5.0	.097	7.0	200	3.68
JANTX*1N2834B**	114	T03	50	68	64.60	71.40	5.5	.097	8.0	180	3.35
JANTX*1N2835B**	114	T03	50	75	71.25	78.75	5.75	.098	9.0	170	3.00
JANTX*1N2836B**	114	T03	50	82	77.90	86.10	6.25	.098	11.0	150	2.75
JANTX*1N2837B**	114	T03	50	91	86.45	95.55	6.75	.099	15.0	140	2.35
JANTX*1N2838B**	114	T03	50	100	95.00	105.0	7.50	.100	20.0	120	2.25
JANTX*1N2840B**	114	T03	50	110	104.5	115.5	9.00	.100	30.0	110	2.05
JANTX*1N2841B**	114	T03	50	120	114.0	126.0	9.50	.100	40.0	100	1.88
JANTX*1N2842B**	114	T03	50	130	123.5	136.5	10.00	.100	50.0	95	1.73
JANTX*1N2843B**	114	T03	50	150	142.5	157.5	12.00	.100	75.0	85	1.50
JANTX*1N2844B**	114	T03	50	160	152.0	168.0	13.00	.100	80.0	80	1.43

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
**--PARTS OF EITHER POLARITY ARE APPROVED FOR USE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, DIODE

VOLTAGE REGULATOR MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT	Vz			Vz (REG)	aVz %/ C	Zz @ Iz		IRSM
				NOM	MIN	MAX					
			W	Vdc	Vdc	Vdc	Vdc		OHMS	mAdc	A
JANTX*1N2845B**	114	T03	50	180	171.0	189.0	14.50	.100	90.0	68	1.25
JANTX*1N2846B**	114	T03	50	200	190.0	210.0	16.00	.100	100.0	65	1.10
JANTX*1N2970B**	124	D04	10	6.8	6.46	7.14	.40	+.057	1.2	370	7.50
JANTX*1N2971B**	124	D04	10	7.5	7.13	7.87	.45	+.061	1.3	335	6.75
JANTX*1N2972B**	124	D04	10	8.2	7.79	8.61	.50	+.065	1.5	305	5.90
JANTX*1N2973B**	124	D04	10	9.1	8.65	9.55	.55	+.068	2.0	275	5.50
JANTX*1N2974B**	124	D04	10	10.0	9.50	10.50	.60	+.071	3.0	250	4.90
JANTX*1N2975B**	124	D04	10	11.0	10.45	11.55	.70	+.073	3.0	230	4.45
JANTX*1N2976B**	124	D04	10	12.0	11.40	12.60	.80	+.076	3.0	210	4.10
JANTX*1N2977B**	124	D04	10	13.0	12.35	13.65	.85	+.079	3.0	190	3.75
JANTX*1N2979B**	124	D04	10	15.0	14.25	15.75	1.00	+.082	3.0	170	3.20
JANTX*1N2980B**	124	D04	10	16.0	15.20	16.80	1.10	+.083	4.0	155	3.00
JANTX*1N2982B**	124	D04	10	18.0	17.10	18.90	1.25	+.085	4.0	140	2.60
JANTX*1N2984B**	124	D04	10	20	19.0	21.0	1.35	+.086	4.0	125	
JANTX*1N2985B**	124	D04	10	22	20.9	23.1	1.40	+.087	5.0	115	
JANTX*1N2986B**	124	D04	10	24	22.8	25.2	1.45	+.088	5.0	105	
JANTX*1N2988B**	124	D04	10	27	25.7	28.3	1.55	+.090	7.0	95	
JANTX*1N2989B**	124	D04	10	30	28.5	31.5	1.60	+.091	8.0	85	
JANTX*1N2990B**	124	D04	10	33	31.4	34.6	1.70	+.092	9.0	75	
JANTX*1N2991B**	124	D04	10	36	34.2	37.8	1.80	+.093	10.0	70	
JANTX*1N2992B**	124	D04	10	39	37.1	40.9	1.90	+.094	11.0	65	
JANTX*1N2993B**	124	D04	10	43	40.9	45.1	2.00	+.095	12.0	60	
JANTX*1N2995B**	124	D04	10	47	44.7	49.3	2.20	+.095	14.0	55	
JANTX*1N2997B**	124	D04	10	51	48.5	53.5	2.30	+.096	15.0	50	
JANTX*1N2999B**	124	D04	10	56	53.2	58.8	2.50	+.096	16.0	45	
JANTX*1N3000B**	124	D04	10	62	58.9	65.1	2.60	+.097	17.0	40	
JANTX*1N3001B**	124	D04	10	68	64.6	71.4	2.70	+.097	18.0	37	
JANTX*1N3002B**	124	D04	10	75	71.3	78.7	2.80	+.098	22.0	33	
JANTX*1N3003B**	124	D04	10	82	77.9	86.1	2.90	+.098	25.0	30	
JANTX*1N3004B**	124	D04	10	91	86.5	95.5	3.00	+.098	35.0	28	
JANTX*1N3005B**	124	D04	10	100	95.0	105.0	3.10	+.110	40.0	25	
JANTX*1N3007B**	124	D04	10	110	104.5	115.5	3.50	+.110	55.0	23	
JANTX*1N3008B**	124	D04	10	120	114.0	126.0	4.00	+.110	75.0	20	
JANTX*1N3009B**	124	D04	10	130	123.5	136.5	5.00	+.110	100.0	19	
JANTX*1N3011B**	124	D04	10	150	142.5	157.5	7.00	+.110	175.0	17	
JANTX*1N3012B**	124	D04	10	160	152.0	168.0	7.50	+.110	200.0	16	
JANTX*1N3014B**	124	D04	10	180	171.0	189.0	8.00	+.110	260.0	14	
JANTX*1N3015B**	124	D04	10	200	190.0	210.0	9.00	+.110	300.0	12	
JANTX 1N3993A**	272	D04	10	3.9	3.70	4.10	.80	-.060	2.0	640	12
JANTX 1N3994A**	272	D04	10	4.3	4.08	4.52	.72	-.050	1.5	580	11
JANTX 1N3995A**	272	D04	10	4.7	4.45	4.94	.68	-.025	1.2	530	10
JANTX 1N3996A**	272	D04	10	5.1	4.84	5.36	.64	-.030	1.1	490	9

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
**--PARTS OF EITHER POLARITY ARE APPROVED FOR USE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, DIODE

VOLTAGE REGULATOR — MIL-S-19500 — QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT	Vz			Vz (REG)	αVz %/ C	Zz@Iz		IRMS
				NOM	MIN	MAX					
			W	Vdc	Vdc	Vdc	Vdc		OHMS	mAdc	A
JANTX 1N3997A**	272	D04	10	5.6	5.32	5.88	.60	-.040	1.0	445	8
JANTX 1N3998A**	272	D04	10	6.2	5.89	6.51	.56	-.045	1.1	405	7
JANTX 1N4370A-1	127	D0204	.40	2.4	2.28	2.52	1.0	-.085	30	20	1.0
JANTX 1N4371A-1	127	D0204	.40	2.7	2.57	2.83	1.0	-.080	30	20	1.0
JANTX 1N4372A-1	127	D0204	.40	3.0	2.85	3.15	1.0	-.075	29	20	1.0
JANTX*1N4460	406	D0204	1.5	6.2	5.89	6.51	.35	+.050	4.0	40	2.3
JANTX*1N4461	406	D0204	1.5	6.8	6.46	7.14	.30	+.057	2.5	37	2.1
JANTX*1N4462	406	D0204	1.5	7.5	7.13	7.87	.35	+.061	2.5	34	1.9
JANTX*1N4463	406	D0204	1.5	8.2	7.79	8.61	.40	+.065	3.0	31	1.7
JANTX*1N4464	406	D0204	1.5	9.1	8.65	9.55	.45	+.068	4.0	28	1.6
JANTX*1N4465	406	D0204	1.5	10.0	9.50	10.50	.50	+.071	5.0	25	1.4
JANTX*1N4466	406	D0204	1.5	11.0	10.45	11.55	.55	+.073	6.0	23	1.3
JANTX*1N4467	406	D0204	1.5	12.0	11.40	12.60	.60	+.076	7.0	21	1.2
JANTX*1N4468	406	D0204	1.5	13.0	12.35	13.65	.65	+.079	8.0	19	1.1
JANTX*1N4469	406	D0204	1.5	15.0	14.25	15.75	.75	+.082	9.0	17	.95
JANTX*1N4470	406	D0204	1.5	16.0	15.20	16.80	.80	+.083	10.0	15.5	.90
JANTX*1N4471	406	D0204	1.5	18.0	17.10	18.90	.83	+.085	11.0	14	.79
JANTX*1N4472	406	D0204	1.5	20.0	19.00	21.00	.95	+.086	12.0	12.5	.71
JANTX*1N4473	406	D0204	1.5	22.0	20.90	23.10	1.00	+.087	14.0	11.5	.65
JANTX*1N4474	406	D0204	1.5	24.0	22.80	25.20	1.10	+.088	16.0	10.5	.60
JANTX*1N4475	406	D0204	1.5	27.0	25.70	28.30	1.30	+.090	18.0	9.5	.53
JANTX*1N4476	406	D0204	1.5	30	28.50	31.50	1.4	+.091	20	8.5	.48
JANTX*1N4477	406	D0204	1.5	33	31.40	34.60	1.5	+.092	25	7.5	.43
JANTX*1N4478	406	D0204	1.5	36	34.20	37.80	1.7	+.093	27	7.0	.40
JANTX*1N4479	406	D0204	1.5	39	37.10	40.90	1.8	+.094	30	6.5	.37
JANTX*1N4480	406	D0204	1.5	43	40.90	45.10	1.9	+.095	40	6.0	.33
JANTX*1N4481	406	D0204	1.5	47	44.70	49.30	2.1	+.095	50	5.5	.30
JANTX*1N4482	406	D0204	1.5	51	48.50	53.50	2.3	+.096	60	5.0	.28
JANTX*1N4483	406	D0204	1.5	56	56.00	58.80	2.5	+.096	70	4.5	.26
JANTX*1N4484	406	D0204	1.5	62	58.90	65.1	2.7	.097	80	4	.23
JANTX*1N4485	406	D0204	1.5	68	64.60	71.4	3.0	.097	100	3.7	.21
JANTX*1N4486	406	D0204	1.5	75	71.30	78.7	3.3	.098	130	3.3	.19
JANTX*1N4487	406	D0204	1.5	82	77.90	86.1	3.6	.098	160	3.0	.17
JANTX*1N4488	406	D0204	1.5	91	86.50	95.5	4.0	.099	200	2.8	.16
JANTX*1N4489	406	D0204	1.5	100	95.00	105.0	4.4	.100	250	2.5	.14
JANTX*1N4490	406	D0204	1.5	110	104.50	115.5	5.0	.100	300	2.3	.13
JANTX*1N4491	406	D0204	1.5	120	114.00	126.0	5.5	.100	400	2.0	.12
JANTX*1N4492	406	D0204	1.5	130	123.50	136.5	6.0	.100	500	1.9	.11
JANTX*1N4493	406	D0204	1.5	150	142.50	157.5	7.0	.100	700	1.7	.095
JANTX*1N4494	406	D0204	1.5	160	152.00	168.0	8.0	.100	1000	1.6	.089
JANTX*1N4495	406	D0204	1.5	180	171.00	189.0	10.0	.100	1300	1.4	.079
JANTX*1N4496	406	D0204	1.5	200	190.00	210.0	12.0	.100	1500	1.2	.072
JANTX*1N4557B**	114	T03	50	3.9	3.70	4.09	0.66	-.050	.16	3200	40.0
JANTX*1N4558B**	114	T03	50	4.3	4.08	4.51	0.58	-.035	.16	2900	38.0
JANTX*1N4559B**	114	T03	50	4.7	4.46	4.93	0.40	-.015	.12	2650	35.0
JANTX*1N4560B**	114	T03	50	5.1	4.84	5.35	0.36	.036	.12	2450	32.0
JANTX*1N4561B**	114	T03	50	5.6	5.32	5.88	0.34	.050	.12	2250	30.0

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
**--PARTS OF EITHER POLARITY ARE APPROVED FOR USE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, DIODE

VOLTAGE REGULATOR | MIL-S-19500 | QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT	Vz			Vz (REG)	αVz	Zz@Iz		IRMS
				NOM	MIN	MAX		%/°C			
			W	Vdc	Vdc	Vdc	Vdc		OHMS	mAdc	A
JANTX*1N4562B**	114	T03	50	6.2	5.89	6.51	0.36	.055	.14	2000	25.0
JANTX*1N4954	356	D0204	5	6.8	6.46	7.14	.7	.05	1.0	175	40
JANTX*1N4955	356	D0204	5	7.5	7.13	7.87	.7	.06	1.5	175	32
JANTX*1N4956	356	D0204	5	8.2	7.79	8.61	.7	.06	1.5	150	24
JANTX*1N4957	356	D0204	5	9.1	8.65	9.55	.7	.06	2.0	150	22
JANTX*1N4958	356	D0204	5	10	9.50	10.50	.8	.07	2.0	125	20
JANTX*1N4959	356	D0204	5	11	10.45	11.55	.8	.07	2.5	125	19
JANTX*1N4960	356	D0204	5	12	11.40	12.60	.8	.07	2.5	100.0	18.00
JANTX*1N4961	356	D0204	5	13	12.35	13.65	.9	.08	3.0	100.0	16.00
JANTX*1N4962	356	D0204	5	15	14.25	15.75	1.0	.08	3.5	75.0	12.00
JANTX*1N4963	356	D0204	5	16	15.20	16.80	1.1	.08	3.5	75.0	10.00
JANTX*1N4964	356	D0204	5	18	17.10	18.90	1.2	.085	4.0	65.0	9.00
JANTX*1N4965	356	D0204	5	20	19.00	21.00	1.5	.085	4.5	65.0	8.00
JANTX*1N4966	356	D0204	5	22	20.90	23.10	1.8	.085	5.0	50.0	7.00
JANTX*1N4967	356	D0204	5	24	22.80	25.20	2.0	.09	5.0	50.0	6.50
JANTX*1N4968	356	D0204	5	27	25.70	28.30	2.0	.09	6.0	50.0	6.00
JANTX*1N4969	356	D0204	5	30	28.50	31.50	2.5	.09	8.0	40.0	5.50
JANTX*1N4970	356	D0204	5	33	31.40	34.60	2.8	.095	10.0	40.0	5.00
JANTX*1N4971	356	D0204	5	36	34.20	37.80	3.0	.095	11.0	30.0	4.50
JANTX*1N4972	356	D0204	5	39	37.10	40.90	3.0	.095	14.0	30.0	4.00
JANTX*1N4973	356	D0204	5	43	40.90	45.10	3.3	.095	20.0	30.0	3.50
JANTX*1N4974	356	D0204	5	47	44.70	49.30	3.5	.095	25.0	25.0	3.20
JANTX*1N4975	356	D0204	5	51	48.50	53.50	4.0	.095	27.0	25.0	3.00
JANTX*1N4976	356	D0204	5	56	53.2	58.8	4.4	.095	35	20	2.80
JANTX*1N4977	356	D0204	5	62	58.9	65.1	5.0	.100	42	20	2.50
JANTX*1N4978	356	D0204	5	68	64.6	71.4	5.5	.100	50	20	2.20
JANTX*1N4979	356	D0204	5	75	71.3	78.7	6.0	.100	55	20	2.00
JANTX*1N4980	356	D0204	5	82	77.9	86.1	6.6	.100	80	15	1.80
JANTX*1N4981	356	D0204	5	91	86.5	95.5	7.5	.100	90	15	1.60
JANTX*1N4982	356	D0204	5	100	95.0	105.0	8.0	.100	110	12	1.40
JANTX*1N4983	356	D0204	5	110	104.5	115.5	9.0	.100	125	12	1.20
JANTX*1N4984	356	D0204	5	120	114.0	126.0	10.0	.100	170	10	1.00
JANTX*1N4985	356	D0204	5	130	123.5	136.5	11.0	.105	190	10	.80
JANTX*1N4986	356	D0204	5	150	142.5	157.5	13.0	.105	330	8	.75
JANTX*1N4987	356	D0204	5	160	152.0	168.0	14.0	.105	350	8	.70
JANTX*1N4988	356	D0204	5	180	171.0	189.0	16.0	.110	450	5	.60
JANTX*1N4989	356	D0204	5	200	190.0	210.0	18.0	.110	500	5	.50
JANTX*1N4990	356	D0204	5	220	290.0	231.0	19.0	.115	550	5	.50
JANTX*1N4991	356	D0204	5	240	228.0	252.0	22.0	.115	650	5	.40
JANTX*1N4992	356	D0204	5	270	257.0	283.0	25.0	.120	800	5	.35
JANTX*1N4993	356	D0204	5	300	285.0	315.0	28.0	.120	950	4	.30
JANTX*1N4994	356	D0204	5	330	314.0	346.0	32.0	.120	1175	4	.25
JANTX*1N4995	356	D0204	5	360	342.0	378.0	35.0	.120	1400	3	.22

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS,DIODE

CURRENT REGULATOR | MIL-S-19500 | GPL-19500

TYPE PART NO.	SPEC	OUT DWG	POV	IP AT VT=25V			ZT VT=25V	ZK VK=6V	VL IL=0.8IP (MIN)	TCIP VT=25V T=-55°C,+25°C	TCIP VT=25V T=25°C,+150°C
				NOM	MIN	MAX					
			V	mAdc	mAdc	mAdc	M	M	Vdc	%/°C	%/°C
JANTX*1N5283	463	D07	100	.22	.198	.242	25.00	2.75	1.00	+1.35	-.06,+0.70
JANTX*1N5284	463	D07	100	.24	.216	.264	19.00	2.35	1.00	+1.25	-.10,+0.66
JANTX*1N5285	463	D07	100	.27	.243	.297	14.00	1.95	1.00	-.10,+1.15	-.12,+0.58
JANTX*1N5286	463	D07	100	.30	.270	.330	9.00	1.60	1.00	-.15,+1.05	-.15,+0.52
JANTX*1N5287	463	D07	100	.33	.297	.363	6.60	1.35	1.00	-.20,+0.95	-.16,+0.47
JANTX*1N5288	463	D07	100	.39	.351	.429	4.10	1.00	1.05	-.30,+0.82	-.20,+0.38
JANTX*1N5289	463	D07	100	.43	.387	.473	3.30	.870	1.05	-.32,+0.75	-.22,+0.33
JANTX*1N5290	463	D07	100	.47	.423	.517	2.70	.750	1.05	-.35,+0.70	-.23,+0.28
JANTX*1N5291	463	D07	100	.56	.504	.616	1.90	.560	1.10	-.40,+0.55	-.26,+0.20
JANTX*1N5292	463	D07	100	.62	.558	.682	1.55	.470	1.13	-.42,+0.45	-.27,+0.15
JANTX*1N5293	463	D07	100	.68	.612	.748	1.35	.400	1.15	-.45,+0.40	-.28,+0.12
JANTX*1N5294	463	D07	100	.75	.675	.825	1.15	.335	1.20	-.50,+0.35	-.30,+0.07
JANTX*1N5295	463	D07	100	.82	.738	.902	1.00	.290	1.25	-.52,+0.27	-.31,+0.03
JANTX*1N5296	463	D07	100	.91	.819	1.001	.88	.240	1.29	-.56,+0.20	-.32
JANTX*1N5297	463	D07	100	1.00	.900	1.100	.800	.205	1.35	-.58,+0.15	-.34
JANTX*1N5298	463	D07	100	1.10	.990	1.210	.700	.180	1.40	-.60,+0.10	-.3
JANTX*1N5299	463	D07	100	1.20	1.080	1.320	.640	.155	1.45	-.63,+0.05	-.37
JANTX*1N5300	463	D07	100	1.30	1.170	1.430	.580	.135	1.50	-.65	-.38
JANTX*1N5301	463	D07	100	1.40	1.260	1.540	.540	.115	1.55	-.68	-.39
JANTX*1N5302	463	D07	100	1.50	1.350	1.650	.510	.105	1.60	-.70	-.40
JANTX*1N5303	463	D07	100	1.60	1.440	1.760	.475	.092	1.65	-.70	-.40
JANTX*1N5304	463	D07	100	1.80	1.620	1.960	.420	.074	1.75	-.72	-.41
JANTX*1N5305	463	D07	100	2.00	1.800	2.200	.395	.061	1.85	-.75	-.42
JANTX*1N5306	463	D07	100	2.20	1.980	2.420	.370	.052	1.95	-.76	-.42
JANTX*1N5307	463	D07	100	2.40	2.160	2.640	.345	.044	2.00	-.78	-.43
JANTX*1N5308	463	D07	100	2.70	2.430	2.970	.320	.035	2.15	-.80	-.43
JANTX*1N5309	463	D07	100	3.00	2.700	3.300	.300	.029	2.25	-.81	-.43
JANTX*1N5310	463	D07	100	3.30	2.970	3.630	.280	.024	2.35	-.82	-.44
JANTX*1N5311	463	D07	100	3.60	3.240	3.960	.265	.020	2.50	-.83	-.44
JANTX*1N5312	463	D07	100	3.90	3.510	4.290	.255	.017	2.60	-.84	-.45
JANTX*1N5313	463	D07	100	4.30	3.870	4.730	.245	.014	2.70	-.85	-.45
JANTX*1N5314	463	D07	100	4.70	4.230	5.170	.235	.012	2.90	-.86	-.45

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, DIODE

SWITCHING AND FAST RECOVERY RECTIFIERS MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	VRWM	IO	IFSM	VF @ IF		VF @ IF		IR	(VBR)	trr
			V	A	A	Vdc	Adc	Vdc	mAdc	uAdc	Vdc	nS
JANTX*1N3891**	304	D04	200	12	150	1.5	38			25		200
JANTX*1N3893**	304	D04	400	12	150	1.5	38			25		200
JANTX 1N3911**	308	D05	200	30	300	1.4	95			80		200
JANTX 1N3913**	308	D05	400	30	300	1.4	95			80		200
JANTX*1N4148-1	116	D0204	75	.200	.500	1.0	.010			5	100	5
JANTX*1N4150-1	231	D0204	50	.200	.500	.92	.100	1.0	200	.100	50	6
JANTX*1N4153-1	337	D035	50	.150	2	.81	.010	.88	20	.050	75	4
JANTX*1N4454-1	144	D0204	50	.200	2	1.00	.010			.100	75	4
JANTX 1N4938-1	169	D0204	175	.100	2	1.00	.100			.100	200	50
JANTX*1N5417	411	D0204	200	3	80	1.5	9				220	150
JANTX*1N5418	411	D0204	400	3	80	1.5	9				440	150
JANTX*1N5419	411	D0204	500	3	80	1.5	9				550	250
JANTX*1N5420	411	D0204	600	3	80	1.5	9				660	400
JANTX*1N5617	429	D0204	400	1	25	1.6	3			.500	440	150
JANTX*1N5619	429	D0204	600	1	25	1.6	3			.500	660	250
JANTX*1N5621	429	D0204	800	1	25	1.6	3			.500	880	300
JANTX*1N5623	429	D0204	1000	1	25	1.6	3			.500	1100	500
JANTX*1N5711$	444	D0204	50			.410	.001	1.0	15	.200	70	
JANTX*1N5712$	445	D0204	16			.55	.001	1.0	35	.150	20	
JANTX*1N5719$$	443	D0204	100			1.0	.1			.250	150	
JANTX*1N5804	477	AXIAL	100	1	35	.875	1	.925	6	1	110	25
JANTX*1N5806	477	AXIAL	150	1	35	.875	1	.925	6	1	160	25
JANTX*1N5809	477	AXIAL	100	3	125	.875	1	.925	6	5	110	25
JANTX*1N5811	477	AXIAL	150	3	125	.875	1	.925	6	5	160	25
JANTX*1N5814	478	D04	100	5	400	.860	10	.950	20	10	110	35
JANTX*1N5816	478	D04	150	5	400	.860	10	.950	20	10	160	35

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
**--PARTS OF EITHER POLARITY ARE APPROVED FOR USE.

$--SCHOTTKY BARRIER TYPE
$$--PIN TYPE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, DIODE

TRANSIENT VOLTAGE SUPPRESSOR MIL-S-19500 QPL-19500

TYPE PART NO	SPEC	OUT DWG	VZ MIN Vdc	VZ MAX Vdc	VRWM V(pk)	VZM V(pk)	IZSM A(pk)
JANTX*1N5907	500	D013	6.00	7.00	5.00	8.51	150.0
JANTX*1N5629A	500	D013	6.45	7.14	5.80	10.5	143.0
JANTX*1N5630A	500	D013	7.13	7.88	6.40	11.3	132.0
JANTX*1N5631A	500	D013	7.79	8.61	7.02	12.1	124.0
JANTX*1N5632A	500	D013	8.65	9.55	7.78	13.4	112.0
JANTX*1N5633A	500	D013	9.50	10.50	8.55	14.5	103.0
JANTX*1N5634A	500	D013	10.50	11.60	9.40	15.6	96.0
JANTX*1N5635A	500	D013	11.40	12.60	10.20	16.7	90.0
JANTX*1N5636A	500	D013	12.40	13.70	11.10	18.2	82.0
JANTX*1N5637A	500	D013	14.30	15.80	12.80	21.2	71.0
JANTX*1N5638A	500	D013	15.20	16.80	13.60	22.5	67.0
JANTX*1N5639A	500	D013	17.10	18.90	15.30	25.2	59.5
JANTX*1N5640A	500	D013	19.00	21.00	17.10	27.7	54.0
JANTX*1N5641A	500	D013	20.90	23.10	18.80	30.6	49.0
JANTX*1N5642A	500	D013	22.80	25.20	20.50	33.2	45.0
JANTX*1N5643A	500	D013	25.70	28.40	23.10	37.5	40.0
JANTX*1N5644A	500	D013	28.50	31.50	25.60	41.4	36.0
JANTX*1N5645A	500	D013	31.40	34.70	28.20	45.7	33.0
JANTX*1N5646A	500	D013	34.20	37.80	30.80	49.9	30.0
JANTX*1N5647A	500	D013	37.10	41.00	33.30	53.9	28.0
JANTX*1N5648A	500	D013	40.90	45.20	36.80	59.3	25.3
JANTX*1N5649A	500	D013	44.70	49.40	40.20	64.8	23.2
JANTX*1N5650A	500	D013	48.50	53.60	43.60	70.1	21.4
JANTX*1N5651A	500	D013	53.20	58.80	47.80	77.0	19.5
JANTX*1N5652A	500	D013	58.90	65.10	53.00	85.0	17.7
JANTX*1N5653A	500	D013	64.60	71.40	58.10	92.0	16.3
JANTX*1N5654A	500	D013	71.30	78.80	64.10	103.0	14.
JANTX*1N5655A	500	D013	77.90	86.10	70.10	113.0	13.3
JANTX*1N5656A	500	D013	86.50	95.50	77.80	125.0	12.0
JANTX*1N5657A	500	D013	95.00	105.0	85.50	137.0	11.0
JANTX*1N5658A	500	D013	105.0	116.0	94.00	152.0	9.9
JANTX*1N5659A	500	D013	114.0	126.0	102.0	165.0	9.1
JANTX*1N5660A	500	D013	124.0	137.0	111.0	179.0	8.4
JANTX*1N5661A	500	D013	143.0	158.0	128.0	207.0	7.2
JANTX*1N5662A	500	D013	152.0	168.0	136.0	219.0	6.8
JANTX*1N5663A	500	D013	162.0	179.0	145.0	234.0	6.4
JANTX*1N5664A	500	D013	171.0	189.0	154.0	246.0	6.1
JANTX*1N5665A	500	D013	190.0	210.0	171.0	274.0	5.5

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, DIODE

LIGHT,EMITTING — MIL-S-19500 — QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PFM	IF	VF @ IF		V(BR)	IR	IV1	IV2	WAVELENGTH		C
				MAX	MAX				MIN	MIN	MIN	MAX	
			mW(pk)	mAdc	Vdc	mAdc	Vdc	uAdc	mcd	mcd	nm	nm	PF
JANTX*1N6092	519	V503	120	35	3.0	20	5	1	1.0	.5	590	695	100
JANTX*1N6093	520	V503	120	35	3.0	20	5	1	1.0	.5	550	660	100
JANTX*1N6094	521	V503	120	30	3.0	20	5	1	.8	.4	525	600	100
M19500/519-02	519	1/	120	35	3.0	20	5	1	1.0	.5	590	695	100
M19500/520-02	520	1/	120	35	3.0	20	5	1	1.0	.5	550	660	100
M19500/521-02	521	1/	120	30	3.0	20	5	1	.8	.4	525	600	100

1/ PANEL MOUNT CASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS DIODE

OPTICALLY COUPLED ISOLATORS MIL-S-19500 QPL-19500

TYPE PART NO	SPEC	OUT DWG	LED SECTION				PHOTO TRANSISTOR				TOTAL COUPLED DEVICE					
			IF	IP	IR	VF	V(BR)			IC	RIOC	Tr	VCE(SAT)		IC(on)	
							CEO	CBO	EBO	(off)						
			mAdc	Apk	uAdc	Vdc	Vdc	Vdc	Vdc	nAdc		us	Vdc	mAdc	mAdc	mAdc
JANTX*4N22	486	T099	40	1	100	1.3	35	35	4	100	10	15	.3	2.5	2.5	.15
JANTX*4N22A	486	T099	40	1	100	1.3	35	35	4	100	10	15	.3	2.5	2.5	.15
JANTX*4N23	486	T099	40	1	100	1.3	35	35	4	100	10	15	.3	5.0	6.0	.20
JANTX*4N23A	486	T099	40	1	100	1.3	35	35	4	100	10	15	.3	5.0	6.0	.20
JANTX*4N24	486	T099	20	1	100	1.3	35	35	4	100	10	15	.3	10.0	10.0	.40
JANTX*4N24A	486	T099	20	1	100	1.3	35	35	4	100	10	15	.3	10.0	10.0	.40

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, TRANSISTOR

DARLINGTON MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT W	IC MAX Adc	VBR EB1 Vdc	VBR EB2 Vdc	VBR CBO1 Vdc	VBR CEO Vdc	hFE MIN	hFE MAX	VCE (SAT)	f MHz	C PF	ton uS	toff uS
JANTX‡2N6052‡‡	501	T03	150.0	12	5.0		100	100	1000	18K	3.0	20	300	1.0	6.0
JANTX‡2N6059‡	502	T03	150.0	12	5.0		100	100	1000	18K	3.0	20	300	1.0	6.0
JANTX‡2N6284‡	504	T03	175.0	20	7.0		100	100	1250	18K	3.0	8	300	1.5	7.5
JANTX‡2N6287‡‡	505	T03	175	20	7.0		100	100	1250	18K	3.0	8	300	1.5	7.5
JANTX 2N6350‡	472	T033	1.0	5	12.0	6.0	80		2000	10K	1.1	50	40	.5	1.2
JANTX 2N6351‡	472	T033	1.0	5	12.0	6.0	150		1000	10K	2.5	50	40	.5	1.2
JANTX 2N6352‡	472	T066	2.0	5	12.0	6.0	80		2000	10K	1.5	50	40	.5	1.2
JANTX 2N6353‡	472	T066	2.0	5	12.0	6.0	150		1000	10K	2.5	50	40	.5	1.2
JANTX 2N6384‡	523	T03	100	10	5.0		60	60	1000	20K	2.0	300	200	2.5	10
JANTX‡2N6385‡	523	T03	100	10	5.0		80	80	1000	20K	2.0	300	200	2.5	10
JANTX‡2N6649‡‡	527	T03	85	10	5.0		60	60	1000	20K	2.0	400	200	2.5	10
JANTX 2N6650‡‡	527	T03	85	10	5.0		80	80	1000	20K	2.0	400	200	2.5	10

‡--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
‡--NPN.
‡‡--PNP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS,TRANSISTORS

THYRISTOR (SILICON CONTROLLED RECTIFIER) MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	IO A	VDRM V	ITSM a	IH mAdc	VGT Vdc	IGT mAdc	ton uS	toff uS	dv/dt V/us
JANTX 2N683	108	T0208	16.0	100	150	50	.25-3.0	80	5	30	25
JANTX 2N685	108	T0208	16.0	200	150	50	.25-3.0	80	5	30	25
JANTX 2N687	108	T0208	16.0	300	150	50	.25-3.0	80	5	30	25
JANTX 2N688	108	T0208	16.0	400	150	50	.25-3.0	80	5	30	25
JANTX 2N689	108	T0208	16.0	500	150	50	.25-3.0	80	5	30	25
JANTX 2N690	108	T0208	16.0	600	150	50	.25-3.0	80	5	30	25
JANTX 2N1774A	168	T064	4.7	200	60	25	.20-2.0	15	5	30	5
JANTX 2N1777A	168	T064	4.7	400	60	25	.20-2.0	15	5	30	5
JANTX 2N1793	204	T083	50.0	100	1000	40	.25-3.0	70	15	40	20
JANTX 2N1795	204	T083	50.0	200	1000	40	.25-3.0	70	15	40	20
JANTX 2N1798	204	T083	50.0	400	1000	40	.25-3.0	70	15	40	20
JANTX 2N1800	204	T083	50.0	600	1000	40	.25-3.0	70	15	40	20
JANTX 2N1806	204	T094	50.0	600	1000	40	.25-3.0	70	15	40	20
JANTX 2N1911	204	T094	50.0	100	1000	40	.25-3.0	70	15	40	20
JANTX 2N1913	204	T094	50.0	200	1000	40	.25-3.0	70	15	40	20
JANTX 2N1916	204	T094	50.0	400	1000	40	.25-3.0	70	15	40	20
JAN 2N2025	203	T0209	70.0	100	1000	40	.25-3.0	130	15	150	20
JAN 2N2027	203	T0209	70.0	200	1000	40	.25-3.0	130	15	150	20
JAN 2N2029	203	T0209	70.0	300	1000	40	.25-3.0	130	15	150	20
JAN 2N2030	203	T0209	70.0	400	1000	40	.25-3.0	130	15	150	20
JANTX*2N2323A	276	T05	0.22	50	15	2	.35-.8	0.20			.7
JANTX*2N2324A	276	T05	0.22	100	15	2	.35-.8	0.20			.7
JANTX*2N2326A	276	T05	0.22	200	15	2	.35-.8	0.20			.7
JANTX*2N2328A	276	T05	0.22	300	15	2	.35-.8	0.20			.7
JANTX*2N2329	276	T05	0.22	400	15	2	.35-.8	0.20			1.8
JANTX 2N3027	419	T018	.175	30	8	5	.4-.8	0.20	0.2	2	30
JANTX 2N3028	419	T018	.175	60	8	5	.4-.8	0.20	0.2	2	15
JANTX 2N3029	419	T018	.175	100	8	5	.4-.8	0.20	0.2	2	10
JANTX 2N3030	419	T018	.175	30	8	4	.44-.6	0.02	0.1	2	30
JANTX 2N3031	419	T018	.175	60	8	4	.44-.6	0.02	0.1	2	15
JANTX 2N3032	419	T018	.175	100	8	4	.44-.6	0.02	0.1	2	10
JAN 2N5806**	438	T048		200	200	100	.25-4.0	120			20
JAN 2N5807**	438	T048		400	200	100	.25-4.0	120			20
JAN 2N5808**	438	T048		500	200	100	.25-4.0	120			20
JAN 2N5809**	438	T048		600	200	100	.25-4.0	120			20

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
**--BIDIRECTIONAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, TRANSISTOR

FIELD EFFECT — MIL-S-19500 - QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT mW	VGSS Vdc	VDG Vdc	VDS Vdc	VGS Vdc	VGS (off) Vdc	IG mAdc	IDSS mAdc	yfs MIN umho	yfs MAX umho	CISS PF
JANTX 2N3329‡‡	378	T072	300	20	20		20	5	10	1,3	1000	2000	32
JANTX 2N3330‡‡	378	T072	300	20	20		20	6	10	1,3	1000	2000	32
JANTX 2N3331‡‡	378	T072	300	20	20		20	8	10	1,3	1000	2000	32
JANTX*2N3821‡	375	T072	300	50	50	50	50	4	10	.5,25	1500	4500	6
JANTX*2N3822‡	375	T072	300	50	50	50	50	6	10	2.,10	3000	6500	6
JANTX*2N3823‡	375	T072	300	30	30	30	30	8	10	4.,20	3500	6500	6
JANTX*2N4856‡	385	T018	360		40	40	40	10	50	50			18
JANTX*2N4857‡	385	T018	360		40	40	40	6	50	20,100			18
JANTX*2N4858‡	385	T018	360		40	40	40	4	50	8.,80			18
JANTX*2N5114‡‡	476	T018	500	30	30	30	30	10	50	30,90			25
JANTX*2N5115‡‡	476	T018	500	30	30	30	30	6	50	15,60			25
JANTX*2N5116‡‡	476	T018	500	30	30	30	30	4	50	5,25			27

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
‡--N CHANNEL
‡‡--P CHANNEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, TRANSISTOR

UNIJUNCTION | MIL-S-19500 | QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT	Ie	VB2E	RBB0		n		IB2(MOD)
						MIN	MAX	MIN	MAX	MIN
			mW	mA(rms)	Vdc	OHMS	OHMS			mAdc
JANTX*2N4948	388	T018	360	50	30	4000	1200	.55	.82	12
JANTX*2N6137**	493	T018	300							
JANTX*2N6138**	493	T018	300							

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
**--PROGRAMABLE UNIJUNCTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, TRANSISTOR

DUAL MIL-S-19500 QPL: 19500

TYPE PART NO.	SPEC	OUT DWG	PT		IC	VBR			hFE		hFE1 hFE2	VBE1 VBE2	Cobo	ft
			ONE mW	BOTH mW	mAdc	CBO Vdc	CEO Vdc	EBO Vdc	MIN	MAX		mVdc	(PF)	MHZ MIN	MHZ MAX
JANTX*2N2060	270	T077	540	600	500	100	60	7	30	90	.9-1.1	5	15	60	500
JANTX*2N2920	355	T077	300	500	30	70	60	6	150		.9-1.1	3	5	60	400
JANTX*2N3810	336	T077	500	600	50	60	60	5	150	450	.9-1.1	3	5	100	500
JANTX*2N3811	336	T077	500	600	50	60	60	5	300	900	.9-1.1	3	5	100	500
JANTX*2N4854**	421	T077	300	600	600	60	40	5	100	300			8	200	800

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
**--COMPLEMENTARY NPN/PNP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, TRANSISTOR

HIGH FREQUENCY — MIL-S-19500 — QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT@ TA=25°C mW	POUT MIN W	POUT MAX W	PIN W	f MHz	n %	VBR CBO	VBR CEO	VBR EBO	hFE@ MIN	hFE@ MAX	IC mAdc	ft MHZ MIN	ft MHZ MAX
JANTX#2N918$	301	T072	200	.030					30	15	3	20	200	3	600	
JANTX#2N2857$	343	T072	200						30	15	3	30	150	3	1000	1900
JANTX#2N3019$	391	T05	800						140	80	7	100	300	150	100	400
JANTX#2N3375$	341	T0212	2600	3	6	1.00	400	40	65	40	4	15	150	150	350	
JANTX#2N3866$	398	T039	1000	1	2	.15	400	45	60	30	3.5	15	200	50	500	1600
JANTX#2N4957$$	426	T072	200						30	30	3	30	150	5	1200	3600
JANTX#2N5071$	442	T060	2600	24	34	3.00	76	60		35	4	10	100	3		
JANTX#2N5109$	453	T039	1000						40	20	3	40	150	50	1200	2200

#--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
$--NPN
$$--PNP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, TRANSISTOR

NPN,LOW POWER(PC(5 W AT TA=25 C) GENERAL PURPOSE AND SWTICHING MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT TA= 25°C W	IC A	VBR CBO Vdc	VBR CEO Vdc	VBR EBO Vdc	VCE (SAT) MAX Vdc	VBE (SAT) MAX Vdc	hFE @ IC MIN	hFE @ IC MAX	hFE @ IC mAdc	ft MIN MHz	ft MAX MHz	Cobo PF	ton nS	toff nS
JANTX*2N2219A	251	T05	.800	.800	75	50	6.0	.3	1.2	100	300	150	250	1200	8	35	300
JANTX*2N2222A	255	T018	.500	.800	75	50	6.0	.3	1.2	100	300	150	250		8	35	300
JANTX*2N2369A	317	T018	.360		40	15	4.5	.2	.7	40	120	10	300	1200	4	12	18
JANTX*2N2484	376	T018	.360	.050	60	60	6	.3		250		1	60	210	5		
JANTX*2N3019S	391	T05	.800	1	140	80	7	0.2	1.1	50	200	500	100	400	12		
JANTX*2N3421	393	T05	1	3	125	80	8.0	.25	1.2	40	120	1000	40	160	150	300	1200
JANTX*2N3439	368	T05	.800	1	450	350	7	.5	1.3	40	160	20	15	75	10	1K	10K
JANTX*2N3440	368	T05	.800	1	300	250	7	.5	1.3	40	160	20	15	75	10	1K	10K
JANTX*2N3501	366	T05	1	.300	150	150	6.0	.4	1.2	100	300	150	150	800	8	115	900
JANTX*2N3700S	391	T018	.500	1	140	80	7	0.2	1.1	50	200	500	100	400	12		
JANTX*2N3735	395	T05	1	1.5	75	50	5.0	.5	1.2	40	140	500	250	600	9	48	60
JANTX*2N3737	395	T046	.500	1.5	75	50	5.0	.5	1.2	40	140	500	250	600	9	48	60
JANTX*2N3960	399	T018	400		20	12	4.5	.3	1	60	300	10	1300	2600	25		
JANTX*2N4150	394	T05	1.5	10	100	70	7	.60	1.5	40	120	5	15	75	350	550	2K
JANTX*2N4449	317	T046	300		40	15	4.5	.2	.85	40	120	10	500		4	12	18
JANTX*2N5237	394	T05	1.5	10	150	120	7	.50	1.5	40	120	5	15	75	350	550	2K
JANTX*2N5666	455	T05	1.2	5	250	200	6	.4	1.2	15		3	20	140	90	250	1.5K
JANTX*2N5667	455	T05	1.2	5	400	300	6	.4	1.2	10		3	20	140	90	250	2K

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS,TRANSISTOR

PNP,LOW POWER (PC(5 W AT TA=25 C) GENERAL PURPOSE & SWITCHING MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT@ TA=25°C W	IC A	VBR CBO Vdc	VBR CEO Vdc	VBR EBO Vdc	VCE (SAT) MAX	VBE (SAT) MAX	VBE (SAT) MIN	hFE @ IC MAX	hFE @ IC A	ft MHz MIN	ft MHz MAX	Cobo PF	ton nS	toff nS
JANTX*2N2605	354	T046	.400	.030	70	60	6	.5	.9		600	.010	30	240	6		
JANTX*2N2905A	290	T05	.600	.600	60	60	5	.40	1.3	100	300	.030	200		8	45	200
JANTX*2N2907A	291	T018	.400	.600	60	60	5	.40	1.3	100	300	.150	200		8		200
JANTX*2N3250A	323	T018	.360	.200	60	60	5	.25	.9	50	150	.010	250	900	6	70	225
JANTX*2N3251A	323	T018	.360	.200	60	60	5	.25	.9	100	300	.010	300	900	6	70	250
JANTX*2N3467	348	T05	1	1	40	40	5	.60	1.2	40	120	.500	175	500	25	40	90
JANTX*2N3468	348	T05	1	1	50	50	5	.60	1.2	25	75	.500	150	500	25	40	90
JANTX*2N3637	357	T05	1	1	175	175	5	.9	.9	100	300	.050	200	850	10	400	600
JANTX*2N3743	397	T039	1	.050	300	300	5	1.2	1.2	50	200	.030	40	160	15		
JANTX*2N3764	396	T046	.500	1.5	40	40	5	.50	1.2	40	140	.050	180	600	15	43	115
JANTX*2N3765	396	T046	.500	1.5	60	60	5	.50	1.2	40	140	.500	150	600	15	43	115
JANTX*2N3868	350	T05	1	3	60	60	4	.75	1.4	30	150	1.5	60	240	120	100	400
JANTX*2N4033	512	T039	0.8	1	80	80	5	0.5	1.2	100	300	.100	150	600	10	40	210
JANTX*2N5416S	485	T05	.75	1	350	300	6		1.5	30	120	.050	75	75	15	1	10

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS,TRANSISTOR

NPN,POWER TRANSISTOR(PC)5W) MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT@ TC=100°C W	IC A	V(BR) CBO Vdc	V(BR) CEO Vdc	V(BR) EBO Vdc	VCE (SAT) MAX	VBE (SAT) MAX	hFE AT IC MIN	hFE AT IC MAX	hFE AT IC A	ft MHz MIN	ft MHz MAX	Cobo PF	ton nS	toff nS
JANTX 2N2151	277	T0111	30	2	150	100	8	.1	1.2	20	60	1			160		
JANTX*2N2814	415	T061	50	10	120	80	8	.5	1.2	40	120	5	15	70	350	.350	1.2
JANTX*2N2880	315	T0111*	30	5	110	80	8	.25	1.2	40	120	1	20	120	150	.360	2.0
JANTX*2N3442	370	T03	67	10	160	140	7	1.0		20	70	3					
JANTX*2N3585	384	T066	20	2	500	300	6	.75	1.4	25	100	1	15	75	120	3	7
JANTX*2N3716	408	T03	85.7	10	100	80	7	1.0	1.5	50	100	1	4	20	500	1.5	2.0
JANTX*2N3739	402	T066	10	2	325	30	6	.75		40	200	.100	10	60	20	1.5	3.5
JANTX*2N3749	315	T0111	30	5	110	80	8	.25	1.2	40	120	1	20	120	150	.360	2.0
JANTX*2N3767	518	T066	25.0	4	100	80	6	2.5	1.5	40	160	.500	10	80	50	.250	2.5
JANTX*2N3879	526	T066	35	7	120	75	7	1.2		20	80	4				.44	1.2
JANTX*2N3997	374	T0214	30	5	100	80	8	.25	1.2	80	240	1	40	120	150	.3	2.0
JANTX*2N5038	439	T03	80	20	150	90	7	1.00		20		12	60	240	500	.5	2.0
JANTX*2N5039	439	T03	80	20	125	75	7	1.00		20		10	60	240	500	.5	2.0
JANTX 2N5157	371	T03	66.75	3.5	700	500	6	.80	1.5	30	90	1	2.5	12	250	.8	1.7
JANTX 2N5241	414	T03	85.7	10.0	400	400	6	.70	1.5	15	35	2.5	2.5	12.5	500	.8	1.7
JANTX*2N5250	380	T0114	200	50.0	125	100	10	2.00	2.5	10	40	70.0	10.0	70.0		2.0	2
JANTX*2N5251	380	T0114	200	50.0	180	150	10	2.30	2.5	10	40	70.0	10.0	70.0		2.0	2
JANTX*2N5664	455	T066	30	5	250	200	6	.4	1.2	15		3	20	140	90	.25	1.5
JANTX*2N5665	455	T066	30	5	400	300	6	.4	1.2	10		3	20	140	90	.25	2.0
JANTX*2N5685	464	T03	171	50.0	60	60	5	1.00	2.0	15	60	25.0	2.0	20.0	1200	1.5	3
JANTX*2N5686	464	T03	171	50.0	80	80	5	1.00	2.0	15	60	25.0	2.0	20.0	1200	1.5	3
JANTX 2N5927	440	T0114	200	100.0	150	120	10	.75		10	40	70.0	.5	2		7.0	10.0
JANTX*2N6033	528	T03	140	40	150	120	7	1.0		10	50	40				.5	2
JANTX*2N6249	510	T03	100	10	300	200	6	1.5	2.25	10	50	10	2.5	15	500	2.0	4.5
JANTX*2N6250	510	T03	100	10	375	275	6	1.5	2.25	8	50	10	2.5	15	500	2.0	4.5
JANTX*2N6251	510	T03	100	10	450	350	6	1.5	2.25	6	50	10	2.5	15	500	2.0	4.5
JANTX*2N6306	498	T03	62.5	8	500	250	8	5.0	2.3	4		8	5	30	250	.6	3.0
JANTX*2N6308	498	T03	62.5	8	700	350	8	5.0	2.3	3		8	5	30	250	.6	3.0

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.
#--COLLECTOR COMMON TO STUD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, TRANSISTOR

PNP,POWER TRANSISTOR(PC)5W) MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT TC=100° W	IC A	VBR CBO Vdc	VBR CEO Vdc	VBR EBO Vdc	VCE (SAT) MAX	VBE (SAT) MAX	hFE @ IC MIN	hFE @ IC MAX	hFE @ IC A	ft MIN MHz	ft MAX MHz	Cobo PF	ton nS	toff nS
JANTX*2N3741	441	T066	14.25	4	80	80	7	.4		30	100	.250	25	250	100	.400	1K
JANTX*2N3792	379	T03	85.7	10	60	60	7	2.5	3.0	30	120	3	4	20	500	1.5K	2K
JANTX*2N5684	466	T03	300	50	80	80	5	1.00	2.0	15	60	25	2	20	2K	1.5K	3K

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

SEMICONDUCTORS, TRANSISTOR

CHOPPER MIL-S-19500 QPL-19500

TYPE PART NO.	SPEC	OUT DWG	PT	VBR				hFE		hFE INV	VEC ofs	Rec (ON)	ft		Cobo	Cibo
				CEO Vdc	CBO Vdc	EBO Vdc	ECO Vdc	MIN	MAX		mVdc	OHMS	MIN MHz	MAX MHz	PF	PF
JANTX*2N2432A	313	T018	300	45	45		18	80	400	3	.7	15	40	200	12	12
JANTX*2N2944A	382	T046	400	10	15	15	10	100		50	.6	4	15	55	10	6
JANTX*2N2945A	382	T046	400	20	25	25	20	70		30	1.0	6	10	55	10	6
JANTX*2N2946A	382	T046	400	35	40	40	35	50		20	2.0	8				

*--JANTX AND/OR JANTXV PARTS ARE APPROVED AND EITHER CAN BE USED.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981-505-022/7573

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360
ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.