MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS

RELAYS

FSC 59GP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D. C. 20363

ELECTRONIC EQUIPMENT PARTS, SELECTED STANDARDS, RELAYS

MIL-STD-242H(NAVY)-PART 6

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to: Commander, Naval Electronic Systems Command, Attn: ELEX 8111, Department of the Navy, Washington, D. C. 20363.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FOREWORD

This Military Standard Part provides equipment designers and manufacturers with a list of Relays having quality levels most acceptable in the design and construction of military systems and equipments. It also will aid to control and minimize logistic support. The criteria used in selecting parts are as follows:

1. Application need. Parts must satisfy the widest range of design requiring reliable parts.

2. Technological maturity. The design of the part must be final and must use proven materials and technologies. It must have been in production for a period sufficient to ensure that the design and process parameters have been identified and adequate quality controls have been developed.

3. Availability. The part must be in production by at least one manufacturer whose previous performance indicates ability to qualify to specifications of this standard. There must also be reasonable expectation that the part will not be obsolescent for at least seven years. Microcircuits are excluded from this requirement because of rapid technological changes.

4. Test or usage history. Sufficient test or usage data to predict part reliability must be available.

In the event of conflict between the technical description of standard parts in this standard and the applicable specification, the specification shall govern.

Technical information included in this standard was obtained from military specifications and standards; no warranty is made of data accuracy, or that inclusion of these parts will assure equipment/systems will meet performance requirements of any contracts. The contractor is responsible for conducting necessary tests and inspections of selected parts to ensure that contract requirements are met.

Review activities:
Navy-AS, SH

User activity:
Navy-MC

Preparing activity:
Navy - EC

(Project Number 59GP-N031-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS

1. SCOPE.

1.1 SCOPE. THIS STANDARD ESTABLISHES THE REQUIREMENTS FOR THE SELECTION OF RELAYS USED IN THE DESIGN AND MANUFACTURE OF NAVY EQUIPMENT.

1.2 PURPOSE. THE PURPOSE OF THIS STANDARD IS TO CONTROL AND MINIMIZE THE VARIETY OF RELAYS IN NAVY EQUIPMENT IN ORDER TO FACILITATE EFFECTIVE LOGISTIC SUPPORT, IMPROVE QUALITY AND REDUCE COST.

2. REFERENCED DOCUMENTS.

2.1 THE ISSUES OF THE FOLLOWING DOCUMENTS IN EFFECT ON THE DATE OF INVITATION FOR BIDS FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

SPECIFICATIONS

MILITARY

MIL-R-5757 RELAYS, ELECTRICAL
GENERAL SPECIFICATIONS FOR

MIL-R-6106 RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY
GENERAL SPECIFICATION FOR

MIL-R-28750 RELAYS, SOLID STATE
GENERAL SPECIFICATION FOR

MIL-R-28776 RELAYS, HYBRID, ESTABLISHED RELIABILITY
GENERAL SPECIFICATION FOR

MIL-R-39016 RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY
GENERAL SPECIFICATION FOR

MIL-R-83725 RELAYS, VACUUM
GENERAL SPECIFICATION FOR

MIL-R-83726 RELAYS, TIME DELAY, HYBRID, SOLID STATE
GENERAL SPECIFICATION FOR

3. DEFINITIONS.

3.1 THE TERMS USED IN THIS STANDARD ARE DEFINED IN REFERENCED DOCUMENTS.

4. GENERAL REQUIREMENTS.

4.1 SELECTION OF DEVICES. RELAYS SHALL BE SELECTED FROM THE TYPES LISTED IN THIS STANDARD. THE VARIETY OF TYPES USED IN ANY NAVY EQUIPMENT SHALL BE THE MINIMUM NECESSARY TO PROVIDE SATISFACTORY PERFORMANCE AND THE CONTRACTOR (HARDWARE DESIGNER/ BUILDER) SHALL EXERCISE ALL REASONABLE DESIGN CHOICES TO ACHIEVE THIS OBJECTIVE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

4.2 CRITERIA FOR INCLUSION IN THIS STANDARD.

(A). THE DEVICE MUST SATISFY A WIDE RANGE OF DESIGN REQUIREMENTS.

(B). AT LEAST ONE MANUFACTURER IS QUALIFIED TO THE APPLICABLE DETAIL SPECIFICATION.

(C). THERE IS REASONABLE ASSURANCE THAT THE DEVICE WILL BE AVAILABLE FOR AT LEAST SEVEN YEARS.

4.3 RELAY CHARACTERISTICS. THE CHARACTERISTICS LISTED HERIN ARE FOR REFERENCE ONLY AND ARE INTENDED AS AN AID IN SELECTING DEVICES. THE APPLICABLE DETAIL SPECIFICATION SHALL BE USED FOR ALL FINAL DESIGN CRITERIA.

4.4 CONFLICT OF DATA. IN THE EVENT OF CONFLICT BETWEEN THE TECHNICAL DESCRIPTION OF DEVICES IN THIS STANDARD AND THE APPLICABLE DETAIL SPECIFICATION, THE DETAIL SPECIFICATION SHALL GOVERN.

5. RELAY IDENTIFICATION.

5.1 RELAY IDENTIFICATION IS THE PART NUMBER OR TYPE DESIGNATOR AS LISTED IN THIS STANDARD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS

TABLE OF CONTENTS

SUBJECT/SECTION		PAGE NUMBER
100	ELECTRICAL	
	105 MIL-R-5757	105.1 - .14
130	ELECTROMAGNETIC	
	134 MIL-R-39016	134.1 - .60
	138 MIL-R-6106	138.1 - .50
160	SOLID STATE	
	164 MIL-R-83726	164.1 - .7
	168 MIL-R-28750	168.1 - .5
180	HYBRID	
	184 MIL-R-28776	184.1 - .5
190	VACUUM	
	192 MIL-R-83725	192.1 - .4


Source: https://assist.dla.mil --,Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL (FOR ELECTRONIC AND COMMUNICATION TYPE EQUIPMENT)

MIL-R-5757

SCOPE: THIS SECTION COVERS ELECTRICAL RELAYS WITH CONTACT RATINGS UP TO AND INCLUDING 10 AMPERES. THESE RELAYS ARE INENDED FOR USE IN DIRECT OR ALTERNATING CURRENT (SINGLE OR POLYPHASE) ELECTRONIC AND COMMUNICATION EQUIPMENT AS A MEANS OF CONTROLLING THE MAKING AND BREAKING OF CIRCUITS FOR ELECTRICALLY OPERATED EQUIPMENT AND DEVICES.


PART NUMBER EXAMPLE:

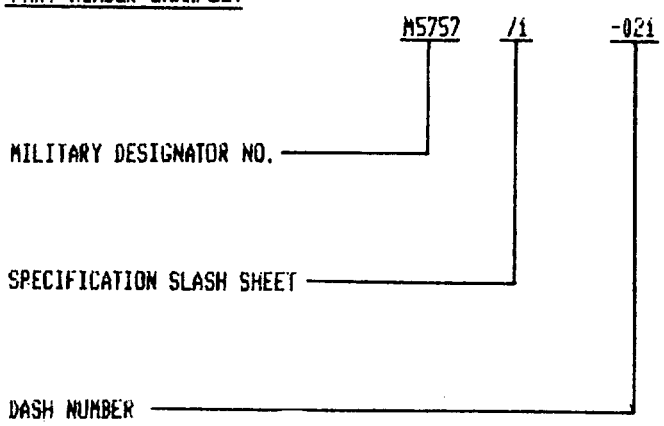

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, 6PDT, LOW LEVEL TO 2 AMPERES

MIL-R-5757/1

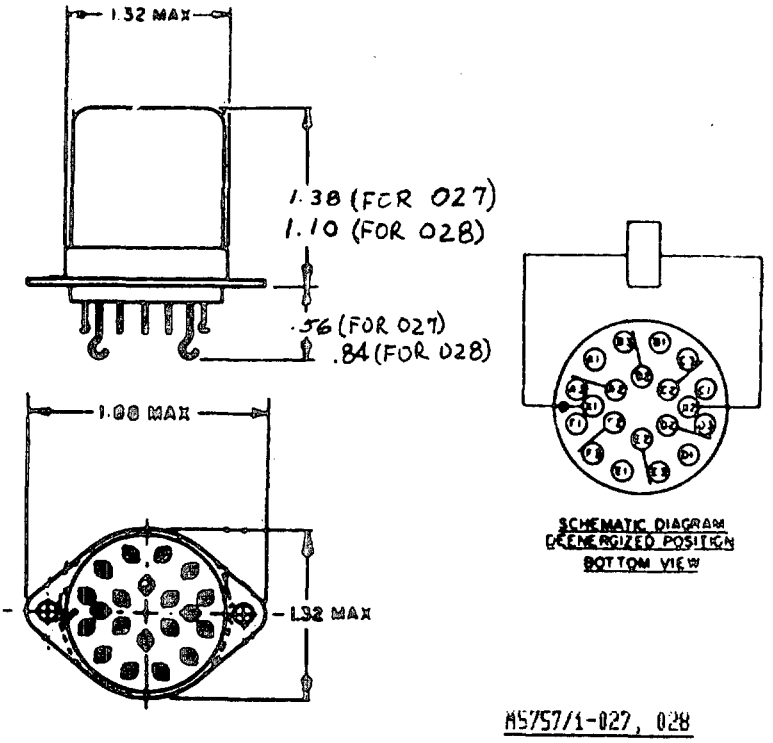

M5757/1-027, 028

DASH NUMBER	COIL VOLTAGE (VDC)		COIL RES.@ 25°C (OHMS)		OPERATE TIME (MS)
#	RATED	MAX	MIN	MAX	MAX
027	26.5	32	180	220	15
028					


PART NUMBER: M5757/1-#


COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED. 4PDT, LOW LEVEL TO 2 AMPERES

MIL-R-5757/7

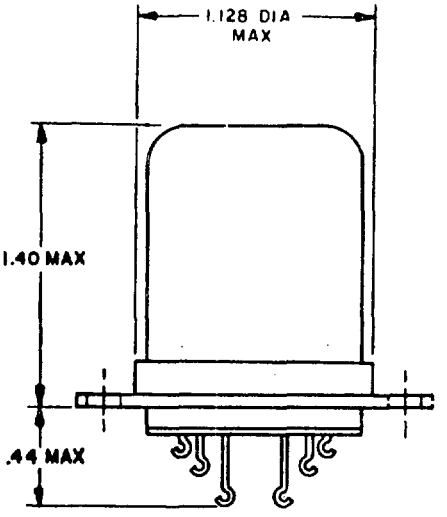

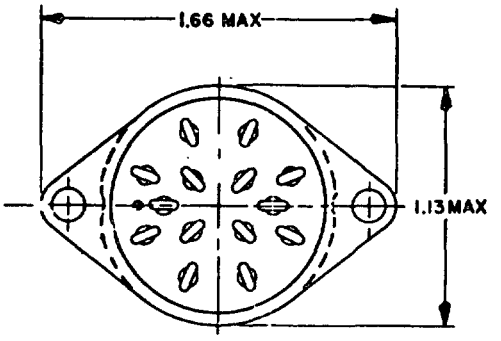



SCHEMATIC DIAGRAM
DEENERGIZED POSITION
BOTTOM VIEW

DASH NUMBER	COIL VOLTAGE (VDC)		COIL RES.@ 25°C(OHMS)		OVER TEMP RANGE OPERATE TIME (MS)
*	RATED	MAX	MIN	MAX	MAX
001	26.5	32	225	280	--


PART NUMBER: M5757/7-001


* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTRICAL, HERMETICALLY SEALED DPDT, 2 AMPERES

MIL-R-5757/8

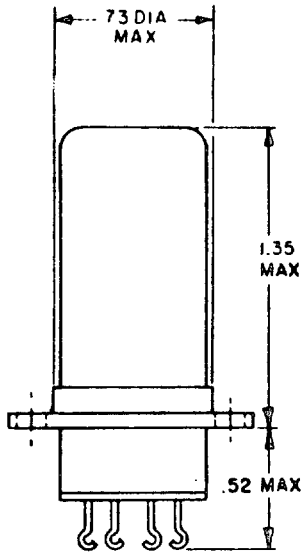

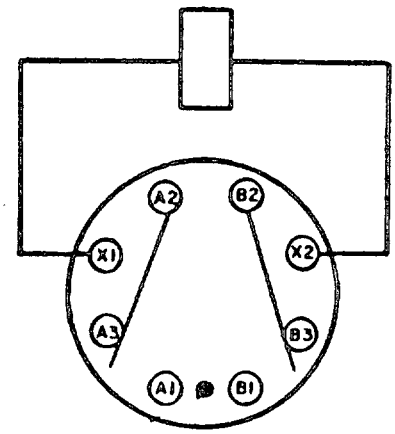

SCHEMATIC DIAGRAM
UNENERGIZED POSITION
BOTTOM VIEW

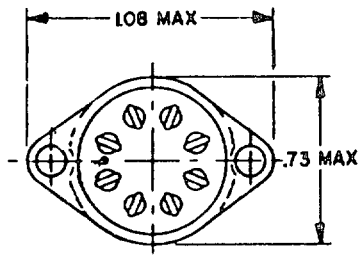

DASH NUMBER #	COIL VOLTAGE (VDC)		COIL RES.@ 25°C (OHMS)		OVER TEMP RANGE OPERATE TIME (MS)
	RATED	MAX	MIN	MAX	MAX
002	26.5	32	325		10


PART NUMBER: M5757/8-002

COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, DPDT, LOW LEVEL TO 2 AMPERES


MIL-R-5757/18

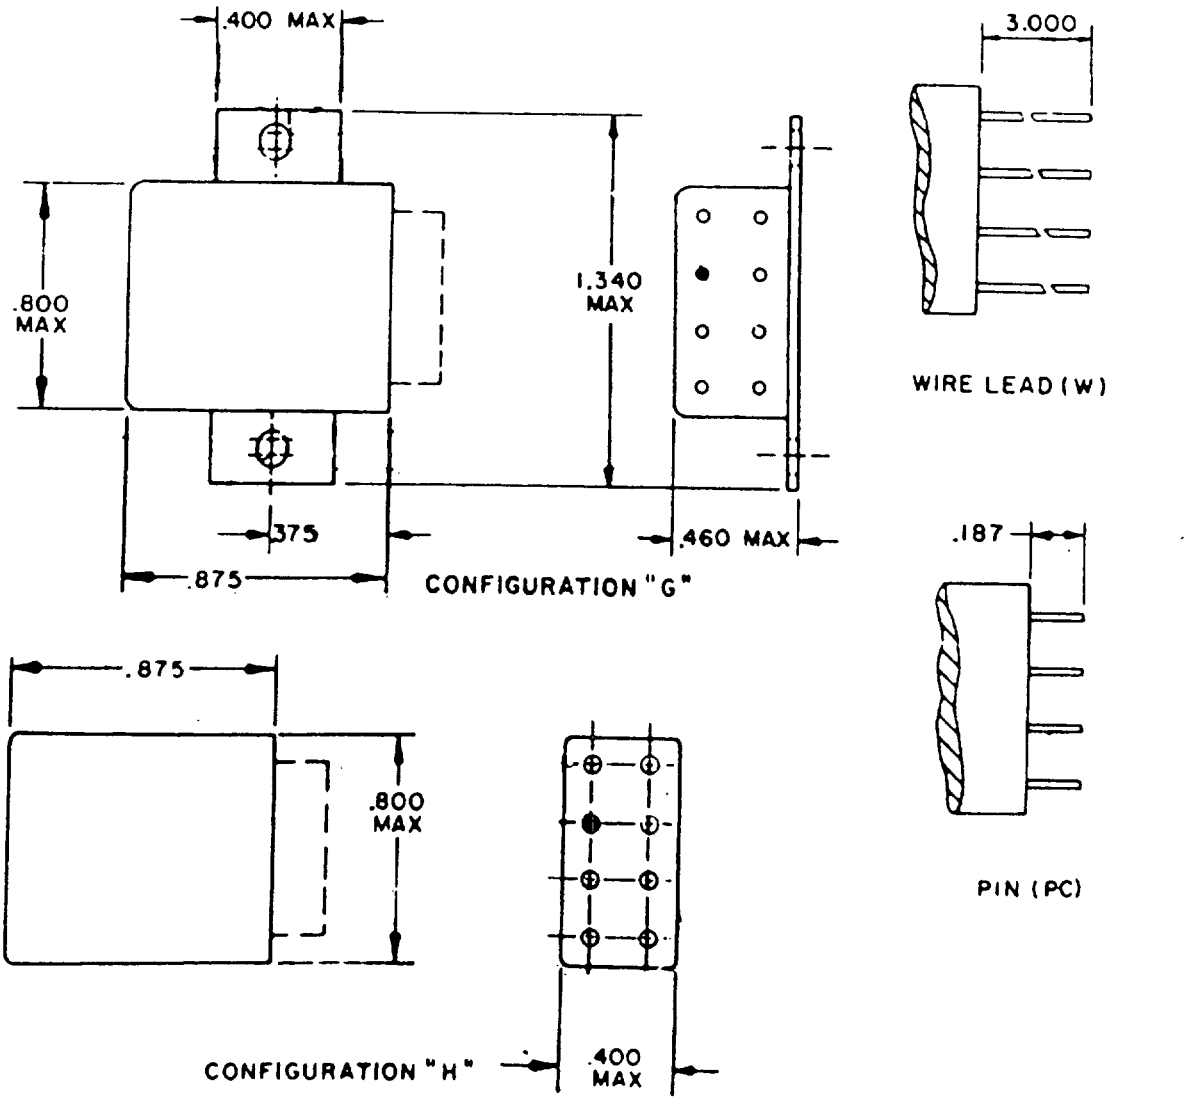


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, DPDT, LOW LEVEL TO 2 AMPERES

MIL-R-5757/10

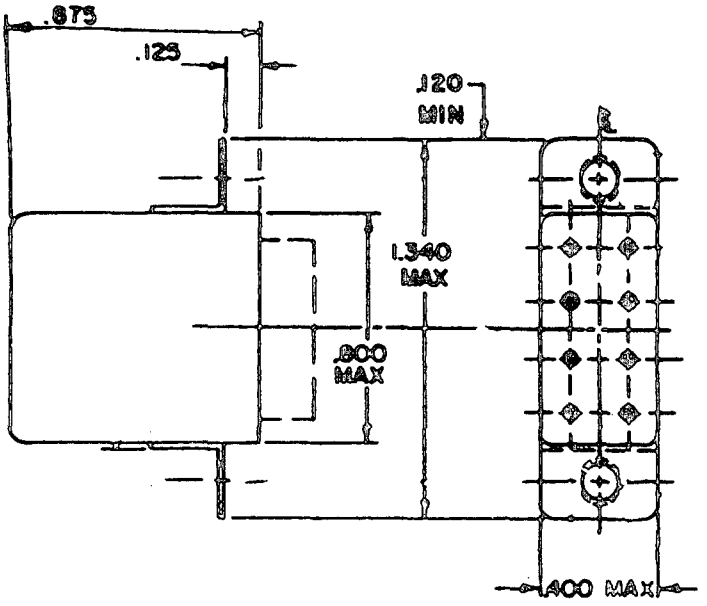

CONFIGURATION "A"



CIRCUIT DIAGRAM
TERMINAL VIEW
CONFIGURATION A, G, AND H
DEENERGIZED POSITION

DASH NO. #	CONFIG-URATION	TERM-INAL	COIL VOLTAGE (VDC)		LOAD RATINGS AMPERES				OVER TEMP RANGE		
					RES		IND		OPERATE TIME (MS)	COIL RES.@ 25°C (OHMS)	
			RATED	MAX	28V	115V ‡	28V ‡‡	115V ‡		MIN	MAX
035	G	L	26.5	32	2.0	.3	1.0	.3	6	540	770
036	G	H	26.5	32	2.0	.3	1.0	.3	6	540	770
039	A	L	26.5	32	2.0	.3	1.0	.3	6	540	770
052	H	L	26.5	32	2.0	.3	1.0	.3	6	540	770
054	H	PC	26.5	32	2.0	.3	1.0	.3	6	540	770
059	H	PC	6.0	7.3	2.0	.3	1.0	.3	6	40	47
060	H	PC	12.0	14.7	2.0	.3	1.0	.3	6	175	213


PART NUMBER: M5757/10- #


COMPLETE PART NO. SHALL INCLUDE DASH NUMBER
‡ 115 V 400 Hz OR 115 V 60 Hz
‡‡ AT AN INDUCTIVE LOAD OF 200 MILLIHENRIES MINIMUM.

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, 4PDT, 5 AMPERES

MIL-R-5757/15

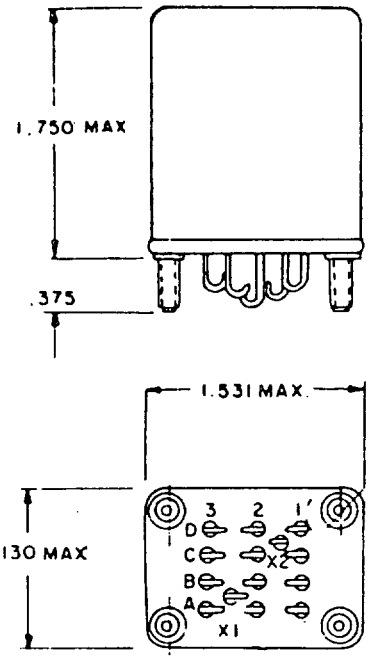



CIRCUIT DIAGRAM
UNENERGIZED POSITION

DASH NUMBER #	COIL VOLTAGE (VDC)		LOAD RATINGS AMPERES				COIL RES.@ 25°C (OHMS)		OVER TEMP RANGE OPERATE TIME (MS)
	RATED	MAX	RES		IND		MIN	MAX	MAX
			28V	115V	28V	115V			
001	26.5	32	5	5##	3	3##	223	—	20
003	115##	122##	5	5##	3	3##	1080	--	20
005	115#	122#	5	5##	3	3##	1440	--	20


PART NUMBER: M5757/15- #


AT 400 HZ
COMPLETE PART NO. SHALL INCLUDE DASH NUMBER
AT 60 Hz


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, 6PDT, 5 AMPERES

MIL-R-5757/16

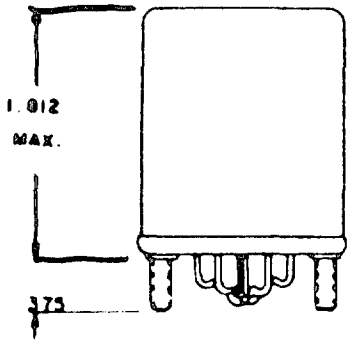

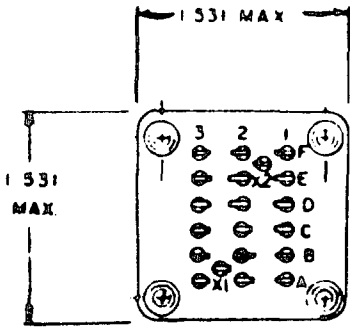

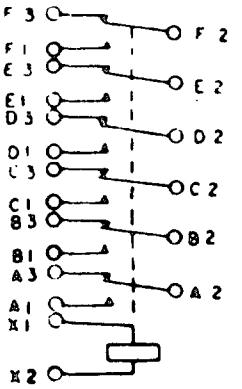

CIRCUIT DIAGRAM
UNENERGIZED POSITION

DASH NUMBER #	COIL VOLTAGE (VDC)		LOAD RATINGS AMPERES				OVER TEMP RANGE COIL RES.@ 25°C(OHMS)		OPERATE TIME (MS)
	RATED	MAX	RES		IND		MIN	MAX	MAX
			28V	115V	28V	115V			
001	26.5	32	5	5##	3	3##	162	--	25
003	115##	122	5	5##	3	3##	3600	--	50
005	115#	122	5	5##	3	3##	4800	--	50


PART NUMBER: M5757/16- #


AT 400 HZ
COMPLETE PART NO. SHALL INCLUDE DASH NUMBER
AT 60 Hz


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, 4PDT, 10 AMPERES

MIL-R-5757/18

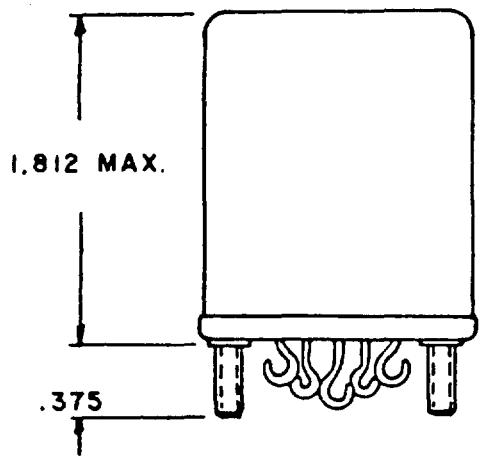

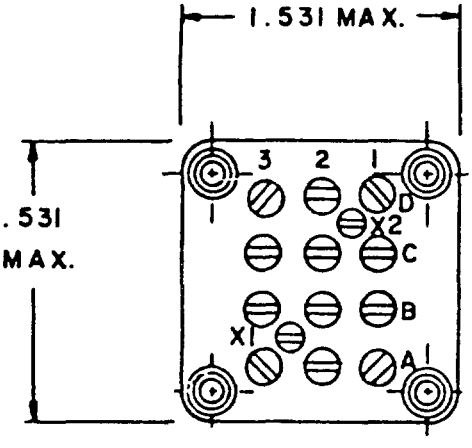

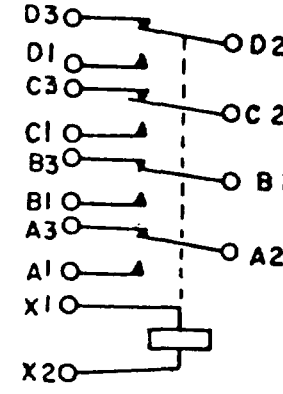

CIRCUIT DIAGRAM
UNENERGIZED POSITION

DASH NUMBER #	COIL VOLTAGE (VDC)		LOAD RATINGS AMPERES						COIL RES.@ 25°C(OHMS)		OPERATE TIME (MS)
	RATED	MAX	RES			IND			MAX	MIN	MAX
			28V	115V	115V	28V	115V	115V			OVER TEMP RANGE
001	26.5	32	10	10##	6##	6	10##	4##	99	--	25
003	115##	122##	10	10##	6##	6	10##	4##	2430	--	50
005	115#	122##	10	10##	6##	6	10##	4##	3000	--	50


PART NUMBER: M5757/18- #


AT 400 HZ # AT 60 Hz ## AT 50 60 Hz
COMPLETE PART NO. SHALL INCLUDE DASH NUMBER


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, DPDT, 10 AMPERES


MIL-R-5757/23

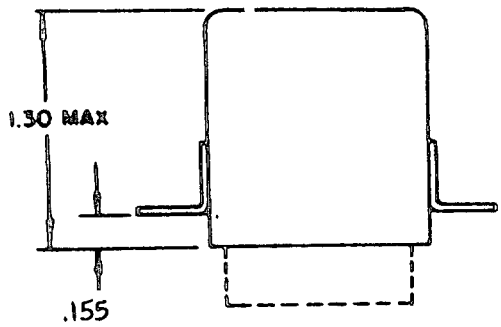

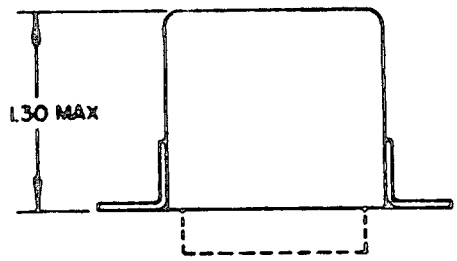

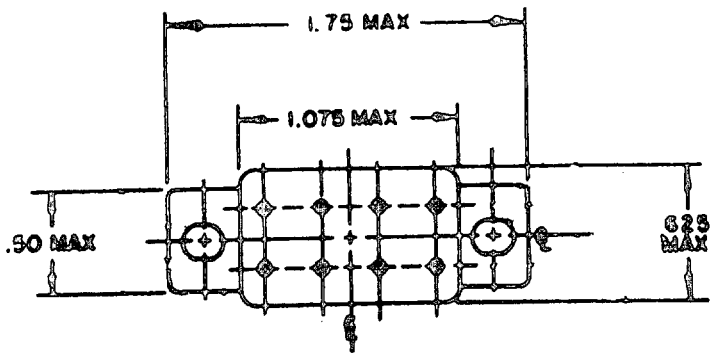


RAISED-FLANGE MOUNT

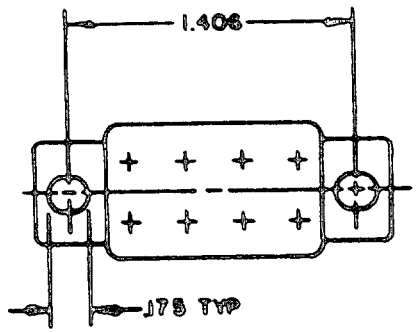


FLUSH-FLANGE MOUNT


TERMINATIONS



PIN



LUG





NO MOUNT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, DPDT, 10 AMPERES

MIL-R-5757/23

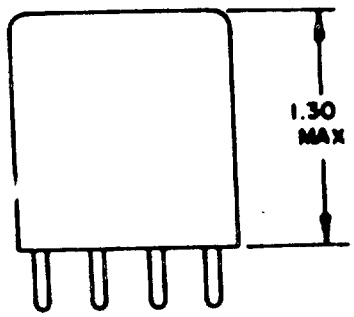



SCHEMATIC
COIL DEENERGIZED

DASH NO. *	MOUNT	TERMINAL	COIL VOLTAGE (VDC)		OVER TEMP RANGE		
					OPERATE TIME (MS)	COIL RES.@ 25°C (OHMS)	
			NOM.	MAX		MIN	MAX
001	RAISED	LUG	26.5	32	15	270	330
002	FLUSH	LUG					
003	RAISED	PIN#					
004	FLUSH	PIN#					
005	NONE	PIN#					
006	RAISED	LUG	12.0	16	15	58	83
007	FLUSH	LUG					
008	RAISED	PIN#					
009	FLUSH	PIN#					
010	NONE	PIN#					
011	RAISED	LUG	6.0	9	15	14	21
012	FLUSH	LUG					
013	RAISED	PIN#					
014	FLUSH	PIN#					
015	NONE	PIN#					
016	RAISED	LUG	48.0	52	15	900	1320
017	FLUSH	LUG					
018	RAISED	PIN#					
019	FLUSH	PIN#					
020	NONE	PIN#					
026	RAISED	LUG	120	122	15	6840	8360
027	FLUSH	LUG					
028	RAISED	PIN#					
029	FLUSH	PIN#					
030	NONE	PIN#					


PART NUMBER: M5757/23- *

PIN PLUG-IN
* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, 1 PST TO 4 PDT CONTACTS LOW-LEVEL TO .5 AMPERE (DRY REED)

MIL-R-5757/29

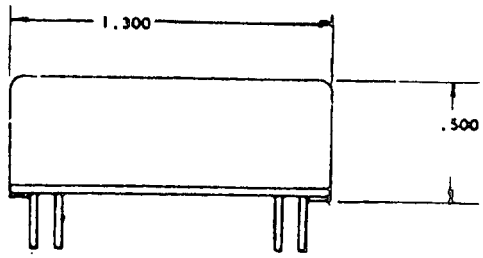

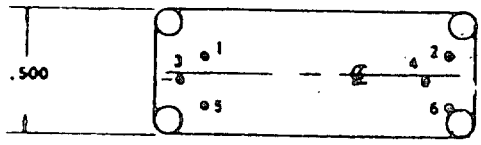


Figure 1.

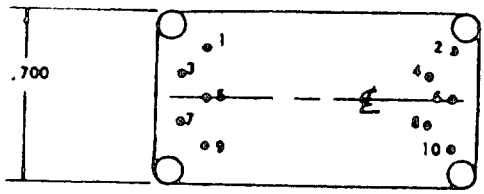


Figure 2.


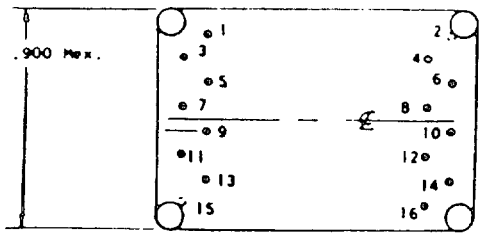


Figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, 1 PST TO 4 PDT CONTACTS LOW-LEVEL TO .5 AMPERE (DRY REED)

MIL-R-5757/29

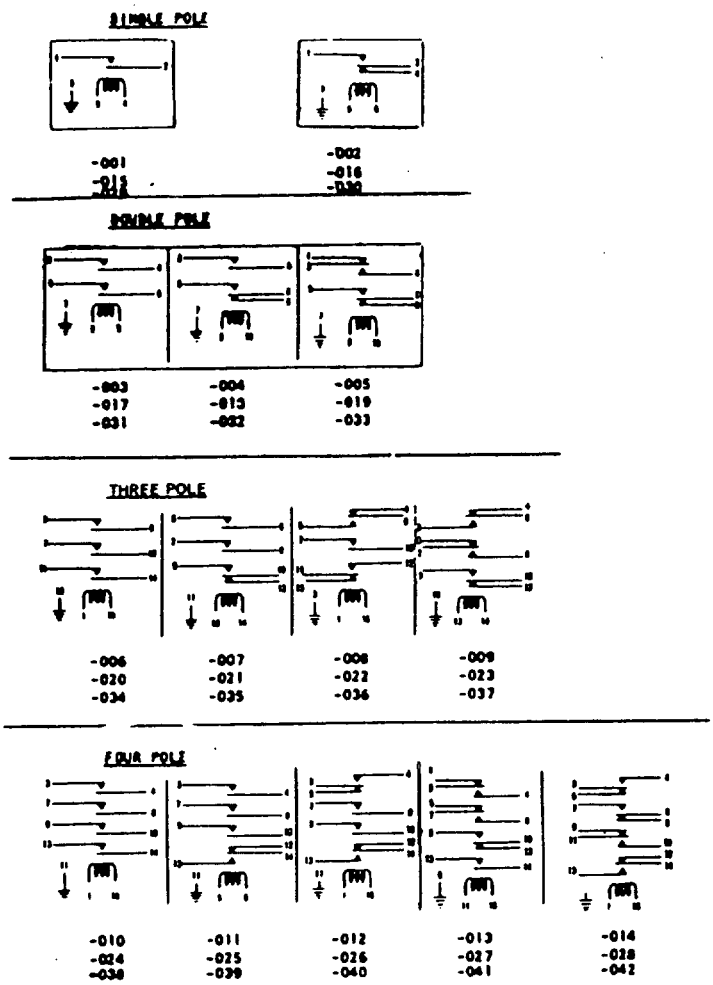

SCHEMATIC DIAGRAMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, 1 PST TO 4 PDT CONTACTS LOW-LEVEL TO .5 AMPERE (DRY REED)

MIL-R-5757/29

* PART NO. M5757/29-	NOMINAL COIL VOLTAGE	COIL RES OHMS ±10%	NO. OF POLES	NO. OF CAPSULES CONTACT ARRANGE. FORM A	FORM C	CASE SIZE PIN ARR. FIGURE
001	26.5	2350	1	1	0	1
002		1450	1	0	1	1
003		925	2	2	0	2
004		925	2	1	1	2
005		925	2	0	2	2
006		650	3	3	0	3
007		650	3	2	1	3
008		650	3	1	2	3
009		650	3	0	3	3
010		460	4	4	0	3
011		460	4	3	1	3
012		460	4	2	2	3
013		460	4	1	3	3
014		460	4	0	4	3
015	12	420	1	1	0	1
016		420	1	0	1	1
017		280	2	2	0	2
018		185	2	1	1	2
019		185	2	0	2	2
020		130	3	3	0	3
021		130	3	2	1	3
022		130	3	1	2	3
023		130	3	0	3	3
024		100	4	4	0	3
025		100	4	3	1	3
026		100	4	2	2	3
027		100	4	1	3	3
028		100	4	0	4	3
029	6	100	1	1	0	1
030		70	1	0	1	1
031		40	2	2	0	2
032		40	2	1	1	2
033		40	2	0	2	2
034		30	3	3	0	3
035		30	3	2	1	3
036		30	3	1	2	3
037		30	3	0	3	3
038		22	4	4	0	3
039		22	4	3	1	3
040		22	4	2	2	3
041		22	4	1	3	3
042		22	4	0	4	3

PART NUMBER: M5757/29- *

* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY (ER)

MIL-R-39016

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR ELECTROMAGNETIC, HERMETICALLY SEALED RELAYS FOR USE IN ELECTRONIC AND COMMUNICATION TYPE EQUIPMENT. THESE RELAYS ARE DESIGNED TO OPERATE OVER THE FULL RANGE FROM LOW LEVEL TO POWER SWITCHING WITH CONTACT RATINGS UP TO 10 AMPERES ALTERNATING CURRENT OR DIRECT CURRENT.


PART NUMBER EXAMPLE:

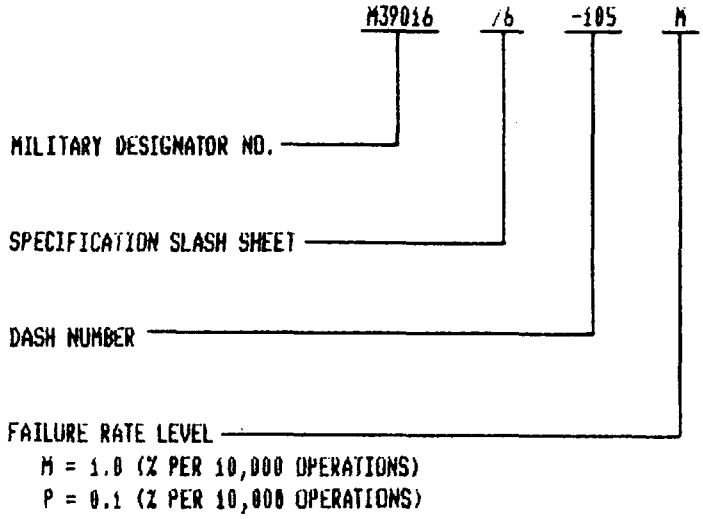


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 2 AMPERES


MIL-R-39016/6

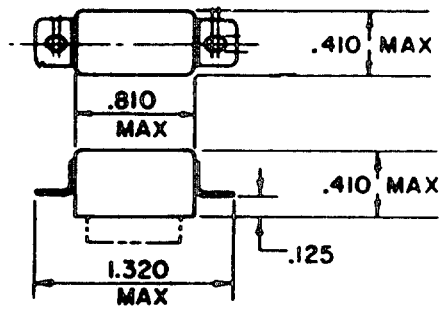


FLANGE MOUNT "B"

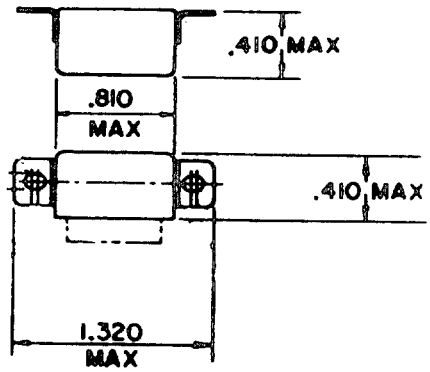

FLANGE MOUNT "C"

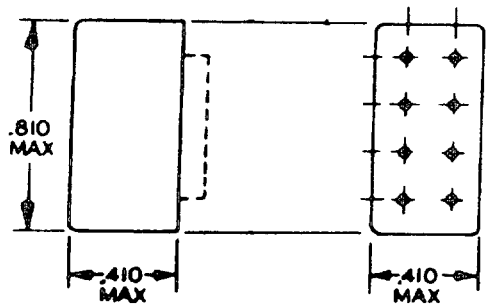

NO MOUNT

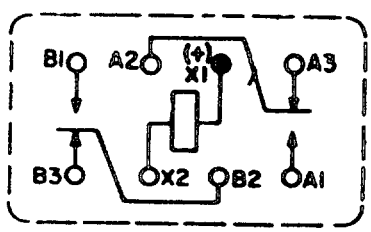


CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 2 AMPERES

MIL-R-39016/6

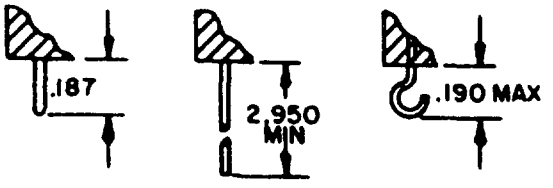

PRINTED WIRE (PW) LEAD | WIRE LEAD | SOLDER LUG

DASH NUMBER *			MOUNT FIG.	LOAD RATING CONTACT ARR.	COIL VOLTAGE (VDC)		AT +25°C COIL RES OHMS ±10%
SOLDER LUG	PRINTED WIRE	WIRE LEAD			RATED	MAX	
104 107 129	105 125 109	106 108 110	B C NONE	TYPE 1 (10-50 uA AT	26.5	32.0	700
111 114 130	112 126 116	113 115 117	B C NONE	10-50 mVdc OR PEAK ac)	12.0	15.0	160
118 121 131	119 127 123	120 122 124	B C NONE		6.0	7.5	40
132 135 138	133 136 139	134 137 140	B C NONE		5.0	6.0	27

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/6- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS

HIGH LEVEL (RELAY CASE GROUNDED)


RESISTIVE: 2 AMPERES AT 28 Vdc.
.3 AMPERE AT 115 Vdc (60-400 Hz)

INDUCTIVE LOAD: .75 AMPERE AT 28 Vdc (.200 HENRY INDUCTANCE)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT LOW LEVEL TO 1 AMPERES

MIL-R-39016/7



CIRCUIT DIAGRAM
TERMINAL VIEW

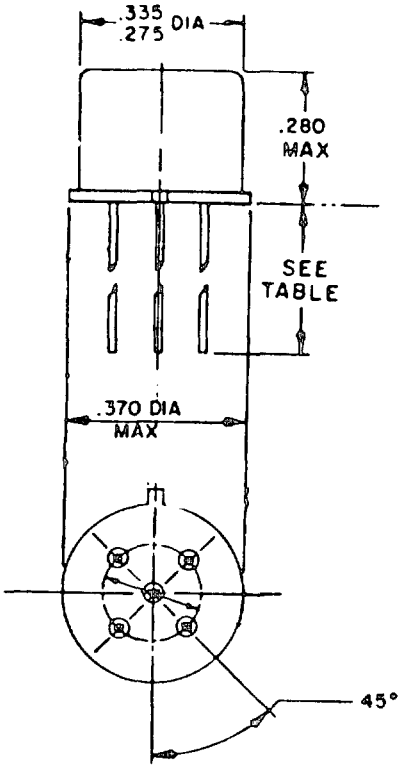

DASH NUMBER LEAD LENGTH .500 MIN #	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10%
	RATED	MAX	
025	5.0	6.0	63
026	6.0	9.0	125
027	9.0	12.0	280
028	12.0	16.0	500
029	18.0	24.0	1,130
030	26.5	32.0	2,000

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/7- # FAILURE RATE: M AND P


CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELAIBILITY, SPDT LOW LEVEL TO 0.5 AMPERE

MIL-R-39016/8

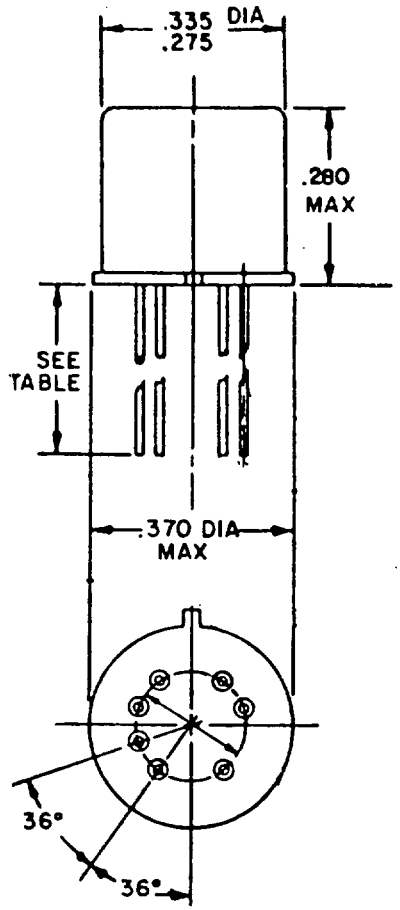

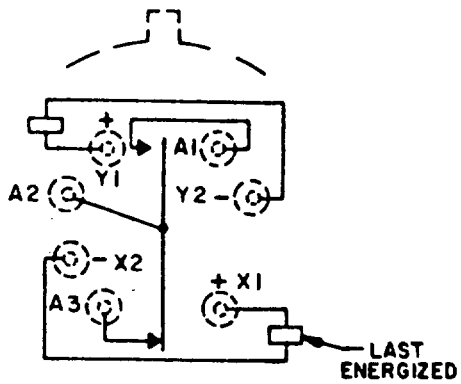

CIRCUIT DIAGRAM
TERMINAL VIEW

DASH NUMBER LEAD LENGTH .500 MIN #	COIL VOLTAGE (VDC)		AT 25°C COIL RESISTANCE OHMS ±10%	OPERATE TIME (ms)	OPERATE VOLTAGE LATCH AND RESET (VDC) MAX	
	RATED	MAX			25°C	125°C
025	5.0	6.0	61	1.5	2.5	3.5
026	6.0	8.0	120	1.5	3.5	4.5
027	9.0	12	280	1.5	5.3	6.8
028	12	16	500	1.5	7.0	9.0
029	18	24	1,130	1.5	10.5	13.5
030	26.5	32	2,000	1.5	14.2	18

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/8- # FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS

HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE 0.5 AMPERE AT 28 Vdc.

INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELAIBILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/9


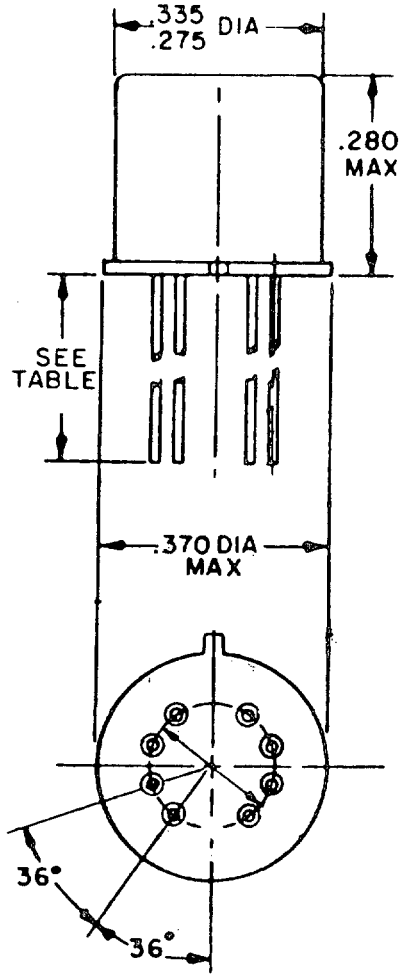


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/9



CIRCUIT DIAGRAM
TERMINAL VIEW

DASH # NUMBER LEAD LENGTH .500 MIN	FIG.	COIL VOLTAGE (VDC) RATED	MAX	At+25°C COIL RES OHMS ±10%
057	1	5.0	5.8	50
058	1	6.0	8.0	98
059	1	9.0	12	220
060	1	12	16	390
061	1	18	24	880
062	1	26.5	32	1,560
063	1	30.5	36	2,500

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER


PART NUMBER: M39016/9-# FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/10



CIRCUIT DIAGRAM
TERMINAL VIEW

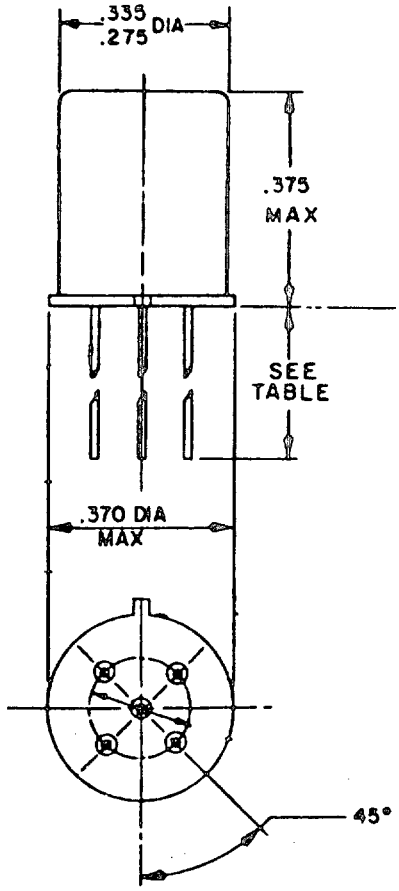

DASH # NUMBER LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC) RATED	MAX	AT+25°C COIL RES OHMS ±10%
033	5.0	8.0	125
034	6.0	11	255
035	12	22	1025
036	26.5	45	4000
037	32	57	6500
038	40	75	11000
039	9.0	12	630
040	18	24	2300

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/10- # FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS


HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE	1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD	0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/11

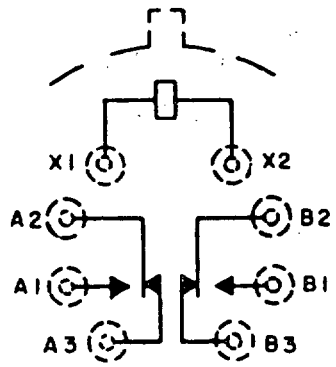

CIRCUIT DIAGRAM
TERMINAL VIEW

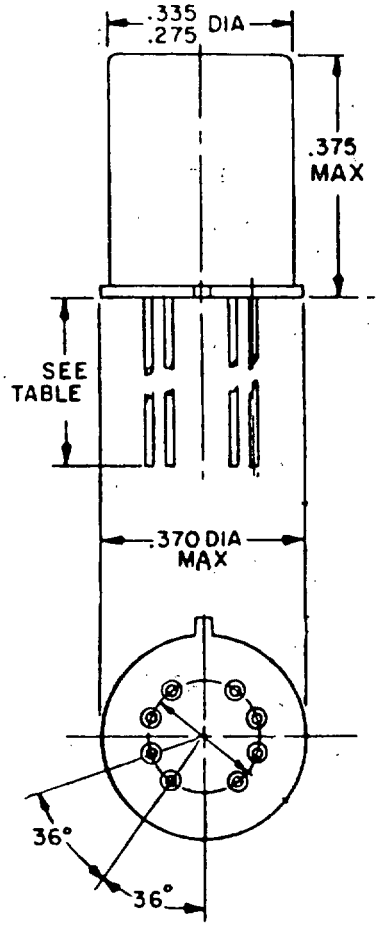

DASH # NUMBER LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC) RATED	MAX	AT 25°C COIL RES OHMS ±10%
033	5.0	7.5	100
034	6.0	10.0	200
035	12.0	20.0	850
036	26.5	40.0	3,300
037	36.0	57.0	6,500
038	48.0	75.0	11,000
039	9.0	15.0	400
040	18.0	38.0	1,600

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER:M39016/11- # FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/12

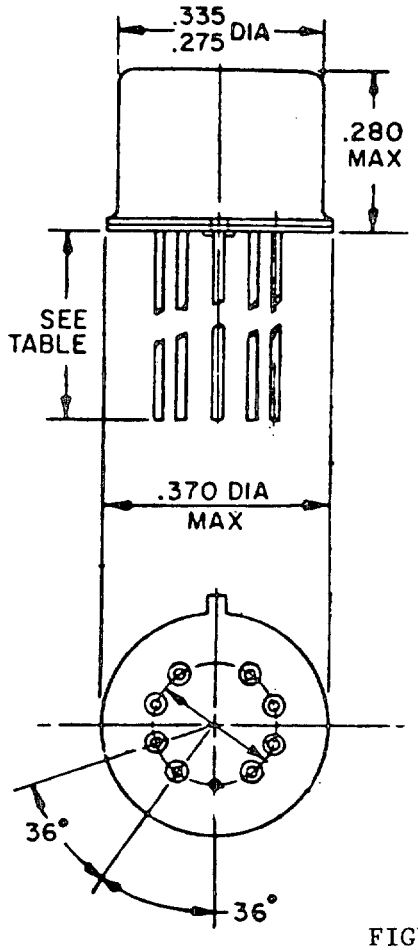


FIGURE 1


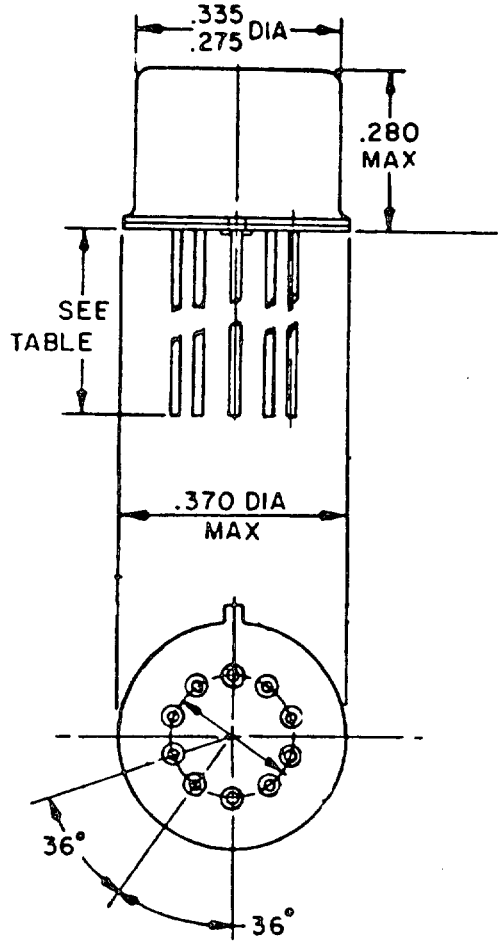


FIGURE 2

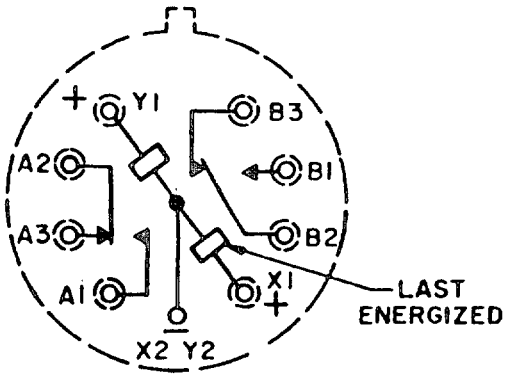


CIRCUIT DIAGRAM
TERMINAL VIEW
FOR FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/12

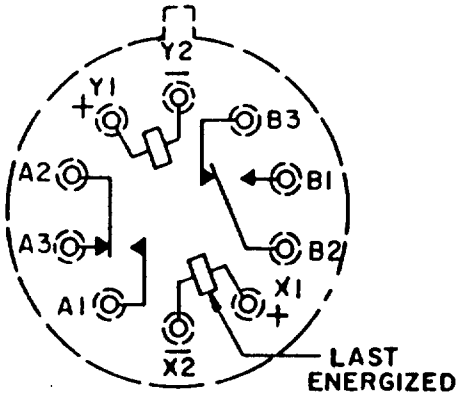

CIRCUIT DIAGRAM
TERMINAL VIEW
FOR FIGURE 2

DASH # NUMBER LEAD LENGTH .500 MIN	FIGURE	NO. OF LEADS	COIL VOLTAGE (VDC) RATED	COIL VOLTAGE (VDC) MAX	AT 25°C COIL RES OHMS ±10%	OPERATE VOLTAGE (VDC) MAX 25°C	OPERATE VOLTAGE (VDC) MAX 125°C	OVER TEMP RANGE OPERATE TIME (MS)
049	1	9	5.0	6.0	61	2.8	3.5	2
050	1	9	6.0	8.0	120	3.5	4.5	2
051	1	9	9.0	12	280	5.3	6.8	2
052	1	9	12	16	500	7.0	9.0	2
053	1	9	18	24	1,130	10.5	13.5	2
054	1	9	26.5	32	2,000	14.2	18.0	2
055	2	10	5.0	6.0	61	2.8	3.5	2
056	2	10	6.0	8.0	120	3.5	4.5	2
057	2	10	9.0	12	280	5.3	6.8	2
058	2	10	12	16	500	7.0	9.0	2
059	2	10	18	24	1,130	10.5	13.5	2
060	2	10	26.5	32	2,000	14.2	18.0	2

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER


PART NUMBER: M39016/12-* FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 2 AMPERES


MIL-R-39016/13

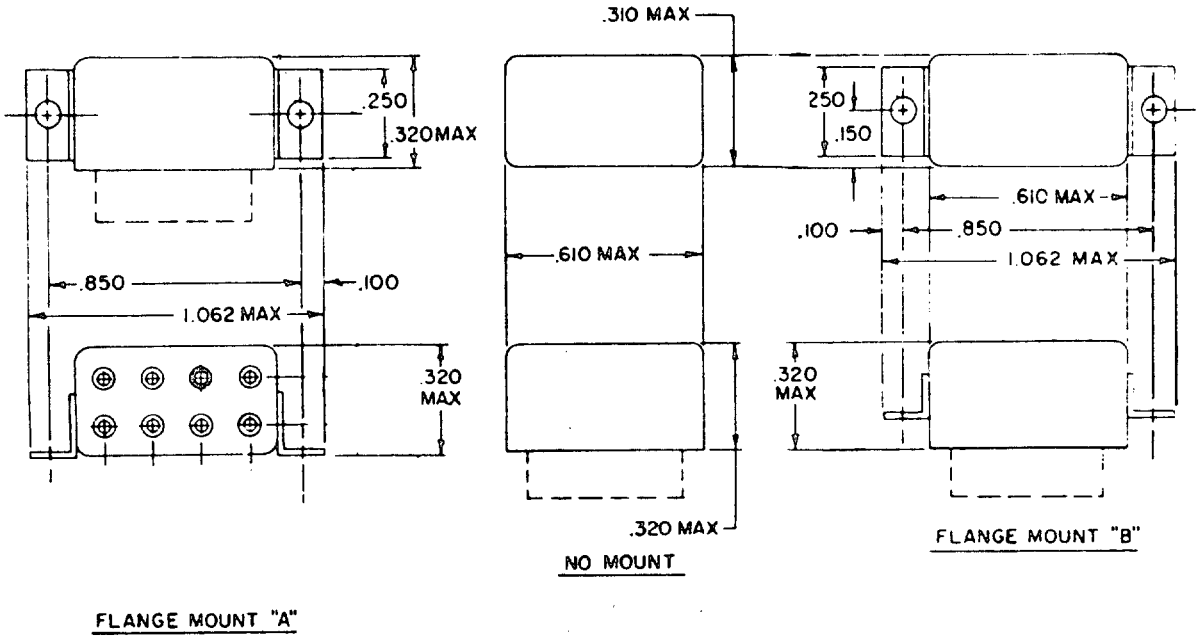

FLANGE MOUNT "A"

NO MOUNT


FLANGE MOUNT "B"

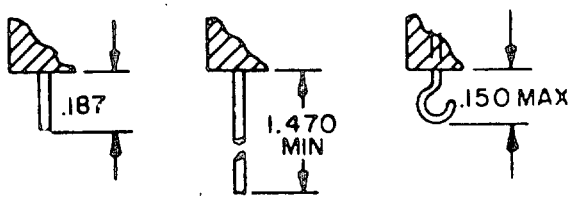

WIRE LEAD
SOLDER PIN-(SP)

WIRE LEAD

SOLDER LUG

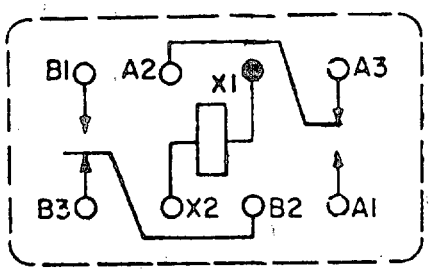

CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 2 AMPERES

MIL-R-39016/13

DASH NUMBER *			MOUNT FIG.	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10%
WIRE LEAD (SP)	LUG	WIRE LEAD		RATED	MAX	
092	093	094	A			
095	096	097	B	5		44
073	098	079	NONE			
099	058	061	A			
070	064	067	B	6	8	56
055	089	074	NONE			
100	101	102	A			
103	104	105	B	9	12	140
075	106	080	NONE			
107	059	062	A			
071	065	068	B	12	16	210
056	090	076	NONE			
108	109	110	A			
111	112	113	B	18	24	650
077	114	081	NONE			
115	060	063	A			
072	066	069	B	26.5	35	1350
057	091	078	NONE			
116	084	085	A			
086	087	088	B	36	46	2245
082	117	082	NONE			

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/13- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS


HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE	2.0 AMPERES AT 28 Vdc. (50,000 OPERATIONS)
	1.0 AMPERE AT 28 Vdc .125 AMPERE AT 115 Vac (60 - 400 Hz)
	0.5 AMPERE AT 115 Vac (60 - 400 Hz) CASE NOT GROUNDED
INDUCTIVE LOAD	0.3 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT, LOW LEVEL TO 2 AMPERES


MIL-R-39016/14

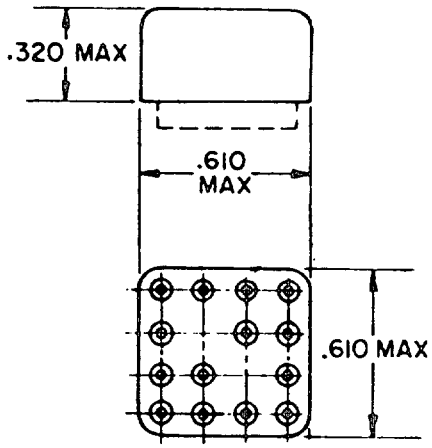


NO MOUNT

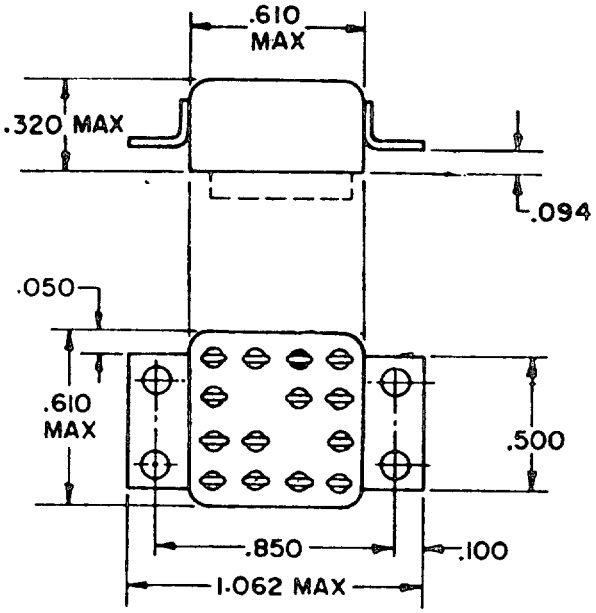

FLANGE MOUNT



WIRE LEAD
(SOLDER PIN-SP)




SOLDER LUG
(SL)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT, LOW LEVEL TO 2 AMPERES

MIL-R-39016/14

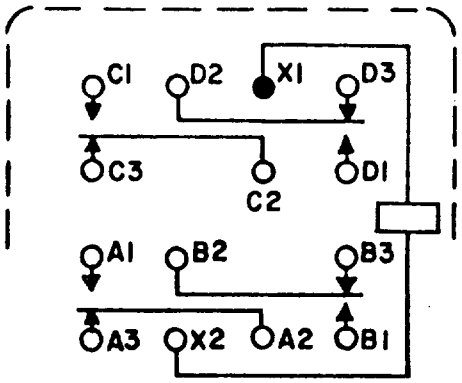

CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

DASH # NUMBER	MOUNT FIG.	LEADS	COIL VOLTAGE (VDC)		AT+25°C COIL RES
			RATED	MAX	OHMS ±10%
001 002	FLANGE NONE	LUG WIRE(SP)	26.5	35	720
003	NONE	WIRE(SP)	22.0	27	430
004 005	FLANGE NONE	LUG WIRE(SP)	6	7	28
006 007	FLANGE NONE	LUG WIRE(SP)	12	14	115

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER

PART NUMBER: M39016/14- # FAILURE RATE: M

CONTACT DATA: LOAD RATINGS

HIGH LEVEL (RELAY CASE GROUNDED)


RESISTIVE — 2.0 AMPERE AT 28 Vdc. .125 AMPERE AT 115 Vac (60 - 400 Hz) WITH CASE GROUNDED. .5 AMPERE RESISTIVE AT 115 Vac (60 AND 400 Hz) WITH CASE NOT GROUNDED.

INDUCTIVE LOAD — 0.5 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 1.0 AMPERE\W INTERNAL DIODE

MIL-R-39016/15

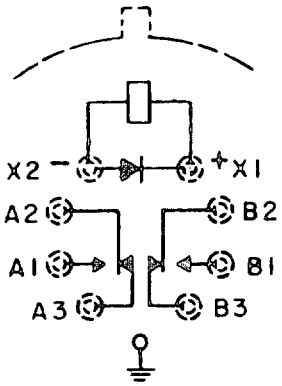

CIRCUIT DIAGRAM
TERMINAL VIEW

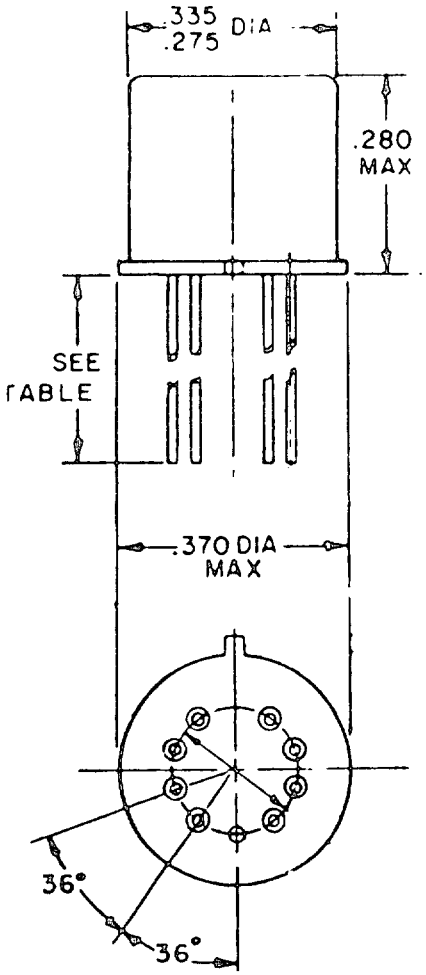

DASH # NUMBER LEAD LENGTH .500 MIN		COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10%
	W/GRD	RATED	MAX	
077	089	6.0	8.0	98
078	090	9.0	12	220
079	091	12	16	390
080	092	18	24	880
081	093	26.5	32	1560
082	094	5.0	5.8	50

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/15- # FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/16



CIRCUIT DIAGRAM
TERMINAL VIEW

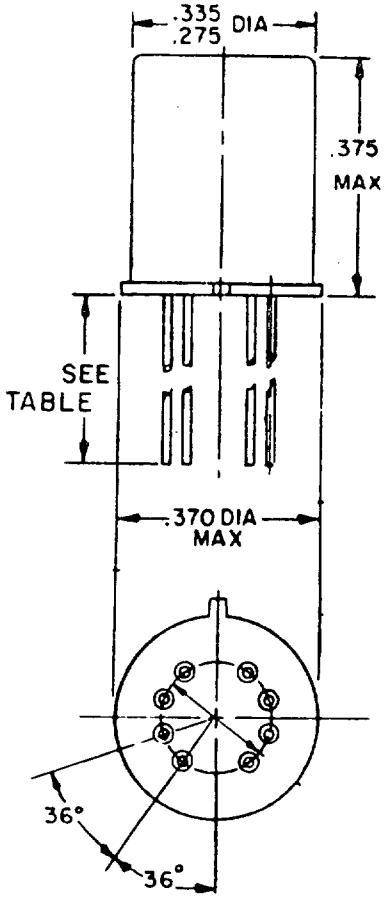

DASH # NUMBER LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC) RATED	MAX	AT+25°C COIL RES OHMS ±10%
033	5.0	7.5	100
034	6.0	10	200
035	12	20	850
036	26.5	40	3,300
037	36	57	6,500
038	48	75	11,000
039	9	15	400
040	18	30	1600

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/16- # FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 1 AMPERE

MIL-R-39016/17



CIRCUIT DIAGRAM
TERMINAL VIEW

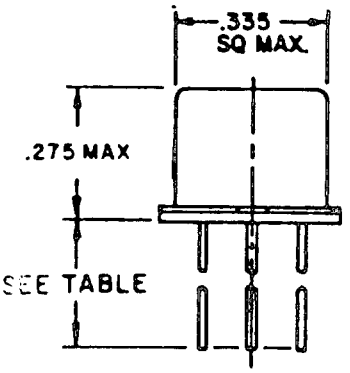



DASH NUMBER LEAD LENGTH .500 MIN *	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10%
	RATED	MAX	
031	5	5.8	50
032	6	8	98
033	9	12	220
034	12	16	390
035	18	24	800
036	26.5	32	1560

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER


PART NUMBER: M39016/17-* FAILURE RATE: M AND P


CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODE

MIL-R-39016/18

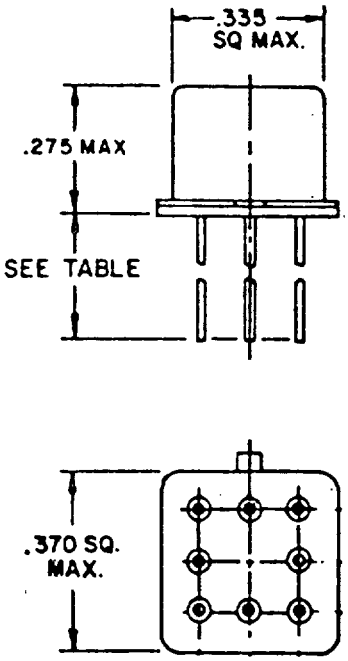



CIRCUIT DIAGRAM
TERMINAL VIEW

DASH NUMBER LEAD LENGTH .500 MIN *	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10%
	RATED	MAX	
031	5	5.8	50
032	6	8	98
033	9	12	220
034	12	16	390
035	18	24	880
036	26.5	32	1,560

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/18-* FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/19



CIRCUIT DIAGRAM
TERMINAL VIEW

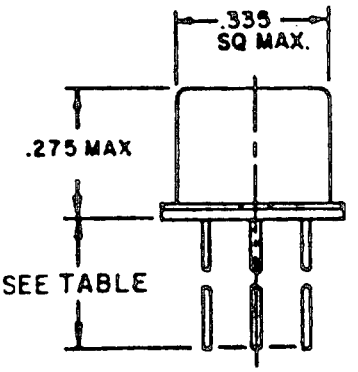



DASH NUMBER LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS (REF ONLY)	AT 25°C COIL CKT CURRENT (MA)	
	RATED	MAX		MAX	MIN
031	5.0	5.8	39	128.2	93.2
032	6.0	8.0	78	78.3	58.3
033	9.0	12.0	220	42.9	33.0
034	12.0	16.0	390	32.8	25.6
035	18.0	24.0	880	22.1	17.5
036	26.5	32.0	1,560	26.5	14.8

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/19- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/20



CIRCUIT DIAGRAM
TERMINAL VIEW

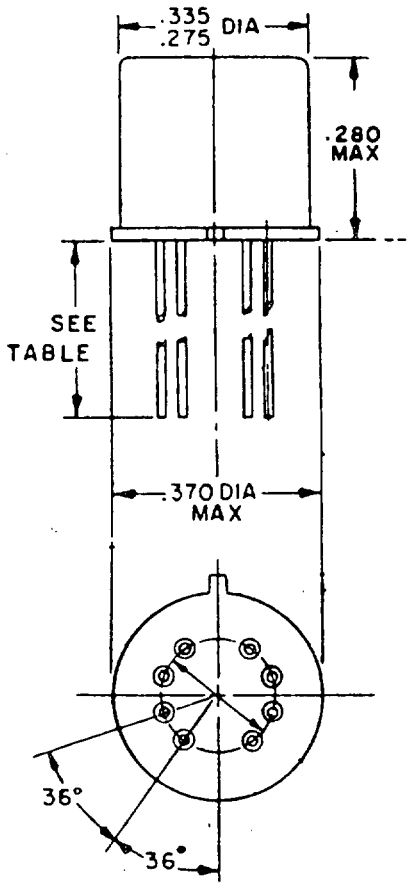

DASH NO. * LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS (REF ONLY)	AT 25°C COIL CKT CURRENT (MA)	
	RATED	MAX		MAX	MIN
049	5.0	5.8	39	128.2	93.2
050	6.0	8.0	78	78.3	58.3
051	9.0	12.0	220	42.9	33.0
052	12.0	16.0	390	32.8	25.6
053	18.0	24.0	880	22.1	17.5
054	26.5	32.0	1,560	18.5	14.8

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/20- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/21

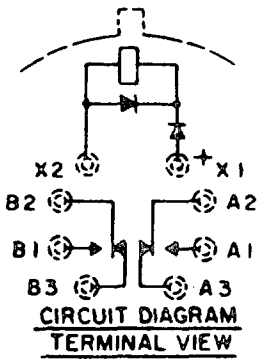

CIRCUIT DIAGRAM
TERMINAL VIEW

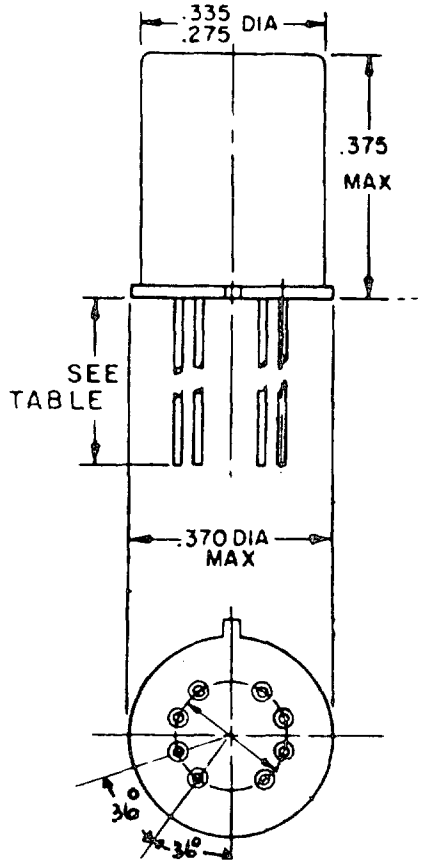

DASH NO. * LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS (REF ONLY)	COIL CKT CURRENT (MA)	
	RATED	MAX		MAX	MIN
033	5.0	7.0	64	78.1	56.8
034	6.0	10.0	125	48.9	36.3
035	9.0	15.0	400	23.6	18.1
036	12.0	20.0	850	15.0	11.7
037	18.0	30.0	1,600	12.2	9.6
038	26.5	40.0	3,300	8.8	7.0
039	36.0	57.0	6,500	6.1	4.9
040	48.0	75.0	11,000	4.8	3.9

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/21- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC. ESTABLISHED RELIABILITY,DPDT LOW LEVEL TO 2 AMPERES


MIL-R-39016/22

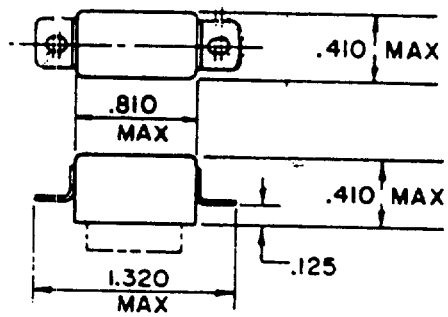


FLANGE MOUNT "B"

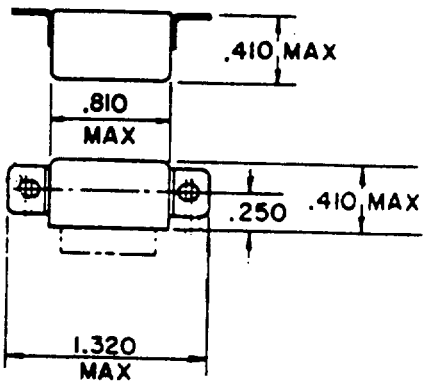

FLANGE MOUNT "C"

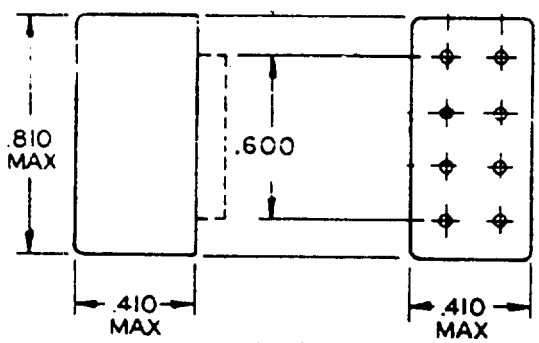

NO MOUNT

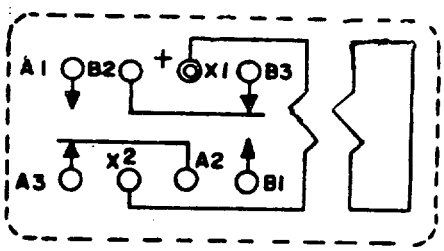


CIRCUIT DIAGRAM
TERMINAL VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY,DPDT LOW LEVEL TO 2 AMPERES

MIL-R-39016/22

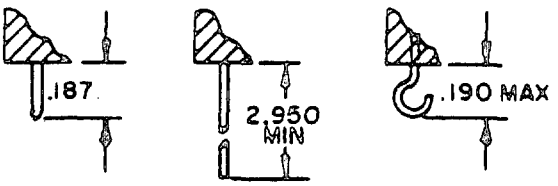

WIRE LEAD (SOLDER PIN-SP) | WIRE LEAD | SOLDER LUG

* DASH NUMBER			MOUNT OR FLANGE	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10%
SOLDER LUG	WIRE LEAD (SP)	WIRE LEAD		RATED	MAX	
	---	---				
004	005	006	B	26.5	32.0	700
007	---	008	C			
---	009	010	NONE			
	---	---				
011	012	013	B	12.0	15.0	160
014	---	015	C			
---	016	017	NONE			
	---	---				
018	019	020	B	6.0	7.5	40
021	---	022	C			
---	023	024	NONE			

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/22-* FAILURE RATE: M

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 2.0 AMPERE AT 28 Vdc, 0.1 AMPERE AT 115 Vac (60-400 Hz)
INDUCTIVE LOAD 0.5 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL TO 1.0 AMPERE W INTERNAL DIODE

MIL-R-39016/23



CIRCUIT DIAGRAM
TERMINAL VIEW

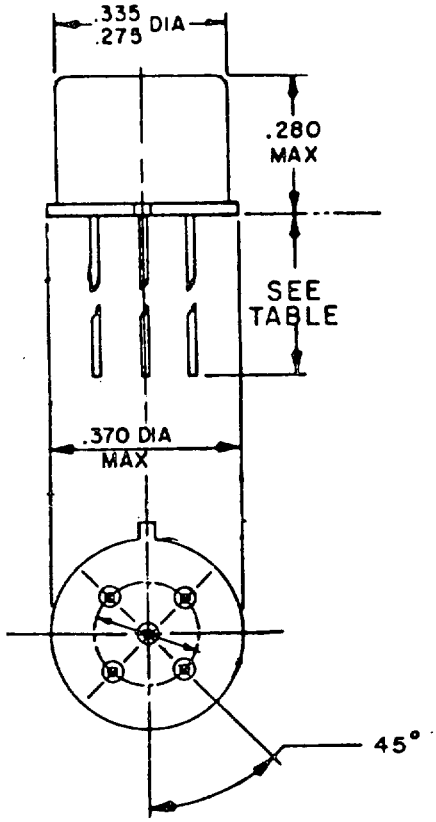

DASH NUMBER LEAD LENGTH .500 MIN *	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10%
	RATED	MAX	
025	5.0	5.8	63
026	6.0	8.0	125
027	9.0	12	280
028	12	16	500
029	18	24	1130
030	26.5	32	2000

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER


PART NUMBER: M39016/23-* FAILURE RATE: M AND P


CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/24

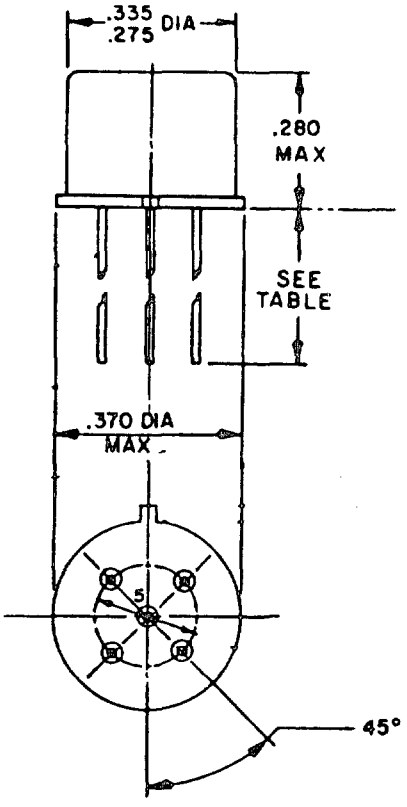



CIRCUIT DIAGRAM
TERMINAL VIEW

DASH NO. # LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS (REF ONLY)	AT 25°C COIL CKT CURRENT (MA)	
	RATED	MAX		MAX	MIN
025	5.0	6.0	50	100.0	72.7
026	6.0	8.0	98	62.4	46.3
027	9.0	12	280	33.7	25.9
028	12	16	500	25.6	20.0
029	18	24	1,130	17.2	13.6
030	26.5	32	2,000	14.4	11.5

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/24- # FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/25



CIRCUIT DIAGRAM
TERMINAL VIEW

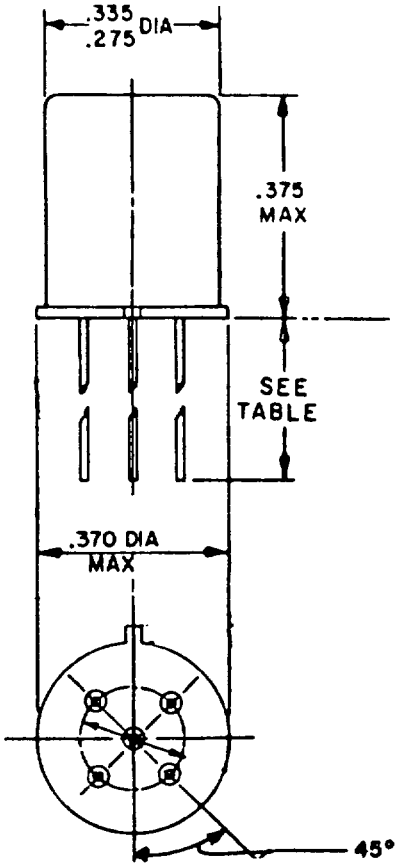

* DASH NUMBER LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC) RATED	MAX	AT 25°C COIL RES OHMS ±10%
033	5.0	8.0	125
034	6.0	11	255
035	12	22	1,025
036	26.5	45	4,000
037	32	57	6,500
038	48	75	11,000
039	9.0	16	630
040	18	33	2,300

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/25- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/26



CIRCUIT DIAGRAM
TERMINAL VIEW

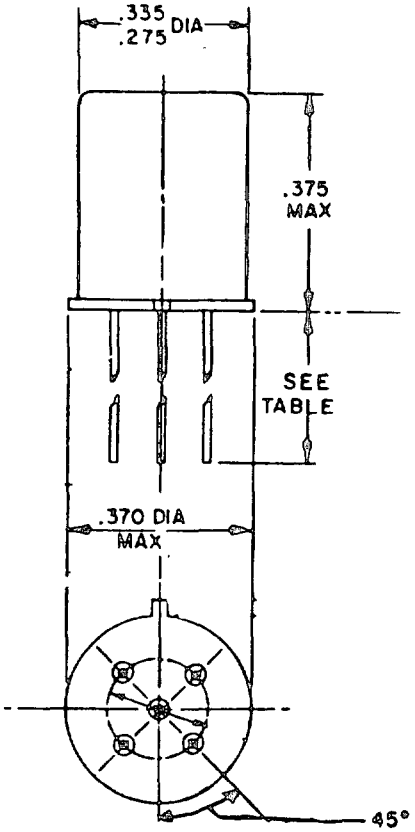

DASH NO. * LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS (REF ONLY)	COIL CKT CURRENT (MA)	
	RATED	MAX		MAX	MIN
033	5.0	8.0	100	50.0	36.3
034	6.0	11	200	30.6	22.7
035	12	22	1,025	12.5	9.7
036	26.5	45	4,000	7.2	5.7
037	32	57	6,500	5.4	4.3
038	40	75	11,000	4.0	3.2
039	9.0	16	630	15.0	11.5
040	18	33	2,300	8.5	6.7

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/26-* FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL TO 0.5 AMPERE/W INTERNAL DIODES

MIL-R-39016/27

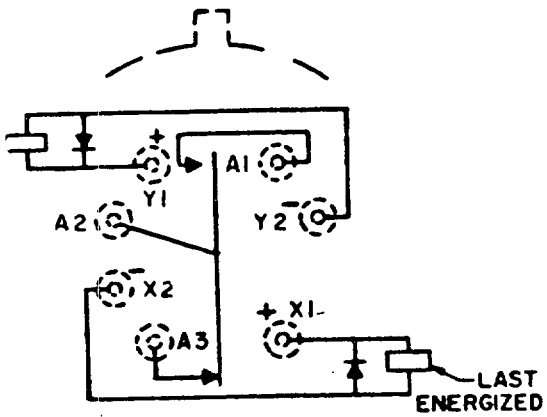

CIRCUIT DIAGRAM
TERMINAL VIEW

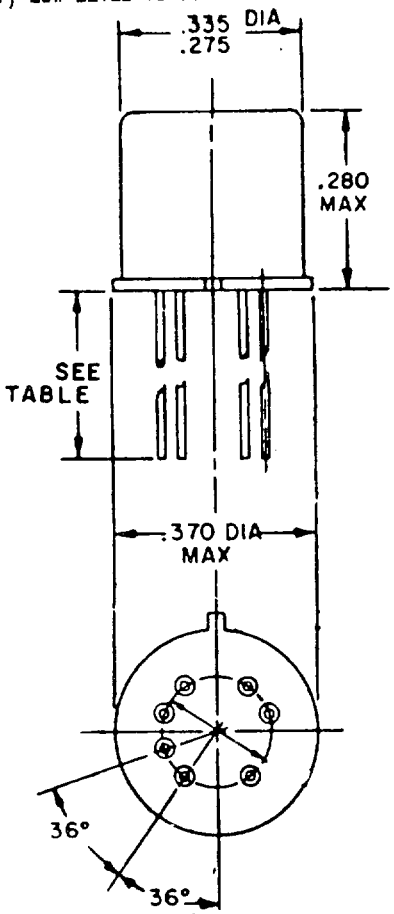

# DASH NUMBER LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10%	OPERATE VOLTAGE (VDC) MAX	
	RATED	MAX		25°C	125°C
025	5.0	5.8	61	2.8	3.7
026	6.0	8.0	125	3.5	4.5
027	9.0	12	280	5.3	6.8
028	12	16	500	7.0	9.0
029	18	24	1,130	10.5	13.5
030	26.5	32	2,000	14.2	18.0

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/27- # FAILURE RATE: M AND P


CONTACT DATA: LOAD RATINGS

HIGH LEVEL (RELAY CASE GROUNDED)


RESISTIVE	0.5 AMPERE AT 28 Vdc.
INDUCTIVE LOAD	0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL TO 0.5 AMPERE (LATCHING) /W INTERNAL DIODES

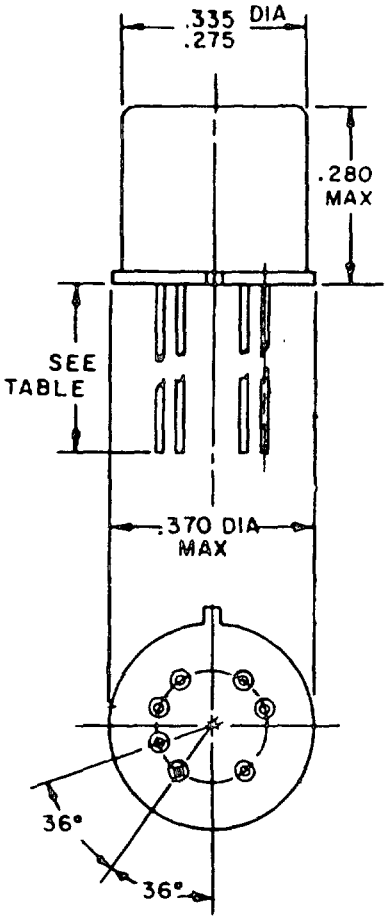

MIL-R-39016/28

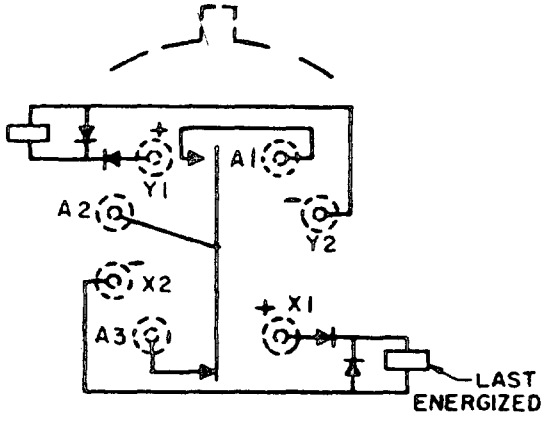

CIRCUIT DIAGRAM
TERMINAL VIEW

DASH NO. * LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS (REF ONLY)	AT 25°C COIL CKT CURRENT (MA)		OPERATE VOLTAGE (VDC)	OVER TEMP RANGE OPERATE VOLTAGE (VDC)
	RATED	MAX		MAX	MIN	MAX	MAX
025	5.0	6.0	48	104.2	75.8	3.5	4.5
026	6.0	8.0	97	63.0	46.9	4.1	5.5
027	9.0	12	280	33.7	26.0	6.3	7.8
028	12	16	500	25.6	20.0	8.0	10
029	18	24	1,130	17.2	13.7	11.6	14.5
030	26.5	32	2,000	14.4	11.6	15.4	19

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/28- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 0.5 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE (LATCHING) /W INTERNAL DIODES

MIL-R-39016/29

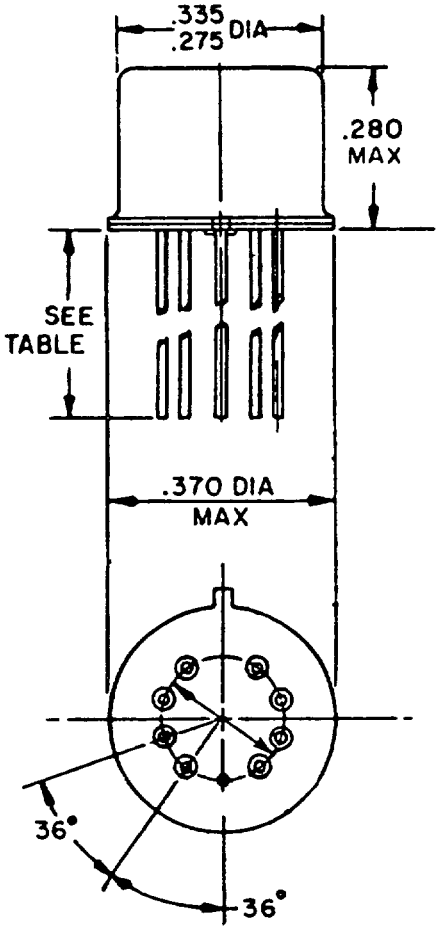


FIGURE 1


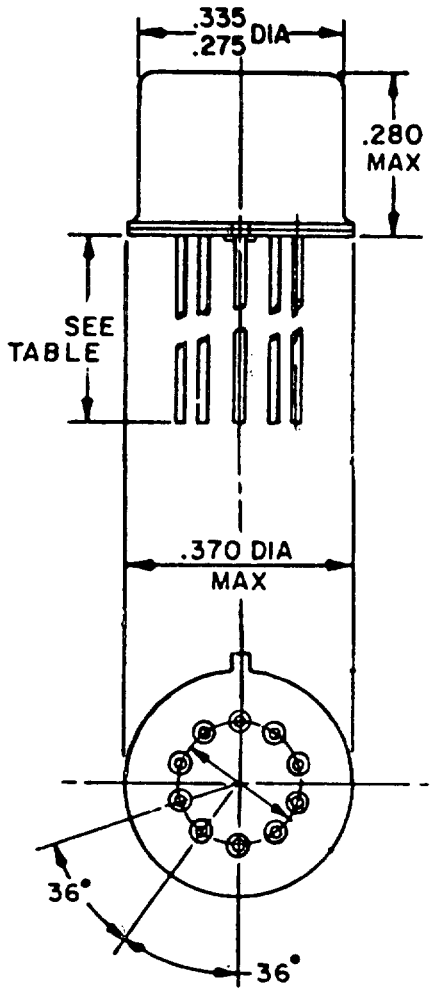


FIGURE 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE (LATCHING) /W INTERNAL DIODES

MIL-R-39016/29

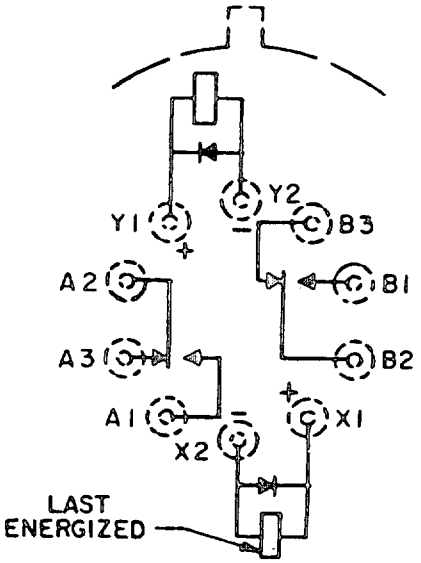

CIRCUIT DIAGRAM
TERMINAL VIEW
FOR FIGURE 2

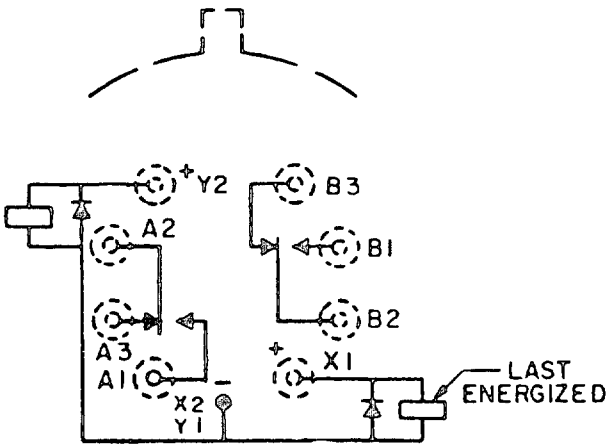

CIRCUIT DIAGRAM
TERMINAL VIEW
FOR FIGURE 1

# DASH NUMBER LEAD LENGTH .500 MIN	FIGURE	NO. OF LEADS	COIL VOLTAGE (VDC)		AT 25°C		OVER TEMP RANGE OPERATE VOLTAGE (VDC) MAX
			RATED	MAX	COIL RES OHMS ±10%	OPERATE VOLTAGE (VDC) MAX	
049	1	9	6.0	8.0	120	3.5	4.5
050	1	9	9.0	12	280	5.3	6.8
051	1	9	12	16	500	7.0	9.0
052	1	9	18	24	1,130	10.5	13.5
053	1	9	26.5	32	2,000	14.2	18
054	1	9	5.0	6.0	61	2.8	3.7
055	2	10	5.0	6.0	61	2.8	3.7
056	2	10	6.0	8.0	120	3.5	4.5
057	2	10	9.0	12	280	5.3	6.8
058	2	10	12	16	500	7.0	9.0
059	2	10	18	24	1,130	10.5	13.5
060	2	10	26.5	32	2,000	14.2	18

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/29- # FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/30

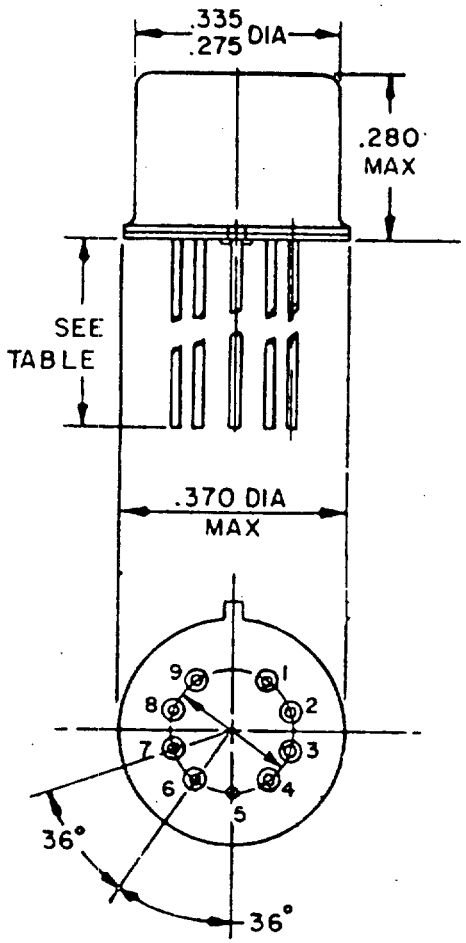


FIGURE 1


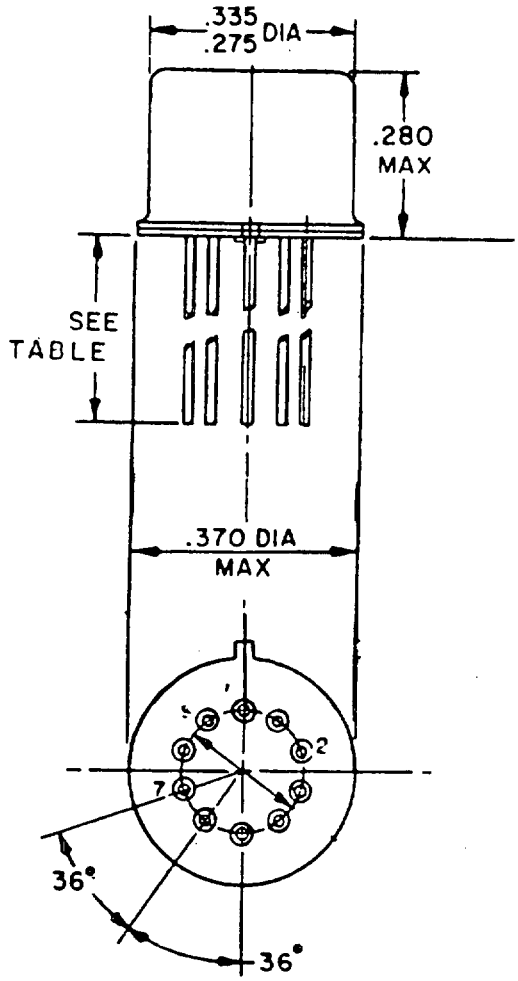


FIGURE 2

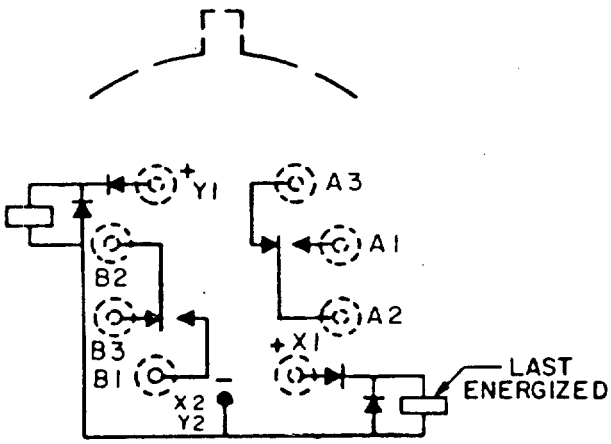


CIRCUIT DIAGRAM
TERMINAL VIEW
FOR FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/30

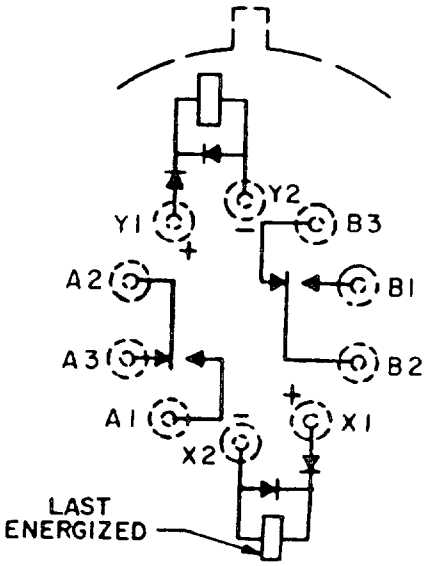

FOR FIGURE 2

CIRCUIT DIAGRAM
TERMINAL VIEW

* DASH NUMBER LEAD LENGTH .500 MIN	FIGURE	NO. OF LEADS	COIL VOLTAGE (VDC)		COIL RES OHMS (REF ONLY)	AT +25°C COIL CIRCUIT CURRENT (MA)		OPERATE VOLTAGE (VDC) MAX	OVER TEMP RANGE OPERATE VOLTAGE (VDC) (MAX)
			RATED	MAX		MAX	MIN		
049	1	9	6.0	8.0	97	63.0	46.9	4.1	5.5
050	1	9	9.0	12	280	33.7	26.0	6.3	7.8
051	1	9	12	16	500	25.5	20.0	8.0	10
052	1	9	18	24	1,130	17.2	13.7	11.6	14.5
053	1	9	26.5	32	2,000	14.4	11.6	15.4	19
054	1	9	5.0	6.0	48	104.2	75.8	3.5	4.5
055	2	10	5.0	6.0	48	104.2	75.8	3.5	4.5
056	2	10	6.0	8.0	97	63.0	46.9	4.1	5.5
057	2	10	9.0	12	280	33.7	26.0	6.3	7.8
058	2	10	12	16	500	25.5	20.0	8.0	10
059	2	10	18	24	1,130	17.2	13.7	11.6	14.5
060	2	10	26.5	32	2,000	14.4	11.6	15.4	19

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/30- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES, LATCHING

MIL-R-39016/31

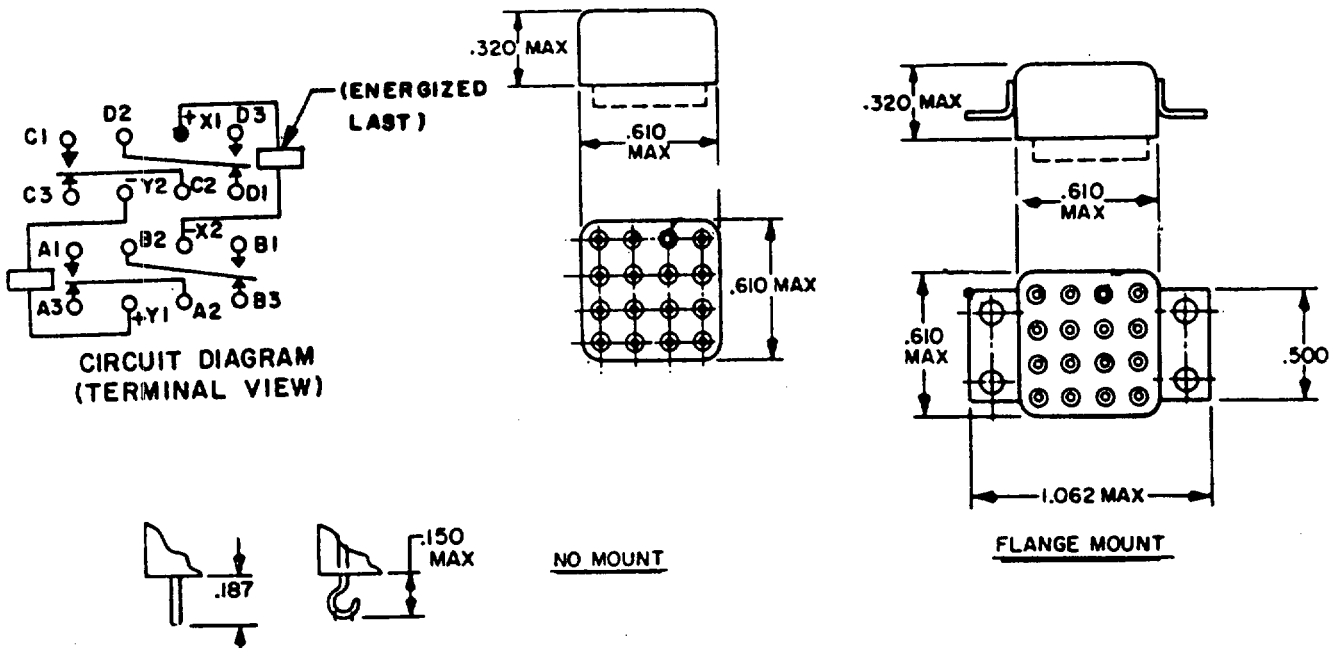

DASH NUMBER *	MOUNT	TERMINAL	COIL VOLTAGE (VDC) RATED	COIL VOLTAGE (VDC) MAX	AT 25°C COIL RES OHMS ±10%	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX 25°C	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX 125°C
001	NONE	WIRE LEAD(SP)	6.0	7.2	37	2.6	3.8
002			12.0	14.5	145	5.2	7.6
003			26.5	35.0	975	13.5	18.0
004	FLANGE	SOLDER LUG	6.0	7.2	37	2.6	3.8
005			12.0	14.5	145	5.2	7.6
006			26.5	35.0	975	13.5	18.0

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/31- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS

HIGH LEVEL (RELAY CASE GROUNDED)


RESISTIVE — 2.0 AMPERES AT 28 Vdc.
.125 AMPERE AT 115 Vac (60 TO 400 Hz)
0.5 AMPERE AT 115 Vac (60 TO 400 Hz CASE NOT GROUNDED).

INDUCTIVE LOAD — 0.5 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES, LATCHING


MIL-R-39016/32

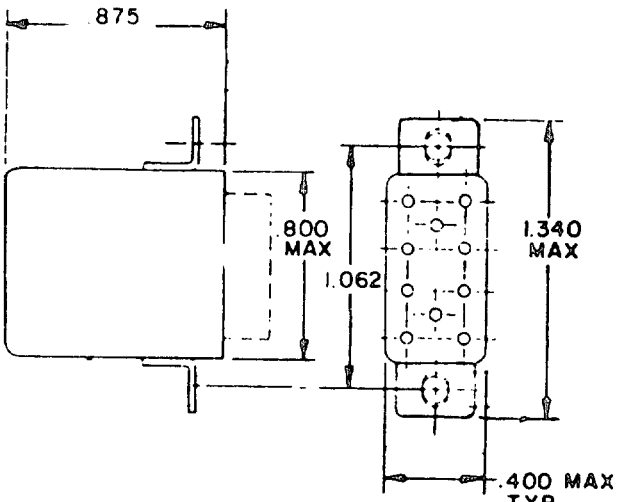


FLANGE MOUNT

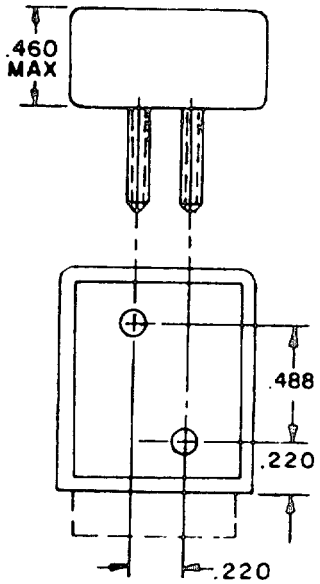


STUD MOUNT

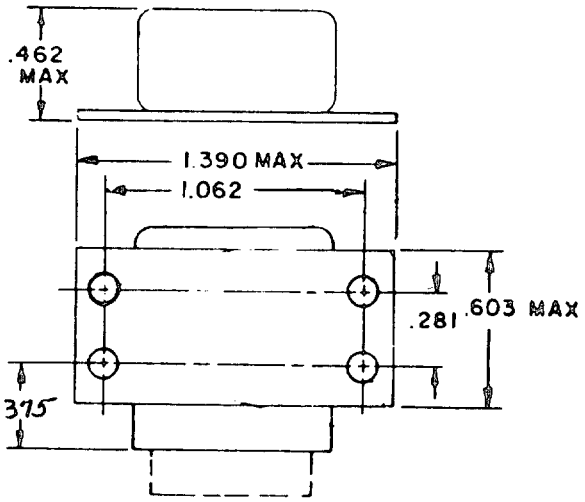

BRACKET MOUNT



NO MOUNT

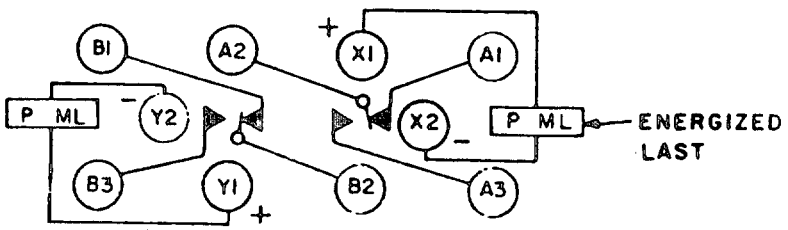


CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES, LATCHING

MIL-R-39016/32

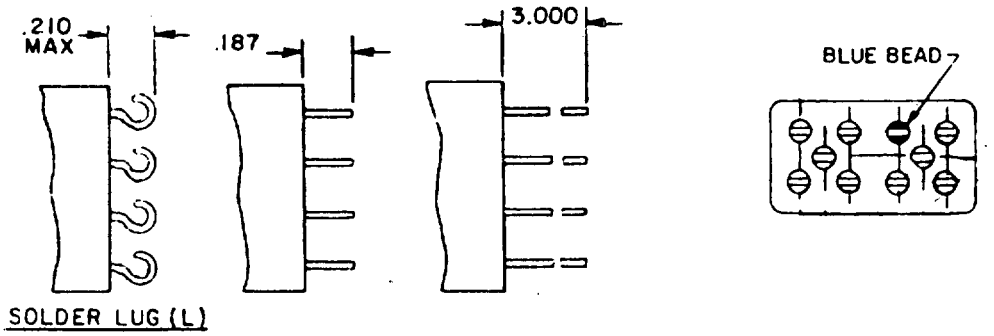

SOLDER LUG (L)

WIRE LEAD (W)

TERMINAL VIEW

PRINTED WIRE
PIN (PW)

# DASH NUMBER			MOUNT	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10%	OPERATE VOLTAGE (VDC) MAX	
SOLDER LUG	PW	WIRE LEAD		RATED	MAX		25°C	125°C
001	---	---	STUD					
002	---	019	BRACKET					
003	004	---	FLANGE	26.5	32	975	12	18
005	006	---	NONE					
007	---	---	STUD					
008	---	020	BRACKET					
009	010	---	FLANGE	12	16	300	5.8	8.5
011	012	---	NONE					
013	---	---	STUD					
014	---	021	BRACKET					
015	016	---	FLANGE	6	8	82	3.0	4.2
017	018	---	NONE					

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/32- # FAILURE RATE: L

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 2.0 AMPERES AT 28 Vdc.
0.15 AMPERES AT 115 Vdc. (60 AND 400 Hz).
INDUCTIVE LOAD 0.8 AMPERE AT 28 Vdc (200 mH) 0.1 AMPERE AT 115 V 60 AND 400 Hz


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS,RF, ESTABLISHED RELIABILITY, ELECTRICAL, HERMETICALLY SEALED, SPDT AND DPDT, DC TO 1 GHZ


MIL-R-39016/33

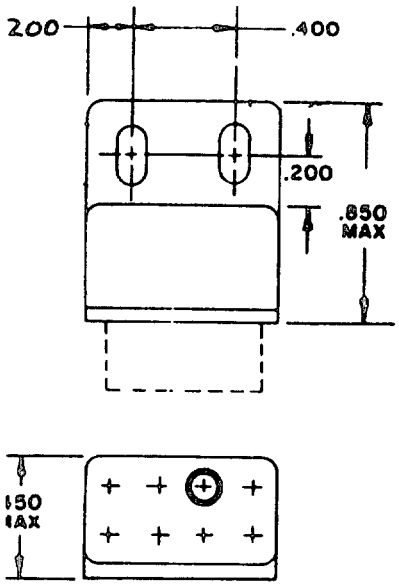


FLANGE MOUNT A

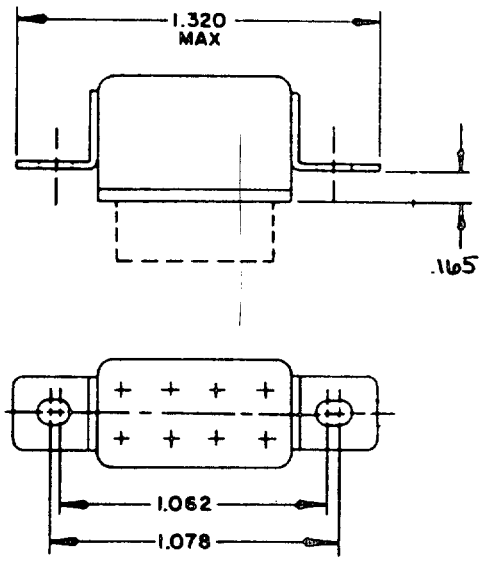


FLANGE MOUNT B

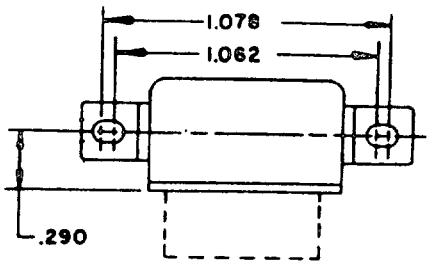


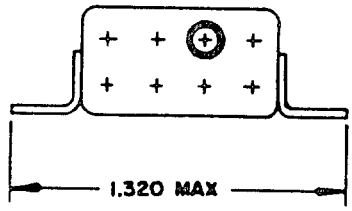


FLANGE MOUNT C

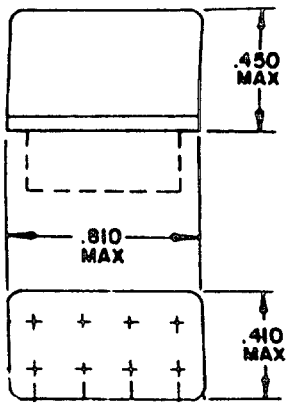

NO MOUNT

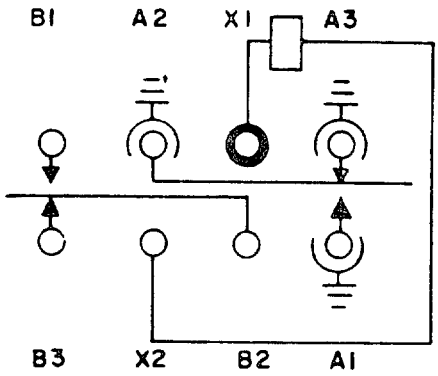

SPDT-RF
SPDT-AUX

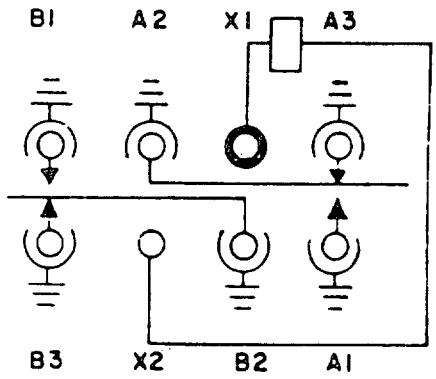


DPDT-RF

CIRCUIT DIAGRAMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS,RF, ESTABLISHED RELIABILITY, ELECTRICAL, HERMETICALLY SEALED, SPDT AND DPDT, DC TO 1 GHZ

MIL-R-39016/33

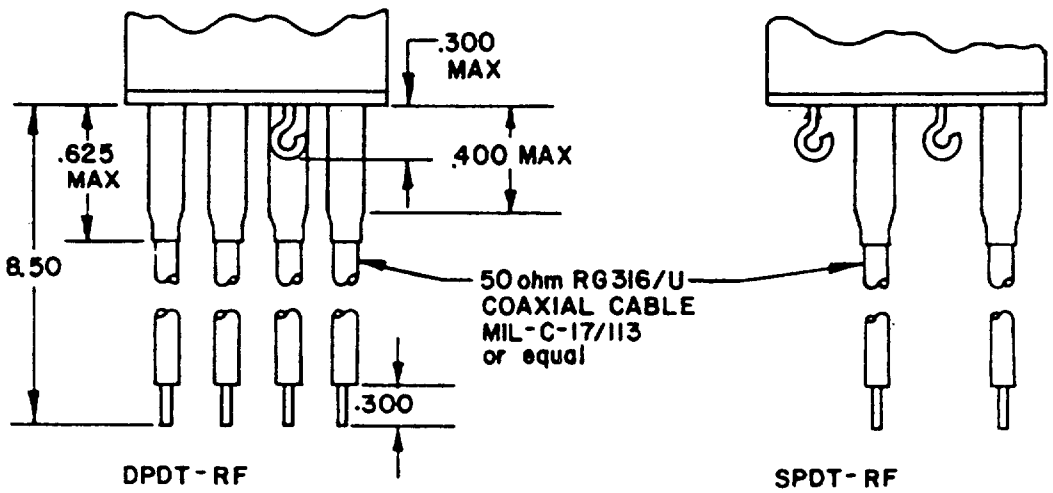

TERMINAL CONFIGURATIONS

* DASH NUMBER			NO MOUNT	CONTACT ARR	COIL VOLTAGE (VDC)		AT+25°C COIL RES
FLANGE C	FLANGE A	FLANGE B			RATED	MAX	OHMS ±10%
001	007	013	019	2FORM C	26.5	32	700
002	008	014	020	1FORM C*	26.5	32	700
003	009	015	021	2FORM C	12	15	160
004	010	016	022	1FORM C*	12	15	160
005	011	017	023	2FORM C	6.0	7.5	40
006	012	018	024	1FORM C*	6.0	7.5	40


* ONE SPDT COAXIAL INPUT AND ONE SPDT AUXILIARY DC INPUT.
* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/33- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 2.0 AMPERE AT 28 Vdc.
INDUCTIVE 0.5 AMPERE AT 28 Vdc(MAX 28mH)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

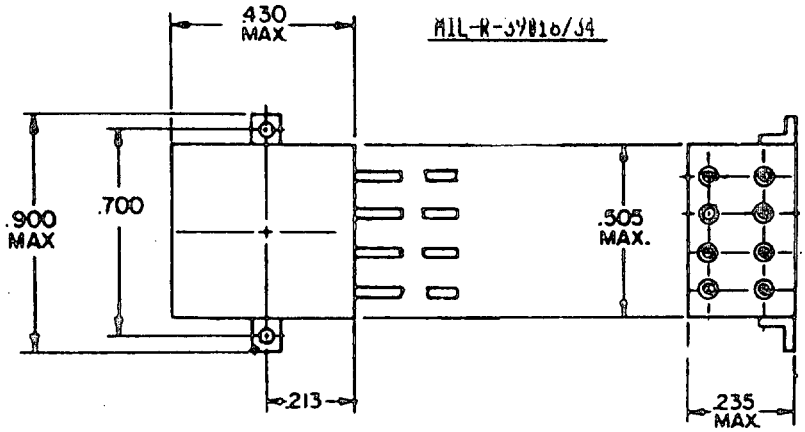




WIRE LEAD


BRACKET MOUNT

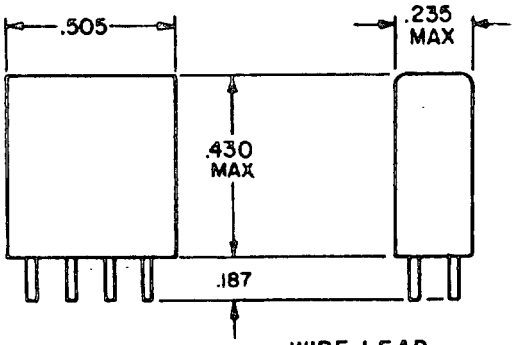

NO MOUNT

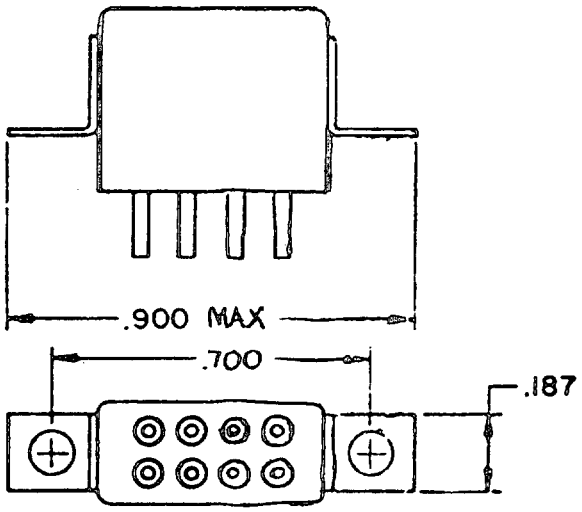

FLANGE MOUNT

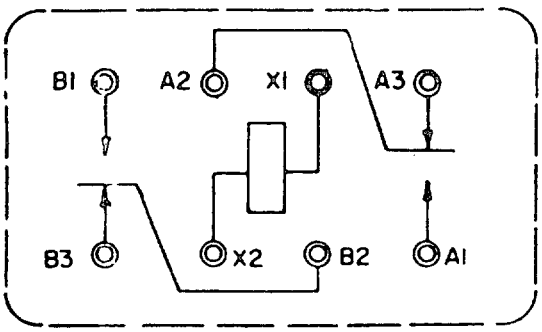


CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/34

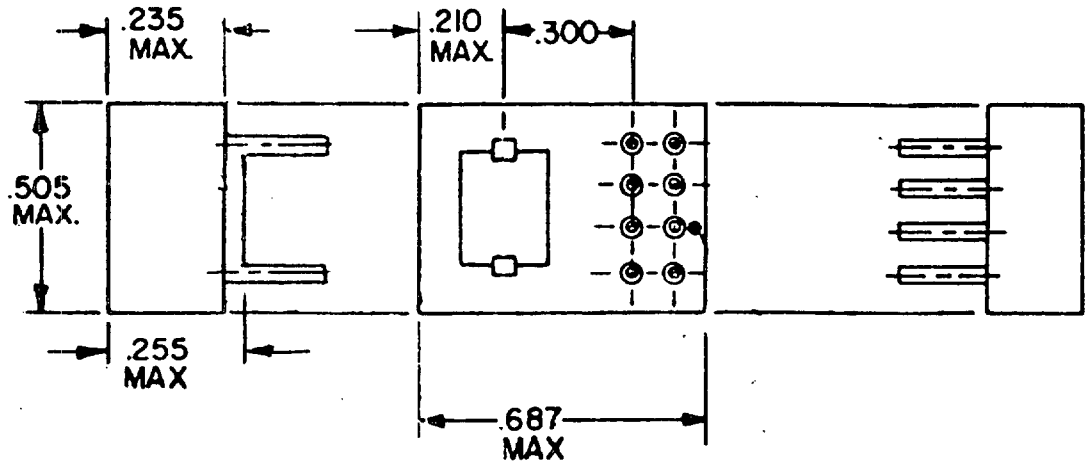

TAB MOUNT

DASH NUMBER #	MOUNT	TERMINAL	COIL VOLTAGE (VDC) RATED	COIL VOLTAGE (VDC) MAX	AT 25°C COIL RES OHMS ±10%
001	BRKT	WIRE LEAD			
002	NONE	(SP)	6.0	8.0	90
003	TAB	(SP)			
004	BRKT				
005	NONE	(SP)	12	16	310
006	TAB	(SP)			
007	BRKT				
008	NONE	(SP)	26.5	32	1500
009	TAB	(SP)			
010	NONE	PIN PLUG-IN	6.0	8.0	90
011	NONE		12	16	310
012	NONE		26.5	32	1500
013	FLANGE		6.0	8.0	90
014	FLANGE		12	16	310
015	FLANGE		26.5	32	1500

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/34- # FAILURE RATE: M

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES, LATCHING/W INTERNAL DIODES


MIL-R-39016/35

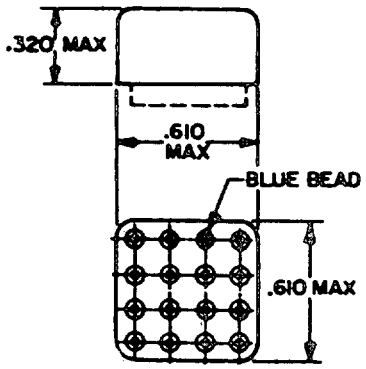


NO MOUNT

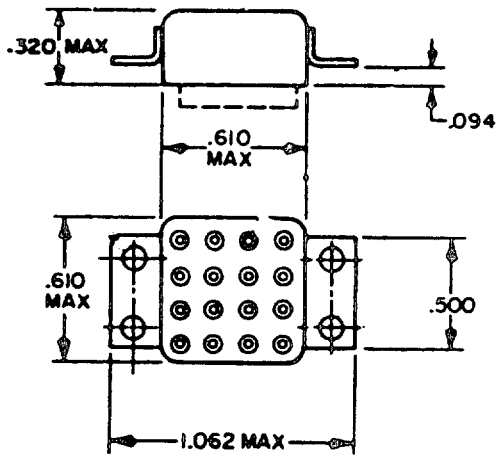

FLANGE MOUNT

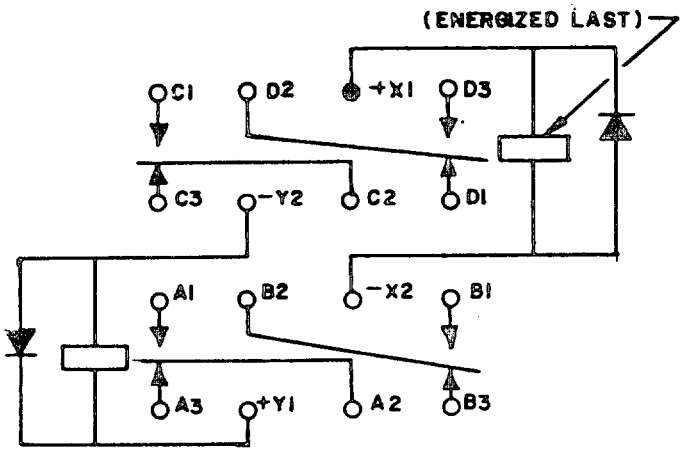

CIRCUIT DIAGRAM
(TERMINAL VIEW)



WIRE LEAD
(SOLDER PIN-SP)

SOLDER LUG

TERMINALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES, LATCHING/W INTERNAL DIODES

MIL-R-39016/35

DASH NUMBER #	MOUNT	TERM.	COIL VOLTAGE (VDC) NOM.	COIL VOLTAGE (VDC) MAX	AT 25°C COIL RES OHMS ±10 %	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX 25°C	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX 125°C
001	NONE	WIRE LEAD(SP)	6.0	7.2	37	2.6	3.8
002			12.0	14.5	145	5.2	7.6
003			26.5	35.0	975	13.5	18.0
004	FLANGE	SOLDER LUG	6.0	7.2	37	2.6	3.8
005			12.0	14.5	145	5.2	7.6
006			26.5	35.0	975	13.5	18.0

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/35- # FAILURE RATE: M

CONTACT DATA: LOAD RATINGS


HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE	2.0	AMPERE AT 28 Vdc.
	.125	AMPERE AT 115 Vac (60 TO 400 Hz)
	0.5	AMPERE AT 115 Vac (60 TO 400 Hz CASE UNGROUNDED).
INDUCTIVE LOAD	0.5	AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE WITH CASE GROUNDED.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES, LATCHING/W INTERNAL DIODES


MIL-R-39016/36

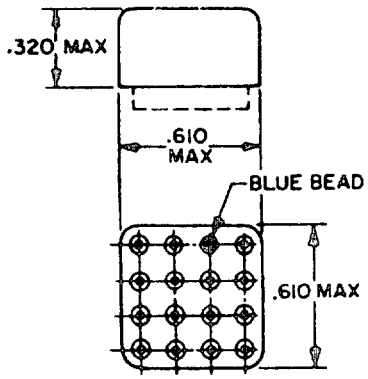

NO MOUNT

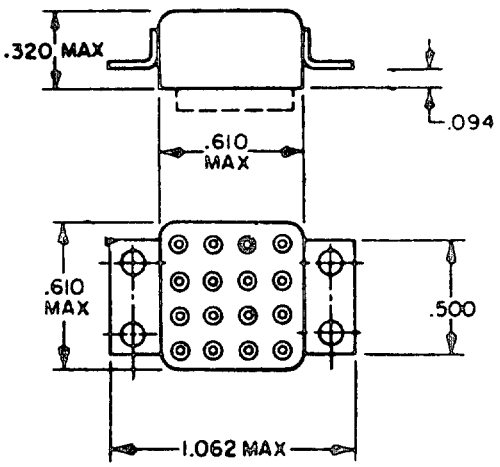

FLANGE MOUNT

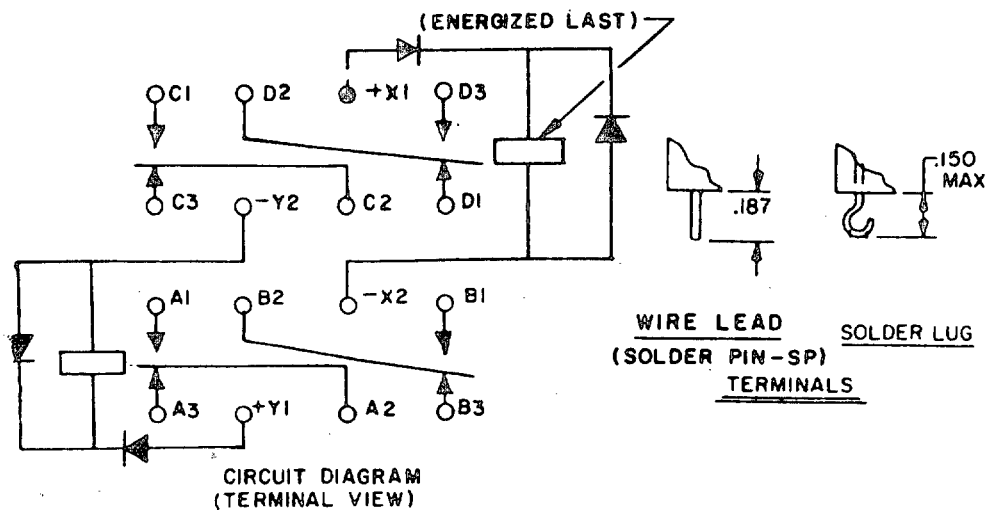

CIRCUIT DIAGRAM
(TERMINAL VIEW)

WIRE LEAD
(SOLDER PIN-SP)
TERMINALS

SOLDER LUG

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES, LATCHING/W INTERNAL DIODES

MIL-R-39016/36

DASH NUMBER *	MOUNT	TERM.	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10%	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX	
			NOM.	MAX		25°C	125°C
001	NONE	WIRE LEAD(SP)	6.0	7.2	37	3.6	4.8
002			12.0	14.5	145	6.2	8.6
003			26.5	35.0	975	14.5	19.0
004	FLANGE	SOLDER LUG	6.0	7.2	37	3.6	4.8
005			12.0	14.5	145	6.2	8.6
006			26.5	35.0	975	14.5	19.0

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/36- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS


HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE	2.0	AMPERE AT 28 Vdc.
	.125	AMPERE AT 115 Vac (60 TO 400 Hz)
	0.5	AMPERE AT 115 Vac (60 TO 400 Hz CASE UNGROUNDED).
INDUCTIVE LOAD	0.5	AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE WITH CASE GROUNDED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES WITH INTERNAL DIODE

MIL-R-39016/37

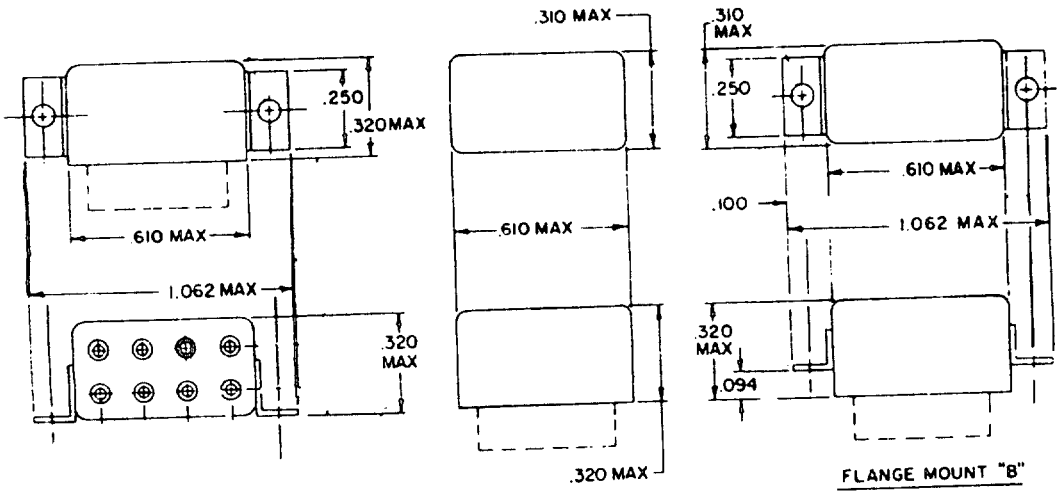

FLANGE MOUNT "A"

NO MOUNT


FLANGE MOUNT "B"



WIRE LEAD
(SOLDER PIN-SP)

WIRE LEAD

SOLDER LUG

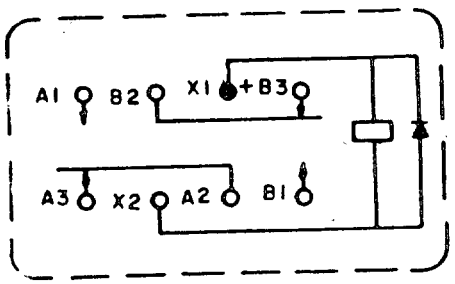

CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES WITH INTERNAL DIODE

MIL-R-39016/37

# DASH NUMBER			MOUNT	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10%
WIRE LEAD (SP)	SOLDER LUG	WIRE LEAD		RATED	MAX	
001		002	NONE	5	7	44
003		004	NONE	6	8	56
	005	006	A			
007	008	009	B			
010		011	NONE	9	12	140
012		013	NONE	12	16	210
	014	015	A			
016	017	018	B			
019		020	NONE	18	24	650
021		022	NONE	26.5	35	1350
	023	024	A			
025	026	027	B			

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/37- # FAILURE RATE: M

CONTACT DATA: LOAD RATINGS

HIGH LEVEL (RELAY CASE GROUNDED)


RESISTIVE — 2.0 AMPERE AT 28 Vdc. 1 AMPERE AT 28 Vdc
.125 AMPERE AT 115 Vac (60 - 400 Hz)
0.5 AMPERE AT 115 Vac (60 - 400 Hz CASE NOT GROUNDED)

INDUCTIVE LOAD — 0.3 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE WITH CASE GROUNDED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES/W INTERNAL DIODE


MIL-R-39016/38

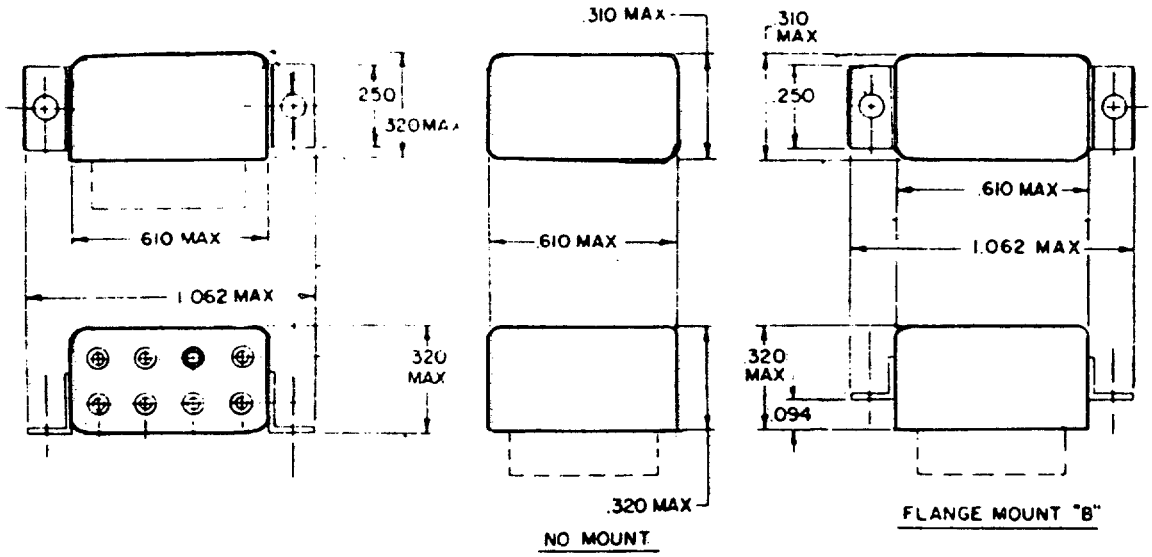

FLANGE MOUNT "A"

NO MOUNT


FLANGE MOUNT "B"

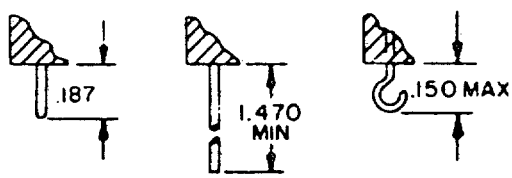

WIRE LEAD
(SOLDER PIN -SP)

WIRE LEAD

SOLDER LUG

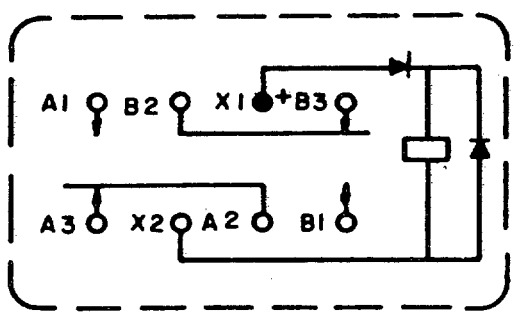

CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES/W INTERNAL DIODE

MIL-R-39016/38

* DASH NUMBER			MOUNT	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10% (REF ONLY)
WIRE LEAD (SP)	SOL-DER LUG	WIRE LEAD		RATED	MAX	
001		002	NONE	5	7	44
003		004	NONE	6	8	56
	005	006	A			
007	008	009	B			
010		011	NONE	9	12	140
012		013	NONE	12	16	210
	014	015	A			
016	017	018	B			
019		020	NONE	18	24	650
021		022	NONE	26.5	35	1350
	023	024	A			
025	026	027	B			

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/38- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS


HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE	2.0 AMPERE AT 28 Vdc. 1 AMPERE AT 28 Vdc
	.125 AMPERE AT 115 Vac (60 - 400 Hz)
	0.5 AMPERE AT 115 Vac (60 - 400 Hz CASE NOT GROUNDED)
INDUCTIVE LOAD	0.3 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE WITH CASE GROUNDED


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES


MIL-R-39016/39

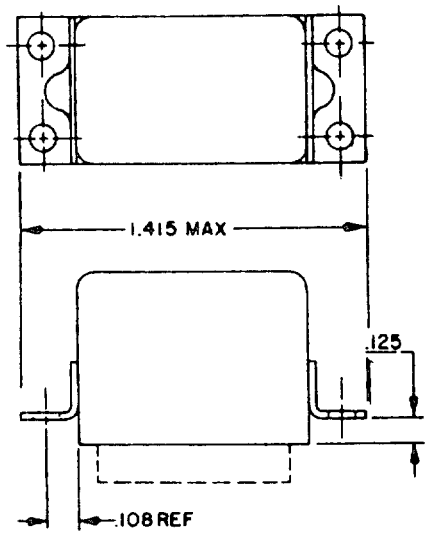


FOUR-HOLE END BRACKET
FIGURE 1

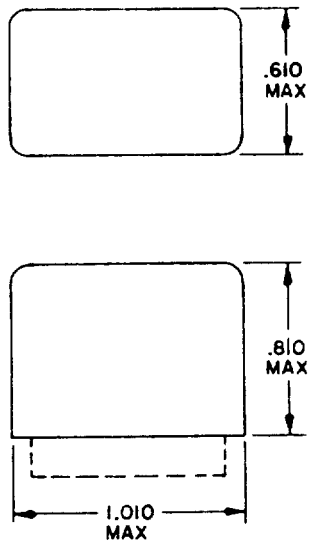


NO MOUNT
FIGURE 2

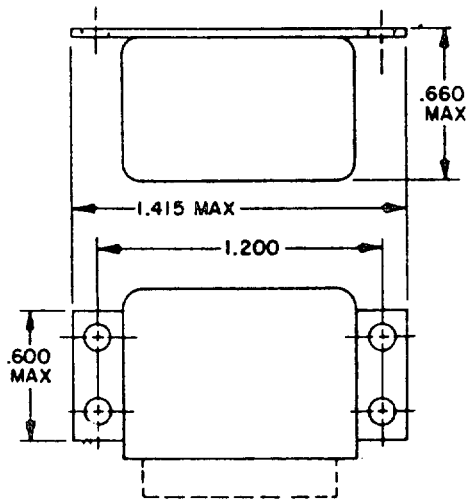

SIDE BRACKET
FIGURE 3

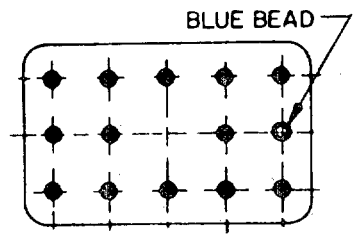

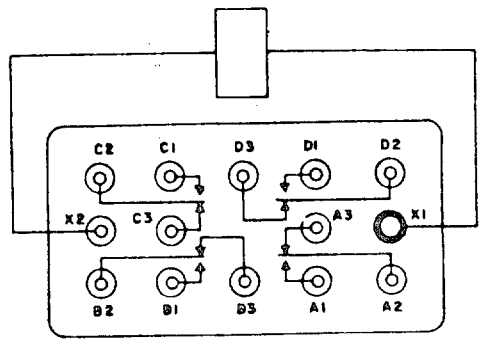


CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES

MIL-R-39016/39

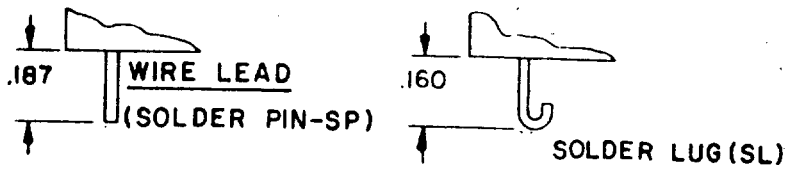

HEADER TERMINALS

* DASH NUMBER	MOUNT FIG	TERM.	COIL VOLTAGE (VDC)		(AT +25°C)				125°C	-65°C	125°C
			RATED	MAX	COIL RES OHMS±10%	MAX OPERATE VOLTAGE (VDC)	MAX RELEASE VOLTAGE (VDC)	MIN RELEASE VOLTAGE (VDC)	MAX OPERATE VOLTAGE (VDC)	MIN RELEASE VOLTAGE (VDC)	MAX RELEASE VOLTAGE (VDC)
001	1	SL	26.5	32	500	13.5	7.0	2.0	18.8	1.0	11.5
002	1	SP									
003	2	SL									
004	2	SP									
005	3	SL									
006	3	SP									
007	1	SL	12	16.5	117	6.6	3.4	1.0	8.8	0.48	5.65
008	1	SP									
009	2	SL									
010	2	SP									
011	3	SL									
012	3	SP									
013	1	SL	6.0	8.5	32	3.4	1.7	0.5	4.55	0.24	2.9
014	1	SP									
015	2	SL									
016	2	SP									
017	3	SL									
018	3	SP									

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/39- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS

HIGH LEVEL (RELAY CASE GROUNDED)


RESISTIVE 2.0 AMPERES AT 28 Vdc. 0.250 AMPERE AT 115 Vac (60 - 400 Hz)
0.75 AMPERE AT 115 Vac (60 - 400 Hz CASE NOT GROUNDED)

INDUCTIVE LOAD 0.5 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT, LOW LEVEL TO 2.0 AMPERES

MIL-R-39016/40

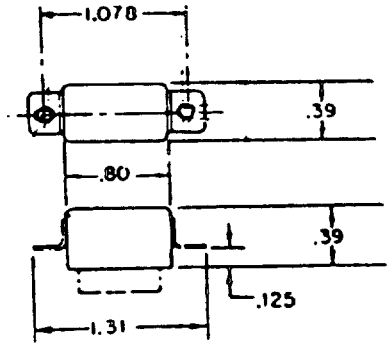


FLANGE MOUNT "A"

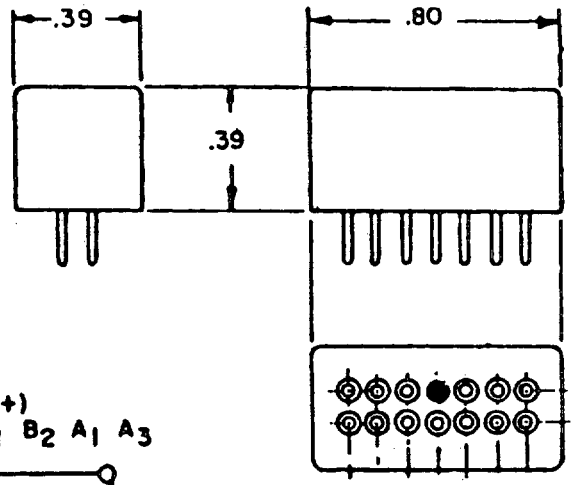





FLANGE MOUNT "B"




CIRCUIT DIAGRAM
UNENERGIZED POSITION
BOTTOM VIEW

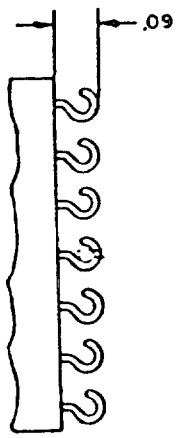

SOLDER LUG

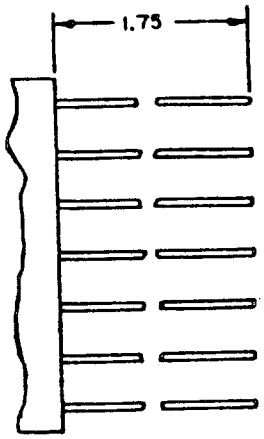

WIRE LEAD

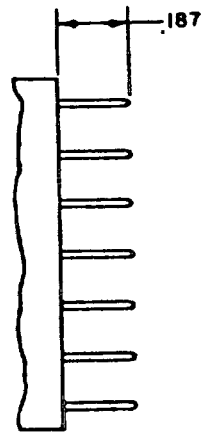

WIRE LEAD (SOLDER PIN-SP) AND
PIN (PLUG-IN)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT, LOW LEVEL TO 2.0 AMPERES

MIL-R-39016/40

DASH NUMBER # TERMINALS				MOUNTING	COIL VOLTAGE (VDC)		AT 25°C COIL RES
SOLDER LUG	WIRE LEAD (SP)	WIRE LEAD ---	PIN (PLUG-IN)		RATED	MAX	OHMS ±10%
001	007	013	019	FLANGE A	26.5	32.0	390
002	025	014	---	FLANGE B			
---	008	028	020	NO OTHER THAN TERMINAL			
003	009	015	021	FLANGE A	12.0	15.0	100
004	026	016	---	FLANGE B			
---	010	029	022	NO OTHER THAN TERMINAL			
005	011	017	023	FLANGE A	6.0	8.0	25
006	027	018	---	FLANGE B			
---	012	030	024	NO OTHER THAN TERMINAL			

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER

PART NUMBER: M39016/40-# FAILURE RATE: M

CONTACT DATA: LOAD RATINGS

HIGH LEVEL (RELAY CASE GROUNDED)


RESISTIVE 2.0 AMPERES AT 28 Vdc 0.3 AMPERE AT 115 Vac, (60-400 Hz).


INDUCTIVE LOAD 0.75 AMPERE MAX AT 28 Vdc MAX WITH 200 MILLIHENRIES MIN.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/41





CIRCUIT DIAGRAM
TERMINAL VIEW



DASH NUMBER LEAD LENGTH .500 MIN #	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10%
	RATED	MAX	
033	5.0	7.5	100
034	6.0	10.0	200
035	12.0	20.0	800
036	26.5	40.0	3,200
037	36.0	57.0	6,500
038	48.0	75.0	11,000
039	9.0	15.0	400
040	18.0	30.0	1,600

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/41-# FAILURE RATE: M


CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/42







CIRCUIT DIAGRAM
TERMINAL VIEW

DASH NUMBER LEAD LENGTH .500 MIN *	COIL VOLTAGE (VDC)		AT 25°C COIL RES
	RATED	MAX	OHMS ±10%
033	5.0	7.5	100
034	6.0	10.0	200
035	12.0	20.0	800
036	26.5	40.0	3,200
037	36.0	57.0	6,500
038	48.0	75.0	11,000
039	9.0	15.0	400
040	18.0	30.0	1,600

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/42-* FAILURE RATE: M


CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/43

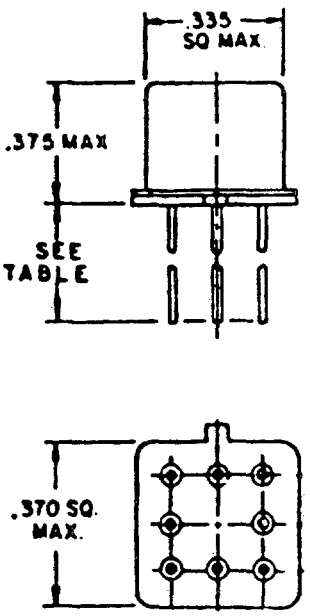



CIRCUIT DIAGRAM
TERMINAL VIEW

DASH NO. LEAD LENGTH .500 MIN #	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS (REF ONLY)	COIL CKT CURRENT (MA)	
	RATED	MAX		MAX	MIN
033	5.0	7.0	64	78.1	56.8
034	6.0	10.0	125	48.9	36.3
035	9.0	15.0	400	23.6	18.1
036	12.0	20.0	800	16.0	12.5
037	18.0	30.0	1,600	12.2	9.6
038	26.5	40.0	3,200	9.0	7.2
039	36.0	57.0	6,500	6.1	4.9
040	48.0	75.0	11,000	4.8	3.9

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/43-# FAILURE RATE: M

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2.0 AMPERES, LATCHING

MIL-R-39016/45

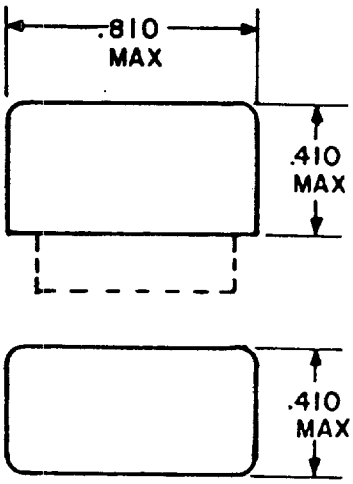


NO MOUNT "A"

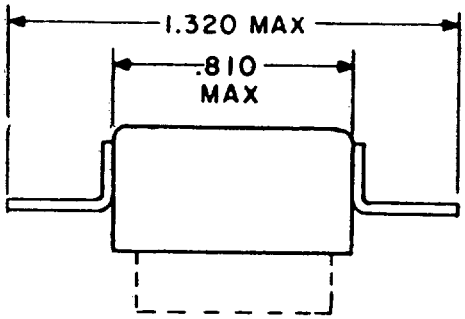


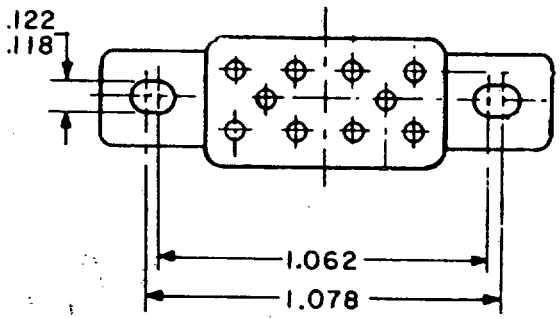

FLANGE MOUNT "B"

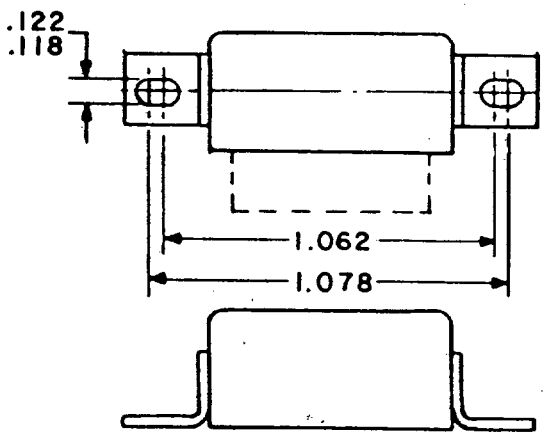

FLANGE MOUNT "C"




SOLDER LUG
(SL)LEAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2.0 AMPERES, LATCHING

MIL-R-39016/45

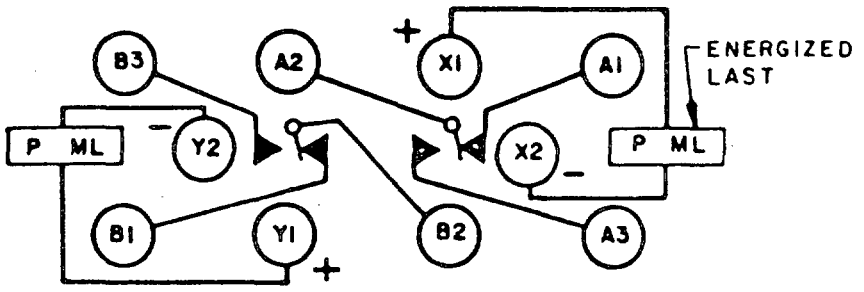

TERMINAL VIEW
CIRCUIT DIAGRAM

DASH NUMBER * SOLDER LUG	MOUNT	COIL VOLTAGE (VDC)		AT 25°C			OPERATE VOLTAGE (LATCH AND RESET) (VDC) OVER TEMP RANGE	
		RATED	MAX	COIL RES OHMS ±10%	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX	MIN	MAX	MIN
001	A	5.0	6.7	45	2.7	1.6	3.8	1.0
003	B							
005	C							
007	A	6.0	8.0	63	3.25	2.0	4.5	1.3
009	B							
011	C							
013	A	12.0	16.0	254	6.5	4.0	9.0	2.6
015	B							
017	C							
019	A	26.5	32.0	1000	13.0	8.0	18.0	5.2
021	B							
023	C							
025	A	48.0	64.0	3800	26.0	16.0	36.0	10.4
027	B							
029	C							


* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.
PART NUMBER: M39016/45- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 2.0 AMPERE AT 28 Vdc.
.150 AMPERE AT 115 Vac (60 TO 400 Hz)
INDUCTIVE LOAD 0.75 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2.0 AMPERES, LATCHING, SENSITIVE

MIL-R-39016/46

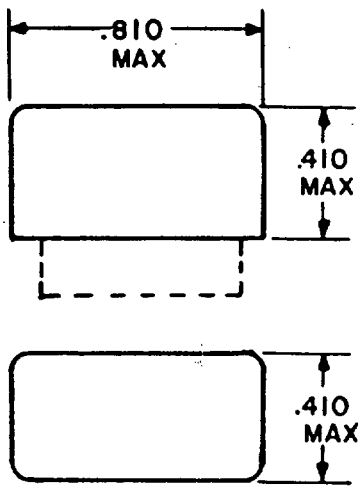


NO MOUNT "A"

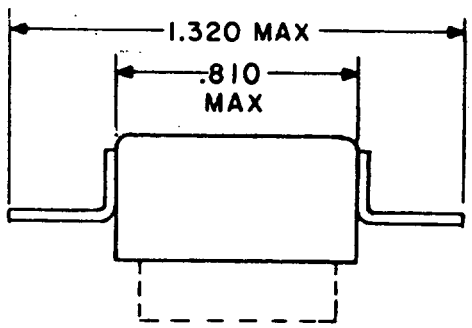


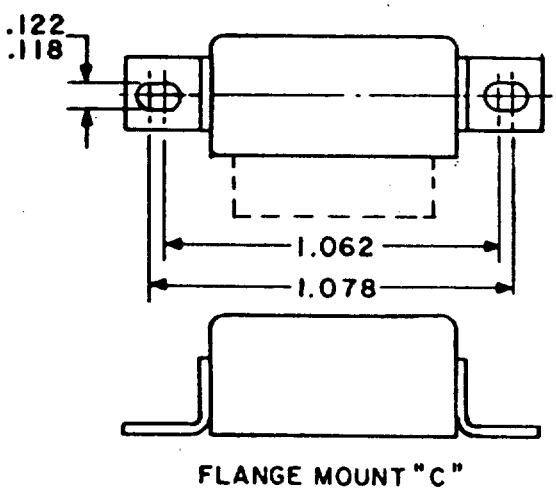

FLANGE MOUNT "C"

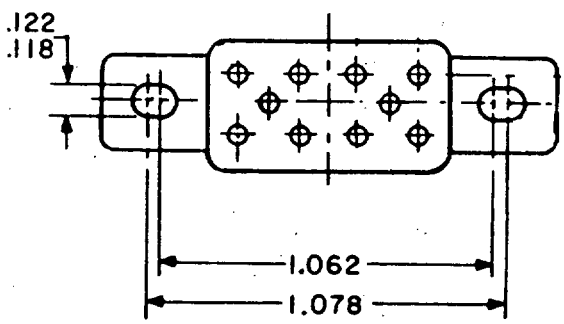

FLANGE MOUNT "B"




SOLDER LUG
(SL)LEAD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2.0 AMPERES, LATCHING, SENSITIVE

MIL-R-39016/46

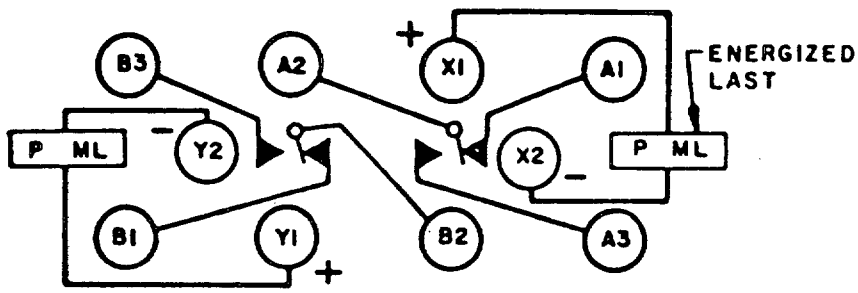

TERMINAL VIEW
CIRCUIT DIAGRAM

DASH NUMBER # SOLDER LUG	MOUNT	COIL VOLTAGE (VDC)		AT 25°C			OPERATE VOLTAGE (LATCH AND RESET) (VDC) OVER TEMP RANGE	
		RATED	MAX	COIL RES OHMS ±10%	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX	MIN	MAX	MIN
001	A	5.0	6.7	82	2.7	1.6	3.8	1.0
003	B							
005	C							
007	A	6.0	8.0	120	3.25	2.0	4.5	1.3
009	B							
011	C							
013	A	12.0	16.0	470	6.5	4.0	9.0	2.6
015	B							
017	C							
019	A	26.5	32.0	1800	13.0	8.0	18.0	5.2
021	B							
023	C							
025	A	36.0	48.0	4300	19.5	12.0	27.0	7.8
027	B							
029	C							

THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/46- # FAILURE RATE: M

CONTACT DATA: LOAD RATINGS

HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE 2.0 AMPERE AT 28 Vdc.
.150 AMPERE AT 115 Vac (60 TO 400 Hz)

INDUCTIVE LOAD 0.50 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTROMAGNETIC, ESTABLISHED RELAIBILITY

MIL-R-6106


SCOPE: THIS SECTION COVERS ELECTROMAGNETIC RELAYS WITH NOMINAL CONTACT RATINGS FROM FIVE AMPERES (RESISTIVE) AND UPWARD FOR USE IN ELECTRICAL APPLICATIONS. AUXILIARY CONTACTS MAY BE RATED AT LOWER CURRENTS. THESE RELAYS ARE INTENDED FOR USE IN DIRECT OR ALTERNATING CURRENT (SINGLE OR MULTIPHASE) ELECTRICAL SYSTEMS AS A MEANS OF CONTROLLING THE MAKING AND BREAKING OF CIRCUITS FOR ELECTRICALLY OPERATED EQUIPMENT AND DEVICES.

TEMPERATURE RANGE: -70°C TO +125°C

PART NUMBER EXAMPLE:

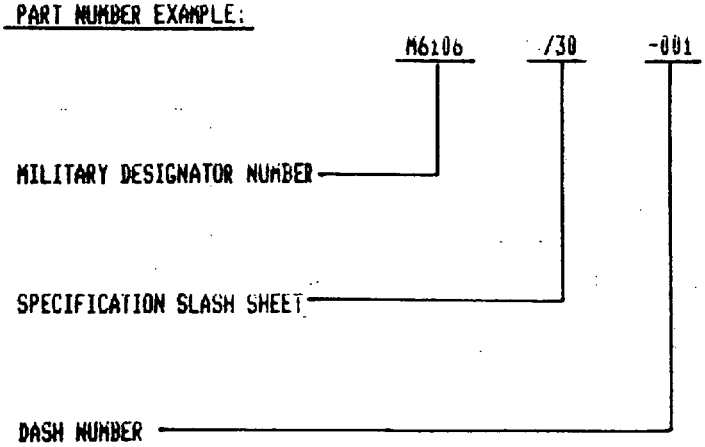

TYPE DESIGNATOR EXAMPLE:

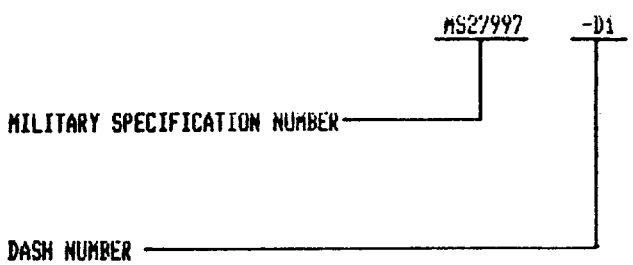



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 50 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24140

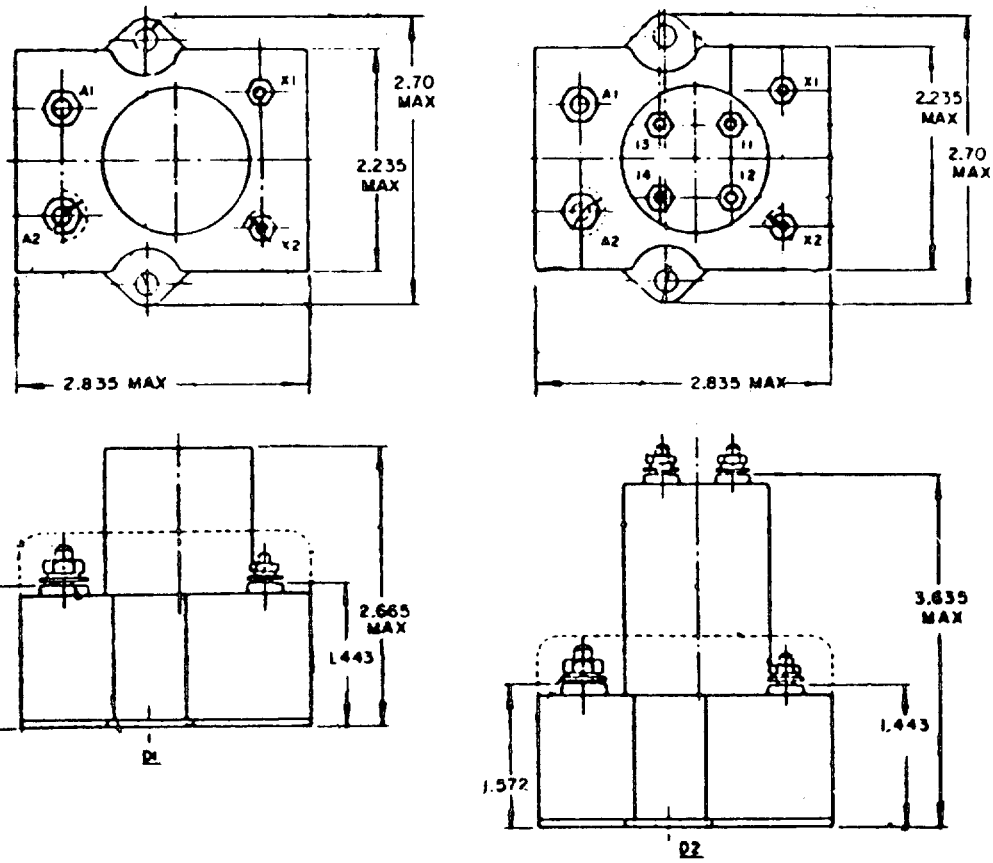

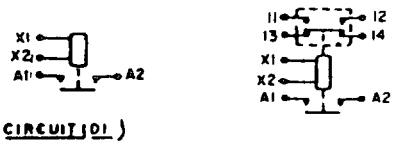

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILLARY CONTACTS
MS24140-D1	I	DC	STUD	FLANGE	NONE
MS24140-D2	I	DC	STUD	FLANGE	WITH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 50 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24140

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS24140-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	78	29	50

TIME-MILLISECONDS-MAX						
MS PART NO. MS24140-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	20	10	2	--	--	--
D2	20	10	2	--	2	2


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	50	50	--	5	5	50	--	5	--	--	--
INDUCTIVE	10	50	--	5	5	50	--	5	--	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 100 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24141

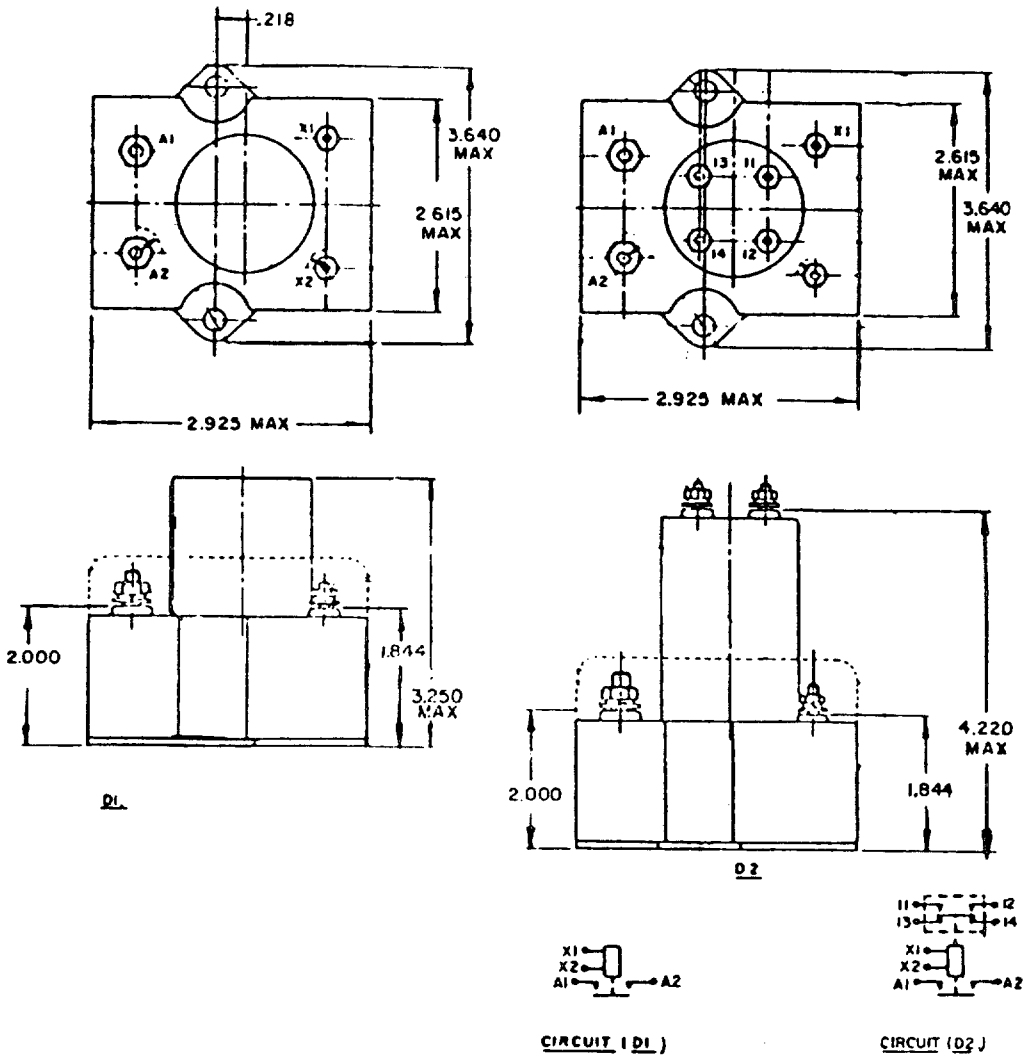

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILLARY CONTACTS
MS24141-D1	I	DC	STUD	FLANGE	NONE
MS24141-D2	I	DC	STUD	FLANGE	WITH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 100 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24141

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS24141-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	64.5	29	50

TIME-MILLISECONDS-MAX						
MS PART NO. MS24141-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	10	2.5	--	--	--
D2	25	10	2.5	--	2.5	2.5


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	50	100	--	5	5	100	--	5	--	--	--
INDUCTIVE	10	100	--	5	5	--	--	--	--	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 20U AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24142

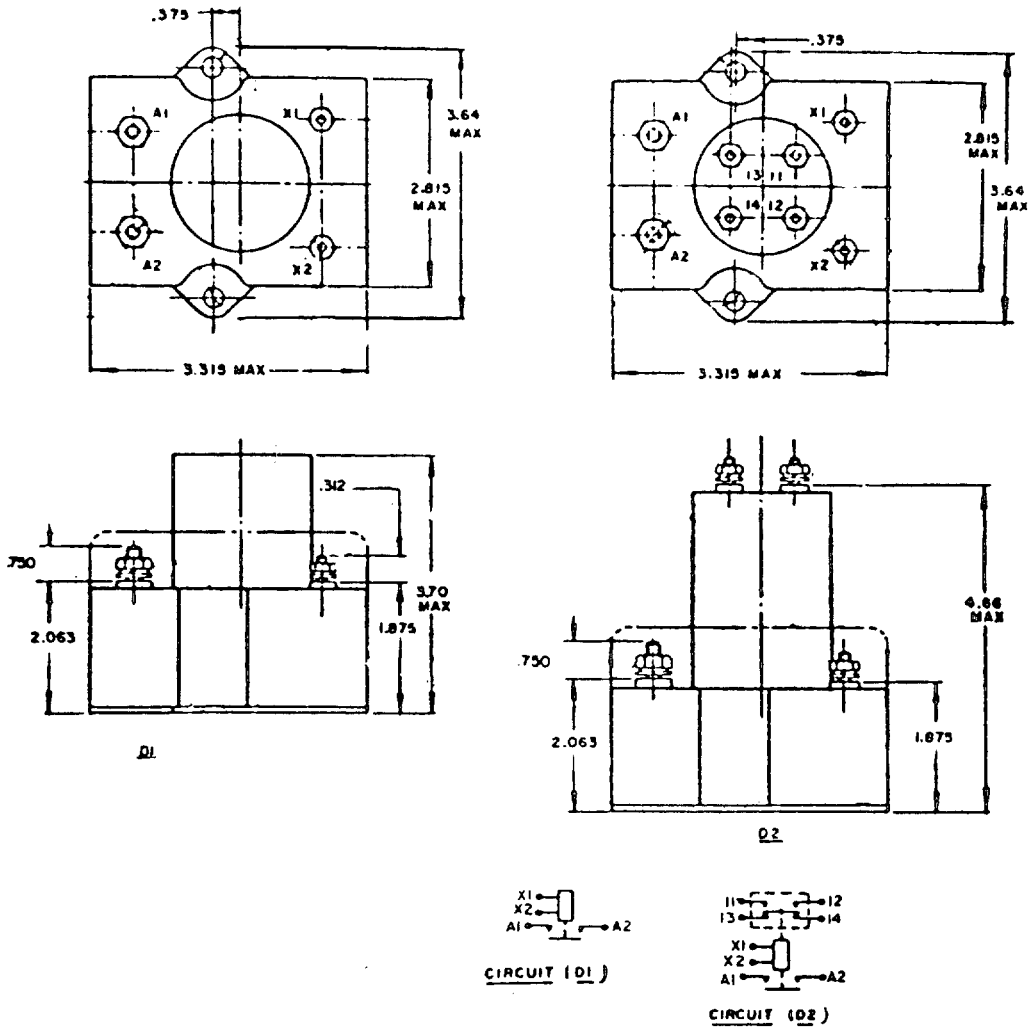

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILLARY CONTACTS
MS24142-D1	1	DC	STUD	FLANGE	NONE
MS24142-D2	1	DC	STUD	FLANGE	WITH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 200 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24142

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS24142-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	52	29	.6

TIME-MILLISECONDS-MAX						
MS PART NO. MS24142-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	40	15	2	--	--	--
D2	40	15	2	--	3	3


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	50	100	--	5	5	200	--	5	--	--	--
INDUCTIVE	10	100	--	5	5	--	--	--	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 25 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED


MS24143

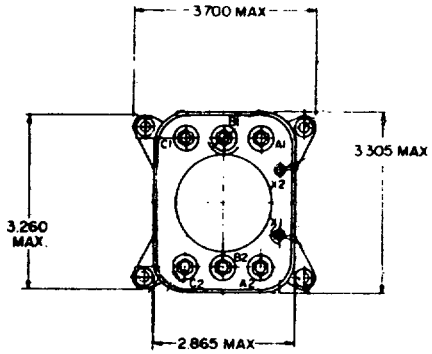

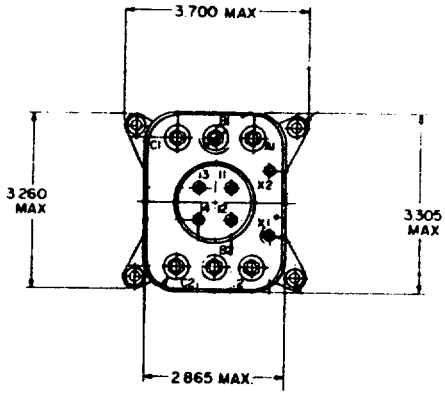

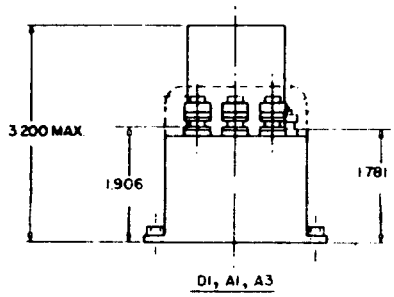

D1, A1, A3



D2, A2,
SAME AS D1, A1, A3 EXCEPT AS OTHERWISE SHOWN


MS PART NUMBER MS24143-	CIRCUIT	COIL TYPE	AUXILLARY CONTACTS
D1	1	DC	NONE
D2	2	DC	WITH
A1	1	AC	NONE
A2	2	AC	WITH
A3	1	AC	NONE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 25 AMP, 3PST, N. O. TYPE I, HERMETICALLY SEALED

MS24143



CIRCUIT 1



CIRCUIT 2

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS24143-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1 D2	X1X2	28	DC	52	29	.6
A1 A2 A3		115	60/400 50/60/400	--	124	.225

TIME-MILLISECONDS-MAX						
MS PART NO. MS24143-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	10	2	--	--	--
D2	25	10	2	--	3	3
A1	30	65	2	--	--	--
A2	30	65	2	--	3	3
A3	30	65	5	--	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	50/60Hz	400 Hz	50/60Hz	400 Hz	50/60 Hz
RESISTIVE	100	25	--	5	5	25	25	5	2	25	--
INDUCTIVE	10	25	--	5	5	25	--	5	--	25	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 100 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED


MS24168

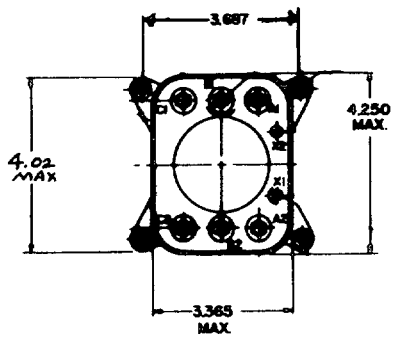

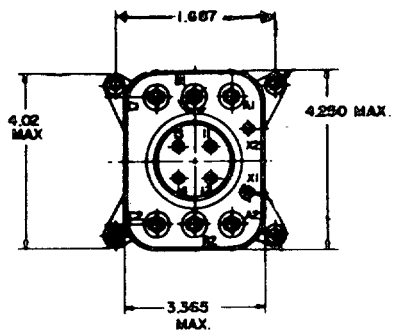

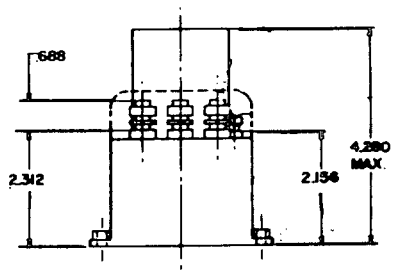

D1, A3



D2, A4

MS PART NUMBER MS24168-	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING	AUXILIARY CONTACTS
D1	I	DC	STUD	FLANGE	NONE
D2	I	DC			WITH
A3	I	AC			NONE
A4	I	AC			WITH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 100 AMP, 3PST, N. O. TYPE I, HERMETICALLY SEALED

MS24168

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS24168-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	55	29	.86
A3,A4		115	50/60/400	—	120	--

TIME-MILLISECONDS-MAX						
MS PART NO. MS24168-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	60	25	2.5	--	--	--
D2	60	25	2.5	--	4.5	4.5
A3	60	80	5	--	--	--
A4	60	80	5	--	7	7


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED												
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	50/60Hz	400 Hz	50/60Hz	400 Hz	50/60 Hz
RESISTIVE	50	100	--	5	5	100	50	5	2	100	50
INDUCTIVE	10	100	--	5	5	--	--	5	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106


RELAY, 50 AMP, SPST, N.O. TYPE 1, HERMETICALLY SEALED

MS24376

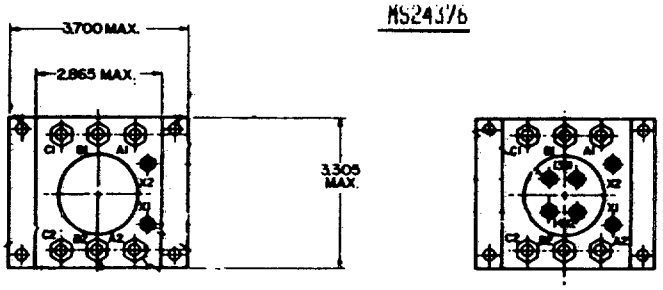


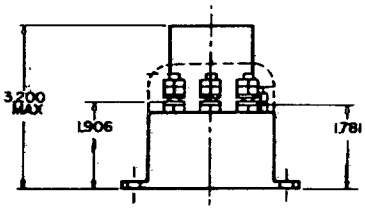


A1, D1



A2, D2



CIRCUIT A1, D1



CIRCUIT A2, D2

(same as A1, D1 except as otherwise shown)

MS PART NUMBER MS24376-	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING	AUXILIARY CONTACTS
D1	1	DC	STUD	FLANGE	NONE
D2	1	DC			WITH
A1	1	AC			NONE
A2	1	AC			WITH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 50 AMP, 3PST, N. O. TYPE I, HERMETICALLY SEALED

MS2437/6

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS2437/6-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	52	29	6
A1,A2		115	60/400	--	124	225

TIME-MILLISECONDS-MAX						
MS PART NO. MS2437/6-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	10	2	--	--	--
D2	25	10	2	--	3	3
A1	30	65	2	--	--	--
A2	30	65	2	--	3	3


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED												
TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	50/60Hz	400 Hz	50/60Hz	400 Hz	50/60 Hz
RESISTIVE	100	50	50	5	5	50	25	5	2	50	25
INDUCTIVE	10	50	50	5	5	50	--	5	--	50	--
INDUCTIVE	100	25	25	5	5	50	--	5	--	50	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106


RELAY, 10 AMP, 4PDT, TYPE I, HERMETICALLY SEALED

MS24568

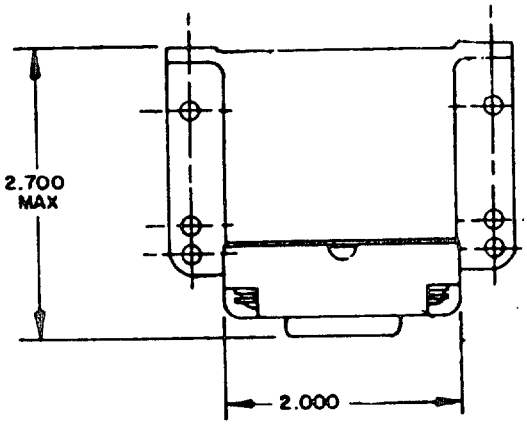

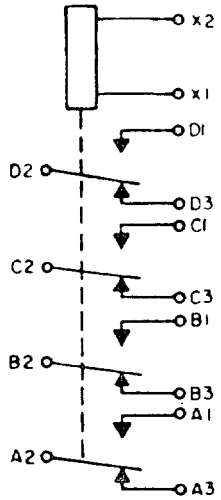

CIRCUIT

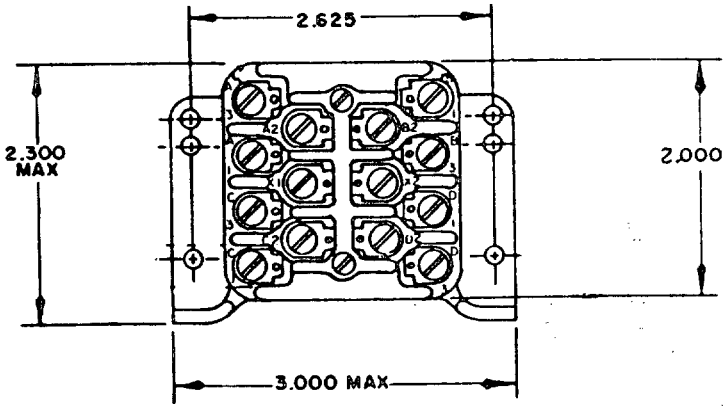

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILLARY CONTACTS
MS24568-D1	I	DC	SCREW	BRACKET	N/A
MS24568-A1	I	AC	SCREW	BRACKET	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE 1, HERMETICALLY SEALED

MS24568

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS24568-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2	28	DC	--	30	0.5
A1	X1X2	115	400	--	120	0.1

TIME-MILLISECONDS-MAX						
MS PART NO. MS24568-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	20	3	5	--	--
A1	25	50	3	5	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED												
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	15	--	--	--	15	--
INDUCTIVE	20	10	10	--	--	10	--	--	--	10	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 5 AMPERES, 4PDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOK

MS25267

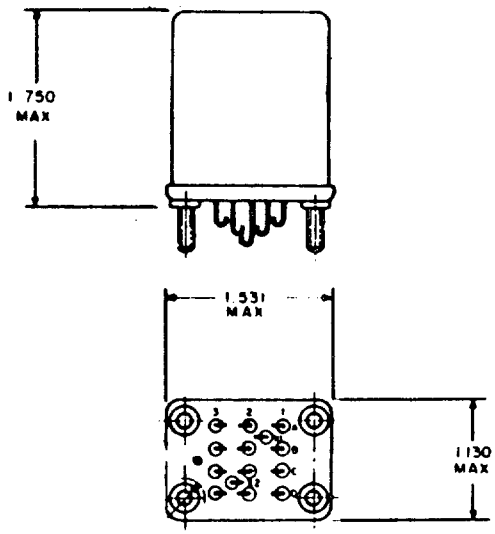



CIRCUIT A1-D1

MS PART NUMBER	TYPE	COIL	TERMINAL TYPE	MOUNTING
MS25267-D1	I	DC	SOLDER HOOK	STUD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 5 AMPERES, 4 PDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOK

MS25267

OPERATING CHARACTERISTICS

		COIL DATA				
MS PART NO. MS25267-	COIL	NOMINAL			MAX	
		VOLTS	FREQ HZ	RES	VOLTS	AMP
D1	X1,X2	28	DC	-	29	015

	TIME-MILLISECONDS-MAX					
MS PART NO. MS25267-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	20	20	2	2	--	--


		RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	5	5	--	--	5	4	--	--	--	--
INDUCTIVE	10	3	3	--	--	3	2	--	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 5 AMP, 6PDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOK

MS25269

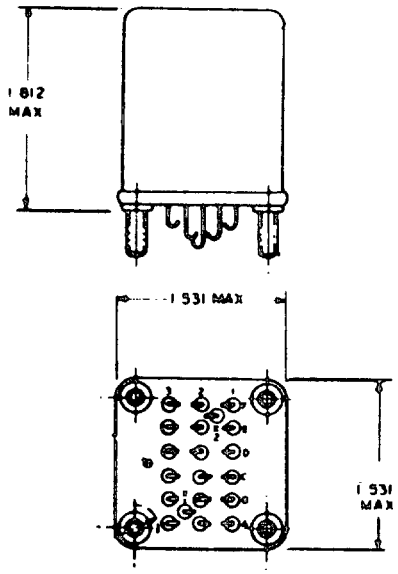

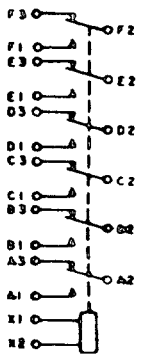

CIRCUIT A1 - D1

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS25269-D1	1	DC	SOLDER HOOK	STUD
MS25269-A1	1	AC	SOLDER HOOK	STUD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 5 AMP, 6PDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOK

MS25269

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS25269-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1,X2	28	DC	--	29	0.18
A1	X,1X2	115	400	--	122	0.04

TIME-MILLISECONDS-MAX						
MS PART NUMBER MS25269-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	20	20	2	2	--	--
A1	25	50	2	2	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED												
TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	5	5	--	--	5	4	--	--	--	--
INDUCTIVE	20	3	3	--	--	3	2	--	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOK

MS25271

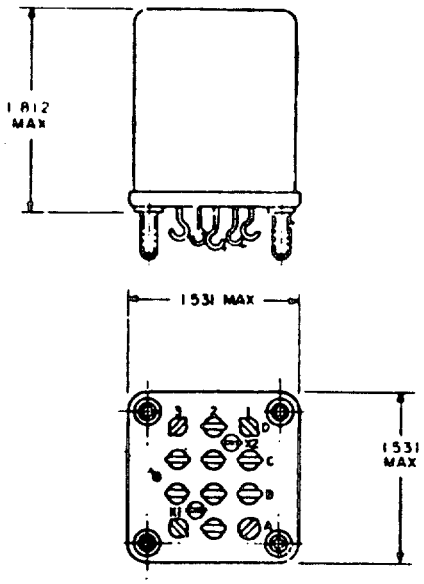



CIRCUIT A1 - D1

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS25271-D1	I	DC	SOLDER HOOK	STUD
MS25271-A1	I	AC	SOLDER HOOK	STUD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOK

MS25271

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS25271-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2	28	DC	--	29	0.350
A1	X1X2	115	400	--	122	0.073

TIME-MILLISECONDS-MAX						
MS PART NO. MS25271-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	20	20	2	2	--	--
A1	25	50	2	2	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10	6	--	--	10	6
INDUCTIVE	20	6	6	--	--	6	4	--	--	6	4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 10 AMP, 2PDT, TYPE I, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED

MS25273

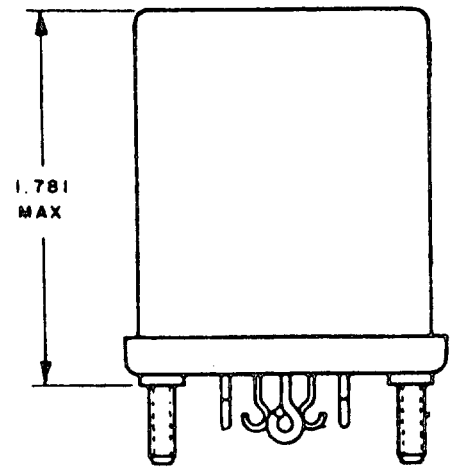

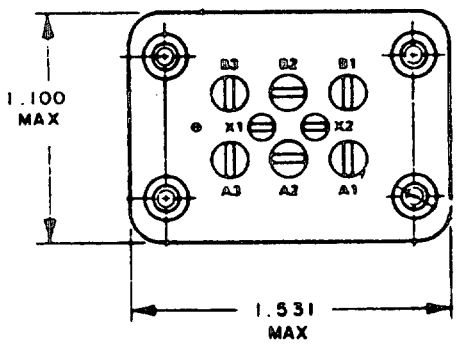



CIRCUIT D1

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS25273-D1	I	DC	SOLDER HOOK	STUD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 2PDT, TYPE 1, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED

MS25273

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS25273-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2	28	DC	--	29	0.20

TIME-MILLISECONDS-MAX						
MS PART NO. MS252?3-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	20	20	2	2	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10	6	--	--	10	6
INDUCTIVE	20	6	6	--	--	6	4	--	--	6	4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 5 AMP, 2PDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOK

MS25465

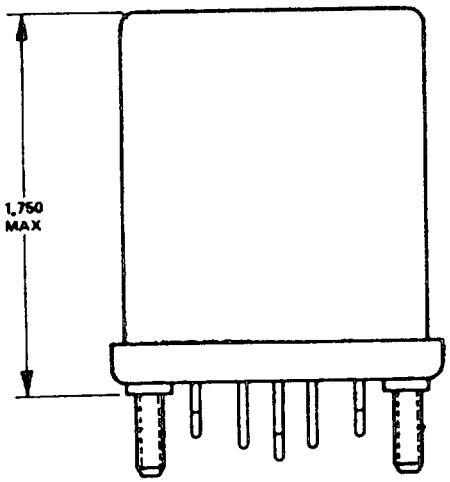

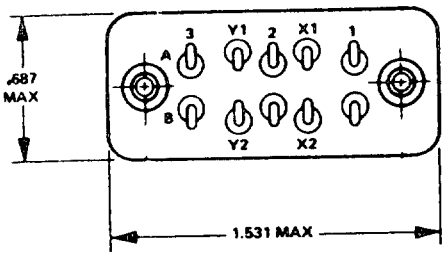

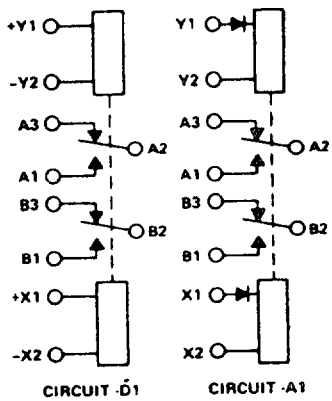

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS25465-D1	I	DC	SOLDER HOOK	STUD
MS25465-A1	I	AC	SOLDER HOOK	STUD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 5 AMP, 2RDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOK

MS25465

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS25465-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2 Y1Y2	28	DC	--	29	0.12
A1	X1X2 Y1Y2	115	400	--	122	0.06

TIME-MILLISECONDS-MAX						
MS PART NUMBER MS25465-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	N/A	2	2	--	--
A1	25	N/A	2	2	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	5	5	--	--	5	4	--	--	--	--
INDUCTIVE	20	3	3	--	--	3	2	--	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 10 AMP, 2PDT, TYPE I, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED

MS25466

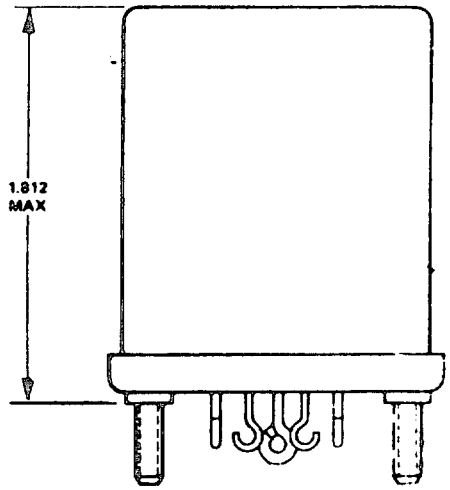

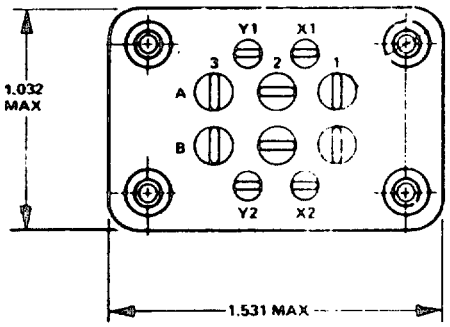

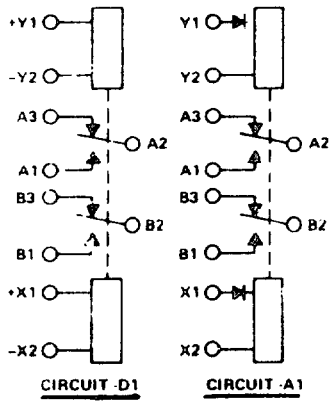

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS25466-D1	I	DC	SOLDER HOOK	STUD
MS25466-A1	I	AC	SOLDER HOOK	STUD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 2PDT, TYPE I, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED

MS25466

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS25466-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2 Y1Y2	28	DC	--	29	0.17
A1	X1X2 Y1Y2	115	400	--	122	0.07

TIME-MILLISECONDS-MAX						
MS PART NUMBER MS25466-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	N/A	2	2	--	--
A1	25	N/A	2	2	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10	6	--	--	10	6
INDUCTIVE	20	6	6	--	--	10	4	--	--	10	4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 5 AMP, 4PDT, TYPE I, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED

MS25467

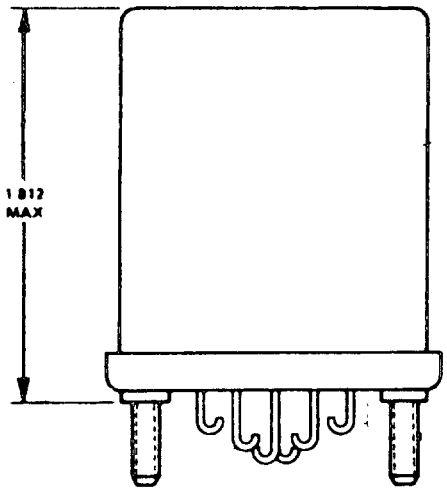

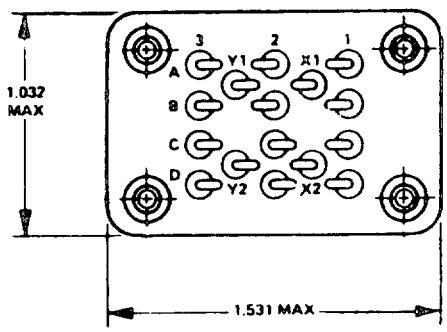

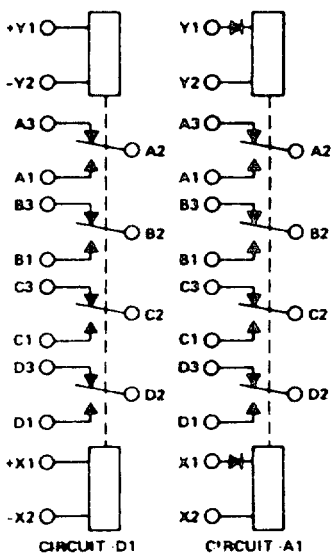

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS25467-D1	I	DC	SOLDER HOOK	STUD
MS25467-A1	I	AC	SOLDER HOOK	STUD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 5 AMP, 4PDT, TYPE I, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED

MS25467

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS25467-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2 Y1Y2	28	DC	--	29	0.17
A1	X1X2 Y1Y2	115	400	--	122	0.07

TIME-MILLISECONDS-MAX						
MS PART NUMBER MS25467-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	N/A	2	2	--	--
A1	25	N/A	2	2	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	5	5	--	--	5	4	--	--	--	--
INDUCTIVE	20	3	3	--	--	3	2	--	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE I, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED, MAGNETIC LATCH

MS25468

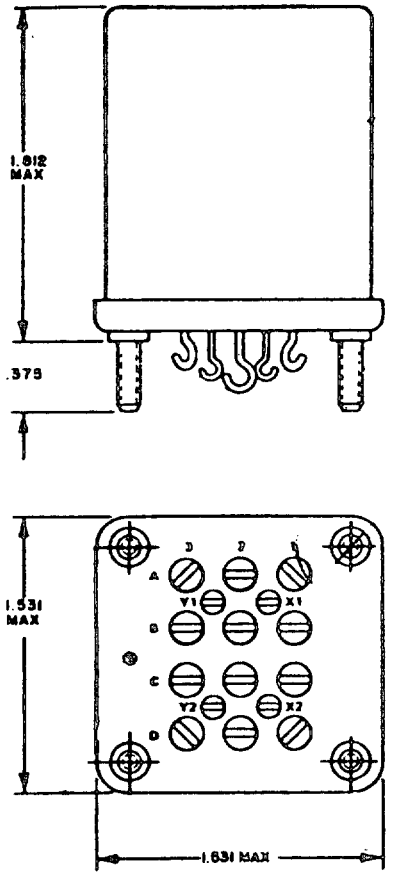

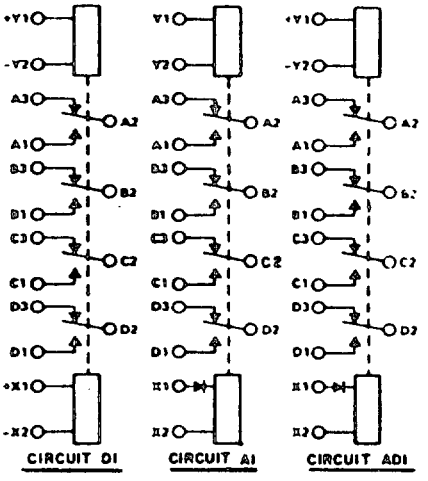

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS25468-D1	I	DC	SOLDER HOOK	STUD
MS25468-A1	I	AC	SOLDER HOOK	STUD
MS25468-AD1	I	AC DC	SOLDER HOOK	STUD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE 1, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED, MAGNETIC LATCH

MS25468

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS25468-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2 Y1Y2	28	DC	--	29	0.17
A1	X1X2 Y1Y2	115	400	--	122	0.07
AD1	X1X2 Y1Y2	115 28	400 DC	-- --	122 29	0.07 0.17

TIME-MILLISECONDS-MAX						
MS PART NUMBER MS25468-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	N/A	2	2	--	--
A1	25	N/A	2	2	--	--
AD1	25	N/A	2	2	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED												
TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10	6	--	--	10	6
INDUCTIVE	20	6	6	--	--	10	4	--	--	10	4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 5 AMP, 6PDT, TYPE 1, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED, MAGNETIC LATCH

MS25469

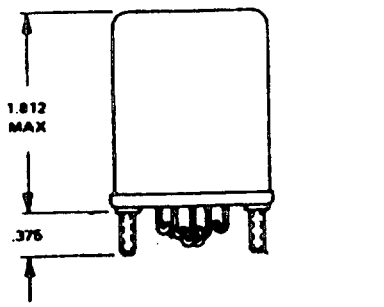

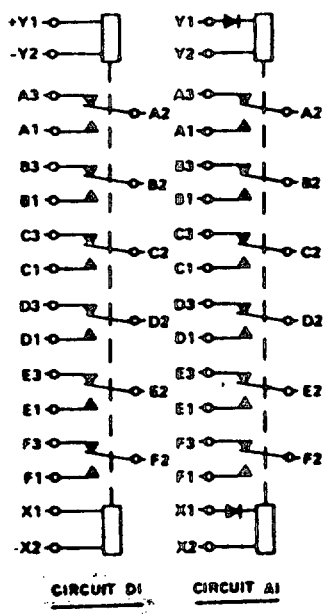

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS25469-D1	I	DC	SOLDER HOOK	STUD
MS25469-A1	I	AC	SOLDER HOOK	STUD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 5 AMP, 6PDT, TYPE 1, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED, MAGNETIC LATCH

MS25469

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS25469-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2 Y1Y2	28	DC	--	29	0.17
A1	X1X2 Y1Y2	115	400	--	122	0.07

TIME-MILLISECONDS-MAX						
MS PART NUMBER MS25469-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	N/A	2	2	--	--
A1	25	N/A	2	2	--	--


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED												
TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	5	5	--	--	5	4	--	--	--	--
INDUCTIVE	20	3	3	--	--	3	2	--	--	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 50 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED

MS27222

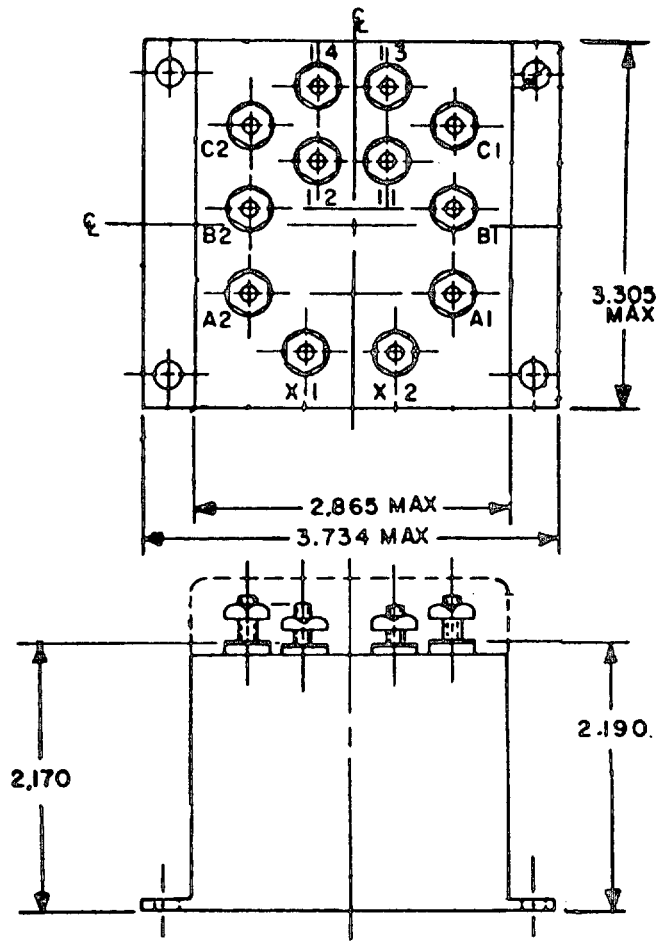


MS PART NUMBER MS27222-	CIRCUIT	COIL TYPE	TERMINAL TYPE	MOUNTING	AUXILLARY TERMINALS
1	1	DC	LUG	N/A	NONE
2		DC			WITH
3		AC			NONE
4		AC			WITH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 50 AMP, 3PST, N. O. TYPE I, HERMETICALLY SEALED

MS27222

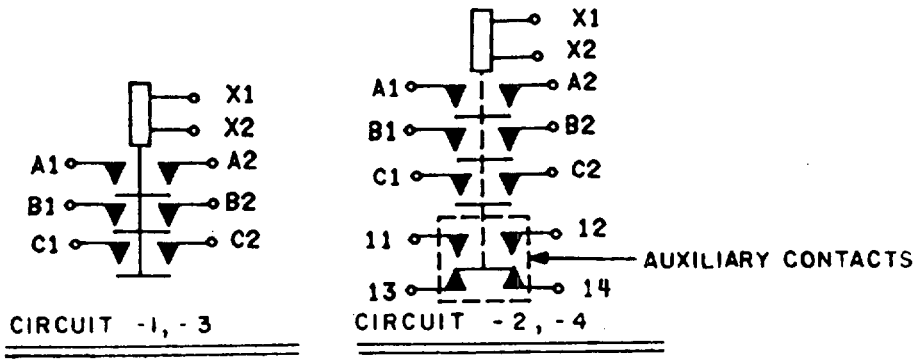

OPERATING CHARACTERISTICS

MS PART NO. MS27222-	COIL	COIL DATA NOMINAL VOLTS	NOMINAL FREQ Hz	NOMINAL RES	MAX VOLTS	MAX AMP
1	X1X2	28	DC	51	29	.6
2						
3		115	60/400	--	124	.2
4						

MS PART NO. MS27222-	TIME-MILLISECONDS-MAX OPERATE	RELEASE	BOUNCE MAIN NO	MAIN NC	AUX NO	AUX NC
1	25	10	2	--	--	--
2	25	10	2	--	4	4
3	25	50	2	--	--	--
4	25	50	2	--	4	4


TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED 28 Vdc MAIN NO	MAIN NC	AUX NO	AUX NC	115 Vac, 1PHASE MAIN 400 Hz	MAIN 50/60Hz	AUX 400 Hz	AUX 60Hz	115/200 Vac, 3 PHASE MAIN 400 Hz	MAIN 60 Hz
RESISTIVE	50	50	--	5	5	50	--	5	5	50	--
INDUCTIVE	10	50	--	5	5	50	--	5	5	50	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOKS


MS27255

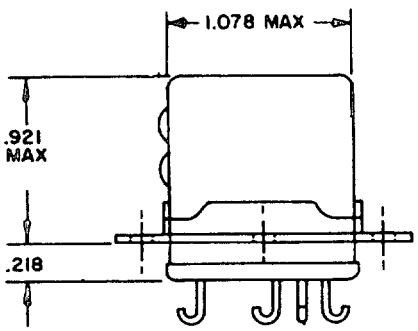

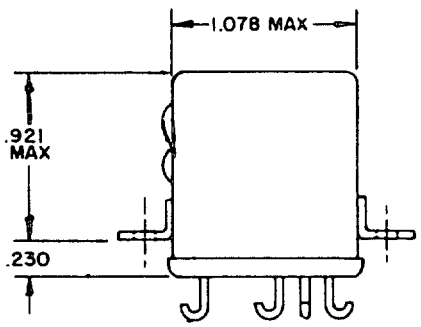


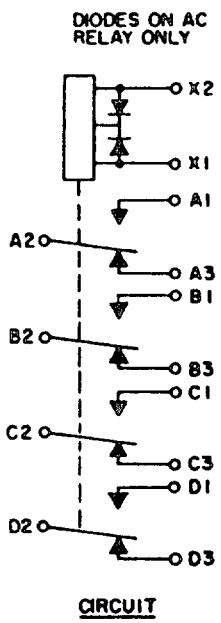

CIRCUIT

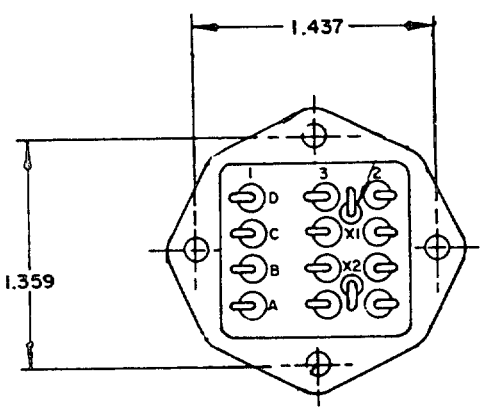

MS27255-1 & 2

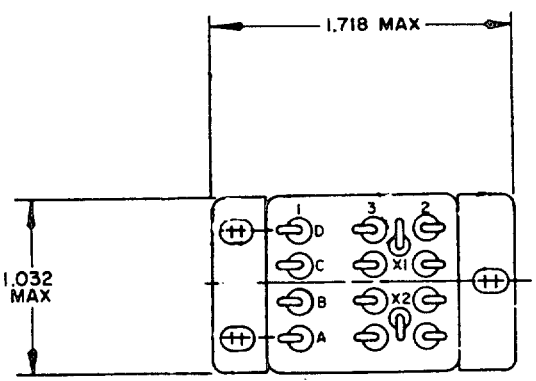

MS27255-3

MS PART NUMBER MS27255-	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
1	I	AC	SOLDER HOOK	BRACKET
2	I	DC	SOLDER HOOK	BRACKET
3	I	AC	SOLDER HOOK	BRACKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE I, HERMETICALLY SEALED, SOLDER HOOKS

MS27255

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS27255-	COIL	NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
1, 3	AC	115	400	--	120	0.94
2	DC	28	--	160	29	0.20

TIME-MILLISECONDS-MAX						
MS PART NUMBER MS27255-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
1, 3	15	30	3	5	--	--
2	10	10	3	5	--	--


RATED CONTACT LOAD (AMPERES PER PULE) CASE GROUNDED												
TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10	--	--	--	10	--
INDUCTIVE	50	10	10	--	--	10	--	--	--	10	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, PERMANENT MAGNET DRIVE, ALL WELDED, HERMETICALLY SEALED

MS27400

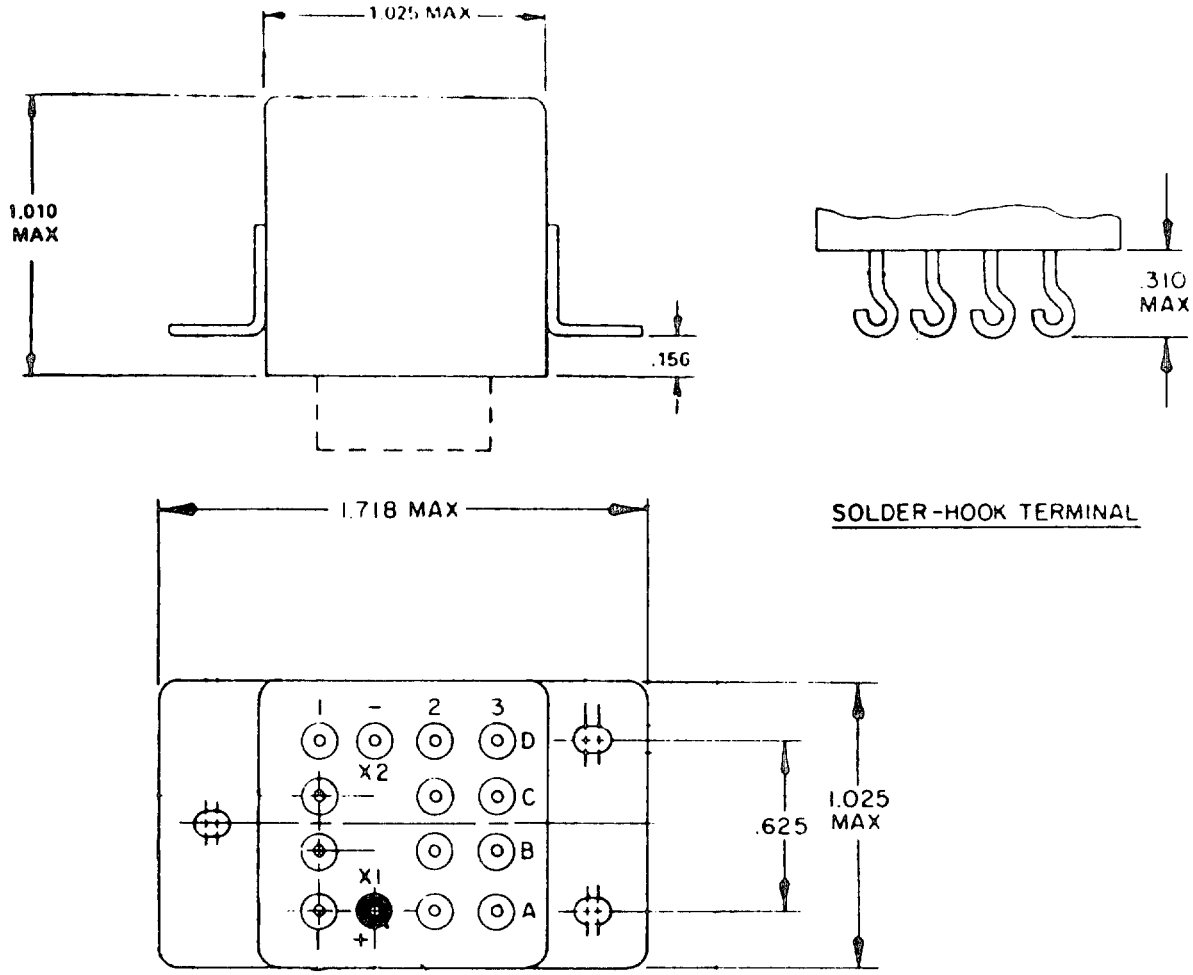

SOLDER-HOOK TERMINAL


MS PART NO. MS27400-	TYPE	COIL FREQ	COIL SUPPRESSION	TERMINAL TYPE	MOUNTING	MATING SOCKET	CIRCUIT
5	1ER	DC	N/A	SOLDER HOOK	FIG.1	N/A	A
32	1ER	50/400	N/A	SOLDER HOOK	FIG.1	N/A	A
9	1	DC	N/A	SOLDER HOOK	FIG.1	N/A	A
26	1	50/400	N/A	SOLDER HOOK	FIG.1	N/A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, PERMANENT MAGNET DRIVE, ALL WELDED, HERMETICALLY SEALED

MS27400



CIRCUIT A
(POLARIZED MONOSTABLE)

OPERATING CHARACTERISTICS

COIL DATA						
		NOMINAL			MAX	
MS PART NO. MS27400-	COIL	VOLTS	FREQ Hz	RES	VOLTS	AMP
5,9	X1X2	28	DC	290	29	.12
32,26		115	50/400	--	122	.03

TIME-MILLISECONDS-MAX							
			BOUNCE				
MS PART NO. MS27400-	OPERATE	RELEASE	MAIN		AUX		BREAK
			NO	NC	NO	NC	NO ONLY
5,9	15	15	1	1	--	--	--
32,26	20	50	1	1	--	--	0.1

RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 103	28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	50/60Hz	400 Hz	60Hz	400 Hz	50/60 Hz
RESISTIVE	100	10	10	--	--	10	2.5	--	--	10	2.5
INDUCTIVE	10	--	--	--	--	--	2.5	--	--	--	2.5
INDUCTIVE	20	8	8	--	--	8	--	--	--	8	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 2PDT, PERMANENT MAGNET DRIVE, ALL WELDED, HERMETICALLY SEALED

MS27401

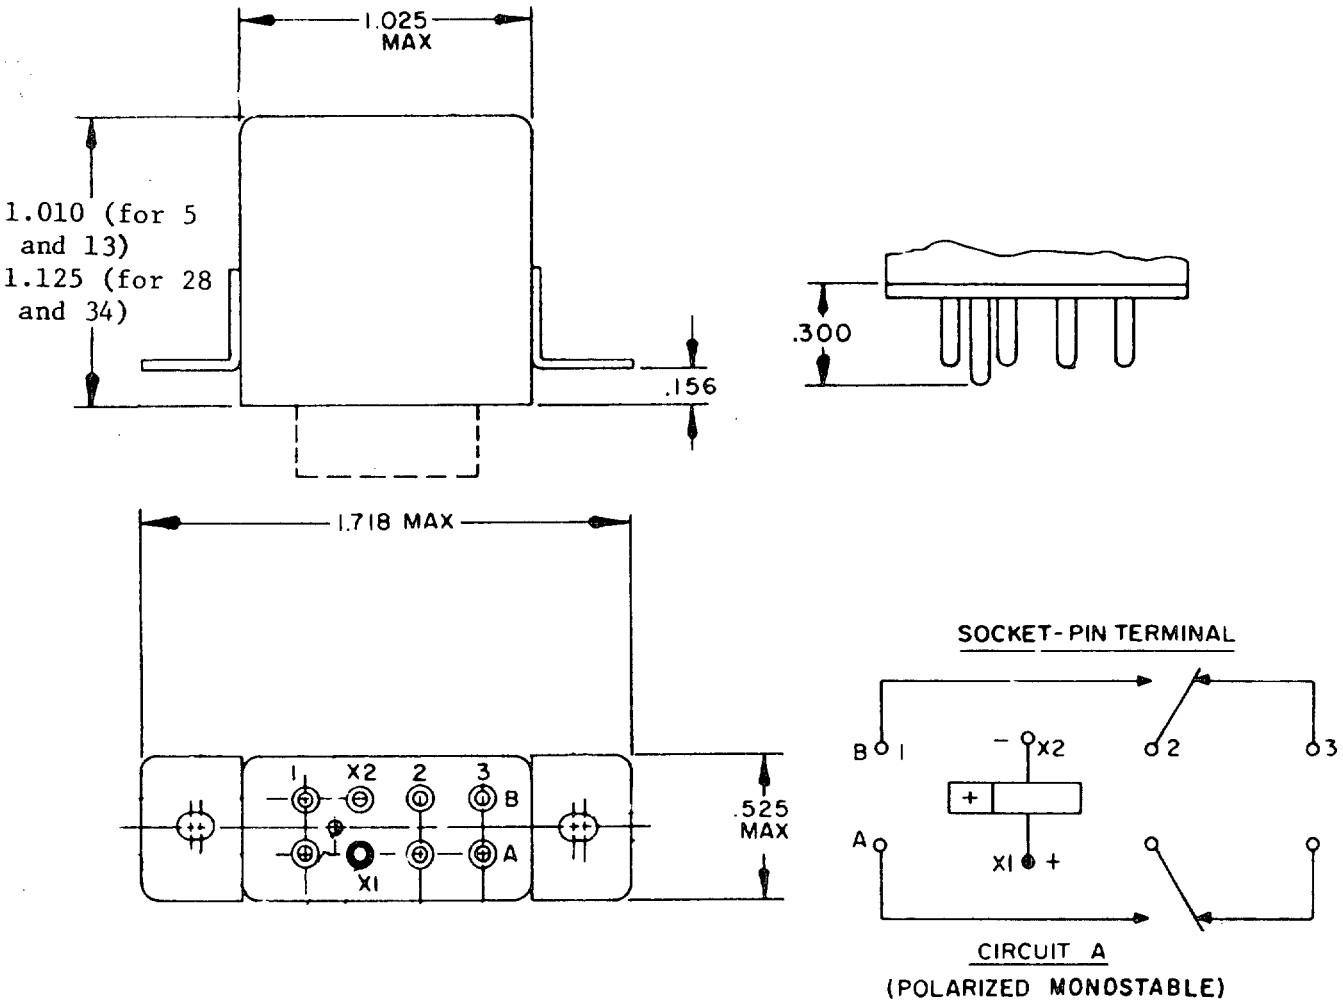


FIGURE 1.


MS PART NO. MS27401-	TYPE	COIL FREQ	COIL SUPPRESSION	TERMINAL TYPE	MOUNTING	MATING SOCKET	CIRCUIT
5	IER	DC	N/A	SOLDER HOOK	FIG.1	N/A	A
13	I	DC	N/A	SOLDER HOOK	FIG.1	N/A	A
34	IER	50/400	N/A	SOCKET HOOK	FIG.1	N/A	A
28	I	50/400	N/A	SOLDER HOOK	FIG.1	N/A	A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106


RELAY, 10 AMP, 2PDT, PERMANENT MAGNET DRIVE, ALL WELDED, HERMETICALLY SEALED

MS27401





DETAIL POLARIZING PIN FOR 50/60, 50/400 AND 400 Hz RELAYS



TERMINAL LAYOUT FOR ALL 50/400 AND 400 Hz RELAYS

OPERATING CHARACTERISTICS

MS PART NO. MS27401-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
5,13	X1X2	28	DC	320	29	.11
28,34		115	50/400	--	122	.03

MS PART NO. M27401-	TIME-MILLISECONDS-MAX							
	OPERATE	RELEASE	BOUNCE					
			MAIN		AUX		BREAK	
			NO	NC	NO	NC	NO ONLY	
5,13	10	10	1	1	--	--	--	
28,34	20	50	1	1	--	--	0.1	


TYPE OF LOAD	LIFE OPERATING CYCLES x 103	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	50/60Hz	400 Hz	60Hz	400 Hz	50/60 Hz
RESISTIVE	100	10	10	--	--	10	2.5	--	--	10	2.5
INDUCTIVE	10	--	--	--	--	--	2.5	--	--	--	2.5
INDUCTIVE	20	8	8	--	--	8	--	--	--	8	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 20 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED, HOOK & SCREW TERMINALS, STUD & BRACKET MOUNTED

MS27418

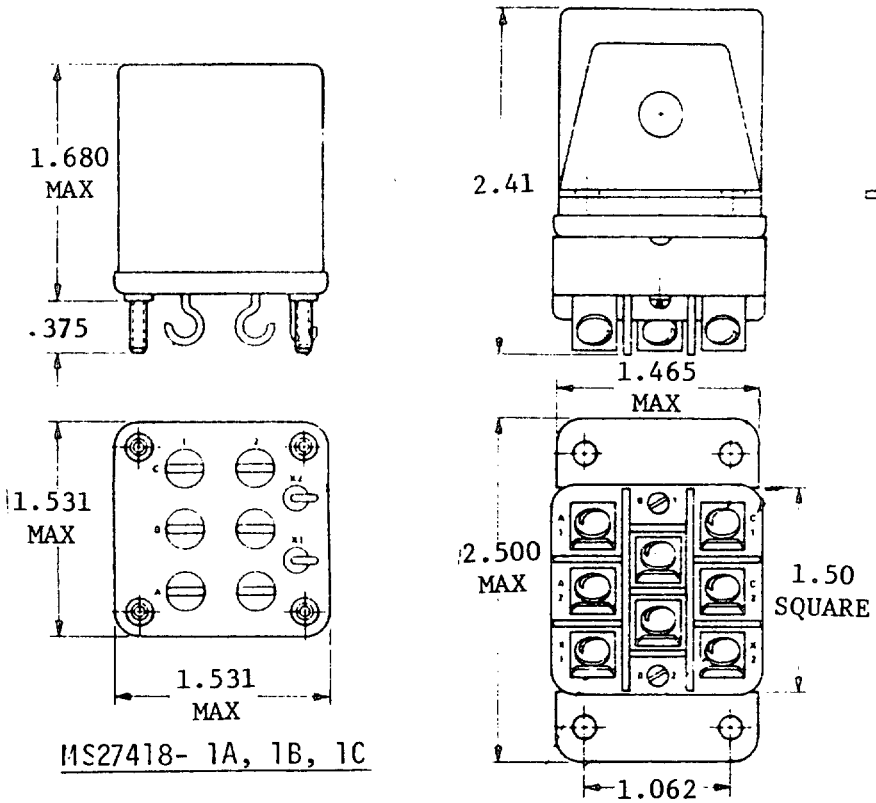

MS27418- 1A, 1B, 1C

MS27418- 2A, 2B, 2C

MS PART NUMBER MS27418-	TYPE	COIL	TERMINAL TYPE	MOUNTING OR MATING SOCKET
1A	1	AC	SOLDER HOOK	STUD
1B	I	DC	SOLDER HOOK	STUD
1C	1	AC	SOLDER HOOK	STUD
2A	I	AC	SCREW	BRACKET
2B	1	DC	SCREW	BRACKET
2C	I	AC	SCREW	BRACKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 20 AMP, 3PST, N. O. TYPE 1, HERMETICALLY SEALED, HOOK & SCREW TERMINALS, STUD & BRACKET MOUNTED

MS27418

OPERATING CHARACTERISTICS

MS PART NO. MS27418-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
1A,2A	X1X2	115	400	--	122	.055
1B,2B		28	DC	--	29	.25
1C,2C		115	50/60	--	122	.06

MS PART NO. MS27418-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
1A,2A	25	50	2	--	--	--
1B,2B	20	10	2	--	--	--
1C,2C	25	50	2	--	--	--


TYPE OF LOAD	LIFE OPERATING CYCLES x 103	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	50/60Hz	400 Hz	60Hz	400 Hz	50/60 Hz
RESISTIVE	50	20	--	--	--	20	20	--	--	20	--
INDUCTIVE	100	--	--	--	--	20	20	--	5	20	--
INDUCTIVE	10	15	--	--	--	--	--	--	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 10 AMP, 2PDT, MAGNETIC LATCH, HERMETICALLY SEALED, ALL WELDED

MS27744

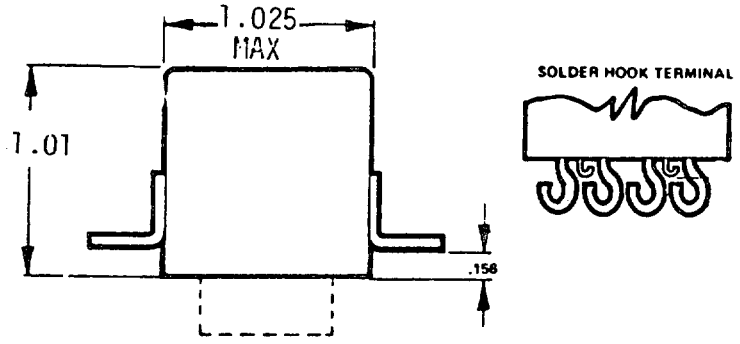

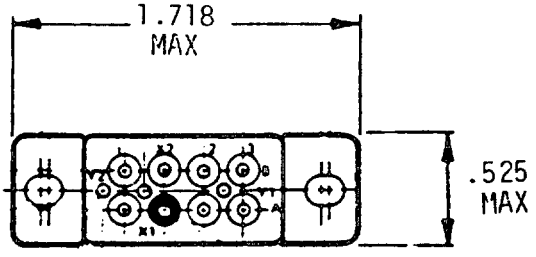

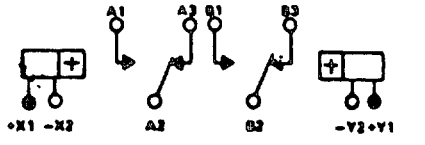

CIRCUIT

TO CLOSE NO. 1 CONTACTS (OPERATE) ENERGIZE X1 AND X2.
TO CLOSE NO. 2 CONTACTS (RESET) ENERGIZE Y1 AND Y2

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS27744-1	I	DC	SOLDER HOOK	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 2PDT, MAGNETIC LATCH, HERMETICALLY SEALED, ALL WELDED

MS27744

OPERATING CHARACTERISTICS

MS PART NO. MS27744-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
1	X1X2	28	DC	--	29	0.05

MS PART NO. MS27744-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
1	10	--	1	1	--	--


TYPE OF LOAD	LIFE OPERATING CYCLES x 103	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10	--	--	--	10	--
INDUCTIVE	20	8	8	--	--	8	--	--	--	8	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, MAGNETIC LATCH, HERMETICALLY SEALED, ALL WELDED

MS27745

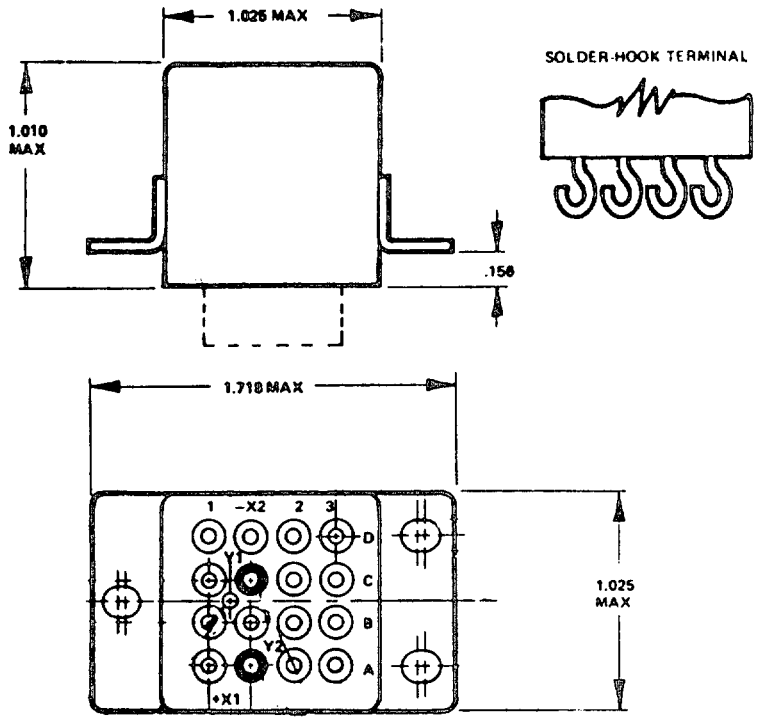

TERMINAL LAYOUT


MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS27745-1	I	DC	SOLDER HOOK	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, MAGNETIC LATCH, HERMETICALLY SEALED, ALL WELDED

MS27745

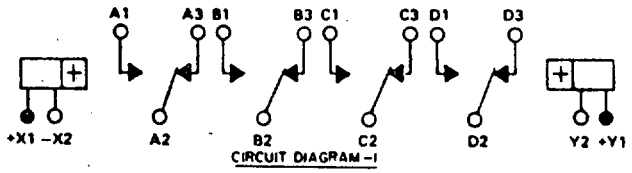

CIRCUIT DIAGRAM -1

TO CLOSE NO. 1 CONTACTS (OPERATE)
ENERGIZE X1 AND X2.
TO CLOSE NO. 3 CONTACTS (RESET)
ENERGIZE Y1 AND Y2.

OPERATING CHARACTERISTICS

MS PART NO. MS27745-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
1	X1X2	28	DC	--	29	0.075

MS PART NO. MS27745-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
1	15	--	1.0	1.0	--	--


TYPE OF LOAD	LIFE OPERATING CYCLES x 103	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10		--	--	10	
INDUCTIVE	20	8	8	--	--	8		--	--	8	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 25 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED


MS27997

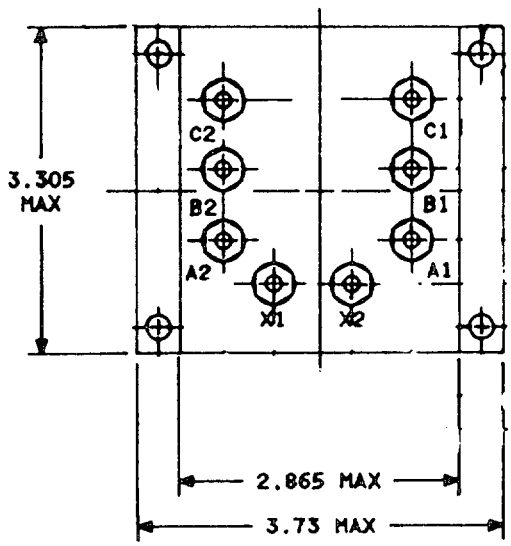

D1, A1

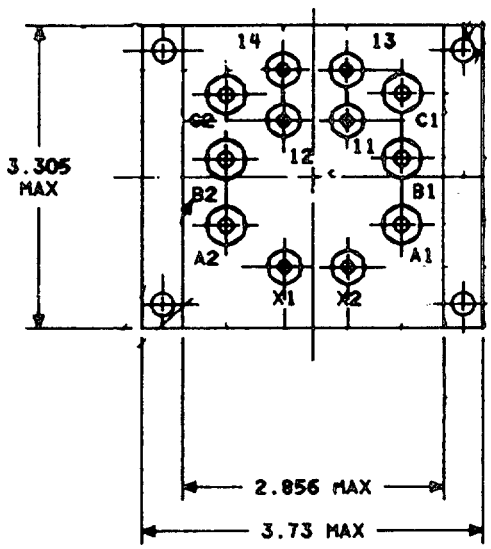

D2, A2

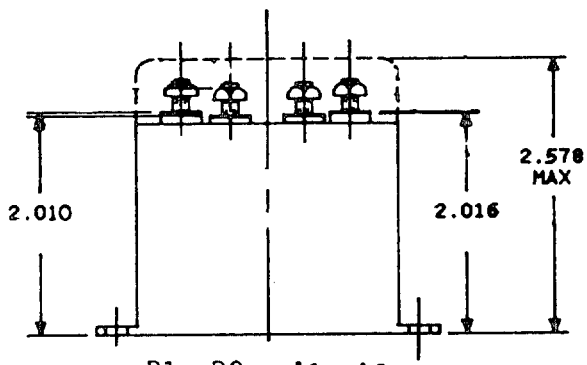

D1, D2 A1, A2

MS PART NUMBER MS27997-	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING	AUXILIARY CONTACTS
D1	I	DC	STUD	FLANGE	NONE
D2	I	DC			WITH
A1	I	AC			NONE
A2	I	AC			WITH


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 25 AMP, 3PST, N. O. TYPE 1, HERMETICALLY SEALED

MS27997

CIRCUIT D1, A1





CIRCUIT D2, A2

OPERATING CHARACTERISTICS

COIL DATA						
MS PART NO. MS27997-	COIL	NOMINAL VOLTS	NOMINAL FREQ Hz	NOMINAL RES	MAX VOLTS	MAX AMP
D1 D2	X1X2	28	DC	51	29	.6
A1 A2		115	60/400	--	124	.2


TIME-MILLISECONDS-MAX						
MS PART NO. MS27997-	OPERATE	RELEASE	BOUNCE MAIN NO	BOUNCE MAIN NC	BOUNCE AUX NO	BOUNCE AUX NC
D1	25	10	2	--	--	--
D2	25	10	2	--	4	4
A1	25	50	2	--	--	--
A2	25	50	2	--	4	4


RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED											
TYPE OF LOAD	LIFE OPERATING CYCLES x 10³	28 Vdc MAIN NO	28 Vdc MAIN NC	28 Vdc AUX NO	28 Vdc AUX NC	115 Vac, 1PHASE MAIN 400 Hz	115 Vac, 1PHASE MAIN 60Hz	115 Vac, 1PHASE AUX 400 Hz	115 Vac, 1PHASE AUX 60Hz	115/200 Vac, 3 PHASE MAIN 400 Hz	115/200 Vac, 3 PHASE MAIN 60 Hz
RESISTIVE	50	25	--	5	5	25	--	5	--	25	--
INDUCTIVE	10	25	--	5	5	25	--	5	--	25	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, ELECTROMAGNETIC, DIRECT CURRENT, 28 VOLTS

MIL-R-6106/50

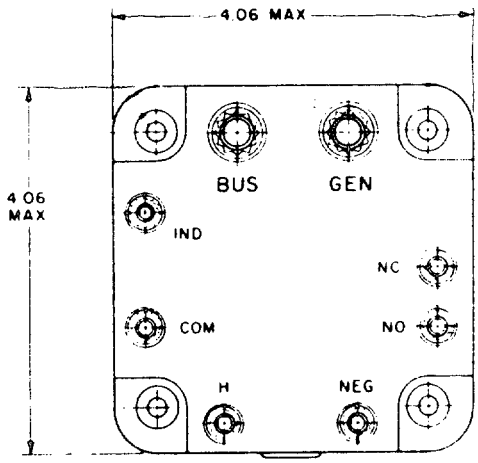

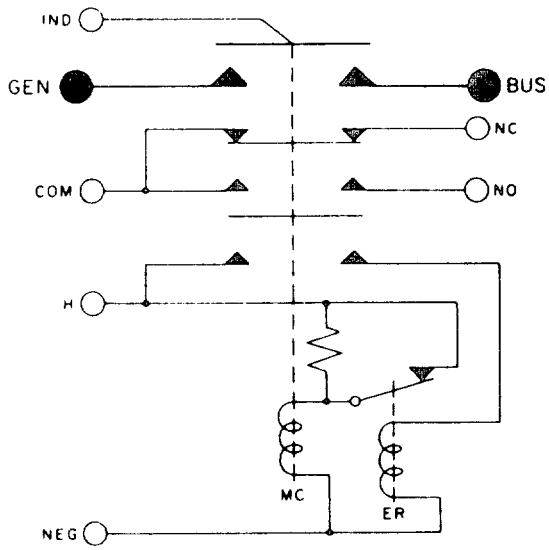

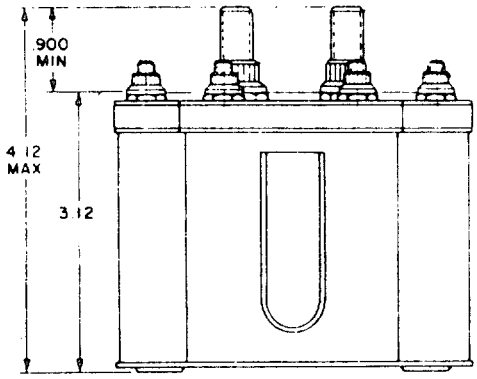

RATED CURRENT (MAIN CONTACTS)	400 AMPERES
RATED INRUSH CURRENT - 5 SECONDS	1500 AMPERES
RATED CURRENT AT 30 SECONDS	1000 AMPERES
RATING OF AUXILIARY CONTACTS	5 AMPERES RESISTIVE
AUXILIARY CONTACTS CONFIGURATION	SPDT
INTERRUPTING CAPACITY	4000 AMPERES
ECONOMIZING COIL	
RATED VOLTAGE	12 - 15 VOLTS MIN
RATED CURRENT (MAIN CONTACTS)	30 VOLTS
RATED CURRENT (AUXILIARY CONTACTS)	400 AMPERES
	5 AMPERES

PART NUMBER: M6106/39-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, TIME DELAY, HYBRID AND SOLID STATE

MIL-R-83726

SCOPE: THIS SECTION COVERS HYBRID AND SOLID STATE, TIME DELAY RELAYS. THESE RELAYS ARE INTENDED FOR USE IN DIRECT AND ALTERNATING CURRENT (SINGLE AND POLYPHASE) ELECTRICAL SYSTEMS AS A MEANS OF TIMING AND CONTROLLING THE MAKING AND BREAKING OF CIRCUITS FOR ELECTRICALLY OPERATING EQUIPMENT AND DEVICES.


PART NUMBER EXAMPLE:

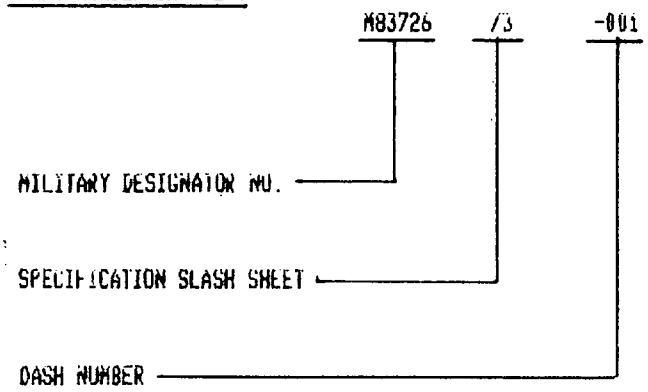

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, TIME DELAY ON OPERATE TYPE 1, HERMETICALLY SEALED, CLASS F, 10 AMP, 2PDT

MIL-R-83726/1




PLUG-IN TERMINAL




SOLDER HOOK TERMINAL





TERMINAL LAYOUTS



CIRCUIT

* DASH NO.		TIME DELAY	* DASH NO.		TIME DELAY	* DASH NO.		TIME DELAY
SOL-DER HOOK	PLUG-IN	SECONDS ±10%	SOL-DER HOOK	PLUG-IN	SECONDS ±10%	SOL-DER HOOK	PLUG-IN	SECONDS ±10%
001	101	0.100 #	020	120	25.0	038	138	130.0
002	102	0.500 #	021	121	30.0	039	139	140.0
003	103	0.750 #	022	122	35.0	040	140	150.0
004	104	1.0	023	123	40.0	041	141	160.0
005	105	2.0	024	124	45.0	042	142	170.0
006	106	3.0	025	125	50.0	043	143	180.0
007	107	4.0	026	126	55.0	044	144	190.0
008	108	5.0	027	127	60.0	045	145	200.0
009	109	6.0	028	128	65.0	046	146	210.0
010	110	7.0	029	129	70.0	047	147	220.0
011	111	8.0	030	130	75.0	048	148	230.0
012	112	9.0	031	131	80.0	049	149	240.0
013	113	10.0	032	132	85.0	050	150	250.0
014	114	12.0	033	133	90.0	051	151	260.0
015	115	14.0	034	134	95.0	052	152	270.0
016	116	16.0	035	135	100.0	053	153	280.0
017	117	18.0	036	136	110.0	054	154	290.0
018	118	20.0	037	137	120.0	055	155	300.0
019	119	22.0						

PART NUMBER: M83726/1-*

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS


RESISTIVE LOAD: 10 AMPERES
NOMINAL VOLTAGE: 28 VDC
DUTY RATING: CONTINUOUS
RELEASE TIME: 25 MILLISECOND MAX
MAX VOLTAGE: 30 VDC
MINIMUM VOLTAGE: 20 VDC
CONTACT BOUNCE: 1 MILLISECOND MAX
RECYCLE TIME: 50 MILLISECOND MAX

ADD +10 MILLISECONDS TO ±10% TOLERANCE
* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAY, TIME DELAY ON RELEASE, HERMETICALLY SEALED, SEPERATE POSITIVE CONTROL, TYPE IIA, CLASS B, 10 AMP, 2PDT

MIL-R-83726/2






SOLDER HOOK TERMINAL




TERMINAL LAYOUTS





PLUG-IN TERMINAL



CIRCUIT

* DASH NO.		TIME DELAY	* DASH NO.		TIME DELAY	* DASH NO.		TIME DELAY
SOL-DER HOOK	PLUG-IN	SECONDS ±10%	SOL-DER HOOK	PLUG-IN	SECONDS ±10%	SOL-DER HOOK	PLUG-IN	SECONDS ±10%
001	101	0.100 *	020	120	25.0	038	138	130.0
002	102	0.500 *	021	121	30.0	039	139	140.0
003	103	0.750 *	022	122	35.0	040	140	150.0
004	104	1.0	023	123	40.0	041	141	160.0
005	105	2.0	024	124	45.0	042	142	170.0
006	106	3.0	025	125	50.0	043	143	180.0
007	107	4.0	026	126	55.0	044	144	190.0
008	108	5.0	027	127	60.0	045	145	200.0
009	109	6.0	028	128	65.0	046	146	210.0
010	110	7.0	029	129	70.0	047	147	220.0
011	111	8.0	030	130	75.0	048	148	230.0
012	112	9.0	031	131	80.0	049	149	240.0
013	113	10.0	032	132	85.0	050	150	250.0
014	114	12.0	033	133	90.0	051	151	260.0
015	115	14.0	034	134	95.0	052	152	270.0
016	116	16.0	035	135	100.0	053	153	280.0
017	117	18.0	036	136	110.0	054	154	290.0
018	118	20.0	037	137	120.0	055	155	300.0
019	119	22.0						

PART NUMBER: M83726/2-*

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS


RESISTIVE LOAD: 10 AMPERES
NOMINAL VOLTAGE: 28 VDC
DUTY RATING: CONTINUOUS
RECYCLE TIME: 50 MILLISECOND MAX
MAX VOLTAGE: 30 VDC
MINIMUM VOLTAGE: 20 VDC
CONTACT BOUNCE: 1 MILLISECOND MAX
OPERATE TIME AT 25°C 28 VDC : 10 MILLISECOND MAX


* ADD +10 MILLISECONDS TO ±10% TOLERANCE
* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAY, TIME DELAY ON OPERATE TYPE 1, HERMETICALLY SEALED, CLASS K, 10 AMP, 2PDT

MIL-R-83726/3






SOLDER HOOK TERMINAL




TERMINAL LAYOUTS





PLUG-IN TERMINAL



CIRCUIT

* DASH NO.		TIME DELAY	* DASH NO.		TIME DELAY	* DASH NO.		TIME DELAY
SOL-DER HOOK	PLUG-IN	SECONDS ±10%	SOL-DER HOOK	PLUG-IN	SECONDS ±10%	SOL-DER HOOK	PLUG-IN	SECONDS ±10%
001	101	0.100 *	020	120	25	038	138	130
002	102	0.500 *	021	121	30	039	139	140
003	103	0.750 *	022	122	35	040	140	150
004	104	1	023	123	40	041	141	160
005	105	2	024	124	45	042	142	170
006	106	3	025	125	50	043	143	180
007	107	4	026	126	55	044	144	190
008	108	5	027	127	60	045	145	200
009	109	6	028	128	65	046	146	210
010	110	7	029	129	70	047	147	220
011	111	8	030	130	75	048	148	230
012	112	9	031	131	80	049	149	240
013	113	10	032	132	85	050	150	250
014	114	12	033	133	90	051	151	260
015	115	14	034	134	95	052	152	270
016	116	16	035	135	100	053	153	280
017	117	18	036	136	110	054	154	290
018	118	20	037	137	120	055	155	300
019	119	22						

PART NUMBER: M83726/3-*

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS


RESISTIVE LOAD: 10 AMPERES
NOMINAL VOLTAGE: 28 VDC
DUTY RATING: CONTINUOUS
RELEASE TIME: 25 MILLISECOND MAX
MAX VOLTAGE: 30 VDC
MINIMUM VOLTAGE: 20 VDC
CONTACT BOUNCE: 1 MILLISECOND MAX
RECYCLE TIME: 50 MILLISECOND MAX


* ADD +10 MILLISECONDS TO ±10% TOLERANCE
* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAY, TIME DELAY ON RELEASE, HERMETICALLY SEALED, SEPERATE POSITIVE CONTROL, TYPE IIA, CLASS B, 10 AMP, 2PDT

MIL-R-83726/4






SOLDER HOOK TERMINAL




TERMINAL LAYOUTS





PLUG-IN TERMINAL



CIRCUIT

* DASH NO.		TIME DELAY	* DASH NO.		TIME DELAY	* DASH NO.		TIME DELAY
SOL-DER HOOK	PLUG-IN	SECONDS ±10%	SOL-DER HOOK	PLUG-IN	SECONDS ±10%	SOL-DER HOOK	PLUG-IN	SECONDS ±10%
001	101	0.100 #	020	120	25	038	138	130
002	102	0.500 #	021	121	30	039	139	140
003	103	0.750 #	022	122	35	040	140	150
004	104	1	023	123	40	041	141	160
005	105	2	024	124	45	042	142	170
006	106	3	025	125	50	043	143	180
007	107	4	026	126	55	044	144	190
008	108	5	027	127	60	045	145	200
009	109	6	028	128	65	046	146	210
010	110	7	029	129	70	047	147	220
011	111	8	030	130	75	048	148	230
012	112	9	031	131	80	049	149	240
013	113	10	032	132	85	050	150	250
014	114	12	033	133	90	051	151	260
015	115	14	034	134	95	052	152	270
016	116	16	035	135	100	053	153	280
017	117	18	036	136	110	054	154	290
018	118	20	037	137	120	055	155	300
019	119	22						

PART NUMBER: M83726/4-*

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS

RESISTIVE LOAD:	10 AMPERES	MAX VOLTAGE:	30 VDC
NOMINAL VOLTAGE:	28 VDC	MINIMUM VOLTAGE:	20 VDC
DUTY RATING:	CONTINUOUS	CONTACT BOUNCE:	1 MILLISECOND MAX
RECYCLE TIME:	50 MILLISECOND MAX	OPERATE TIME AT 25°C 28 VDC :	10 MILLISECOND MAX


ADD +10 MILLISECONDS TO ±10% TOLERANCE


* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAY, TIME DELAY ON PICKUP, TYPE 1, CLASS A, 2 AMP, 2PDT, FIXED TIME, .06 TO 300 SECONDS

MIL-R-83726/7

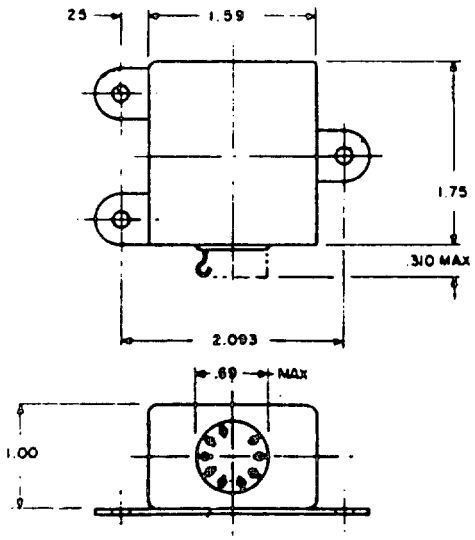

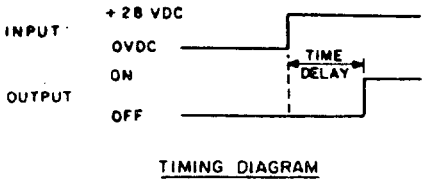

TIMING DIAGRAM



SCHEMATIC

DASH NO. #	TIME DELAY SECONDS ±10%	DASH NO. (CONT) #	TIME DELAY SECONDS ±10%	DASH NO. (CONT) #	TIME DELAY SECONDS ±10%	DASH NO. (CONT) #	TIME DELAY SECONDS ±10%
0600	.060 *	1202	12	6502	65	1703	170
1000	.100 *	1402	14	7002	70	1803	180
5000	.500 *	1602	16	7502	75	1903	190
7500	.750 *	1802	18	8002	80	2003	200
1001	1	2002	20	8502	85	2103	210
2001	2	2202	22	9002	90	2203	220
3001	3	2502	25	9502	95	2303	230
4001	4	3002	30	1003	100	2403	240
5001	5	3502	35	1103	110	2503	250
6001	6	4002	40	1203	120	2603	260
7001	7	4502	45	1303	130	2703	270
8001	8	5002	50	1403	140	2803	280
9001	9	5502	55	1503	150	2903	290
1002	10	6002	60	1603	160	3003	300

PART NUMBER: M83726/7-#

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS

RESISTIVE LOAD: 2 AMPERES
NOMINAL VOLTAGE: 28 VDC
DUTY RATING: CONTINUOUS


RANGE OF VOLTAGE: 18 TO 31 VOLTS
MINIMUM VOLTAGE:18 VDC
CONTACT BOUNCE: 2 MILLISECOND MAX


ADD ±10% TOLERANCE
* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAY, TIME DELAY ON DROPOUT, TYPE 2.A., CLASS A, 2 AMP, 2PDT, FIXED TIME, .100 TO 300 SECONDS


MIL-R-83726/8

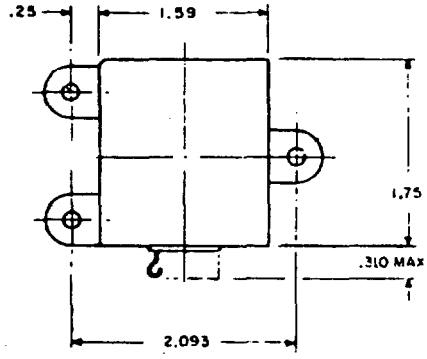



SCHEMATIC

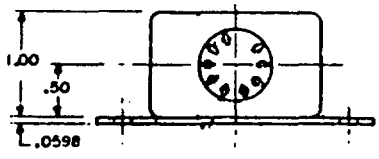

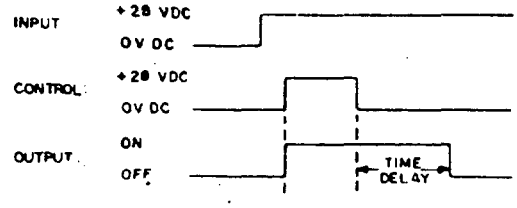

TIMING DIAGRAM

DASH NO. #	TIME DELAY SECONDS ±10%	DASH NO. (CONT) #	TIME DELAY SECONDS ±10%	DASH NO. (CONT) #	TIME DELAY SECONDS ±10%	DASH NO. (CONT) #	TIME DELAY SECONDS ±10%
0600	.060 #	1202	12	6502	65	1703	170
1000	.100 #	1402	14	7002	70	1803	180
5000	.500 #	1602	16	7502	75	1903	190
7500	.750 #	1802	18	8002	80	2003	200
1001	1	2002	20	8502	85	2103	210
2001	2	2202	22	9002	90	2203	220
3001	3	2502	25	9502	95	2303	230
4001	4	3002	30	1003	100	2403	240
5001	5	3502	35	1103	110	2503	250
6001	6	4002	40	1203	120	2603	260
7001	7	4502	45	1303	130	2703	270
8001	8	5002	50	1403	140	2803	280
9001	9	5502	55	1503	150	2903	290
1002	10	6002	60	1603	160	3003	300

PART NUMBER: M83726/8-#

RELAYS ELECTRICAL CHARACTERISTIC REQUIREMENTS

RESISTIVE LOAD: 2 AMPERES
NOMINAL VOLTAGE: 28 VDC
DUTY RATING: CONTINUOUS

RANGE OF VOLTAGE: 18 TO 31 VOLTS
MINIMUM VOLTAGE: 18 VDC
CONTACT BOUNCE: 2 MILLISECOND MAX

ADD ±10% TOLERANCE
COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, SOLID STATE

MIL-R-28750

SCOPE: THIS SECTION COVERS HERMETICALLY SEALED OR ENCAPSULATED SOLID STATE RELAYS, INCORPORATING ONLY SEMICONDUCTOR AND PASSIVE CIRCUIT DEVICES. THESE RELAYS ARE INTENDED FOR USE IN ELECTRONIC AND COMMUNICATION EQUIPMENT AS A MEANS OF CONTROLLING THE CIRCUITS OF ELECTRONICALLY OPERATED EQUIPMENT DEVICES. USERS ARE CAUTIONED TO ASSURE THAT TEMPERATURE LIMITATIONS, TRANSIENT VOLTAGES AND MOMENTARY CURRENT OVERLOADS DO NOT EXCEED THE APPLICABLE PARAMETERS OF A RELAY PROPOSED FOR A SPECIFIC APPLICATION.

TEMPERATURE (OPERATING AND STORAGES) -55°C TO +125°C


PART NUMBER EXAMPLE:

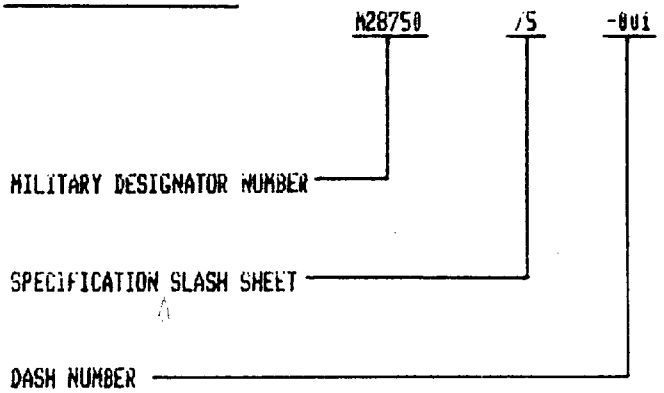


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, SOLID STATE, HERMETICALLY SEALED, ISOLATED, 50MA, 40V, AC OR DC, ANALOG SIGNAL SWITCHING, SPST(N.O.)

MIL-R-28750/5

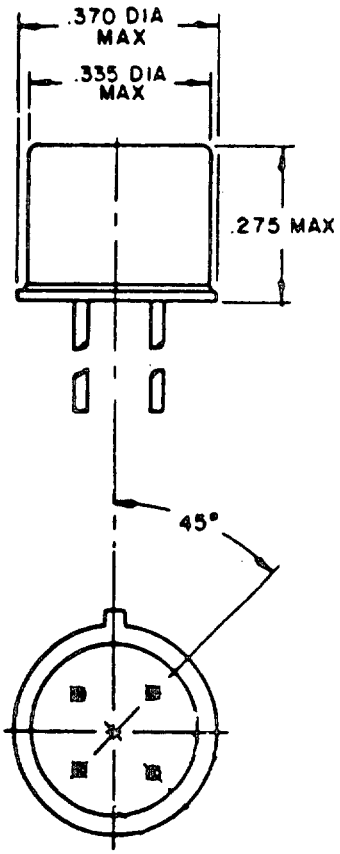

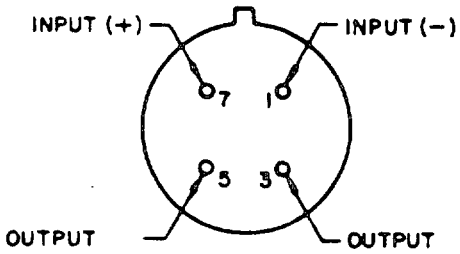

CIRCUIT
(BOTTOM VIEW)


INPUT VOLTAGE RANGE:	4.0 TO 7 VDC
RATED TURN-ON VOLTAGE:	5.0 VDC
RATED TURN-OFF VOLTAGE:	1.0 VDC MAXIMUM
INPUT CURRENT:	22 MA DC MAX
TURN-ON TIME:	10 MICROSECONDS MAX
TURN-OFF TIME:	15 MICROSECONDS MAX
RATED OUTPUT VOLTAGE:	+40 V AC OR DC
OUTPUT VOLTAGE DROP:	.5 VDC MAX


PART NUMBER: M28750/5-001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, SOLID STATE, HERMETICALLY SEALED, ISOLATED, 250MA, 40 V DC, SIGNAL SWITCHING, SPST(N.O.)

MIL-R-28750/6

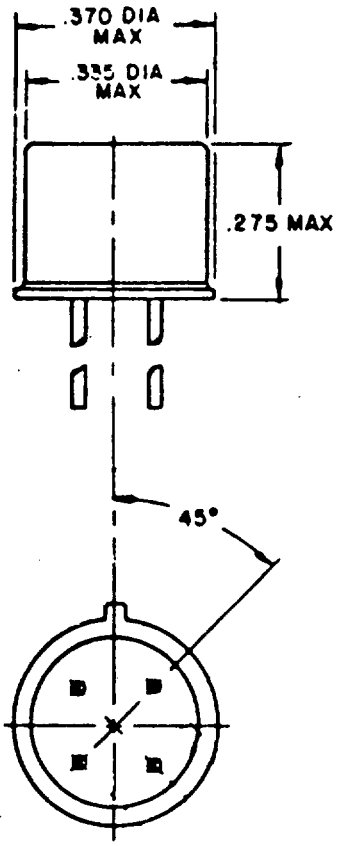

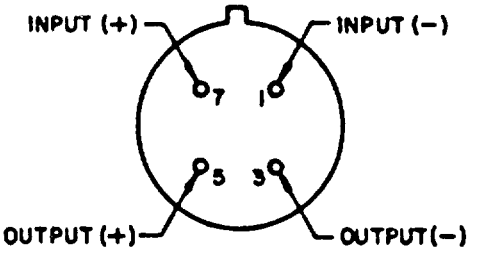

CIRCUIT
(BOTTOM VIEW)


INPUT VOLTAGE RANGE:	4.0 TO 7 VDC
RATED TURN-ON VOLTAGE:	5.0 VDC
RATED TURN-OFF VOLTAGE:	1.0 VDC MAXIMUM
INPUT CURRENT:	22 MA DC MAX
TURN-ON TIME:	10 MICROSECONDS MAX
TURN-OFF TIME:	15 MICROSECONDS MAX
RATED OUTPUT VOLTAGE:	40 V DC
OUTPUT VOLTAGE DROP:	.5 VDC MAX


PART NUMBER: M28750/6-001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, SOLID STATE, HERMETICALLY SEALED, ISOLATED, 100MA, 250 V DC, SIGNAL SWITCHING, SPST(N.O.)

MIL-R-28750/7

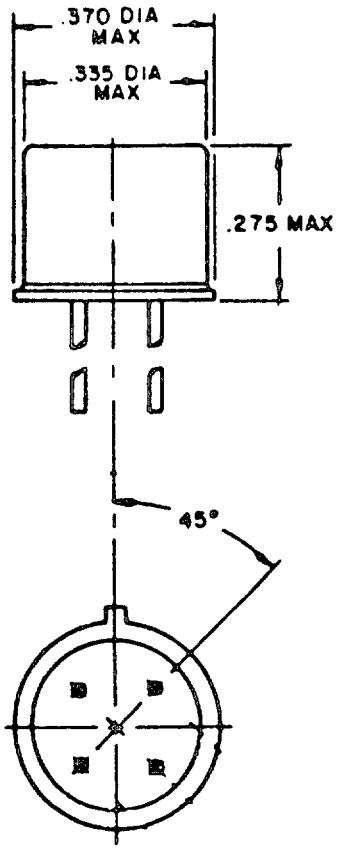

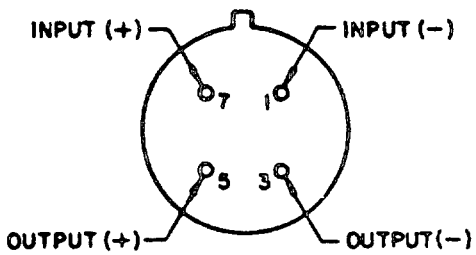

CIRCUIT
(BOTTOM VIEW)


INPUT VOLTAGE RANGE:	4.0 TO 7 VDC
RATED TURN-ON VOLTAGE:	5.0 VDC
RATED TURN-OFF VOLTAGE:	1.0 VDC MAXIMUM
INPUT CURRENT:	22 MA DC MAX
TURN-ON TIME:	10 MICROSECONDS MAX
TURN-OFF TIME:	75 MICROSECONDS MAX
RATED OUTPUT VOLTAGE:	250 V DC
OUTPUT VOLTAGE DROP:	.5 VDC MAX


PART NUMBER: M28750/7-001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAY, SOLID STATE, HERMETICALLY SEALED, OPTICALLY ISOLATED, 1 AMP, 0 VOLT TURN-ON, 40-440 HZ, POWER SWITCHING, SPST(N.O.)

MIL-R-28750/9

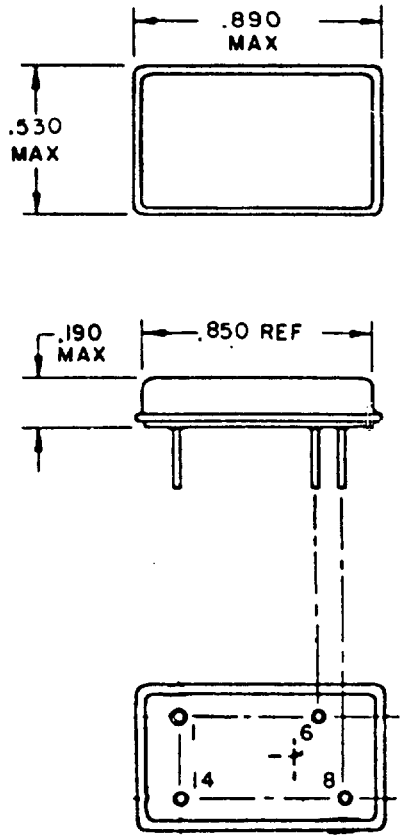



CIRCUIT DIAGRAM
TERMINAL VIEW



INPUT VOLTAGE RANGE:	3.8 TO 32 VDC
ASSURED TURN-ON VOLTAGE:	3.8 VDC MAXIMUM
ASSURED TURN-OFF VOLTAGE:	1.5 VDC MAXIMUM
INPUT CURRENT:	18 MA DC MAX
TURN-ON TIME:	1/2 CYCLE AC HZ
TURN-OFF TIME:	1 CYCLE AC HZ
RATED OUTPUT VOLTAGE:	250 V AC RMS MAX 40 - 440 HZ
OUTPUT VOLTAGE DROP:	1.5 VAC MAX

PART NUMBER: M28750/9-001


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, HYBRID, ESTABLISHED RELAIBILITY

MIL-R-28776

SCOPE: THIS SECTION COVERS RELAYS THAT USE A COMBINATION OF SOLID STATE CIRCUIT INPUT ELEMENTS FUNCTIONING WITH AN ELECTROMECHANICAL RELAY THAT PERFORMS THE SWITCHING FUNCTIONS ASSOCIATED WITH CONTROL SYSTEM APPLICATIONS. THESE RELAYS ARE DESIGNED TO OPERATE IN LOW AND MEDIUM POWER SWITCHING CIRCUITS WITH CONTACT RATINGS UP TO 10 AMPERES ALTERNATING CURRENT OR DIRECT CURRENT. THESE RELAYS ARE INTENDED FOR USE IN ELECTRONIC AND COMMUNICATION EQUIPMENT AS A MEANS OF CONTROLLING THE CIRCUITS OF ELECTRICALLY OPERATED EQUIPMENT AND DEVICES.


PART NUMBER EXAMPLE:

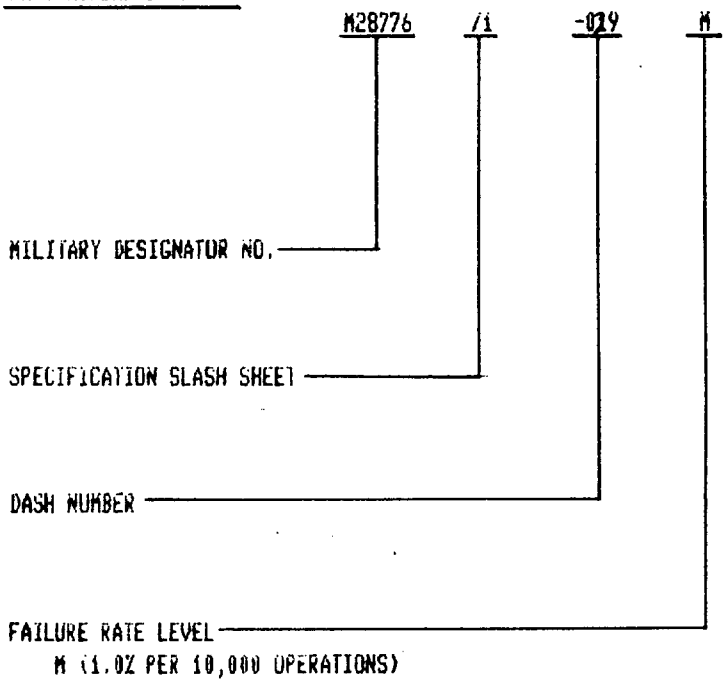


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, HYBRID, ESTABLISHED RELIABILITY, TRANSISTOR DRIVE,
ELECTROMECHANICAL OUTPUT, DPDT, LOW LEVEL TO 2 AMPERE

MIL-R-28776/1



CIRCUIT DIAGRAM
TERMINAL VIEW

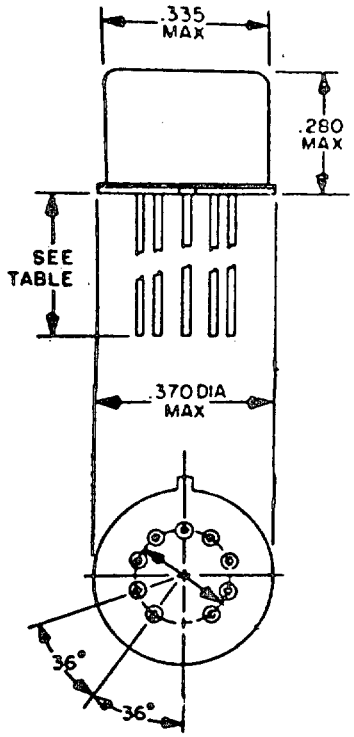

DASH NO. # LEAD LENGTH .500 MIN	SUPPLY VOLTAGE (VDC)		AT 25°C		OVER TEMP RANGE
			COIL RES. (OHMS)	MAX BASE CURRENT # TO ASSURE	MAX BASE CURRENT # TO ASSURE
	RATED	MAX	±10%	TURN ON(MA)	TURN ON(MA)
025	5.0	5.8	50	.75	3.00
026	6.0	8.0	98	.55	2.04
027	9.0	12.0	220	.36	1.36
028	12.0	16.0	390	.27	1.03
029	18.0	24.0	880	.16	0.68
030	26.5	32.0	1,560	.13	0.50

LIMIT BASE CURRENT TO 15mA MAXIMUM.

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M28776/1- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, HYBRID, ESTABLISHED RELIABILITY, TRANSISTOR DRIVE,
ELECTROMECHANICAL OUTPUT, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODE

MIL-R-28776/3



CIRCUIT DIAGRAM
TERMINAL VIEW

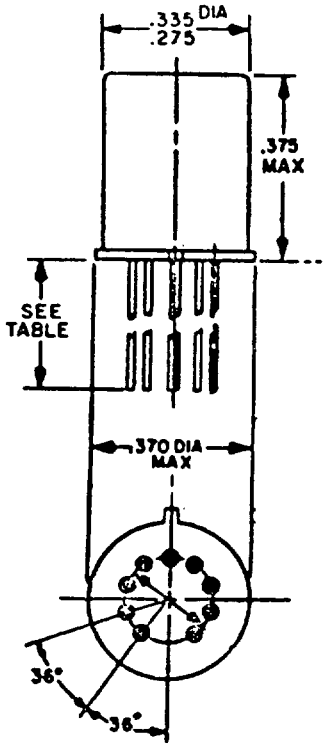

DASH NO. # LEAD LENGTH .500 MIN	SUPPLY VOLTAGE (VDC)		AT 25°C		OVER TEMP RANGE
	RATED	MAX	COIL RES. (OHMS) ±10%	MAX BASE CURRENT TO ASSURE TURN ON(MA) $	MAX BASE CURRENT TO ASSURE TURN ON(MA) $
033	5.0	7.0	100	.37	1.50
034	6.0	10.0	200	.25	1.00
035	9.0	15.0	400	.18	0.75
036	12.0	20.0	850	.12	0.47
037	18.0	30.0	1600	.09	0.38
038	26.5	40.0	3300	.06	0.24
039	36.0	57.0	6500	.034	0.17
040	48.0	75.0	11,000	.026	0.13

$ LIMIT BASE CURRENT TO 15mA MAXIMUM.
THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M28776/3- # FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, HYBRID, ESTABLISHED RELIABILITY, TRANSISTOR DRIVE,
ELECTROMECHANICAL OUTPUT, SPDT, LOW LEVEL TO 1.0 AMPERE W/INTERNAL DIODE

MIL-R-28776/4



CIRCUIT DIAGRAM
TERMINAL VIEW

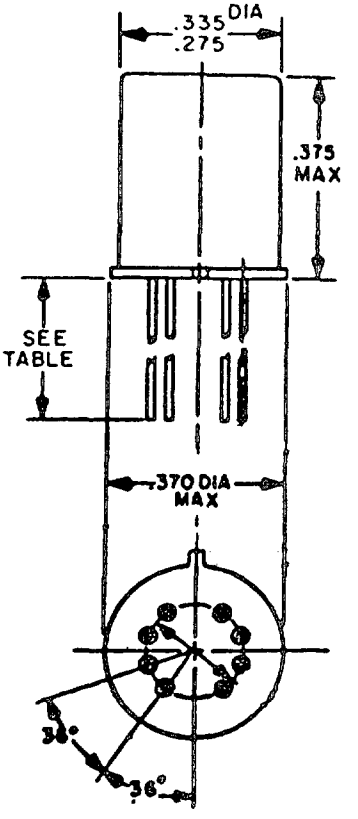

DASH NO. & LEAD LENGTH .500 MIN	SUPPLY VOLTAGE (VDC)		AT 25°C		OVER TEMP RANGE
			COIL RES. (OHMS)	MAX BASE CURRENT # TO ASSURE	MAX BASE CURRENT # TO ASSURE
	RATED	MAX	±10%	TURN ON(MA)	TURN ON(MA)
033	5.0	8.0	125	.28	1.20
034	6.0	11.0	255	.20	0.78
035	9.0	16.0	630	.13	0.48
036	12.0	22.0	1025	.10	0.39
037	18.0	33.0	2300	.07	0.26
038	26.5	45.0	4000	.05	0.20
039	32.0	57.0	6500	.04	0.16
040	40.0	75.0	11,000	.03	0.13

LIMIT BASE CURRENT TO 15mA MAXIMUM.
* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M28776/4- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, HYBRID, ESTABLISHED RELIABILITY, TRANSISTOR DRIVE,
ELECTROMECHANICAL OUTPUT SPDT, LOW LEVEL TO 1.0 AMPERE W/INTERNAL DIODE

MIL-R-28776/5



CIRCUIT DIAGRAM
TERMINAL VIEW

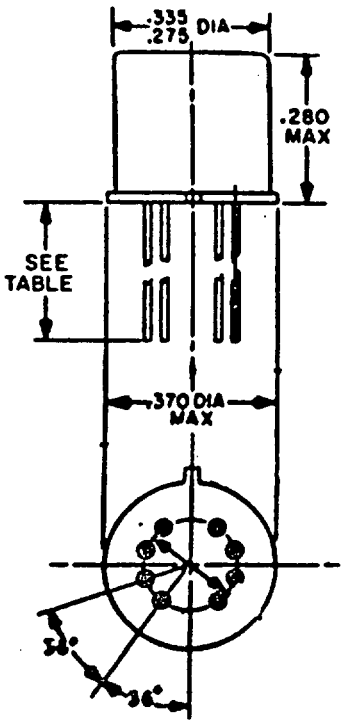

DASH NO. # LEAD LENGTH .500 MIN	SUPPLY VOLTAGE (VDC)		At 25°C		OVER TEMP RANGE
			COIL RES. (OHMS)	MAX BASE CURRENT * TO ASSURE	MAX BASE CURRENT * TO ASSURE
	RATED	MAX	±10%	TURN ON(MA)	TURN ON(MA)
025	5.0	5.8	63	0.60	2.38
026	6.0	8.0	125	0.42	1.60
027	9.0	12.0	280	0.27	1.07
028	12.0	16.0	500	0.21	0.80
029	18.0	24.0	1,130	0.12	0.53
030	26.5	32.0	2,000	0.10	0.40

* LIMIT BASE CURRENT TO 15mA MAXIMUM.
THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M28776/5- # FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, VACUUM


MIL-R-83725

SCOPE: THIS SECTION COVERS RELAYS WITH VACUUM DIELECTRIC FOR USE IN HIGH OR LOW VOLTAGE CIRCUITS OF ELECTRONIC AND ELECTRICAL EQUIPMENT. THESE RELAYS ARE INTENDED FOR USE TO PROVIDE ANTENNA SWITCHING, SWITCHING BETWEEN COUPLERS, TAP CHANGING ON R.F. COILS, SWITCHING BETWEEN TRANSMITTER AND RECEIVER, PULSE FORMING NETWORKS AND HEAVY DUTY SWITCHING IN POWER SUPPLIES.


TEMPERATURE RANGE: -55°C TO +125°C

RELAY, VACUUM, SPST, 15 AMPERS RMS, 12 KILOVOLTS (PEAK)

MIL-R-83725/1

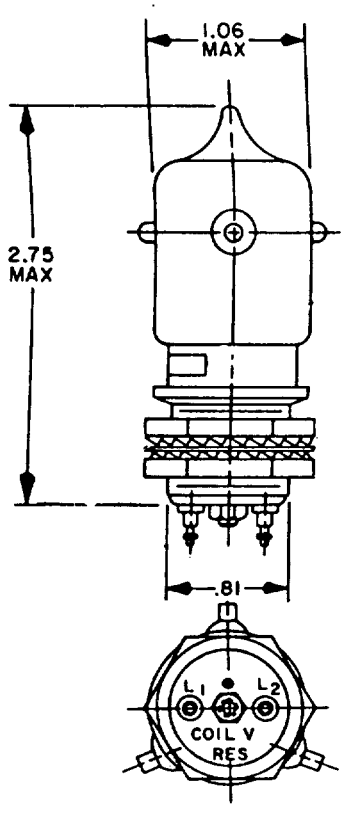

THREAD MOUNT

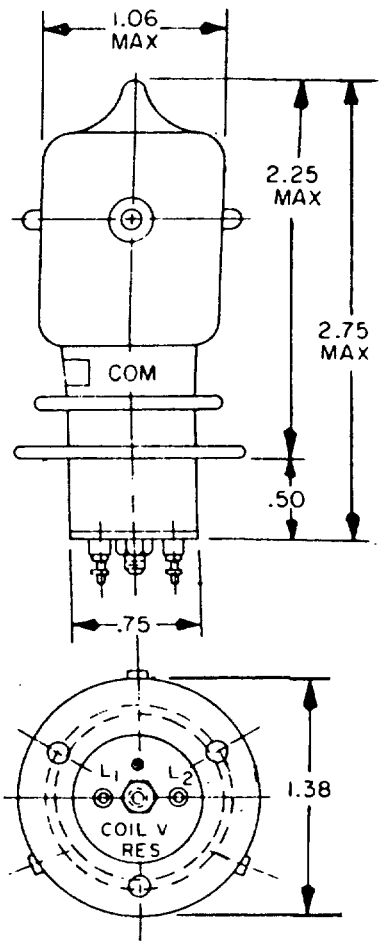


FLANGE MOUNT


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, VACUUM, SPST, 15 AMPERES RMS, 12 KILOVOLTS (PEAK)


MIL-R-83725/1

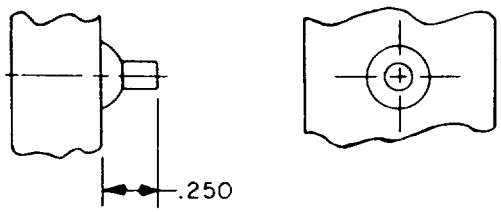


STANDARD TERMINAL

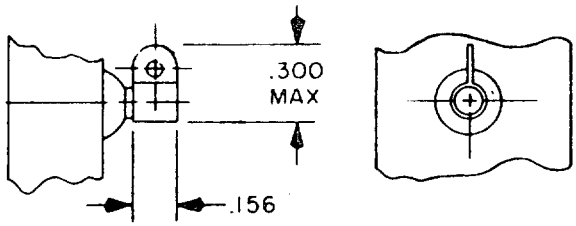

TAB TERMINAL

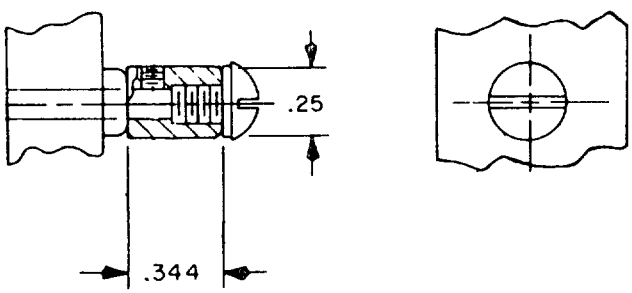

SCREW TERMINAL



CIRCUIT DIAGRAM

TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER #	TERMINATION	MOUNT	COIL VOLTAGE		COIL RESISTANCE
			NOM. Vdc	MAX. Vdc	OHMS
001	STANDARD	THREAD	26.5	32	265
002	TAB	THREAD	26.5	32	265
003	SCREW	THREAD	26.5	32	265
004	STANDARD	FLANGE	26.5	32	265
005	TAB	FLANGE	26.5	32	265
006	SCREW	FLANGE	26.5	32	265

PART NUMBER: M83725/1-#

RELAYS ELECTRICAL CHARACTERISTIC REQUIREMENTS

LOAD RTGS RESISTIVE: 15 AMPERES RMS, dc OR 60 Hz
10 AMPERES RMS, 2.5 MHz
6 AMPERES RMS, 16 MHz

VOLTAGE RTGS: 12 KILOVOLTS PEAK,dc OR 60 MHz
10 KILOVOLTS PEAK, 2.5 MHz
8 KILOVOLTS PEAK, 18 MHz

DUTY RATING: CONTINUOUS

CONTACT BOUNCE: NOT APPLICABLE

RELEASE TIME: 8 MILLISECOND, MAX

OPERATING TIME: 10 MILLISECOND, MAX

COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, VACUUM, SPST, 25 AMPERES RMS, 25 KILOVOLTS (PEAK)

MIL-R-83725/2

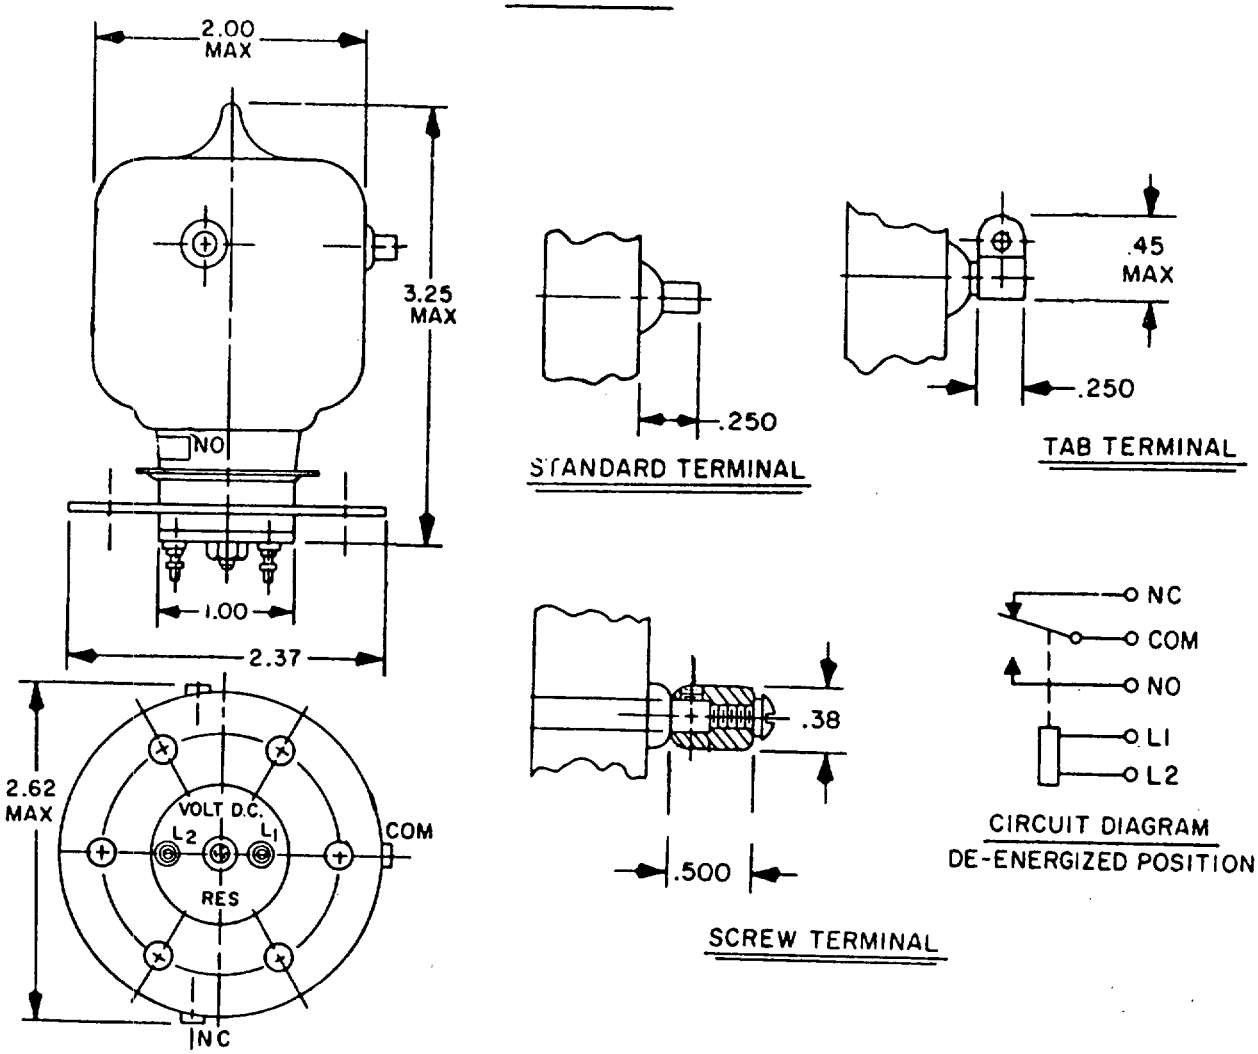


TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER #	TERMINATION	COIL VOLTAGE		COIL RESISTANCE
		NOM Vdc	MAX Vdc	OHMS
001	STANDARD	26.5	32	120
002	TAB	26.5	32	120
003	SCREW	26.5	32	120

PART NUMBER: M83725/2-#

RELAYS ELECTRICAL CHARACTERISTIC REQUIREMENTS

LOAD RTGS RESISTIVE: 25 AMPERES RMS, dc OR 60 Hz
13.5 AMPERES RMS, 2.5 MHz
8.0 AMPERES RMS, 16 MHz

DUTY RATING: CONTINUOUS

RELEASE TIME: 10 MILLISECOND, MAX

VOLTAGE RTGS: 25 KILOVOLTS PEAK, dc OR 60 Hz
20 KILOVOLTS PEAK, 2.5 MHz
15 KILOVOLTS PEAK, 16 MHz

CONTACT BOUNCE: NOT APPLICABLE


OPERATING TIME: 25 MILLISECOND, MAX


COMPLETE PART NO. SHALL INCLUDE DASH NUMBER


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAY, VACUUM, SPST, DC, 8 AMPERES


MIL-R-83725/3






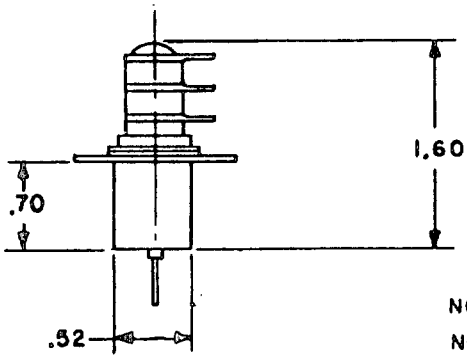








CIRCUIT DIAGRAM

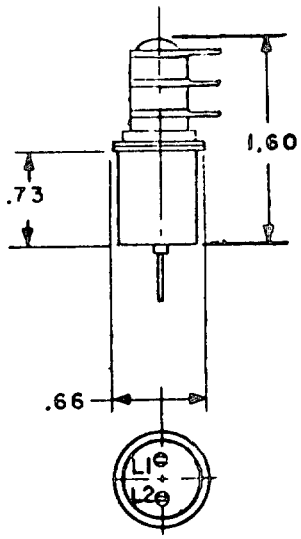

FLANGE MOUNT CONFIGURATION
(M83725/3-001)

FLANGELESS CONFIGURATION
(M83725/3-002)

TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER #	COIL VOLTAGE		COIL RESISTANCE OHMS	
	MIN Vdc	MAX Vdc	MIN	MAX
001	26.5	32	900	1300
002	26.5	32	800	1300

PART NUMBER: M83725/3-#

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS

LOAD RATING: (NONSWITCHING) 8 AMPERES RMS, dc OR 60 Hz
6 AMPERES RMS, 2.5 MHz
4 AMPERES RMS, 16 MHz

LOAD RATING: (SWITCHING) 1.0 AMPERE @ 1 kVdc, RESISTIVE
0.5 AMPERE @ 2 kVdc, RESISTIVE
2.0 AMPERE RMS @ 1kV(PEAK) FROM 1kHz TO 60 MHz

DUTY RATING: CONTINUOUS

RELEASE TIME: 10 MILLISECOND, MAX @ 25°C

VOLTAGE RTG: 2 kV(dc OR PEAK ac), OPERATING

CONTACT BOUNCE: 5.0 MILLISECONDS, MAX

OPERATING TIME: 10 MILLISECOND, MAX @ 26.5 Vdc @ 25°C

COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, VACUUM, SPDT, 18 AMPERES RMS, 3.5 KILOVOLTS PEAK (CARRY ONLY)

MIL-R-83725/5

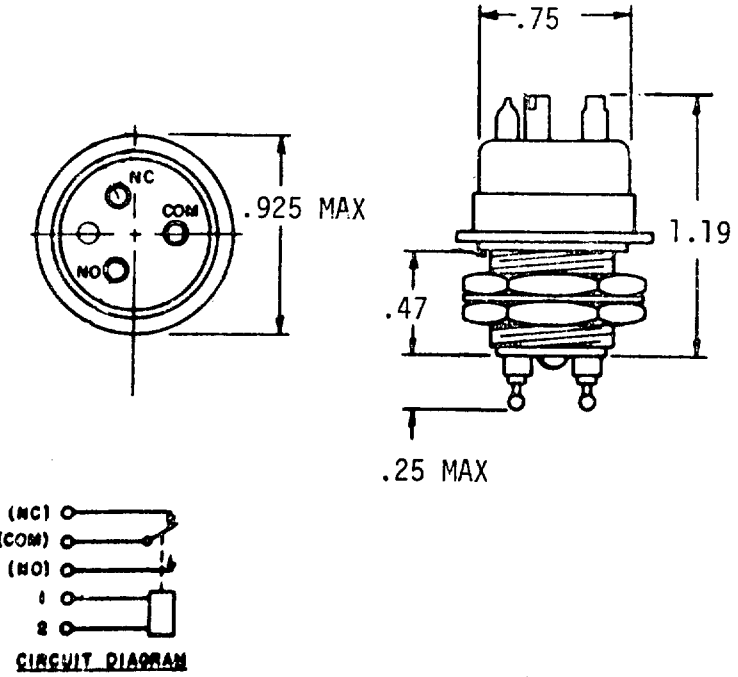


TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER *	COIL VOLTAGE		COIL RESISTANCE OHMS
	NOM Vdc	MAX Vdc	
001	26.5	32	335

PART NUMBER: M83725/5-001

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS

LOAD RATING: 18 AMPERES DC, OR 60 Hz rms.
(RESISTIVE) 14 AMPERES RMS. 2.5 MHz.
9 AMPERES RMS, 16 MHz.
7 AMPERES RMS, 32 MHz.
DUTY RATING: CONTINUOUS
RELEASE TIME: 8 MILLISECONDS, MAXIMUM
OPERATE TIME: 8 MILLISECONDS, MAXIMUM
COIL RESISTANCE: 335 OHMS +10 PERCENT

RATED OPERATING VOLTAGE: 3.5 KILOVOLTS PEAK, 60 Hz or dc
2.5 KILOVOLTS PEAK, 2.5 MHz.
2.0 KILOVOLTS PEAK, 16 MHz.
1.5 KILOVOLTS PEAK, 32 MHz.
CONTACT BOUNCE: NOT APPLICABLE
MAXIMUM VOLTAGE: 32 Vdc.
NOMINAL VOLTAGE: 26.5 Vdc.

* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, VACUUM, SPST, 8 AMPERES RMS, NC, DC

MIL-R-83725/18

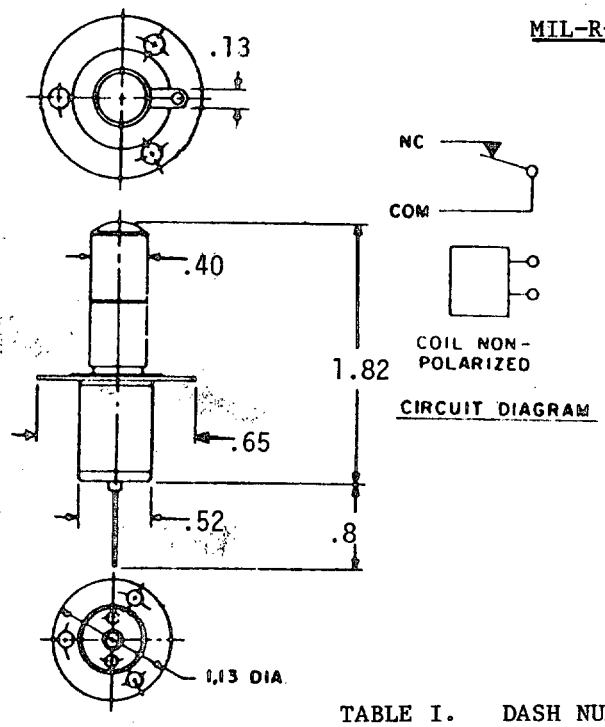


FIGURE 1

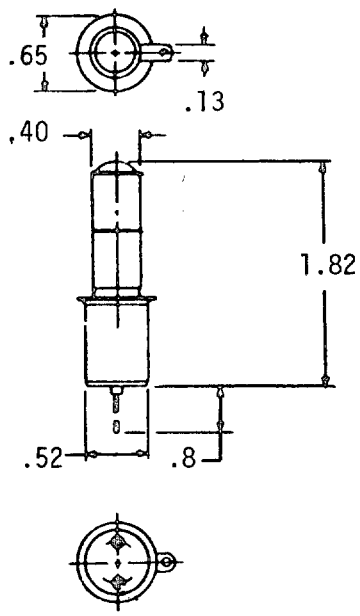


FIGURE 2

TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER *	FIGURE	MOUNT	COIL VOLTAGE NOM. Vdc	COIL VOLTAGE MAX. Vdc	COIL RESISTANCE OHMS
001	1	FLANGE	26.5	32	920
002	2	SLEEVE	26.5	32	920
003	2	SLEEVE	26.5	32	920

PART NUMBER: M83725/18-*

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS

LOAD RTGS RESISTIVE: 8 A DC
12 A RMS, 60 Hz
10 A RMS, 2.5 MHz
5 A RMS, 15 MHz
2 A RMS, 30 MHz
5 A RMS, 32 MHz (-003 only)

VOLTAGE RTGS: 7.5 KILOVOLTS PEAK,dc OR 60 MHz
7.5 KILOVOLTS PEAK, 2.5 MHz
7 KILOVOLTS PEAK, 16 MHz

DUTY RATING: CONTINUOUS

RELEASE TIME: 12 MILLISECOND, MAX @ 25°C

OPERATING TIME: 12 MILLISECOND, MAX @ 25°C

* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

☆U.S. GOVERNMENT PRINTING OFFICE: 1985 505-038/23931

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil – Downloaded: 2025-10-28T07:28Z
Check the source to verify that this is the current version before use.