MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS
RELAYS

TO ALL HOLDERS OF MIL-STD-242H(NAVY), PART 6:

1. THE FOLLOWING PAGES OF MIL-STD-242H(NAVY), PART 6 HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
vi	14 August 1985	vi	30 September 1982
105.1	14 August 1985	105.1	30 September 1982
105.5	14 August 1985	105.5	30 September 1982
105.6	14 August 1985	105.6	30 September 1982
134.3	14 August 1985	134.3	30 September 1982
134.4	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.5	14 August 1985	134.5	30 September 1982
134.6	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.7	14 August 1985	134.7	30 September 1982
134.10	14 August 1985	134.10	30 September 1982
134.11	14 August 1985	134.11	30 September 1982
134.12	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.13	14 August 1985	134.13	30 September 1982
134.14	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.19	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.20	14 August 1985	134.20	30 September 1982
134.23	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.24	14 August 1985	134.24	30 September 1982
134.29	14 August 1985	134.29	30 September 1982
134.30	14 August 1985	134.30	30 September 1982
134.33	14 August 1985	134.33	30 September 1982
134.34	14 August 1985	134.34	30 September 1982
134.37	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.38	14 August 1985	134.38	30 September 1982
134.39	14 August 1985	134.39	30 September 1982
134.40	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.41	14 August 1985	134.41	30 September 1982
134.42	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.43	(REPRINTED WITHOUT CHANGE)		30 September 1982
134.44	14 August 1985	134.44	30 September 1982
134.45	14 August 1985	134.45	30 September 1982
134.48	14 August 1985	134.48	30 September 1982
134.49	14 August 1985	134.49	30 September 1982
134.50	(REPRINTED WITHOUT CHANGE)		30 September 1982
138.1	14 August 1985	138.1	30 September 1982
138.2	(REPRINTED WITHOUT CHANGE)		30 September 1982
138.3	14 August 1985	138.3	30 September 1982
138.4	(REPRINTED WITHOUT CHANGE)		30 September 1982
138.5	14 August 1985	138.5	30 September 1982
138.6	(REPRINTED WITHOUT CHANGE)		30 September 1982
138.7	14 August 1985	138.7	30 September 1982
138.8	14 August 1985	138.8	30 September 1982

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS
RELAYS

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
138.9	14 August 1985	138.9	30 September 1982
138.10	(REPRINTED WITHOUT CHANGE)		30 September 1982
138.11	14 August 1985	138.11	30 September 1982
138.12	(REPRINTED WITHOUT CHANGE)		30 September 1982
138.13	14 August 1985	138.13	30 September 1982
138.14	(REPRINTED WITHOUT CHANGE)		30 September 1982
138.15	14 August 1985	138.15	30 September 1982
138.23	14 August 1985	138.23	30 September 1982
138.24	14 August 1985	138.24	30 September 1982
138.25	14 August 1985	138.25	30 September 1982
138.26	14 August 1985	138.26	30 September 1982
138.27	14 August 1985	138.27	30 September 1982
138.28	14 August 1985	138.28	30 September 1982
138.29	14 August 1985	138.29	30 September 1982
138.30	(REPRINTED WITHOUT CHANGE)		30 September 1982
138.39	14 August 1985	138.39	30 September 1982
138.40	14 August 1985	138.40	30 September 1982
138.41	14 August 1985	138.41	30 September 1982
138.42	14 August 1985	138.42	30 September 1982
138.43	14 August 1985	138.43	30 September 1982
138.44	14 August 1985	138.44	30 September 1982
138.45	14 August 1985	138.45	30 September 1982
138.46	14 August 1985	138.46	30 September 1982
164.1	14 August 1985	164.1	30 September 1982
164.2	14 August 1985	164.2	30 September 1982
164.3	14 August 1985	164.3	30 September 1982
164.4	14 August 1985	164.4	30 September 1982
164.5	14 August 1985	164.5	30 September 1982
168.1	(REPRINTED WITHOUT CHANGE)		30 September 1982
168.2	14 August 1985	168.2	30 September 1982
168.3	14 August 1985	168.3	30 September 1982
168.4	14 August 1985	168.4	30 September 1982
168.5	14 August 1985	168.5	30 September 1982
184.1	14 August 1985	184.1	30 September 1982
184.2	14 August 1985	184.2	30 September 1982
184.5	(REPRINTED WITHOUT CHANGE)		30 September 1982
184.6	14 August 1985	NONE	---
184.7	14 August 1985	NONE	---
192.1	14 August 1985	192.1	30 September 1982
192.2	14 August 1985	192.2	30 September 1982
192.3	14 August 1985	192.3	30 September 1982
192.4	14 August 1985	192.4	30 September 1982
192.5	14 August 1985	NONE	---
192.6	14 August 1985	NONE	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS
RELAYS

2. THE FOLLOWING PAGES OF MIL-STD-242H(NAVY), PART 6 HAVE BEEN DELETED WITH NO SUPERSEDING PAGES:

PAGES	DATE
105.2 THRU 105.4	30 September 1982
105.12 THRU 105.14	30 September 1982
134.8 AND 134.9	30 September 1982
134.17	30 September 1982
134.22	30 September 1982
134.27 AND 134.28	30 September 1982
134.46 AND 134.47	30 September 1982
134.54 THRU 134.56	30 September 1982
134.59 AND 134.60	30 September 1982
138.16 THRU 138.21	30 September 1982
138.36 AND 138.37	30 September 1982
164.6 AND 164.7	30 September 1982

3. MAKE PEN AND INK CHANGES TO THE FOLLOWING PAGES:

Pages 138.31, .33, .35, 47, and .49, bottom TABLE, LIFE OPERATING CYCLES column heading: Delete "103" and substitute "1000".

4. RETAIN THIS NOTICE AND INSERT BEFORE TABLE OF CONTENTS.

5. HOLDERS OF MIL-STD-242H(NAVY), PART 6, WILL VERIFY THAT PAGE CHANGES AND ADDITIONS INDICATED ABOVE HAVE BEEN ENTERED. THIS NOTICE PAGE WILL BE RETAINED AS A CHECK SHEET. THIS ISSUANCE, TOGETHER WITH APPENDED PAGES, IS A SEPERATE PUBLICATION. EACH NOTICE IS TO BE RETAINED BY STOCKING POINTS UNTIL THE MILITARY STANDARD IS COMPLETELY REVISED OR CANCELLED.

Review activities:
NAVY-AS, OS, SH

User activity:
NAVY-MC

Preparing activity:
NAVY-EC

(Project Number 59GP-N052)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

4.2 CRITERIA FOR INCLUSION IN THIS STANDARD.

(A). THE DEVICE MUST SATISFY A WIDE RANGE OF DESIGN REQUIREMENTS.

(B). AT LEAST ONE MANUFACTURER IS QUALIFIED TO THE APPLICABLE DETAIL SPECIFICATION.

(C). THERE IS REASONABLE ASSURANCE THAT THE DEVICE WILL BE AVAILABLE FOR AT LEAST SEVEN YEARS.

4.3 RELAY CHARACTERISTICS. THE CHARACTERISTICS LISTED HERIN ARE FOR REFERENCE ONLY AND ARE INTENDED AS AN AID IN SELECTING DEVICES. THE APPLICABLE DETAIL SPECIFICATION SHALL BE USED FOR ALL FINAL DESIGN CRITERIA.

4.4 CONFLICT OF DATA. IN THE EVENT OF CONFLICT BETWEEN THE TECHNICAL DESCRIPTION OF DEVICES IN THIS STANDARD AND THE APPLICABLE DETAIL SPECIFICATION, THE DETAIL SPECIFICATION SHALL GOVERN.

5. RELAY IDENTIFICATION.

5.1 RELAY IDENTIFICATION IS THE PART NUMBER OR TYPE DESIGNATOR AS LISTED IN THIS STANDARD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS

TABLE OF CONTENTS

SUBJECT/SECTION		PAGE NUMBER
100	ELECTRICAL	
	105 MIL-R-5757	105.1 - .11
130	ELECTROMAGNETIC	
	134 MIL-R-39016	134.1 - .60
	138 MIL-R-6106	138.1 - .50
160	SOLID STATE	
	164 MIL-R-83726	164.1 - .7
	168 MIL-R-28750	168.1 - .6
180	HYBRID	
	184 MIL-R-28776	184.1 - .7
190	VACUUM	
	192 MIL-R-83725	192.1 - .4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL (FOR ELECTRONIC AND COMMUNICATION TYPE EQUIPMENT)

MIL-R-5757

SCOPE: THIS SECTION COVERS ELECTRICAL RELAYS WITH CONTACT RATINGS UP TO AND INCLUDING 10 AMPERES. THESE RELAYS ARE INTENDED FOR USE (IN DIRECT OR ALTERNATING CURRENT (SINGLE OR POLYPHASE) ELECTRONIC AND COMMUNICATION EQUIPMENT AS A MEANS OF CONTROLLING THE MAKING AND BREAKING OF CIRCUITS FOR ELECTRICALLY OPERATED EQUIPMENT AND DEVICES.


PART NUMBER EXAMPLE:

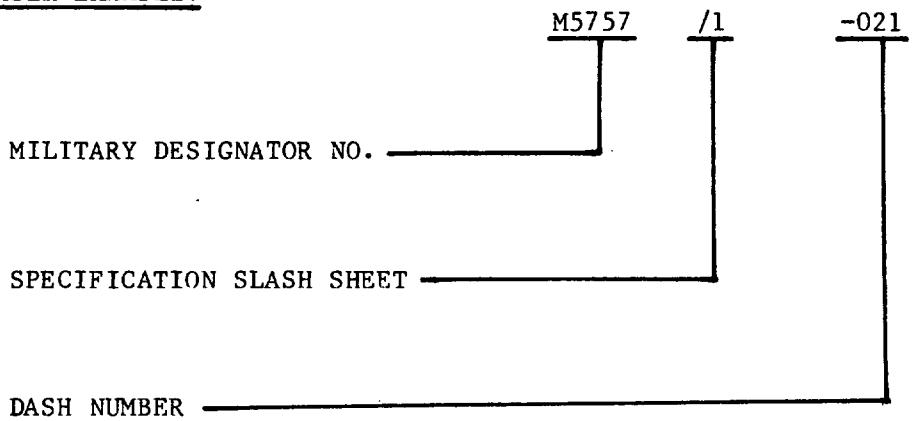

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, DPDT, LOW LEVEL TO 2 AMPERES


MIL-R-5757/10

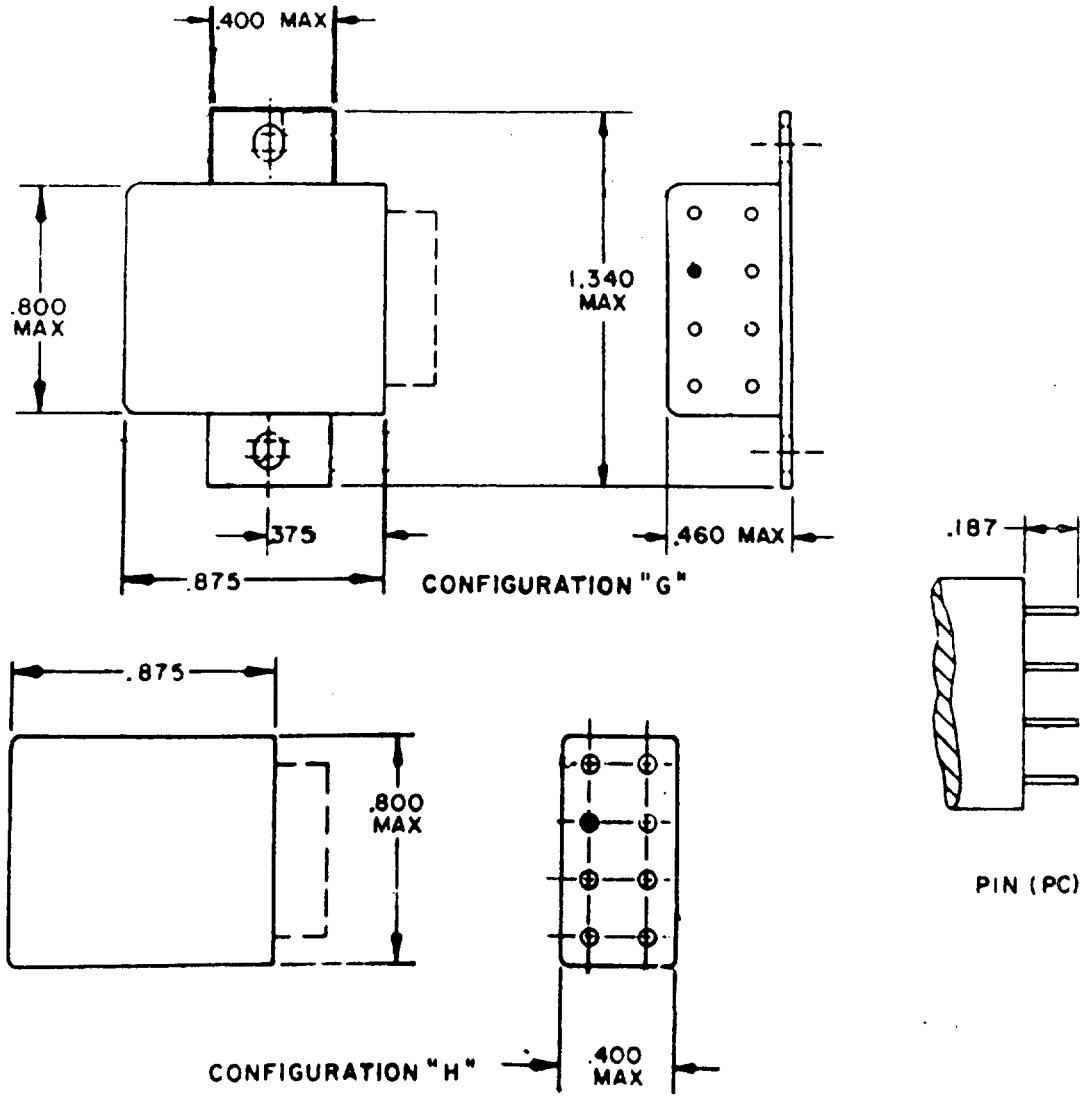


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, HERMETICALLY SEALED, DPDT, LOW LEVEL TO 2 AMPERES

MIL-R-5757/10

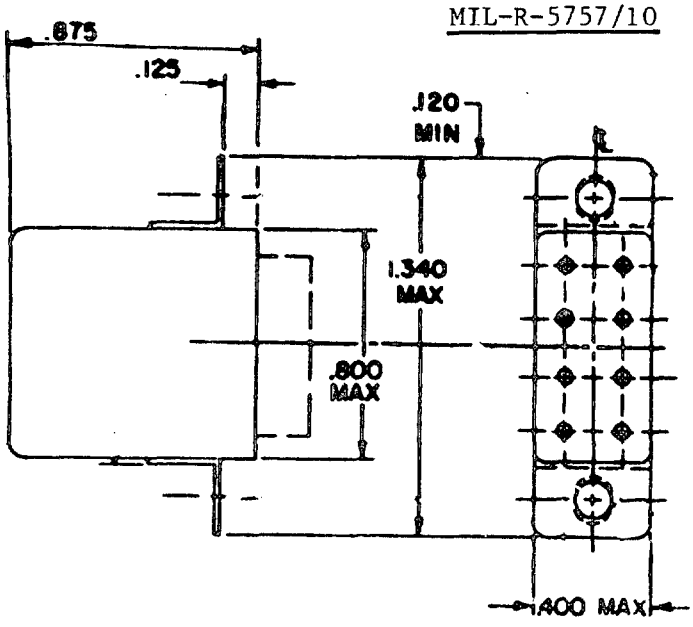

CONFIGURATION "A"



CIRCUIT DIAGRAM
TERMINAL VIEW
CONFIGURATION A, G, AND H
DEENERGIZED POSITION

DASH NO. *	CONFIG-URATION	TERM-INAL	COIL VOLTAGE (VDC)		LOAD RATINGS AMPERES				OVER TEMP RANGE		
					RES		IND		OPERATE TIME (MS)	COIL RES.@ 25°C (OHMS)	
			RATED	MAX	28V	115V #	28V ##	115V #		MIN	MAX
035	G	L	26.5	32	2.0	.3	1.0	.3	6	540	770
039	A	L	26.5	32	2.0	.3	1.0	.3	6	540	770
052	H	L	26.5	32	2.0	.3	1.0	.3	6	540	770
054	H	PC	26.5	32	2.0	.3	1.0	.3	6	540	770
059	H	PC	6.0	7.3	2.0	.3	1.0	.3	6	40	47
060	H	PC	12.0	14.7	2.0	.3	1.0	.3	6	175	213


PART NUMBER: M5757/10- *

* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER
\# 115 V 400 Hz OR 115 V 60 Hz
\## AT AN INDUCTIVE LOAD OF 200 MILLIHENRIES MINIMUM.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 2 AMPERES

MIL-R-39016/6



WIRE LEAD
SOLDER PIN (SP)



SOLDER LUG

DASH NUMBER *		MOUNT FIG.	COIL VOLTAGE (VDC)		AT +25°C COIL RES OHMS ±10%
SOLDER LUG	WIRE LEAD(SP)		RATED	MAX	
104	105	B	26.5	32.0	700
107	125	C			
129	109	NONE			
111	112	B	12.0	15.0	160
114	126	C			
130	116	NONE			
118	119	B	6.0	7.5	40
121	127	C			
131	123	NONE			
132	133	B	5.0	6.0	27
135	136	C			
138	139	NONE			

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/6- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 2 AMPERES AT 28 Vdc.
.3 AMPERE AT 115 Vdc (60-400 HZ)
INDUCTIVE LOAD .75 AMPERE AT 28 Vdc (.200 HENRY INDUCTANCE)
LOW LEVEL 10 - 50 μA AT 10 - 50 mVdc OR PEAK ac.


Source: https://assist.dla.mil -- Downloaded: 2020-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT LOW LEVEL TO 1 AMPERE

MIL-R-39016/7



CIRCUIT DIAGRAM
TERMINAL VIEW

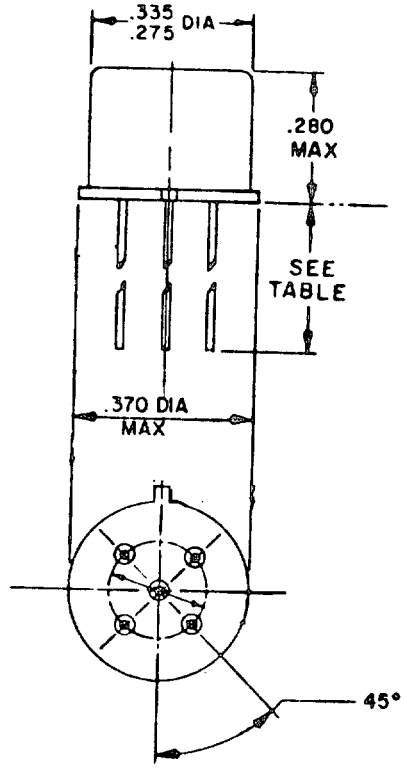

DASH NUMBER LEAD LENGTH .500 MIN *	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10%
	RATED	MAX	
025	5.0	6.0	63
026	6.0	8.0	125
027	9.0	12.0	280
028	12.0	16.0	500
029	18.0	24.0	1,130
030	26.5	32.0	2,000

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/7- * FAILURE RATE: M AND P


CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCRTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELAIBILITY,
SPDT LOW LEVEL TO 0.5 AMPERE (LATCHING)

MIL-R-39016/8

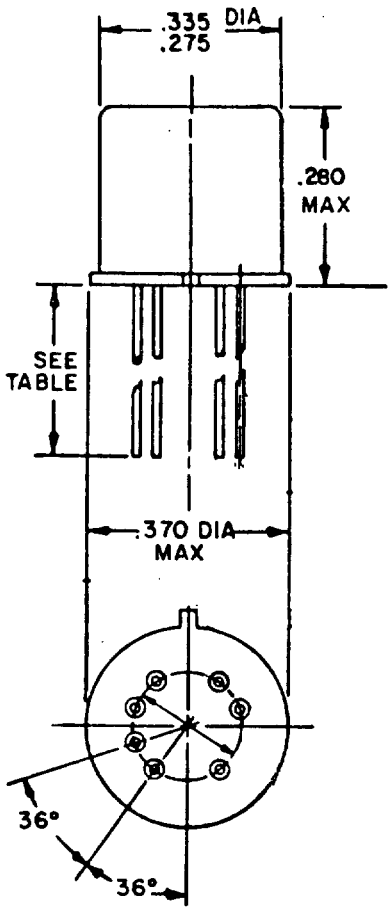

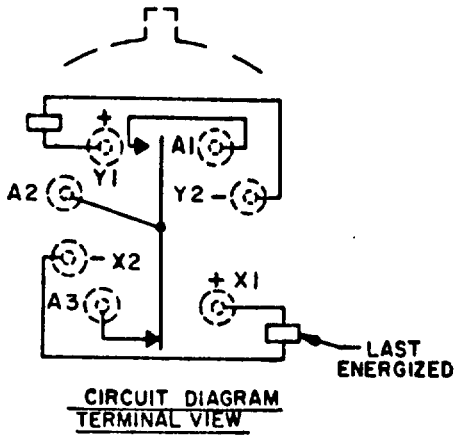

CIRCUIT DIAGRAM
TERMINAL VIEW

DASH NUMBER LEAD LENGTH .500 MIN *	COIL VOLTAGE (VDC)		AT 25°C COIL RESISTANCE OHMS±10%	OPERATE TIME (ms)	OPERATE VOLTAGE LATCH AND RESET (VDC) MAX	
	RATED	MAX			25°C	125°C
025	5.0	6.0	61	1.5	2.5	3.5
026	6.0	8.0	120	1.5	3.5	4.5
027	9.0	12	280	1.5	5.3	6.8
028	12	16	500	1.5	7.0	9.0
029	18	24	1,130	1.5	10.5	13.5
030	26.5	32	2,000	1.5	14.5	18

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/8- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 0.5 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELAIBILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/9


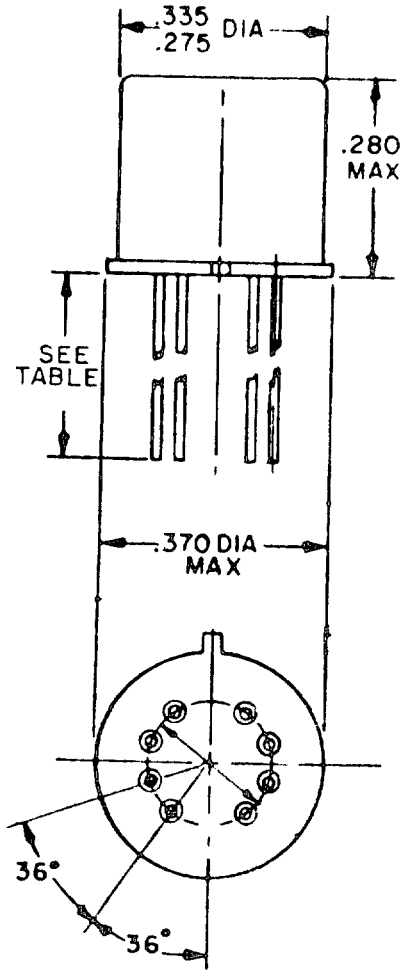


FIGURE 1

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELAIBILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/9



CIRCUIT DIAGRAM
TERMINAL VIEW

DASH * NUMBER LEAD LENGTH .500 MIN	FIG.	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10%
		RATED	MAX	
057	1	5.0	5.8	50
058	1	6.0	8.0	98
059	1	9.0	12	220
060	1	12	16	390
061	1	18	24	880
062	1	26.5	32	1,560
063	1	30.0	36	2,500

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER

PART NUMBER: M39016/9-* FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY,
DPDT, LOW LEVEL TO 1.0 AMPERE (LATCHING)

MIL-R-39016/12

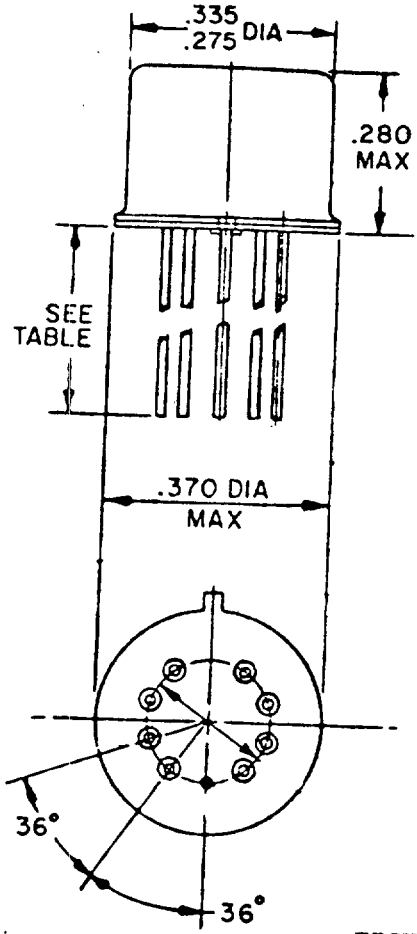


FIGURE 1


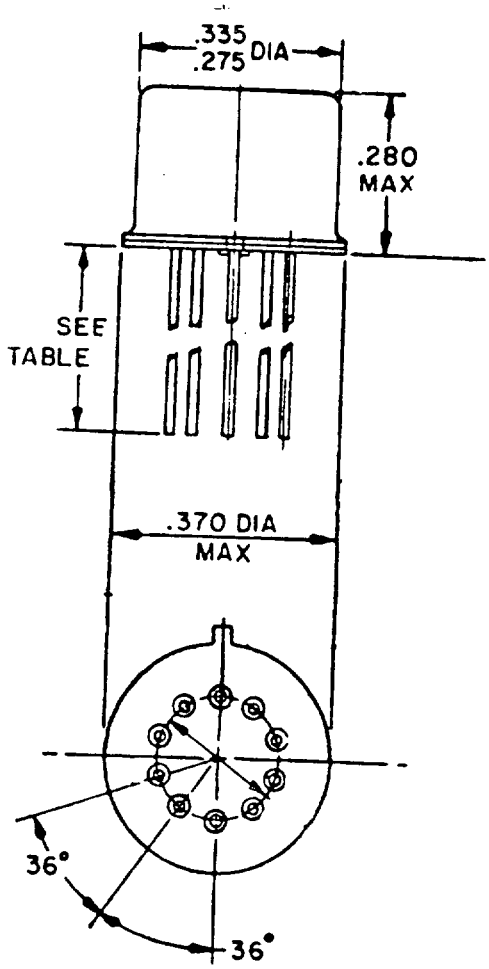


FIGURE 2

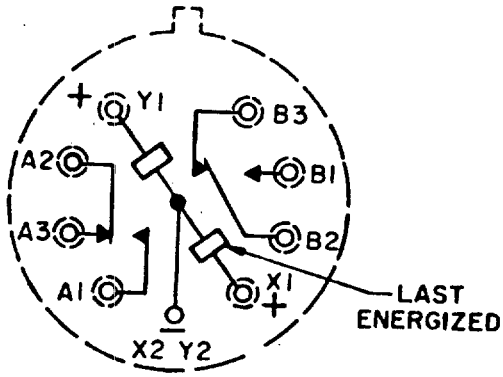


CIRCUIT DIAGRAM
TERMINAL VIEW
FOR FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY,
DPDT, LOW LEVEL TO 1.0 AMPERE (LATCHING)

MIL-R-39016/12

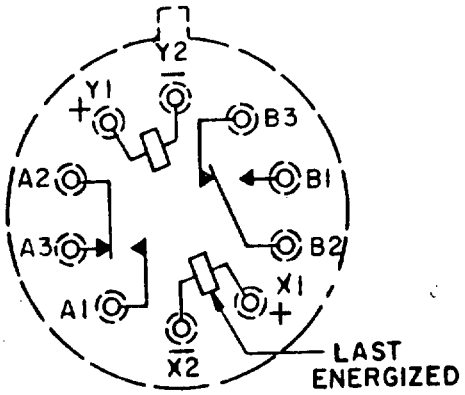

CIRCUIT DIAGRAM
TERMINAL VIEW
FOR FIGURE 2

DASH * NUMBER LEAD LENGTH .500 MIN	FIGURE	NO. OF LEADS	COIL VOLTAGE (VDC) RATED	COIL VOLTAGE (VDC) MAX	AT 25°C COIL RES OHMS ±10%	OPERATE VOLTAGE (VDC) MAX 25°C	OPERATE VOLTAGE (VDC) MAX 125°C	OVER TEMP RANGE OPERATE TIME (MS)
049	1	9	5.0	6.0	61	2.8	3.5	2
050	1	9	6.0	8.0	120	3.5	4.5	2
051	1	9	9.0	12	280	5.3	6.8	2
052	1	9	12	16	500	7.0	9.0	2
053	1	9	18	24	1,130	10.5	13.5	2
054	1	9	26.5	32	2,000	14.2	18.0	2
055	2	10	5.0	6.0	61	2.8	3.5	2
056	2	10	6.0	8.0	120	3.5	4.5	2
057	2	10	9.0	12	280	5.3	6.8	2
058	2	10	12	16	500	7.0	9.0	2
059	2	10	18	24	1,130	10.5	13.5	2
060	2	10	26.5	32	2,000	14.2	18.0	2

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER


PART NUMBER: M39016/12- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 2 AMPERES


MIL-R-39016/13

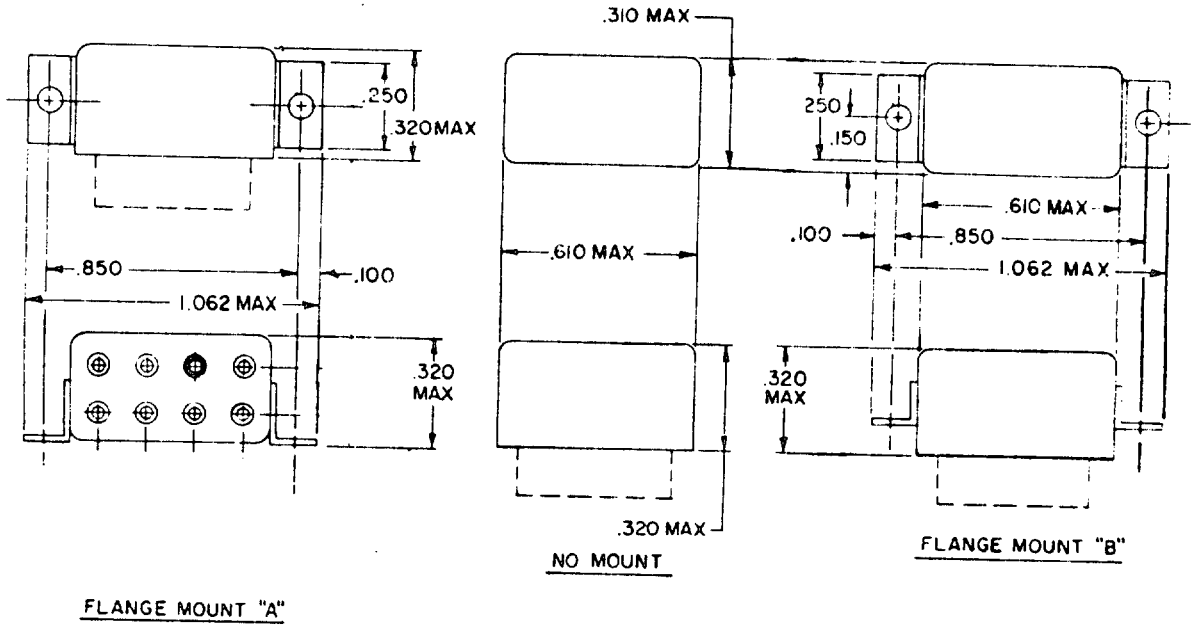

FLANGE MOUNT "A"

NO MOUNT


FLANGE MOUNT "B"

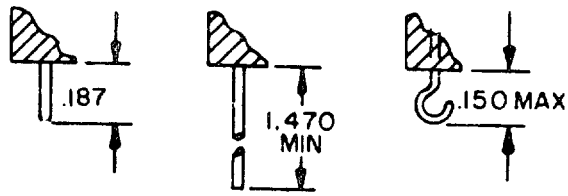

WIRE LEAD
SOLDER PIN-(SP)

WIRE LEAD

SOLDER LUG

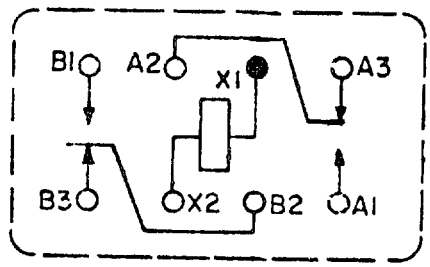

CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 2 AMPERES

MIL-R-39016/13

DASH NUMBER *			MOUNT FIG.	COIL VOLTAGE (VDC)		AT +25°C COIL RES OHMS ±10%
WIRE LEAD (SP)	LUG	WIRE LEAD		RATED	MAX	
092	093	094	A	5	7	44
095	096	097	B			
073	098	079	NONE			
099	058	061	A	6	8	56
070	064	067	B			
055	089	074	NONE			
100	101	102	A	9	12	140
103	104	105	B			
075	106	080	NONE			
107	059	062	A	12	16	210
071	065	068	B			
056	090	076	NONE			
108	109	110	A	18	24	650
111	112	113	B			
077	114	081	NONE			
115	060	063	A	26.5	35	1350
072	066	069	B			
057	091	078	NONE			
116	084	085	A	36	46	2245
086	087	088	B			
082	117	083	NONE			

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/13- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS


HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE	2.0 AMPERES AT 28 Vdc. (50,000 OPERATIONS)
	1.0 AMPERE AT 28 Vdc .125 AMPERE AT 115 Vac (60 - 400 Hz)
	0.5 AMPERE AT 115 Vac (60 - 400 Hz) CASE NOT GROUNDED
INDUCTIVE LOAD	0.3 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, 4PDT, LOW LEVEL TO 2 AMPERES


MIL-R-39016/14

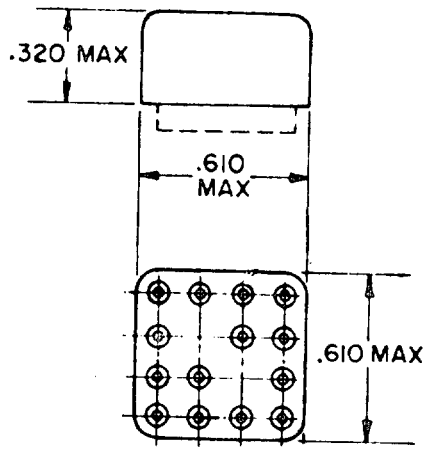


NO MOUNT

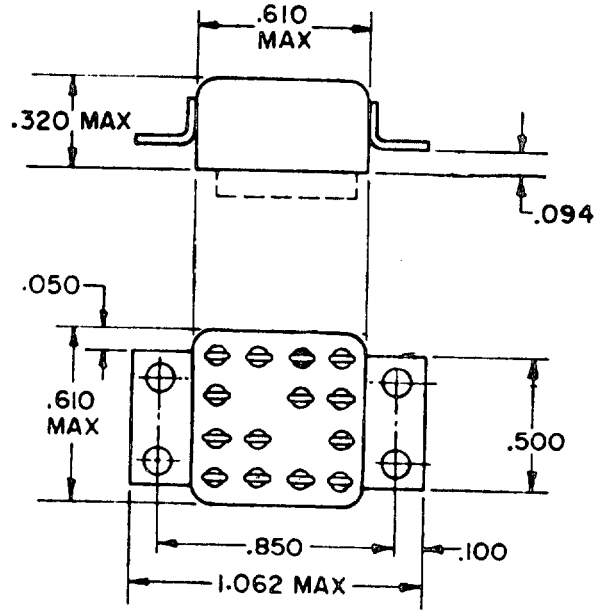

FLANGE MOUNT



WIRE LEAD
(SOLDER PIN-SP)





SOLDER LUG
(SL)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODE

MIL-R-39016/18

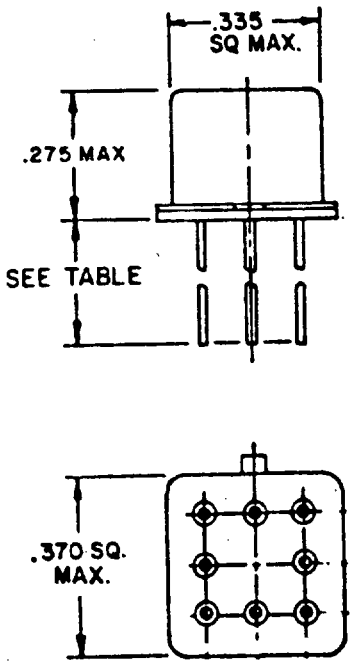



CIRCUIT DIAGRAM
TERMINAL VIEW

DASH NUMBER LEAD LENGTH .500 MIN *	COIL VOLTAGE (VDC)		AT +25°C COIL RES OHMS ±10%
	RATED	MAX	
031	5	5.8	50
032	6	8	98
033	9	12	220
034	12	16	390
035	18	24	880
036	26.5	32	1,560

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/18-* FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE/W INTERNAL DIODES

MIL-R-39016/19



CIRCUIT DIAGRAM
TERMINAL VIEW

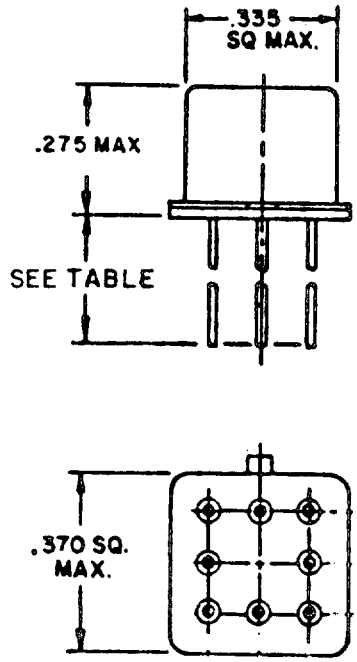

DASH NUMBER LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS (REF ONLY)	AT 25°C COIL CKT CURRENT (MA)	
	RATED	MAX		MAX	MIN
031	5.0	5.8	39	128.2	93.2
032	6.0	8.0	78	78.3	58.3
033	9.0	12.0	220	42.9	33.0
034	12.0	16.0	390	32.8	25.6
035	18.0	24.0	880	22.1	17.5
036	26.5	32.0	1,560	18.5	14.8

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/19- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 2 AMPERES


MIL-R-39016/22

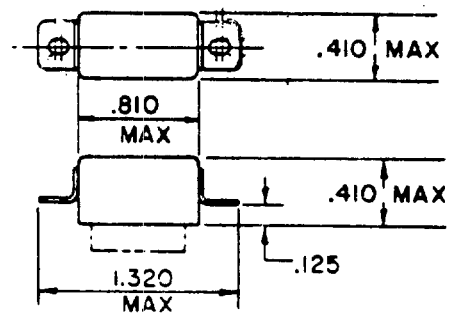


FLANGE MOUNT "B"

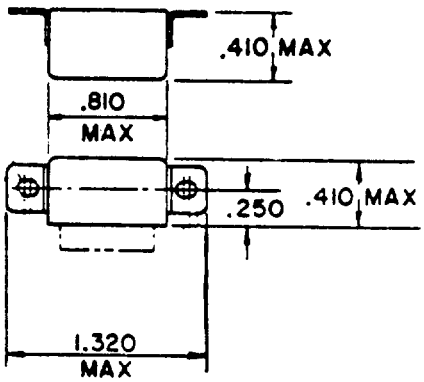

FLANGE MOUNT "C"

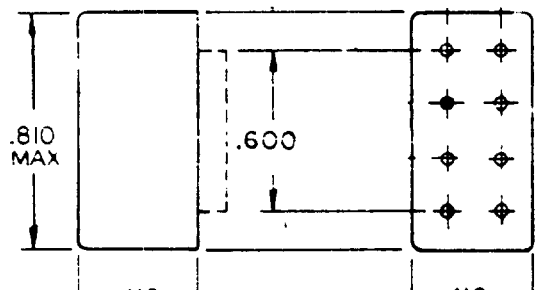

NO MOUNT

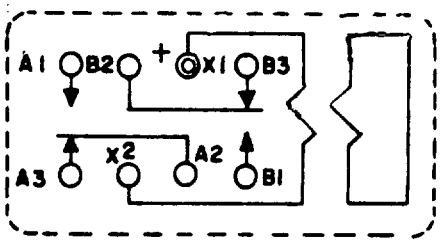


CIRCUIT DIAGRAM
TERMINAL VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT LOW LEVEL TO 2 AMPERES

MIL-R-39016/22



WIRE LEAD
(SOLDER PIN-SP)



SOLDER LUG

* DASH NUMBER		MOUNT OR FLANGE	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10%
SOLDER LUG	WIRE LEAD (SP)		RATED	MAX	

004	005	B	26.5	32.0	700
007	---	C			
---	009	NONE			

011	012	B	12.0	15.0	160
014	---	C			
---	016	NONE			

018	019	B	6.0	7.5	40
021	---	C			
---	023	NONE			

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/22- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 2.0 AMPERE AT 28 Vdc. 0.1 AMPERE AT 115 Vac (60-400 Hz)
INDUCTIVE LOAD 0.5 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL
TO 0.5 AMPERE/W INTERNAL DIODES (LATCHING)

MIL-R-39016/27

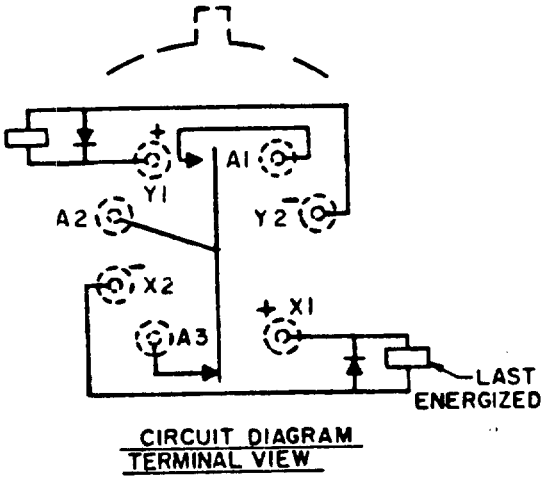

CIRCUIT DIAGRAM
TERMINAL VIEW

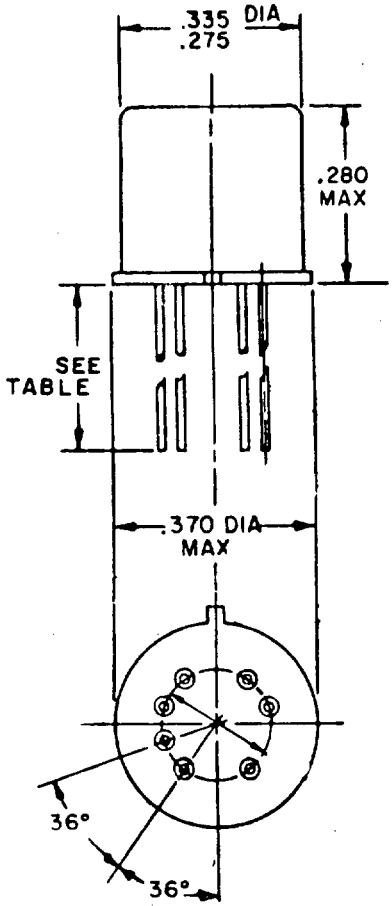

* DASH NUMBER LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10%	OPERATE VOLTAGE (VDC) MAX	
	RATED	MAX		25°C	125°C
025	5.0	5.8	61	2.8	3.7
026	6.0	8.0	125	3.5	4.5
027	9.0	12	280	5.3	6.8
028	12	16	500	7.0	9.0
029	18	24	1,130	10.5	13.5
030	26.5	32	2,000	14.2	18.0

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/27- * FAILURE RATE: M AND P


CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 0.5 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL TO 0.5 AMPERE (LATCHING)W/ INTERNAL DIODES

MIL-R-39016/28

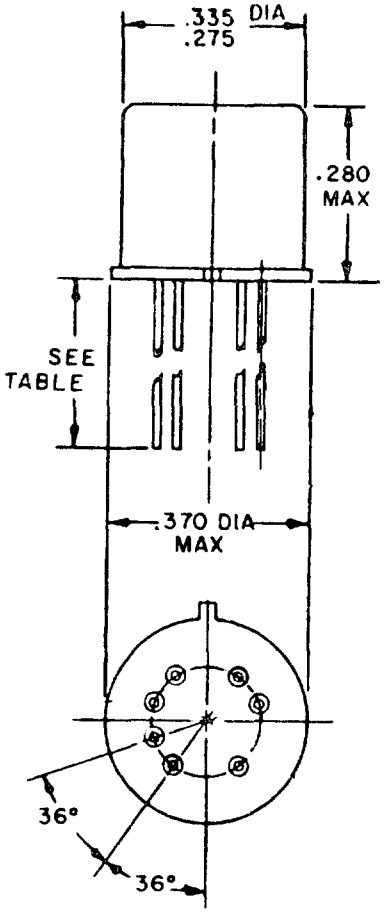

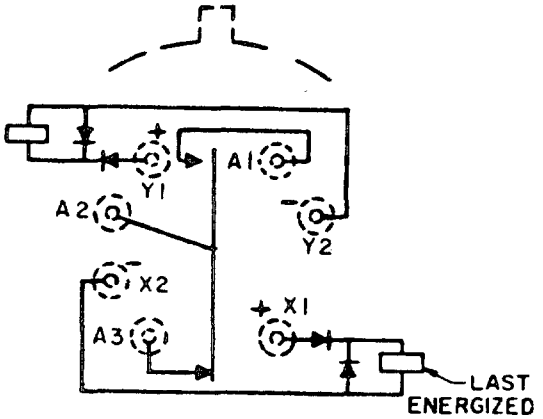

CIRCUIT DIAGRAM
TERMINAL VIEW

DASH NO. * LEAD LENGTH .500 MIN	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS (REF ONLY)	AT 25°C COIL CKT CURRENT (MA)		OPERATE VOLTAGE (VDC) MAX	OVER TEMP RANGE OPERATE VOLTAGE (VDC) MAX
	RATED	MAX		MAX	MIN		
025	5.0	6.0	48	104.2	75.8	3.5	4.5
026	6.0	8.0	97	63.0	46.9	4.1	5.5
027	9.0	12	280	33.7	26.0	6.3	7.8
028	12	16	500	25.5	20.0	8.0	10
029	18	24	1,130	17.2	13.7	11.6	14.5
030	26.5	32	2,000	14.4	11.6	15.4	19

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/28- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 0.5 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE (LATCHING) W/INTERNAL DIODES

MIL-R-39016/30

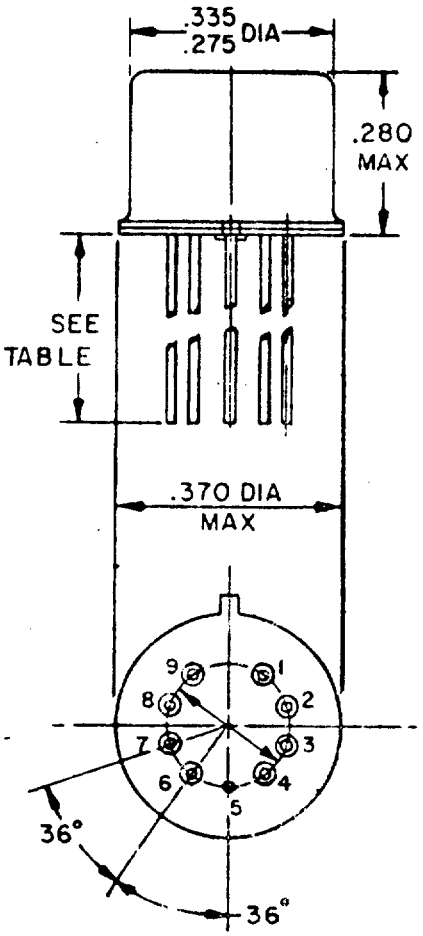


FIGURE 1


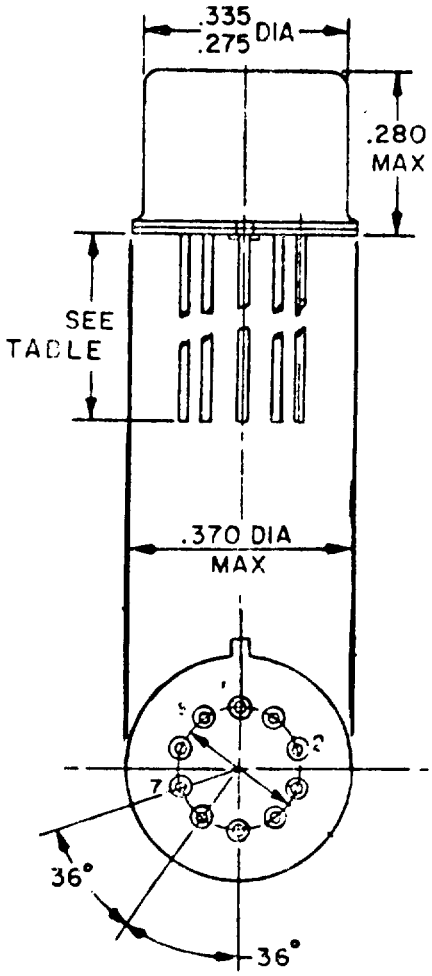


FIGURE 2

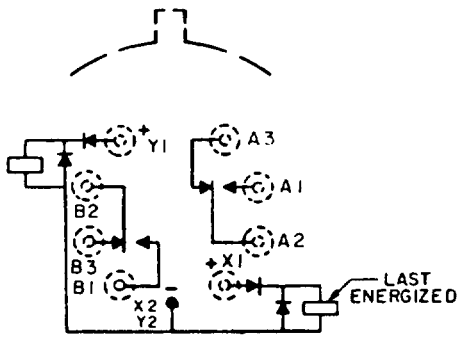


CIRCUIT DIAGRAM
TERMINAL VIEW
FOR FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE (LATCHING) W/INTERNAL DIODE

MIL-R-39016/30

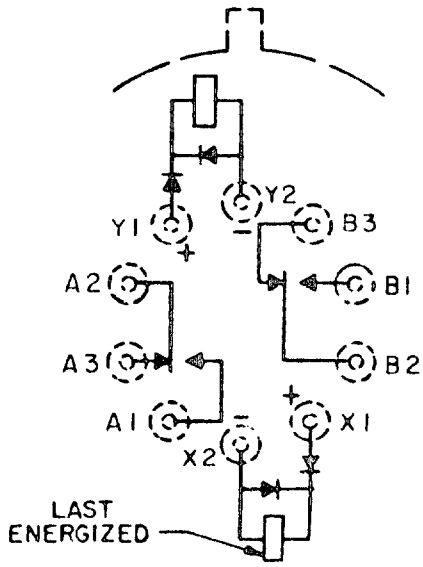

CIRCUIT DIAGRAM
TERMINAL VIEW

FOR FIGURE 2

* DASH NUMBER LEAD LENGTH .500 MIN	FIGURE	NO. OF LEADS	COIL VOLTAGE (VDC) RATED	COIL VOLTAGE (VDC) MAX	COIL RES OHMS (REF ONLY)	AT +25°C COIL CIRCUIT CURRENT (MA) MAX	AT +25°C COIL CIRCUIT CURRENT (MA) MIN	OPERATE VOLTAGE (VDC) MAX	OVER TEMP RANGE OPERATE VOLTAGE (VDC) MAX
049	1	9	6.0	8.0	97	63.0	46.9	4.1	5.5
050	1	9	9.0	12	280	33.7	26.0	6.3	7.8
051	1	9	12	16	500	25.5	20.0	8.0	10
052	1	9	18	24	1,130	17.2	13.7	11.6	14.5
053	1	9	26.5	32	2,000	14.4	11.6	15.4	19
054	1	9	5.0	6.0	48	104.2	75.8	3.5	4.5
055	2	10	5.0	6.0	48	104.2	75.8	3.5	4.5
056	2	10	6.0	8.0	97	63.0	46.9	4.1	5.5
057	2	10	9.0	12	280	33.7	26.0	6.3	7.8
058	2	10	12	16	500	25.5	20.0	8.0	10
059	2	10	18	24	1,130	17.2	13.7	11.6	14.5
060	2	10	26.5	32	2,000	14.4	11.6	15.4	19

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M39016/30- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES, LATCHING


MIL-R-39016/32

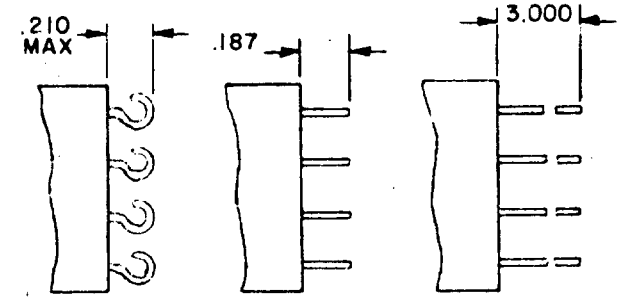

SOLDER LUG (L)

PRINTED WIRE PIN (PW)

WIRE LEAD (W)



TERMINAL VIEW

* DASH NUMBER			MOUNT	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10%	OPERATE VOLTAGE (VDC) MAX	
SOLDER LUG	PW	WIRE LEAD		RATED	MAX		25°C	125°C
001	---	---	STUD					
002	---	019	BRACKET					
003	004	---	FLANGE	26.5	32	975	12	18
005	006	---	NONE					
007	---	---	STUD					
008	---	020	BRACKET					
009	010	---	FLANGE	12	16	300	5.8	8.5
011	012	---	NONE					
013	---	---	STUD					
014	---	021	BRACKET					
015	016	---	FLANGE	6	8	82	3.0	4.2
017	018	---	NONE					

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/32- * FAILURE RATE: L

CONTACT DATA: LOAD RATINGS


HIGH LEVEL (RELAY CASE GROUNDED)


RESISTIVE	2.0 AMPERES AT 28 Vdc.
	0.15 AMPERES AT 115 Vdc. (60 AND 400 Hz)
INDUCTIVE LOAD	0.8 AMPERE AT 28 Vdc (200 mH)
	0.1 AMPERE AT 115 V 60 AND 400 Hz


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, RF, ESTABLISHED RELIABILITY, ELECTRICAL, HERMETICALLY SEALED, SPDT AND DPDT, DC TO 1 GHZ


MIL-R-39016/33

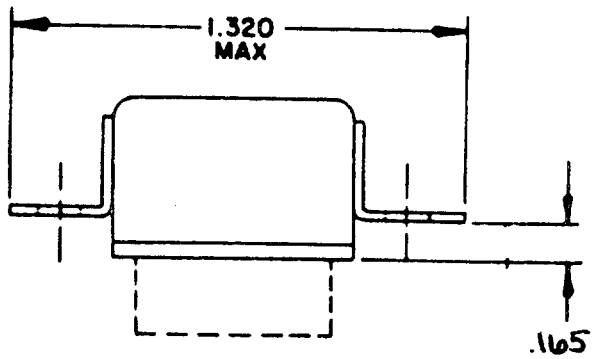

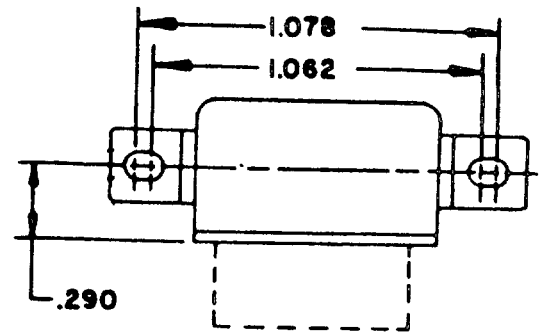


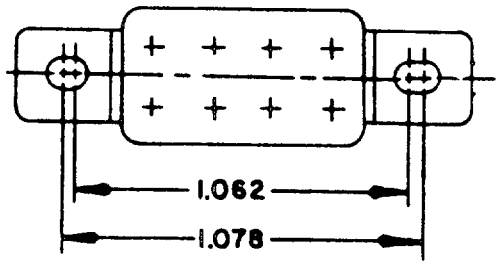


FLANGE MOUNT B

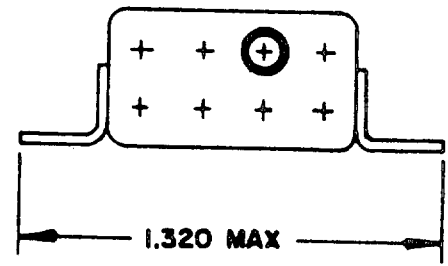


FLANGE MOUNT C



NO MOUNT



SPDT-RF
SPDT-AUX




DPDT-RF

CIRCUIT DIAGRAMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, RF, ESTABLISHED RELIABILITY, ELECTRICAL, HERMETICALLY SEALED, SPDT AND DPDT, DC TO 1 GHZ

MIL-R-39016/33

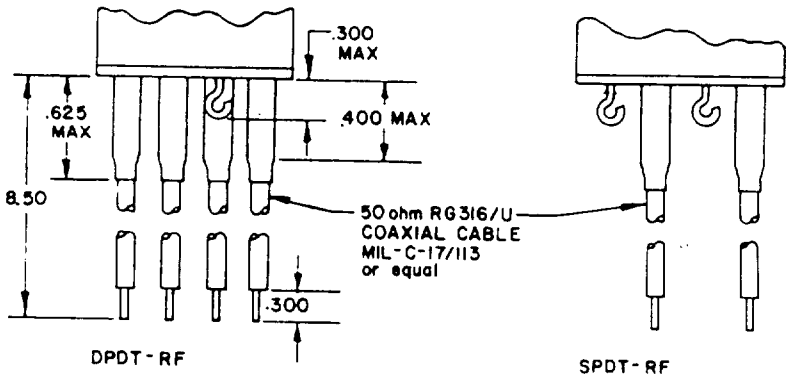

TERMINAL CONFIGURATIONS

* DASH NUMBER		NO MOUNT	CONTACT ARR	COIL VOLTAGE (VDC)		AT+25°C COIL RES OHMS ±10
FLANGE C	FLANGE B			RATED	MAX	
001	013	019	2FORM C	26.5	32	700
002	014	020	1FORM C#	26.5	32	700
003	015	021	2FORM C	12	15	160
004	016	022	1FORM C#	12	15	160
005	017	023	2FORM C	6.0	7.5	40
006	018	024	1FORM C#	6.0	7.5	40

ONE SPDT COAXIAL INPUT AND ONE SPDT AUXILIARY DC INPUT.
* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/33- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 2.0 AMPERE AT 28 Vdc.
INDUCTIVE 0.5 AMPERE AT 28 Vdc(MAX 28mH)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/34




ACTUAL SIZE

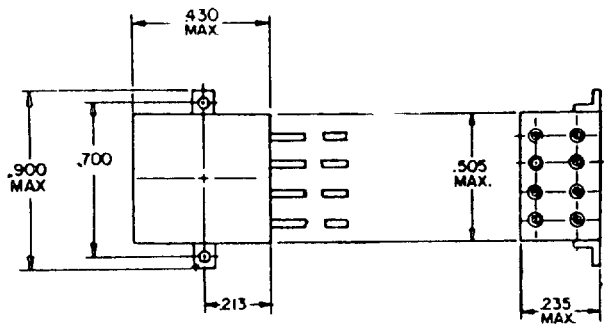


WIRE LEAD

BRACKET MOUNT

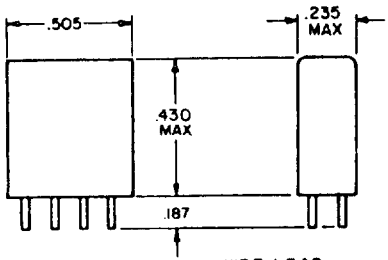


WIRE LEAD
(SOLDER PIN-SP)

NO MOUNT

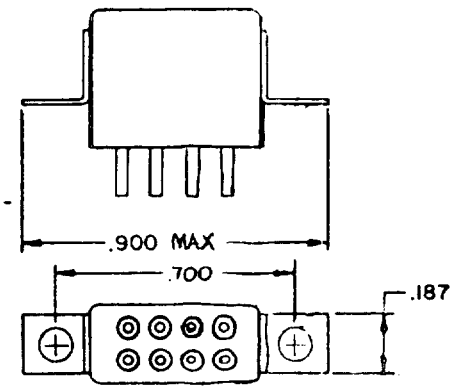

FLANGE MOUNT

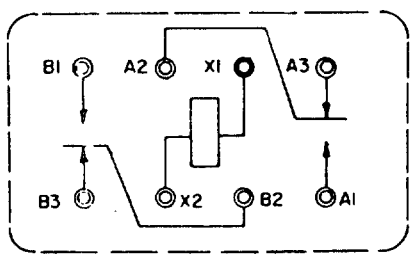


CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE

MIL-R-39016/34

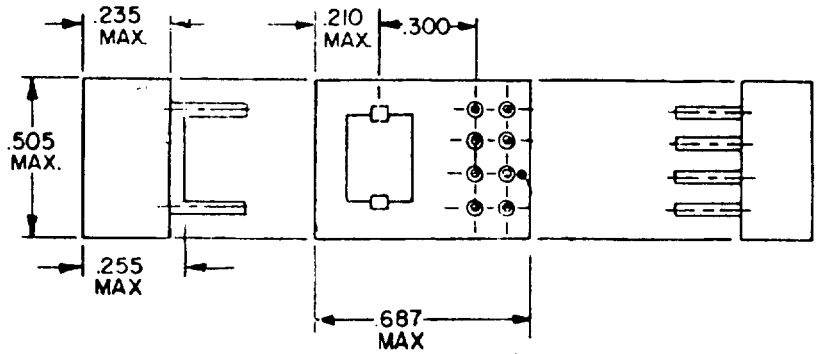

TAB MOUNT

DASH NUMBER *	MOUNT	TERMINAL	COIL VOLTAGE (VDC) RATED	COIL VOLTAGE (VDC) MAX	AT 25°C COIL RES OHMS ±10%
001	BRKT	WIRE LEAD			
002	NONE	(SP)	6.0	8.0	90
003	TAB	(SP)			
004	BRKT				
005	NONE	(SP)	12	16	310
006	TAB	(SP)			
007	BRKT				
008	NONE	(SP)	26.5	32	1500
009	TAB	(SP)			
010	NONE	PIN PLUG-IN #	6.0	8.0	90
011	NONE		12	16	310
012	NONE		26.5	32	1500
013	FLANGE		6.0	8.0	90
014	FLANGE		12	16	310
015	FLANGE		26.5	32	1500

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.
\# SOCKET PLUG-IN TERMINALS SHALL BE GOLD PLATED IN ACCORDANCE WITH MIL-G-45204, TYPE II, CLASS I.


PART NUMBER: M39016/34- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES, LATCHING/W INTERNAL DIODES


MIL-R-39016/35

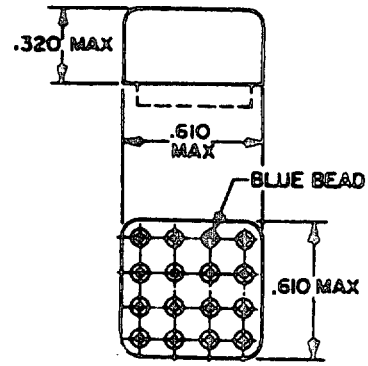


NO MOUNT

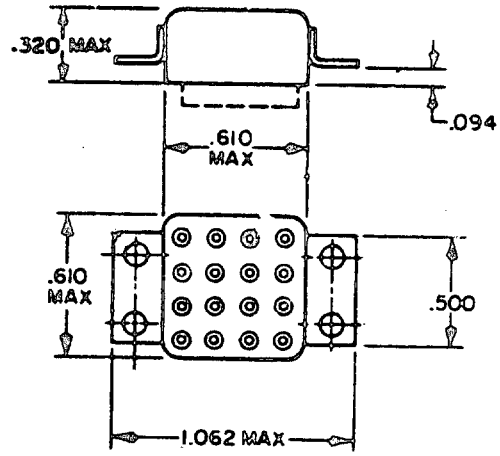

FLANGE MOUNT

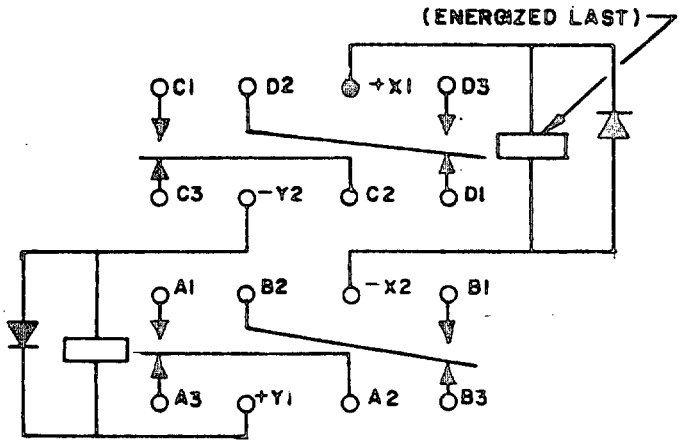

CIRCUIT DIAGRAM
(TERMINAL VIEW)



WIRE LEAD
(SOLDER PIN-SP)

SOLDER LUG

TERMINALS

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES, LATCHING/W INTERNAL DIODES

MIL-R-39016/35

DASH NUMBER *	MOUNT	TERM.	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10 %	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX	
			NOM.	MAX		25°C	125°C
001	NONE	WIRE LEAD(SP)	6.0	7.2	37	2.6	3.8
002			12.0	14.5	145	5.2	7.6
003			26.5	35.0	975	13.5	18.0
004	FLANGE	SOLDER LUG	6.0	7.2	37	2.6	3.8
005			12.0	14.5	145	5.2	7.6
006			26.5	35.0	975	13.5	18.0

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/35- * FAILURE RATE: M


CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE	2.0	AMPERE AT 28 Vdc.
	.125	AMPERE AT 115 Vac (60 TO 400 Hz)
	0.5	AMPERE AT 115 Vac (60 TO 400 Hz CASE UNGROUNDED).
INDUCTIVE LOAD	0.5	AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE WITH CASE GROUNDED.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES, LATCHING/W INTERNAL DIODES, FOR COIL TRANSIENT SUPPRESSION AND REVERSE POLARITY PROTECTION.


MIL-R-39016/36

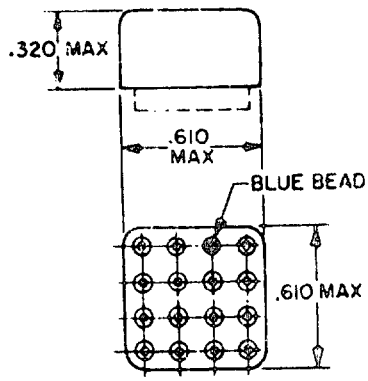

NO MOUNT

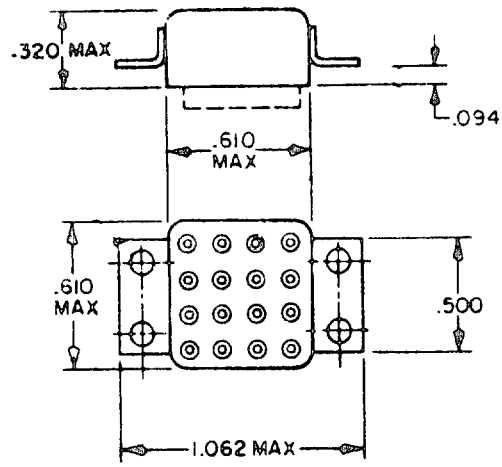

FLANGE MOUNT

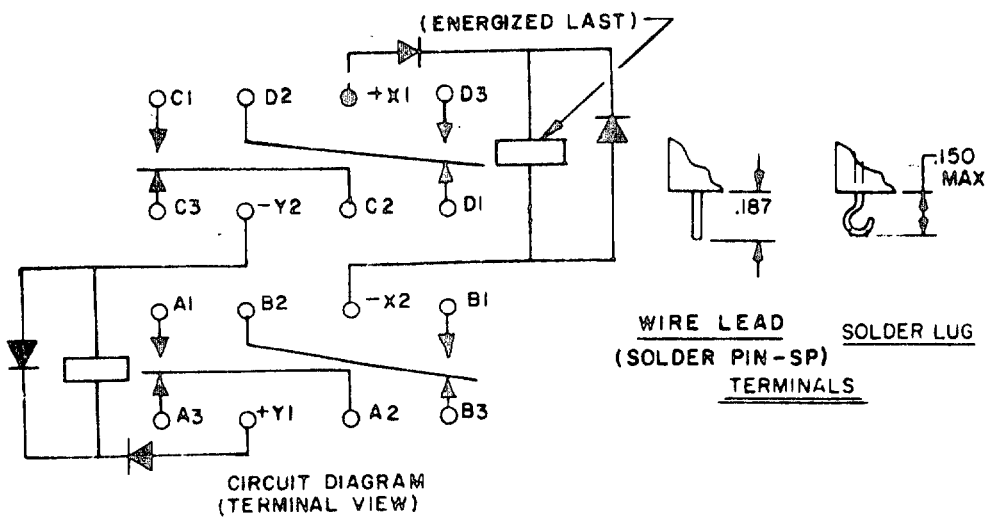

CIRCUIT DIAGRAM
(TERMINAL VIEW)

WIRE LEAD
(SOLDER PIN-SP)
TERMINALS

SOLDER LUG

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTRICAL, ESTABLISHED RELIABILITY, HERMETICALLY SEALED, 4PDT, LOW LEVEL TO 2 AMPERES, LATCHING /W INTERNAL DIODES, FOR COIL TRANSIENT SUPPRESSION AND REVERSE POLARITY PROTECTION.

MIL-R-39016/36

DASH NUMBER *	MOUNT	TERM.	COIL VOLTAGE (VDC) NOM.	COIL VOLTAGE (VDC) MAX	AT 25°C COIL RES OHMS ±10%	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX 25°C	OPERATE VOLTAGE (LATCH AND RESET) (VDC) MAX 125°C
001	NONE	WIRE LEAD(SP)	6.0	7.2	37	3.6	4.8
002			12.0	14.5	145	6.2	8.6
003			26.5	35.0	975	14.5	19.0
004	FLANGE	SOLDER LUG	6.0	7.2	37	3.6	4.8
005			12.0	14.5	145	6.2	8.6
006			26.5	35.0	975	14.5	19.0

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/36- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS


HIGH LEVEL (RELAY CASE GROUNDED)


RESISTIVE	2.0	AMPERE AT 28 Vdc.
	.125	AMPERE AT 115 Vac (60 TO 400 Hz)
	0.5	AMPERE AT 115 Vac (60 TO 400 Hz CASE UNGROUNDED)
INDUCTIVE LOAD	0.5	AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE WITH CASE GROUNDED.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES W/INTERNAL DIODE FOR COIL TRANSIENT SUPPRESSION AND REVERSE POLARITY PROTECTION

MIL-R-39016/38

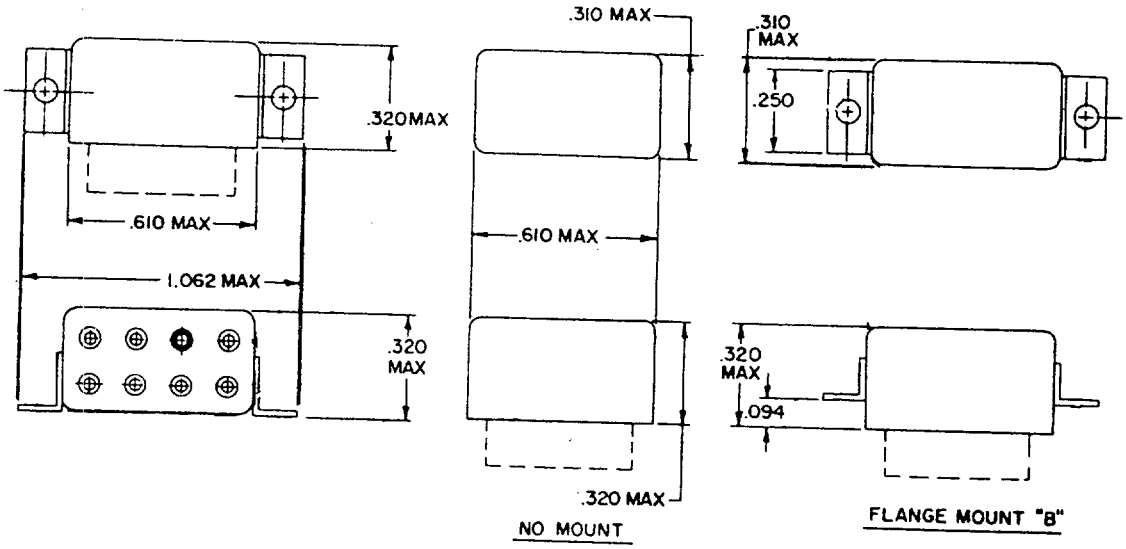

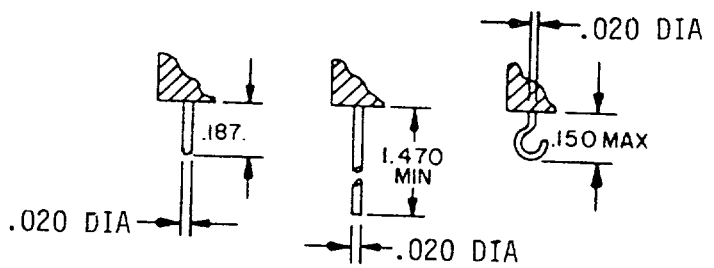

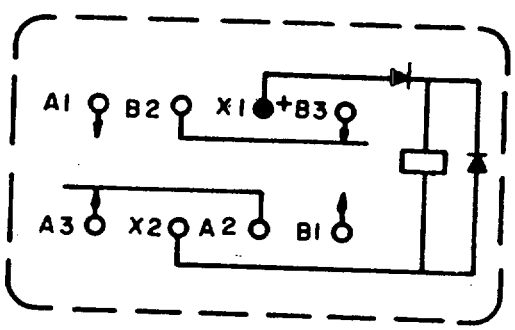

CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check date above to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES W/INTERNAL DIODE FOR COIL TRANSIENT SUPPRESSION AND REVERSE POLARITY PROTECTION

MIL-R-39016/38

* DASH NUMBER			MOUNT	COIL VOLTAGE (VDC)		AT 25°C COIL RES OHMS ±10% (REF ONLY)
WIRE LEAD (SP)	SOL-DER LUG	WIRE LEAD		RATED	MAX	
001		002	NONE	5	7	44
003		004	NONE	6	8	56
	005	006	A			
007	008	009	B			
010		011	NONE	9	12	140
012		013	NONE	12	16	210
	014	015	A			
016	017	018	B			
019		020	NONE	18	24	650
021		022	NONE	26.5	35	1350
	023	024	A			
025	026	027	B			

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M39016/38- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS


HIGH LEVEL (RELAY CASE GROUNDED)

RESISTIVE	2.0 AMPERE AT 28 Vdc. 1 AMPERE AT 28 Vdc .125 AMPERE AT 115 Vac (60 -_400 Hz) 0.5 AMPERE AT 115 Vac (60 - 400 Hz CASE NOT GROUNDED)
INDUCTIVE LOAD	0.3 AMPERE AT 28 Vdc WITH 200 MILLIHENRY INDUCTANCE WITH CASE GROUNDED


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, HERMETICALLY SEALED 4PDT, LOW LEVEL TO 2 AMPERES


MIL-R-39016/39

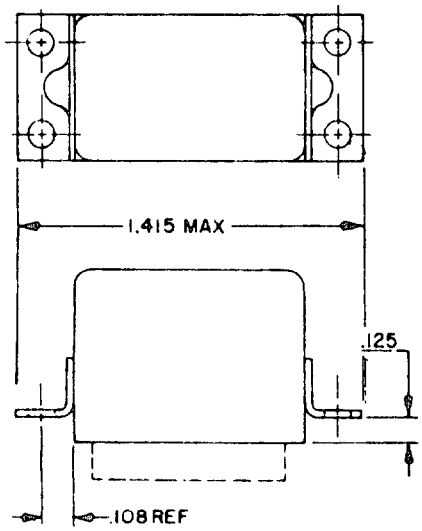


FOUR-HOLE END BRACKET
FIGURE 1

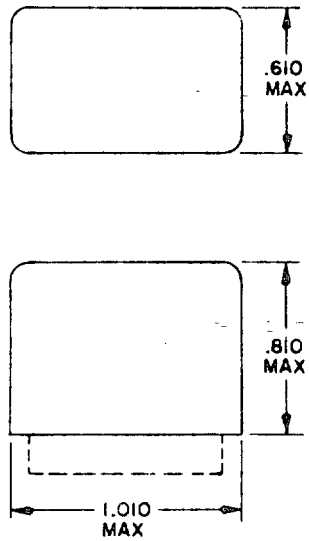


NO MOUNT
FIGURE 2

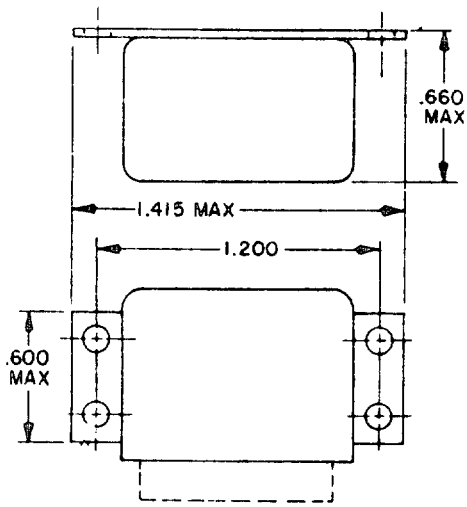

SIDE BRACKET
FIGURE 3

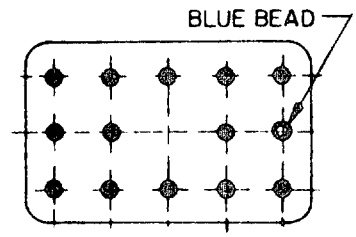

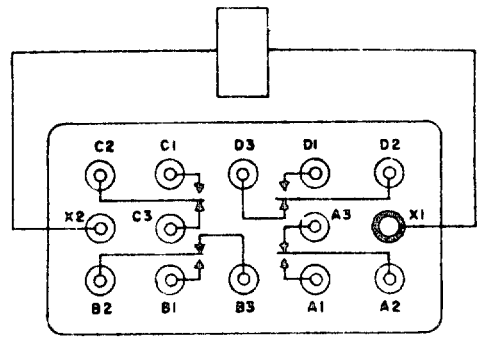

CIRCUIT DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, ELECTROMAGNETIC, (INCLUDING ESTABLISHED RELAIBILITY (ER) TYPES)

MIL-R-6106


SCOPE: THIS SECTION COVERS ELECTROMAGNETIC RELAYS WITH NOMINAL CONTACT RATINGS FROM FIVE AMPERES (RESISTIVE) AND UPWARD FOR USE IN ELECTRICAL APPLICATIONS. AUXILIARY CONTACTS MAY BE RATED AT LOWER CURRENTS. THESE RELAYS ARE INTENDED FOR USE IN DIRECT OR ALTERNATING CURRENT (SINGLE OR MULTIPHASE) ELECTRICAL SYSTEMS AS A MEANS OF CONTROLLING THE MAKING AND BREAKING OF CIRCUITS FOR ELECTRICALLY OPERATED EQUIPMENT AND DEVICES.

TEMPERATURE RANGE: -70°C TO +125°C

PART NUMBER EXAMPLE:

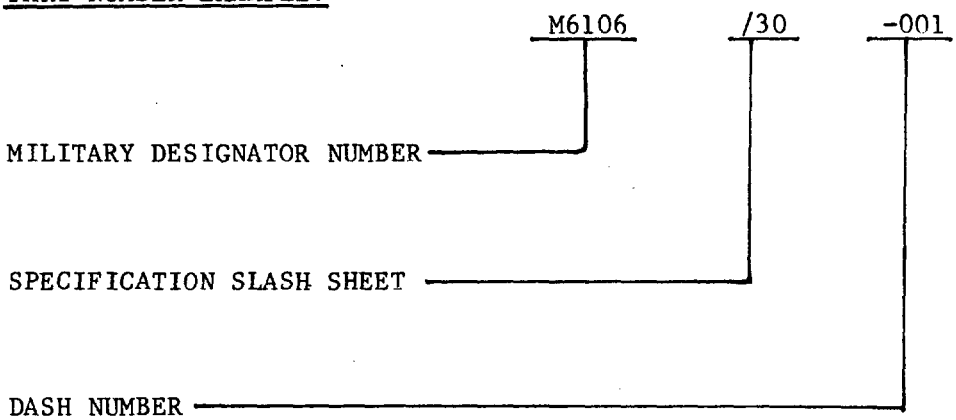

TYPE DESIGNATOR EXAMPLE:

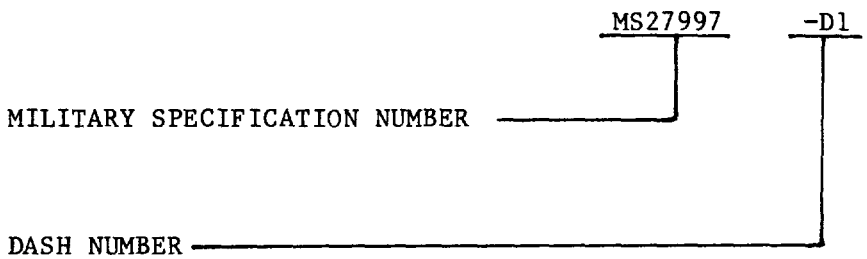


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 50 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24140

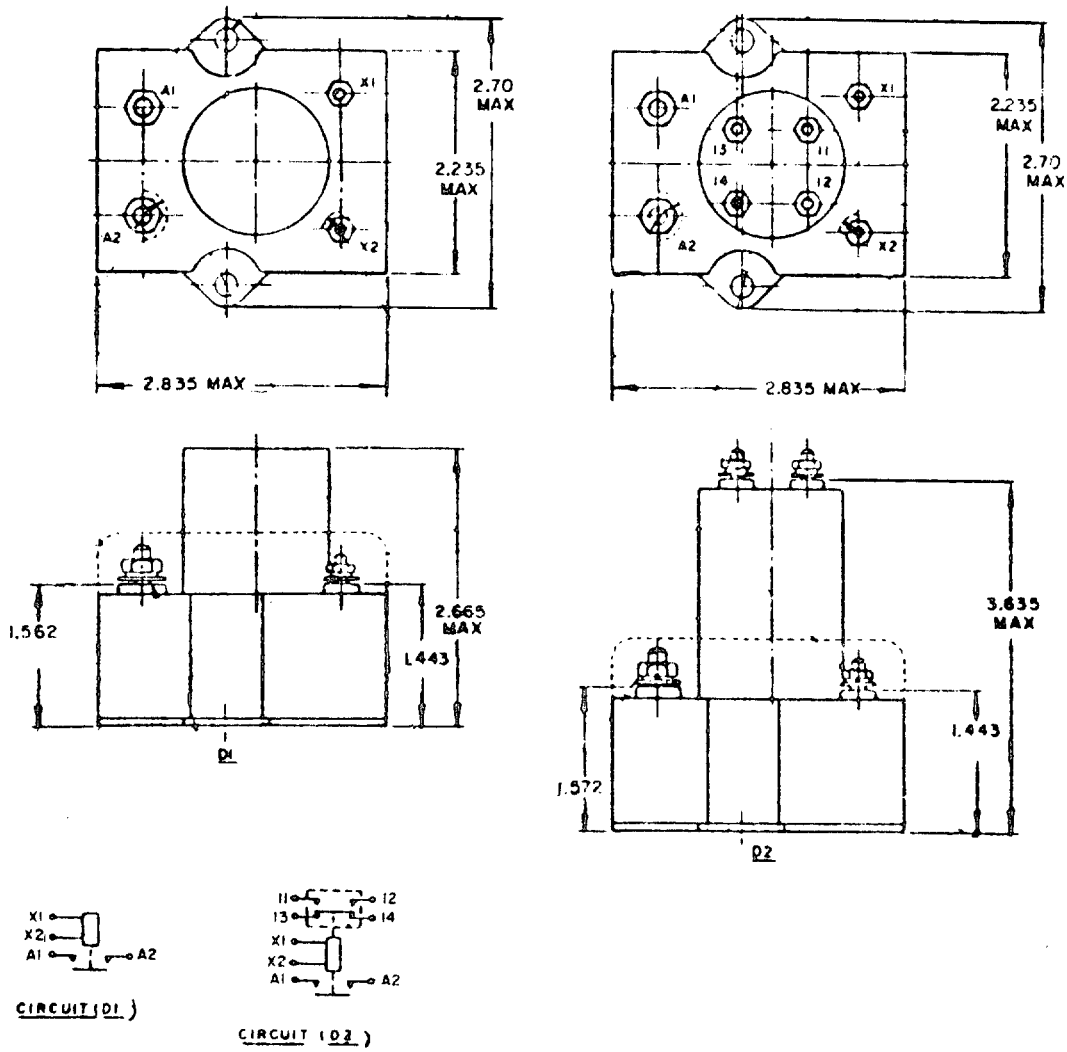

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILLARY CONTACTS
MS24140-D1	I	DC	STUD	FLANGE	NONE
MS24140-D2	I	DC	STUD	FLANGE	WITH

Source: https://assist.dla.mil/ downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 50 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24140

OPERATING CHARACTERISTICS

MS PART NO. MS24140-	COIL DATA					
		NOMINAL			MAX	
	COIL	VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	78	29	.50

MS PART NO. MS24140-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	20	10	2	--	--	--
D2	20	10	2	--	2	2


TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	50	50	--	5	5	50	--	5	--	--	--
INDUCTIVE	10	50	--	5	5	50	--	5	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 100 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24141

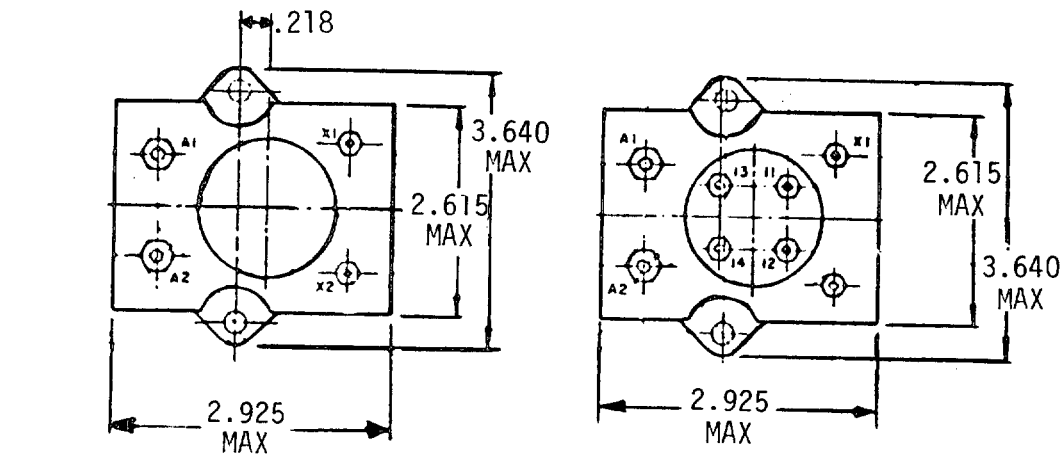

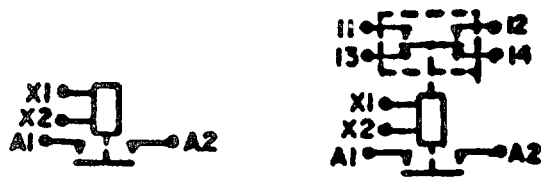

CIRCUIT (D1) CIRCUIT (D2)

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILLARY CONTACTS
MS24141-D1	I	DC	STUD	FLANGE	NONE
MS24141-D2	I	DC	STUD	FLANGE	WITH

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 100 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24141

OPERATING CHARACTERISTICS

MS PART NO. MS24141-	COIL DATA					
		NOMINAL			MAX	
	COIL	VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	64.5	29	.50

MS PART NO. MS24141-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	10	2.5	--	--	--
D2	25	10	2.5	--	2.5	2.5

TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	50	100	--	5	5	100	--	5	--	5	--
INDUCTIVE	10	100	--	5	5	--	--	5	--	--	--


Supersedes Page 138.5 of 30 September 1982


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 200 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED


MS24142

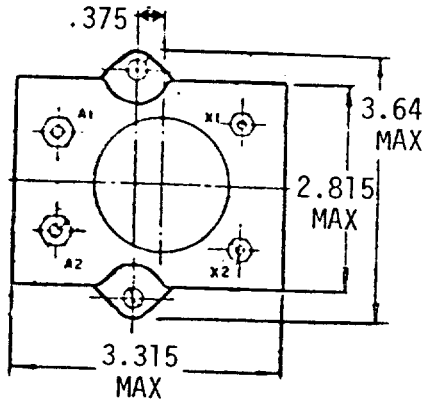

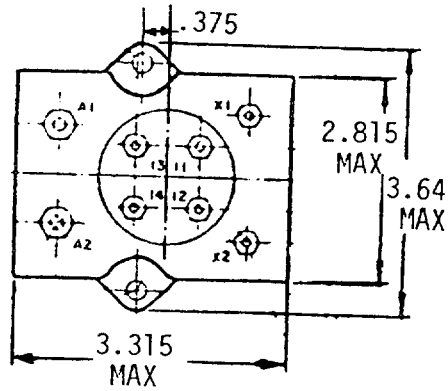


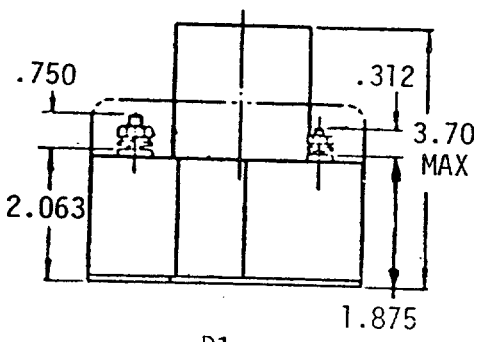


D1

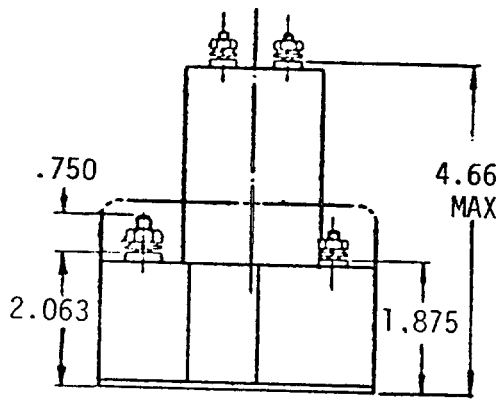

D2



CIRCUIT (D1)



CIRCUIT (D2)

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILLARY CONTACTS
MS24142-D1	I	DC	STUD	FLANGE	NONE
MS24142-D2	I	DC	STUD	FLANGE	WITH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 200 AMP, 1PST, N.O. TYPE I, HERMETICALLY SEALED

MS24142

OPERATING CHARACTERISTICS

MS PART NO. MS24142-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	52	29	.6

MS PART NO. MS24142-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	40	15	2	--	--	--
D2	40	15	2	--	3	3


TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	50	200	--	5	5	200	--	5	--	--	--
INDUCTIVE	10	100	--	5	5	--	--	5	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 25 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED


MS24143

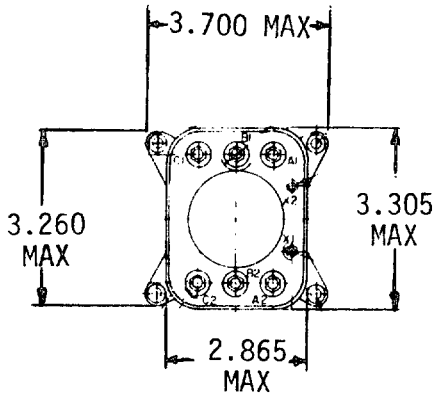

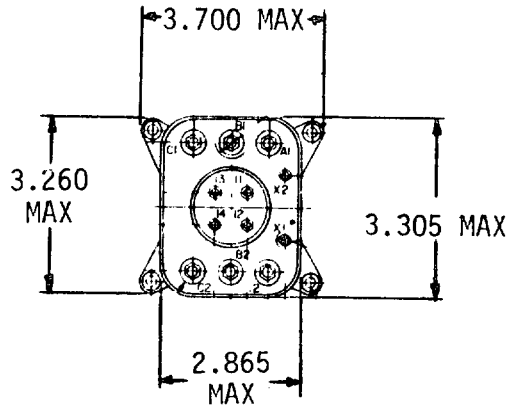

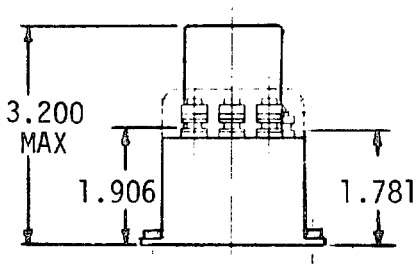

D1 and A3



D2 and A4
same as D1 and A3, except as otherwise shown

MS PART NUMBER MS24143-	CIRCUIT	COIL TYPE	AUXILLARY CONTACTS
D1	1	DC	NONE
D2	2	DC	WITH
A3	1	AC	NONE
A4	2	AC	WITH


TERMINAL SIZE: STUD
MOUNTING: FLANGES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 25 AMP, 3PST, N. O. TYPE I, HERMETICALLY SEALED

MS24143



CIRCUIT 1



CIRCUIT 2

OPERATING CHARACTERISTICS

MS PART NO. MS24143-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	52	29	.6
A3,A4		115	50/60/400	--	124	.225

TIME-MILLISECONDS-MAX

MS PART NO. MS24143-	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	10	2	--	--	--
D2	25	10	2	--	3	3
A3	30	65	5	--	--	--
A4	30	65	5	--	6	6


TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400Hz	50/60Hz	400Hz	50/60Hz	400Hz	50/60Hz
RESISTIVE	100	25	--	5	5	25	25	5	2	25	15
INDUCTIVE	10	25	--	5	5	25	--	5	--	25	12.5


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 100 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED


MS24168

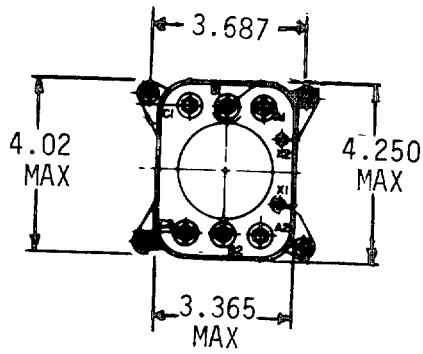

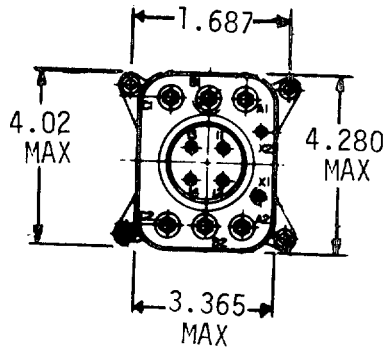

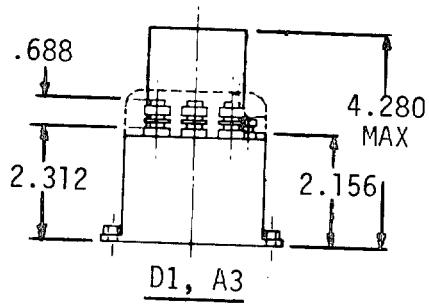

D1, A3



D2, A4

MS PART NUMBER MS24168-	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING	AUXILIARY CONTACTS
D1	I	DC	STUD	FLANGE	NONE
D2	I	DC			WITH
A3	I	AC			NONE
A4	I	AC			WITH

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 100 AMP, 3PST, N. O. TYPE I, HERMETICALLY SEALED

MS24168

OPERATING CHARACTERISTICS

MS PART NO. MS24168-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	55	29	.06
A3,A4		115	50/60/400	--	120	--

MS PART NO. MS24168-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	60	25	2.5	--	--	--
D2	60	25	2.5	--	4.5	4.5
A3	60	80	5	--	--	--
A4	60	80	5	--	7	7

TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400Hz	50/60Hz	400Hz	50/60Hz	400Hz	50/60Hz
RESISTIVE	50	100	--	5	5	100	50	5	2	100	50
INDUCTIVE	10	100	--	5	5	--	--	5	--	--	50


Supersedes Page 138.11 of 30 September 1982


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 50 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED


MS24376

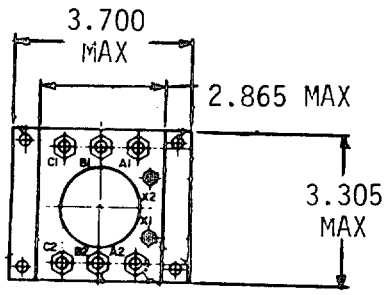




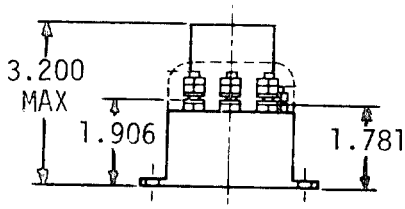


A1, D1



A2, D2



CIRCUIT A1, D1



CIRCUIT A2, D2

(same as A1, D1 except as otherwise shown)

MS PART NUMBER MS24376-	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING	AUXILIARY CONTACTS
D1	I	DC	STUD	FLANGE	NONE
D2	I	DC			WITH
A1	I	AC			NONE
A2	I	AC			WITH

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 50 AMP, 3PST, N. O. TYPE I, HERMETICALLY SEALED

MS24376

OPERATING CHARACTERISTICS

MS PART NO. MS24376-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1,D2	X1X2	28	DC	52	29	.6
A1,A2		115	60/400	--	124	.225

MS PART NO. MS24376-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	10	2	--	--	--
D2	25	10	2	--	3	3
A1	30	65	2	--	--	--
A2	30	65	2	--	3	3


TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400Hz	50/60Hz	400Hz	50/60Hz	400Hz	50/60Hz
RESISTIVE	100	50	50	5	5	50	25	5	2	50	20
INDUCTIVE	10	50	50	5	5	50	--	5	--	50	15
INDUCTIVE	100	25	25	5	5	50	--	5	--	50	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE I, HERMETICALLY SEALED

MS24568

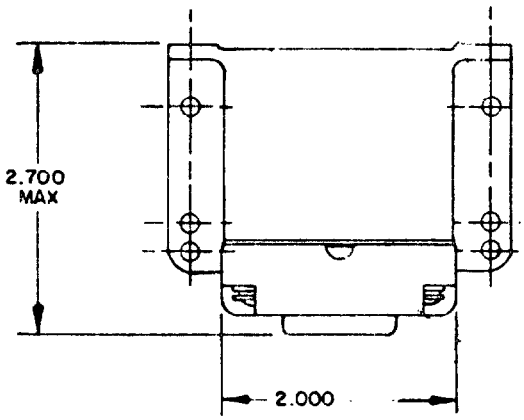

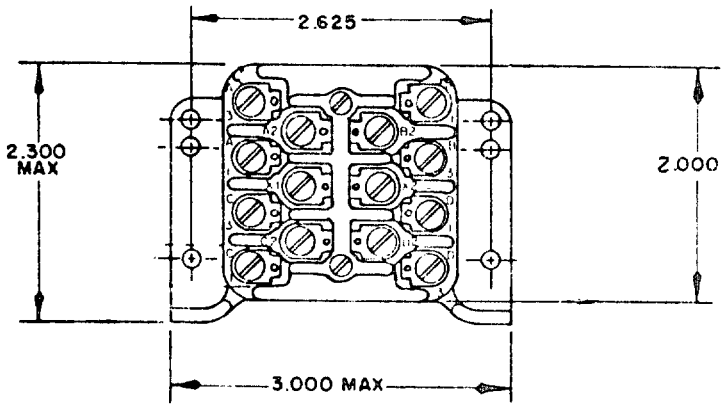

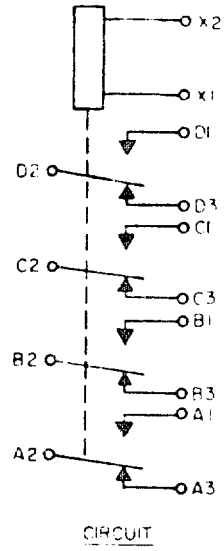

CIRCUIT

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING OR MATING SOCKET	AUXILLARY CONTACTS
MS24568-D1	I	DC	SCREW	BRACKET	N/A
MS24568-A1	I	AC	SCREW	BRACKET	N/A

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE I, HERMETICALLY SEALED

MS24568

OPERATING CHARACTERISTICS

MS PART NO. MS24568-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2	28	DC	--	30	0.5
A1	X1X2	115	400	--	120	0.1

MS PART NO. MS24568-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	20	3	5	--	--
A1	25	50	3	5	--	--

TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	15	10	--	--	15	10
INDUCTIVE	20	10	10	--	--	10	6	--	--	10	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 2PDT, TYPE I, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED

MS25273

OPERATING CHARACTERISTICS

MS PART NO. MS25273-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
D1	X1X2	28	DC	--	29	0.2

MS PART NO. MS25273-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	20	20	2	2	--	--


TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10	6	--	--	10	6
INDUCTIVE	20	6	6	--	--	6	4	--	--	6	4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, MAGNETIC LATCH, 5 AMP, 2PDT, TYPE I, (HERMETICALLY SEALED,)
SOLDER TERMINAL, STUD MOUNTED

MS25465

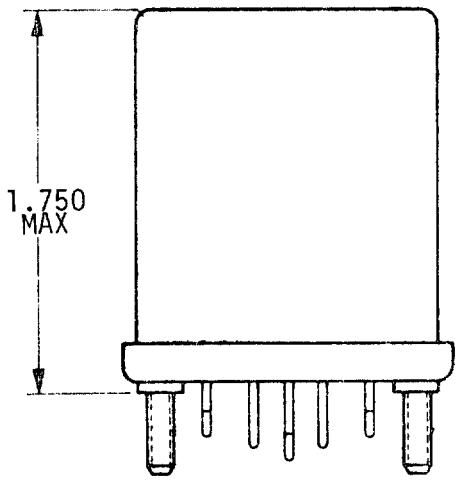

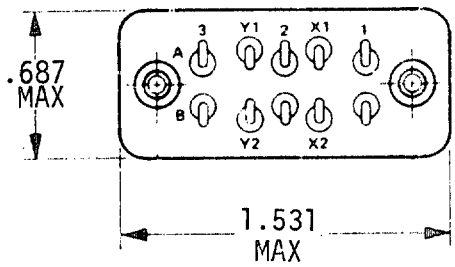

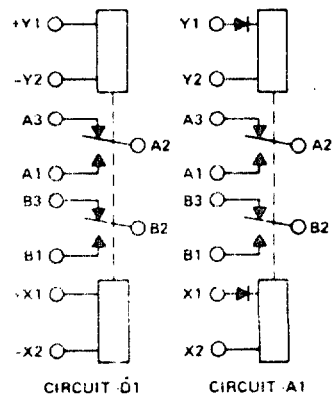

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, MAGNETIC LATCH, 5 AMP, 2PDT, TYPE I, (HERMETICALLY SEALED,) SOLDER TERMINALS, STUD MOUNTED

MS25465

OPERATING CHARACTERISTICS

MS PART NO. MS25465-	COIL	COIL DATA					
		NOMINAL			MAX		COIL TYPE
		VOLTS	FREQ Hz	RES	VOLTS	AMP	
D1	X1X2 Y1Y2	28	DC	--	29	0.12	DC
A1	X1X2 Y1Y2	115	400	--	122	0.06	AC

MS PART NO. MS25465-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	N/A	2	2	--	--
A1	25	N/A	2	2	--	--

TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	100	5	5	--	--	5	4	--	--	--	--
INDUCTIVE	20	3	3	--	--	3	2	--	--	--	--


Supersedes Page 138.25 of 30 September 1982


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, MAGNETIC LATCH, 10 AMP, 2PDT, TYPE I, (HERMETICALLY SEALED), SOLDER TERMINALS, STUD MOUNTED

MS25466

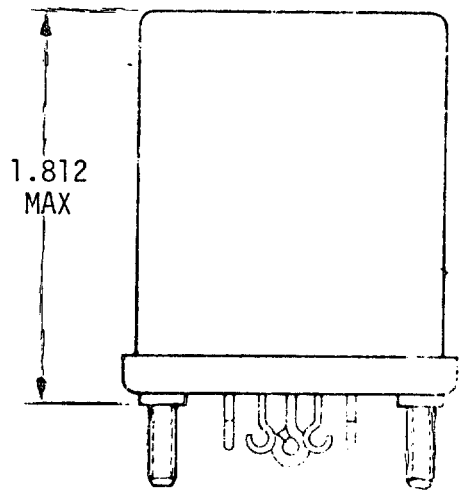

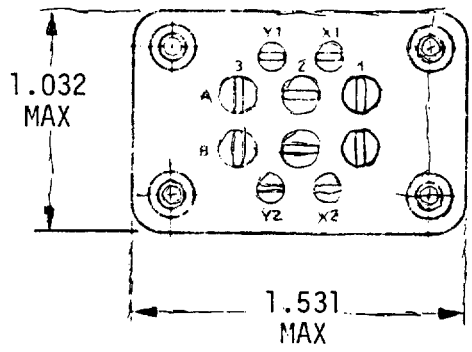

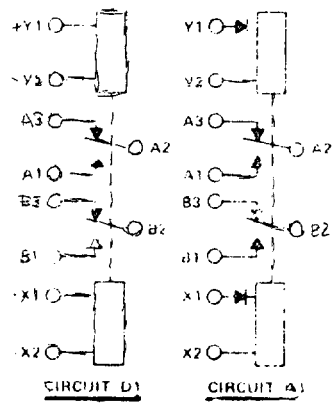

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, MAGNETIC LATCH, 10 AMP, 2PDT, TYPE I, (HERMETICALLY SEALED), SOLDER TERMINALS, STUD MOUNTED

MS25466

OPERATING CHARACTERISTICS

MS PART NO. MS25466-	COIL	COIL DATA					
		NOMINAL			MAX		COIL TYPE
		VOLTS	FREQ Hz	RES	VOLTS	AMP	
D1	X1X2 Y1Y2	28	DC	--	29	0.17	DC
A1	X1X2 Y1Y2	115	400	--	122	0.07	AC

MS PART NO. MS25466-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	N/A	2	2	--	--
A1	25	N/A	2	2	--	--


TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10	6	--	--	10	6
INDUCTIVE	20	6	6	--	--	10	4	--	--	10	4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, MAGNETIC LATCH, 5 AMP, 4PDT, TYPE I, (HERMETICALLY SEALED), SOLDER TERMINALS, STUD MOUNTED

MS25467

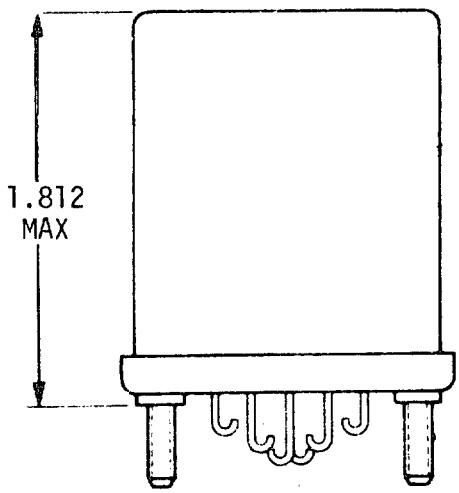

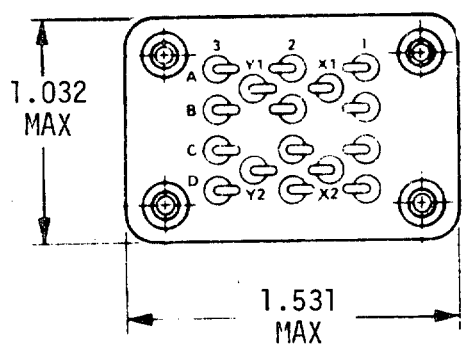

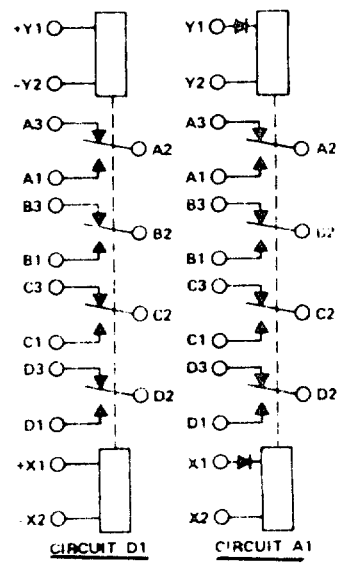

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, MAGNETIC LATCH, 5 AMP, 4PDT, TYPE I, (HERMETICALLY SEALED,) SOLDER TERMINALS, STUD MOUNTED

MS25467

OPERATING CHARACTERISTICS

MS PART NO. MS25467-	COIL	COIL DATA					COIL TYPE
		NOMINAL			MAX		
		VOLTS	FREQ Hz	RES	VOLTS	AMP	
D1	X1X2 Y1Y2	28	DC	--	29	0.17	DC
A1	X1X2 Y1Y2	115	400	--	122	0.07	AC

MS PART NO. MS25467-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
D1	25	N/A	2	2	--	--
A1	25	N/A	2	2	--	--


TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	100	5	5	--	--	5	4	--	--	--	--
INDUCTIVE	20	3	3	--	--	3	2	--	--	--	--


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, TYPE I, HERMETICALLY SEALED, SOLDER TERMINALS, STUD MOUNTED, MAGNETIC LATCH

MS25468

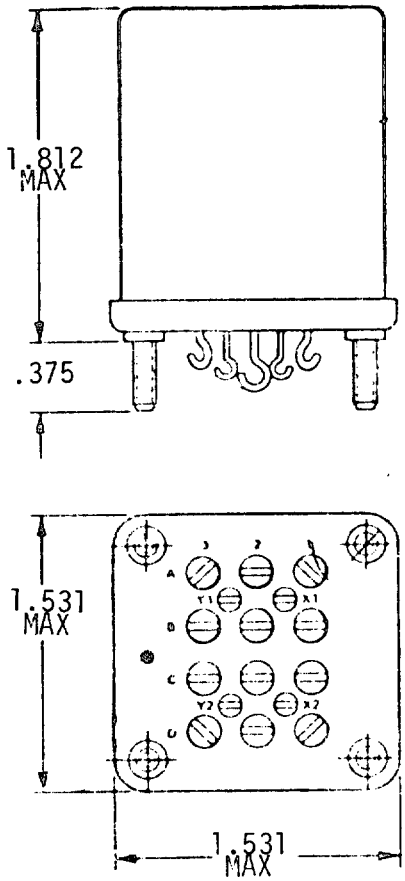

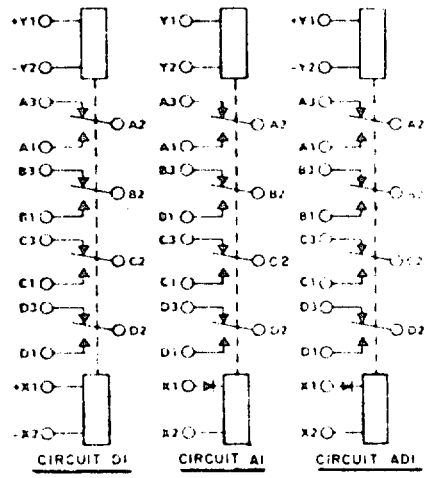

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS25468-D1	I	DC	SOLDER HOOK	STUD
MS25468-A1	I	AC	SOLDER HOOK	STUD
MS25468-AD1	I	AC DC	SOLDER HOOK	STUD

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, PERMANENT MAGNET DRIVE, ALL WELDED, HERMETICALLY SEALED

MS27400

OPERATING CHARACTERISTICS

MS PART NO. MS27400-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
5,9	X1X2	28	DC	290	29	.12
32,26		115	50/400	--	122	.03

MS PART NO. MS27400-	TIME-MILLISECONDS-MAX						
	OPERATE	RELEASE	BOUNCE				
			MAIN		AUX		BREAK
			NO	NC	NO	NC	NO ONLY
5,9	15	15	1	1	--	--	--
32,26	20	50	1	1	--	--	0.1

TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400Hz	50/60Hz	400Hz	60Hz	400Hz	50/60Hz
RESISTIVE	100	10	10	--	--	10	2.5	--	--	10	2.5
INDUCTIVE	10	--	--	--	--	--	2.5	--	--	--	2.5
INDUCTIVE	20	8	8	--	--	8	--	--	--	8	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 2PDT, PERMANENT MAGNET DRIVE, ALL WELDED, HERMETICALLY SEALED

MS27401

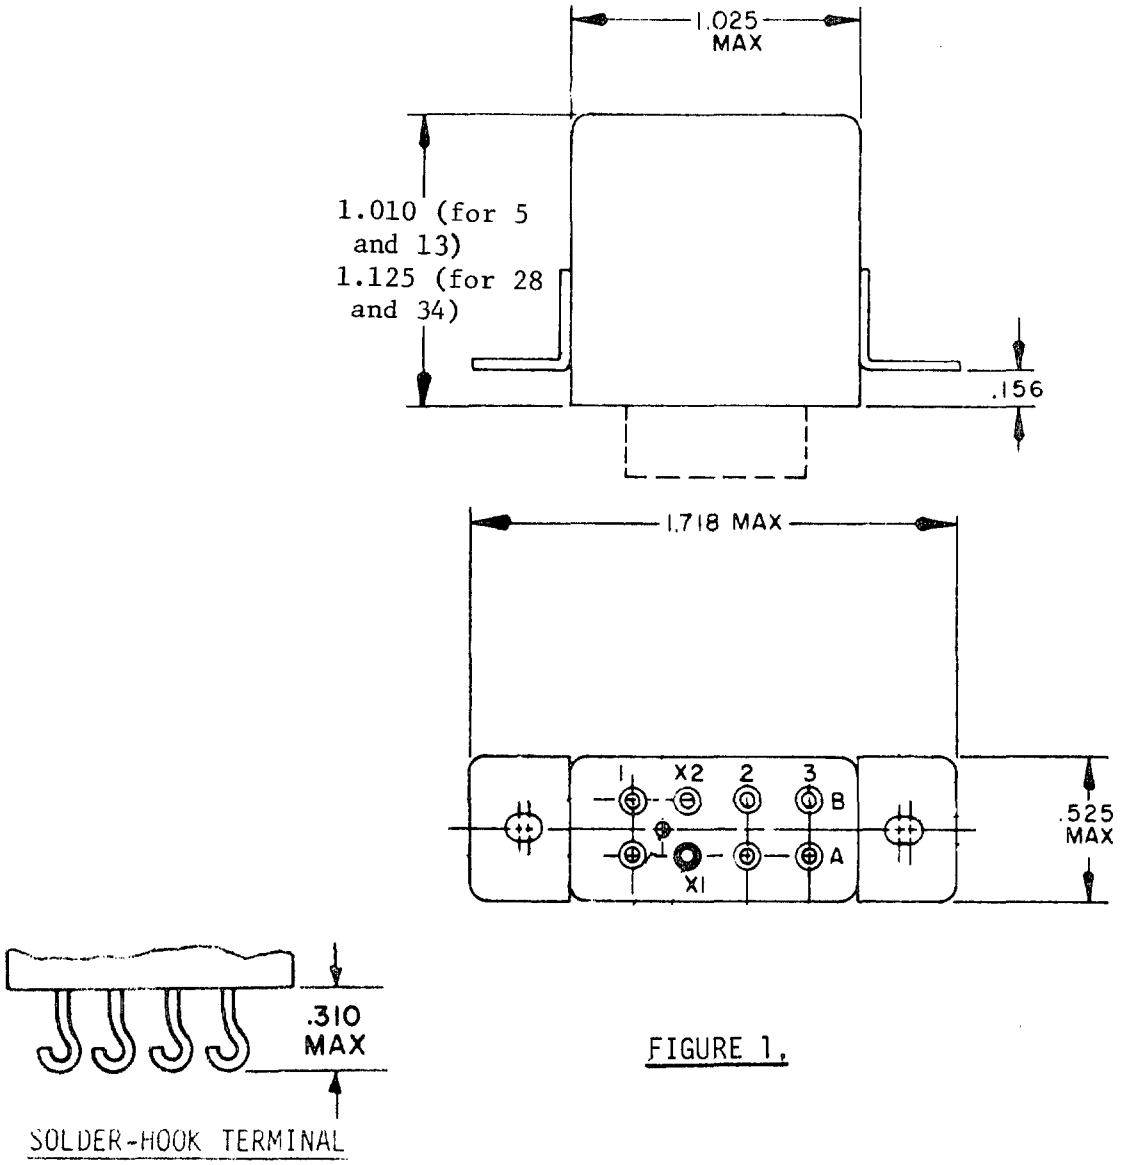


FIGURE 1.


MS PART NO. MS27401-	TYPE	COIL FREQ	COIL SUPPRESSION	TERMINAL TYPE	MOUNTING	MATING SOCKET	CIRCUIT
5	IER	DC	N/A	SOLDER HOOK	FIG.1	N/A	A
13	I	DC	N/A	SOLDER HOOK	FIG.1	N/A	A
34	IER	50/400	N/A	SOCKET HOOK	FIG.1	N/A	A
28	I	50/400	N/A	SOLDER HOOK	FIG.1	N/A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-R-6106

RELAY, 10 AMP, 2PDT, PERMANENT MAGNET DRIVE, ALL WELDED, HERMETICALLY SEALED

MS27401

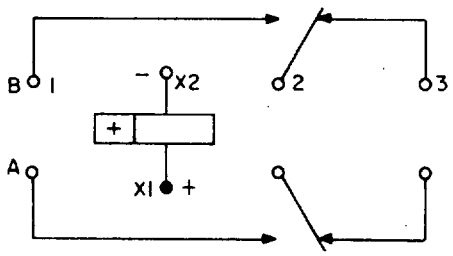

CIRCUIT A
(POLARIZED MONOSTABLE)



TERMINAL LAYOUT FOR ALL
50/400 AND 400 Hz RELAYS

OPERATING CHARACTERISTICS

MS PART NO. MS27401-	COIL	COIL DATA NOMINAL VOLTS	FREQ Hz	RES	MAX VOLTS	AMP
5,13	X1X2	28	DC	320	29	.11
28,34		115	50/400	--	122	.03

MS PART NO. M27401-	TIME-MILLISECONDS-MAX OPERATE	RELEASE	BOUNCE MAIN NO	MAIN NC	AUX NO	AUX NC	BREAK NO ONLY
5,13	10	10	1	1	--	--	--
28,34	20	50	1	1	--	--	0.1

TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED 28 Vdc MAIN NO	MAIN NC	AUX NO	AUX NC	115 Vac, 1PHASE MAIN 400Hz	MAIN 50/60Hz	AUX 400Hz	AUX 60Hz	115/200 Vac, 3 PHASE MAIN 400Hz	MAIN 50/60Hz
RESISTIVE	100	10	10	--	--	10	2.5	--	--	10	2.5
INDUCTIVE	10	--	--	--	--	--	2.5	--	--	--	2.5
INDUCTIVE	20	8	8	--	--	8	--	--	--	8	--


Supersedes Page 138.41 of 30 September 1982


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106


RELAY, 25 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED, HOOK & SCREW TERMINALS, STUD AND BRACKET MOUNTED


MS27418






MS27418- 1A, 1B, 1C

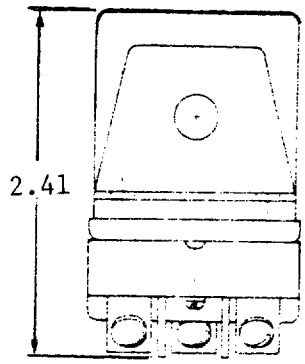

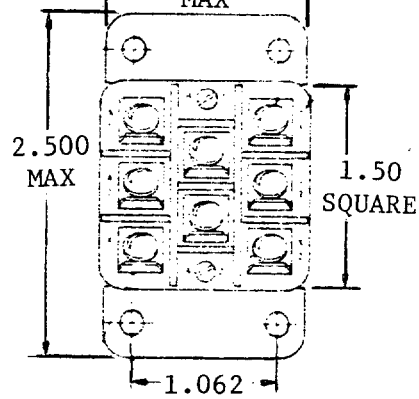

MS27418- 2A, 2B, 2C

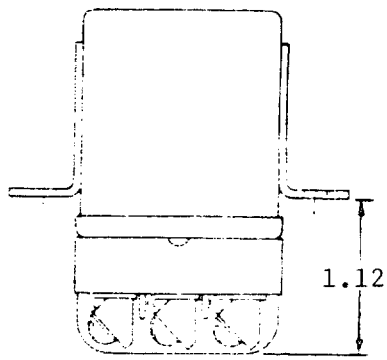

MS PART NUMBER MS27418-	TYPE	COIL	TERMINAL TYPE	MOUNTING OR MATING SOCKET
1A	I	AC	SOLDER HOOK	STUD
1B	I	DC	SOLDER HOOK	STUD
1C	I	AC	SOLDER HOOK	STUD
2A	I	AC	SCREW	BRACKET
2B	I	DC	SCREW	BRACKET
2C	I	AC	SCREW	BRACKET

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 25 AMP, 3PST, N.O. TYPE I, HERMETICALLY SEALED, HOOK & SCREW TERMINALS, STUD & BRACKET MOUNTED

MS27418

OPERATING CHARACTERISTICS

MS PART NO. MS27418-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
1A,2A	X1X2	115	400	--	122	.055
1B,2B		28	DC	--	29	.25
1C,2C		115	50/60	--	122	.06

MS PART NO. MS27418-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
1A,2A	25	50	2	--	--	--
1B,2B	20	10	2	--	--	--
1C,2C	25	50	2	--	--	--


TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400Hz	50/60Hz	400 Hz	60Hz	400 Hz	50/60 Hz
RESISTIVE	50	25	--	--	--	25	25	--	--	25	25
INDUCTIVE	10	--	--	--	--	25	25	--	--	25	25
INDUCTIVE	10	15	--	--	--	--	--	--	--	--	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 2PDT, MAGNETIC LATCH, HERMETICALLY SEALED, ALL WELDED

MS27744

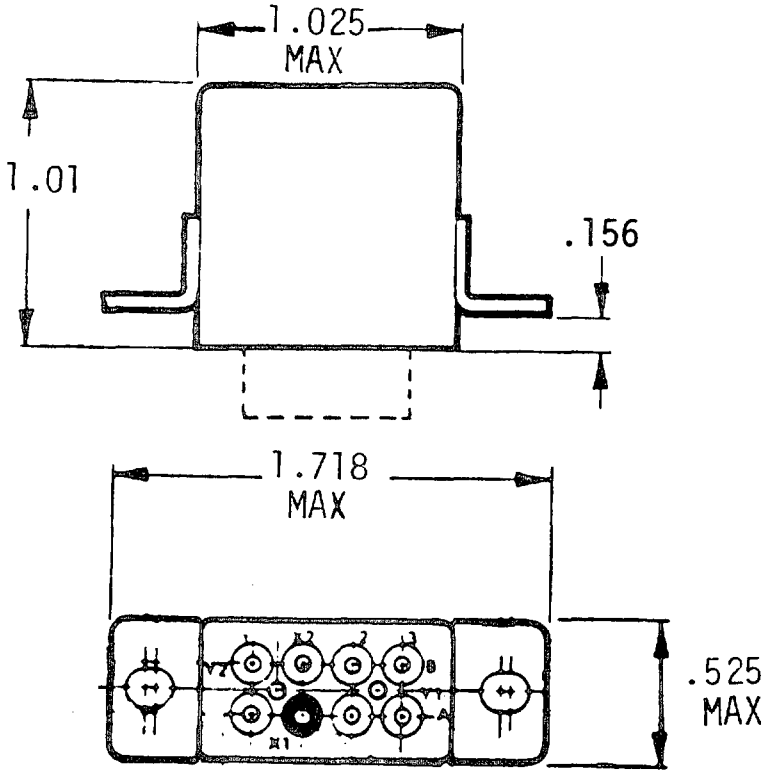


MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS27744-1	I	DC	SOLDER HOOK	N/A

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106


RELAY, 10 AMP, 2PDT, MAGNETIC LATCH, HERMETICALLY SEALED, ALL WELDED

MS27744

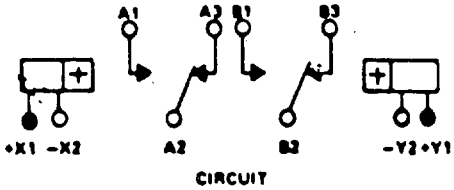

CIRCUIT

TO CLOSE NO. 1 CONTACTS (OPERATE) ENERGIZE X1 AND X2.
TO CLOSE NO. 2 CONTACTS (RESET) ENERGIZE Y1 AND Y2



OPERATING CHARACTERISTICS

MS PART NO. MS27744-	COIL	COIL DATA				
		NOMINAL			MAX	
		VOLTS	FREQ Hz	RES	VOLTS	AMP
1	X1X2	28	DC	--	29	0.05

MS PART NO. MS27744-	TIME-MILLISECONDS-MAX					
	OPERATE	RELEASE	BOUNCE			
			MAIN		AUX	
			NO	NC	NO	NC
1	10	--	1	1	--	--


TYPE OF LOAD	LIFE OPERATING CYCLES X 1000	RATED CONTACT LOAD (AMPERES PER POLE) CASE GROUNDED									
		28 Vdc				115 Vac, 1PHASE				115/200 Vac, 3 PHASE	
		MAIN		AUX		MAIN		AUX		MAIN	
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz
RESISTIVE	100	10	10	--	--	10	--	--	--	10	--
INDUCTIVE	20	8	8	--	--	8	--	--	--	8	--

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-R-6106

RELAY, 10 AMP, 4PDT, MAGNETIC LATCH, HERMETICALLY SEALED, ALL WELDED

MS27745

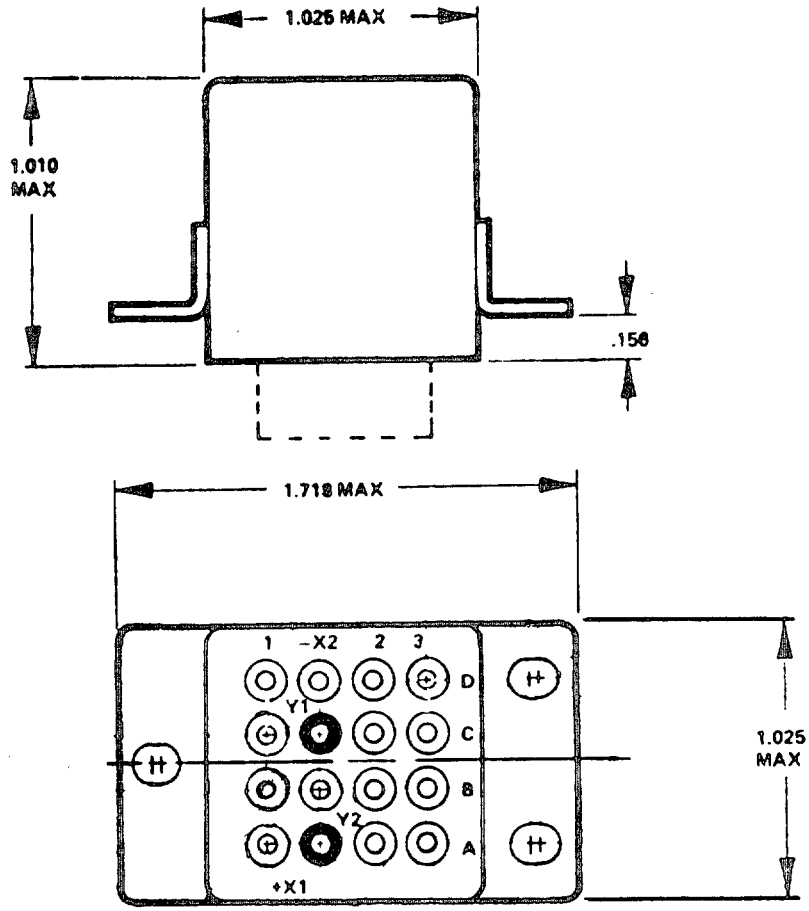

MS PART NUMBER	TYPE	COIL TYPE	TERMINAL TYPE	MOUNTING
MS27745-1	I	DC	SOLDER HOOK	N/A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, TIME DELAY, HYBRID AND SOLID STATE

MIL-R-83726

SCOPE: THIS SECTION COVERS HYBRID AND SOLID STATE, TIME DELAY RELAYS. THESE RELAYS ARE INTENDED FOR USE IN DIRECT AND ALTERNATING CURRENT (SINGLE AND POLYPHASE) ELECTRICAL SYSTEMS AS A MEANS OF TIMING AND CONTROLLING THE MAKING AND BREAKING OF CIRCUITS FOR ELECTRICALLY OPERATING EQUIPMENT AND DEVICES.


PART NUMBER EXAMPLE:

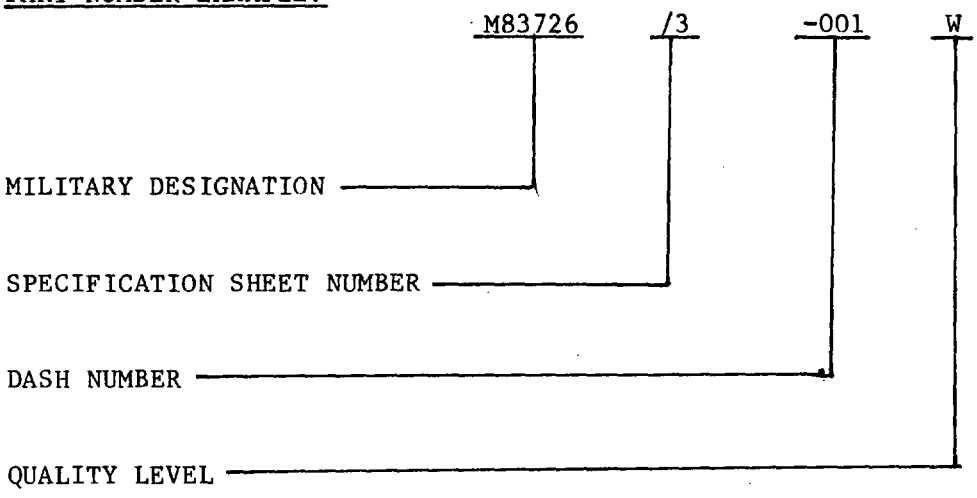



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, TIME DELAY ON PICKUP, TYPE 1, CLASS A, 2 AMP, 2PDT, FIXED TIME, .06 TO 300 SECONDS

MIL-R-83726/7

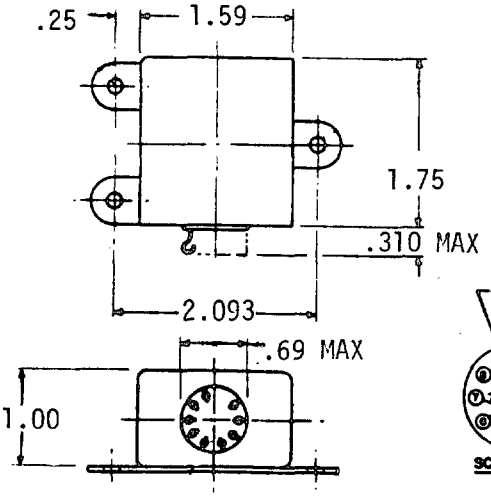





TIMING DIAGRAM

DASH NO. *	TIME DELAY SECONDS ±10%	DASH NO. (CONT) *	TIME DELAY SECONDS ±10%	DASH NO. (CONT) *	TIME DELAY SECONDS ±10%	DASH NO. (CONT) *	TIME DELAY SECONDS ±10%
0600	.060 #	1202	12	6502	65	1703	170
1000	.100 #	1402	14	7002	70	1803	180
5000	.500 #	1602	16	7502	75	1903	190
7500	.750 #	1802	18	8002	80	2003	200
1001	1	2002	20	8502	85	2103	210
2001	2	2202	22	9002	90	2203	220
3001	3	2502	25	9502	95	2303	230
4001	4	3002	30	1003	100	2403	240
5001	5	3502	35	1103	110	2503	250
6001	6	4002	40	1203	120	2603	260
7001	7	4502	45	1303	130	2703	270
8001	8	5002	50	1403	140	2803	280
9001	9	5502	55	1503	150	2903	290
1002	10	6002	60	1603	160	3003	300

PART NUMBER: M83726/7-*W

RELAYS ELECTRICAL CHARACTERISTIC REQUIREMENTS


RESISTIVE LOAD: 2 AMPERES
NOMINAL VOLTAGE: 28 VDC
DUTY RATING: CONTINUOUS
RANGE OF VOLTAGE: 18 TO 31 VOLTS
MINIMUM VOLTAGE: 18 VDC
CONTACT BOUNCE: 2 MILLISECOND MAX


ADD +10% TOLERANCE
* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAY, TIME DELAY ON DROPOUT, TYPE 2.A., CLASS A, 2 AMP, 2PDT, FIXED TIME, .100 TO 300 SECONDS


MIL-R-83726/8

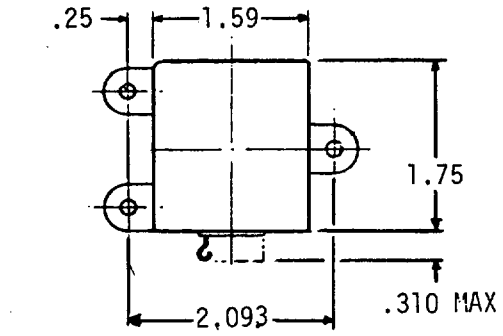



SCHEMATIC

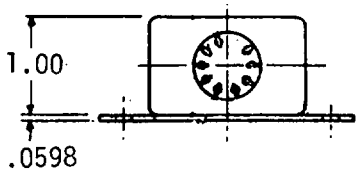

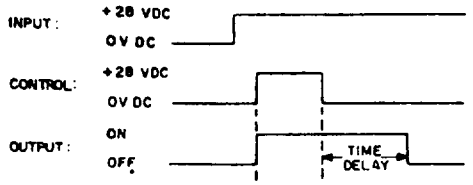

TIMING DIAGRAM

DASH NO. *	TIME DELAY SECONDS ±10%	DASH NO. (CONT) *	TIME DELAY SECONDS ±10%	DASH NO. (CONT) *	TIME DELAY SECONDS ±10%	DASH NO. (CONT) *	TIME DELAY SECONDS ±10%
		1202	12	6502	65	1703	170
1000	.100 #	1402	14	7002	70	1803	180
5000	.500 #	1602	16	7502	75	1903	190
7500	.750 #	1802	18	8002	80	2003	200
1001	1	2002	20	8502	85	2103	210
2001	2	2202	22	9002	90	2203	220
3001	3	2502	25	9502	95	2303	230
4001	4	3002	30	1003	100	2403	240
5001	5	3502	35	1103	110	2503	250
6001	6	4002	40	1203	120	2603	260
7001	7	4502	45	1303	130	2703	270
8001	8	5002	50	1403	140	2803	280
9001	9	5502	55	1503	150	2903	290
1002	10	6002	60	1603	160	3003	300

PART NUMBER: M83726/8-*W

RELAYS ELECTRICAL CHARACTERISTIC REQUIREMENTS


RESISTIVE LOAD: 2 AMPERES
NOMINAL VOLTAGE: 28 VDC
DUTY RATING: CONTINUOUS
RANGE OF VOLTAGE: 18 TO 31 VOLTS
MINIMUM VOLTAGE:18 VDC
CONTACT BOUNCE: 2 MILLISECOND MAX


ADD +10% TOLERANCE
* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, TIME DELAY, DELAY ON OPERATE, CLASS B, TYPE I, HERMETICALLY SEALED, DPDT, 10 AMPERES, FIXED TIME, 0.1 TO 500 SECONDS

MIL-R-83726/28

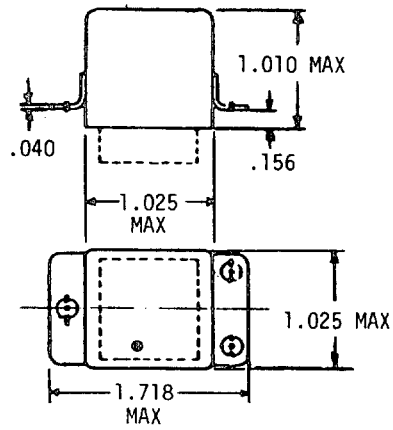

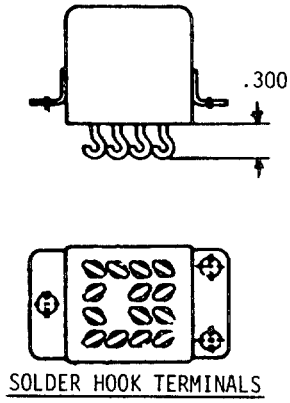

SOLDER HOOK TERMINALS



Plug-in terminals

RELAYS ELECTRICAL CHARACTERISTIC REQUIREMENTS

OPERATING DATA:	
TIMING ACTION:	DELAY-ON OPERATE
TIME DELAY:	FIXED: SELECT FROM 0.1 TO 500 SECONDS
RECYCLE TIME:	50 MILLISECONDS MAXIMUM
OPERATING CURRENT:	150 MILLIAMPERES MAXIMUM AT 25°C
INPUT DATA:	
INPUT VOLTAGE:	20 TO 30 Vdc
DUTY RATING:	CONTINUOUS
RESISTIVE LOAD:	10 AMPERES AT 28 Vdc, 115/200 Vac 400 Hz
INDUCTIVE LOAD:	8 AMPERES AT 28 Vdc, 115/200 Vac 400 Hz

PART NUMBER: CONSISTS OF THE PREFIX M83726/28- AND A FOUR DIGIT DASH NUMBER DENOTING THE TIME DELAY EXPRESSED IN MILLISECONDS AS FOLLOWS:

M — 83726/28- — 2503 — S — W

MILITARY DESIGNATION

SPECIFICATION SHEET NUMBER

THE FIRST THREE DIGITS ARE SIGNIFICANT: THE FOURTH DIGIT IS THE NUMBER OF ZEROS


TERMINAL TYPES:
P - PLUG-IN
S - SOLDER LUG

QUALITY LEVEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, TIME DELAY, DELAY ON RELEASE CLASS B, TYPE IIA, HERMETICALLY SEALED, DPDT, 10 AMPERES, FIXED TIME, 0.1 TO 500 SECONDS

MIL-R-83726/29

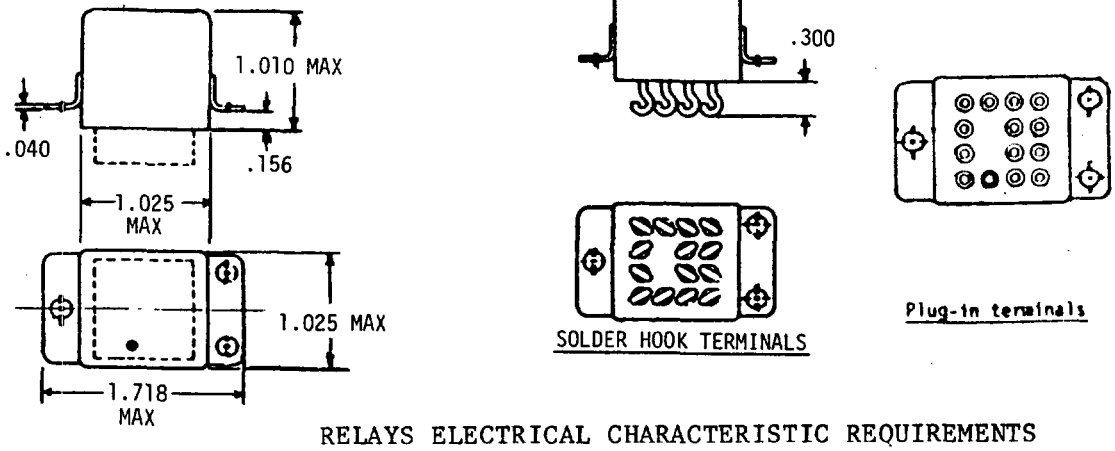

RELAYS ELECTRICAL CHARACTERISTIC REQUIREMENTS

OPERATING DATA:	
TIMING ACTION:	DELAY-ON RELEASE
TIME DELAY:	FIXED: SELECT FROM 0.1 TO 500 SECONDS
RECYCLE TIME:	50 MILLISECONDS MAXIMUM
EXTRANEOUS VOLTAGE:	7 Vdc MINIMUM
CONTROL VOLTAGE:	20 TO 30 Vdc
CONTROL CURRENT:	15 MILLIAMPERES MAXIMUM AT 25°C
OPERATING CURRENT:	(X1-X2) 150 MILLIAMPERES MAXIMUM AT 25°C
INPUT DATA:	
INPUT VOLTAGE:	20 TO 30 Vdc
DUTY RATING:	CONTINUOUS
RESISTIVE LOAD:	10 AMPERES AT 28 Vdc, 115/200 Vac 400 Hz
INDUCTIVE LOAD:	8 AMPERES AT 28 Vdc, 115/200 Vac 400 Hz

PART NUMBER: CONSISTS OF THE PREFIX M83726/29- AND A FOUR DIGIT DASH NUMBER DENOTING THE TIME DELAY EXPRESSED IN MILLISECONDS AS FOLLOWS:

M 83726/29- 2503 S W

MILITARY DESIGNATION

SPECIFICATION SHEET NUMBER

THE FIRST THREE DIGITS ARE SIGNIFICANT: THE FOURTH DIGIT IS THE NUMBER OF ZEROS

TERMINAL TYPES:
P - PLUG-IN
S - SOLDER LUG

QUALITY LEVEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, SOLID STATE

MIL-R-28750

SCOPE: THIS SECTION COVERS HERMETICALLY SEALED OR ENCAPSULATED SOLID STATE RELAYS, INCORPORATING ONLY SEMICONDUCTOR AND PASSIVE CIRCUIT DEVICES. THESE RELAYS ARE INTENDED FOR USE IN ELECTRONIC AND COMMUNICATION EQUIPMENT AS A MEANS OF CONTROLLING THE CIRCUITS OF ELECTRONICALLY OPERATED EQUIPMENT DEVICES. USERS ARE CAUTIONED TO ASSURE THAT TEMPERATURE LIMITATIONS, TRANSIENT VOLTAGES AND MOMENTARY CURRENT OVERLOADS DO NOT EXCEED THE APPLICABLE PARAMETERS OF A RELAY PROPOSED FOR A SPECIFIC APPLICATION.

TEMPERATURE (OPERATING AND STORAGES): -55°C TO +125°C


PART NUMBER EXAMPLE:

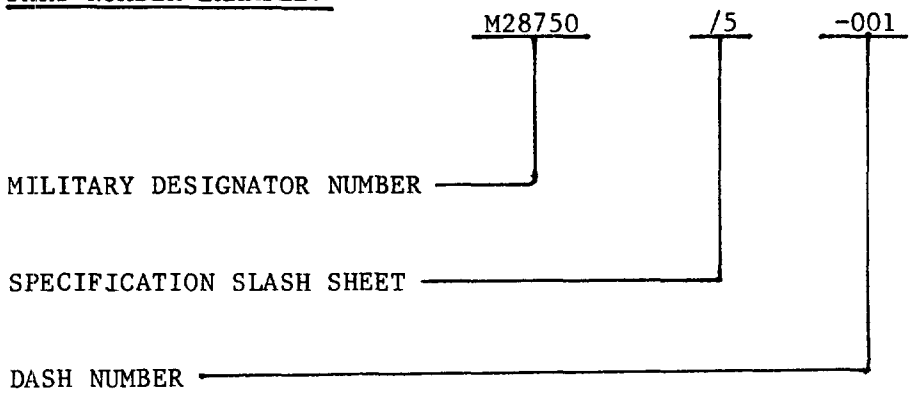


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, SOLID STATE, HERMETICALLY SEALED, ISOLATED, 50MA, 40V, AC OR DC, ANALOG SIGNAL SWITCHING, SPST(N.O.)

MIL-R-28750/5

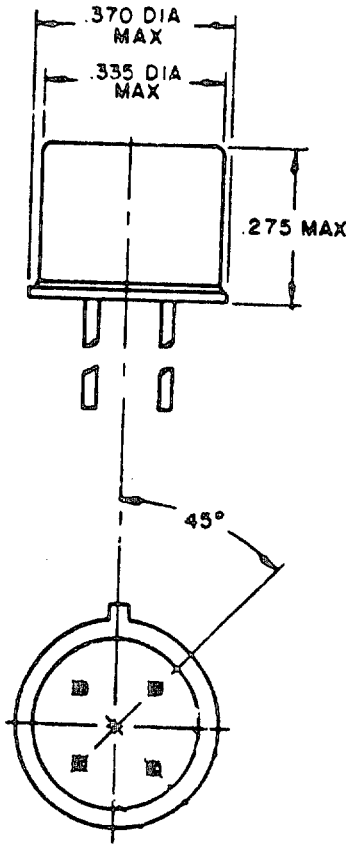

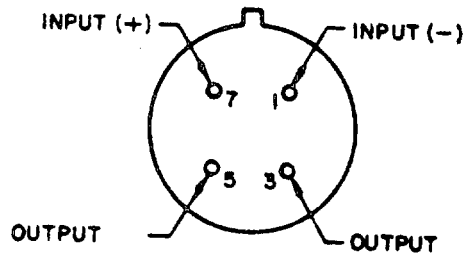

CIRCUIT
(BOTTOM VIEW)


INPUT VOLTAGE RANGE:	4.0 TO 7 VDC
RATED TURN-ON VOLTAGE:	5.0 VDC
RATED TURN-OFF VOLTAGE:	1.0 VDC MAXIMUM
INPUT CURRENT:	22 MA DC MAX
TURN-ON TIME:	10 MICROSECONDS MAX
TURN-OFF TIME:	15 MICROSECONDS MAX
RATED OUTPUT VOLTAGE:	+40 VAC OR DC
OUTPUT VOLTAGE DROP:	.5 VDC MAX
POWER DISSIPATION:	140 mW MAX AT RATED VOLTAGE


PART NUMBER: M28750/5-001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, SOLID STATE, HERMETICALLY SEALED, ISOLATED, 250MA, 40 V DC, SIGNAL SWITCHING, SPST(N.O.)

MIL-R-28750/6

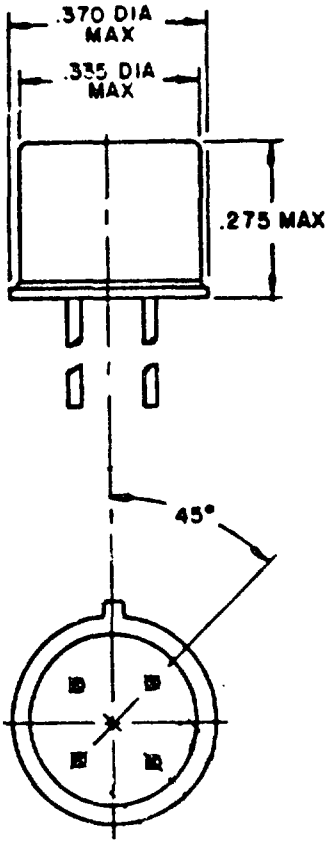

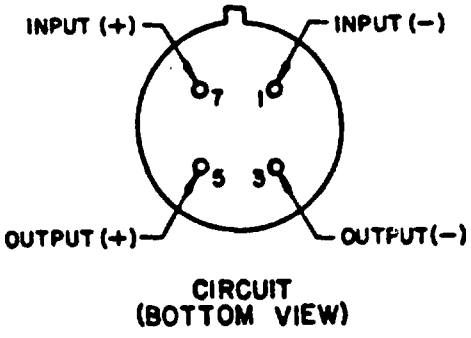

CIRCUIT
(BOTTOM VIEW)


INPUT VOLTAGE RANGE:	4.0 TO 7 VDC
RATED TURN-ON VOLTAGE:	5.0 VDC
RATED TURN-OFF VOLTAGE:	1.0 VDC MAXIMUM
INPUT CURRENT:	22 MA DC MAX
TURN-ON TIME:	10 MICROSECONDS MAX
TURN-OFF TIME:	15 MICROSECONDS MAX
RATED OUTPUT VOLTAGE:	40 VDC
OUTPUT VOLTAGE DROP:	.5 VDC MAX
POWE DISSIPASTION:	260 mW MAX AT RATED VOLTAGE


PART NUMBER: M28750/6-001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, SOLID STATE, HERMETICALLY SEALED, ISOLATED, 100MA, 250 V DC, SIGNAL SWITCHING, SPST(N.O.)

MIL-R-28750/7

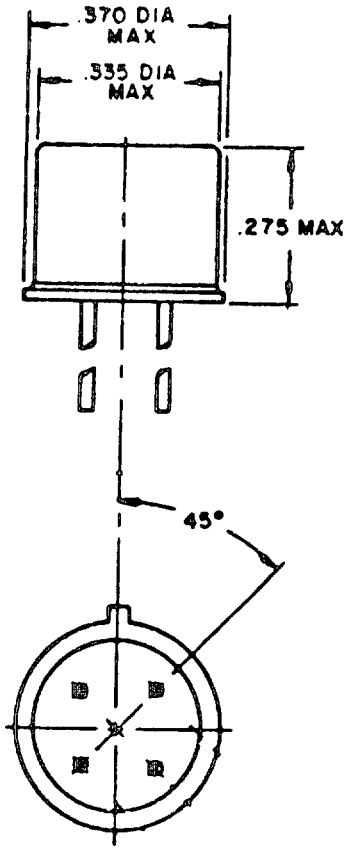

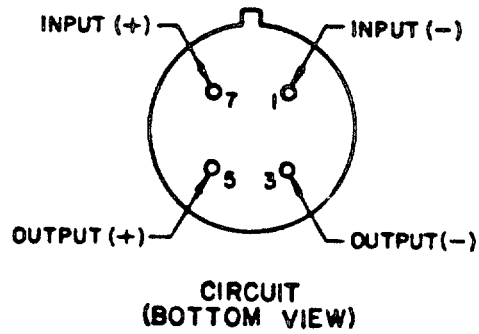


CIRCUIT
(BOTTOM VIEW)

INPUT VOLTAGE RANGE:	4.0 TO 7 VDC
RATED TURN-ON VOLTAGE:	5.0 VDC
RATED TURN-OFF VOLTAGE:	1.0 VDC MAXIMUM
INPUT CURRENT:	22 MA DC MAX
TURN-ON TIME:	10 MICROSECONDS MAX
TURN-OFF TIME:	75 MICROSECONDS MAX
RATED OUTPUT VOLTAGE:	250 VDC
OUTPUT VOLTAGE DROP:	.5 VDC MAX
POWER DISSIPATION:	260 mW MAX AT RATED VOLTAGE
PART NUMBER:	M28750/7-001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, SOLID STATE, HERMETICALLY SEALED, OPTICALLY ISOLATED, 1 AMP, 0 VOLT TURN-ON, 40-440 HZ, POWE SWITCHING, SPST(N.O.)

MIL-R-28750/9

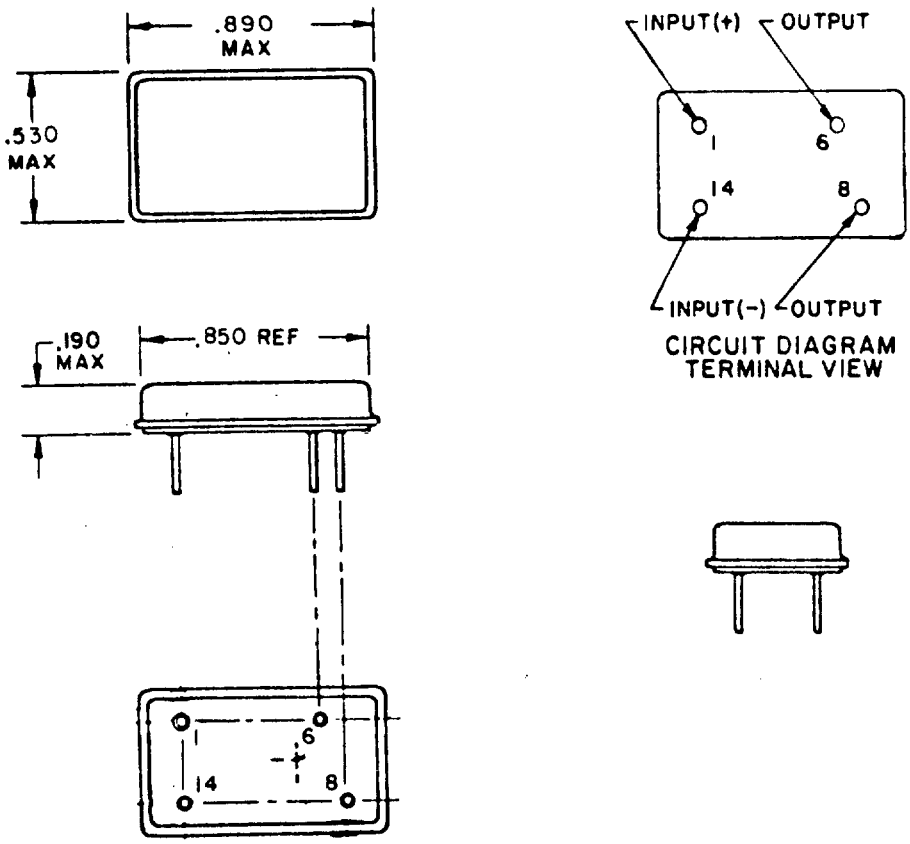

INPUT VOLTAGE RANGE:	3.8 TO 32 VDC
ASSURED TURN-ON VOLTAGE:	3.8 VDC MAXIMUM
ASSURED TURN-OFF VOLTAGE:	1.5 VDC MAXIMUM
INPUT CURRENT:	18 MA DC MAX
TURN-ON TIME:	1/2 CYCLE AC HZ
TURN-OFF TIME:	1 CYCLE AC HZ
RATED OUTPUT VOLTAGE:	250 VAC RMS MAX 40 - 440 HZ
OUTPUT VOLTAGE DROP:	1.5 VAC MAX
POWER DISSIPATION:	2 WATTS MAX
PART NUMBER:	M28750/9-001


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, HYBRID, ESTABLISHED RELAIBILITY

MIL-R-28776

SCOPE: THIS SECTION COVERS RELAYS THAT USE A COMBINATION OF SOLID STATE CIRCUIT INPUT ELEMENTS FUNCTIONING WITH AN ELECTROMECHANICAL RELAY THAT PERFORMS THE SWITCHING FUNCTIONS ASSOCIATED WITH CONTROL SYSTEM APPLICATIONS. THESE RELAYS ARE DESIGNED TO OPERATE IN LOW AND MEDIUM POWER SWITCHING CIRCUITS WITH CONTACT RATINGS UP TO 10 AMPERES ALTERNATING CURRENT OR DIRECT CURRENT. THESE RELAYS ARE INTENDED FOR USE IN ELECTRONIC AND COMMUNICATION EQUIPMENT AS A MEANS OF CONTROLLING THE CIRCUITS OF ELECTRICALLY OPERATED EQUIPMENT AND DEVICES.


PART NUMBER EXAMPLE:

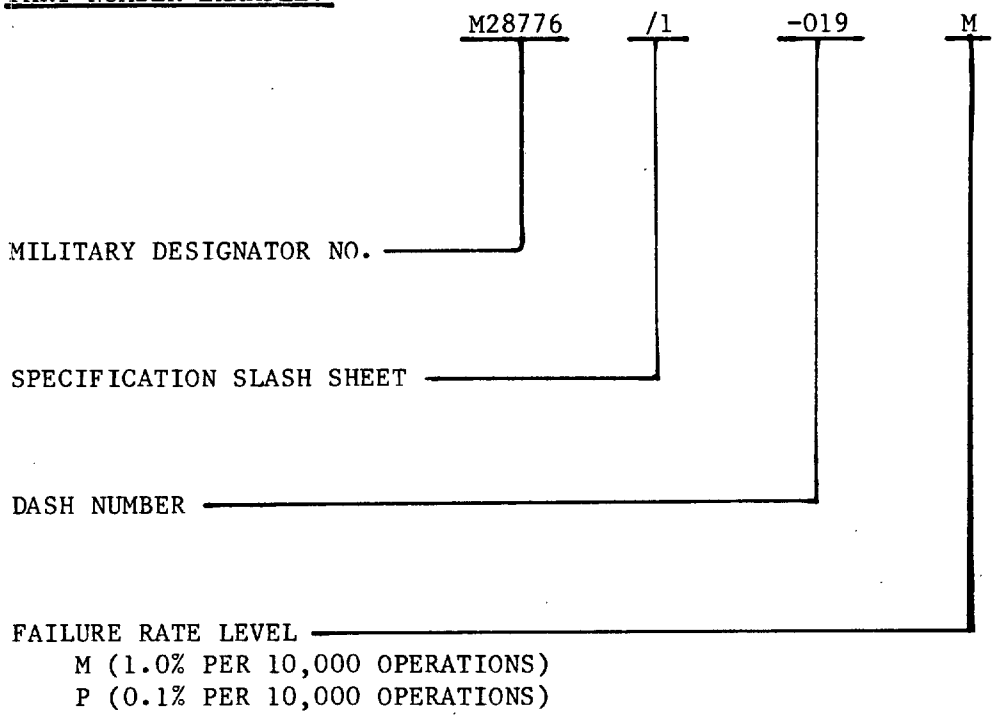


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, HYBRID, ESTABLISHED RELIABILITY, TRANSISTOR DRIVE, ELECTROMECHANICAL OUTPUT, DPOT, LOW LEVEL TO 1 AMPERE

MIL-R-28776/1



CIRCUIT DIAGRAM
TERMINAL VIEW

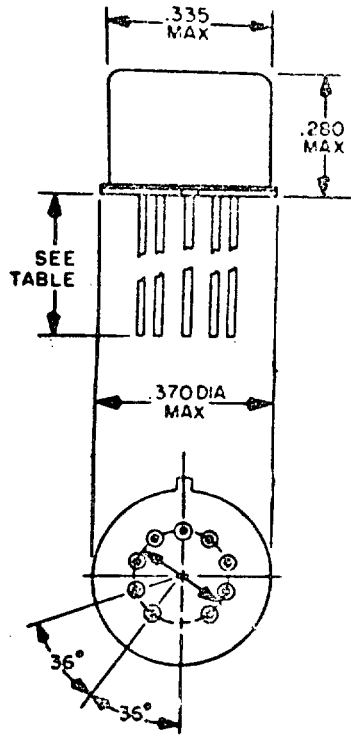

DASH NO. * LEAD LENGTH .500 MIN	SUPPLY VOLTAGE (VDC)		AT 25°C		OVER TEMP RANGE
			COIL RES. (OHMS)	MAX BASE CURRENT # TO ASSURE	MAX BASE CURRENT # TO ASSURE
	RATED	MAX	±10%	TURN ON(MA)	TURN ON(MA)
025	5.0	5.8	50	.75	3.00
026	6.0	8.0	98	.55	2.04
027	9.0	12.0	220	.36	1.36
028	12.0	16.0	390	.27	1.03
029	18.0	24.0	880	.16	0.68
030	26.5	32.0	1,560	.13	0.50

LIMIT BASE CURRENT TO 15mA MAXIMUM.
* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M28776/1- * FAILURE RATE: M AND P

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAYS, HYBRID, ESTABLISHED RELIABILITY, TRANSISTOR DRIVE, ELECTROMECHANICAL OUTPUT SPDT, LOW LEVEL TO 1.0 AMPERE W/INTERNAL DIODE

MIL-R-28776/5



CIRCUIT DIAGRAM
TERMINAL VIEW

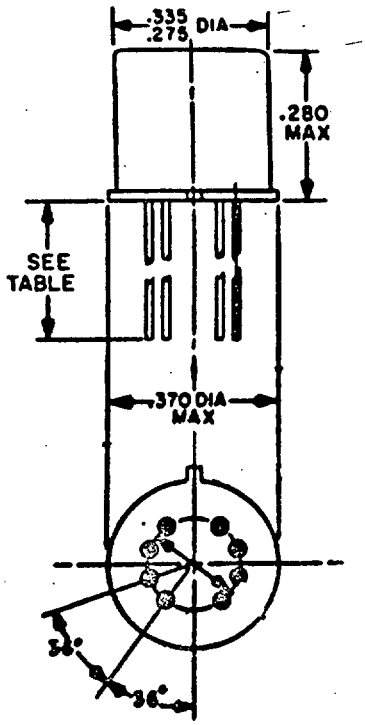

DASH NO. * LEAD LENGTH .500 MIN	SUPPLY VOLTAGE (VDC)		AT 25°C		OVER TEMP RANGE
			COIL RES. (OHMS)	MAX BASE CURRENT # TO ASSURE	MAX BASE CURRENT # TO ASSURE
	RATED	MAX	±10%	TURN ON(MA)	TURN ON(MA)
025	5.0	5.8	63	0.60	2.38
026	6.0	8.0	125	0.42	1.60
027	9.0	12.0	280	0.27	1.07
028	12.0	16.0	500	0.21	0.80
029	18.0	24.0	1,130	0.12	0.53
030	26.5	32.0	2,000	0.10	0.40

LIMIT BASE CURRENT TO 15mA MAXIMUM.
* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M28776/5- * FAILURE RATE: M AND P


CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, HYBRID, ESTABLISHED RELIABILITY, DPDT, LOW LWVWL TO 1.0 AMPERE, INTERNAL MOSFET DRIVE WITH ZENER DIODE GATE PROTECTION, DIODE COIL SUPPRESSION

MIL-R-28776/6

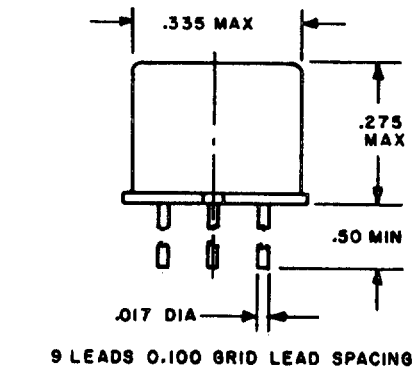



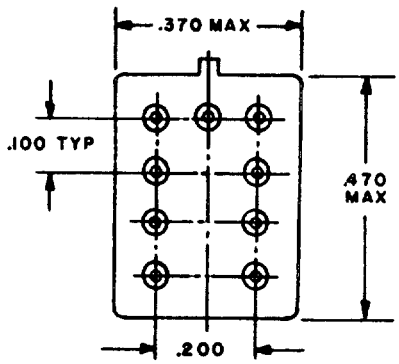

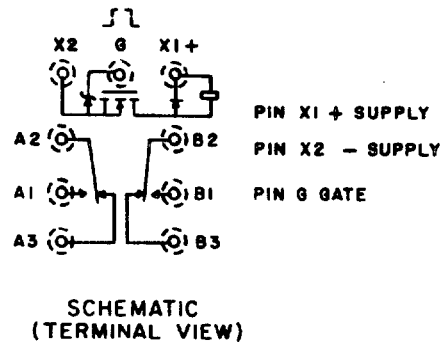

SCHEMATIC
(TERMINAL VIEW)

DASH NO. *	SUPPLY VOLTAGE (VDC)		AT 25°C		
			COIL RES. (OHMS)	COIL CURRENT (mA) AT RATED VOLTAGE	
	RATED	MAX		MAX	MIN
001	5.0	5.6	39	132.3	96.5
002	6.0	8.0	78	83.9	60.3
003	9.0	12.0	220	47.1	33.1
004	12.0	16.0	390	36.1	24.9
005	18.0	24.0	880	24.1	16.1
006	26.5	32.0	1560	19.9	12.9

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.


PART NUMBER: M28776/6- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAYS, HYBRID, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 1.0 AMPERE, INTERNAL MOSFET DRIVE WITH ZENER DIODE GATE PROTECTION, DIODE COIL SUPPRESSION

MIL-R-28776/7

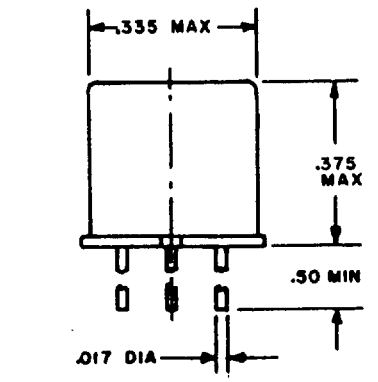

9 LEADS 0.100 GRID LEAD SPACING

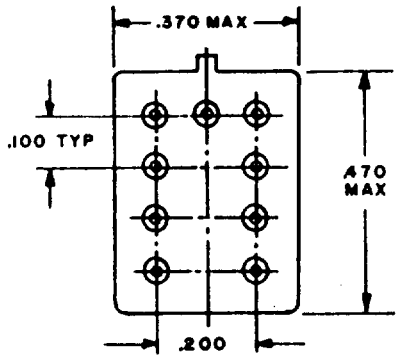

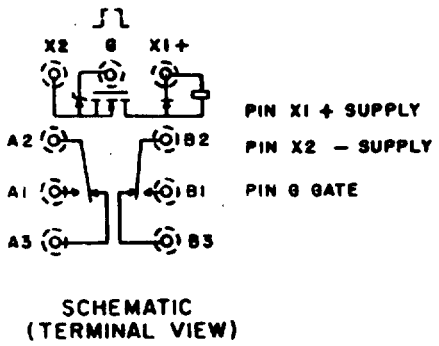

SCHEMATIC
(TERMINAL VIEW)

DASH NO. *	SUPPLY VOLTAGE (VDC)		AT 25°C		
			COIL RES. (OHMS)	COIL CURRENT (mA) AT RATED VOLTAGE	
	RATED	MAX		MAX	MIN
001	5.0	5.6	100	56	43
002	6.0	8.0	200	33	27
003	9.0	12.0	400	26.4	17.8
004	12.0	16.0	800	17.7	11.3
005	18.0	24.0	1600	13.8	8.4
006	26.5	32.0	3200	10.2	5.8

* THE PART NUMBER IS COMPLETED BY ADDING THE DASH NUMBER.

PART NUMBER: M28776/7- * FAILURE RATE: M

CONTACT DATA: LOAD RATINGS
HIGH LEVEL (RELAY CASE GROUNDED)
RESISTIVE 1.0 AMPERE AT 28 Vdc.
INDUCTIVE LOAD 0.2 AMPERE AT 28 Vdc WITH 0.32 HENRY INDUCTANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


RELAY, VACUUM

MIL-R-83725

SCOPE: THIS SECTION COVERS RELAYS WITH VACUUM DIELECTRIC FOR USE IN HIGH OR LOW VOLTAGE CIRCUITS OF ELECTRONIC AND ELECTRICAL EQUIPMENT. THESE RELAYS ARE INTENDED FOR USE TO PROVIDE ANTENNA SWITCHING, SWITCHING BETWEEN COUPLERS, TAP CHANGING ON R.F. COILS, SWITCHING BETWEEN TRANSMITTER AND RECEIVER, PULSE FORMING NETWORKS AND HEAVY DUTY SWITCHING IN POWER SUPPLIES.

TEMPERATURE RANGE: -55°C TO +125°C

PART NUMBER EXAMPLE: M83725/3-001

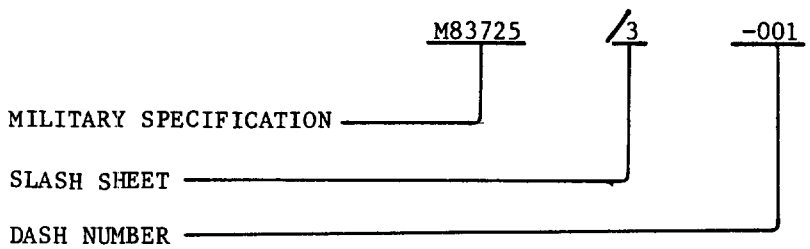

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, VACUUM, SPDT, 25 AMPERES RMS, 25 KILOVOLTS (PEAK)

MIL-R-83725/2

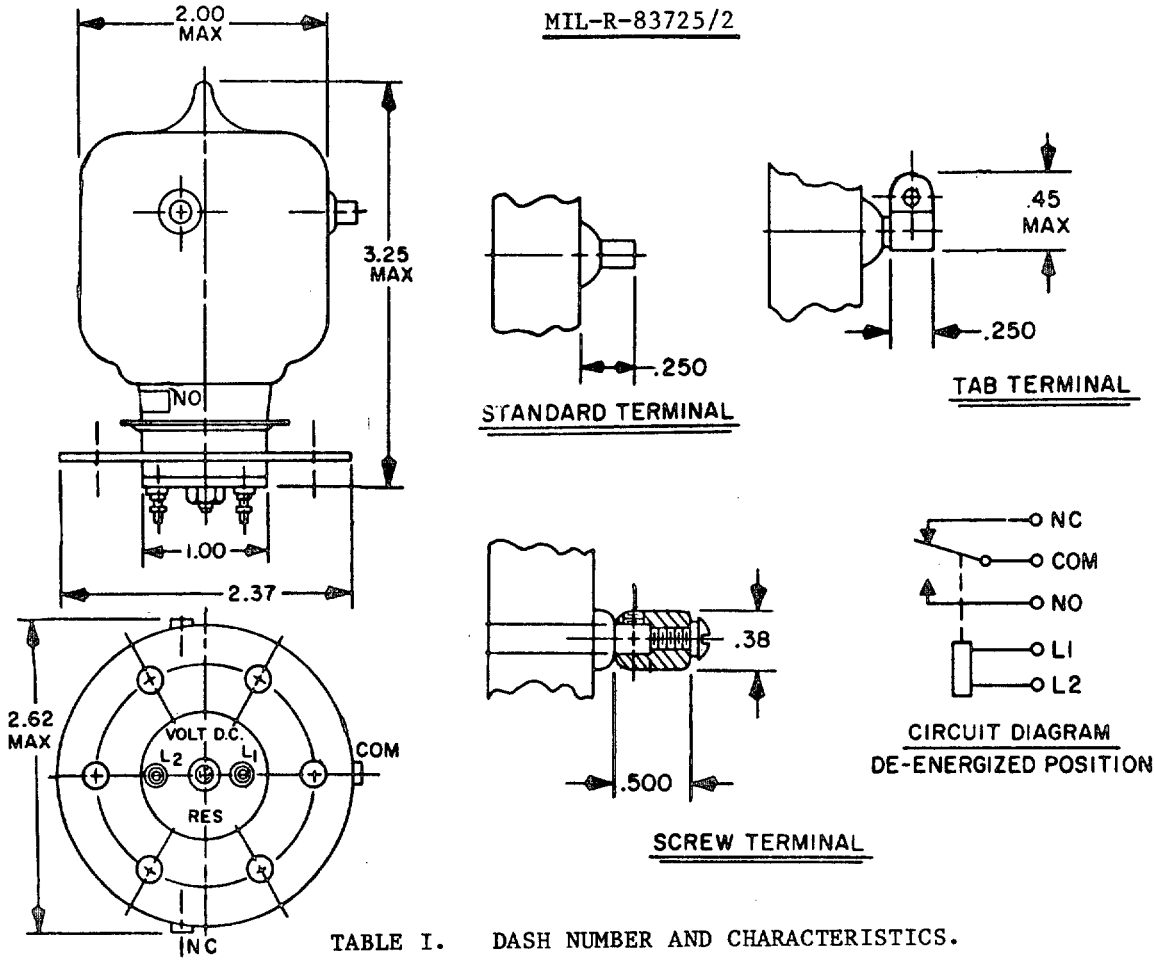


TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER *	TERMINATION	COIL VOLTAGE		COIL RESISTANCE
		NOM Vdc	MAX Vdc	OHMS
001	STANDARD	26.5	32	120
002	TAB	26.5	32	120
003	SCREW	26.5	32	120

PART NUMBER: M83725/2-*

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS

LOAD RTGS RESISTIVE: 25 AMPERES RMS, dc OR 60 Hz
13.5 AMPERES RMS, 2.5 MHz
8.0 AMPERES RMS, 16 MHz

VOLTAGE RTGS: 25 KILOVOLTS PEAK, dc OR 60 Hz
20 KILOVOLTS PEAK, 2.5 MHz
15 KILOVOLTS PEAK, 16 MHz

DUTY RATING: CONTINUOUS

CONTACT BOUNCE: NOT APPLICABLE

RELEASE TIME: 10 MILLISECOND, MAX


OPERATING TIME: 25 MILLISECOND, MAX


* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, VACUUM, SPDT, DC, 8 AMPERES


MIL-R-83725/3






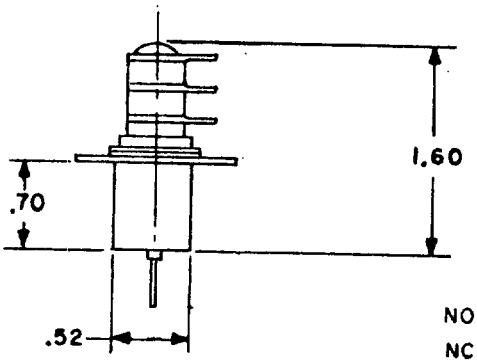

FLANGE MOUNT CONFIGURATION
(M83725/3-001)



CIRCUIT DIAGRAM

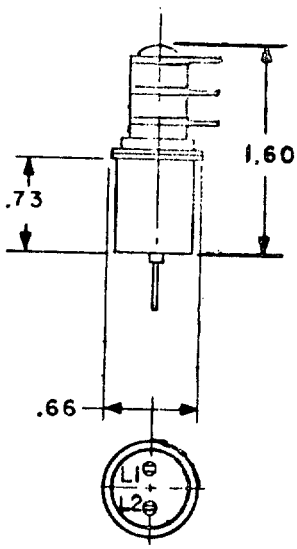

FLANGELESS CONFIGURATION
(M83725/3-002)

TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER *	COIL VOLTAGE		COIL RESISTANCE OHMS	
	NOM Vdc	MAX Vdc	MIN	MAX
001	26.5	32	800	1300
002	26.5	32	800	1300

PART NUMBER: M83725/3-*

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS

LOAD RATING: (NONSWITCHING) 8 AMPERES RMS, dc OR 60 Hz; 6 AMPERES RMS, 2.5 MHz; 4 AMPERES RMS, 16 MHz

LOAD RATING: (SWITCHING) 1.0 AMPERE @ 1 kVdc, RESISTIVE; 0.5 AMPERE @ 2 kVdc, RESISTIVE; 2.0 AMPERE RMS @ 1kV(PEAK) FROM 1kHz TO 60 MHz

DUTY RATING: CONTINUOUS

CONTACT BOUNCE: 5.0 MILLISECONDS, MAX

RELEASE TIME: 10 MILLISECOND, MAX @ 25°C

OPERATING TIME: 10 MILLISECOND, MAX @ 26.5 Vdc @ 25°C


VOLTAGE RTG: 2 kV(dc OR PEAK ac), OPERATING


* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

RELAY, VACUUM, SPDT, 3 AMPERES, DC LOAD SWITCHING, 2.5 KILOVOLTS DC

MIL-R-83725/4

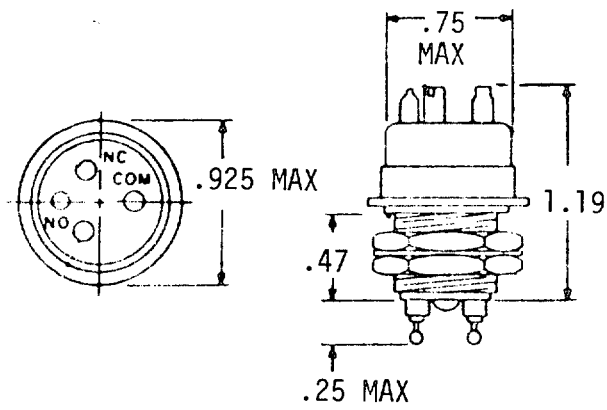



CIRCUIT DIAGRAM

TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER *	COIL VOLTAGE		COIL RESISTANCE
	NOM Vdc	MAX Vdc	OHMS
001	26.5	32	335

PART NUMBER: M83725/4-001

RELAYS ELECTRICAL CHARACTERISTIC REQUIRMENTS
LOAD RTGS RESISTIVE: 2.5 kV dc, 3 AMPERES
.1 kV dc, 18 AMPERES
DUTY RATING: CONTINUOUS
RELEASE TIME: 6 MILLISECONDS, MAX
OPERATE TIME: 6 MILLISECONDS, MAX
CONTACT BOUNCE: NOT APPLICABLE

* COMPLETE PART NO. SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2025-10-26T07:29Z
Check the source to verify that this is the current version before use.