MIL-STD-242G(NAVY), PART 8
16 August 1982
SUPERSEDING
MIL-STD-242F(NAVY), PART I,
300 SERIES

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS

CONNECTORS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D. C. 20363

ELECTRONIC EQUIPMENT PARTS, SELECTED STANDARDS, CONNECTORS

MIL-STD-242G(NAVY)-PART 8

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to: Commander, Naval Electronic Systems Command, Attn: ELEX 8111, Department of the Navy, Washington, D. C. 20363.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

FOREWORD

This Military Standard Part provides equipment designers and manufacturers with a list of Connectors having quality levels most acceptable in the design and construction of military systems and equipments. It also will aid to control and minimize the life cycle cost, improve reliability of equipment and minimize logistic support. The criteria used in selecting parts are as follows:

1. Application need. Parts must satisfy the widest range of design requiring reliable parts.

2. Technological maturity. The design of the part must be final and must use proven materials and technologies. It must have been in production for a period sufficient to ensure that the design and process parameters have been identified and adequate quality controls have been developed.

3. Availability. The part must be in production by at least one manufacturer whose previous performance indicates ability to qualify to specifications of this standard. There must also be reasonable expectation that the part will not be obsolescent for at least seven years. Microcircuits are excluded from this requirement because of rapid technological changes.

4. Test or usage history. Sufficient test or usage data to predict part reliability must be available.

In the event of conflict between the technical description of standard parts in this standard and the applicable specification shall govern.

Technical information included in this standard was obtained from military specifications and standards; no warranty is made of data accuracy, or that inclusion of these parts will assure equipment/systems will meet performance requirements of any contracts. The contractor is responsible for conducting necessary tests and inspections of selected parts to ensure that contract requirements are met.

Review activities:
Navy-AS, SH, AS
DLA-ES

User activity:
Navy-MC

Preparing activity:
Navy - EC

(Project Number 59GP-N031-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS

TABLE OF CONTENTS

SUBJECT/SECTION		PAGE NUMBER
100 Rectangular Rack and Panel		
104	MIL-C-24308	104.1 through 104.25
108	MIL-C-28731	108.1 through 108.19
110	MIL-C-28748	110.1 through 110.37
112	MIL-C-28804	112.1 through 112.13
130 Circular, Threaded and Bayonet		
134	MIL-C-5015 (MIL-C-85049/11)	134.1 through 134.56
138	MIL-C-28840	138.1 through 138.29
146	MIL-C-38999	146.1 through 146.32
160 Power, Plug and Receptacle		
164	W-C-596	164.1 through 164.6
170 Printed Circuit		
174	MIL-C-28754	174.1 through 174.70
176	MIL-C-55302	176.1 through 176.74
176	MIL-C-21097	176.75 through 176.77
180 Radio Frequency		
182	MIL-C-39012	182.1 through 182.49
190 Plug and Receptacle, High Density		
192	MIL-C-22992	192.1 through 192.46
210 Test Point		
210	MIL-C-39024	210.1 through 210.12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS

1. SCOPE.

1.1 Scope. This standard establishes the requirements for the selection of connectors used in the design and manufacture of Navy equipment.

1.2 Purpose. The purpose of this standard is to control and minimize the variety of connectors in Navy equipment in order to facilitate effective logistic support, improve quality and reduce cost.

2. REFERENCED DOCUMENTS.

2.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

W-C-596	Connectors, Power, Plug And Receptacle General Specifications For

MILITARY

MIL-C-5015	Connectors, Electrical, Circular Threaded General Specifications For
MIL-C-21097	Connectors, Electrical, Printed Circuit General Specifications For
MIL-C-22992	Connectors, Electrical, Plug And Receptacle, High Density General Specifications For
MIL-C-24308	Connectors, Electrical, Rectangular, Rack And Panel General Specifications For
MIL-C-28731	Connectors, Electrical, Rectangular, Rack And Panel General Specifications For
MIL-C-28748	Connectors, Electrical, Rectangular, Rack And Panel General Specifications For
MIL-C-28754	Connectors, Electrical, Printed Circuit General Specifications For
MIL-C-28804	Connectors, Electrical, Rectangular, Rack And Panel General Specifications For
MIL-C-28840	Connectors, Electrical, Circular Threaded, High Density General Specifications For
MIL-C-38999	Connectors, Electrical, Circular Threaded, High Density General Specifications For
MIL-C-39012	Connectors, Radio Frequency, Coaxial General Specifications For
MIL-C-39024	Connectors, Electrical, Test Point General Specifications For
MIL-C-55302	Connectors, Electrical, Printed Circuit General Specifications For

STANDARDS

MILITARY

MIL-STD-1560	Insert Arrangements For MIL-C-38999
MIL-STD-1651	Insert Arrangements For MIL-C-5015 And MIL-C-22992
MIL-STD-1698	Insert Arrangements For MIL-C-28840

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS.

3.1 The terms used in this standard are defined in referenced documents.

4. GENERAL REQUIREMENTS.

4.1 Selection of devices. Connectors shall be selected from the types listed in this standard. The variety of types used in any Navy equipment shall be the minimum necessary to provide satisfactory performance and the contractor (hardware designer/builder) shall exercise all reasonable design choices to achieve this objective.

4.2 Criteria for inclusion in this standard. The following are criteria for inclusion:

a. The device must satisfy a wide range of design requirements.
b. At least one manufacturer is qualified to the applicable detail specification.
c. There is reasonable assurance that the device will be available for at least seven years.

4.3 Connector characteristics. The characteristics listed herein are for reference only and are intended as an aid in selecting devices. The applicable detail specification shall be used for all final design criteria.

4.4 Conflict of data. In the event of conflict between the technical description of devices in this standard and the applicable detail specification, the detail specification shall govern.

5. CONNECTOR IDENTIFICATION.

5.1 Connector identification is the part number as listed in this standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, RECEPTACLE, SOCKET CONTACTS, GENERAL PURPOSE

MIL-C-24308

SCOPE: THIS SECTION COVERS POLARIZED SHELL MINIATURE RACK AND PANEL CONNECTORS, WITH REMOVABLE CRIMP AND NON-REMOVABLE SOLDER-TYPE CONTACTS. THESE ARE INTENDED FOR GENERAL USE. CLASSES G AND N CONNECTORS ARE FOR USE IN NONENVIRONMENT-RESISTING APPLICATIONS WHERE THE OPERATING TEMPERATURE RANGE OF -55°C TO +125°C AND CLASS N SHOULD BE USED IN APPLICATION WHEREIN PRESENCE OF RESIDUAL MAGNETISM MUST BE HELD TO A VERY LOW LEVELS TO AVOID INTERFERENCE WITH NEARBY SENSITIVE INSTRUMENTATION.

CLASS G, SOLDER TYPE

MIL-C-24308/1

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/1-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18269-1	MS18273-1	9	20	MS18281-1
2	2	MS18269-2	MS18274-1	15		
3	3	MS18269-3	MS18275-1	25		
4	4	MS18269-4	MS18276-1	37		
5	5	MS18269-5	MS18277-1	50		
23	1	MS18269-13	MS18273-1	9		
24	2	MS18269-14	MS18274-1	15		
25	3	MS18269-15	MS18275-1	25		
26	4	MS18269-16	MS18276-1	37		
27	5	MS18269-17	MS18277-1	50		

NOTE--MATE WITH CONNECTORS SPECIFIED IN MIL-C-24308/3, /4, /7, /8, /9 AND /24.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED
SHELL, RACK AND PANEL, RECEPTACLE, SOCKET CONTACT, GENERAL
PURPOSE, CLASS G, CRIMP TYPE

MIL-C-24308/2

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/2-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18270-1	MS18273-1	9	20	M39029/63
2	2	MS18270-2	MS18274-1	15		
3	3	MS18270-3	MS18275-1	25		
4	4	MS18270-4	MS18276-1	37		
5	5	MS18270-5	MS18277-1	50		
11	1	MS18270-1	MS18273-2	15	22	M39029/57
12	2	MS18270-2	MS18274-2	26		
13	3	MS18270-3	MS18275-2	44		
14	4	MS18270-4	MS18276-2	62		
15	5	MS18270-5	MS18277-2	78		
16	6	MS18270-6	MS14004-1	104		
242	5	MS18270-23	MS18277-3	17	20	M39029/63
				7	8	M39029/67
243	5	MS18270-23	MS18277-3			
244	5	MS18270-23	MS18277-3			
245	5	MS18270-23	MS18277-3			
246	5	MS18270-23	MS18277-3			
32	5	MS18270-23	MS18277-2	78	22	M39029/57
33	6	MS18270-24	MS14004-1	104	22	
335	3	MS18270-15	MS18275-1	44		M39029/63
342	1	MS18270-19	MS18273-1	15		
343	2	MS18270-20	MS18274-1	26		
344	3	MS18270-21	MS18275-1	44		
345	4	MS18270-22	MS18276-1	62		
346	5	MS18270-23	MS18277-1	78		

NOTE---MATE WITH CONNECTORS SPECIFIED IN MIL-C-24308/3, /4, /7, /8, /9, AND /24.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE,
POLARIZED SHELL, RACK AND PANEL,
PIN CONTACTS, GENERAL PURPOSE, CLASS G, SOLDER TYPE

MIL-C-24308/3

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/3-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18268-1	MS18273-1	9	20	MS18281-2
2	2	MS18268-2	MS18274-1	15		
3	3	MS18268-3	MS18275-1	25		
4	4	MS18268-4	MS18276-1	37		
5	5	MS18268-5	MS18277-1	50		
12	1	MS18268-7	MS18273-1	9	20	
13	2	MS18268-8	MS18274-1	15		
14	3	MS18268-9	MS18275-1	25		
15	4	MS18268-10	MS18276-1	37		
16	5	MS18268-11	MS18277-1	50		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED
SHELL, RACK AND PANEL, PIN CONTACTS, GENERAL PURPOSE,
CLASS G, CRIMP TYPE

MIL-C-24308/4

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/4-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18271-1	MS18273-1	9	20	M39029/64
2	2	MS18271-2	MS18274-1	15		
3	3	MS18271-3	MS18275-1	25		
4	4	MS18271-4	MS18276-1	37		
5	5	MS18271-5	MS18277-1	50		
11	1	MS18271-1	MS18274-2	15	22	M39029/58
12	2	MS18271-2	MS18274-2	26		
14	4	MS18271-4	MS18276-2	62		
15	5	MS18271-5	MS18277-2	78		
16	6	MS18271-6	MS14004-1	104		
302	1	MS18271-7	MS18273-1	9	20	M39029/64
303	2	MS18271-8	MS18274-1	15		
304	3	MS18271-9	MS18275-1	25		
305	4	MS18271-10	MS18276-1	37		
306	5	MS18271-11	MS18277-1	50		
307	1	MS18271-7	MS18273-2	9	20	M39029/58
308	2	MS18271-8	MS18274-2	15		
309	3	MS18271-9	MS18275-2	25		
310	4	MS18271-10	MS18276-2	37		
311	5	MS18271-11	MS18277-2	50		
312	6	MS18271-12	MS14004-1	104	22	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINATURE, POLARIZED SHELL, RACK AND PANEL, RECEPTACLE, SOCKET CONTACT, NONMAGNETIC, CLASS N, SOLDER TYPE

MIL-C-24308/5

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/5-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18269-1	MS18273-1	9	20	MS18281-1
2	2	MS18269-2	MS18274-1	15		
3	3	MS18269-3	MS18275-1	25		
4	4	MS18269-4	MS18276-1	37		
5	5	MS18269-5	MS18277-1	50		
12	1	MS18269-13	MS18273-1	9		
13	2	MS18269-14	MS18274-1	15		
14	3	MS18269-15	MS18275-1	25		
15	4	MS18269-16	MS18276-1	37		
16	5	MS18269-17	MS18277-1	50		

NOTE--MATE WITH CONNECTORS SPECIFIED IN MIL-C-24308/3, /4, /7, /8, /9, AND /24.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, RECEPTACLE, SOCKET CONTACT, NONMAGNETIC, CLASS N, CRIMP TYPE

MIL-C-24308/6

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/6-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18270-1	MS18273-1	9	20	M39029/63
2	2	MS18270-2	MS18274-1	15		
3	3	MS18270-3	MS18275-1	25		
4	4	MS18270-4	MS18276-1	37		
5	5	MS18270-5	MS18277-1	50		
11	1	MS18270-1	MS18273-2	15	22	M39029/57
12	2	MS18270-2	MS18274-2	26		
13	3	MS18270-3	MS18275-2	44		
14	4	MS18270-4	MS18276-2	62		
15	5	MS18270-5	MS18277-2	78		
16	6	MS18270-6	MS14004-1	104		
259	1	MS18270-19	MS18273-1	9	20	M39029/63
260	2	MS18270-20	MS18274-1	15		
261	3	MS18270-21	MS18275-1	25		
262	4	MS18270-22	MS18276-1	37		
263	5	MS18270-23	MS18277-1	50		
453	1	MS18270-19	MS18273-1	9	20	M39029/63
454	2	MS18270-20	MS18274-1	15		
455	3	MS18270-21	MS18275-1	25		
456	4	MS18270-22	MS18276-1	37		
457	5	MS18270-23	MS18277-1	50		
458	1	MS18270-19	MS18273-2	15	22	M39029/57
459	2	MS18270-20	MS18274-2	26		
460	3	MS18270-21	MS18275-2	44		
461	4	MS18270-22	MS18276-2	62		
462	5	MS18270-23	MS18277-2	78		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL,
RACK AND PANEL, PIN CONTACTS, NONMAGNETIC, CLASS M, SOLDER TYPE

MIL-C-24308/7

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/7-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18268-1	MS18273-1	9	20	MS18281-2
2	2	MS18268-2	MS18274-1	15		
3	3	MS18268-3	MS18275-1	25		
4	4	MS18268-4	MS18276-1	37		
5	5	MS18268-5	MS18277-1	50		
12	1	MS18268-7	MS18273-1	9	20	
13	2	MS18268-8	MS18274-1	15		
14	3	MS18268-9	MS18275-1	25		
15	4	MS18268-10	MS18276-1	37		
16	5	MS18268-11	MS18277-1	50		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED
SHELL, RACK AND PANEL, PIN CONTACTS, NONMAGNETIC, CLASS N, CRIMP TYPE

MIL-C-24308/8

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/8-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18271-1	MS18273-1	9	20	M39029/64
2	2	MS18271-2	MS18274-1	15		
3	3	MS18271-3	MS18275-1	25		
4	4	MS18271-4	MS18276-1	37		
5	5	MS18271-5	MS18277-1	50		
11	1	MS18271-1	MS18273-2	15	22	M39029/57
12	2	MS18271-2	MS18274-2	26		
13	3	MS18271-3	MS18275-2	44		
14	4	MS18271-4	MS18276-2	62		
15	5	MS18271-5	MS18277-2	78		
16	5	MS18271-6	MS14804-1	104		
302	1	MS18271-7	MS18273-1	9	20	M39029/64
303	2	MS18271-8	MS18274-1	15		
304	3	MS18271-9	MS18275-1	25		
305	4	MS18271-10	MS18276-1	37		
306	5	MS18271-11	MS18277-1	50		
307	1	MS18271-7	MS18273-2	15	22	M39029/57
308	2	MS18271-8	MS18274-2	26		
309	3	MS18271-9	MS18275-2	44		
310	4	MS18271-10	MS18276-2	62		
311	5	MS18271-11	MS18277-2	78		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, PLUG, PIN CONTACTS, HERMETIC, CLASS H

MIL-C-24308/9

TABLE I. DESIGN STANDARDS

PART NUMBER M24308/9-	SHELL SIZE	SHELL MS NO.	INSERT MS NO.	CONTACT		CONTACTS TERMINALS	
				NO. OF	SIZE OF	SOLDER CUP	EYELET
1	1	MS18272-1	MS18273-1	9	20	MS18281-4	
2	2	MS18272-2	MS18274-1	15			
3	3	MS18272-3	MS18275-1	25			
5	5	MS18272-5	MS18277-1	50			
6	1	MS18272-1	MS18273-1	9	20		MS18281-3
7	2	MS18272-2	MS18274-1	15			
8	3	MS18272-3	MS18275-1	25			
10	5	MS18272-5	MS18277-1	50			
11	1	MS18272-6	MS18273-1	9	20	MS18281-4	
12	2	MS18272-7	MS18274-1	15			
13	3	MS18272-8	MS18275-1	25			
15	5	MS18272-10	MS18277-1	50			
16	1	MS18272-6	MS18273-1	9	20		MS18281-3
17	2	MS18272-7	MS18274-1	15			
18	3	MS18272-8	MS18275-1	25			
20	5	MS18272-10	MS18277-1	50			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE,
POLARIZED SHELL, RACK AND PANEL,
SOCKET CONTACTS, STRAIGHT PRINTED CIRCUIT BOARD TERMINATION TYPES

MIL-C-24308/23

TABLE 1. DESIGN STANDARDS.

PART NUMBER M24308/23-	SHELL SIZE	SHELL NUMBER MS14058	INSERT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER #
1	1	-1	MS18273-1	9	20	MS18281-1
2	2	-2	MS18274-1	15		
3	3	-3	MS18275-1	25		
4	4	-4	MS18276-1	37		
5	5	-5	MS18277-1	50		
7	1	-7	MS18273-1	9	20	
8	2	-8	MS18274-1	15		
9	3	-9	MS18275-1	25		
10	4	-10	MS18276-1	37		
11	5	-11	MS18277-1	50		
13	1	-13	MS18273-1	9	20	
14	2	-14	MS18274-1	15		
15	3	-15	MS18275-1	25		
16	4	-16	MS18276-1	37		
17	5	-17	MS18277-1	50		
19	1	-19	MS18273-1	9	20	
20	2	-20	MS18274-1	15		
21	3	-21	MS18275-1	25		
22	4	-22	MS18276-1	37		
23	5	-23	MS18277-1	50		

CONTACTS ARE IN ACCORDANCE WITH MS18281 EXCEPT THE TERMINATION END IS MODIFIED IN ACCORDANCE WITH MS14058 FOR CONNECTION TO PRINTED CIRCUIT BOARD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED
SHELL, RACK AND PANEL, PIN CONTACTS, PRINTED CIRCUIT
BOARD TERMINATION TYPES

MIL-C-24308/24

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/24-	SHELL SIZE	SHELL MS NUMBER	INSERT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER #
1	1	MS14059-1	MS18273-1	9	20	MS18281-2
2	2	MS14059-2	MS18274-1	15		
3	3	MS14059-3	MS18275-1	25		
4	4	MS14059-4	MS18276-1	37		
5	5	MS14059-5	MS18277-1	50		
7	1	MS14059-7	MS18273-1	9	20	
8	2	MS14059-8	MS18274-1	15		
9	3	MS14059-9	MS18275-1	25		
10	4	MS14059-10	MS18276-1	37		
11	5	MS14059-11	MS18277-1	50		
13	1	MS14059-13	MS18273-1	9	20	
14	2	MS14059-14	MS18274-1	15		
15	3	MS14059-15	MS18275-1	25		
16	4	MS14059-16	MS18276-1	37		
17	5	MS14059-17	MS18277-1	50		
19	1	MS14059-19	MS18273-1	9	20	
20	2	MS14059-20	MS18274-1	15		
21	3	MS14059-21	MS18275-1	25		
22	4	MS14059-22	MS18276-1	37		
23	5	MS14059-23	MS18277-1	50		
25	1	MS14059-25	MS18273-1	9	20	
26	2	MS14059-26	MS18274-1	15		
27	3	MS14059-27	MS18275-1	25		
28	4	MS14059-28	MS18276-1	37		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED
SHELL, RACK AND PANEL, PIN CONTACTS, PRINTED CIRCUIT
BOARD TERMINATION TYPES

MIL-C-24308/24

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/24-	SHELL SIZE	SHELL MS NUMBER	INSERT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER #
29	5	MS14059-29	MS18277-1	50	20	MS18281-2
31	1	MS14059-31	MS18273-1	9		
32	2	MS14059-32	MS18274-1	15		
33	3	MS14059-33	MS18275-1	25		
34	4	MS14059-34	MS18276-1	37		
35	5	MS14059-35	MS18277-1	50		
37	1	MS14059-37	MS18273-1	9	20	
38	2	MS14059-38	MS18274-1	15		
39	3	MS14059-39	MS18275-1	25		
40	4	MS14059-40	MS18276-1	37		
41	5	MS14059-41	MS18277-1	50		
43	1	MS14059-43	MS18273-1	9	20	
44	2	MS14059-44	MS18274-1	15		
45	3	MS14059-45	MS18275-1	25		
46	4	MS14059-46	MS18276-1	37		
47	5	MS14059-47	MS19277-1	50		
49	1	MS14059-49	MS18273-1	9	20	
50	2	MS14059-50	MS18274-1	15		
51	3	MS14059-51	MS18275-1	25		
52	4	MS14059-52	MS18276-1	37		
53	5	MS14059-53	MS18277-1	50		
55	1	MS14059-55	MS18273-1	9	20	
56	2	MS14059-56	MS18274-1	15		
57	3	MS14059-57	MS18275-1	25		
58	4	MS14059-58	MS18276-1	37		
59	5	MS14059-59	MS18277-1	50		

CONTACTS ARE IN ACCORDANCE WITH MS18281 EXCEPT THE TERMINATION END IS MODIFIED IN ACCORDANCE WITH MS14059 FOR CONNECTION TO PRINTED CIRCUIT BOARDS.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS18268

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, SOLDER TYPE

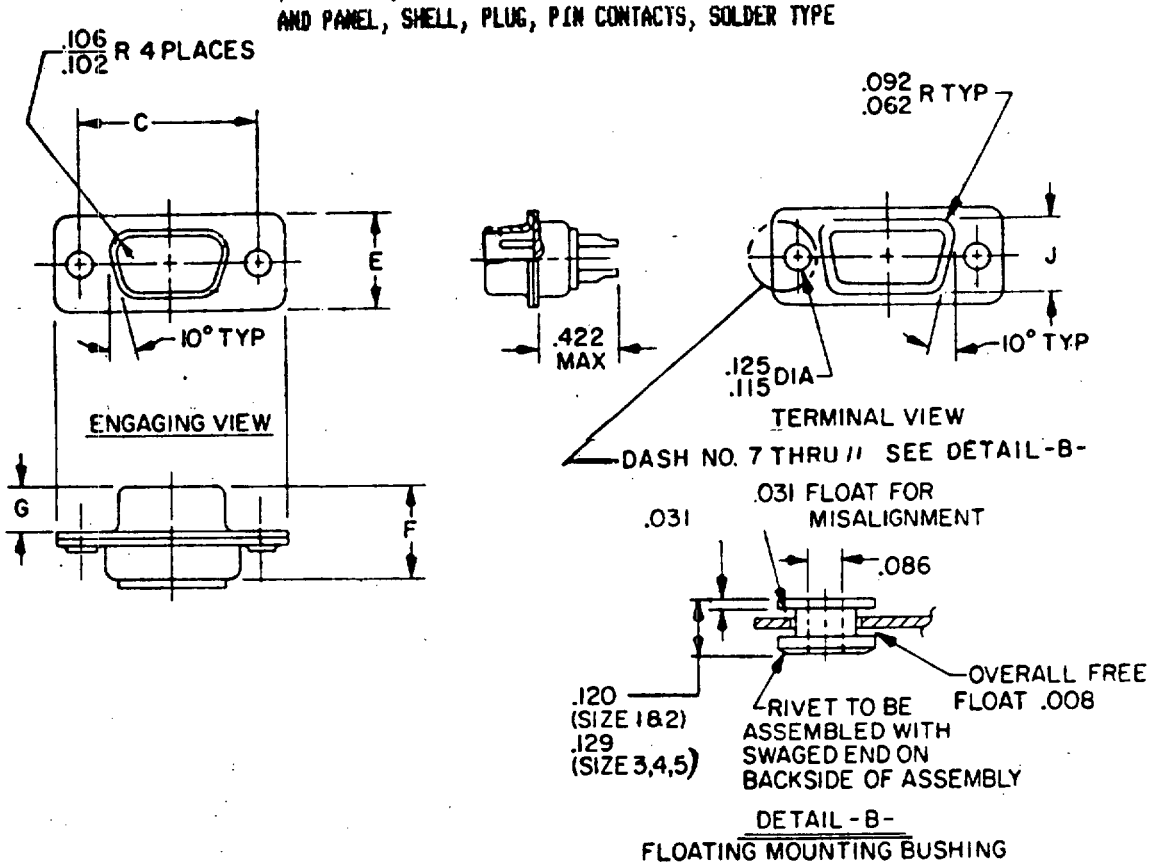


TABLE I. DIMENSIONS AND SHELL SIZE

MS NUMBER	SHELL SIZE	DIMENSIONS			
		C	E	F	G
MS18268-1	1	.989 .979	.509 .479	.432 .412	.238 .229
MS18268-2	2	1.317 1.307			
MS18268-3	3	1.857 1.847		.436 .416	.236 .224
MS18268-4	4	2.505 2.495			
MS18268-5	5	2.411 2.401	.620 .590		
MS18268-7	1	SAME AS MS18268-1 EXCEPT PER DETAIL B			
MS18268-8	2	MS18268-2			
MS18268-9	3	MS18268-3			
MS18268-10	4	MS18268-4			
MS18268-11	5	MS18268-5			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS18269

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, RECEPTACLE, SOCKET, SOLDER TYPE

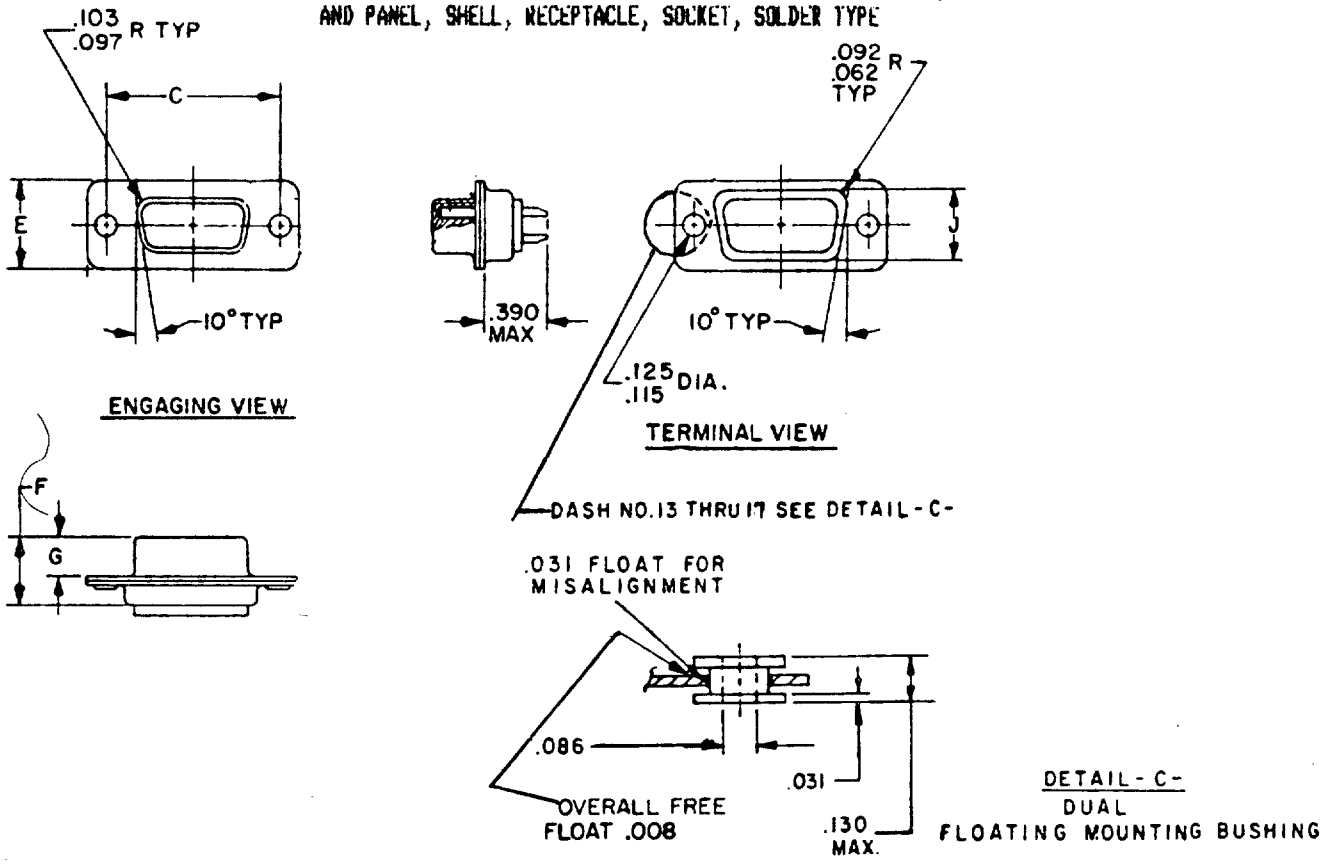



TABLE 1. DIMENSIONS AND SHELL SIZE

MS NUMBER	SHELL SIZE	DIMENSIONS				
		C	E	F	G	J
MS18269-1	1	.989 .979	.509 .479	.439 .419	.248 .238	.432 .412
MS18269-2	2	1.317 1.307	.509 .479	.439 .419	.248 .238	.432 .412
MS18269-3	3	1.857 1.847	.509 .479	.439 .419	.248 .238	.432 .412
MS18269-4	4	2.505 2.495	.509 .479	.439 .419	.248 .238	.432 .412
MS18269-5	5	2.411 2.401	.620 .590	.439 .419	.248 .238	.544 .524
MS18269-13	1	SAME AS MS18269-1 EXCEPT PER DETAIL C				
-14	2	MS18269-2				
-15	3	MS18269-3				
-16	4	MS18269-4				
-17	5	MS18269-5				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS18270

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, RECEPTACLE SOCKET CONTACTS, CRIMP TYPE

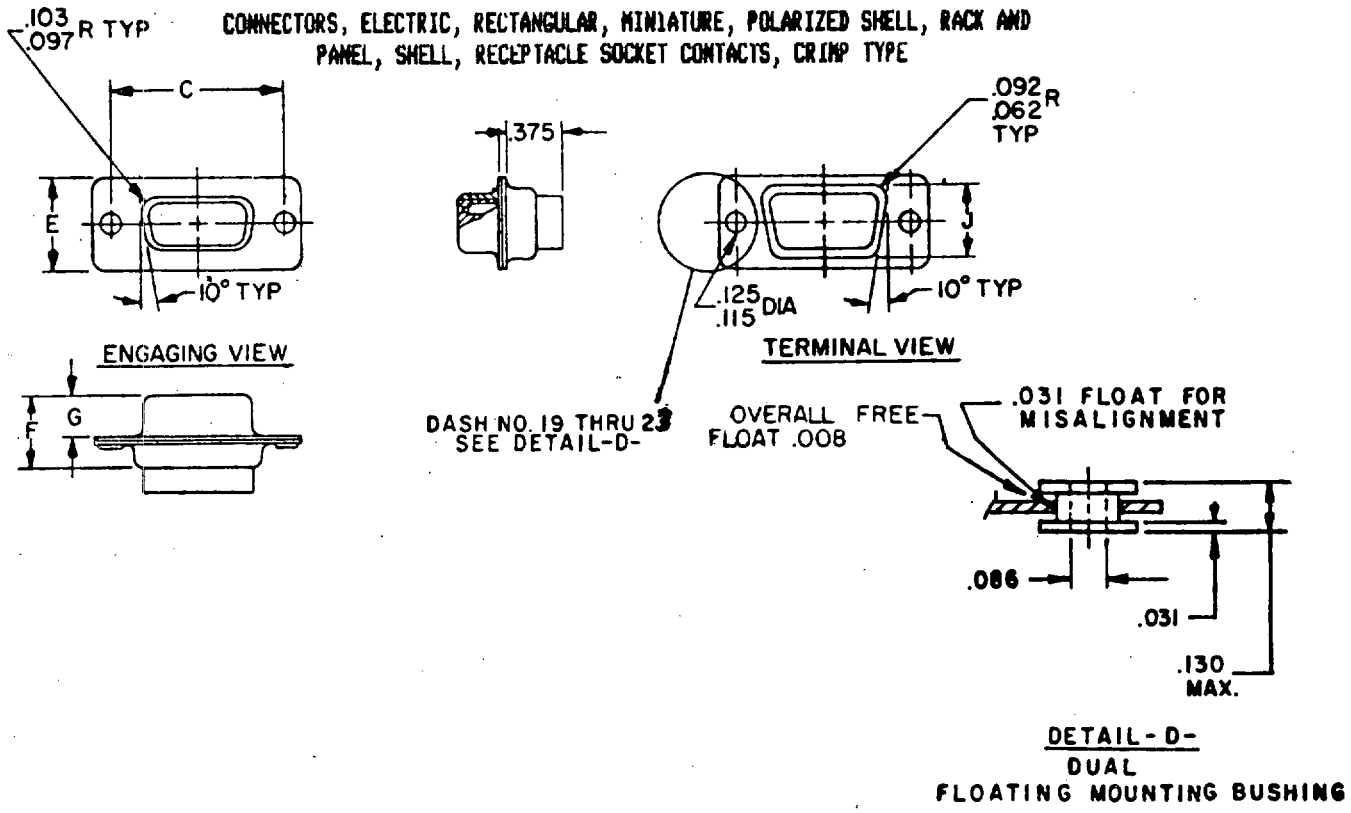

DETAIL-D-
DUAL
FLOATING MOUNTING BUSHING

TABLE 1. DIMENSIONS AND SHELL SIZE.

MS NUMBER	SHELL SIZE	DIMENSIONS				
		C	E	F	G	J
MS18270-1	1	.989 .979	.509 .479	.439 .419	.248 .238	.432 .412
MS18270-2	2	1.317 1.307				
MS18270-3	3	1.857 1.847				
MS18270-4	4	2.505 2.495				
MS18270-5	5	2.411 2.401	.620 .590			.544 .524
MS18270-6	6	2.505 2.495	.683 .653			.606 .586
MS18270-20	2	SAME AS MS18270-2 EXCEPT IN ACCORDANCE WITH DETAIL D				
MS18270-19	1	SAME AS MS18270-1 EXCEPT IN ACCORDANCE WITH DETAIL D				
MS18270-21	3	SAME AS MS18270-3 EXCEPT IN ACCORDANCE WITH DETAIL D				
MS18270-22	4	SAME AS MS18270-4 EXCEPT IN ACCORDANCE WITH DETAIL D				
MS18270-23	5	SAME AS MS18270-5 EXCEPT IN ACCORDANCE WITH DETAIL D				
MS18270-24	6	SAME AS MS18270-6 EXCEPT IN ACCORDANCE WITH DETAIL D				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS18271

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, CRIMP TYPE

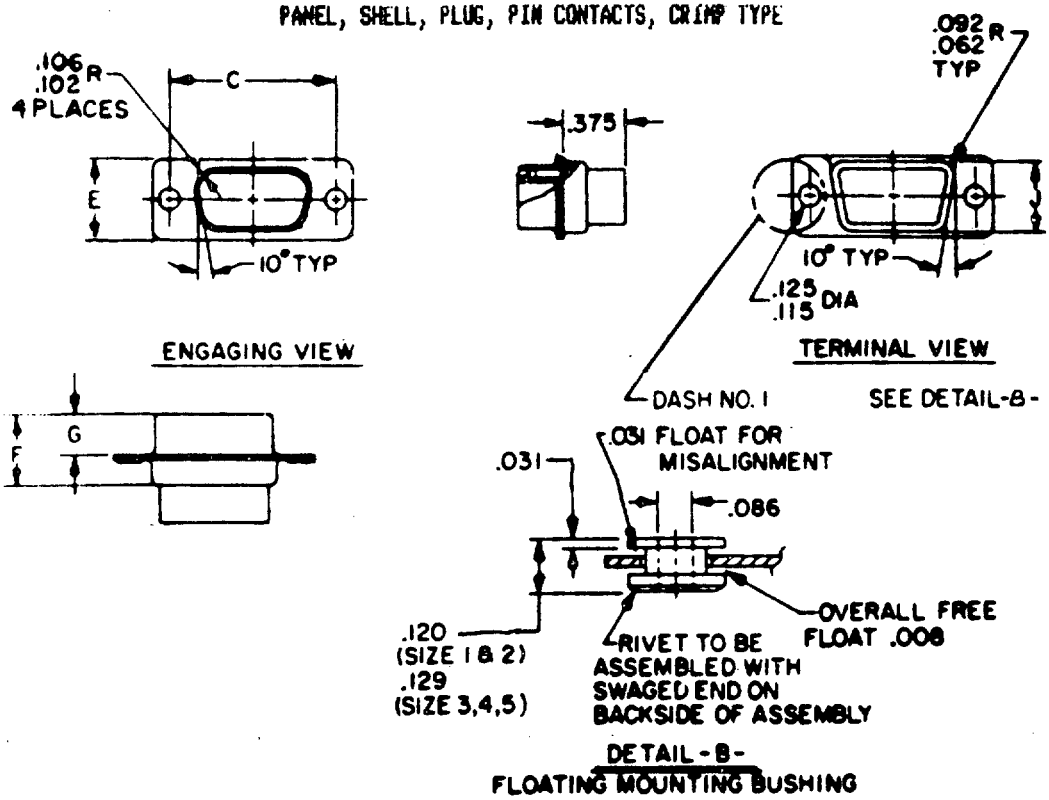



TABLE 1. DIMENSIONS AND SHELL SIZE

MS NUMBER	SHELL SIZE	DIMENSIONS				
		C	E	F	G	J
MS18271-1	1	.989 .979	.509 .479	.432 .412	.241 .229	.432 .412
MS18271-2	2	1.317 1.307				
MS18271-3	3	1.857 1.847		.436 .416	.236 .224	
MS18271-4	4	2.505 2.495				
MS18271-5	5	2.411 2.401	.620 .590			.544 .524
MS18271-6	6	2.505 2.495	.683 .653			.606 .586
MS18271-7	1	SAME AS MS18271-1 EXCEPT PER DETAIL B				
MS18271-8	2	MS18271-2				
MS18271-9	3	MS18271-3				
MS18271-10	4	MS18271-4				
MS18271-11	5	MS18271-5				
MS18271-12	6	MS18271-6				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS18272

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, HERMETIC PIN CONTACTS, CLASS H

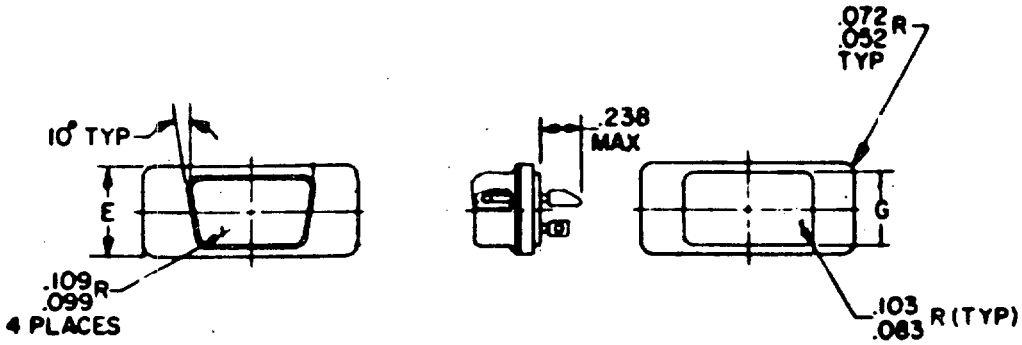

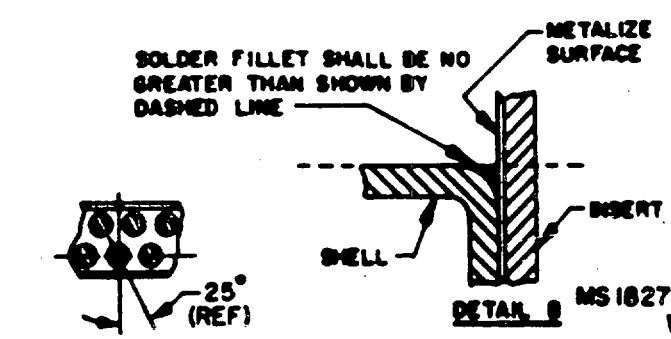


FIGURE 1
PART NUMBERS
MS 18272-1 THRU MS 18272-5
WITHOUT LOCKPOST




FIGURE 2
PART NUMBERS
MS 18272-6 THRU MS 18272-10
WITH LOCKPOST


TABLE I. DIMENSIONS AND SHELL SIZE.

MS NUMBER	SHELL SIZE	DIMENSIONS		
		E	G	J
MS18272-1	1	.508 .488	.379 .359	
MS18272-2	2			
MS18272-3	3			
MS18272-5	5	.620 .600	.510 .490	
MS18272-6	1	.508 .488	.379 .359	.989 .979
MS18272-7	2			1.317 1.307
MS18272-8	3			1.857 1.847
MS18272-10	5	.620 .600	.510 .490	2.411 2.401


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS18273

INSERT ARRANGEMENT, ELECTRICAL CONNECTOR, SHELL SIZE 1



ARRANGEMENT 1




ARRANGEMENT 2


MS NUMBER	ARRANGEMENT NUMBER	CONTACTS	
		NO. 20	NO. 22D
MS18273-1	1	9	
MS18273-2	2		15

MS18274

INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SHELL SIZE 2



ARRANGEMENT 1

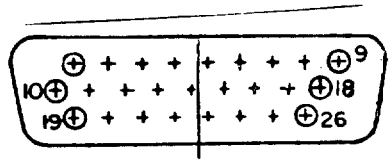


ARRANGEMENT 2

MS NUMBER	ARRANGEMENT NUMBER	CONTACTS			
		NO. 22D	NO. 20	NO. 16 SHIELDED	NO. 8 SHIELDED
MS18274-1	1	0	15	0	0
MS18274-2	2	26	0		


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS18275

INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SHELL SIZE 3



ARRANGEMENT 1

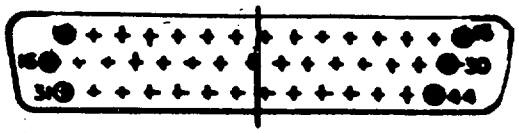


ARRANGEMENT 2


MS NUMBER	ARRANGEMENT NUMBER	CONTACTS			
		NO. 22D	NO. 20	NO. 16 SHIELDED	NO. 8 SHIELDED
MS18275-1	1	0	25	0	0
MS18275-2	2	44	0	0	0

MS18276

INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR SHELL SIZE 4



ARRANGEMENT 1

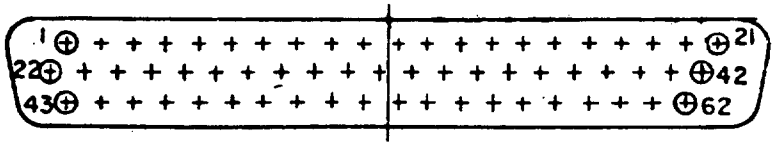


ARRANGEMENT 2

MS NUMBER	ARRANGEMENT NUMBER	CONTACTS			
		NO. 22D	NO. 20	NO. 16 SHIELDED	NO. 8 SHIELDED
MS18276-1	1	0	37	0	0
MS18276-2	2	62	0	0	0


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS18277


INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SHELL SIZE 5

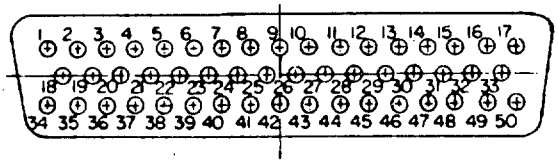

ARRANGEMENT 1

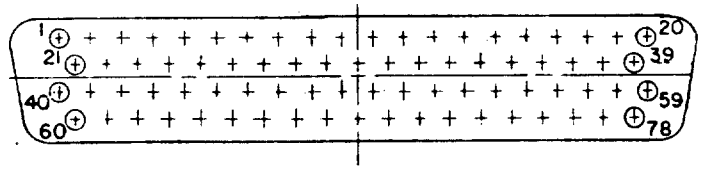

ARRANGEMENT 2

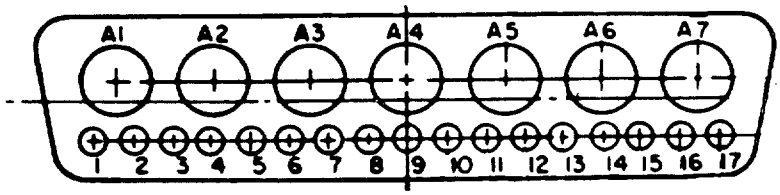


ARRANGEMENT 3

MS NUMBER	ARRANGEMENT NUMBER	CONTACTS			
		NO. 22D	NO. 20	NO. 16 SHIELDED	NO. 8 SHIELDED
MS18277-1	1	0	50	0	0
MS18277-2	2	78	0	0	0
MS18277-3	3	0	17	0	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS14058-*

CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RECEPTACLE, SOCKET CONTACTS, STRAIGHT PRINTED CIRCUIT BOARD TERMINATION TYPE

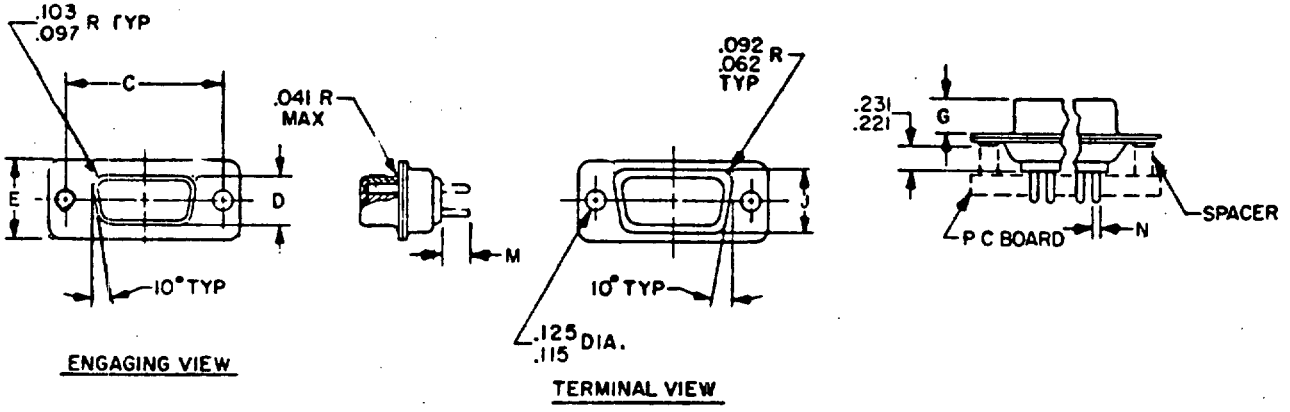

ENGAGING VIEW

TERMINAL VIEW

TABLE I. DIMENSIONS AND SHELL.


DASH NUMBER*	SHELL SIZE	DIMENSIONS					
		C	E	G	J	M	N
1	1	.989 .979	.509 .479	.248 .238	.432 .412	.185 .130	.033 .027
2	2	1.317 1.307					
3	3	1.857 1.847					
4	4	2.505 2.495					
5	5	2.411 2.401	.620 .590		.544 .524		
7	1	SAME AS 14058-1 EXCEPT FOR .125 BOARD, .030 PIN AND				.210 .155	
8	2	14058-2					
9	3	14058-3					
10	4	14058-4					
11	5	14058-5					
13	1	SAME AS 14058-1 EXCEPT FOR .094 BOARD, .040 PIN AND				.185 .130	.043 .037
14	2	14058-2					
15	3	14058-3					
16	4	14058-4					
17	5	14058-5					
19	1	SAME AS 14058-1 EXCEPT FOR .125 BOARD, .040 PIN AND				.210 .155	
20	2	14058-2					
21	3	14058-3					
22	4	14058-4					
23	5	14058-5					


*-- COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS14059-8


CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG PIN CONTACTS, PRINTED CIRCUIT BOARD TERMINATION TYPES

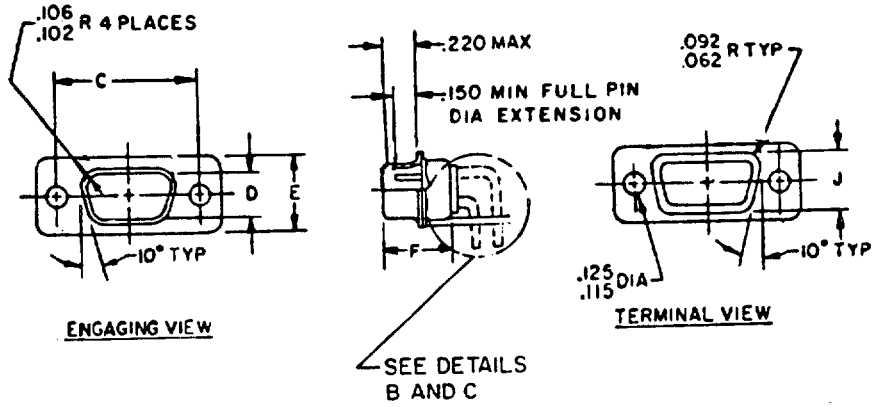

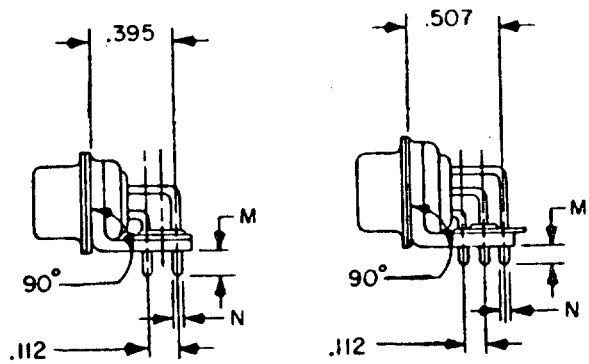

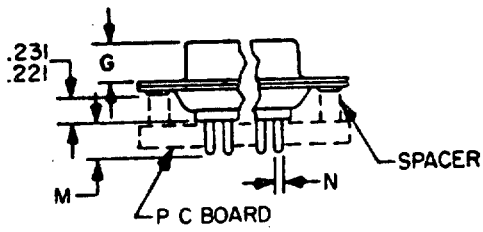

DETAIL-B-

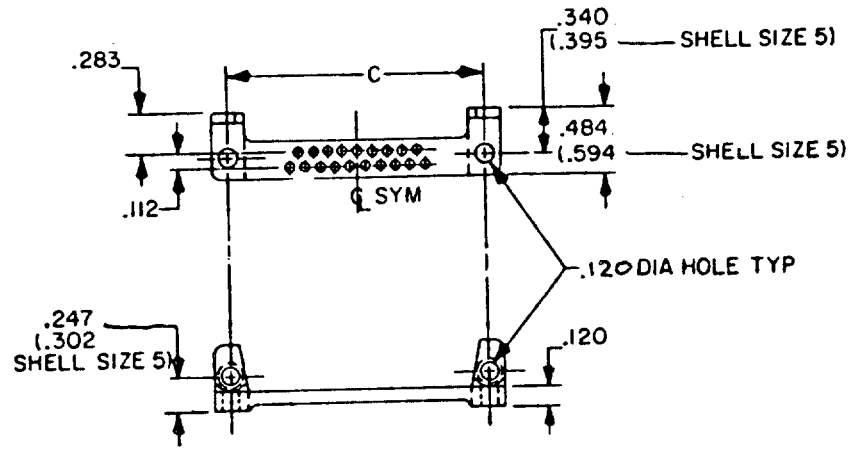

DETAIL-C-

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS14059-*

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG PIN CONTACTS, PRINTED CIRCUIT BOARD TERMINATION TYPES

TABLE 1. DIMENSIONS AND SHELL SIZE.

DASH NUMBER*	SHELL SIZE	DIMENSIONS					
		C	E	G	J	M	N
1	1	.989 .979	.509 .479	.238 .229	.432 .412	.185 .130	.033 .027
2	2	1.317 1.307					
3	3	1.857 1.847		.236 .224			
4	4	2.505 2.495					
5	5	2.411 2.401	.620 .590		.544 .524		
7	1	SAME AS 14059-1 EXCEPT FOR .125 BOARD, .030 PIN AND				.210 .155	
9	3	14059-3					
10	4	14059-4					
11	5	14059-5					
13	1	SAME AS 14059-1 EXCEPT FOR .094 BOARD, .040 PIN AND				.185 .130	.043 .037
14	2	14059-2					
15	3	14059-3					
16	4	14059-4					
17	5	14059-5					
19	1	SAME AS 14059-1 EXCEPT FOR .125 BOARD, .040 PIN AND				.210 .155	
20	2	14059-2					
21	3	14059-3					
22	4	14059-4					
23	5	14059-5					
25	1	SAME AS 14059-1 EXCEPT PER CONFIGURATIONS 1 + 3 FOR .062 BOARD, .030 PIN AND				.154 .099	.033 .027
26	2	14059-2					
27	3	14059-3					
28	4	14059-4					
29	5	14059-5					
31	1	SAME AS 14059-1 EXCEPT PER CONFIGURATIONS 1 + 3 FOR .094 BOARD, .030 PIN AND				.185 .130	
32	2	14059-2					
33	3	14059-3					
34	4	14059-4					
35	5	14059-5					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS14059-*

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL PLUG PIN CONTACTS, PRINTED CIRCUIT BOARD TERMINATION TYPES

TABLE I. (CONTINUED)


DASH NUMBER*	SHELL SIZE	DIMENSIONS					
		C	E	G	J	M	N
37	1	SAME AS 14059-1 EXCEPT PER CONFIGURATIONS 1 + 3 FOR .062 BOARD, .040 PIN AND				.154 .099	.043 .037
38	2	14059-2					
39	3	14059-3					
40	4	14059-4					
41	5	14059-5					
43	1	SAME AS 14059-1 EXCEPT PER CONFIGURATIONS 1 + 3 FOR .094 BOARD, .040 PIN AND				.185 .130	
44	2	14059-2					
45	3	14059-3					
46	4	14059-4					
47	5	14059-5					
49	1	SAME AS 14059-1 EXCEPT PER CONFIGURATIONS 1 + 3 FOR .125 BOARD, .030 PIN AND				.210 .155	.033 .027
50	2	14059-2					
51	3	14059-3					
52	4	14059-4					
53	5	14059-5					
55	1	SAME AS 14059-1 EXCEPT PER CONFIGURATIONS 1 + 3 FOR .125 BOARD, .040 PIN AND					.043 .037
56	2	14059-2					
57	3	14059-3					
58	4	14059-4					
59	5	14059-5					

*-- COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MS14004

INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR
SHELL SIZE 6

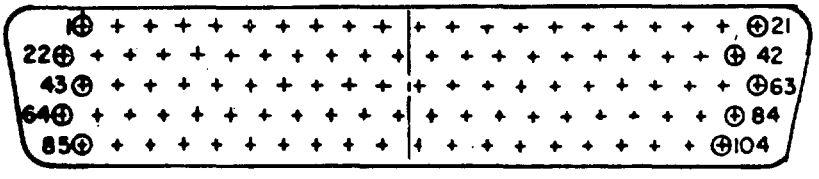

ARRANGEMENT 1


TABLE I. CONTACTS AND ARRANGEMENT NUMBER

MS NUMBER	ARRANGEMENT NUMBER	CONTACTS			
		NO. 22D	NO. 20	NO. 16 SHIELDED	NO. 8 SHIELDED
MS14004-1	1	104	0	0	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 20 REMOVABLE CONTACTS


MIL-C-28731/9

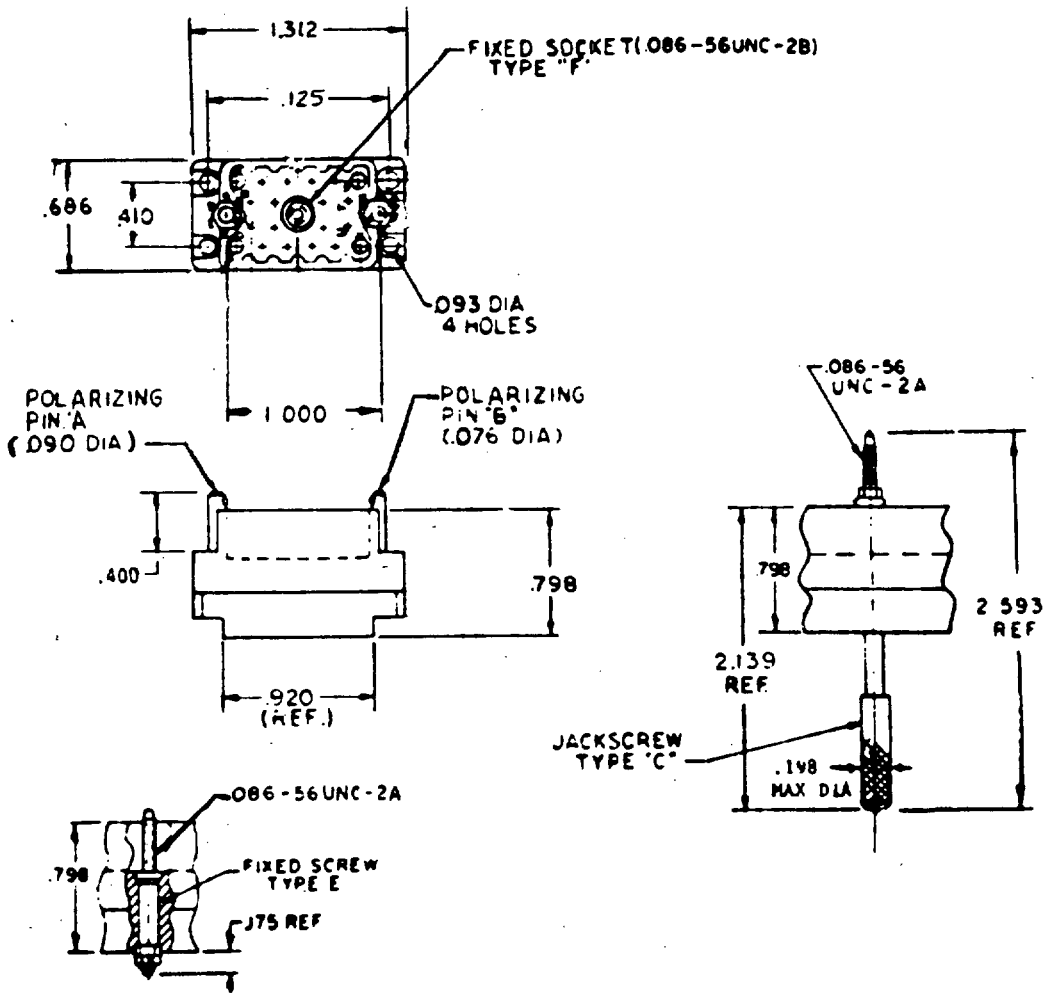

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 20 REMOVABLE CONTACTS

MIL-C-28731/9

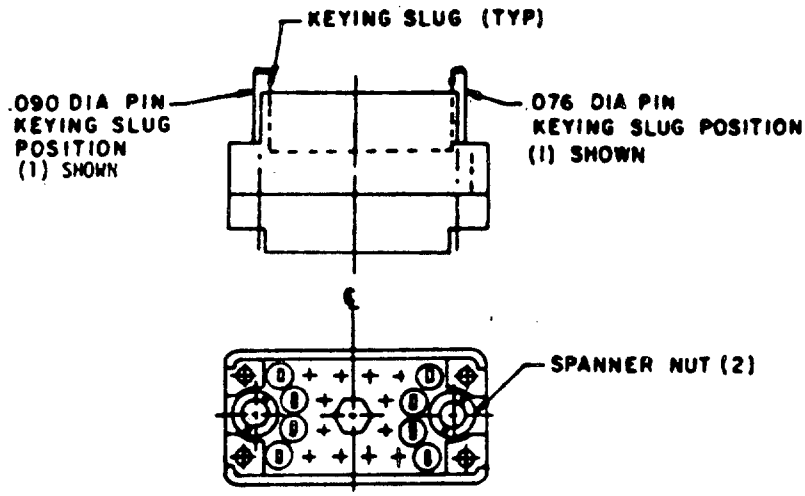

PART NUMBER: M28731/9-*

20 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER*	ACTUATING HARDWARE	POLARIZING PIN POSITION		CONTACT TYPE
		A .090 DIA.	B .076 DIA.	
0109	JACKSCREW TYPE C	1	1	CRIMP MIL-C-28731/21
0110	FIXED SOCKET TYPE F			
0111	FIXED SCREW TYPE E			
0112	JACKSCREW TYPE C			SOLDER HOLE MIL-C-28731/25
0113	FIXED SOCKET TYPE F			
0114	FIXED SCREW TYPE E			
0115	FIXED SOCKET TYPE F			WRAPPOST MIL-C-28731/26
0116	FIXED SCREW TYPE E			


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/9-0109 AND -0112 MATE WITH M28731/10-0110, -0113 AND -0115.
M28731/9-0110, -0113 AND -0115 MATE WITH M28731/10-0109 AND -0112.
M28731/9-0111, -0114, AND -0116 MATE WITH M28731/10-0111 AND -0114.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR
POLARIZED, CENTER SCREW LOCK, FOR 20 REMOVABLE CONTACTS


MIL-C-28731/10

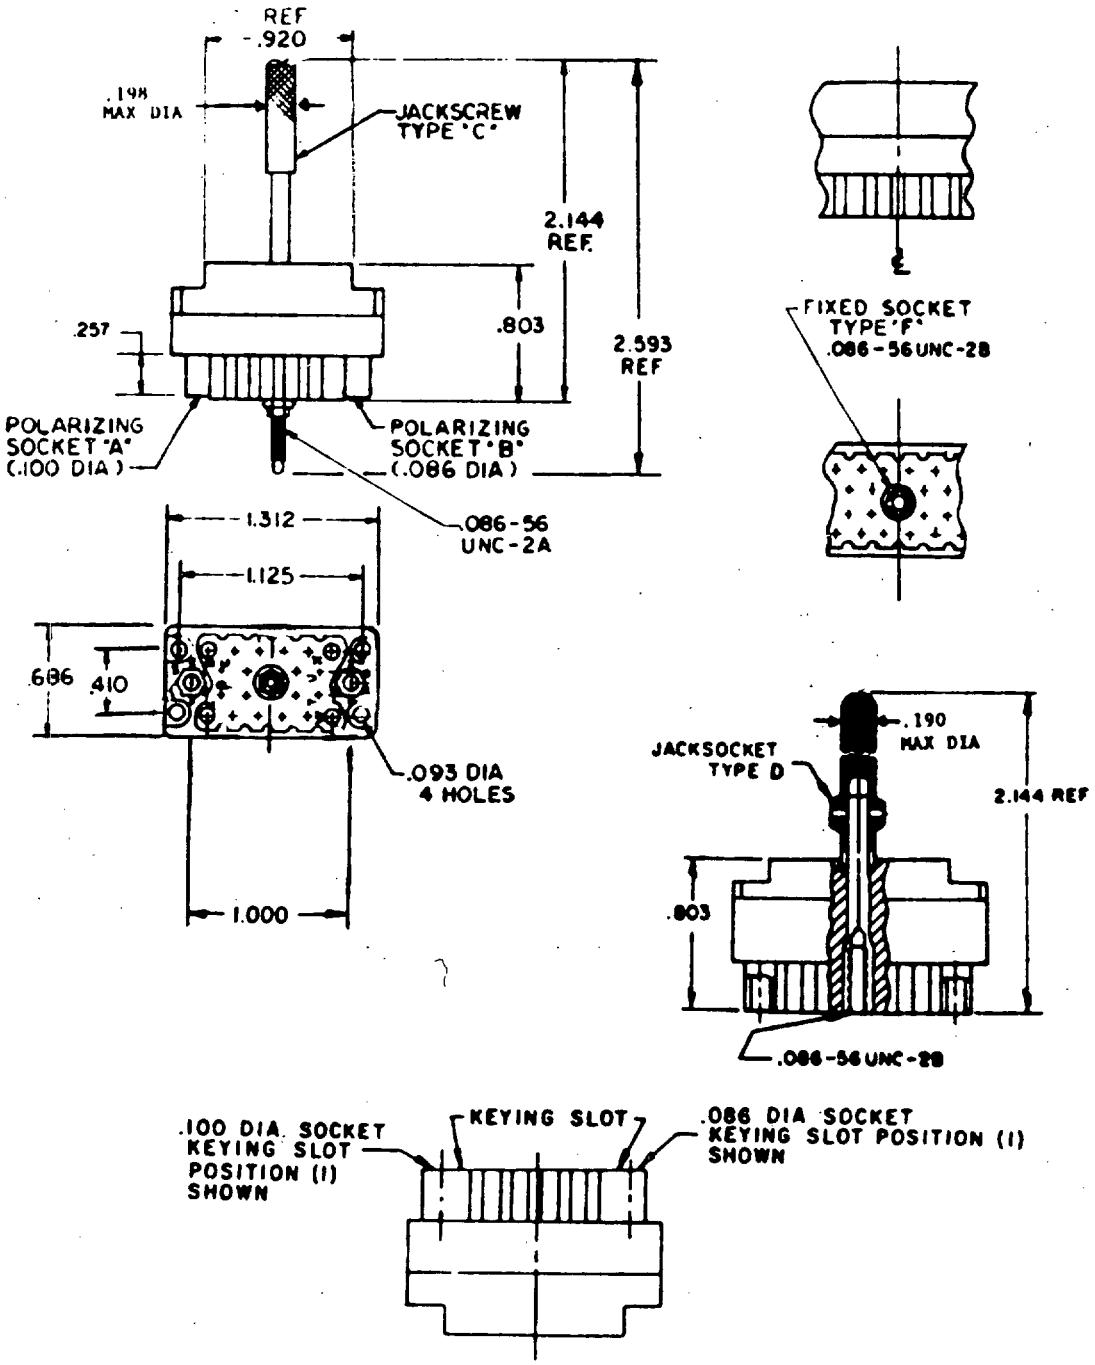

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR,
POLARIZED, CENTER SCREW LOCK, FOR 20 REMOVABLE CONTACTS

MIL-C-28731/10

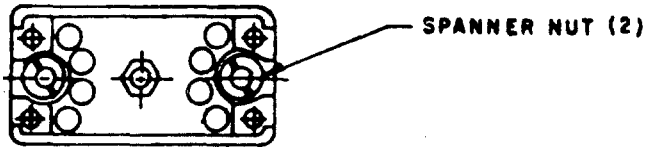

PART NUMBER M28731/10-* 20 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER*	ACTUATING HARDWARE	POLARIZING SOCKET POSITION		CONTACT TYPE
		A .100 DIA.	B .086 DIA.	
0109	JACKSCREW TYPE C	1	1	CRIMP MIL-C-28731/20
0110	FIXED SOCKET TYPE F			
0111	JACK SOCKET TYPE D			
0112	JACKSCREW TYPE C			SOLDER HOLE MIL-C-28731/25
0113	FIXED SOCKET TYPE F			
0114	JACK SOCKET TYPE D			
0115	FIXED SOCKET TYPE F			WRAPPOST MIL-C-28731/26


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/10-0109 AND -0112 MATE WITH M28731/9-0110, -0113 AND -0115.
M28731/10-0110, -0113 AND -0115 MATE WITH M28731/9-0109 AND -0112.
M28731/10-011 AND -0114 MATE WITH M28731/9-0111, -0114 AND -0116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 38 REMOVABLE CONTACTS

MIL-C-28873i/11

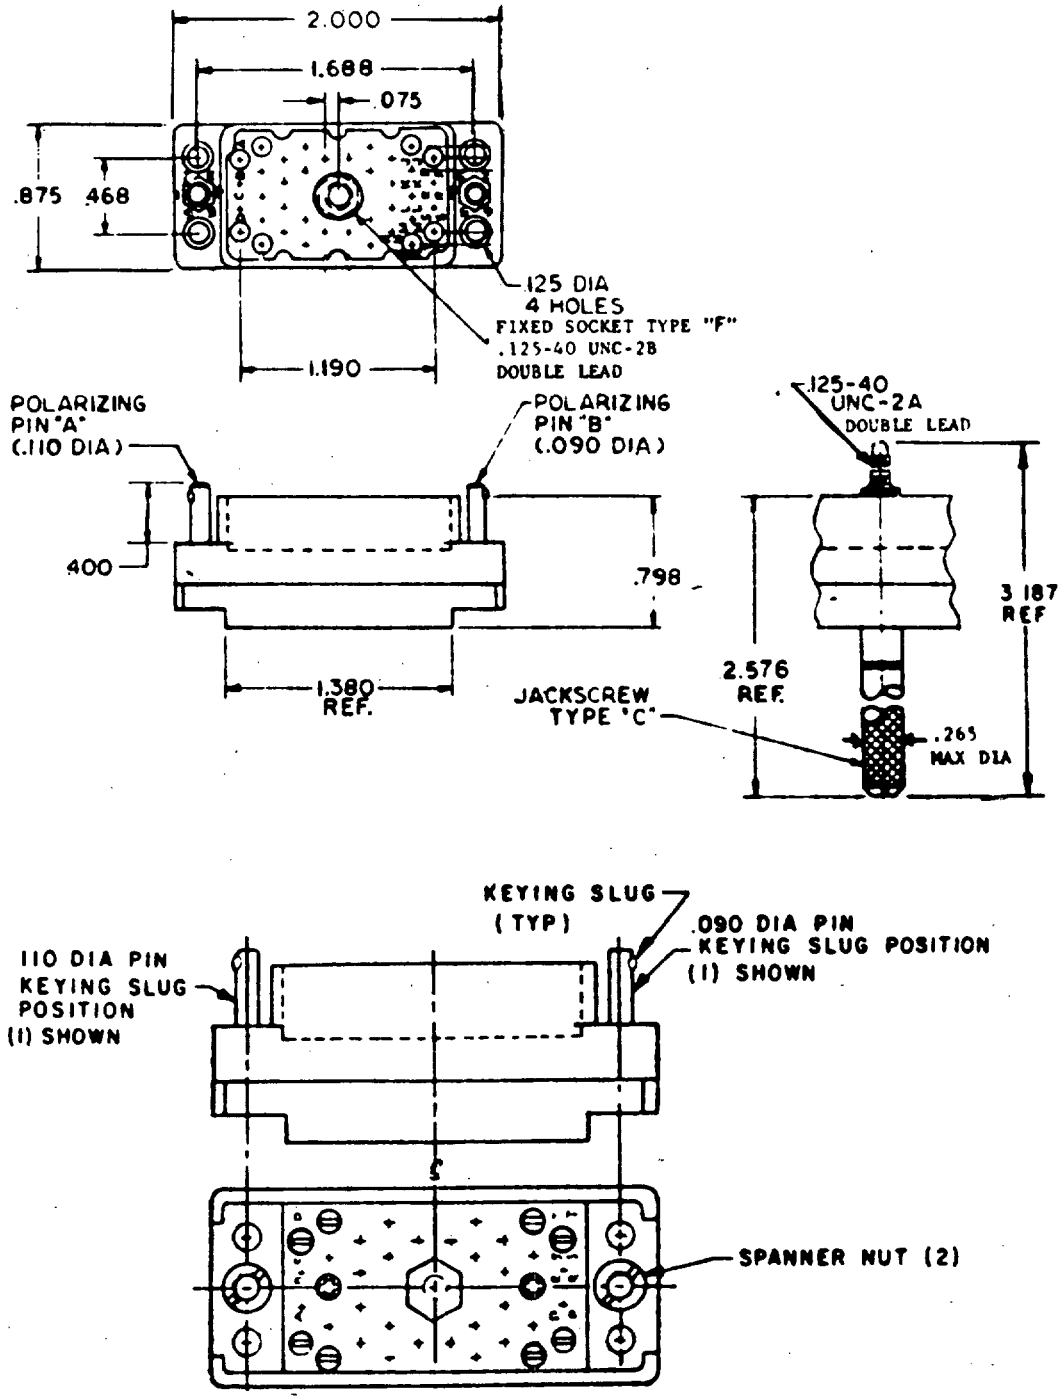

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGLAR, POLARIZED, CENTER SCREW LOCK, FOR 38 REMOVABLE CONTACTS

MIL-C-C28731/11

PART NUMBER: M28731/11-$ 38 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER$	ACTUATING HARDWARE	POLARIZING PIN POSITION		CONTACT TYPE
		A .116 DIA.	B .090 DIA.	
0073	JACKSCREW TYPE C	1	1	CRIMP MIL-C-28731/20
0074	FIXED SOCKET TYPE F			
0075	JACKSCREW TYPE C			SOLDER HOLE MIL-C-28731/26
0076	FIXED SOCKET TYPE F			SOLDER HOLE MIL-C-28731/25
0077				WRAPPOST MIL-C-28731/26


$--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/11-0073 AND -0075 MATE WITH M28731/12-0074, -0076 AND -0077.
M28731/11-0074, -0076 AND -0077 MATE WITH M28731/12-0073 AND -0075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 38 REMOVABLE CONTACTS


MIL-C-28731/12

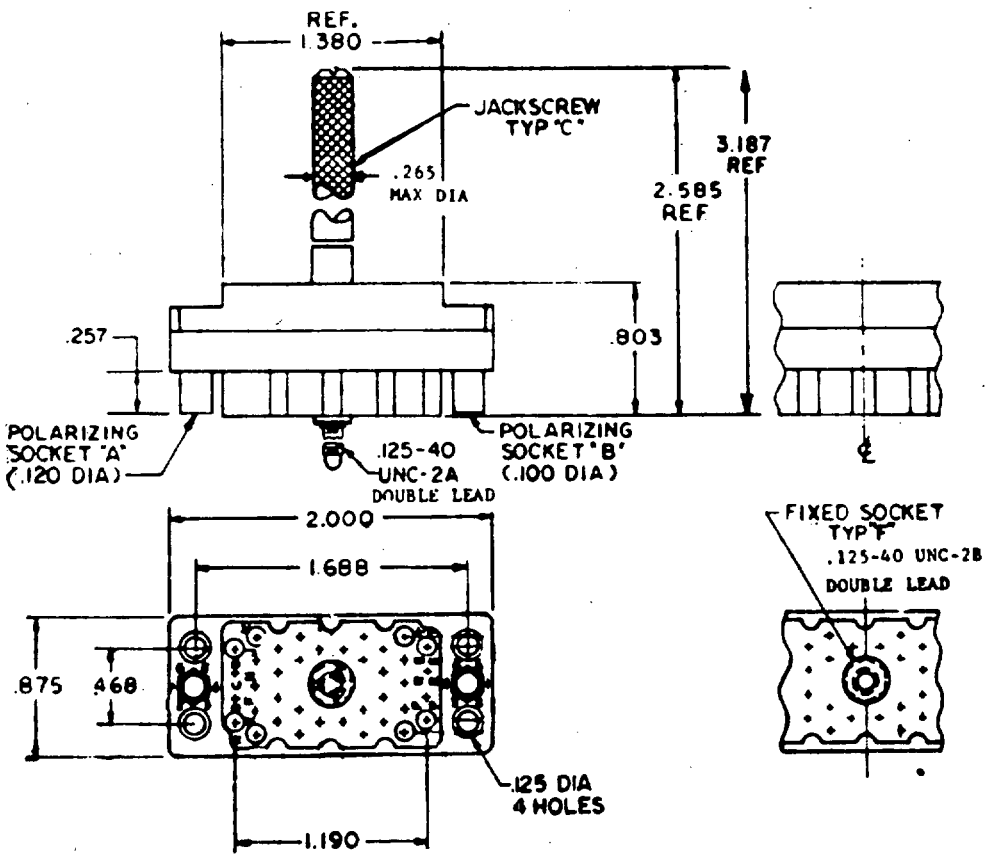

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR,
POLARIZED, CENTER SCREW LOCK, FOR 38 REMOVABLE CONTACTS

MIL-C-28731/12

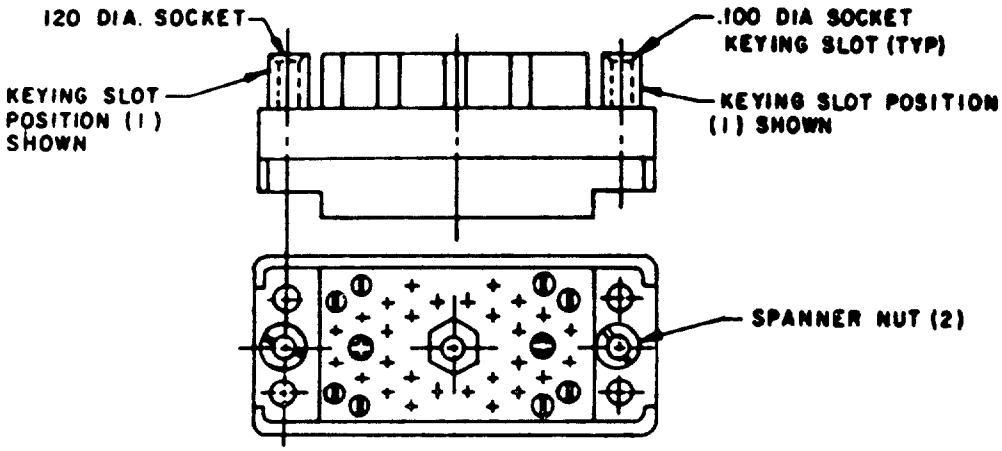

PART NUMBER: M28731/12-# 38 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER#	ACTUATING HARDWARE	POLARIZING SOCKET POSITION		CONTACT TYPE
		A .120 DIA.	B .100 DIA.	
0073	JACKSCREW TYPE C	1	1	CRIMP MIL-C-28731/20
0074	FIXED SOCKET TYPE F			
0075	JACKSCREW TYPE C			SOLDER MOLE MIL-C-28731/25
0076	FIXED SOCKET TYPE F			
0077				WRAPPOST MIL-C-28731/26


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


NOTE--MATING CONNECTOR INFORMATION:
M28731/12-0073 AND -0075 MATE WITH M28731/11-0074, -0076 AND -0077.
M28731/12-0074, -0076 AND -0077 MATE WITH M28731/11-0073 AND -0075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 56 REMOVABLE CONTACTS

MIL-C-28731/13

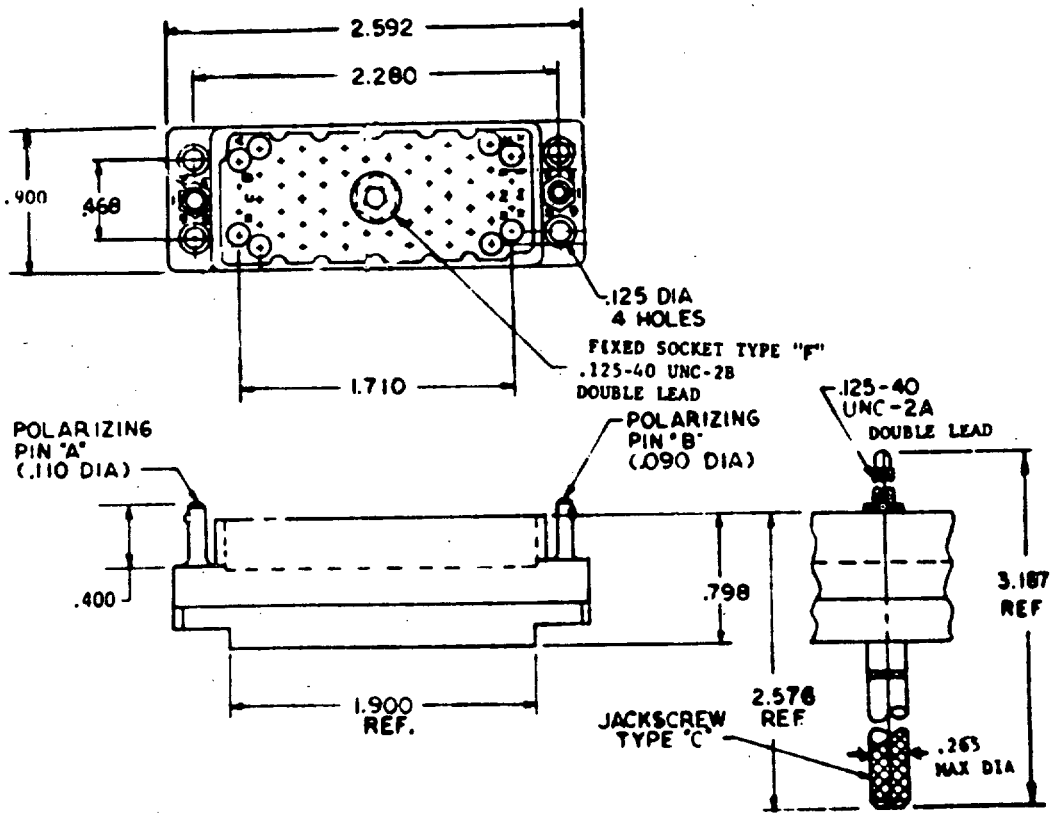

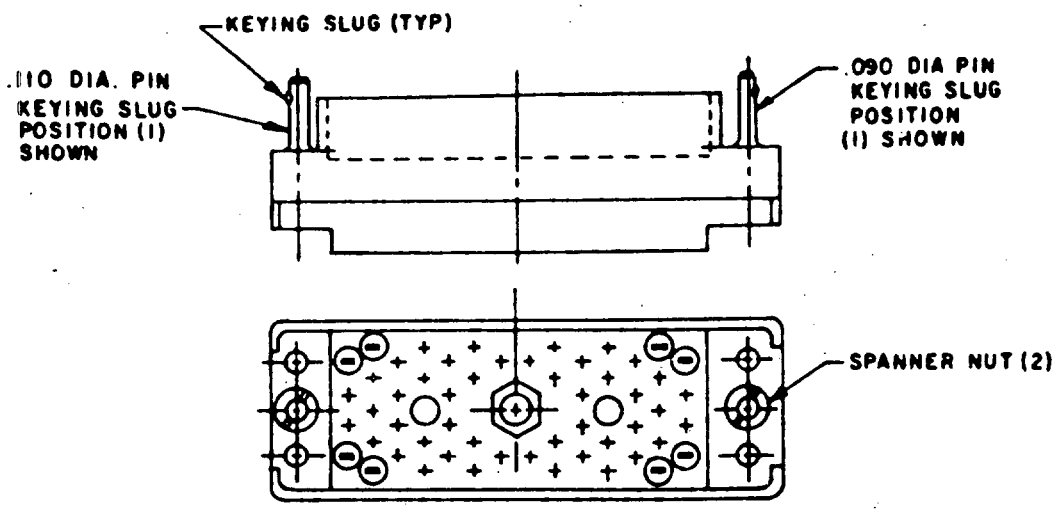

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR,
POLARIZED, CENTER SCREW LOCK, FOR 56 REMOVABLE CONTACTS

MIL-C-28731/13

PART NUMBER : M28731/13-# 56 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER#	ACTUATING HARDWARE	POLARIZING PIN POSITION		CONTACT TYPE
		A .110 DIA.	B .090 DIA.	
0073	JACKSCREW TYPE C	1	1	CRIMP MIL-C-28731/20
0074	FIXED SOCKET TYPE F			
0075	JACKSCREW TYPE C			SOLDER HOLE MIL-C-28731/25
0076	FIXED SOCKET TYPE F			
0077				WRAPPOST MIL-C-28731/26


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


NOTE--MATING CONNECTOR INFORMATION:
M28731/13-0073 AND -0075 MATE WITH M28731/14-0074, -0076 AND -0077.
M28731/13-0074, -0076 AND -0077 MATE WITH M28731/14-0073 AND -0075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 56 REMOVABLE CONTACTS

MIL-C-28731/14

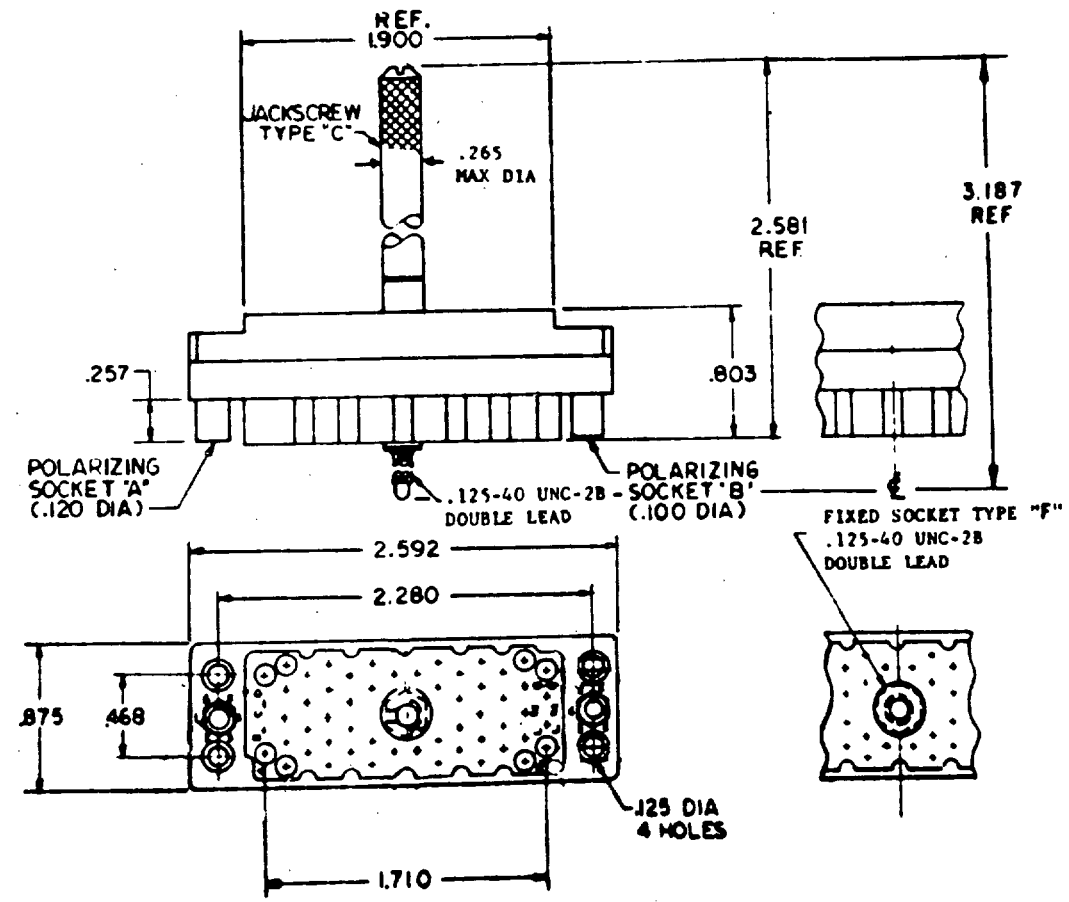

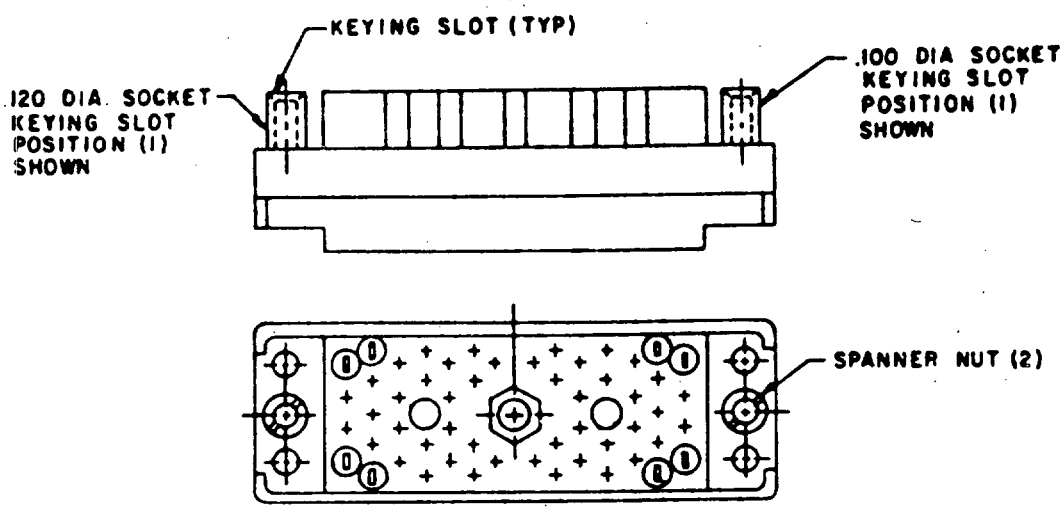

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR,
POLARIZED, CENTER SCREW LOCK, FOR 56 REMOVABLE CONTACTS

MIL-C-28731/14

PART NUMBER: M28731/14-$ 56 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER$	ACTUATING HARDWARE	POLARIZING SOCKET POSITION		CONTACT TYPE
		A .120 DIA.	B .100 DIA.	
0073	JACKSCREW TYPE C	1	1	CRIMP MIL-C-28731/26
0074	FIXED SOCKET TYPE F			
0075	JACKSCREW TYPE C			SOLDER HOLE MIL-C-28731/25
0076	FIXED SOCKET TYPE F			
0077				WRAPPOST MIL-C-28731/26


$--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/14-0073 AND -0075 MATE WITH M28731/13-0074, -0076 AND -0077.
M28731/14-0074, -0076 AND -0077 MATE WITH M28731/13-0073 AND -0075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 90 REMOVABLE CONTACTS

MIL-C-28731/15

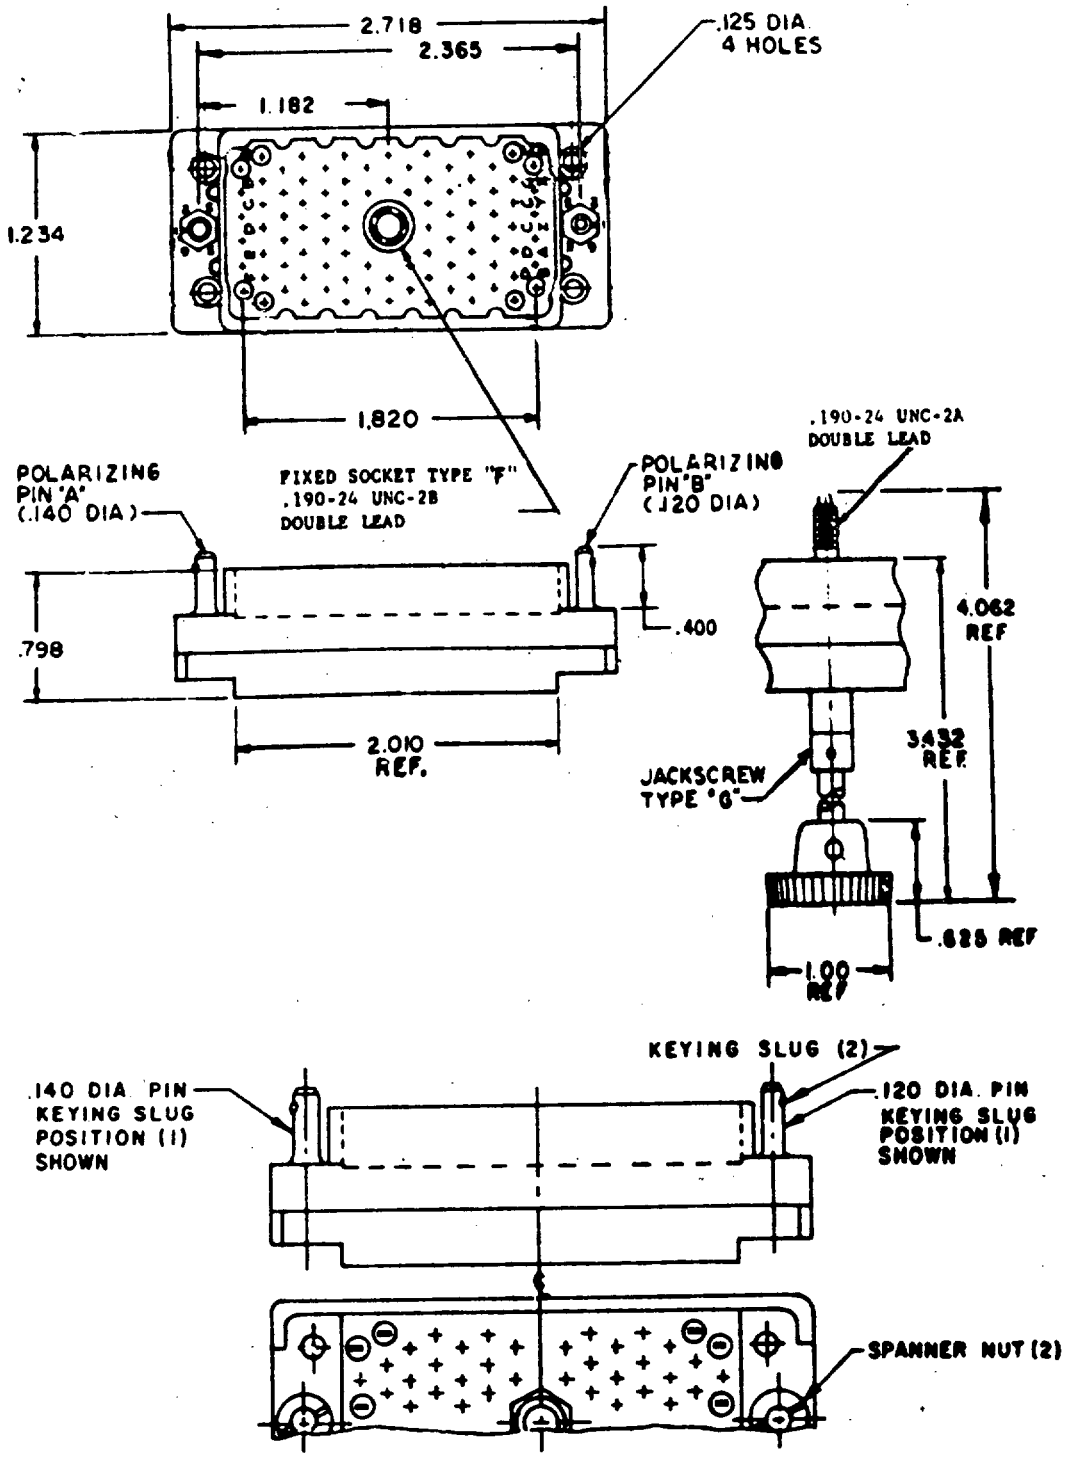

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR,
POLARIZED, CENTER SCREW LOCK, FOR 90 REMOVABLE CONTACTS

MIL-C-28731/15

PART NUMBER: M28731/15-# 90 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER#	ACTUATING HARDWARE	POLARIZING PIN POSITION		CONTACT TYPE
		A .140 DIA.	B .120 DIA.	
0073	JACKSCREW TYPE G	1	1	CRIMP MIL-C-28731/20
0074	FIXED SOCKET TYPE F			
0075	JACKSCREW TYPE G			SOLDER HOLE MIL-C-28731/25
0076	FIXED SOCKET TYPE F			
0077				WRAPPOST MIL-C-28731/26


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/15-0073 AND -0075 MATE WITH M28731/16-0074, -0076 AND -0077.
M28731/15-0074, -0076 AND -0077 MATE WITH M28731/16-0073 AND -0075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 90 REMOVABLE CONTACTS

MIL-C-28731/16

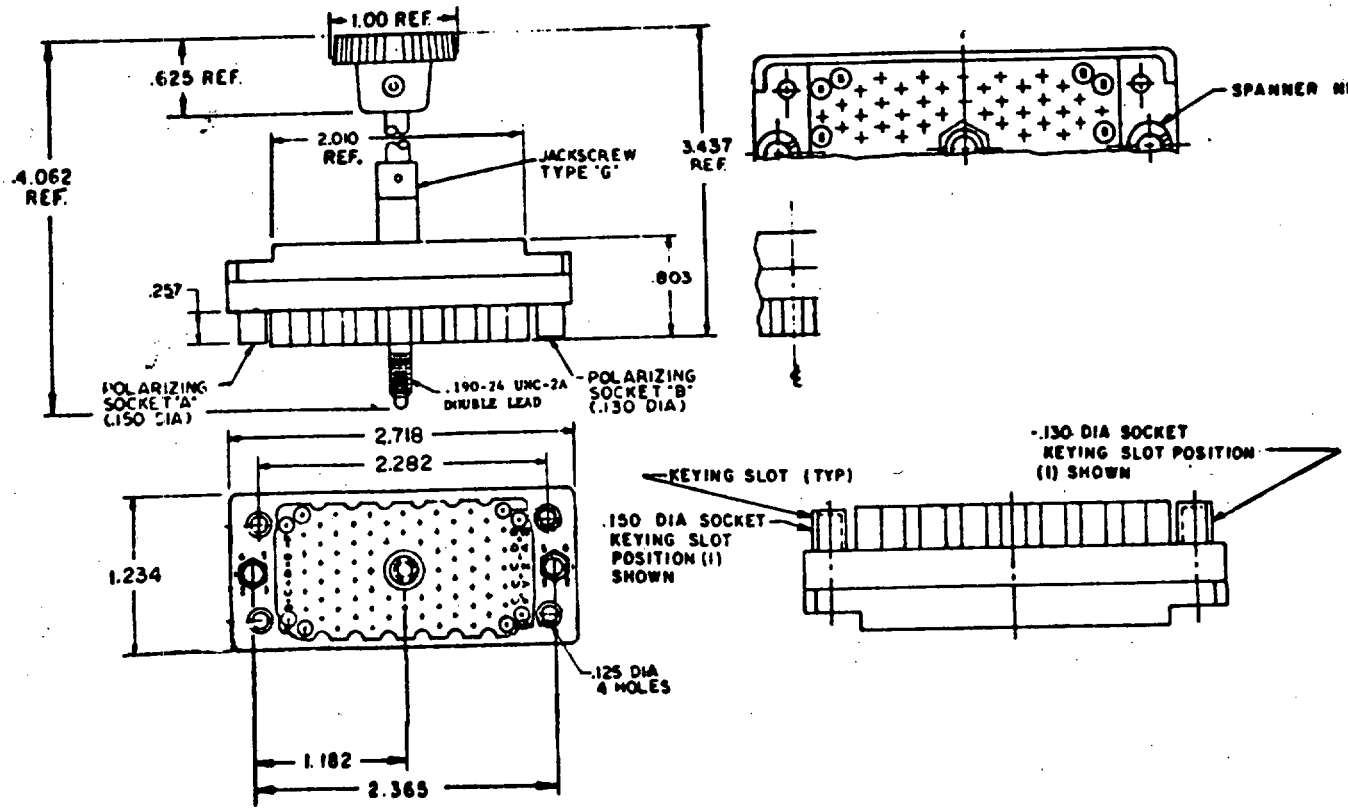

PART NUMBER: M28731/16-#

90 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER#	ACTUATING HARDWARE	POLARIZING SOCKET POSITION		CONTACT TYPE
		A .150 DIA.	B .130 DIA.	
0073	JACKSCREW TYPE G	1	1	CRIMP MIL-C-28731/20
0074	FIXED SOCKET TYPE F			
0075	JACKSCREW TYPE G			SOLDER HOLE MIL-C-28731/25
0076	FIXED SOCKET TYPE F			
0077				WRAPPOST MIL-C-28731/26


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/16-0073 AND -0075 MATE WITH M28731/15-0074, -0076 AND -0077.
M28731/16-0074, -0076 AND -0077 MATE WITH M28731/15-0073 AND -0075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 120 REMOVABLE CONTACTS


MIL-C-28731/17

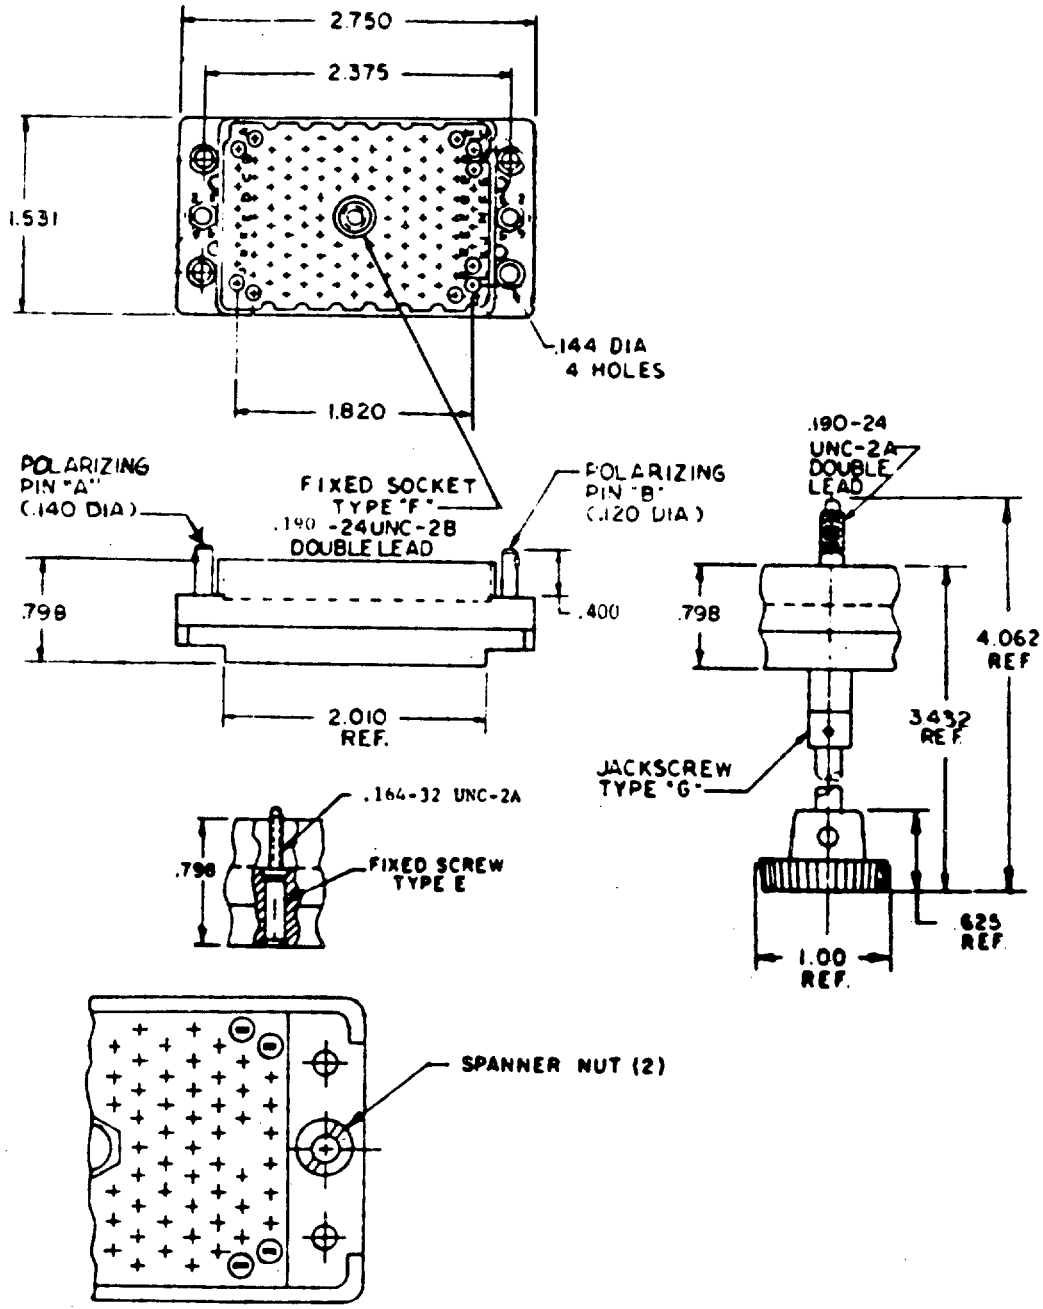

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 120 REMOVABLE CONTACTS

MIL-C-28731/17

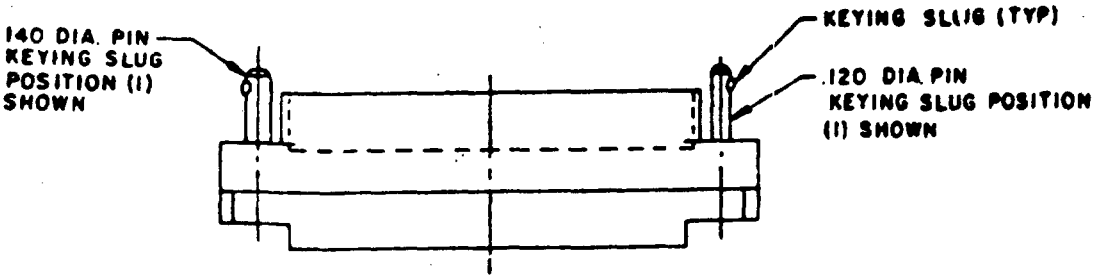

PART NUMBER: M28731/17-* 120 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER*	ACTUATING HARDWARE	POLARIZING PIN POSITION		CONTACT TYPE
		A .140 DIA.	B .120 DIA.	
0109	JACKSCREW TYPE G	1	1	CRIMP MIL-C-28731/21
0110	FIXED SOCKET TYPE F			
0111	FIXED SCREW TYPE E			
0112	JACKSCREW TYPE G			SOLDER HOLE MIL-C-28731/25
0113	FIXED SOCKET TYPE F			
0114	FIXED SCREW TYPE E			
0115	FIXED SOCKET TYPE F			WRAPPOST MIL-C-28731/26
0116	FIXED SCREW TYPE E			


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/17-0109 AND -0112 MATE WITH M28731/18-0110, -0113 AND -0115.
M28731/17-0110, -0113 AND -0115 MATE WITH M28731/18-0109 AND -0112.
M28731/17-0111, -0114 AND -0116 MATE WITH M28731/18-0111 AND -0114.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 120 REMOVABLE CONTACTS


MIL-C-28731/18

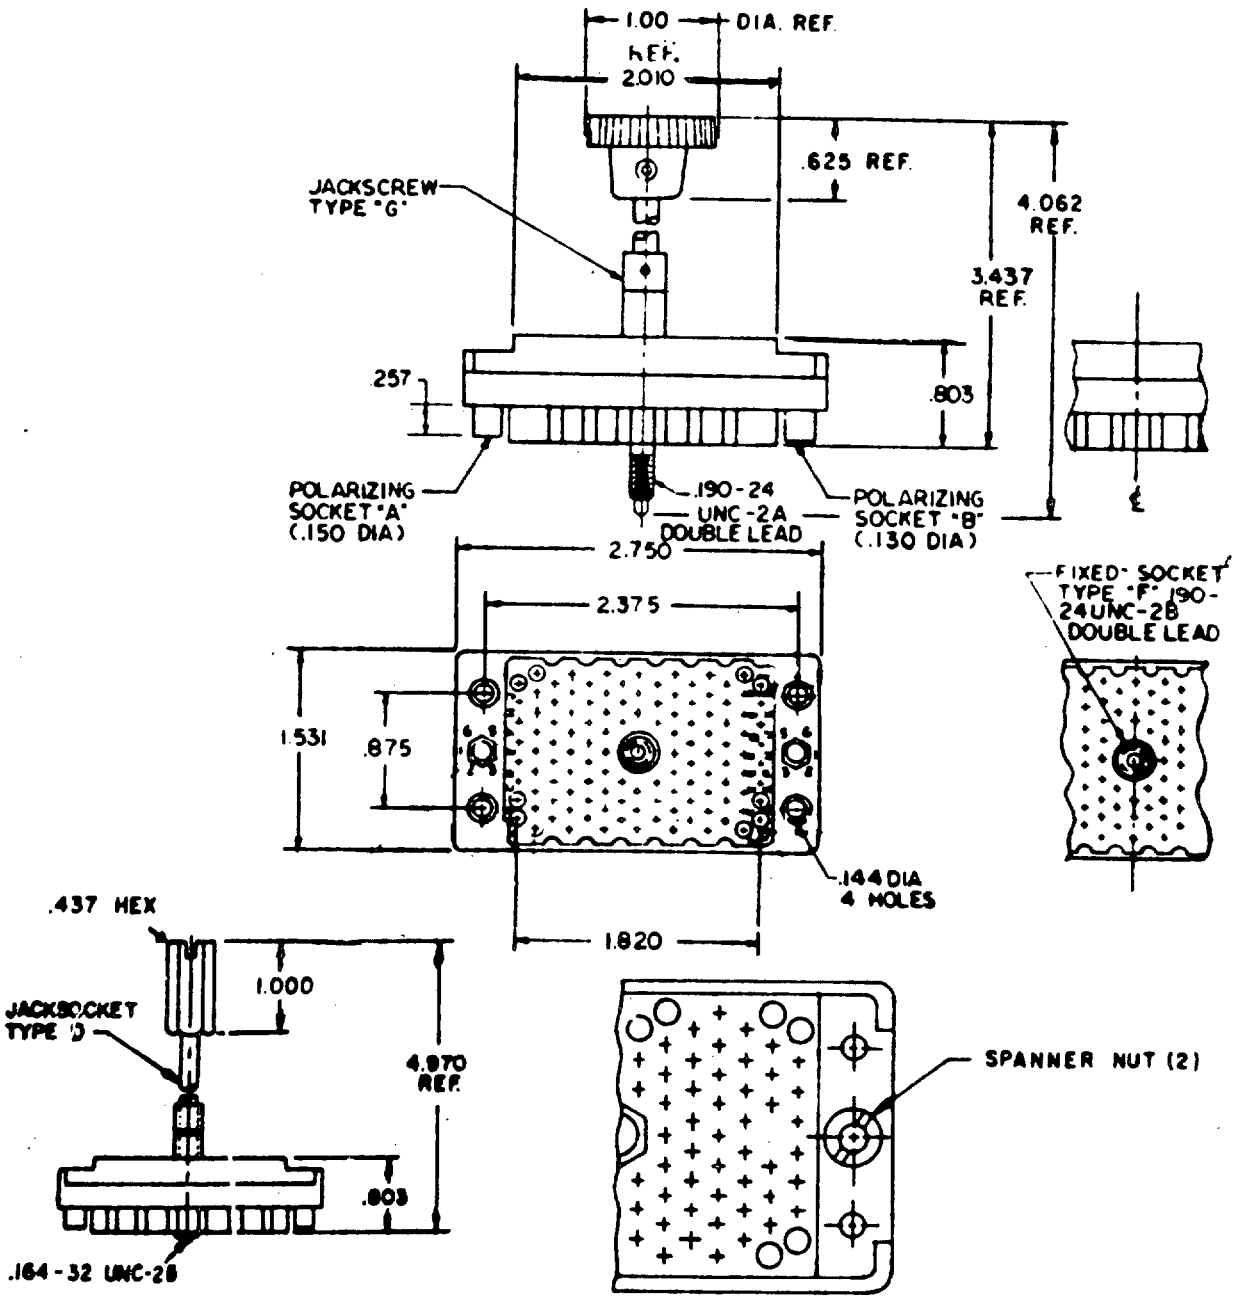

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 120 REMOVABLE CONTACTS

MIL-C-28731/18

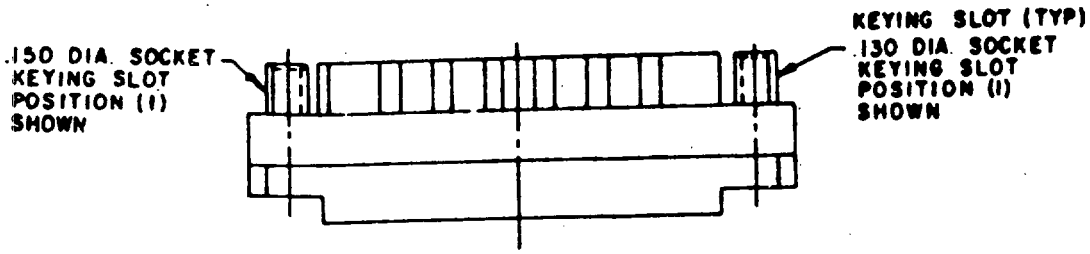

PART NUMBER: M28731/18-* 120 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER*	ACTUATING HARDWARE	POLARIZING SOCKET POSITION		CONTACT TYPE
		A .150 DIA.	B .130 DIA.	
0109	JACKSCREW TYPE G	1	1	CRIMP MIL-C-28731/21
0110	FIXED SOCKET TYPE F			
0111	FIXED SOCKET TYPE D			
0112	JACKSCREW TYPE G			SOLDER HOLE MIL-C-28731/25
0113	FIXED SOCKET TYPE F			
0114	FIXED SOCKET TYPE D			
0115	FIXED SOCKET TYPE F			WRAPPOST MIL-C-28731/26

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


NOTE--MATING CONNECTOR INFORMATION:
M28731/17-0109 AND -0112 MATE WITH M28731/18-0110, -0113 AND -0115.
M28731/17-0110, -0113 AND -0115 MATE WITH M28731/18-0109 AND -0112.
M28731/17-0111, -0114 AND -0116 MATE WITH M28731/18-0111 AND -0114.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL, POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE, CRIMP TYPE REMOVABLE PIN CONTACTS, SIZE 16

MIL-C-28748/9

SCOPE: THIS SECTION COVERS RECTANGULAR, RACK AND PANEL, ELECTRICAL CONNECTORS, WITH NONREMOVABLE SOLDER TYPE CONTACTS, AND REMOVABLE CRIMP TYPE CONTACTS FOR USE IN ELECTRONIC AND ELECTRICAL EQUIPMENT. THESE CONNECTORS ARE COMPOSED OF AN INSERT MADE OF A SUITABLE INSULATION MATERIAL INTO WHICH ARE FIXED EITHER PINS OR SOCKETS.

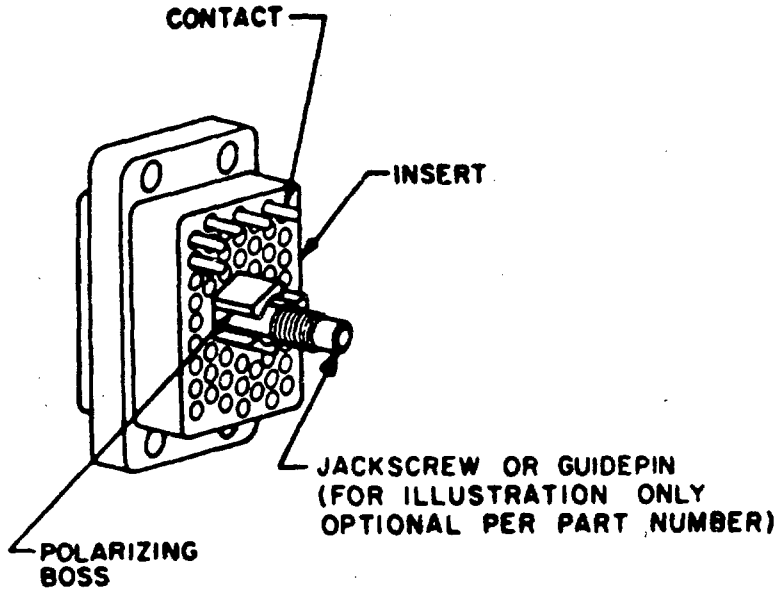

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL, POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE, CRIMP TYPE REMOVABLE PIN CONTACTS, SIZE 16

MIL-C-28748/9

PART NUMBER: M28748/9 EXAMPLE OF PART NUMBER:

(SEE PART NUMBER CODE)

M28748/9	A	0	A	L	1A
BASIC NUMBER OF SPECIFICATION SHEET	INSERT	SHIELD AND SHIELD CLAMP LOCATION OR RETAINING PLATE	SHELL TYPE	JACKSCREWS OR GUIDEPINS	CONTACTS

PART NUMBER CODE:

INSERT WITH THRU MOUNTING HOLE	NUMBER OF CONTACTS
A - MS18155	10
B - MS18157	20
C - MS18159	36
D - MS18161	52
E - MS18163	80
F - MS17778	104
G - MS18165	158
H - MS18167	212

INSERT WITH MOUNTING SLEEVE	NUMBER OF CONTACTS
J - MS18155	10
K - MS18157	20
L - MS18159	36
M - MS18161	52
N - MS18163	80
P - MS17778	104
R - MS18165	158
S - MS18167	212

SHIELD AND SHIELD CLAMP LOCATION OR RETAINING PLATE
0 - NONE INCLUDED

SHELL TYPE (POLARIZATION) (SEE TABLES II + III)

A - 1 N	SEE APPLICABLE INSERT MS PART NUMBER
B - 1 V	
C - 1 W	
D - 1 X	
E - 1 Y	
F - 1 Z	
N - 2 N	
V - 2 V	
W - 2 W	
X - 2 X	
Y - 2 Y	
Z - 2 Z	
G - 3 N	
H - 3 V	
J - 3 W	
K - 3 X	
L - 3 Y	
M - 3 Z	
P - 4 N	
Q - 4 V	
R - 4 W	
S - 4 X	
T - 4 Y	
U - 4 Z	

JACKSCREWS OR GUIDEPINS

L - LONG JACKSCREW FROM APPLICABLE INSERT MS.
G - GUIDEPIN FROM APPLICABLE MS.
0 - BOSS FOR JACKSCREW.
B - BOSS FOR GUIDEPIN.

NOTE: MATING CONNECTORS: MIL-C-28748/10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL,
POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE,
CRIMP TYPE REMOVABLE PIN CONTACTS, SIZE 16

MIL-C-28748/9

CONTACTS:

	SIZE 16 - 16 MS17807 *	SIZE 16 - 20 MS17807 *	SHIELDED MS18232 **
	PERCENT	PERCENT	PERCENT
1A	100	0	0
2A	0	100	0

* CRIMP TOOL: M22520/1-01
POSITIONER: M22520/1-03 (A)
INSTALLING TOOL: M81969/18-01
REMOVAL TOOL: M81969/20-01

** CRIMP TOOL: M22520/2-01 (INNER CONTACT)
POSITIONER: M22520/2-04
CRIMP TOOL: M22520/1-01 (OUTER CONTACT)
POSITIONER: M22520/1-07
INSTALLING TOOL: M81969/18-01
REMOVAL TOOL: M81969/20-01


CURRENT RATING (CRIMP)

CONTACT SIZE	WIRE SIZE (AWG)	AMPERES (MAX)
16 - 16	16	13
16 - 16	18	10
16 - 16	20	7.5
16 - 20	20	7.5
16 - 20	22	5.0
16 - 20	24	3.0


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 10 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18155

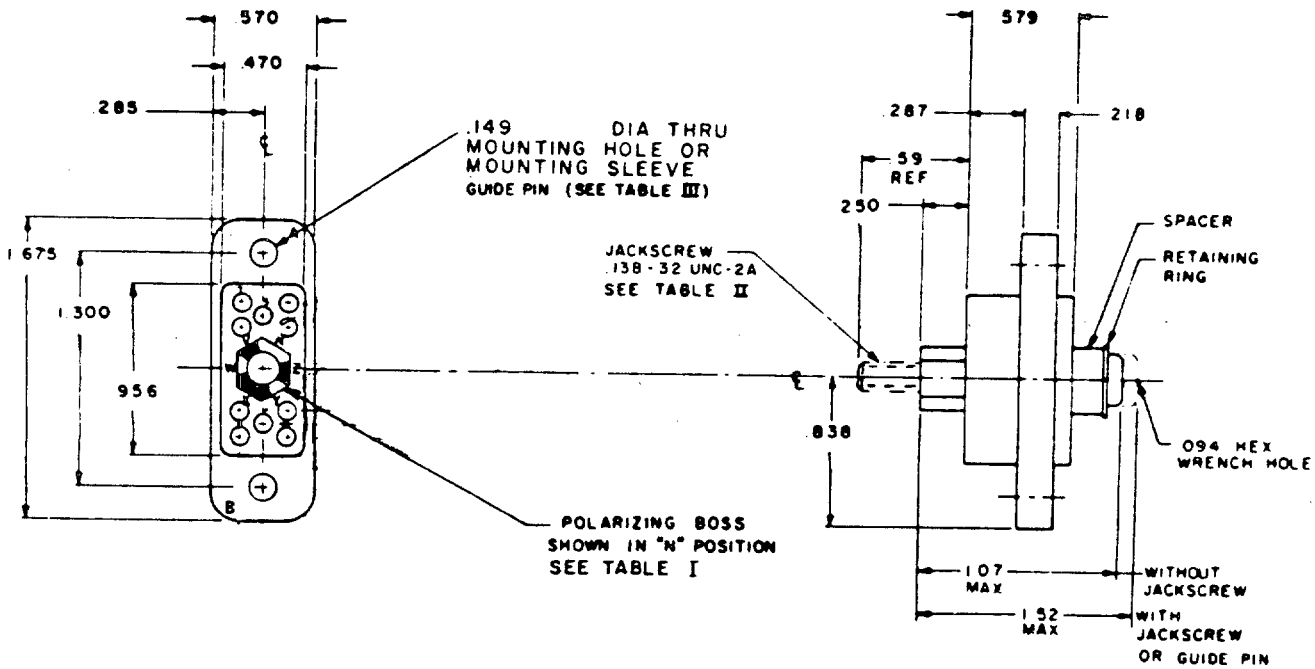

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
10 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18155

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18155-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18155-1V	V (TYPE 1)	
MS 18155-1W	W (TYPE 1)	
MS 18155-1X	X (TYPE 2)	
MS 18155-1Y	Y (TYPE 2)	
MS 18155-1Z	Z (TYPE 2)	
MS 18155-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .138 - 32 UNC - 2B
MS 18155-2V	V (TYPE 1)	
MS 18155-2W	W (TYPE 1)	
MS 18155-2X	X (TYPE 2)	
MS 18155-2Y	Y (TYPE 2)	
MS 18155-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18155-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18155-3V	V (TYPE 1)	
MS 18155-3W	W (TYPE 1)	
MS 18155-3X	X (TYPE 2)	
MS 18155-3Y	Y (TYPE 2)	
MS 18155-3Z	Z (TYPE 2)	
MS 18155-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .144 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18155-4V	V (TYPE 1)	
MS 18155-4W	W (TYPE 1)	
MS 18155-4X	X (TYPE 2)	
MS 18155-4Y	Y (TYPE 2)	
MS 18155-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.


NOTE: FOR MATING CONNECTOR SEE MS18156 (SOCKET BODY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR, POLARIZED CENTER SCREW-LOCK, ELECTRICAL, 20 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18157

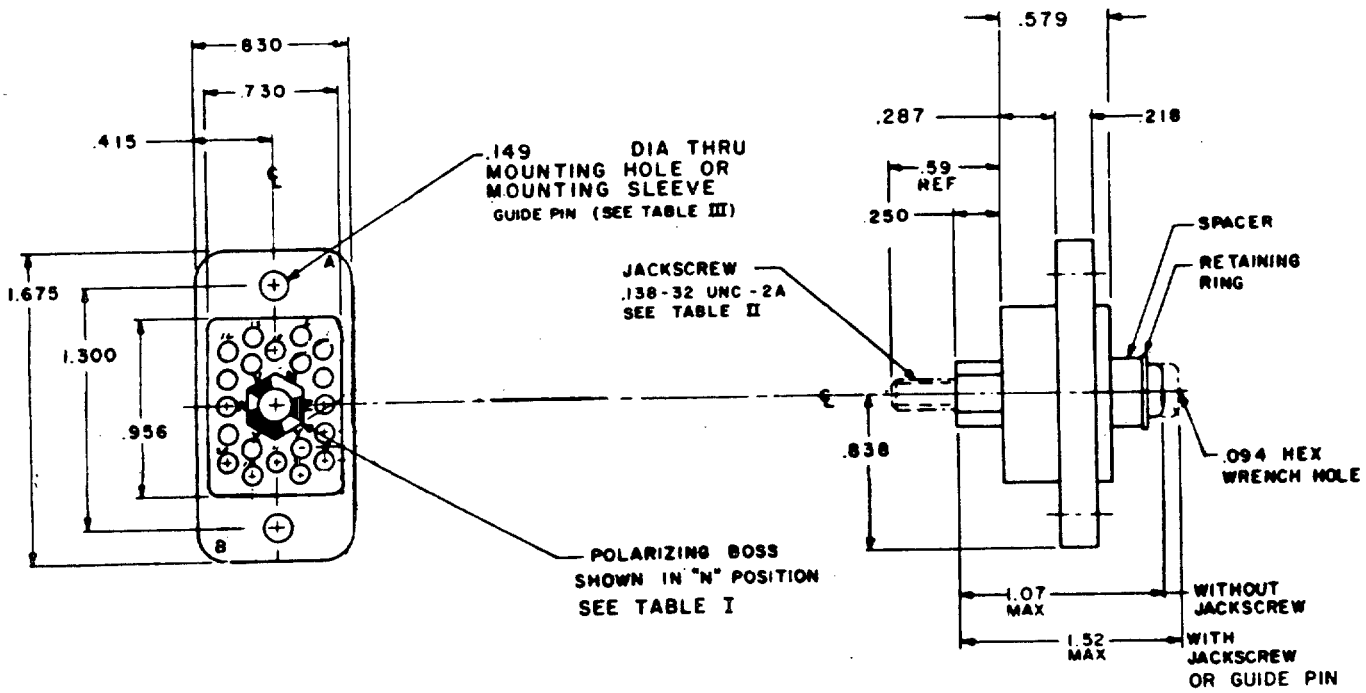



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
20 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18157

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18157-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18157-1V	V (TYPE 1)	
MS 18157-1W	W (TYPE 1)	
MS 18157-1X	X (TYPE 2)	
MS 18157-1Y	Y (TYPE 2)	
MS 18157-1Z	Z (TYPE 2)	
MS 18157-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .138 - 32 UNC - 2B
MS 18157-2V	V (TYPE 1)	
MS 18157-2W	W (TYPE 1)	
MS 18157-2X	X (TYPE 2)	
MS 18157-2Y	Y (TYPE 2)	
MS 18157-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18157-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18157-3V	V (TYPE 1)	
MS 18157-3W	W (TYPE 1)	
MS 18157-3X	X (TYPE 2)	
MS 18157-3Y	Y (TYPE 2)	
MS 18157-3Z	Z (TYPE 2)	
MS 18157-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .144 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18157-4V	V (TYPE 1)	
MS 18157-4W	W (TYPE 1)	
MS 18157-4X	X (TYPE 2)	
MS 18157-4Y	Y (TYPE 2)	
MS 18157-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE--FOR MATING CONNECTOR SEE MS18158 (SOCKET BODY).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
36 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18159

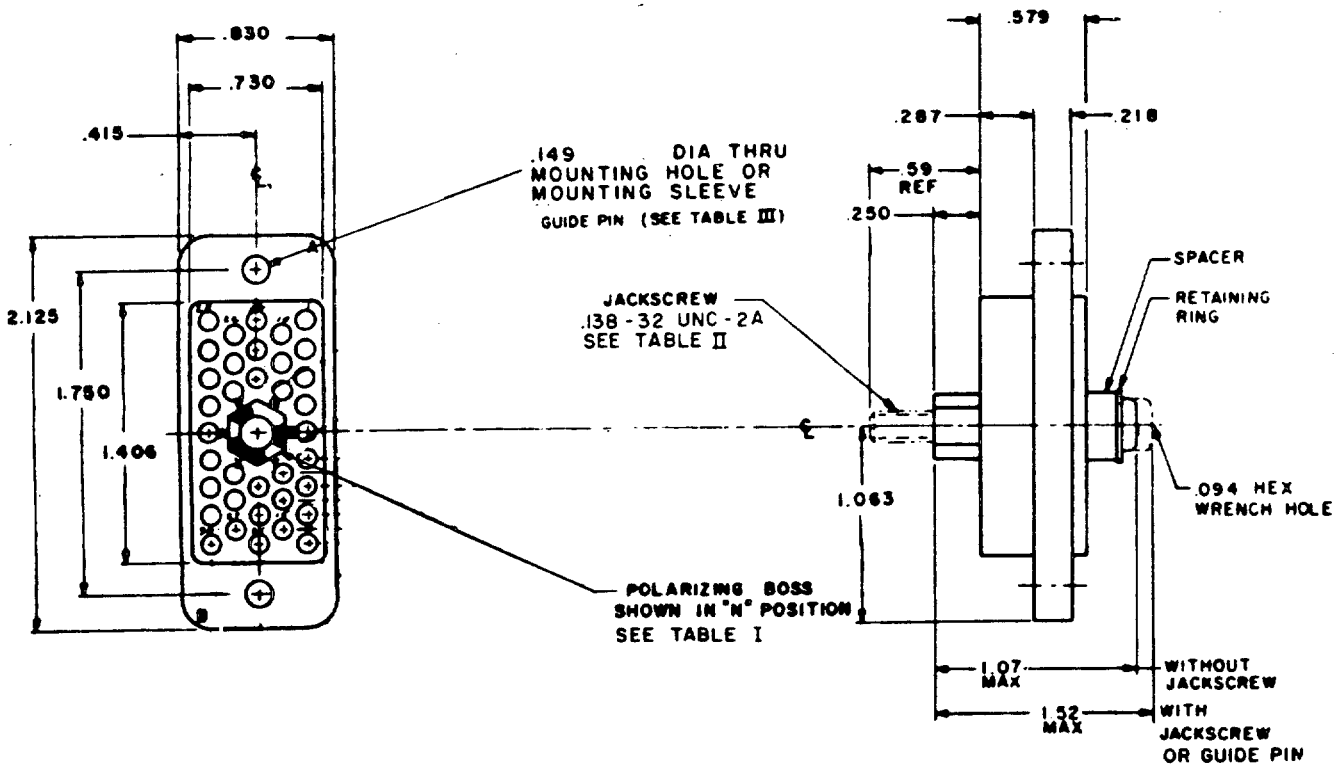

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
36 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18159

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18159-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18159-1V	V (TYPE 1)	
MS 18159-1W	W (TYPE 1)	
MS 18159-1X	X (TYPE 2)	
MS 18159-1Y	Y (TYPE 2)	
MS 18159-1Z	Z (TYPE 2)	
MS 18159-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .138 - 32 UNC - 2B
MS 18159-2V	V (TYPE 1)	
MS 18159-2W	W (TYPE 1)	
MS 18159-2X	X (TYPE 2)	
MS 18159-2Y	Y (TYPE 2)	
MS 18159-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18159-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18159-3V	V (TYPE 1)	
MS 18159-3W	W (TYPE 1)	
MS 18159-3X	X (TYPE 2)	
MS 18159-3Y	Y (TYPE 2)	
MS 18159-3Z	Z (TYPE 2)	
MS 18159-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .144 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18159-4V	V (TYPE 1)	
MS 18159-4W	W (TYPE 1)	
MS 18159-4X	X (TYPE 2)	
MS 18159-4Y	Y (TYPE 2)	
MS 18159-4Z	Z (TYPE 2)	


*—LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE: FOR MATING CONNECTOR SEE MS18160 (SOCKET BODY).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
52 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18161

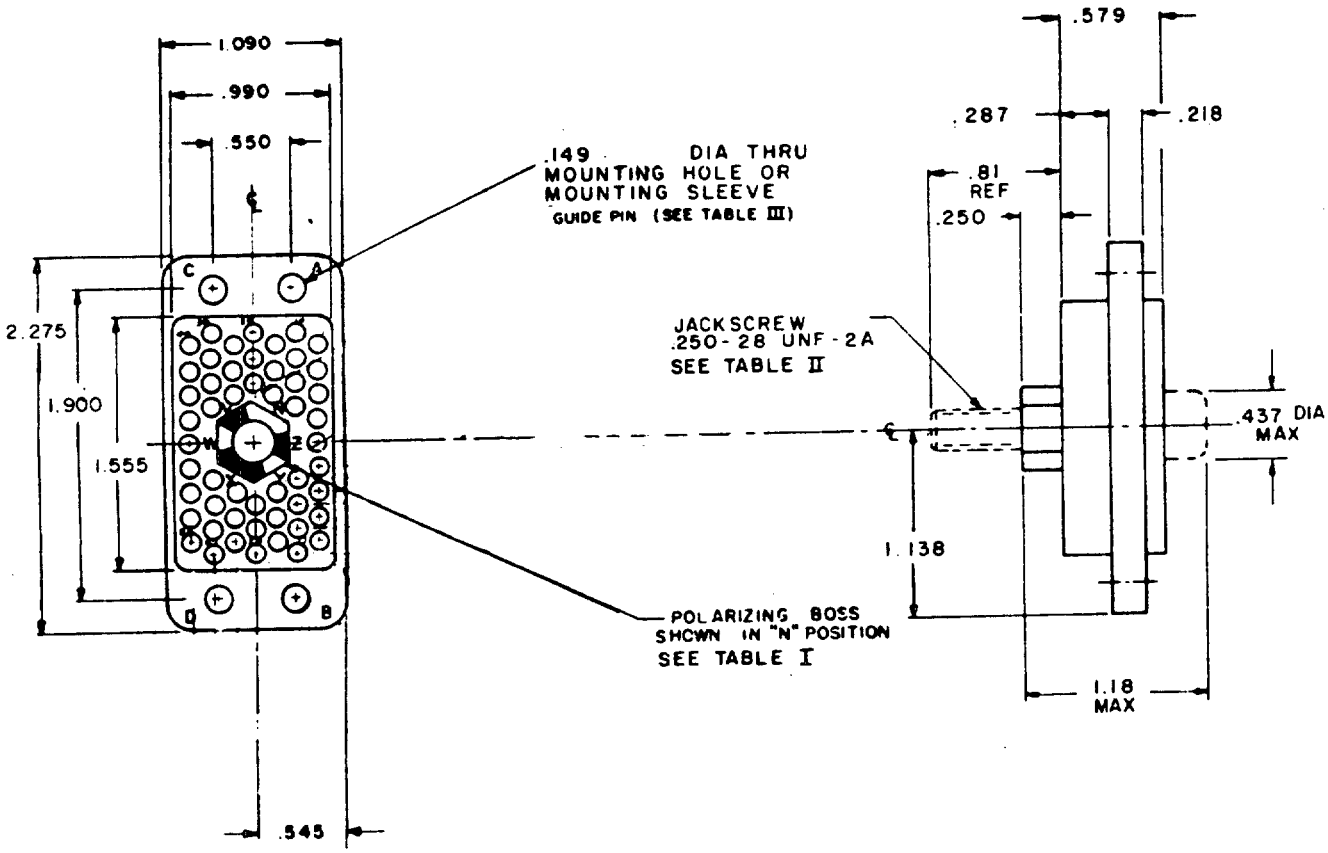

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
52 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18161

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18161-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18161-1V	V (TYPE 1)	
MS 18161-1W	W (TYPE 1)	
MS 18161-1X	X (TYPE 2)	
MS 18161-1Y	Y (TYPE 2)	
MS 18161-1Z	Z (TYPE 2)	
MS 18161-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .250 - 28 UNF - 2B
MS 18161-2V	V (TYPE 1)	
MS 18161-2W	W (TYPE 1)	
MS 18161-2X	X (TYPE 2)	
MS 18161-2Y	Y (TYPE 2)	
MS 18161-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18161-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18161-3V	V (TYPE 1)	
MS 18161-3W	W (TYPE 1)	
MS 18161-3X	X (TYPE 2)	
MS 18161-3Y	Y (TYPE 2)	
MS 18161-3Z	Z (TYPE 2)	
MS 18161-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18161-4V	V (TYPE 1)	
MS 18161-4W	W (TYPE 1)	
MS 18161-4X	X (TYPE 2)	
MS 18161-4Y	Y (TYPE 2)	
MS 18161-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.


NOTE--FOR MATING CONNECTOR SEE MS18162 (SOCKET BODY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
80 P.IN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18163

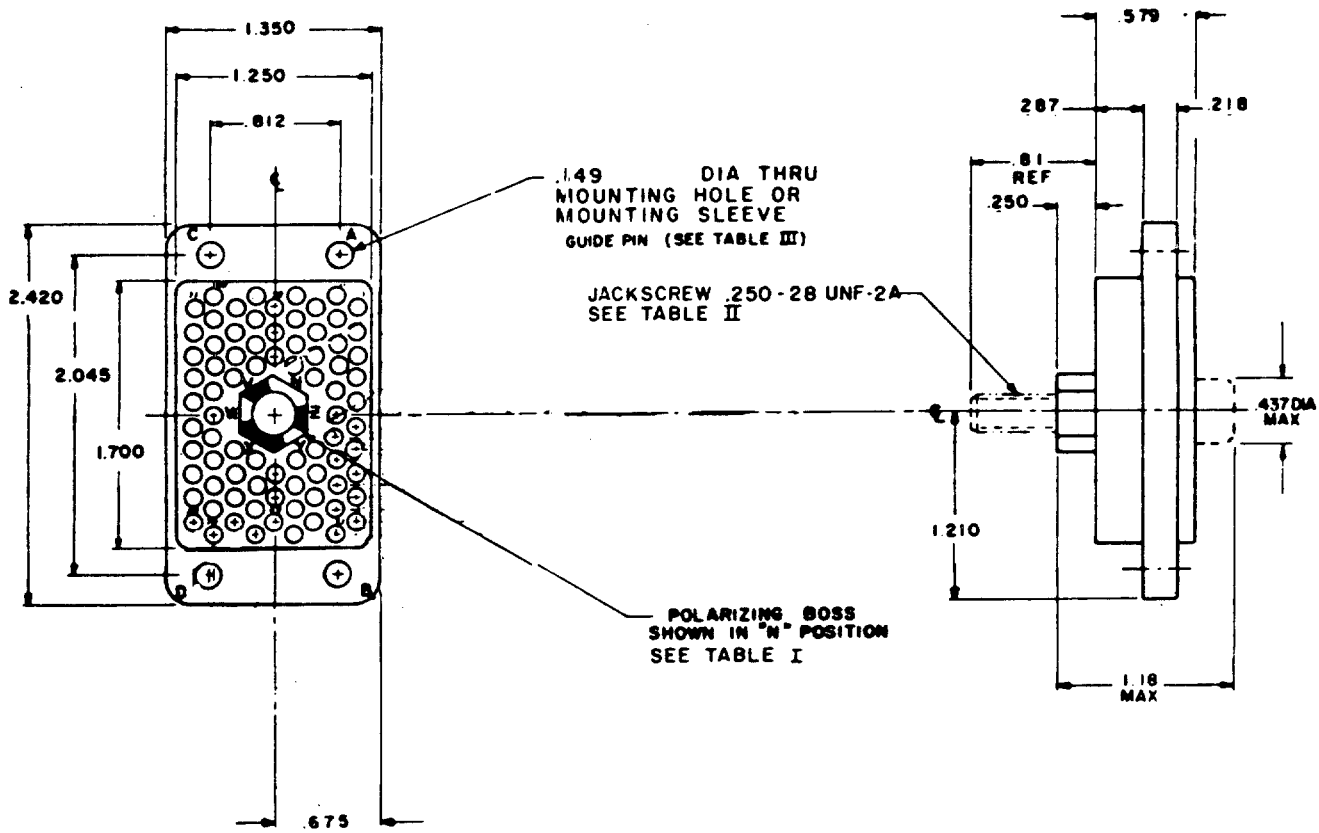



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
80 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18163

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION #	JACKSCREW
MS 18163-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18163-1V	V (TYPE 1)	
MS 18163-1W	W (TYPE 1)	
MS 18163-1X	X (TYPE 2)	
MS 18163-1Y	Y (TYPE 2)	
MS 18163-1Z	Z (TYPE 2)	
MS 18163-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .250 - 28 UNF - 2B
MS 18163-2V	V (TYPE 1)	
MS 18163-2W	W (TYPE 1)	
MS 18163-2X	X (TYPE 2)	
MS 18163-2Y	Y (TYPE 2)	
MS 18163-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION #	GUIDE PIN
MS 18163-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18163-3V	V (TYPE 1)	
MS 18163-3W	W (TYPE 1)	
MS 18163-3X	X (TYPE 2)	
MS 18163-3Y	Y (TYPE 2)	
MS 18163-3Z	Z (TYPE 2)	
MS 18163-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18163-4V	V (TYPE 1)	
MS 18163-4W	W (TYPE 1)	
MS 18163-4X	X (TYPE 2)	
MS 18163-4Y	Y (TYPE 2)	
MS 18163-4Z	Z (TYPE 2)	


#--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO
POLARIZATION LETTER ON CONNECTOR BODY.

NOTE: FOR MATING CONNECTOR SEE MS18164 (SOCKET BODY).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
104 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS17778

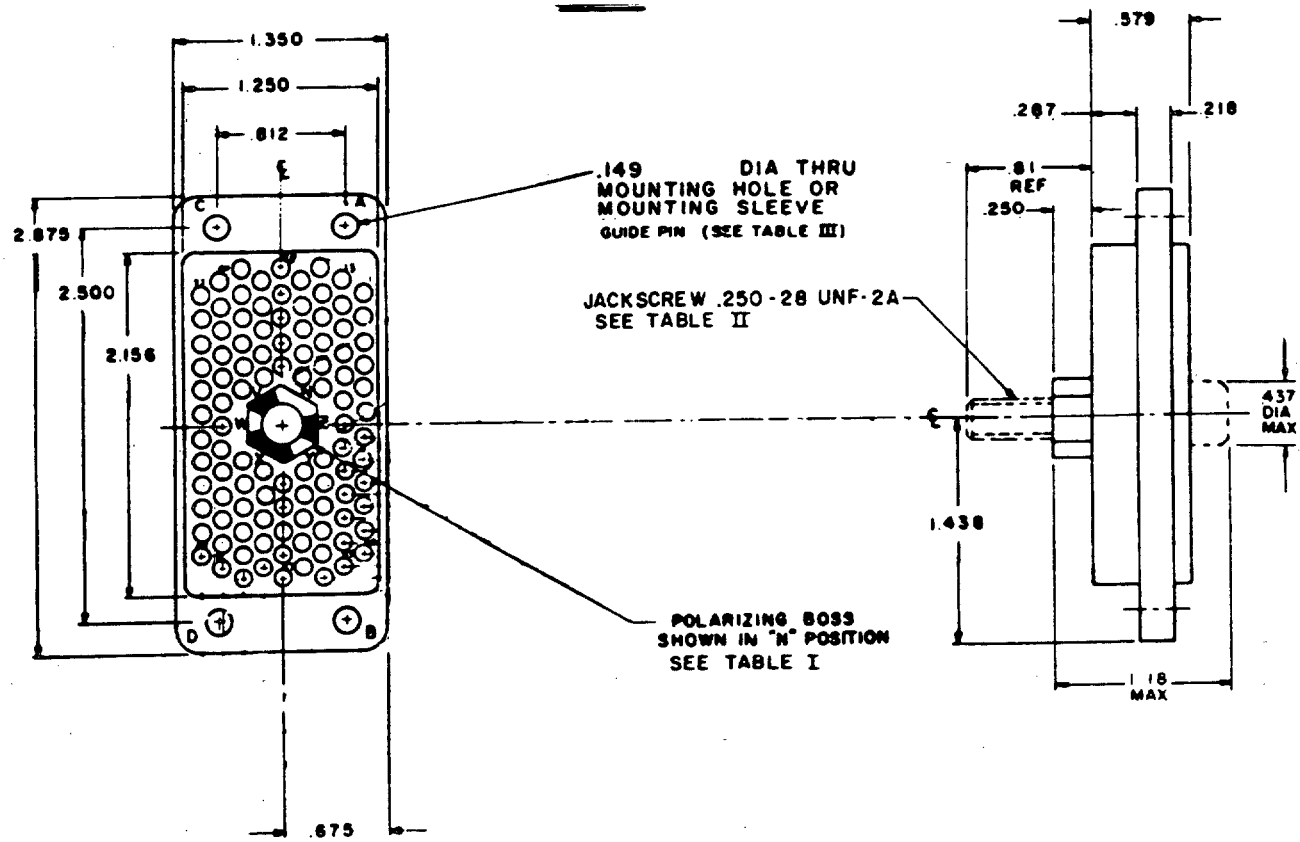

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
104 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS17778

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 17778-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 17778-1V	V (TYPE 1)	
MS 17778-1W	W (TYPE 1)	
MS 17778-1X	X (TYPE 2)	
MS 17778-1Y	Y (TYPE 2)	
MS 17778-1Z	Z (TYPE 2)	
MS 17778-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .250 - 28 UNF - 2B
MS 17778-2V	V (TYPE 1)	
MS 17778-2W	W (TYPE 1)	
MS 17778-2X	X (TYPE 2)	
MS 17778-2Y	Y (TYPE 2)	
MS 17778-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 17778-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 17778-3V	V (TYPE 1)	
MS 17778-3W	W (TYPE 1)	
MS 17778-3X	X (TYPE 2)	
MS 17778-3Y	Y (TYPE 2)	
MS 17778-3Z	Z (TYPE 2)	
MS 17778-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 17778-4V	V (TYPE 1)	
MS 17778-4W	W (TYPE 1)	
MS 17778-4X	X (TYPE 2)	
MS 17778-4Y	Y (TYPE 2)	
MS 17778-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE--FOR MATING CONNECTOR SEE MS17779 (SOCKET BODY).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
158 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18165

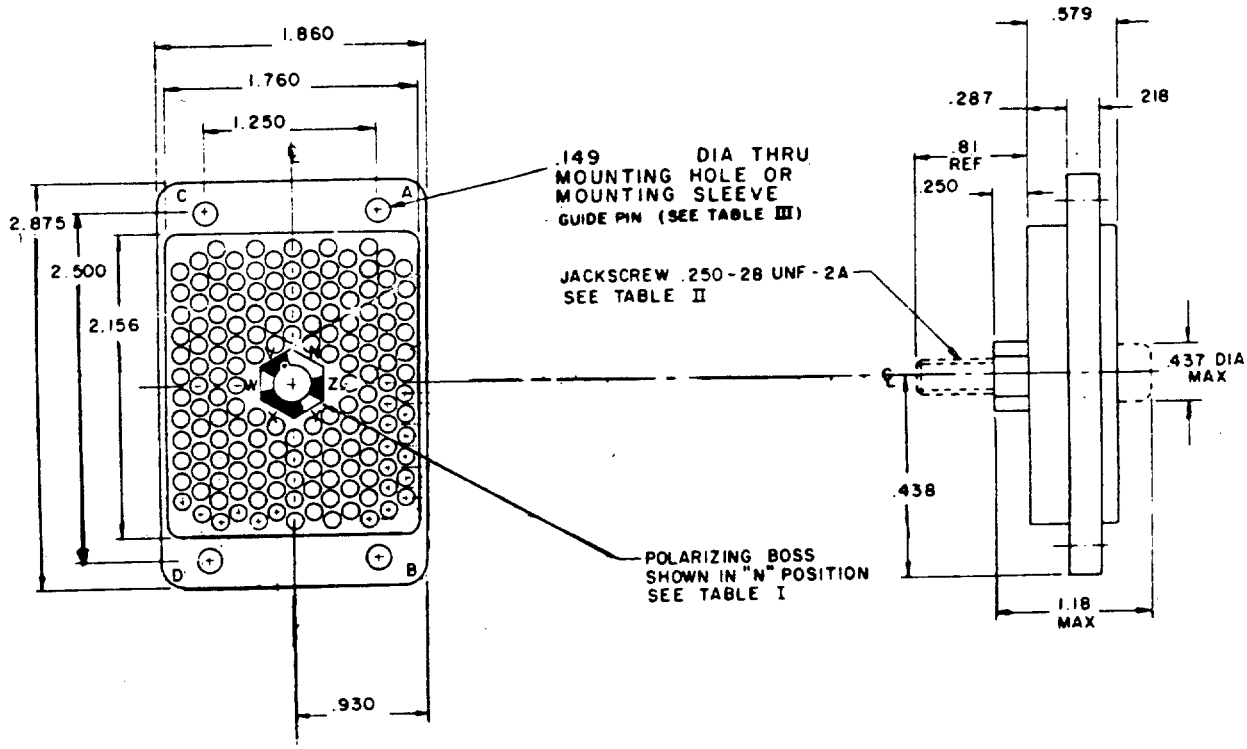

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
158 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18165

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18165-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18165-1V	V (TYPE 1)	
MS 18165-1W	W (TYPE 1)	
MS 18165-1X	X (TYPE 2)	
MS 18165-1Y	Y (TYPE 2)	
MS 18165-1Z	Z (TYPE 2)	
MS 18165-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREAD INTERNALLY .250 - 28 UNF - 2B
MS 18165-2V	V (TYPE 1)	
MS 18165-2W	W (TYPE 1)	
MS 18165-2X	X (TYPE 2)	
MS 18165-2Y	Y (TYPE 2)	
MS 18165-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18165-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18165-3V	V (TYPE 1)	
MS 18165-3W	W (TYPE 1)	
MS 18165-3X	X (TYPE 2)	
MS 18165-3Y	Y (TYPE 2)	
MS 18165-3Z	Z (TYPE 2)	
MS 18165-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254+.002 I.D. TO ACCEPT GUIDE PIN
MS 18165-4V	V (TYPE 1)	
MS 18165-4W	W (TYPE 1)	
MS 18165-4X	X (TYPE 2)	
MS 18165-4Y	Y (TYPE 2)	
MS 18165-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE: FOR MATING CONNECTOR SEE MS18166 (SOCKET BODY).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
212 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18167

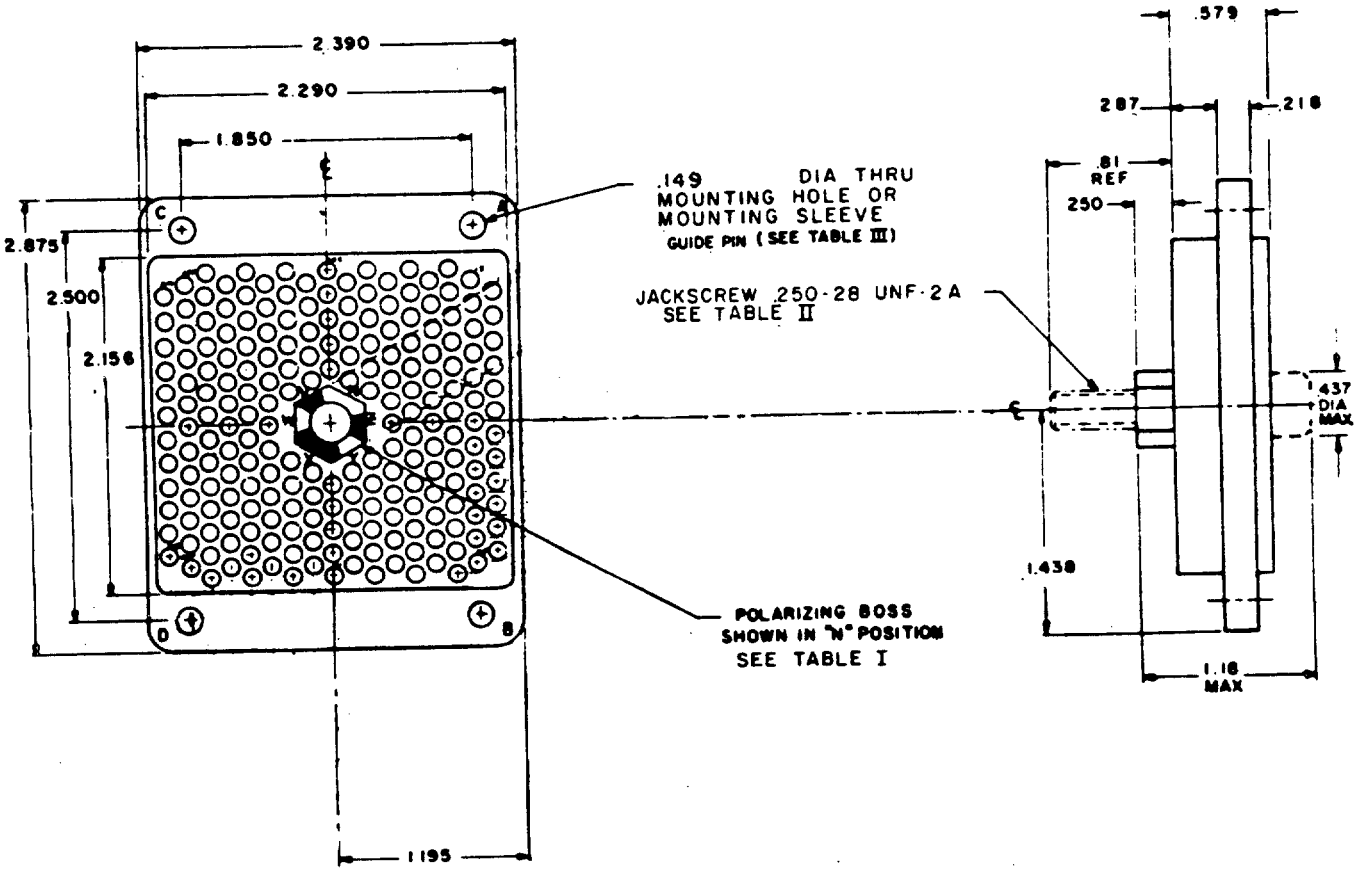

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
212 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18167

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18167-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18167-1V	V (TYPE 1)	
MS 18167-1W	W (TYPE 1)	
MS 18167-1X	X (TYPE 2)	
MS 18167-1Y	Y (TYPE 2)	
MS 18167-1Z	Z (TYPE 2)	
MS 18167-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREAD INTERNALLY .250 - 28 UNF - 2B
MS 18167-2V	V (TYPE 1)	
MS 18167-2W	W (TYPE 1)	
MS 18167-2X	X (TYPE 2)	
MS 18167-2Y	Y (TYPE 2)	
MS 18167-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18167-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18167-3V	V (TYPE 1)	
MS 18167-3W	W (TYPE 1)	
MS 18167-3X	X (TYPE 2)	
MS 18167-3Y	Y (TYPE 2)	
MS 18167-3Z	Z (TYPE 2)	
MS 18167-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254±.002 I.D. TO ACCEPT GUIDE PIN
MS 18167-4V	V (TYPE 1)	
MS 18167-4W	W (TYPE 1)	
MS 18167-4X	X (TYPE 2)	
MS 18167-4Y	Y (TYPE 2)	
MS 18167-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE: FOR MATING CONNECTOR SEE MS18168 (SOCKET BODY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL,
POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE,
CRIMP TYPE REMOVABLE SOCKET CONTACTS, SIZE 16

MIL-C-28748/10

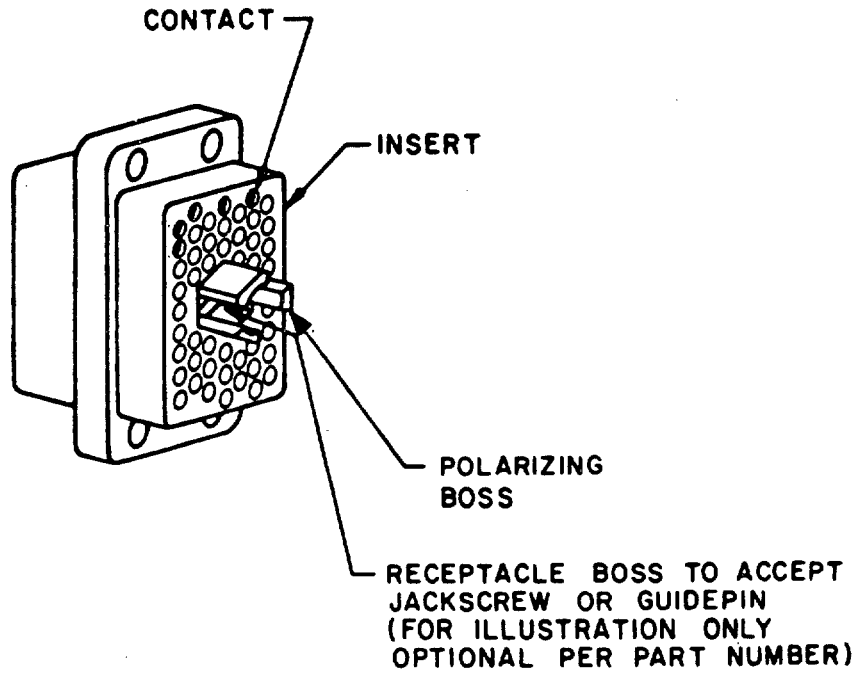

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL, POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE, CRIMP TYPE REMOVABLE SOCKET CONTACTS, SIZE 16

MIL-C-28748/10

PART NUMBER: M28748/10-*

EXAMPLE OF PART NUMBER:

(SEE PART NUMBER CODE)

M28748/10	A	0	A	L	1A
BASIC NUMBER OF SPECIFICATION SHEET	INSERT	SHIELD AND SHIELD CLAMP LOCATION OR RETAINING PLATE	SHELL TYPE	JACKSCREWS OR GUIDEPINS	CONTACTS

PART NUMBER CODE:

INSERT WITH THRU MOUNTING HOLE	NUMBER OF CONTACTS
A - MS18156	10
B - MS18158	20
C - MS18160	36
D - MS18162	52
E - MS18164	80
F - MS17779	104
G - MS18166	158
H - MS18168	212

INSERT WITH MOUNTING SLEEVE	NUMBER OF CONTACTS
J - MS18156	10
K - MS18158	20
L - MS18160	36
M - MS18162	52
N - MS18164	80
P - MS17779	104
R - MS18166	158
S - MS18168	212

SHIELD AND SHIELD CLAMP LOCATION OR RETAINING PLATE

0 - NONE INCLUDED

SHELL TYPE (POLARIZATION)
(SEE TABLES II + III)

SEE APPLICABLE INSERT MS PART NUMBER

A - 1 N
B - 1 V
C - 1 W
D - 1 X
E - 1 Y
F - 1 Z
N - 2 N
V - 2 V
W - 2 W
X - 2 X
Y - 2 Y
Z - 2 Z
G - 3 N
H - 3 V
J - 3 W
K - 3 X
L - 3 Y
M - 3 Z
P - 4 N
Q - 4 V
R - 4 W
S - 4 X
T - 4 Y
U - 4 Z

JACKSCREWS OR GUIDEPINS

L - LONG JACKSCREW FROM APPLICABLE INSERT MS.
G - GUIDEPIN FROM APPLICABLE MS.
0 - BOSS FOR JACKSCREW.
B - BOSS FOR GUIDEPIN.

NOTE: MATING CONNECTORS: MIL-C-28748/9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL,
POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE,
CRIMP TYPE REMOVABLE SOCKET CONTACTS, SIZE 16

MIL-C-28748/10

CONTACTS:

	SIZE 16 - 16 MS17807 *	SIZE 16 - 20 MS17808 *	SHIELDED MS18233 **
	PERCENT	PERCENT	PERCENT
1A	100	0	0
2A	0	100	0


* CRIMP TOOL: M22520/1-01
POSITIONER: M22520/1-03 (A)
INSTALLING TOOL: M81969/18-01
REMOVAL TOOL: M81969/20-01

** CRIMP TOOL: M22520/2-01 (INNER CONTACT)
POSITIONER: M22520/2-04
CRIMP TOOL: M22520/1-01 (OUTER CONTACT)
POSITIONER: M22520/1-07
INSTALLING TOOL: M81969/18-01
REMOVAL TOOL: M81969/20-01


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
10 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18156

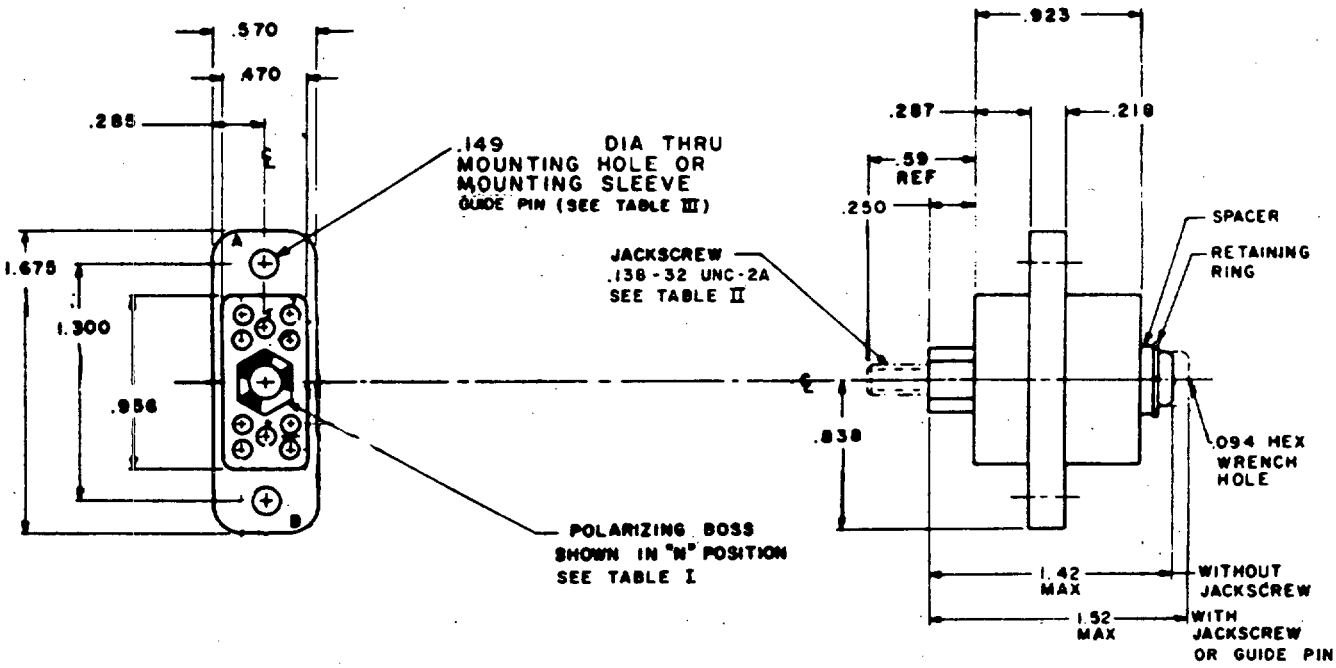

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
10 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18156

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18156-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18156-1V	V (TYPE 1)	
MS 18156-1W	W (TYPE 1)	
MS 18156-1X	X (TYPE 2)	
MS 18156-1Y	Y (TYPE 2)	
MS 18156-1Z	Z (TYPE 2)	
MS 18156-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .138 - 32 UNC - 2B
MS 18156-2V	V (TYPE 1)	
MS 18156-2W	W (TYPE 1)	
MS 18156-2X	X (TYPE 2)	
MS 18156-2Y	Y (TYPE 2)	
MS 18156-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18156-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18156-3V	V (TYPE 1)	
MS 18156-3W	W (TYPE 1)	
MS 18156-3X	X (TYPE 2)	
MS 18156 3Y	Y (TYPE 2)	
MS 18156 3Z	Z (TYPE 2)	
MS 18156-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .144 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18156-4V	V (TYPE 1)	
MS 18156-4W	W (TYPE 1)	
MS 18156-4X	X (TYPE 2)	
MS 18156-4Y	Y (TYPE 2)	
MS 18156-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE: FOR MATING CONNECTOR SEE MS18155 (PIN BODY).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
20 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18158

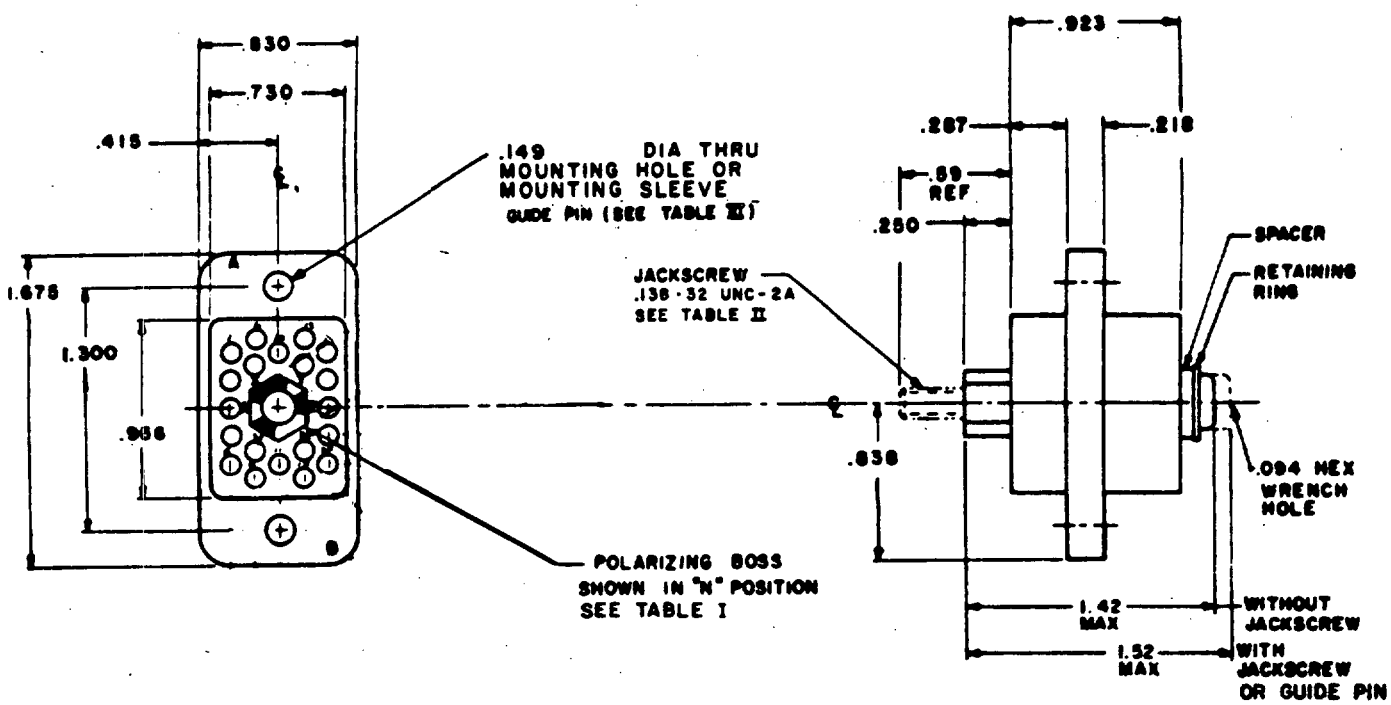

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
20 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18158

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18158-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18158-1V	V (TYPE 1)	
MS 18158-1W	W (TYPE 1)	
MS 18158-1X	X (TYPE 2)	
MS 18158-1Y	Y (TYPE 2)	
MS 18158-1Z	Z (TYPE 2)	
MS 18158-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .138 - 32 UNC - 2B
MS 18158-2V	V (TYPE 1)	
MS 18158-2W	W (TYPE 1)	
MS 18158-2X	X (TYPE 2)	
MS 18158-2Y	Y (TYPE 2)	
MS 18158-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18158-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18158-3V	V (TYPE 1)	
MS 18158-3W	W (TYPE 1)	
MS 18158-3X	X (TYPE 2)	
MS 18158-3Y	Y (TYPE 2)	
MS 18158-3Z	Z (TYPE 2)	
MS 18158-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .144 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18158-4V	V (TYPE 1)	
MS 18158-4W	W (TYPE 1)	
MS 18158-4X	X (TYPE 2)	
MS 18158-4Y	Y (TYPE 2)	
MS 18158-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE--FOR MATING CONNECTOR SEE MS18157 (PIN BODY).


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
36 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18160

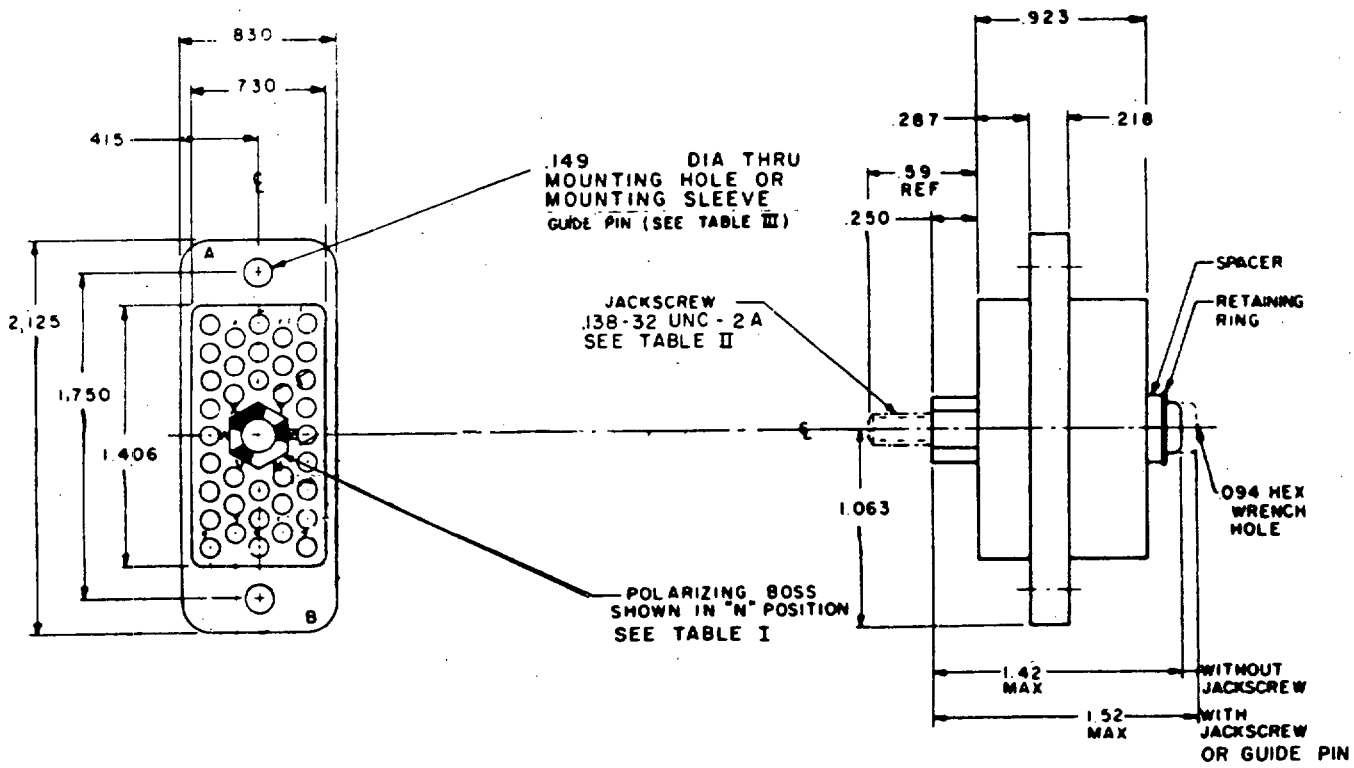

TYPE
SEE TABLE I



Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
36 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18168

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18168-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18168-1V	V (TYPE 1)	
MS 18168-1W	W (TYPE 1)	
MS 18168-1X	X (TYPE 2)	
MS 18168-1Y	Y (TYPE 2)	
MS 18168-1Z	Z (TYPE 2)	
MS 18168-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .138 - 32 UNC - 2B
MS 18168-2V	V (TYPE 1)	
MS 18168-2W	W (TYPE 1)	
MS 18168-2X	X (TYPE 2)	
MS 18168-2Y	Y (TYPE 2)	
MS 18168-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18168-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18168-3V	V (TYPE 1)	
MS 18168-3W	W (TYPE 1)	
MS 18168-3X	X (TYPE 2)	
MS 18168-3Y	Y (TYPE 2)	
MS 18168-3Z	Z (TYPE 2)	
MS 18168-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .144 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18168-4V	V (TYPE 1)	
MS 18168-4W	W (TYPE 1)	
MS 18168-4X	X (TYPE 2)	
MS 18168-4Y	Y (TYPE 2)	
MS 18168-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE: FOR MATING CONNECTOR SEE MS18159 (PIN BODY).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
52 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18162

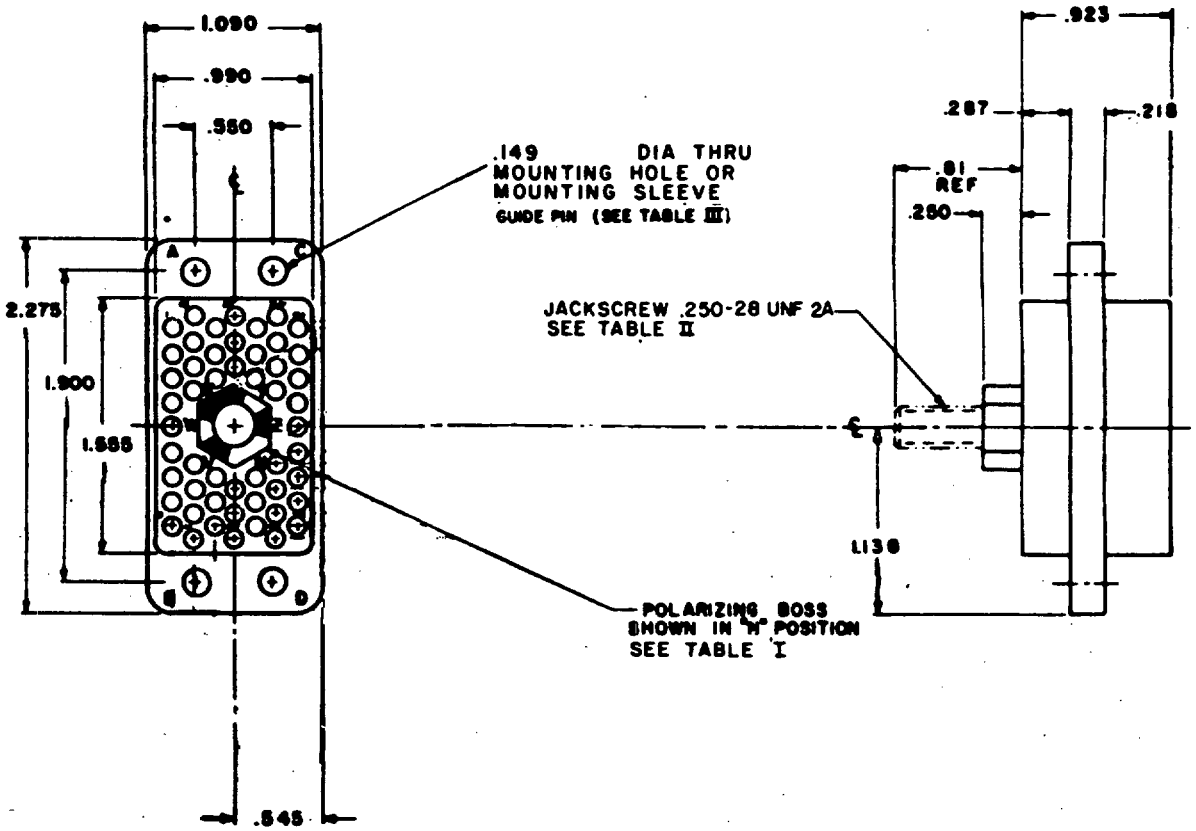

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
52 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18162

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18162-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18162-1V	V (TYPE 1)	
MS 18162-1W	W (TYPE 1)	
MS 18162-1X	X (TYPE 2)	
MS 18162-1Y	Y (TYPE 2)	
MS 18162-1Z	Z (TYPE 2)	
MS 18162-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .250 - 28 UNF - 2B
MS 18162-2V	V (TYPE 1)	
MS 18162-2W	W (TYPE 1)	
MS 18162-2X	X (TYPE 2)	
MS 18162-2Y	Y (TYPE 2)	
MS 18162-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18162-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18162-3V	V (TYPE 1)	
MS 18162-3W	W (TYPE 1)	
MS 18162-3X	X (TYPE 2)	
MS 18162-3Y	Y (TYPE 2)	
MS 18162-3Z	Z (TYPE 2)	
MS 18162-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18162-4V	V (TYPE 1)	
MS 18162-4W	W (TYPE 1)	
MS 18162-4X	X (TYPE 2)	
MS 18162-4Y	Y (TYPE 2)	
MS 18162-4Z	Z (TYPE 2)	


*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO
POLARIZATION LETTER ON CONNECTOR BODY.

NOTE--FOR MATING CONNECTOR SEE MS18161 (PIN BODY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
80 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18164

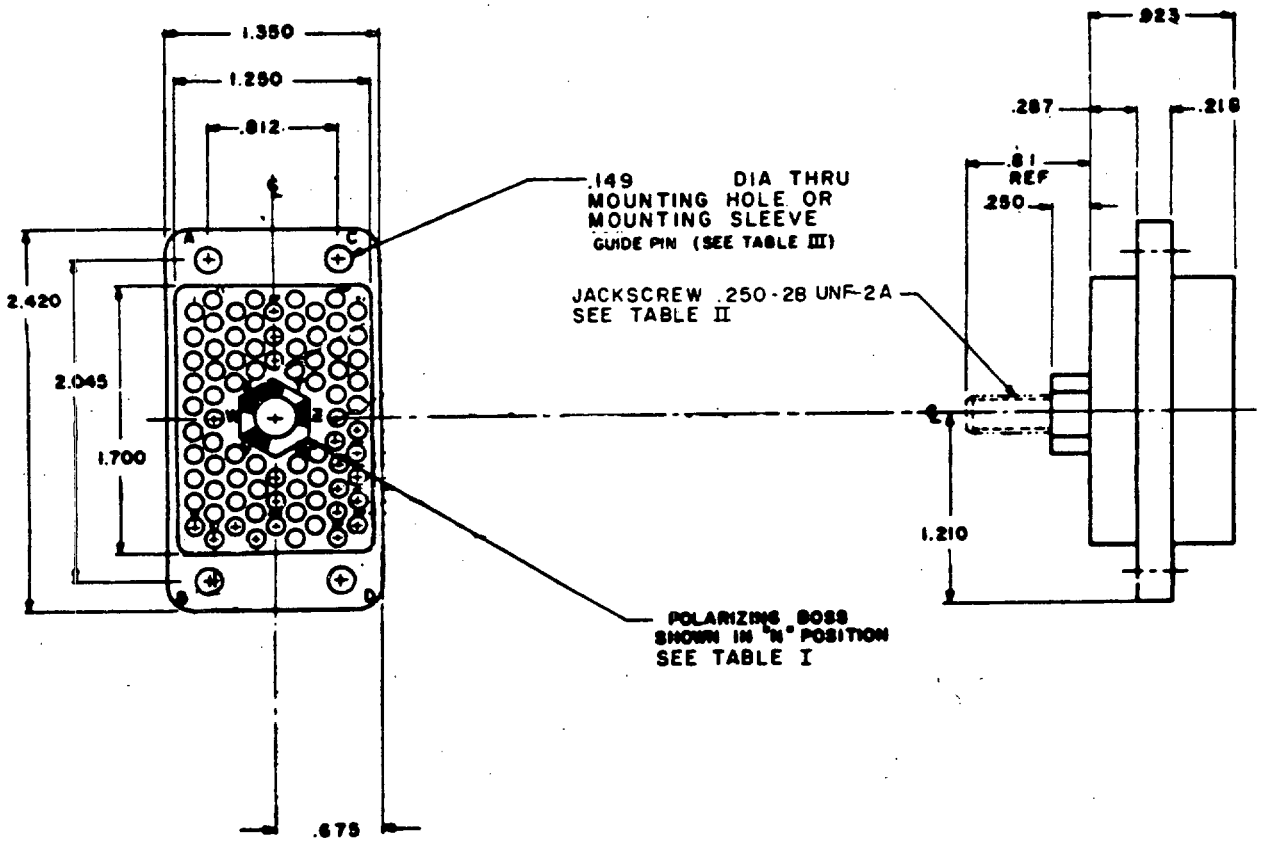

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
80 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18164

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION #	JACKSCREW
MS 18164-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18164-1V	V (TYPE 1)	
MS 18164-1W	W (TYPE 1)	
MS 18164-1X	X (TYPE 2)	
MS 18164-1Y	Y (TYPE 2)	
MS 18164-1Z	Z (TYPE 2)	
MS 18164-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .250 - 28 UNF - 2B
MS 18164-2V	V (TYPE 1)	
MS 18164-2W	W (TYPE 1)	
MS 18164-2X	X (TYPE 2)	
MS 18164-2Y	Y (TYPE 2)	
MS 18164-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION #	GUIDE PIN
MS 18164-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18164-3V	V (TYPE 1)	
MS 18164-3W	W (TYPE 1)	
MS 18164-3X	X (TYPE 2)	
MS 18164-3Y	Y (TYPE 2)	
MS 18164-3Z	Z (TYPE 2)	
MS 18164-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18164-4V	V (TYPE 1)	
MS 18164-4W	W (TYPE 1)	
MS 18164-4X	X (TYPE 2)	
MS 18164-4Y	Y (TYPE 2)	
MS 18164-4Z	Z (TYPE 2)	


#--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE: FOR MATING CONNECTOR SEE MS18163 (PIN BODY).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
104 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS17779

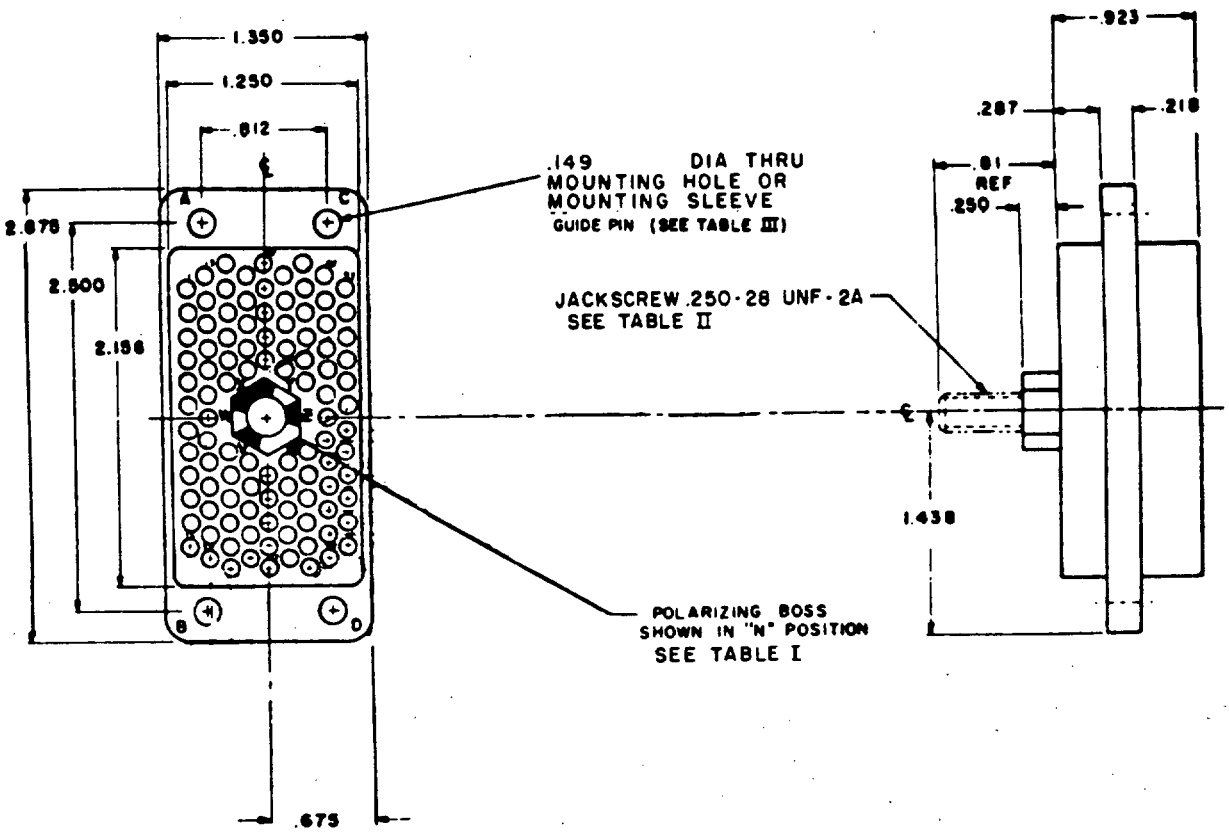

TYPE
SEE TABLE I



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
104 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS17779

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 17779-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 17779-1V	V (TYPE 1)	
MS 17779-1W	W (TYPE 1)	
MS 17779-1X	X (TYPE 2)	
MS 17779-1Y	Y (TYPE 2)	
MS 17779-1Z	Z (TYPE 2)	
MS 17779-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .250 - 28 UNF - 2B
MS 17779-2V	V (TYPE 1)	
MS 17779-2W	W (TYPE 1)	
MS 17779-2X	X (TYPE 2)	
MS 17779-2Y	Y (TYPE 2)	
MS 17779-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 17779-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 17779-3V	V (TYPE 1)	
MS 17779-3W	W (TYPE 1)	
MS 17779-3X	X (TYPE 2)	
MS 17779-3Y	Y (TYPE 2)	
MS 17779-3Z	Z (TYPE 2)	
MS 17779-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 17779-4V	V (TYPE 1)	
MS 17779-4W	W (TYPE 1)	
MS 17779-4X	X (TYPE 2)	
MS 17779-4Y	Y (TYPE 2)	
MS 17779-4Z	Z (TYPE 2)	

*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE--FOR MATING CONNECTOR SEE MS17778 (PIN BODY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
158 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18166

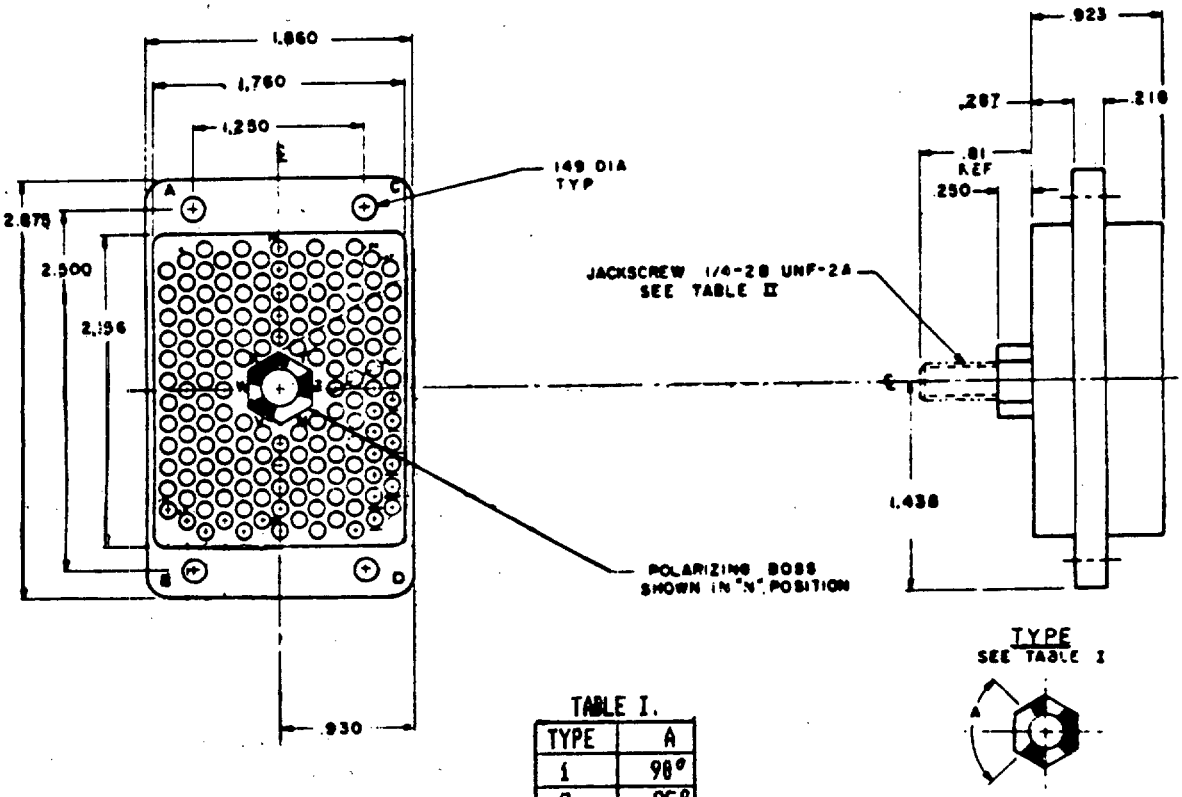


TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION #	JACKSCREW
MS 18166-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18166-1V	V (TYPE 1)	
MS 18166-1W	W (TYPE 1)	
MS 18166-1X	X (TYPE 2)	
MS 18166-1Y	Y (TYPE 2)	
MS 18166-1Z	Z (TYPE 2)	
MS 18166-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR
MS 18166-2V	V (TYPE 1)	
MS 18166-2W	W (TYPE 1)	
MS 18166-2X	X (TYPE 2)	
MS 18166-2Y	Y (TYPE 2)	
MS 18166-2Z	Z (TYPE 2)	


#--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE: FOR MATING CONNECTOR SEE MS18165 (PIN BODY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
212 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18168

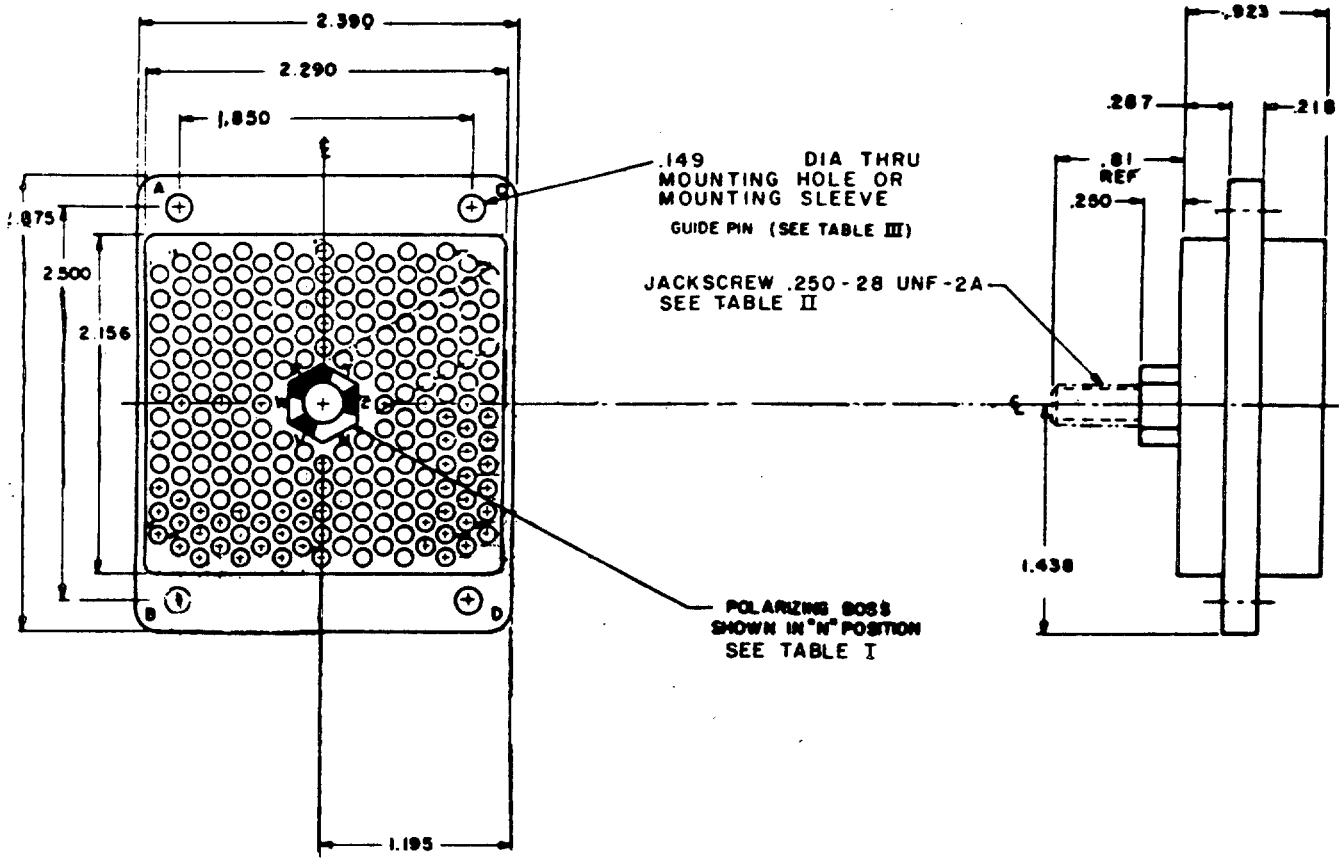

TYPE
SEE TABLE I



Source: https://assist.dla.mil/ -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
212 SOCKET CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18168

TABLE I.

TYPE	A
1	90°
2	85°

TABLE II.

MS PART NUMBER	POLARIZATION *	JACKSCREW
MS 18168-1N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18168-1V	V (TYPE 1)	
MS 18168-1W	W (TYPE 1)	
MS 18168-1X	X (TYPE 2)	
MS 18168-1Y	Y (TYPE 2)	
MS 18168-1Z	Z (TYPE 2)	
MS 18168-2N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS THREADED INTERNALLY .250 - 28 UNF - 2B
MS 18168-2V	V (TYPE 1)	
MS 18168-2W	W (TYPE 1)	
MS 18168-2X	X (TYPE 2)	
MS 18168-2Y	Y (TYPE 2)	
MS 18168-2Z	Z (TYPE 2)	

TABLE III.

MS PART NUMBER	POLARIZATION *	GUIDE PIN
MS 18168-3N	N (TYPE 1)	SUPPLIED WITH CONNECTOR
MS 18168-3V	V (TYPE 1)	
MS 18168-3W	W (TYPE 1)	
MS 18168-3X	X (TYPE 2)	
MS 18168-3Y	Y (TYPE 2)	
MS 18168-3Z	Z (TYPE 2)	
MS 18168-4N	N (TYPE 1)	NOT SUPPLIED WITH CONNECTOR POLARIZING BOSS WITH .254 ±.002 I.D. TO ACCEPT GUIDE PIN
MS 18168-4V	V (TYPE 1)	
MS 18168-4W	W (TYPE 1)	
MS 18168-4X	X (TYPE 2)	
MS 18168-4Y	Y (TYPE 2)	
MS 18168-4Z	Z (TYPE 2)	

*--LARGE OPENING IN POLARIZATION BOSS MUST BE ADJACENT TO POLARIZATION LETTER ON CONNECTOR BODY.

NOTE--FOR MATING CONNECTOR SEE MS18167 (PIN BODY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW

MIL-S-28804

SCOPE: CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, HAVE SIZE 22 NONREMOVABLE SOLDER TYPE CONTACTS, AND REAR REMOVABLE CRIMP TYPE CONTACTS. THESE CONNECTORS ARE USED WHERE PRESENCE OF RESIDUAL MAGNETISM MUST BE HELD TO VERY LOW LEVELS TO AVOID INTERFERENCE WITH NEARBY SENSITIVE INSTRUMENTATION.
CRIMP CONTACT CONNECTORS HAVE THE ADDITIONAL ADVANTAGE OF POSSESSING REAR REMOVABLE CRIMP TYPE CONTACTS.


CLASSES:

A. CLASS G CONNECTORS ARE INTENDED FOR USE IN NONENVIRONMENT RESISTING APPLICATIONS WHERE THE OPERATING TEMPERATURE RANGE OF -55°C TO +125°C IS EXPERIENCED.
B. CLASS E CONNECTORS ARE INTENDED FOR ENVIRONMENTAL RESISTING APPLICATIONS. PROVISIONS ARE MADE FOR SEALING AROUND WIRE AT REAR OF CONNECTORS.

TABLE A. CLASS USED WITH SLASH SHEET

CLASS	SLASH SHEET NO.
G	1, 2
E	3, 4


PART NUMBER: **EXAMPLE**

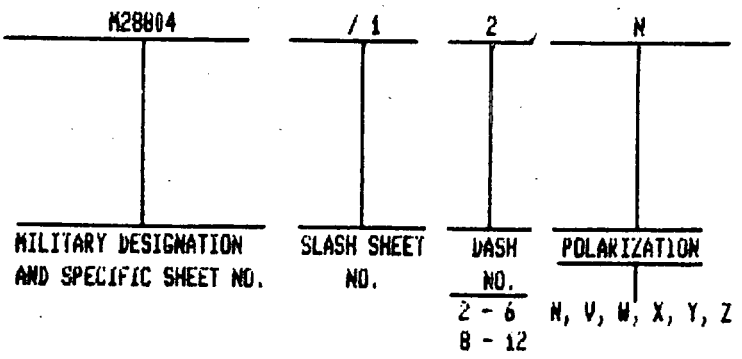

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, CRIMP REMOVABLE SOCKET CONTACTS, CLASS G


MIL-C-26804/1

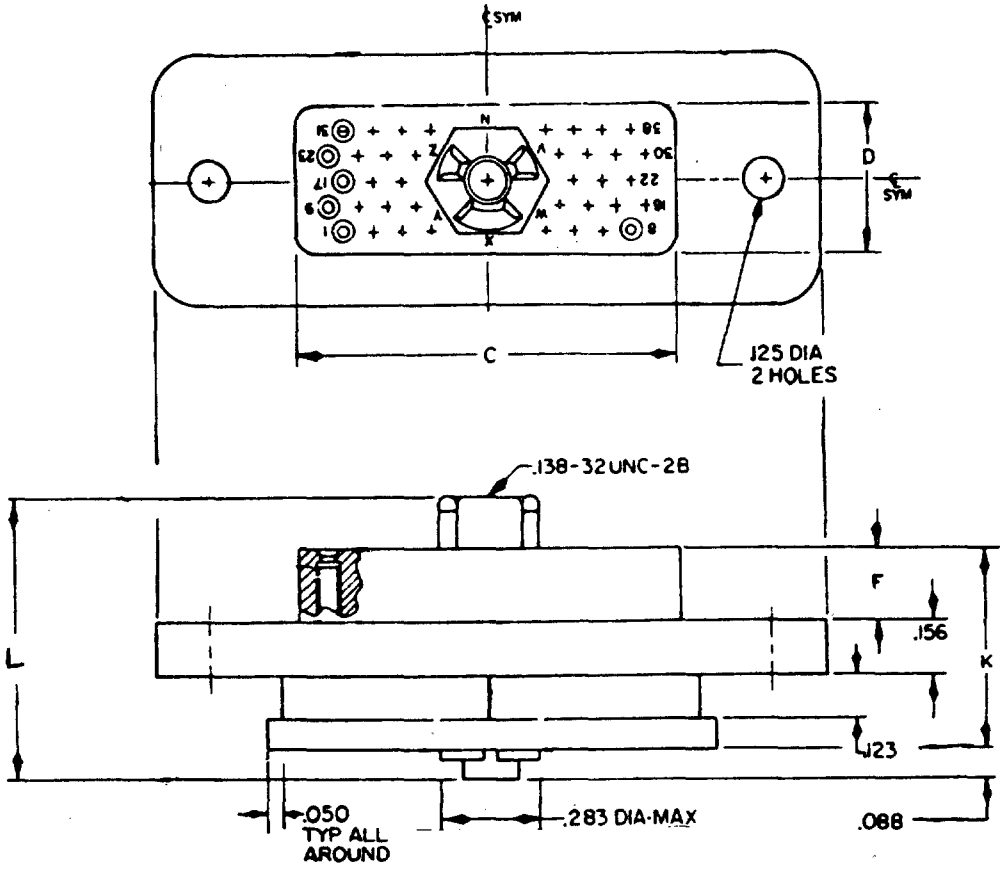

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, CRIMP REMOVABLE SOCKET CONTACTS, CLASS G

MIL-C-28804/1

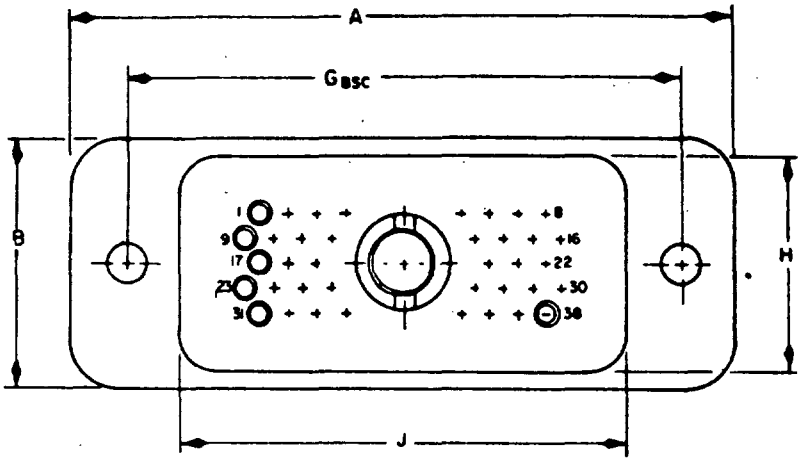

BOTTOM VIEW

PART NUMBER: C28804/1-*

SIZE OF CONTACT: 22

TABLE I. DIMENSIONS

DASH NO. *	SHELL SIZE	NO. OF CONT	INSERT ARR. NO.	A	B	C	D	F	G BSC	H	J	K	L
2	10	38	SECT 20 #1	1.915	.725	1.095	.423	.216	1.625	.625	1.308	.582	.810
3	12	88	SECT 30 #1	2.780		1.935			2.460		2.148		
4	14	108	SECT 40 #1	1.990	1.077	1.312	.772		1.718	.977	1.532		
5	16	132	SECT 50 #1	2.790	.902	1.943	.607		2.470	.802	2.156		
6	18	244	SECT 60 #1	4.128		3.289	.615		3.808		3.494		
8	10	38	SECT 20 #1	1.918	.725	1.095	.423		1.625	.625	1.308		1.007
9	12	88	SECT 30 #1	2.780		1.935			2.460		2.148		
10	14	108	SECT 40 #1	1.990	1.077	1.314	.772		1.718	.977	1.532		
11	16	132	SECT 50 #1	2.790	.902	1.913	.607		2.470	.802	2.156		
12	18	244	SECT 60 #1	4.128		3.289	.615		3.808		3.494		


* DASH NUMBERS 2 THRU 6 ARE SUPPLIED WITH FEMALE FIXED JACKSOCKETS. DASH NUMBERS 8 THRU 12 ARE SUPPLIED WITH FEMALE TURNING JACKSOCKETS.

NOTE--MATING CONNECTORS M28804/1 - 2 THRU - 6 MATES WITH M28804/2 - 2 THRU - 6, M28804/4 - 2 THRU - 6, M28804/1 - 8 THRU-12 MATES WITH M28804/2 - 8 THRU-12, M28804/4 - 8 THRU - 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS G


MIL-C-28804/2

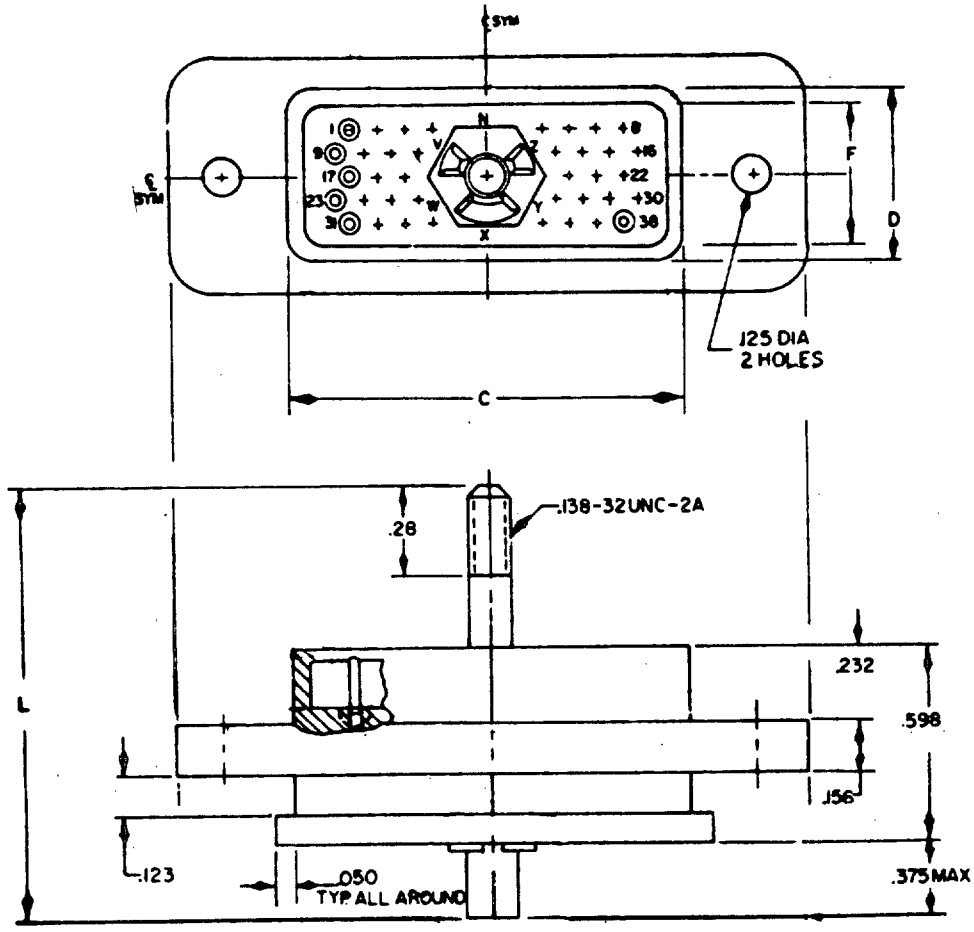

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS G

MIL-C-28804/2

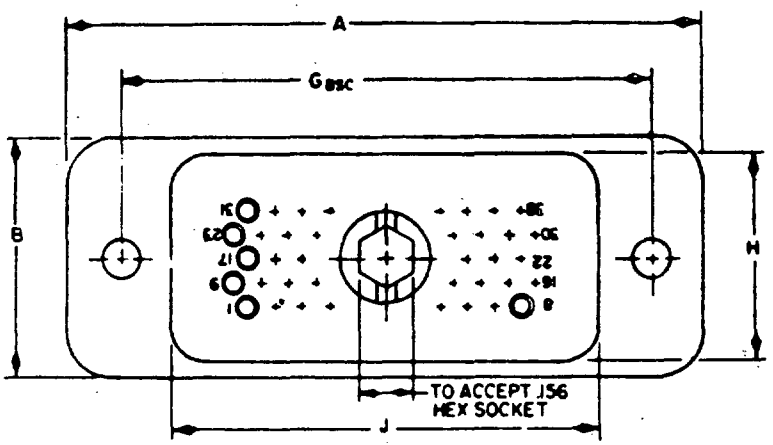

PART NUMBER: C28804/2-*

SIZE OF CONTACTS: 22

TABLE I. DIMENSIONS

DASH NO. *	SHELL SIZE	NO. OF CONT	INSERT ARR. NO.	A	B	C	D	F	G BSC	H	J	K	L
2	10	38	SECT 20 #1	1.945	.725	1.220	.548	.436	1.625	.625	1.308	.050	1.360
3	12	88	SECT 30 #1	2.780		2.060			2.460		2.148		
4	14	108	SECT 40 #1	1.990	1.077	1.444	.897	.785	1.718	.977	1.532	.058	
5	16	132	SECT 50 #1	2.790	.902	2.068	.732	.620	2.470	.802	2.156	.100	
6	18	244	SECT 60 #1	4.128		3.406			3.808		3.494		
8	10	38	SECT 20 #1	1.945	.725	1.220	.548	.436	1.625	.625	1.308	.050	.898
9	12	88	SECT 30 #1	2.780		2.060			2.460		2.148		
10	14	108	SECT 40 #1	1.990	1.077	1.444	.897	.785	1.718	.977	1.532	.058	
11	16	132	SECT 50 #1	2.790	.902	2.068	.732	.620	2.470	.802	2.156	.100	
12	18	244	SECT 60 #1	4.128		3.406			3.808		3.494		


* DASH NUMBERS 2 THRU 6 ARE SUPPLIED WITH MALE TURNING JACKSCREWS, DASH NUMBERS 8 THRU 12 ARE SUPPLIED WITH MALE FIXED JACKSCREWS.

NOTE--MATING CONNECTORS M28804/2 - 2 THRU - 6 MATES WITH M28804/1 - 2 THRU - 6, M28804/3 - 2 THRU - 6, M28804/2 - 8 THRU - 12, MATES WITH M28804/1 - 8 THRU - 12, M28804/3 - 8 THRU - 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, CRIMP REMOVABLE SOCKET CONTACTS, CLASS E


MIL-C-28804/3

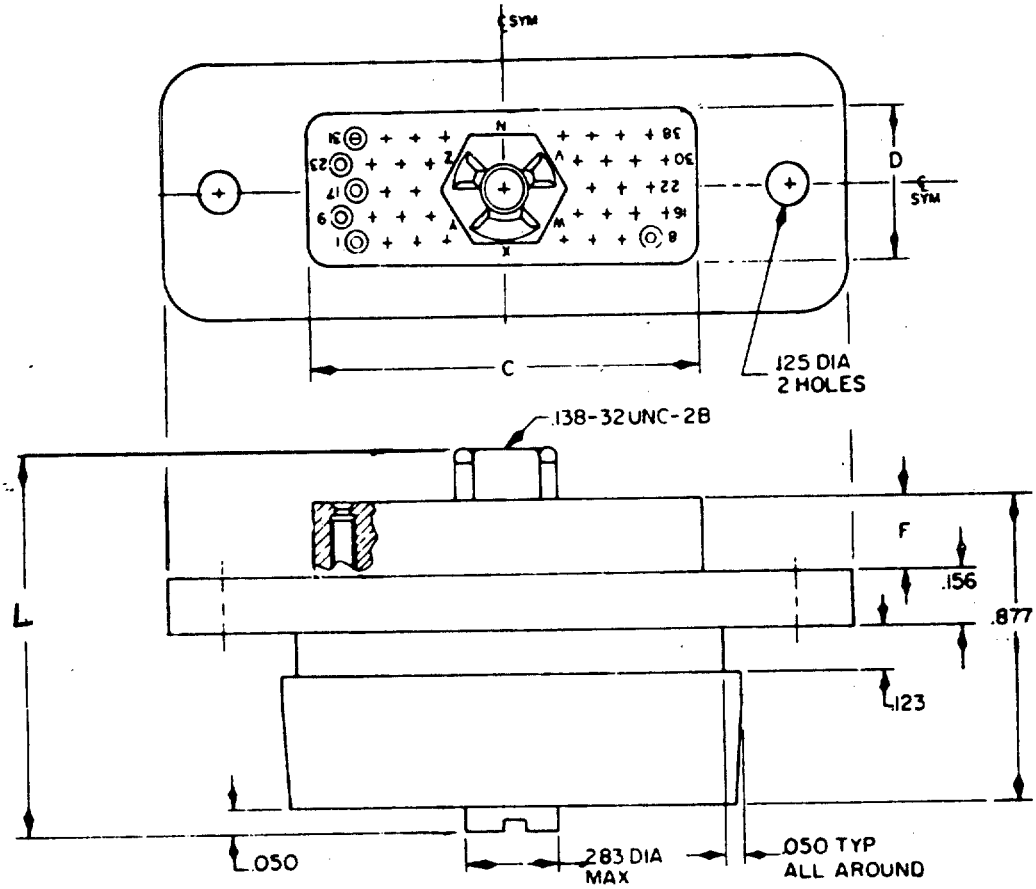

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, CRIMP REMOVABLE SOCKET CONTACTS, CLASS E

MIL-C-28804/3

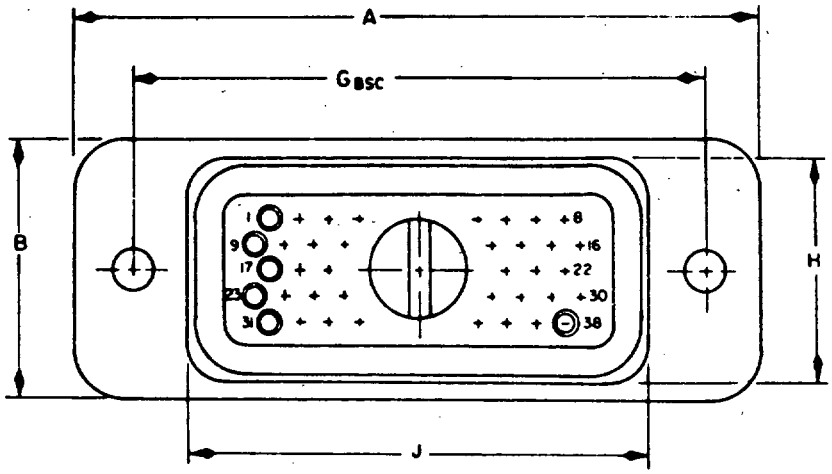

BOTTOM VIEW

PART NUMBER: C28804/3-*

SIZE OF CONTACTS: 22

TABLE I. DIMENSIONS

DASH NO. *	SHELL SIZE	NO. OF CONT	INSERT ARR. NO.	A	B	C	D	F	G BSC	H	J	L
2	10	38	SECT 20 #1	1.945	.725	1.095	.423	.216	1.625	.625	1.308	1.075
3	12	88	SECT 30 #1	2.780		1.935			2.460		2.148	
4	14	108	SECT 40 #1	1.990	1.077	1.318	.772		1.718	.977	1.532	
5	16	132	SECT 50 #1	2.790	.902	1.943	.607		2.470	.802	2.156	
6	18	244	SECT 60 #1	4.128		3.289	.615		3.808		3.494	
8	10	38	SECT 20 #1	1.945	.725	1.095	.423		1.625	.625	1.308	1.355
9	12	88	SECT 30 #1	2.780		1.935			2.460		2.148	
10	14	108	SECT 40 #1	1.990	1.077	1.318	.772		1.718	.977	1.532	
11	16	132	SECT 50 #1	2.790	.902	1.943	.607		2.470	.802	2.156	
12	18	244	SECT 60 #1	4.128		3.289	.615		3.808		3.494	


* DASH NUMBERS 2 THRU 6 ARE SUPPLIED WITH FEMALE FIXED JACKSOCKETS, DASH NUMBERS 8 THRU 12 ARE SUPPLIED WITH FEMALE TURNING JACKSOCKETS.

NOTE--MATING CONNECTORS M28804/3 - 2 THRU - 6 MATES WITH M28804/2 - 2 THRU - 6, M28804/4 - 2 THRU - 6, M28804/3 - 8 THRU - 12 MATES WITH M28804/2 - 8 THRU-12, M28804/4 - 8 THRU - 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS E


MIL-C-28804/4

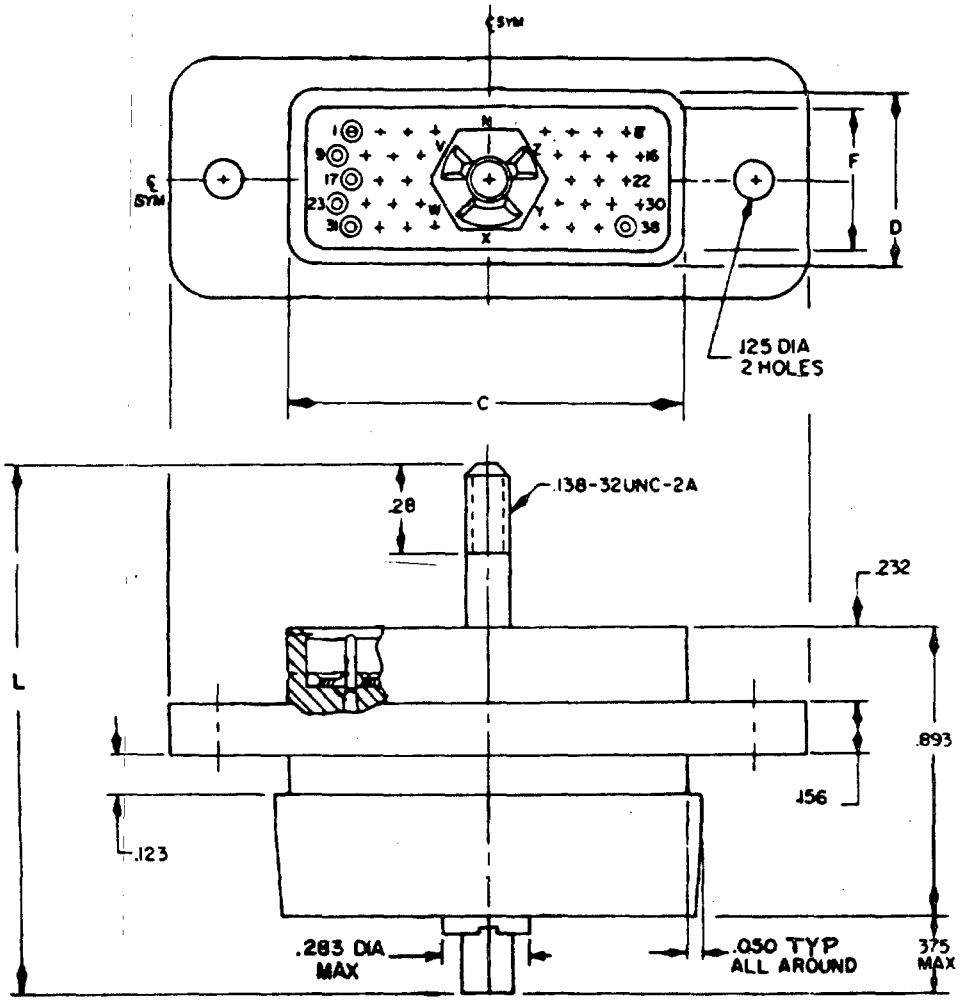

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS E

MIL-C-28804/4

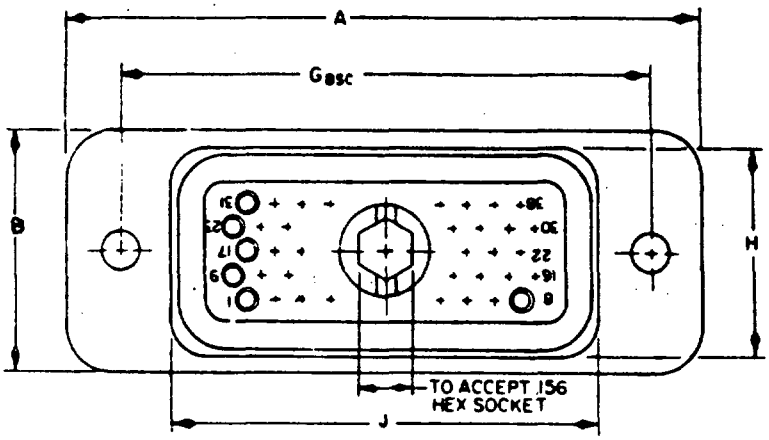

BOTTOM VIEW

PART NUMBER: C28804/4-*

SIZE OF CONTACT: 22

TABLE I. DIMENSIONS

DASH NO. *	SHELL SIZE	NO. OF CONT	INSERT ARR. NO.	A	B	C	D	F	G BSC	H	J
2	10	38	SECT 20 #1	1.945	.725	1.220	.548	.436	1.625	.625	1.308
3	12	88	SECT 30 #1	2.780		2.060			2.460		2.148
4	14	108	SECT 40 #1	1.990	1.077	1.444	.897	.785	1.718	.977	1.532
5	16	132	SECT 50 #1	2.790	.902	2.068	.732	.620	2.470	.802	2.156
6	18	244	SECT 60 #1	4.128		3.406			3.808		3.494
8	10	38	SECT 20 #1	1.945	.725	1.220	.548	.436	1.625	.625	1.308
9	12	88	SECT 30 #1	2.780		2.060			2.460		2.148
10	14	108	SECT 40 #1	1.990	1.077	1.444	.897	.785	1.718	.977	1.532
11	16	132	SECT 50 #1	2.790	.902	2.068	.732	.620	2.470	.802	2.156
12	18	244	SECT 60 #1	4.128		3.406			3.808		3.494


* DASH NUMBERS 2 THRU 6 ARE SUPPLIED WITH MALE TURNING JACKSCREWS, DASH NUMBERS 8 THRU 12 ARE SUPPLIED WITH MALE FIXED JACKSCREWS.

NOTE--MATING CONNECTORS M28804/4 - 2 THRU - 6 MATES WITH M28804/1 - 2 THRU - 6, M28804/3 - 2 THRU - 6, M28804/4 - 8 THRU 12 MATES WITH M28804/1 - 8 THRU-12, M28804/3 - 8 THRU - 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, CRIMP REMOVABLE SOCKET CONTACTS, CLASS P


MIL-C-26804/5

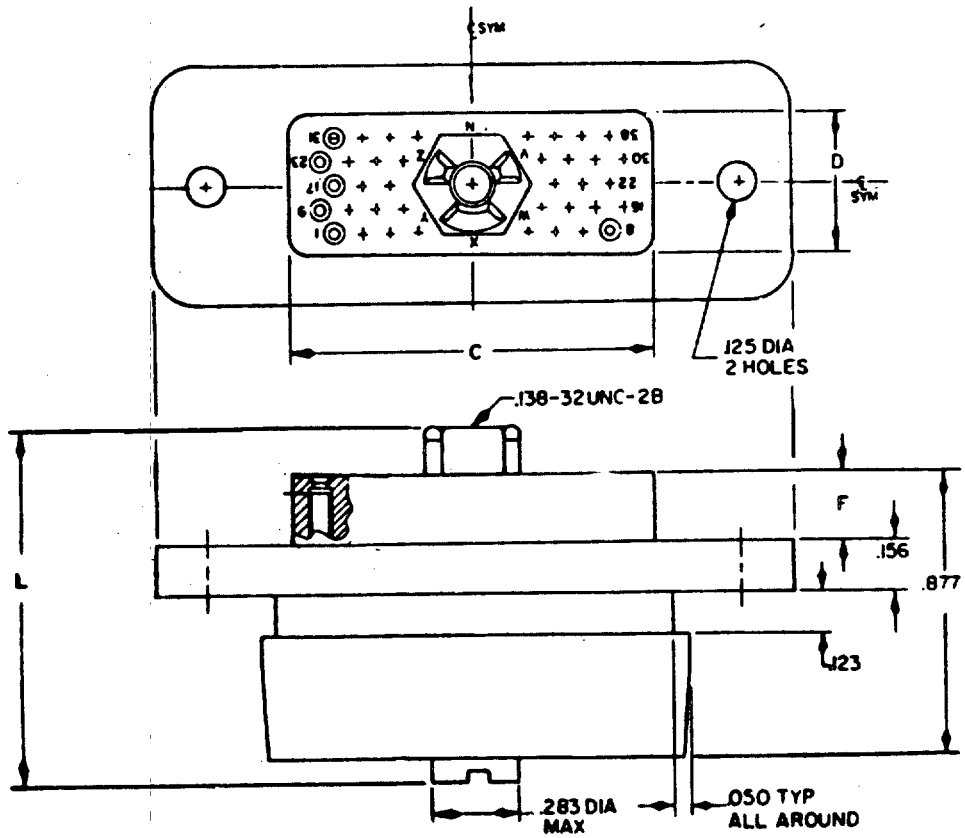

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, CRIMP REMOVABLE SOCKET CONTACTS, CLASS P

MIL-C-28804/5

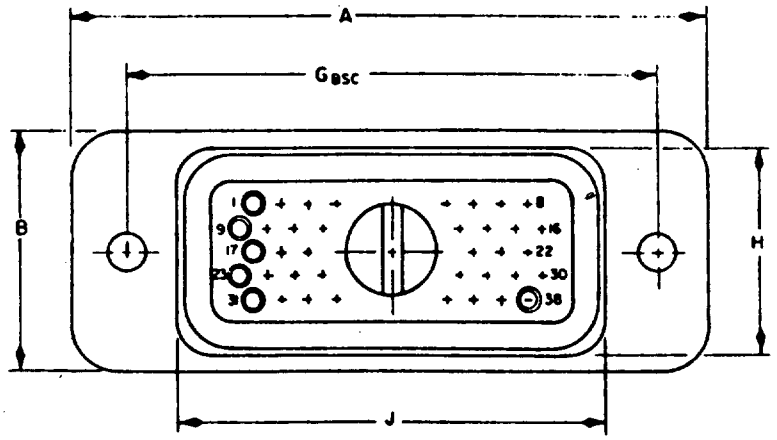

BOTTOM VIEW

PART NUMBER: C28804/5-*

SIZE OF CONTACTS: 22

TABLE I. DIMENSIONS

DASH NO. *	SHELL SIZE	NO. OF CONT	INSERT ARR. NO.	A	B	C	D	F	G BSC	H	J
2	10	38	SECT 20 #1	1.945	.725	1.095	.423	.216	1.625	.625	1.308
3	12	88	SECT 30 #1	2.780		1.935			2.460		2.148
4	14	108	SECT 40 #1	1.990	1.077	1.318	.772		1.718	.977	1.532
5	16	132	SECT 50 #1	2.790	.902	1.943	.607		2.470	.802	2.156
6	18	244	SECT 60 #1	4.128		3.289	.615		3.808		3.494
8	10	38	SECT 20 #1	1.945	.725	1.095	.423		1.625	.625	1.308
9	12	88	SECT 30 #1	2.780		1.935			2.460		2.148
10	14	108	SECT 40 #1	1.990	1.077	1.318	.772		1.718	.977	1.532
11	16	132	SECT 50 #1	2.790	.902	1.943	.607		2.470	.802	2.156
12	18	244	SECT 60 #1	4.128		3.289	.615		3.808		3.494


* DASH NUMBERS 2 THRU 6 ARE SUPPLIED WITH FEMALE FIXED JACKSOCKETS, DASH NUMBERS 8 THRU 12 ARE SUPPLIED WITH FEMALE TURNING JACKSOCKETS.

NOTE--MATING CONNECTORS M28804/5 - 2 THRU - 6 MATES WITH M28804/6 - 2 THRU - 6.
M28804/5 - 8 THRU - 12 MATES WITH M28804/6 - 8 THRU - 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS P


MIL-C-28804/6

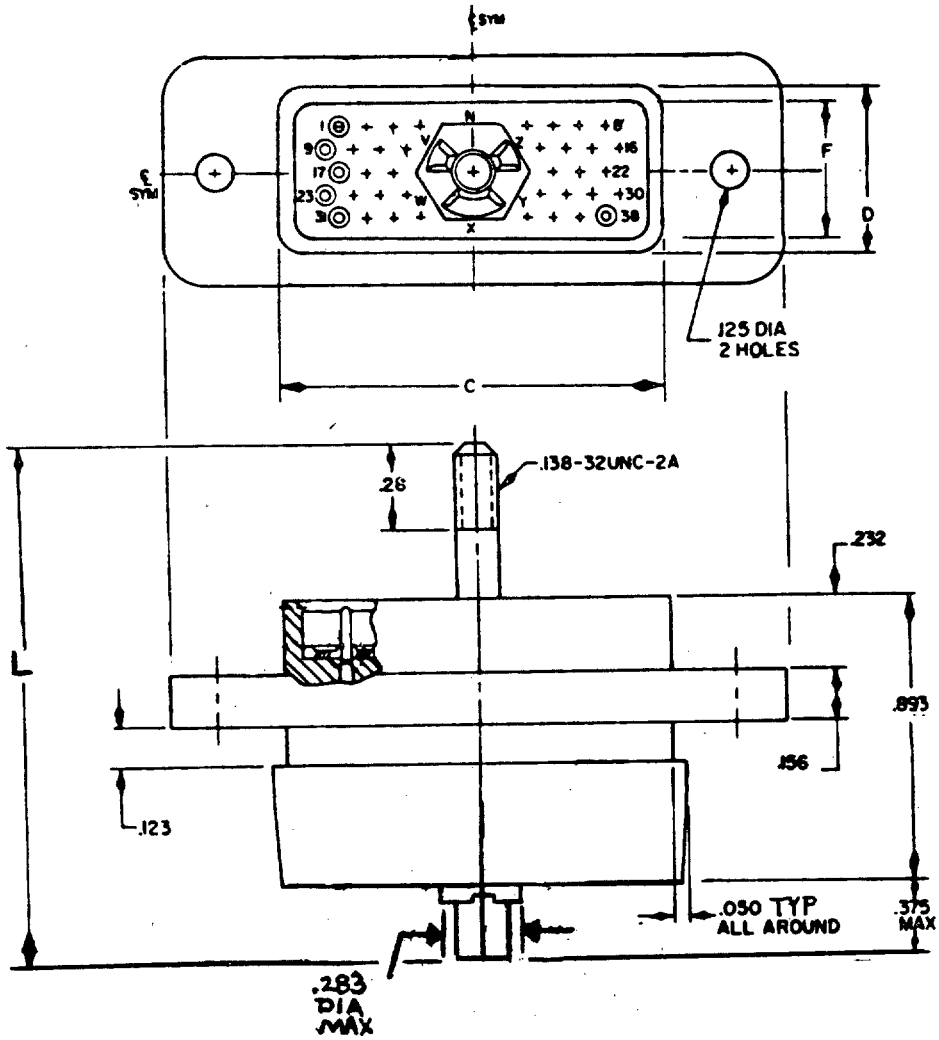

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, PLUG, CRIMP REMOVABLE PIN CONTACTS, CLASS P

MIL-C-28804/6

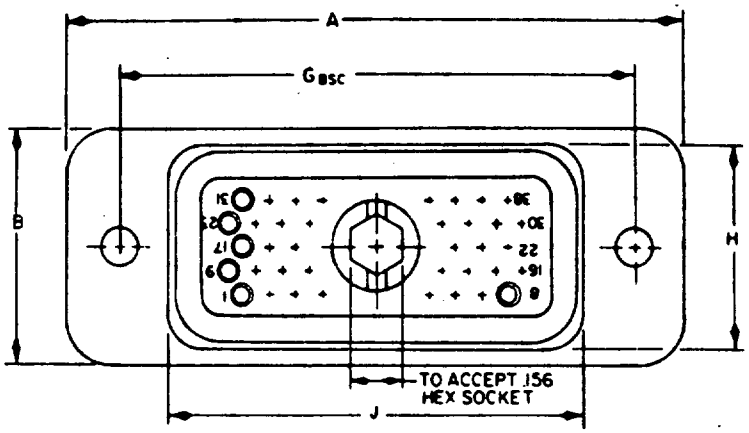

BOTTOM VIEW

PART NUMBER: C28804/6-*

SIZE OF CONTACTS: 22

TABLE I. DIMENSIONS

DASH NO. *	SHELL SIZE	NO. OF CONT	INSERT ARR. NO.	A	B	C	D	F	G BSC	H	J	L
2	10	38	SECT 20 #1	1.945	.725	1.220	.548	.436	1.625	.625	1.308	1.716
3	12	88	SECT 30 #1	2.780		2.060			2.460		2.148	
4	14	108	SECT 40 #1	1.990	1.077	1.444	.897	.785	1.718	.977	1.532	
5	16	132	SECT 50 #1	2.790	.902	2.068	.732	.620	2.470	.802	2.156	
6	18	244	SECT 60 #1	4.128		3.406			3.808		3.494	
8	10	38	SECT 20 #1	1.945	.725	1.220	.548	.436	1.625	.625	1.308	1.216
9	12	88	SECT 30 #1	2.780		2.060			2.460		2.148	
10	14	108	SECT 40 #1	1.990	1.077	1.444	.897	.785	1.718	.977	1.532	
11	16	132	SECT 50 #1	2.790	.902	2.068	.732	.620	2.470	.802	2.156	
12	18	244	SECT 60 #1	4.128		3.406			3.808		3.494	

* DASH NUMBERS 2 THRU 6 ARE SUPPLIED WITH MALE TURNING JACKSCREWS, DASH NUMBERS 8 THRU 12 ARE SUPPLIED WITH MALE FIXED JACKSCREWS.

NOTE--MATING CONNECTORS M28804/6 - 2 THRU - 6 MATES WITH M28804/5 - 2 THRU - 6.
M28804/6 - 8 THRU - 12 MATES WITH M28804/5 - 8 THRU - 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, AN TYPE

MIL-C-5015

SCOPE: THIS SECTION COVERS CIRCULAR ELECTRICAL CONNECTORS WITH REMOVABLE CRIMP CONTACTS (BOTH FRONT AND REAR RELEASE) AND ARE USED IN ELECTRONIC, ELECTRICAL POWER AND CONTROL CIRCUITS. THE MS3400 SERIES ARE CRIMP REMOVABLE, FRONT RELEASE CONTACTS USED IN SHIPBOARD JACKETED CABLE MIL-C-915, APPLICATION PER MIL-STD-1683. THE MS3450 SERIES ARE CRIMP REMOVABLE, REAR RELEASE CONTACTS USED IN GENERAL DUTY AND HARNESS WIRING APPLICATIONS.

TEMPERATURE RANGE: -55°C TO +175°C.
THE UPPER TEMPERATURE IS THE MAXIMUM INTERNAL HOT-SPOT TEMPERATURE RESULTING FROM ANY COMBINATION OF ELECTRICAL LOAD AND AMBIENT CONDITIONS.

APPLICABLE DOCUMENTS:
MIL-C-39029 - CONTACTS, ELECTRICAL CONNECTOR, GENERAL SPECIFICATION FOR
MIL-C-22520 - CRIMP TOOLS, REMOVABLE CONTACTS, GENERAL SPECIFICATION FOR
MIL-I-81969 - INSTALLING AND REMOVABLE TOOLS, CONNECTOR, ELECTRICAL CONTACT, GENERAL SPECIFICATION FOR
MIL-C-85049 - CONNECTOR ACCESSORIES, GENERAL SPECIFICATION FOR

INTERMATEABILITY: MIL-C-5015 CRIMP CONTACT, FRONT RELEASE (MS3400 SERIES) AND REAR RELEASE (MS3450 SERIES) CONNECTORS ARE INTERMATEABLE.

CONNECTOR - CABLE APPLICATION: CABLE TYPE (MIL-C-915) TO CONNECTORS MIL-C-5015 AND/OR MIL-C-28840, SEE TABLE IV, PAGE 134.7.

INSERT ARRANGEMENTS: FOR INSERT ARRANGEMENT OF CONTACT CONFIGURATION, SEE MIL-STD-1651.

CLASS: SEE TABLE I.

CONTACTS: THE CONTACTS USED IN MIL-C-5015 CONNECTORS ARE:
MS3400 -- MIL-C-39029/44 - PIN
MIL-C-39029/45 - SOCKET
MS3450 -- MIL-C-39029/29 - PIN
MIL-C-39029/30 - SOCKET

CONTACT SIZE DESIGNATION: THE CONTACT SIZE DESIGNATION FOR CRIMP CONTACTS SHALL BE THE MATING END AND WIRE BARREL SIZES AS SPECIFIED IN MIL-C-39029.

EXAMPLE OF CRIMP CONTACT:

16 - 16
MATING END SIZE — WIRE BARREL SIZE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

TABLE I. CONNECTOR CLASSES - PHYSICAL CHARACTERISTIC

CLASS	FEATURE	FRONT RELEASE CRIMP CONTACTS MS3400	REAR RELEASE CRIMP CONTACTS MS3450	ENVIRONMENT RESISTANT	FLUID RESISTANT	HOT SPOT TEMP °C	SERVICE LIFE	INSERT MATERIAL	SHELLS AND COUPLING RINGS	
									MATERIAL	FINISH
D	HIGH IMPACT SHOCK	X	---	X	PARTIAL	125 175 #	20YRS 1000HRS	SILICONE	WROUGHT ALUMINUM##	CADMIUM, OLIVE DRAB OVER NICKEL##
W	GENERAL PURPOSE	X	X	X	PARTIAL	125 175#	20YRS 1000HRS	SILICONE	ALUMINUM	CADMIUM, OLIVE DRAB
DJ	HIGH IMPACT SHOCK WITH BACKSHELL CONNECTOR ASSEMBLY	X	---	X	PARTIAL	125 175 #	20YRS 1000HRS	SILICONE	WROUGHT ALUMINUM##	CADMIUM, OLIVE DRAB OVER NICKEL.

HOT SPOT TEST REQUIREMENTS FOR INSERTS AND SEALS SHALL BE 200 C.
ALSO AVAILABLE IN STAINLESS STEEL.

TABLE II. WIRE RANGE ACCOMODATIONS


CONTACT SIZE	WIRE SIZE	OD OF FINISHED WIRE (INCH) #			
		CRIMP CONTACT CONNECTORS			
		FRONT RELEASE		REAR RELEASE	
		MIN	MAX	MIN	MAX
16-16	20 18 16	.066	.130	.053	.103
12-12	14 12	.097	.170	.085	.158
8-8	10 8	.132	.255	.132	.255
4-4	6 4	.237	.370	.237	.370
0-0	2 0	.360	.550	.360	.550

WIRE REFERENCE - MIL-W-16878, MIL-W-22759, MIL-W-81381, AND MIL-C-915.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, AN TYPE

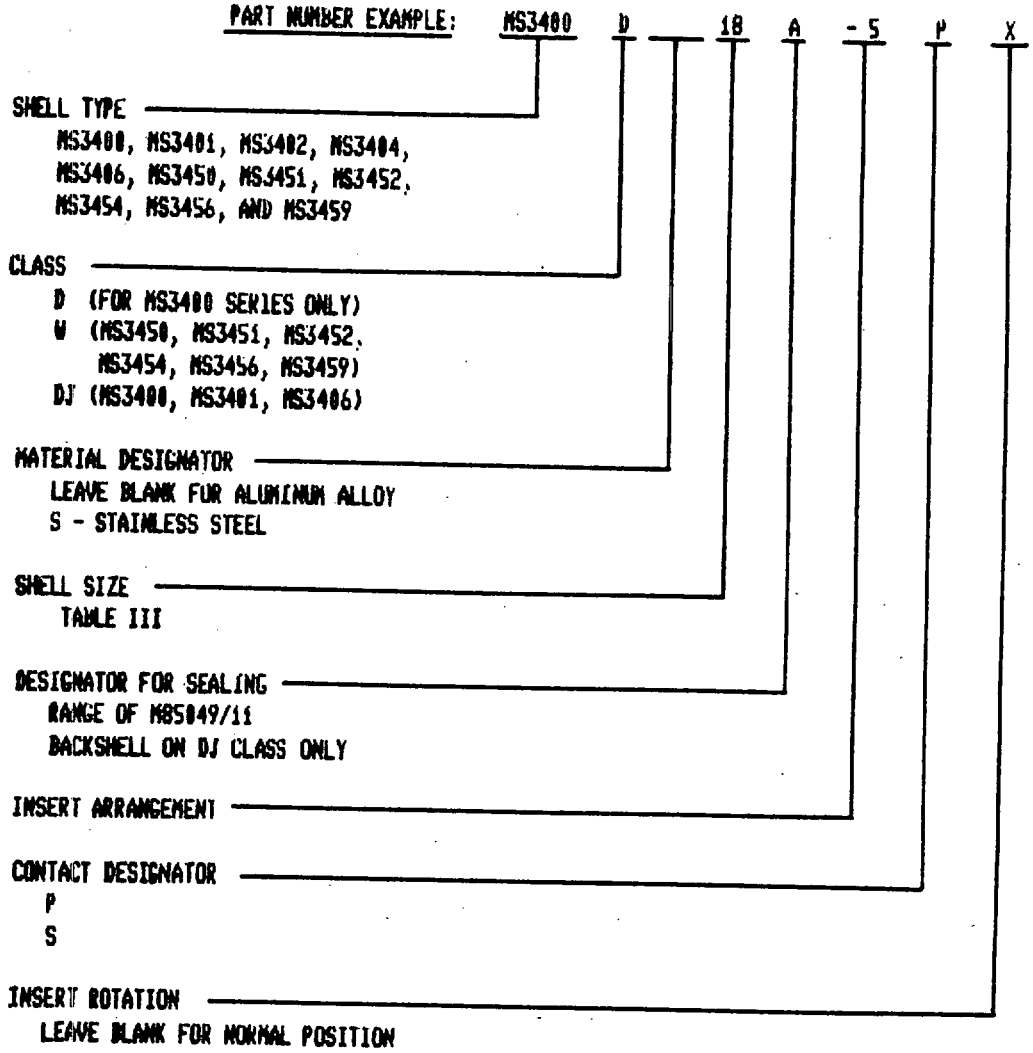

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CIRCULAR CONNECTORS -- MS3400 SERIES

GENERAL DUTY PER MIL-C-5015, CLASSES D, DS, DJ, AND DJS (SEE INDIVIDUAL MS SHEET)

APPLICATION NOTES:

1. CONNECTOR SHELL STYLE LISTED:
   - MS3400 - WALL MOUNTING (SQUARE FLANGE) RECEPTACLE
   - MS3401 - CABLE MOUNTING RECEPTACLE
   - MS3402 - BOX MOUNTING RECEPTACLE
   - MS3404 - JAM NUT MOUNTING RECEPTACLE
   - MS3406 - STRAIGHT PLUG

2. CLASS VARIATION: (FOR SHIPBOARD JACKETED CABLES APPLICATIONS)
   - "D" - WROUGHT ALUMINUM SHELL, HIGH IMPACT SHOCK RESISTANCE
   - "DS" - STAINLESS STEEL SHELL, HIGH IMPACT SHOCK RESISTANCE
   - "DJ" - CONNECTOR BACKSHELL ASSEMBLY (RECEPTACLE OR PLUG)
   - "DJS" - CONNECTOR BACKSHELL ASSEMBLY (STAINLESS)

NOTE: A CLASS "D" SHALL BE MATED WITH A CLASS "D" AND A CLASS "DS" SHALL BE MATED WITH A CLASS "DS" CONNECTOR.

CIRCULAR CONNECTORS -- MS3450 SERIES

GENERAL DUTY PER MIL-C-5015, CLASSES K AND W (SEE INDIVIDUAL MS SHEET)

APPLICATION NOTES:

1. CONNECTOR SHELL STYLE LISTED:
   - MS3450 - WALL MOUNTING (SQUARE FLANGE) RECEPTACLE
   - MS3451 - CABLE MOUNTING RECEPTACLE
   - MS3452 - BOX MOUNTING RECEPTACLE
   - MS3454 - JAM NUT MOUNTING RECEPTACLE
   - MS3456 - STRAIGHT PLUG
   - MS3459 - STRAIGHT PLUG, SELF-LOCKING COUPLING NUT

2. CLASS VARIATION: (NOT FOR SHIPBOARD JACKETED CABLES APPLICATIONS; FOR USE IN HOOK-UP WIRE APPLICATIONS ONLY.)
   - "KS" - STAINLESS STEEL SHELL, FIREWALL
   - "W" - ALUMINUM SHELL WITH CADMIUM PLATE, OLIVE DRAB

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TABLE III. ASSEMBLY NUMBER, BACKSHELL ASSEMBLY NUMBER USED ON MS3400, MS3401, AND MS3406 ONLY

ASSEMBLY NUMBER MS3400DJ	CONNECTOR RECEPTACLE NUMBER MS3400D	BACKSHELL ASSEMBLY NEW NUMBER M85049/11	BACKSHELL ASSEMBLY OLD NUMBER MS3437B	A CABLE ENTRY MIN	A CABLE ENTRY MAX	L MAX
# 10AXX	-10S-XX	-9W	-9A	.125	.312	4.938
# 10BXX	-10S-XX	-11W	-11A	.250	.437	5.688
# 10DXX	-10S-XX	-136W	-136A	.250	.375	4.938
11AXX	-10SL-XX	-9W	-9A	.125	.312	4.938
11BXX	-10SL-XX	-11W	-11A	.250	.437	5.688
11DXX	-10SL-XX	-136W	-136A	.250	.375	4.938
13AXX	-12S-XX	-114W	-114A	.125	.312	4.938
13BXX	-12S-XX	-15W	-15A	.350	.625	5.688
13DXX	-12S-XX	-138W	-138A	.350	.500	4.938
13EXX	-12S-XX	-13W	-13A	.250	.437	4.938
## 12AXX	-12-XX	-114W	-114A	.125	.312	4.938
## 12BXX	-12-XX	-15W	-15A	.350	.625	5.688
## 12DXX	-12-XX	-138W	-138A	.350	.500	4.938
## 12EXX	-12-XX	-13W	-13A	.250	.437	4.938
15AXX	-14S-XX	-116W	-116A	.250	.437	4.938
15BXX	-14S-XX	-19W	-19A	.500	.750	5.750
15DXX	-14S-XX	-17W	-17A	.350	.575	4.938
15EXX	-14S-XX	-150W	-150A	.125	.312	4.938
17AXX	-16S-XX	-21W	-21A	.500	.700	5.000
17BXX	-16S-XX	-23W	-23A	.625	.937	5.812
17DXX	-16S-XX	-112W	-112A	.250	.437	4.938
17EXX	-16S-XX	-118W	-118A	.350	.625	4.938
16AXX	-16-XX	-21W	-21A	.500	.700	5.000
16BXX	-16-XX	-23W	-23A	.625	.937	5.812
16DXX	-16-XX	-112W	-112A	.250	.437	4.938
16EXX	-16-XX	-118W	-118A	.350	.625	4.938
18AXX	-18-XX	-25W	-25A	.350	.625	4.938
18BXX	-18-XX	-27W	-27A	.500	.750	5.000
18EXX	-18-XX	-120W	-120A	.125	.312	4.938
18FXX	-18-XX	-122W	-122A	.250	.437	4.938
20AXX	-20-XX	-31W	-31A	.350	.625	5.938
20BXX	-20-XX	-33W	-33A	.500	.750	6.000
20EXX	-20-XX	-37W	-37A	.875	1.250	7.062
20FXX	-20-XX	-124W	-124A	.250	.437	5.938
20GXX	-20-XX	-140W	-140A	.625	.984	6.062
22AXX	-22-XX	-39W	-39A	.350	.625	5.938
22BXX	-22-XX	-41W	-41A	.500	.750	6.000
22DXX	-22-XX	-43W	-43A	.625	.937	6.062
22EXX	-22-XX	-45W	-45A	.875	1.250	7.062
22FXX	-22-XX	-126W	-126A	.125	.312	5.938
22GXX	-22-XX	-128W	-128A	.250	.437	5.938
22HXX	-22-XX	-142W	-142A	.875	1.029	6.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TABLE III. ASSEMBLY NUMBER, BACKSHELL ASSEMBLY NUMBER USED ON MS3400, MS3401, AND MS3406 ONLY (CONT.)

ASSEMBLY NUMBER MS3400DJ	CONNECTOR RECEPTACLE NUMBER MS3400D	BACKSHELL ASSEMBLY NEW NUMBER M85049/11	BACKSHELL ASSEMBLY OLD NUMBER MS3437B	A CABLE ENTRY MIN	A CABLE ENTRY MAX	L MAX
24AXX	-24-XX	-47W	-47A	.500	.750	6.000
24BXX	-24-XX	-49W	-49A	.625	.812	6.062
24DXX	-24-XX	-51W	-51A	.625	.937	6.062
24EXX	-24-XX	-53W	-53A	.875	1.250	7.062
24FXX	-24-XX	-130W	-130A	.350	.625	5.938
24GXX	-24-XX	-144W	-144A	.875	1.144	6.312
28AXX	-28-XX	-55W	-55A	.500	.750	6.000
28BXX	-28-XX	-57W	-57A	.625	.937	6.062
28DXX	-28-XX	-59W	-59A	.875	1.250	6.312
28EXX	-28-XX	-61W	-61A	1.000	1.375	6.438
32AXX	-32-XX	-63W	-63A	.625	.937	6.062
32BXX	-32-XX	-65W	-65A	.875	1.250	6.312
32DXX	-32-XX	-67W	-67A	1.000	1.375	6.438
32EXX	-32-XX	-69W	-69A	1.250	1.625	6.750
36AXX	-36-XX	-71W	-71A	.875	1.250	7.312
36BXX	-36-XX	-73W	-73A	1.000	1.375	7.438
36DXX	-36-XX	-75W	-75A	1.250	1.625	7.688
36EXX	-36-XX	-146W	-146A	1.437	1.840	7.750
36FXX	-36-XX	-132W	-132A	.500	.750	7.000
36GXX	-36-XX	-148W	-148A	.625	.937	7.062
40AXX	-40-XX	-79W	-79A	.875	1.250	7.312
40BXX	-40-XX	-81W	-81A	1.000	1.375	7.438
40DXX	-40-XX	-83W	-83A	1.250	1.625	7.688
40EXX	-40-XX	-85W	-85A	1.437	1.840	7.750
40FXX	-40-XX	-134W	-134A	.500	.750	7.000
44AXX	-44-XX	-87W	-87A	.875	1.250	7.312
44BXX	-44-XX	-89W	-89A	1.000	1.375	7.438
44DXX	-44-XX	-91W	-91A	1.250	1.625	7.688
44EXX	-44-XX	-93W	-93A	1.437	1.840	7.750
44FXX	-44-XX	-154W	-154A	.625	.937	7.062
‡ 48AXX	-48-XX	-95W	-95A	.875	1.250	7.312
‡ 48BXX	-48-XX	-97W	-97A	1.000	1.375	7.438
‡ 48DXX	-48-XX	-99W	-99A	1.259	1.625	7.688
‡ 48EXX	-48-XX	-101W	-101A	1.437	1.840	7.750

‡ NOT USED ON MS3401 OR MS3406
‡‡ NOT USED ON MS3406 ONLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE(MIL-C-915) TO CONNECTORS(MIL-C-28840AND/OR MIL-C-5015)

CABLE TYPE	CABLE MIL-C-915 SLASH SHEET	MIL-C-28840/MIL-C-5015 SHELL SIZE-# CONTACTS/INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
DCOP-1	3	12S-3	MS3400#DJ 13A3P/S
DCOP-1-1/2	↓	↓	13E3P/S
DCOP-2	↓	↓	13E3P/S
DHOF-3	6	↓	13D3P/S
DHOF-4	↓	20-4	20A4P/S
DHOF-6	↓	20-4	20A4P/S
DHOF-9	↓	22-22	22A22P/S
DHOF-14	↓	22-22	22B22P/S
DHOF-23	↓	32-17	32A17P/S
DHOF-30	↓	32-17	32B17P/S
DHOF-83	↓	36-5	36D5P/S
DLT	5	14S-2	15B2P/S
DNW-3	68	12S-3	13E3P/S
DNW-4	↓	20-4	20F4P/S
DNW-9	↓	22-22	22A22P/S
DNW-14	↓	↓	22A22P/S
DNW-23	↓	↓	22B22P/S
DNW-50	↓	32-17	32A17P/S
DNW-75	↓	36-5	36A5P/S
DNW-100	↓	36-5	36A5P/S
DPS-3	40	12S-3	13D3P/S
DPS-4	↓	20-4	20A4P/S
DPS-6	↓	20-4	20A4P/S
DPS-9	↓	22-22	22B22P/S
DPS-14	↓	22-22	22D22P/S
DRW	73	20-4	20B4P/S
DSGU-3	29	12S-3	13D3P/S
DSGU-4	↓	20-4	20F4P/S
DSGU-9	↓	22-22	22A22P/S
DSGU-14	↓	↓	22B22P/S
DSGU-23	↓	↓	22D22P/S
DSGU-50	↓	32-17	32A17P/S
DSGU-75	↓	36-5	36A5P/S
DSGU-100	↓	36-5	36A5P/S
DSS-2	8	10SL-3	11B3P/S
DSS-3	↓	14S-2	15D2P/S
DSS-4	↓	20-4	20A4P/S
DSWS-4	7	20-4	20C4P/S
ECM	54	40-56	40B56P/S
FHOF-3	6	14S-2	15D2P/S
FHOF-4	↓	20-4	20A4P/S
FHOF-9	↓	22-22	22B22P/S
FHOF-42	↓	32-17	22E17P/S
FHOF-60	↓	36-5	36D5P/S
FNW-3	70	14S-2	15D2P/S
FNW-4	↓	20-4	20A4P/S
FNW-9	↓	22-22	22B22P/S
FNW-23	↓	↓	22D22P/S
FPS-14	40	↓	22D22P/S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE(MIL-C-915) TO CONNECTORS(MIL-C-28840AND/OR MIL-C-5015)

CABLE			
TYPE	MIL-C-915 SLASH SHEET	MIL-C-28840/MIL-C-5015 SHELL SIZE-# CONTACTS/INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
FSGU-3	31	14S-2	MS3402DJ 15D2P/S
FSGU-4	↓	20-4	20A4P/S
FSGU-9	↓	22-22	22B22P/S
FSGU-23	↓	22-22	22M22P/S
FSGU-50	↓	32-17	32B17P/S
FSGU-75	↓	36-5	36B5P/S
FSGU-100	↓	36-5	36D5P/S
FSS-2	8	16S-1	17E1P/S
FSS-3	↓	16S-1	17E1P/S
FSS-4	↓	22-23	22B23P/S
MCOS-2	11	14S-2	15D2P/S
MCOS-4	↓	16S-1	17E1P/S
MCOS-5	↓	16S-1	17D1P/S
MCOS-6	↓	18-1	18A1P/S
MCOS-7	↓	18-1	18A1P/S
MHOF-7	14	16S-1	17E1P/S
MHOF-10	↓	18-1	18A1P/S
MHOF-14	↓	20-27	20B27P/S
MHOF-19	↓	24-28	24A28P/S
MHOF-24	↓	24-28	24D28P/S
MHOF-30	↓	28-21	28B21P/S
MHOF-37	↓	28-21	28B21P/S
MHOF-44	↓	36-10	36A10P/S
MHOF-61	↓	40-56	40A56P/S
MHOP-5	15	11-7	M28840/26CA1AB#1
MNW-7	71	16S-1	MS3403DJ 17D1P/S
MNW-10	↓	18-1	18A1P/S
MNW-14	↓	20-27	20A27P/S
MNW-19	↓	24-28	24A28P/S
MNW-24	↓	24-28	24A28P/S
MNW-30	↓	28-21	28A21P/S
MNW-37	↓	28-21	28A21P/S
MNW-44	↓	36-10	36G10P/S
MS-37	50	36-10	36G10P/S
MSCU-7	32	16S-1	17E1P/S
MSCU-10	↓	18-1	18B1P/S
MSCU-14	↓	20-27	20B27P/S
MSCU-19	↓	24-28	24B28P/S
MSCU-24	↓	24-28	24D28P/S
MSCU-30	↓	28-21	28D21P/S
MSCU-37	↓	28-21	28D21P/S
MSCU-44	↓	36-10	36A10P/S
MSCU-61	↓	40-56	40M56P/S
MSCU-91	↓	44-52	44D52P/S
MSP	67	↓	44E52D/E
MSPW	66	↓	44E52D/E
MU-14	43	15-21	M28840/26CC1DB#1
MUS-14	43	15-21	M28840/26CC1BB#1

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE(MIL-C-915) TO CONNECTORS(MIL-C-28840AND/OR MIL-C-5015)

CABLE			
TYPE	MIL-C-915 SLASH SHEET	MIL-C-28840/MIL-C-5015 SHELL SIZE-# CONTACTS/INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
MWF-7	58	16S-1	MS3400#DJ 17E1P/S
MWF-10	↓	18-1	18B1P/S
MWF-14	↓	20-27	20B27P/S
MWF-19	↓	24-28	24A28P/S
MWF-24	↓	24-28	24D28P/S
MWF-30	↓	28-21	28D21P/S
MWF-37	↓	28-21	28D21P/S
PBTMU-5	17	13-12	M28840/26CB1CB#1
PBTMU-15	↓	17-31	M28840/26CD1BB#1
PBTMU-30	↓	23-64	M28840/26CF1CB#1
PI-3	39	18-1	MS3400#DJ 18B1P/S
PI-7	↓	24-28	24D28P/S
PI-12	↓	28-21	28D21P/S
SHOF-3	6	12S-3	13A3P/S
SHOF-23	↓	18-6	18A6P/S
SHOF-60	↓	20-2	20B2P/S
SRU	73	20-4	20F4P/S
SSGU-50	26	18-6	18A6P/S
SSGU-75	↓	20-2	20B2P/S
SSGU-100	↓	20-2	20B2P/S
S2S	61	14S-2	15D2P/S
TCOP-2	3	10SL-3	11B3P/S
TCJU-4	35	20-4	20A4A/B
TCJX-3	38	16S-1	17B1A/B
TCJX-7	↓	20-27	20E27A/B
TCJX-12	↓	28-21	28E21A/B
TCKX-1	↓	12S-3	13D3A/B
TCKX-3	↓	16S-1	17B1A/B
TCKX-7	↓	20-27	20E27A/B
TCKX-12	↓	28-21	28E21A/B
TCTU-4	↓	20-4	20A4A/B
TCTX-1	↓	12S-3	13E3A/B
TCTX-3	↓	16S-1	17E1A/B
TCTX-7	↓	20-27	20B27A/B
TCTX-12	↓	24-28	24G28A/B
THOF-3	6	14S-2	15B2P/S
THOF-4	↓	20-4	20A4P/S
THOF-6	↓	20-4	20A4P/S
THOF-9	↓	22-22	22A22P/S
THOF-14	↓	22-22	22B22P/S
THOF-23	↓	32-17	32A17P/S
THOF-42	↓	32-17	32D17P/S
TNW-3	69	10SL-3	11B3P/S
TNW-4	↓	20-4	20A4P/S
TNW-9	↓	22-22	22B22P/S
TNW-14	↓	↓	22B22P/S
TNW-23	↓	↓	22D22P/S
TNW-50	↓	32-17	32B17P/S
TNW-75	↓	36-5	36A5P/S
TNW-100	↓	36-5	36B5P/S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

TABLE IV. CABLE(MIL-C-915) TO CONNECTORS(MIL-C-28840AND/OR MIL-C-5015)

CABLE			
TYPE	MIL-C-915 SLASH SHEET	MIL-C-28840/MIL-C-5015 SHELL SIZE-# CONTACTS/INSERT ARRANGMT	PART NUMBER ORDERING INFURMATION
TPNW-1-1/2	72	11-7	M28840/26CA1AB#1
TPNW-3	↓	11-7	CA1AB#1
TPNW-5		13-12	CB1BB#1
TPNW-10		15-21	CC1BB#1
TPNW-15		17-31	CD1AB#1
TPNW-20		19-42	CE1AB#1
TPNW-30		23-64	CF1AB#1
TPNW-40	↓	25-92	CG1AB#1
TPS-3	40	14S-2	MS3400#DJ 15D2P/S
TPS-4		20-4	20A4P/S
TPS-6		20-4	20B4P/S
TPS-9		22-22	22B22P/S
TPS-14			22D22P/S
TPS-23			22D22P/S
TPS-30	↓	32-17	32B17P/S
TPU-6	19	20-27	20E27P/S
TRW	73	20-4	20B4P/S
TRF-105	20	20-2	20G2P/S
TRXF-84	21	20-2	20B2P/S
TSGU-3	30	14S-2	15A2P/S
TSGU-4		20-4	20A4P/S
TSGU-9		22-22	22B22P/S
TSGU-14			22D22P/S
TSGU-23			22D22P/S
TSGU-50		32-17	32B17P/S
TSGU-75		36-5	36A5P/S
TSGU-100	↓	36-5	36B5P/S
TSP-11	22	17-31	M28840/26CD1BB#1
TSP-31	22	23-64	CF1CB#1
TSS-2	8	14S-2	MS3400#DJ 15A2P/S
TSS-3	↓	14S-2	15A2P/S
TSS-4	↓	20-4	20A4P/S
TTOP-3	24	11-7	M28840/26CA1CB#1
TTOP-5	↓	13-12	CB1DB#1
TTOP-10		15-21	CC1DB#1
TTOP-15	↓	19-42	CE1DB#1
TTRS-2	25	15-21	CC1DB#1
TTRS-4		15-21	CC1DB#1
TTRS-6		19-42	CE1BB#1
TTRS-8		23-64	CF1CB#1
TTRS-10			CF1CB#1
TTRS-12			CF1CB#1
TTRS-16	↓	↓	CF1CB#1
TTSU-1-1/2	37	11-7	CA1BB#1
TTSU-3	↓	11-7	CA1CB#1
TTSU-5		13-12	CB1CB#1
TTSU-10		15-21	CC1DB#1
TTSU-15		19-42	CE1BB#1
TTSU-20		19-42	CE1BB#1
TTSU-30	↓	23-64	CFCB#1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE(MIL-C-915) TO CONNECTORS(MIL-C-28840AND/OR MIL-C-5015)

CABLE			
TYPE	MIL-C-915 SLASH SHEET	MIL-C-28840/MIL-C-5015 SHELL SIZE-# CONTACTS/INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
TTSU-40	37	25-92	M28840/26CG1DB#1
TTSU-50	↓	33-155	CJ1CB#1
TTSU-60	↓	33-155	CJ1CB#1
1SAU-44	57	25-92	CG1BB#1
1SMU-5	56	13-12	CW1CB#1
1SMMU-70	65	33-155	CJ1BB#1
1SU-36	59	40-56	MS3408DJ 40A56P/S
1SU-60	59	29-121	M28840/26CH1BB#1
1SWF-2	47	13-12	CW1DB#1
1SWU-2	44	11-7	CA1CB#1
1SWU-14	↓	19-42	CE1BB#1
1SWU-20	↓	23-64	CF1CB#1
1SWU-30	↓	23-64	CF1CB#1
1S50MU-16	42	19-42	CE1BB#1
1S50MU-20	↓	19-42	CE1BB#1
1S50MU-40	↓	25-92	CG1CB#1
1S50MU-70	↓	33-155	CJ1BB#1
1S50MUS-16	↓	19-42	CE1BB#1
1S50MUS-20	↓	19-42	CE1BB#1
1S50MUS-40	↓	25-92	CG1CB#1
1S50MUS-70	↓	33-155	CJ1BB#1
1S75MU-8	55	23-64	CF1CB#1
2AU-40	41	25-92	CG1DB#1
2AUS-40	↓	25-92	CG1DB#1
2SJ-7	60	22-22	MS3408DJ 22A22P/S
2SJ-9	↓	↓	22A22P/S
2SJ-11	↓	↓	22A22P/S
2SJ-12	↓	20-4	20F4P/S
2SJ-14	↓	20-4	20F4P/S
2SJ-16	↓	10SL-3	11B3P/S
2SJ-18	↓	↓	11A3P/S
2SJ-20	↓	↓	11A3P/S
2SJ-22	↓	↓	11A3P/S
2SU-3.	45	13-12	M28840/26CB1CB#1
2SU-7	↓	15-12	CC1DB#1
2SU-10	↓	17-31	CD1BB#1
2SU-14	↓	19-42	CE1BB#1
2SU-19	↓	23-64	CF1CB#1
2SU-24	↓	25-92	CG1DB#1
2SU-30	↓	25-92	CG1DB#1
2SU-37	↓	29-121	CH1BB#1
2SU-44	↓	33-155	CJ1BB#1
2SWAU-3	46	13-12	CW1CB#1
2SWAU-7	↓	15-21	CC1DB#1
2SWAU-10	↓	19-42	CE1BB#1
2SWAU-14	↓	19-42	CE1BB#1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE(MIL-C-915) TO CONNECTORS(MIL-C-28840AND/OR MIL-C-5015)

CABLE			
TYPE	MIL-C-915 SLASH SHEET	MIL-C-28840/MIL-C-5015 SHELL SIZE-# CONTACTS/INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
2SWAU-19	46	23-64	M28840/26CF1CB#1
2SWAU-24	↓	25-92	CG1DB#1
2SWAU-30		25-92	CG1DB#1
2SWAU-37		29-121	CH1BB#1
2SWAU-44	↓	33-155	CJ1BB#1
2SWF-3	48	13-12	CB1DB#1
2SWF-4	↓	13-12	CB1DB#1
2SWF-7	↓	19-42	CE1BB#1
2SWL-7	77	24-28	MS3408DJ 24A28P/S
2SWU-1	49	10SL-3	11B3P/S
2SWU-3	↓	18-1	18B1P/S
2SWU-7		24-28	24D28P/S
2SWU-12		28-21	28D21P/S
2SWU-19		40-62	40D62P/S
2SWU-24		40-56	40D56P/S
2SWU-30	↓	44-52	44E52P/S
2U-10	63	15-21	M28840/26CC1BB#1
2U-15	↓	17-31	CD1AB#1
2U-19		19-42	CE1AB#1
2U-30		23-64	CF1AB#1
2U-45		25-92	CG1AB#1
2U-60	↓	29-121	CH1AB#1
2UW-42	78	25-92	CG1AB#1
2WAU-40	64	25-92	CG1DB#1
3SF-7	62	28-21	MS3408DJ 28D21P/S
3SJ-9	60	22-22	22A22P/S
3SJ-12	↓	20-4	20A4P/S
3SJ-14		20-4	20F4P/S
3SJ-16		14S-2	15E2P/S
3SJ-18		↓	15E2P/S
3SJ-20			15E2P/S
3SJ-22	↓		15E2P/S
3SU-3	51	20-27	20B27P/S
3SU-7	↓	28-21	28B21P/S
3SU-10		36-10	36A10P/S
3SU-14		40-62	40B62P/S
3SU-19		40-56	40D56P/S
3SU-24	↓	44-52	44E52P/S
3SWU-3	52	20-27	20B27P/S
3SWU-7	↓	28-21	28B21P/S
3SWU-10		36-10	36A10P/S
3SWU-14		40-62	40B62P/S
3SWU-19		40-56	40D56P/S
3SWU-24	↓	44-52	44E52P/S
3U-3	53	18-1	18B1D/E
3U-7	↓	24-28	24D28P/S
3U-12	↓	28-21	28D21P/S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE(MIL-C-915) TO CONNECTORS(MIL-C-28840AND/OR MIL-C-5015)


CABLE		MIL-C-28840/MIL-C-5015	PART NUMBER
TYPE	MIL-C-915 SLASH SHEET	SHELL SIZE-# CONTACTS/INSERT ARRANGMT	ORDERING INFORMATION
4NW-8	76	22-22	MS3408DJ 22D22P/S
4SJ-14	60	22-23	22G23P/S
4SJ-16	↓	16S-1	17D1P/S
4SJ-20	↓	↓	17D1P/S
5SS	74	↓	17A1P/S
7PS-6	40	22-23	22D23P/S
7SGU-3	34	16S-1	17A1P/S
7SGU-4	34	22-23	22A23P/S
7SS-2	8	18-1	18A1P/S
8NW-6	75	22-23	22B23P/S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, RECEPTACLE, ELECTRIC, WALL MOUNTING,
FRONT RELEASE, CRIMP CONTACT, AN TYPE

MS3400

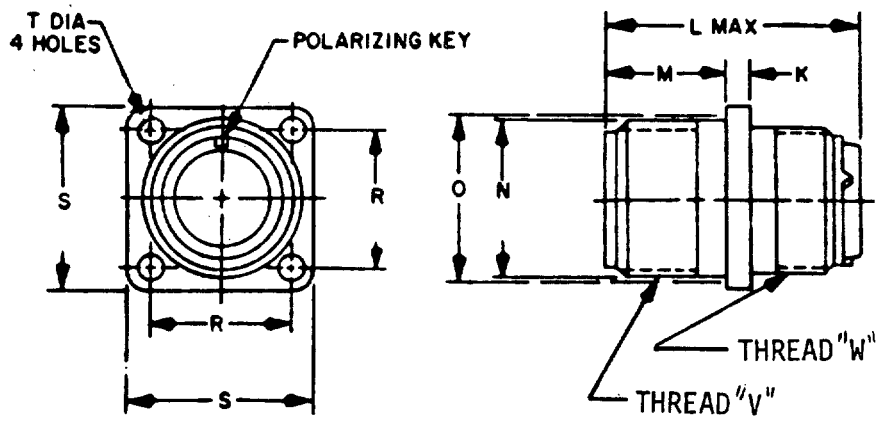

CLASSES D ENVIRONMENT RESISTANT

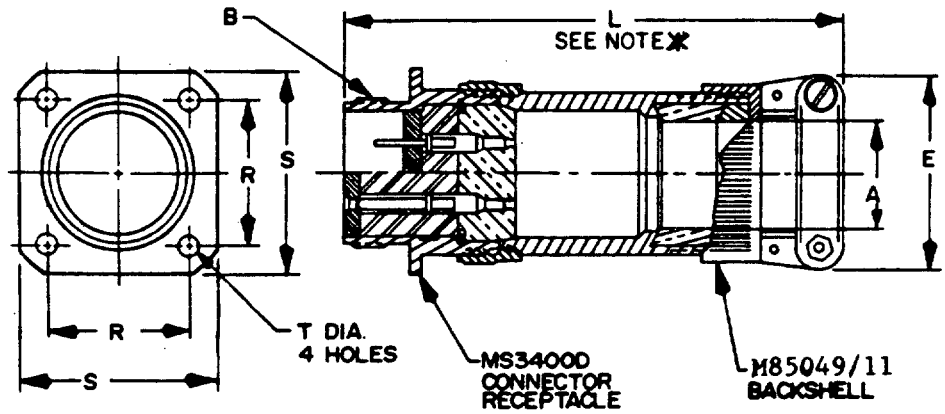

CLASS DJ ENVIRONMENT RESISTANT

* FOR SIZE 8, 4 AND 0 CONTACTS, ADD .375 TO OVERALL LENGTH.
NOTE: THIS ASSEMBLY IS AVAILABLE ONLY WITH CLASS D OR DS CONNECTOR RECEPTACLE FOR JACKETED CABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

MS3400 SHELL SIZE WITH DIMENSIONS


SIZE	K	L MAX		M	N	O (REF.) MTG. HOLE	R	S	T		V THREAD CLASS 2A	W THREAD CLASS 2A
		SIZE 16 & 12 CONT'S	SIZE 8,4 & 0 CONT'S						CLASS DW	CLASS K		
10SL	.625	2.031		.562	.656	.688	.719	1.000	.120	.150	.625-24UNEF	.625-24UNEF
12S					.782	.812	.812	1.094			.750-20UNEF	.750-20UNEF
14S					.906	.938	.906	1.188			.875-20UNEF	.875-20UNEF
16S					1.032	1.062	.969	1.281			1.000-20UNEF	1.000-20UNEF
16		2.125	2.500	.750								
18	.125				1.156	1.188	1.062	1.375		.177	1.125-18UNEF	1.0625-18UNEF
20					1.282	1.312	1.156	1.500			1.250-18UNEF	1.1875-18UNEF
22					1.406	1.438	1.250	1.625			1.375-18UNEF	1.3125-18UNEF
24				.812	1.532	1.562	1.375	1.750	.147		1.500-18UNEF	1.4375-18UNEF
28					1.782	1.812	1.562	2.000			1.750-18UNS	1.750-18UNS
32				.875	2.032	2.062	1.750	2.250	.173	.209	2.000-18UNS	2.000-18UNS
36					2.282	2.312	1.938	2.500			2.250-16UN	2.250-16UN
40					2.532	2.562	2.188	2.750			2.500-16UN	2.500-16UN
44					2.782	2.812	2.375	3.000			2.750-16UN	2.750-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, RECEPTACLE, ELECTRIC, CABLE CONNECTING,
FRONT RELEASE, CRIMP CONTACT, AN TYPE

MS3401

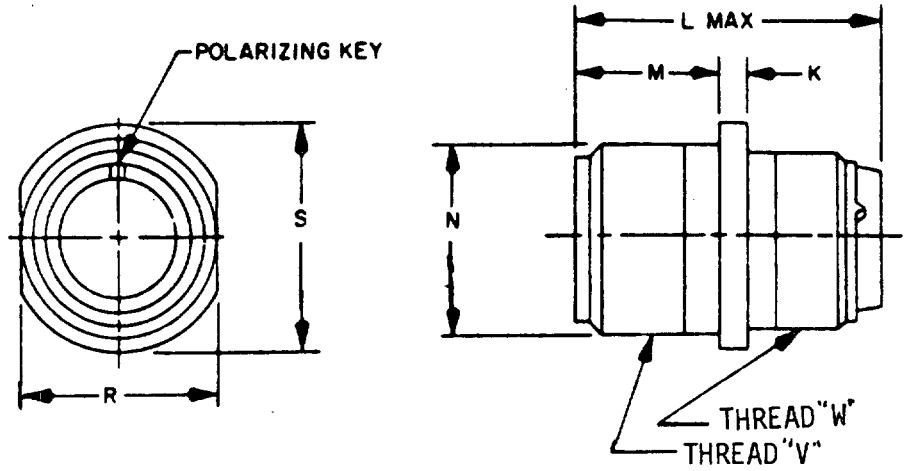

CLASSES D ENVIRONMENT RESISTANT

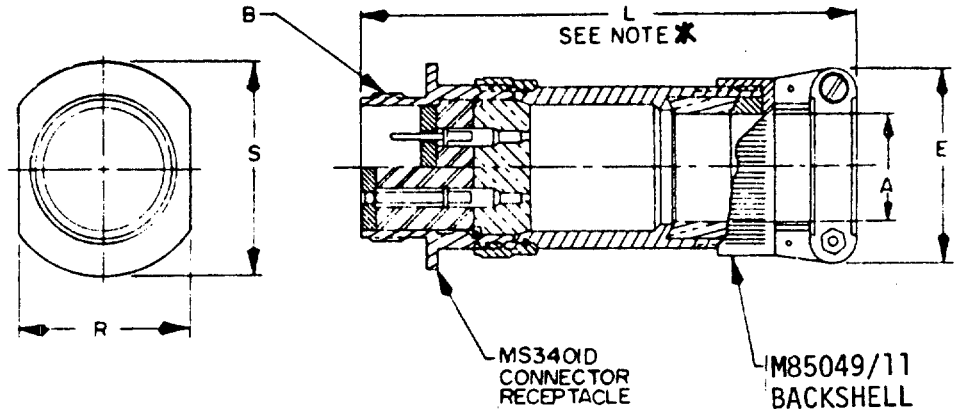

CLASS DJ ENVIRONMENT RESISTANT

* FOR SIZE 8, 4 AND 0 CONTACTS, ADD .375 TO OVERALL LENGTH.
NOTE: THIS ASSEMBLY IS AVAILABLE ONLY WITH CLASS D OR DS CONNECTOR RECEPTACLE FOR JACKETED CABLE.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

MS3401 SHELL SIZE WITH DIMENSIONS


SIZE	K	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8,4 & 0 CONT'S	M	N	R	S	CLASS 2A THREAD V	CLASS 2A THREAD W
10SL	.083	2.031		.562	.656	.629 .621	.854	.625-24UNEF	.625-24UNEF
12S					.782	.754 .746	.974	.750-20UNEF	.750-20UNEF
14S					.906	.879 .871	1.099	.875-20UNEF	.875-20UNEF
16S					1.032	1.005 .996	1.224	1.000-20UNEF	1.000-20UNEF
16		2.125	2.500	.750					
18	.125				1.156	1.131 1.121	1.349	.125-18UNEF	1.0625-18UNEF
20					1.282	1.256 1.246	1.474	.250-18UNEF	1.1875-18UNEF
22					1.406	1.381 1.371	1.599	.375-18UNEF	1.3125-18UNEF
24				.812	1.532	1.506 1.496	1.715	.500-18UNEF	1.4375-18UNEF
28					1.782	1.756 1.746	1.974	.750-18UNS	1.750-18UNS
32				.875	2.032	2.007 1.996	2.224	1.000-18UNS	2.000-18UNS
36					2.282	2.257 2.246	2.474	2.250-16UN	2.250-16UN
40					2.532	2.511 2.496	2.724	2.500-16UN	2.500-16UN
44					2.782	2.761 2.746	2.974	2.750-16UN	2.750-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING,
FRONT RELEASE, CRIMP CONTACT, AN TYPE

MS3402

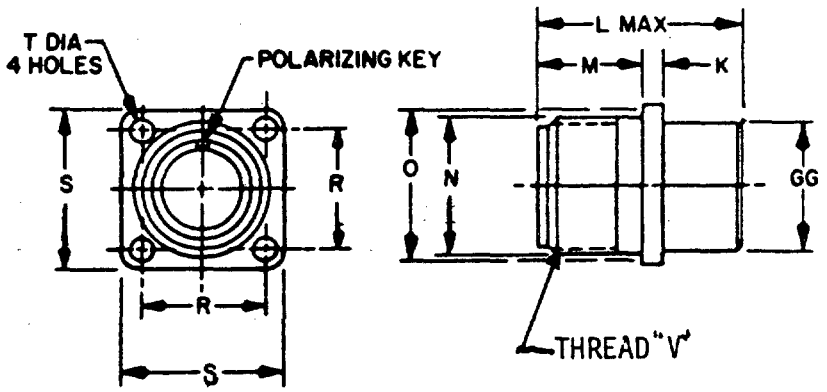

CLASS D ENVIRONMENT RESISTANT INTERFACE ONLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

MS3402 SHELL SIZE WITH DIMENSIONS


SIZE	GG	K	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8,4 & 0 CONT'S	M	N	O (REF.) MTG. HOLE	R	S	T CLASS DW	V THREAD CLASS 2A
10S	.625	.083	1.662		.562	.656	.688	.719	1.000	.120	.625-24UNEF
12S	.750					.782	.812	.812	1.094		.750-20UNEF
14S	.875					.906	.938	.906	1.188		.875-20UNEF
16S	1.000					1.032	1.062	.969	1.281		1.000-20UNEF
16				1.937	.750						
18	1.062	.125				1.156	1.188	1.062	1.375		1.125-18UNEF
20	1.187					1.282	1.312	1.156	1.500		1.250-18UNEF
22	1.312					1.406	1.438	1.250	1.625		1.375-18UNEF
24	1.437				.812	1.532	1.562	1.375	1.750	.147	1.500-18UNEF
28	1.750					1.782	1.812	1.562	2.000		1.750-18UNS
32	2.000				.875	2.032	2.062	1.750	2.250	.173	2.000-18UNS
36	2.250					2.282	2.312	1.938	2.500		2.250-16UN
40	2.500					2.532	2.562	2.188	2.750		2.500-16UN
44	2.750					2.782	2.812	2.375	3.000		2.750-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, RECEPTACLE, ELECTRIC, JAM NUT MOUNTING,
FRONT RELEASE, CRIMP CONTACT, AN TYPE

MS3404

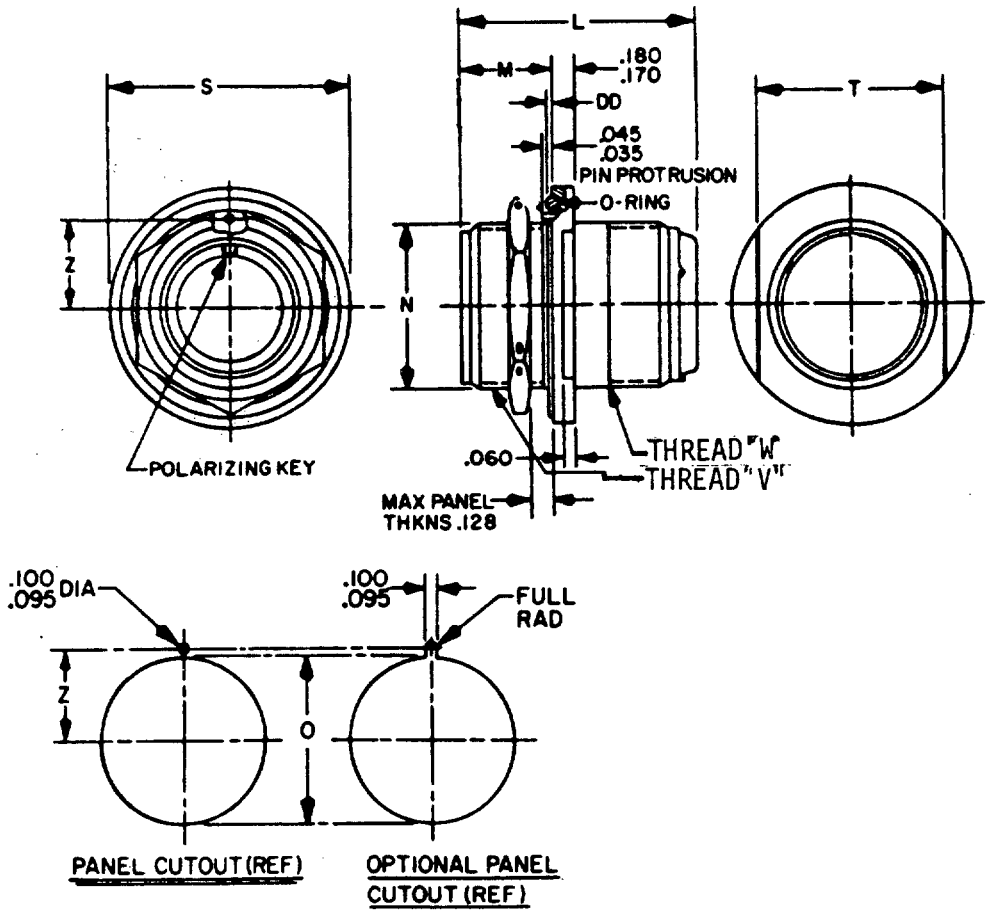

CLASS D ENVIRONMENT RESISTANT

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

MS3404 SHELL SIZE WITH DIMENSIONS


SIZE	L MAX. SIZE 16 & 12 CONT'S	L MAX. SIZE 8,4 & 0 CONT'S	M	N	O (REF.) MTG. HOLE	R	S	T CLASS DW	T CLASS K	V THREAD CLASS 2A	W THREAD CLASS 2A
10SL	2.031		.720	.625	.630	1.193	.990	.385	.020	.625-24UNEF	.625-24UNEF
12S				.750	.755	1.317	1.050	.448		.750-20UNEF	.750-20UNEF
14S				.875	.880	1.443	1.175	.510		.875-20UNEF	.875-20UNEF
16S				1.000	1.005	1.567	1.300	.573		1.000-20UNEF	1.000-20UNEF
16	2.125	2.500	.996								
18				1.125	1.130	1.693	1.425	.635		1.125-18UNEF	1.0625-18UNEF
20				1.250	1.255	1.817	1.550	.698		1.250-18UNEF	1.1875-18UNEF
22				1.375	1.380	1.943	1.550	.760	.026	1.375-18UNEF	1.3125-18UNEF
24				1.500	1.505	2.067	1.800	.823		1.500-18UNEF	1.4375-18UNEF
28				1.750	1.755	2.317	1.925	.948		1.750-18UNS	1.750-18UNS
32				2.000	2.005	2.567	2.175	1.073		2.000-18UNS	2.000-18UNS
36				2.250	2.255	2.817	2.550	1.198		2.250-16UN	2.250-16UN
40				2.500	2.505	3.061	2.800	1.323		2.500-16UN	2.500-16UN
44				2.750	2.755	3.311	3.050	1.448		2.750-16UN	2.750-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, PLUG, ELECTRIC,
FRONT RELEASE, CRIMP CONTACT, AN TYPE

MS3406

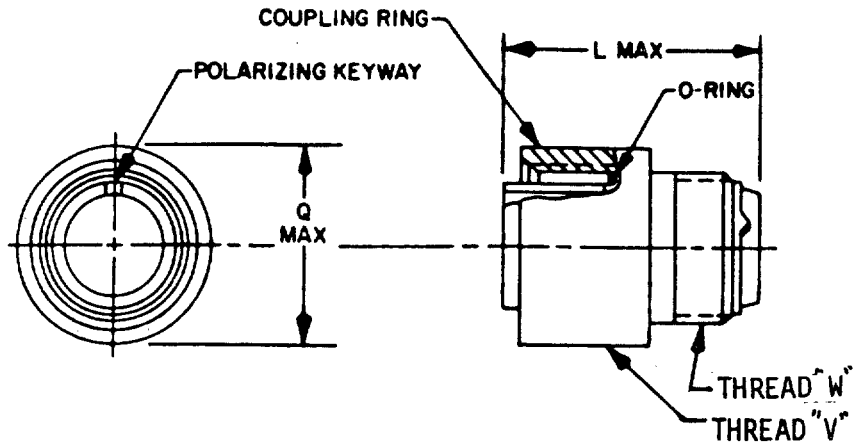

CLASSES D ENVIRONMENT RESISTANT

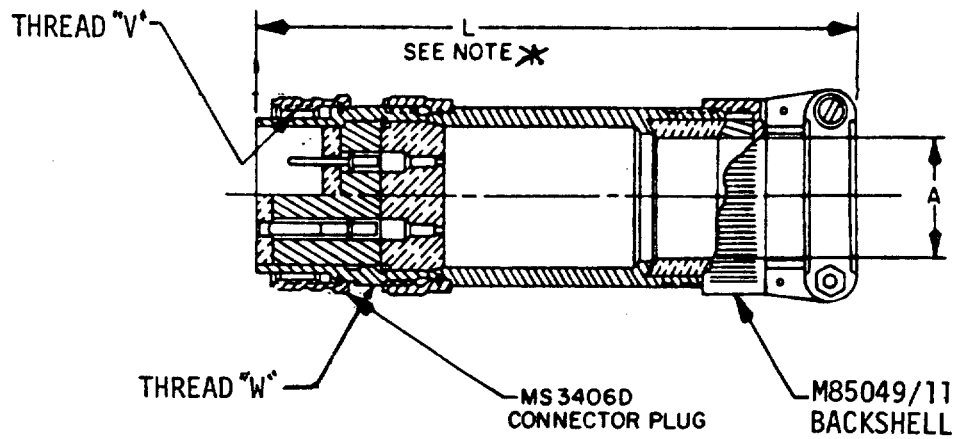

CLASS DJ ENVIRONMENT RESISTANT

* FOR SIZE 8, 4 AND 0 CONTACTS, ADD .375 TO OVERALL LENGTH.
NOTE: THIS ASSEMBLY IS AVAILABLE ONLY WITH CLASS D OR DS CONNECTOR RECEPTACLE FOR JACKETED CABLE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

MS3406 SHELL SIZE WITH DIMENSIONS


SIZE	L MAX		Q MAX	V THREAD CLASS 2A	W THREAD CLASS 2A
	SIZE 16 & 12 CONT'S	SIZE 8,4 & 0 CONT'S			
10SL	2.031		.969	.625-24UNEF	.625-24UNEF
12S			1.062	.750-20UNEF	.750-20UNEF
14S			1.156	.875-20UNEF	.875-20UNEF
16S			1.250	1.000-20UNEF	1.000-20UNEF
16	2.125	2.500			
18			1.344	1.125-18UNEF	1.0625-18UNEF
20			1.469	1.250-18UNEF	1.1875-18UNEF
22			1.594	1.375-18UNEF	1.3125-18UNEF
24			1.719	1.500-18UNEF	1.4375-18UNEF
28			1.969	1.750-18UNS	1.750-18UNS
32			2.219	2.000-18UNS	2.000-18UNS
36			2.469	2.250-16UN	2.250-16UN
40			2.719	2.500-16UN	2.500-16UN
44			2.969	2.750-16UN	2.750-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, RECEPTACLE, ELECTRIC, WALL MOUNTING,
REAR RELEASE, CRIMP CONTACT, AN TYPE

MS3450

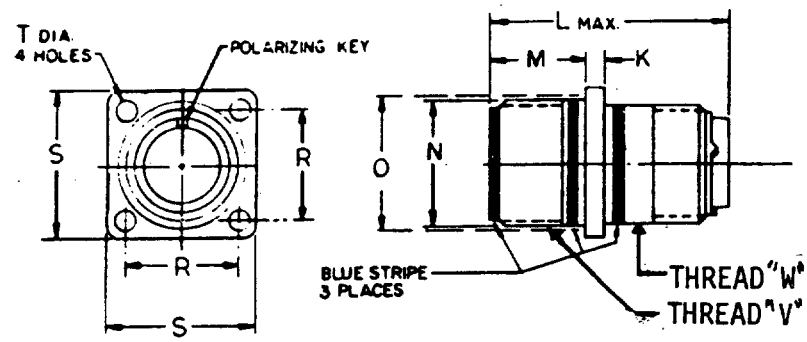

CLASS W ENVIRONMENT RESISTANT

MS3450 SHELL SIZE WITH DIMENSIONS


SIZE	K	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8,4 & 0 CONT'S	M	N	O (REF.) MTG. HOLE	R	S	T CLASS DW	T CLASS K	V THREAD CLASS 2A	W THREAD CLASS 2A
8S	.083	2.031		.562	.532	.562	.594	.875	.120	.150	.500-28UNEF	.500-20UNF
10SL					.656	.688	.719	1.000			.625-24UNEF	.625-24UNEF
12S					.782	.812	.812	1.094			.750-20UNEF	.750-20UNEF
14S					.906	.938	.906	1.188			.875-20UNEF	.875-20UNEF
16S					1.032	1.062	.969	1.281			1.000-20UNEF	1.000-20UNEF
16		2.125	2.500	.750								
18	.125				1.156	1.188	1.062	1.375		.177	1.125-18UNEF	1.0625-18UNEF
20					1.282	1.312	1.156	1.500			1.250-18UNEF	1.1875-18UNEF
22					1.406	1.438	1.250	1.625			1.375-18UNEF	1.3125-18UNEF
24				.812	1.532	1.562	1.375	1.750	.147		1.500-18UNEF	1.4375-18UNEF
28					1.782	1.812	1.562	2.000			1.750-18UNS	1.750-18UNS
32				.875	2.032	2.062	1.750	2.250	.173	.209	2.000-18UNS	2.000-18UNS
36					2.282	2.312	1.938	2.500			2.250-16UN	2.250-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, RECEPTACLE, ELECTRIC, CABLE CONNECTING
REAR RELEASE, CRIMP CONTACT, AN TYPE

MS3451

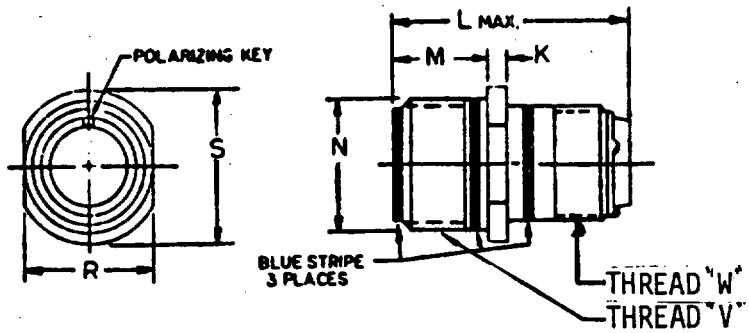

CLASS W ENVIRONMENT RESISTANT

MS3451 SHELL SIZE WITH DIMENSIONS


SIZE	K	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8,4 & 0 CONT'S	M	N	R	S	CLASS 2A THREAD V	CLASS 2A THREAD W
8S	.083	2.031		.562	.532	.504 .496	.729	.500-28UNEF	.500-28UNF
10SL					.656	.629 .621	.854	.625-24UNEF	.625-24UNEF
12S					.782	.754 .746	.974	.750-20UNEF	.750-20UNEF
14S					.906	.879 .871	1.099	.875-20UNEF	.875-20UNEF
16S					1.032	1.005 .996	1.224	.000-20UNEF	1.000-20UNEF
16		2.125	2.500	.750					
18	.125				1.156	1.131 1.121	1.349	.125-18UNEF	1.0625-18UNEF
20					1.282	1.256 1.246	1.474	.250-18UNEF	1.1875-18UNEF
22					1.406	1.381 1.371	1.599	.375-18UNEF	1.3125-18UNEF
24				.812	1.532	1.506 1.496	1.715	.500-18UNEF	1.4375-18UNEF
28					1.782	1.756 1.746	1.974	.750-18UNS	1.750-18UNS
32				.875	2.032	2.007 1.996	2.224	.000-18UNS	2.000-18UNS
36					2.282	2.257 2.246	2.474	.250-16UN	2.250-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING
REAR RELEASE, CRIMP CONTACT, AN TYPE

MS3452

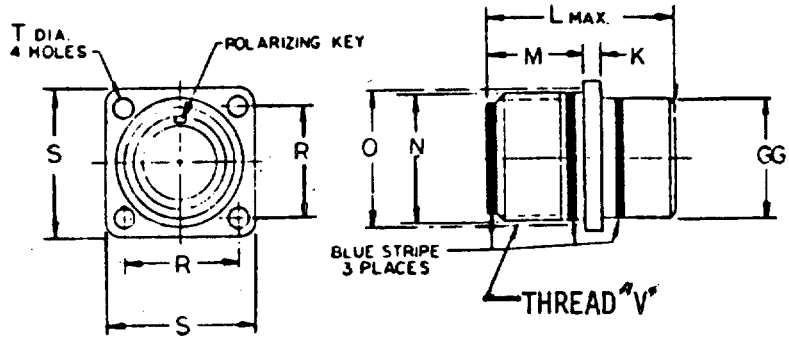

CLASS W ENVIRONMENT RESISTANT INTERFACE ONLY

MS3452 SHELL SIZE WITH DIMENSIONS


SIZE	GG	K	L MAX SIZE 16 & 12 CONT'S	L MAX SIZE 8,4 & 0 CONT'S	M	N	O (REF.) MTG. HOLE	R	S	T CLASS W	V THREAD CLASS 2A
8S	.500	.083	1.662		.562	.532	.562	.594	.875	.120	.500-28UNEF
10SL	.625					.656	.688	.719	1.000		.625-24UNEF
12S	.750					.782	.812	.812	1.094		.750-20UNEF
14S	.875					.906	.938	.906	1.188		.875-20UNEF
16S	1.000					1.032	1.062	.969	1.281		1.000-20UNEF
16				1.937	.750						
18	1.062	.125				1.156	1.188	1.062	1.375		1.125-18UNEF
20	1.187					1.282	1.312	1.156	1.500		1.250-18UNEF
22	1.312					1.406	1.438	1.250	1.625		1.375-18UNEF
24	1.437				.812	1.532	1.562	1.375	1.750	.147	1.500-18UNEF
28	1.750					1.782	1.812	1.562	2.000		1.750-18UNS
32	2.000				.875	2.032	2.062	1.750	2.250	.173	2.000-18UNS
36	2.250					2.282	2.312	1.938	2.500		2.250-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, RECEPTACLE, ELECTRIC, JAM NUT MOUNTING
REAR RELEASE, CRIMP CONTACT, AN TYPE

MS3454

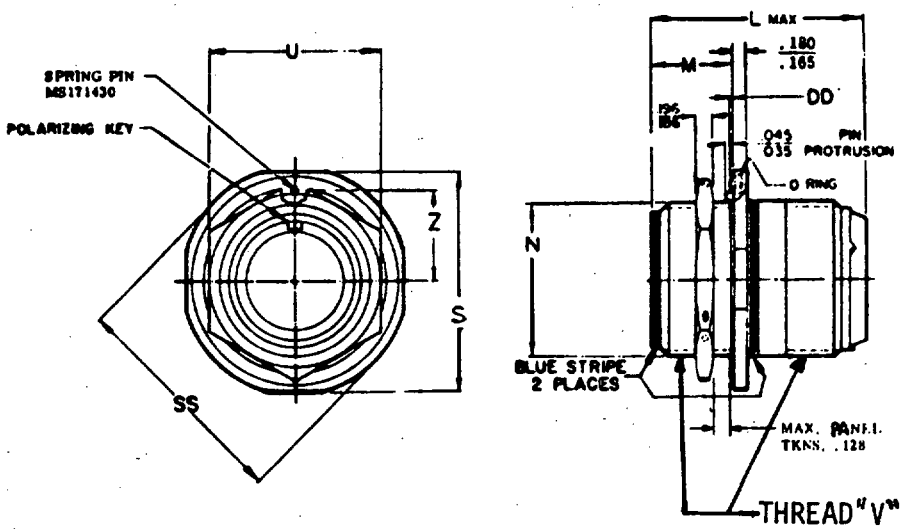

CLASS W ENVIRONMENT RESISTANT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

MS3454 SHELL SIZE WITH DIMENSIONS

SIZE	L MAX		M	N	O (REF.) MTG. HOLE	S	SS	U
	SIZE 16 & 12 CONT'S	SIZE 8,4 & 0 CONT'S						
8S	2.031		.720	.500	.505	1.187	1.212	.687
10SL				.625	.630	1.312	1.397	.812
12S				.750	.755	1.437	1.522	.937
14S				.875	.880	1.562	1.647	1.125
16S				1.000	1.005	1.687	1.772	1.250
16	2.125	2.500	.970					
18				1.125	1.130	1.812	1.897	1.375
20				1.250	1.255	1.937	2.022	1.500
22				1.375	1.380	2.156	2.241	1.625
24				1.500	1.505	2.281	2.366	1.750
28				1.750	1.755	2.531	2.616	2.000
32				2.000	2.005	2.781	2.866	2.375
36				2.250	2.255	3.031	3.116	2.625


SIZE	Z	DD O RING PROJECT	O RING SIZE ARP 568 NO.	V THREAD CLASS 2A	W THREAD CLASS 2A
8S	.323	.020	-020	.500-28UNEF	.500-28UNF
10SL	.385		-022	.625-24UNEF	.625-24UNE
12S	.448		-024	.750-20UNEF	.750-20UNEF
14S	.510		-026	.875-20UNEF	.875-20UNEF
16S	.573		-028	1.000-20UNEF	1.000-20UNEF
16					
18	.635		-029	1.125-18UNEF	1.0625-18UNEF
20	.698		-030	1.250-18UNEF	1.1875-18UNEF
22	.760	.026	-132	1.375-18UNEF	1.3125-18UNEF
24	.823		-134	1.500-18UNEF	1.4375-18UNEF
28	.948		-138	1.750-18UNS	1.750-18UNS
32	1.073		-142	2.000-18UNS	2.000-18UNS
36	1.198		-146	2.250-16UN	2.250-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, PLUG, ELECTRIC,
REAR RELEASE, CRIMP CONTACT, AN TYPE

MS3456

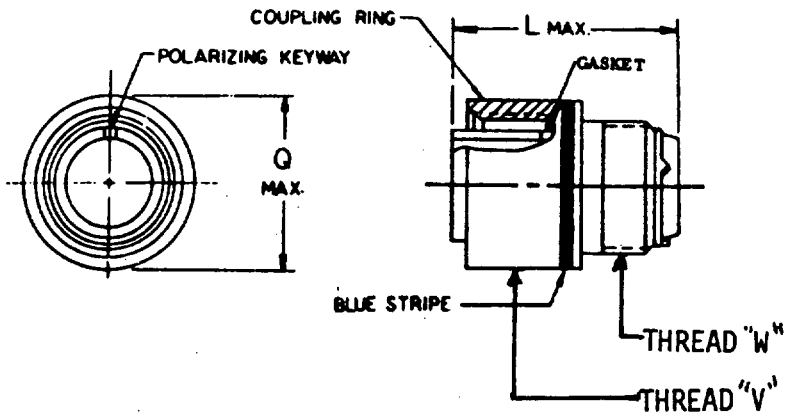

CLASS W ENVIRONMENT RESISTANT

MS3456 SHELL SIZE WITH DIMENSIONS


SIZE	L MAX		Q MAX	V THREAD CLASS 2A	W THREAD CLASS 2A
	SIZE 16 & 12 CONT'S	SIZE 8,4 & 0 CONT'S			
8S	2.031		.844	.500-28UNEF	.500-28UNF
10SL			.969	.625-24UNEF	.625-24UNEF
12S			1.062	.750-20UNEF	.750-20UNEF
14S			1.156	.875-20UNEF	.875-20UNEF
16S			1.250	1.000-20UNEF	1.000-20UNEF
16	2.125	2.500			
18			1.344	1.125-18UNEF	1.0625-18UNEF
20			1.469	1.250-18UNEF	1.1875-18UNEF
22			1.594	1.375-18UNEF	1.3125-18UNEF
24			1.719	1.500-18UNEF	1.4375-18UNEF
28			1.969	1.750-18UNS	1.750-18UNS
32			2.219	2.000-18UNS	2.000-18UNS
36			2.469	2.250-16UN	2.250-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, PLUG, ELECTRIC, SELF-LOCKING
COUPLING NUT, REAR RELEASE, CRIMP CONTACT, AN TYPE

MS3459

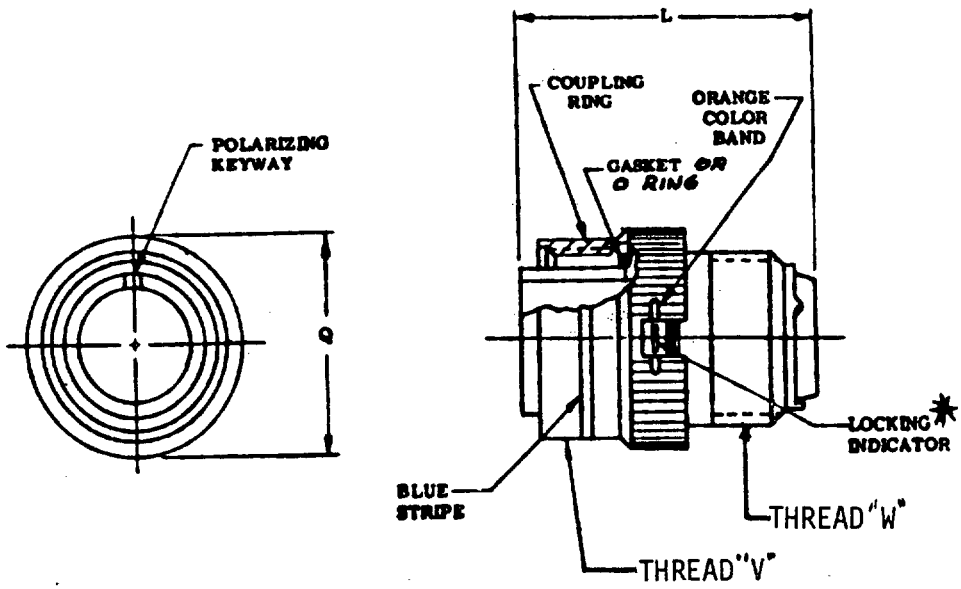

CLASSES W ENVIRONMENT RESISTANT

✱ IN FULLY MATED CONDITION LOCKING INDICATOR SHALL BE ALIGNED WITHIN ORANGE COLOR BAND.

MS3459 SHELL SIZE WITH DIMENSIONS

SIZE	L MAX		Q MAX	V THREAD CLASS 2A	W THREAD CLASS 2A
	SIZE 16 & 12 CONT'S	SIZE 8,4 & 0 CONT'S			
10SL	2.031		1.088	.625-24UNEF	.625-24UNEF
12S			1.213	.750-20UNEF	.750-20UNEF
14S			1.275	.875-20UNEF	.875-20UNEF
20	2.125	2.500	1.713	1.250-18UNEF	1.1875-18UNEF
22			1.788	1.375-18UNEF	1.3125-18UNEF
24			1.963	1.500-18UNEF	1.4375-18UNEF
28			2.213	1.750-18UNS	1.750-18UNS
36			2.713	2.250-16UN	2.250-16UN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS

3400 SERIES

SHELL SIZE	ARRANGEMENT NUMBER	CONTACTS NO. OF	CONTACTS SIZE OF	SERVICE RATING	SYMBOL	CONTACT LOCATION	CONNECTOR CLASS
10SL	-3	3	16	INST	●	ALL	K
				A		ALL	ALL OTHERS
12S	-3	2	16	A	●	ALL	
14S	-7	3	16	A	●	ALL	
16S	-1	7	16	A	●	ALL	
16S	-4	2	16	D	●	ALL	
16	-10	3	12	A	⊕	ALL	
18	-1	4	16	A	●	B, C, F, G	
		6	16	INST		ALL OTHERS	
18	-4	4	16	D	●	ALL	
18	-11	5	12	A	⊕	ALL	
20	-4	4	12	D	⊕	ALL	
20	-27	14	16	A	●	ALL	
20	-29	17	16	A	●	ALL	
22	-2	3	8	D	⊕	ALL	
22	-14	19	16	A	●	ALL	
22	-22	4	8	A	⊕	ALL	
22	-23	1	12	D	⊕	H	
		7	12	A		ALL OTHERS	
24	-28	24	16	INST	●	ALL	
28	-12	26	16	A	●	ALL	
28	-21	37	16	A	●	ALL	
32	-17	4	4	D	◔	ALL	
32	-22	54	16	A	●	ALL	
36	-10	48	16	A	●	ALL	

3450 SERIES

8S	-1	1	16	A	●	---	
10SL	-3	3	16	INST	●	ALL	K
				A		ALL	ALL OTHERS
12S	-3	2	16	A	●	ALL	
14S	-2	4	16	INST	●	ALL	
14S	-5	5	16	INST	●	ALL	
14S	-6	6	16	INST	●	ALL	
14S	-7	3	16	A	●	ALL	
16S	-1	7	16	A	●	ALL	
16S	-8	5	16	A	●	ALL	
16	-10	3	12	A	⊕	ALL	
16	-11	2	12	A	⊕	ALL	
18	-1	4	16	A	●	B, C, F, G	
		6	16	INST		ALL OTHERS	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS

3450 SERIES


SHELL SIZE	ARRANGEMENT NUMBER	CONTACTS		SERVICE RATING	SYMBOL	CONTACT LOCATION	CONNECTOR CLASS
		NO. OF	SIZE OF				
18	-4	4	16	D	●	ALL	
18	-8	7	16	A	●	ALL	
		1	12	A	⊕	ALL	
18	-9	5	16	INST	●	ALL	
		2	12	INST	⊕	ALL	
18	-11	5	12	A	⊕	ALL	
20	-4	4	12	D	⊕	ALL	
20	-15	7	12	A	⊕	ALL	
20	-27	14	16	A	●	ALL	
20	-29	17	16	A	●	ALL	
22	-2	3	8	D	⊕	ALL	
22	-14	19	16	A	●	ALL	
22	-22	4	8	A	⊕	ALL	
24	-7	14	16	A	●	ALL	
		2	12	A	⊕	ALL	
24	-10	7	8	A	⊕	ALL	
24	-22	4	8	D	⊕	ALL	
24	-28	24	16	INST	●	ALL	
28	-11	18	16	A	●	ALL	
		4	12	A	⊕	ALL	
28	-12	26	16	A	●	ALL	
28	-21	37	16	A	●	ALL	
32	-7	4	16	INST	●	A, B, H, J	
		24	16	A	●	A, B, H, J	
		7	12	A	⊕	ALL OTHERS	
32	-9	12	16	D	●	ALL	
		2	4	D	⊕	ALL	
32	-17	4	4	D	⊕	ALL	
36	-5	4	8	A	⊕	ALL	
36	-7	40	16	A	●	ALL	
		7	12	A	⊕	ALL	
36	-10	48	16	A	●	ALL	

Source: https://assist.dla.mil downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3400 SERIES)




10SL-3




12S-3




14S-7



16S-1



16S-4




16-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3400 SERIES)

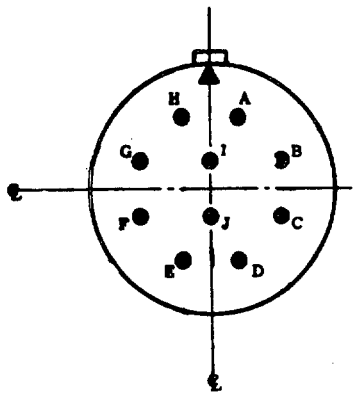


18-1

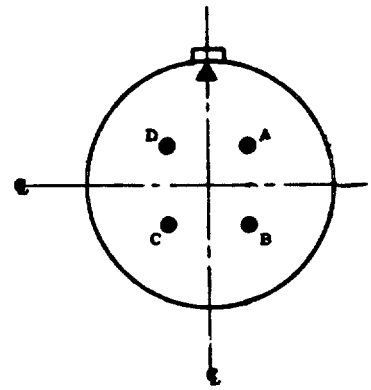

18-4



18-11

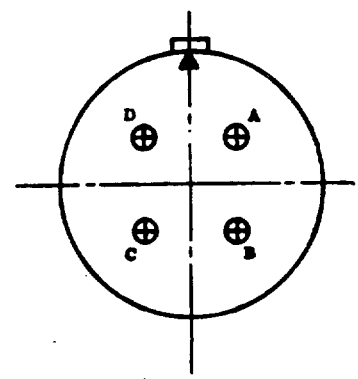


20-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3400 SERIES)




20-27

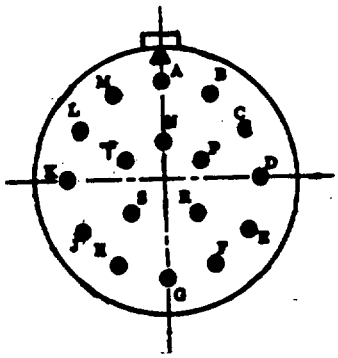

20-29

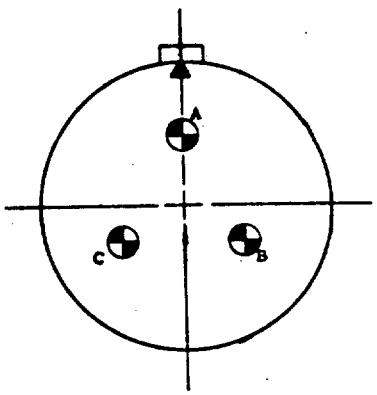

22-3

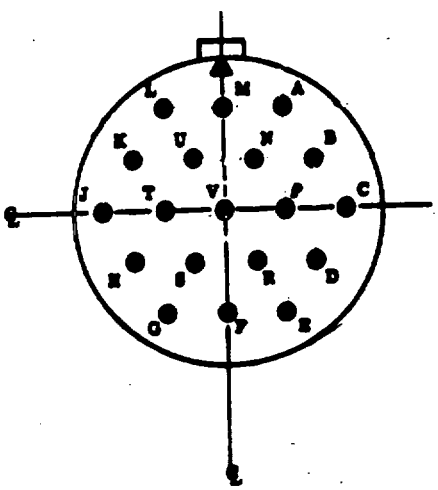


22-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3400 SERIES)

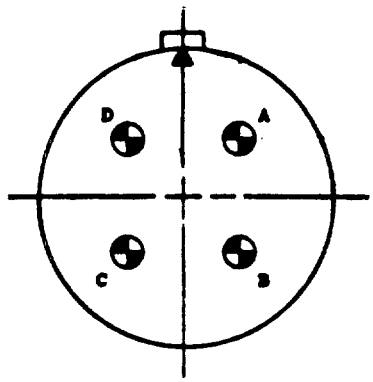


22-22

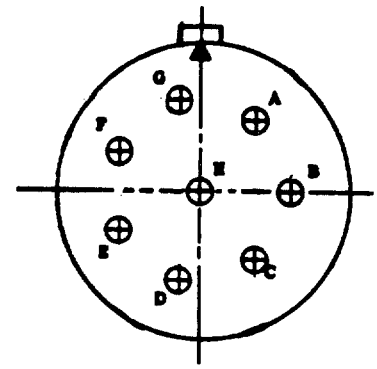

22-23

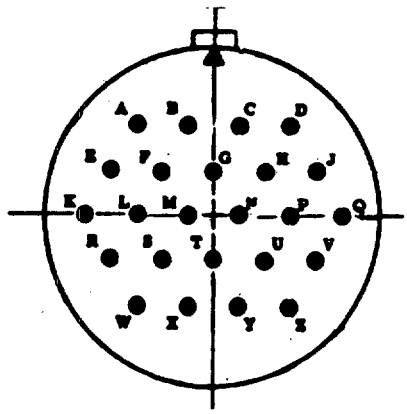

24-28

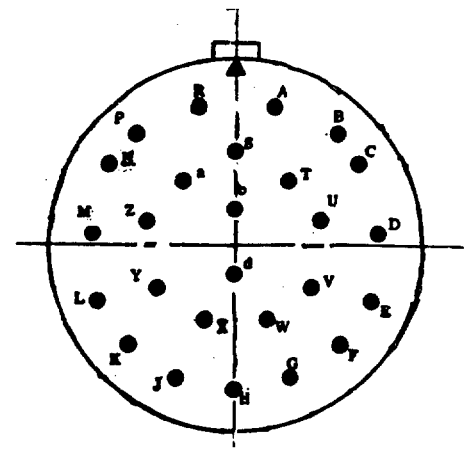


28-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3400 SERIES)

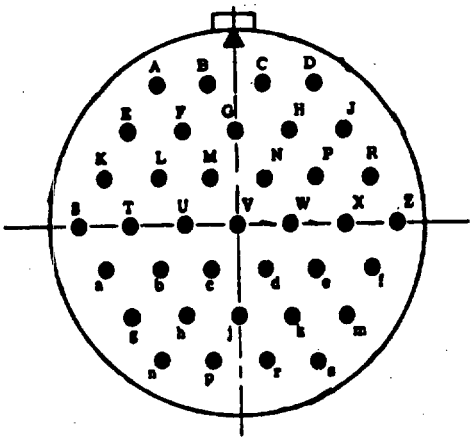


28-21

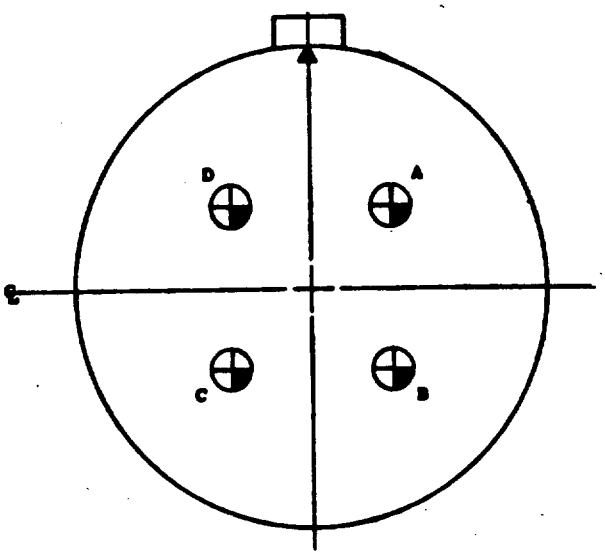

32-17

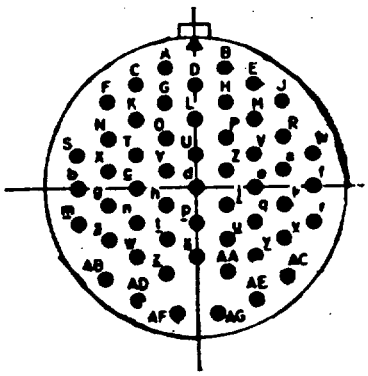

32-22

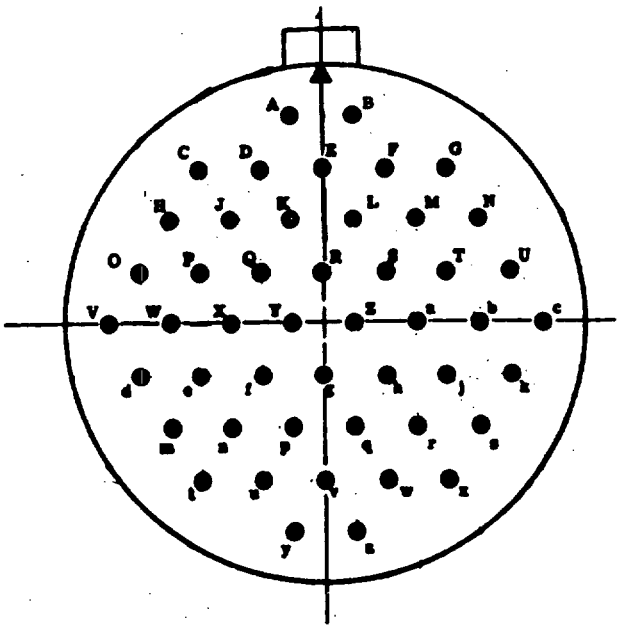


36-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3450 SERIES)




8S-1




10SL-3




12S-3



14S-2



14S-5




14S-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3450 SERIES)




14S-7



16S-1



16S-8

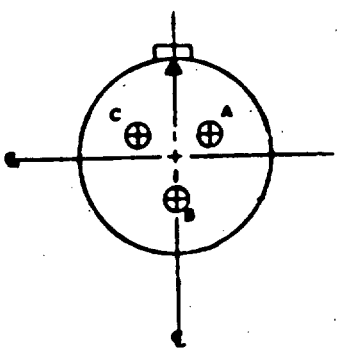


16-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3450 SERIES)




16-11

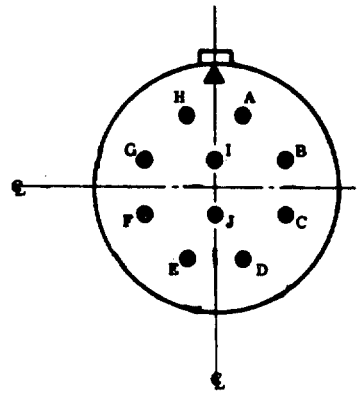

18-1



18-4




18-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3450 SERIES)




18-9



18-11



20-4




20-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3450 SERIES)

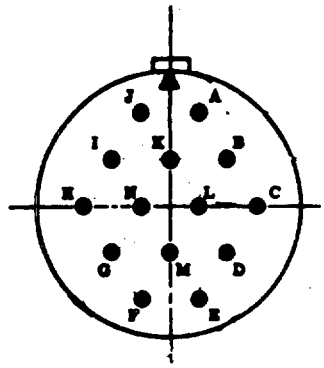


20-27

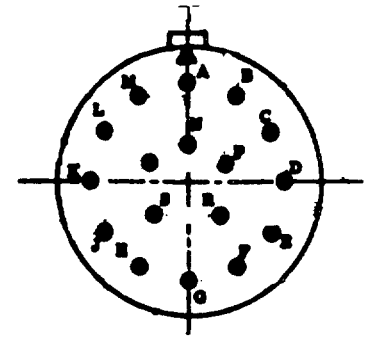

20-29

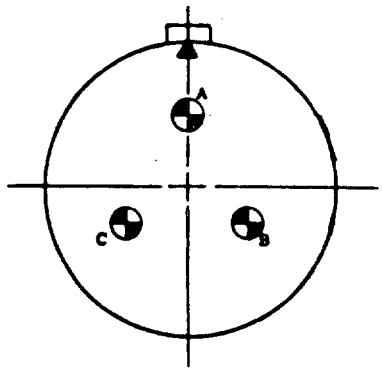

22-2

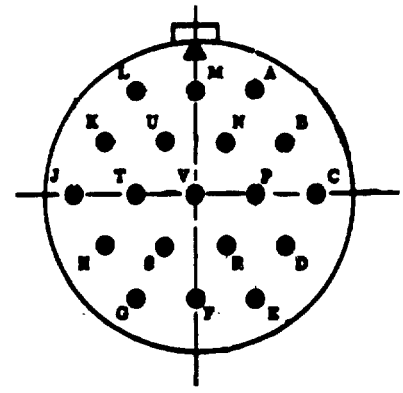


22-14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3450 SERIES)

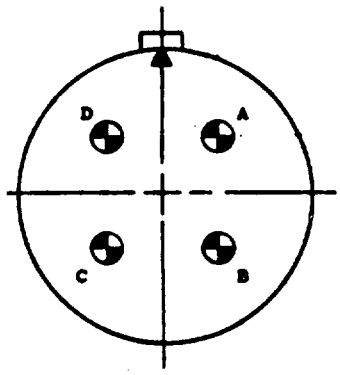


22-22

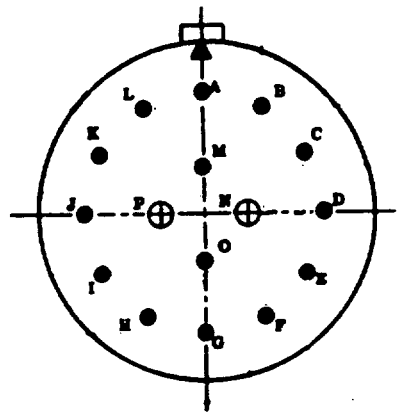

24-7

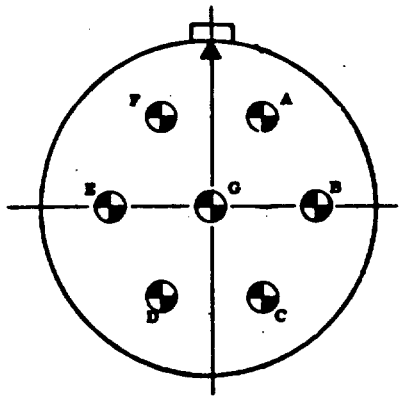

24-10

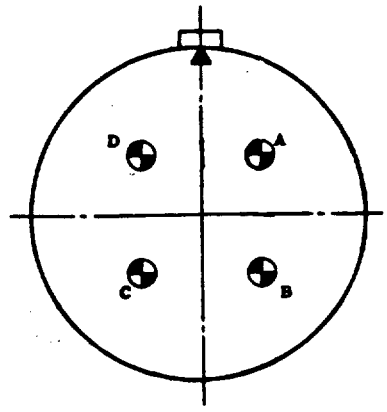


24-22

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651 (MS3450 SERIES)

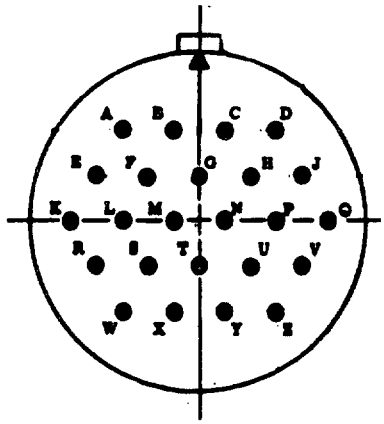


24-28

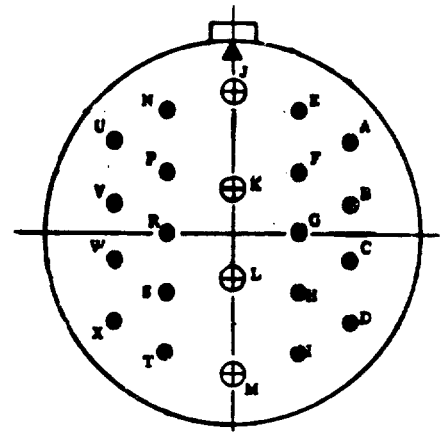

28-11

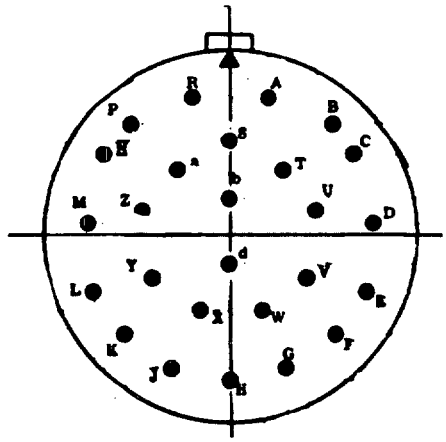

28-12

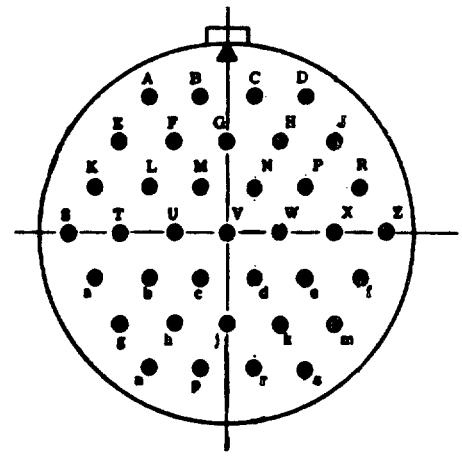


28-21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS

MIL-STD-1651 (MS3450 SERIES)

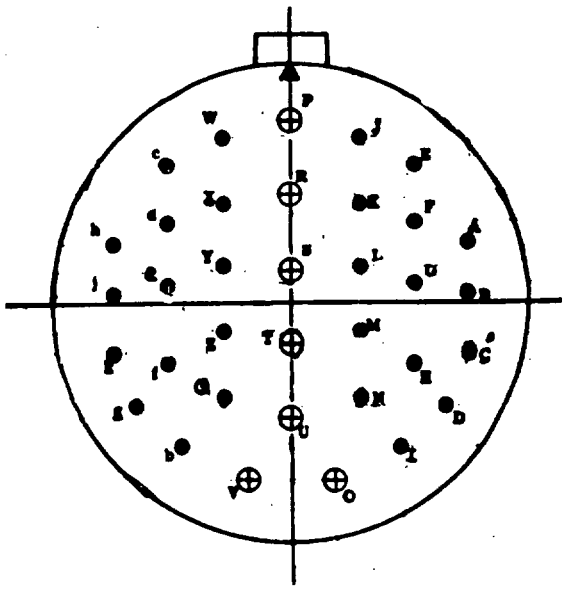

32-7

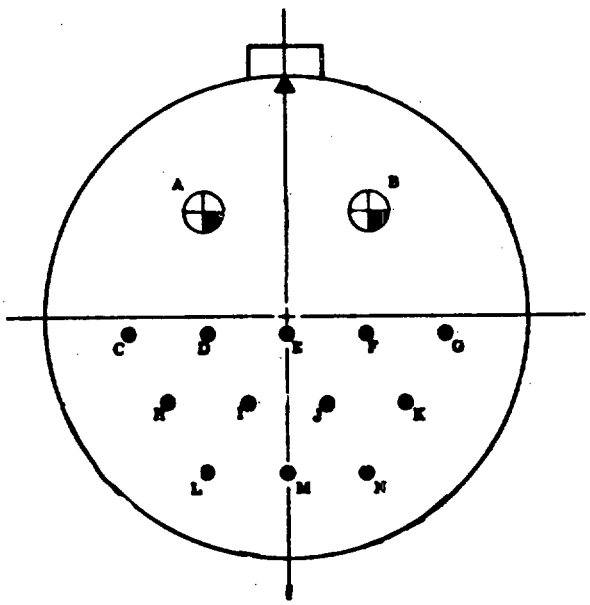


32-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS

MIL-STD-1651 (MS3450 SERIES)

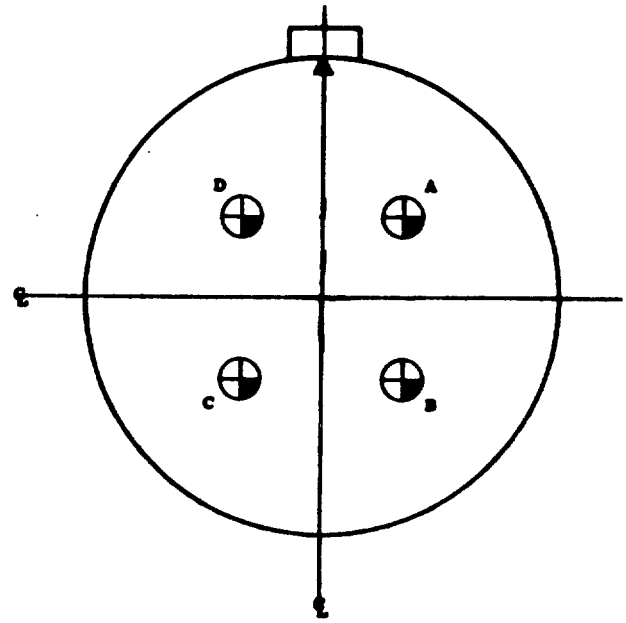

32-17

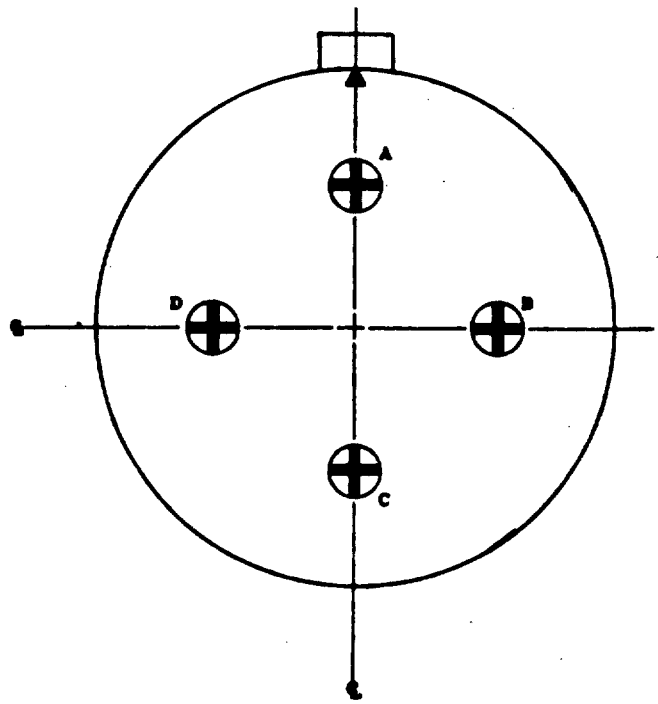


26-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, INSERT ARRANGEMENTS

MIL-STD-1651 (MS3450 SERIES)

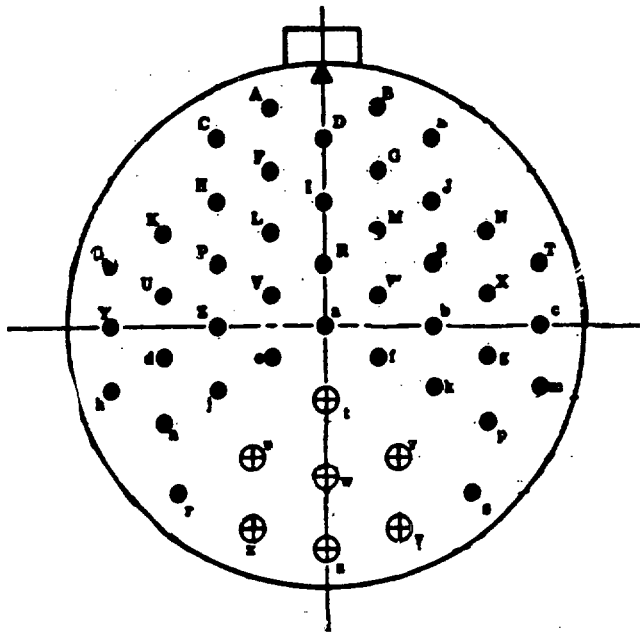

36-7

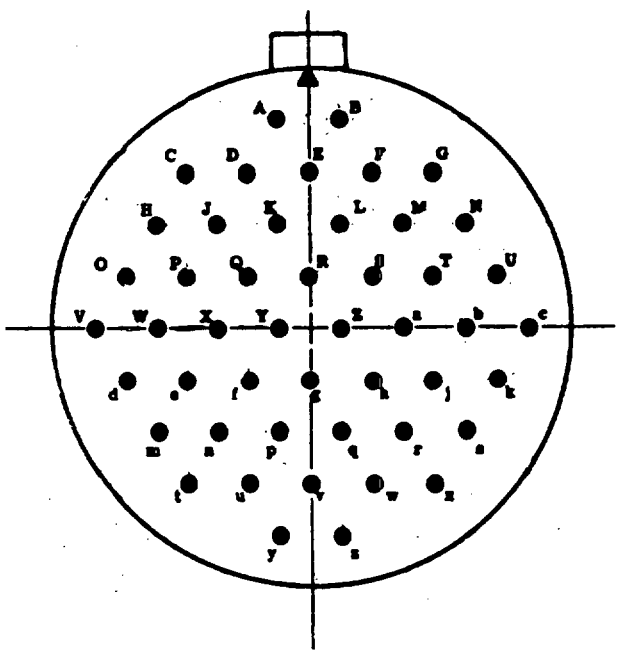


36-10


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-85049/11


CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, AND MIL-C-83723 SERIES III CONNECTORS)

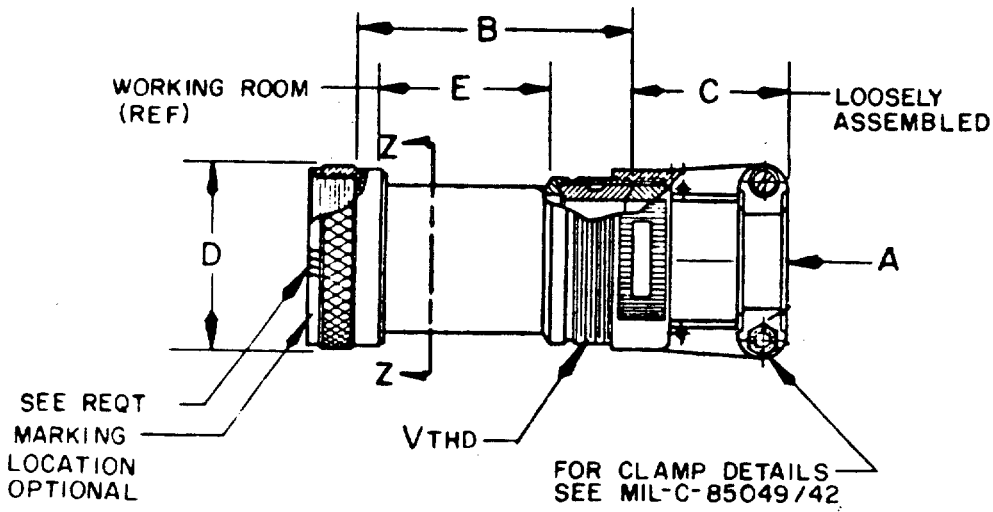

STYLE 1

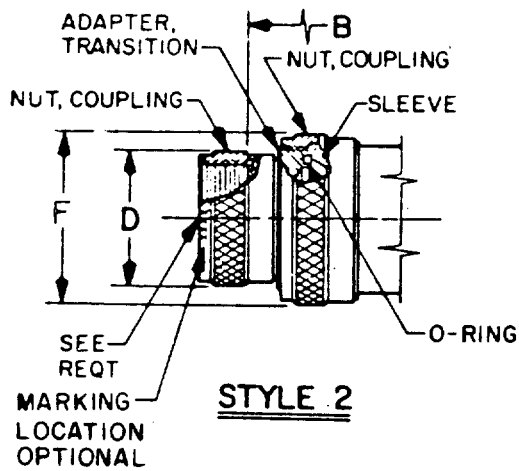

STYLE 2

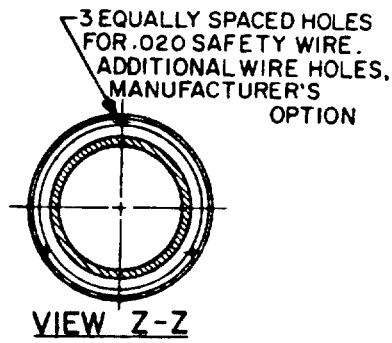

VIEW Z-Z

Part number: See example below:

M85049/ 11 - 10 W

- M85049/ — Military designator
- 11 — Specification sheet
- 10 — Dash number
- W — Finish (see table 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-85049/11

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, AND MIL-C-83723 SERIES III CONNECTORS)

DASH NO	FITS SHELL OF CONNECTOR			CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B	C REF	D DIA MAX
		MIL-C-5015 CRIMP	MIL-C-83723 SER III							
01		X	X	4	.125	.250	1	2.00	1.027	.669
02								3.00		
03				6	.250	.437	2	2.75	1.027	.669
04								3.75		
05		8S	8	4	.125	.250	1	2.00	1.027	.617
06								3.00		
07				6	.250	.437	2	2.75	1.027	.617
08								3.75		
09		10SL	10	4	.125	.312	1	2.00	1.027	.734
10								3.00		
11				6	.250	.437	2	2.75	1.027	.734
12								3.75		
13		12S	12	6	.250	.437	1	2.00	1.027	.858
14								3.00		
15				10	.350	.625	2	2.75	1.027	.858
16								3.75		
17		14S	14	10	.350	.575	1	2.00	1.027	.984
18								3.00		
19				12	.500	.750	2	2.75	1.059	.984
20								3.75		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
01	1.06	.625-24 UNEF	–
02	2.06		
03	1.81	.750-20 UNEF	.858
04	2.81		
05	1.06	.625-24 UNEF	–
06	2.06		
07	1.81	.750-20 UNEF	.858
08	2.81		
09	1.06	.625-24 UNEF	–
10	2.06		
11	1.81	.750-20 UNEF	.858
12	2.81		
13	1.06	.750-20 UNEF	–
14	2.06		
15	1.67	1.000-20 UNEF	1.112
16	2.67		
17	0.92	1.000-20 UNEF	–
18	1.92		
19	1.67	1.187-18 UNEF	1.218
20	2.67		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-85049/11

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, AND MIL-C-83723 SERIES III CONNECTORS)

DASH NO	FITS SHELL OF CONNECTOR			CLAMP SIZE	A CABLE RANGE		STYLE	B *	C REF	D DIA MAX
		MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX				
21		16,16S	16	12	.500	.700	1	2.00	1.059	1.112
22								3.00		
23				16	.625	.937	2	2.75	1.156	1.112
24								3.75		
25		18	18	10	.350	.625	1	2.00	1.027	1.218
26								3.00		
27				12	.500	.750	1	2.00	1.059	1.218
28								3.00		
29				16	.625	.937	2	2.75	1.156	1.218
30								3.75		
31		20	20	10	.350	.625	1	3.00	1.027	1.345
32								4.00		
33				12	.500	.750	1	3.00	1.059	1.345
34								4.00		
35				16	.625	.937	2	3.75	1.156	1.345
36								4.75		
37				20	.875	1.250	2	3.75	1.375	1.345
38								4.75		
39		22	22	10	.350	.625	1	3.00	1.027	1.468
40								4.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
21	0.92	1.187-18 UNEF	–
22	1.92		
23	1.67	1.437-18 UNEF	1.468
24	2.67		
25	0.92	1.000-20 UNEF	–
26	1.92		
27	0.92	1.187-18 UNEF	–
28	1.92		
29	1.67	1.437-18 UNEF	1.468
30	2.67		
31	1.92	1.000-20 UNEF	–
32	2.92		
33	1.92	1.187-18 UNEF	–
34	2.92		
35	2.67	1.437-18 UNEF	1.468
36	3.67		
37	2.67	1.750-18 UNS	1.969
38	3.67		
39	1.92	1.000-20 UNEF	–
40	2.92		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-85049/11

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, AND MIL-C-83723 SERIES III CONNECTORS)

DASH NO	FITS SHELL OF CONNECTOR		CLAMP SIZE	A CABLE RANGE		STYLE	B	C	D DIA
	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX			REF	MAX
41	22	22	12	.500	.750	1	3.00	1.059	1.468
42							4.00		
43			16	.625	.937	1	3.00	1.156	1.468
44							4.00		
45			20	.875	1.250	2	3.75	1.375	1.468
46							4.75		
47	24	24	12	.500	.750	1	3.00	1.059	1.593
48							4.00		
49			16	.625	.812	1	3.00	1.156	1.593
50							4.00		
51			16	.625	.937	1	3.00	1.156	1.593
52							4.00		
53			20	.875	1.250	2	3.75	1.375	1.593
54							4.75		
55	28		12	.500	.750	1	3.00	1.059	1.969
56							4.00		
57			16	.625	.937	1	3.00	1.156	1.969
58							4.00		
59			20	.875	1.250	1	3.00	1.375	1.969
60							4.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
41	1.92	1.187-18 UNEF	–
42	2.92		
43	1.92	1.437-18 UNEF	–
44	2.92		
45	2.67	1.750-18 UNS	1.969
46	3.67		
47	1.92	1.187-18 UNEF	–
48	2.92		
49	1.92	1.437-18 UNEF	–
50	2.92		
51	1.92	1.437-18 UNEF	–
52	2.92		
53	2.67	1.750-18 UNS	1.969
54	3.67		
55	1.92	1.187-18 UNEF	–
56	2.92		
57	1.92	1.437-18 UNEF	–
58	2.92		
59	1.92	1.750-18 UNS	–
60	2.92		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-85049/11

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, AND MIL-C-83723 SERIES III CONNECTORS)

DASH NO	FITS SHELL OF CONNECTOR		CLAMP SIZE	A CABLE RANGE		STYLE	B	C	D DIA
	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX			REF	MAX
61	28		24	1.000	1.375	1	3.00	1.500	1.969
62							4.00		
63	32		16	.625	.937	1	3.00	1.156	2.219
64							4.00		
65			20	.875	1.250	1	3.00	1.375	2.219
66							4.00		
67			24	1.000	1.375	1	3.00	1.500	2.219
68							4.00		
69			28	1.250	1.625	1	3.00	1.781	2.219
70							4.00		
71	36		20	.875	1.250	1	4.00	1.375	2.469
72							5.00		
73			24	1.000	1.375	1	4.00	1.500	2.469
74							5.00		
75			28	1.250	1.625	1	4.00	1.781	2.469
76							5.00		
77			32	1.437	1.875	2	4.88	1.830	2.469
78							5.88		
79	40		20	.875	1.250	1	4.00	1.375	2.719
80							5.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
61	1.92	2.000-18 UNS	-
62	2.92		
63	1.92	1.437-18 UNEF	-
64	2.92		
65	1.92	1.750-18 UNS	-
66	2.92		
67	1.92	2.000-18 UNS	-
68	2.92		
69	1.92	2.250-16 UN	-
70	2.92		
71	2.92	1.750-18 UNS	-
72	3.92		
73	2.92	2.000-18 UNS	-
74	3.92		
75	2.92	2.250-16 UN	-
76	3.92		
77	3.80	2.500-16 UN	2.719
78	4.80		
79	2.92	1.750-18 UNS	-
80	3.92		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-85049/11

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, AND MIL-C-83723 SERIES III CONNECTORS)

DASH NO	FITS SHELL OF CONNECTOR		CLAMP SIZE	A CABLE RANGE		STYLE	B	C	D DIA
	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX			REF	MAX
81	40		24	1.000	1.375	1	4.00	1.500	2.719
82							5.00		
83			28	1.250	1.625	1	4.00	1.781	2.719
84							5.00		
85			32	1.437	1.875	1	4.00	1.830	2.719
86							5.00		
87	44		20	.875	1.250	1	4.00	1.375	2.869
88							5.00		
89			24	1.000	1.375	1	4.00	1.500	2.869
90							5.00		
91			28	1.250	1.625	1	4.00	1.781	2.869
92							5.00		
93			32	1.437	1.875	1	4.00	1.830	2.869
94							5.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
81	2.92	2.000-18 UNS	-
82	3.92		
83	2.92	2.250-16 UN	-
84	3.92		
85	2.92	2.500-16 UN	-
86	3.92		
87	2.92	1.750-18 UNS	-
88	3.92		
89	2.92	2.000-18 UNS	-
90	3.92		
91	2.92	2.250-16 UN	-
92	3.92		
93	2.92	2.500-16 UN	-
94	3.92		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-85049/11

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, AND MIL-C-83723 SERIES III CONNECTORS)

DASH NO	FITS SHELL OF CONNECTOR			CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B	C REF	D DIA MAX
		MIL-C-5015 CRIMP	MIL-C-83723 SER III							
111		12S	12	10	.350	.500	1	2.00	1.027	.858
112		16,16S	16	6	.250	.437	1	2.00	1.027	1.112
113								3.00		
114		12S	12	4	.125	.312	1	2.00	1.027	.858
115								3.00		
116		14S	14	6	.250	.437	1	2.00	1.027	.884
117								3.00		
118		16,16S	16	10	.350	.625	1	2.00	1.027	1.112
119								3.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
111	1.00	1.000-20 UNEF	-
112	1.00	.750-20 UNEF	-
113	2.00		
114	1.00	.625-24 UNEF	-
115	2.00		
116	1.00	.750-20 UNEF	-
117	2.00		
118	0.92	1.000-20 UNEF	-
119	1.92		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-85049/11

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, AND MIL-C-83723 SERIES III CONNECTORS)

DASH NO	FITS SHELL OF CONNECTOR		CLAMP SIZE	A CABLE RANGE		STYLE	B	C	D DIA
	MIL-C-5015 CRIMP	MIL-C-83723 SER III		MIN	MAX			REF	MAX
120	18	18	4	.125	.312	1	2.00	1.027	1.218
121							3.00		
122			6	.250	.437	1	2.00	1.027	1.218
123							3.00		
124	20	20	6	.250	.437	1	3.00	1.027	1.345
125							4.00		
126	22	22	4	.125	.312	1	3.00	1.027	1.469
127							4.00		
128			6	.250	.437	1	3.00	1.027	1.468
129							4.00		
130	24	24	10	.350	.625	1	3.00	1.027	1.593
131							4.00		
132	36		12	.500	.750	1	4.00	1.059	2.469
133							5.00		
134	40		12	.500	.750	1	4.00	1.059	2.719
135							5.00		
136	10SL	10	6	.250	.375	1	2.00	1.027	.734
137							3.00		
138	12S	12	10	.350	.500	1	2.00	1.027	.858
139							3.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
120	0.92	.625-24 UNEF	-
121	1.92		
122	0.92	.750-20 UNEF	-
123	1.92		
124	1.92	.750-20 UNEF	-
125	2.92		
126	1.92	.625-24 UNEF	-
127	2.92		
128	1.92	.750-20 UNEF	-
129	2.92		
130	1.92	1.000-20 UNEF	-
131	2.92		
132	2.92	1.187-18 UNEF	-
133	3.92		
134	2.92	1.187-18 UNEF	-
135	3.92		
136	1.06	.750-20 UNEF	-
137	2.06		
138	1.06	1.000-20 UNEF	-
139	2.06		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-85049/11

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, CATEGORY 1A
(FOR MIL-C-5015 CRIMP, AND MIL-C-83723 SERIES III CONNECTORS)

DASH NO	FITS SHELL OF CONNECTOR		CLAMP SIZE	A CABLE RANGE MIN	A CABLE RANGE MAX	STYLE	B	C REF	D DIA MAX
	MIL-C-5015 CRIMP	MIL-C-83723 SER III							
140	20	20	16	.625	.904	1	3.00	1.156	1.345
141							4.00		
142	22	22	20	.875	1.029	1	3.00	1.375	1.468
143							4.00		
144	24	24	20	.875	1.144	1	3.00	1.375	1.593
145							4.00		
146	36	X	32	1.437	1.840	1	4.00	1.830	2.469
147							5.00		
148			16	.625	.937	1	4.00	1.156	2.469
149							5.00		
150	14S	14	4	.125	.312	1	2.00	1.027	.984
151							3.00		
152	16,16S	16	4	.125	.312	1	2.00	1.027	1.112
153							3.00		
154	44	X	16	.625	.937	1	4.00	1.156	2.969
155							5.00		
156	40	X	16	.625	.937	1	4.00	1.156	2.719
157							5.00		

DASH NO	E REF	V THREAD CLASS 2A	F DIA MAX
140	1.92	1.437-18 UNEF	-
141	2.92		
142	1.92	1.750-18 UNEF	-
143	2.92		
144	1.92	1.750-18 UNEF	-
145	2.92		
146	2.92	2.500-16 UNEF	-
147	3.92		
148	2.92	1.437-18 UNEF	-
149	3.92		
150	0.92	.625-24 UNEF	-
151	1.92		
152	0.92	.625-24 UNEF	-
153	1.92		
154	2.92	1.437-18 UNEF	-
155	3.92		
156	2.92	1.437-18 UNEF	-
157	3.92		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH DENSITY, SHIPBOARD

MIL-C-28840

SCOPE: THIS SECTION COVERS CIRCULAR ELECTRICAL, HIGH DENSITY, HIGH SHOCK CONNECTORS WITH REMOVABLE CRIMP CONTACTS (FRONT RELEASE) AND ARE USED WITH JACKETED CABLE IN SHIPBOARD APPLICATIONS.

TEMPERATURE RANGE: -55°C TO +200°C.

APPLICABLE DOCUMENTS:

MIL-C-39029 - CONTACTS, ELECTRICAL CONNECTOR, GENERAL SPECIFICATION FOR
MIL-C-22520 - CRIMP TOOLS, REMOVABLE CONTACTS, GENERAL SPECIFICATION FOR
MIL-I-81969 - INSTALLING AND REMOVABLE TOOLS, CONNECTOR, ELECTRICAL CONTACT, GENERAL SPECIFICATION FOR
MIL-STD-1698 - INSERT ARRANGEMENTS FOR MIL-C-28840 CONNECTORS

CONNECTORS - CABLE APPLICATION: CABLE TYPE (MIL-C-915) TO CONNECTORS MIL-C-28840 AND/OR MIL-C-5015, SEE TABLE IV, PAGE 138.7.


CLASS: SEE TABLE I.

SHELL SIZE DESIGNATOR: SEE TABLE II.

CONTACTS: THE CONTACTS USED IN MIL-C-28840 CONNECTORS ARE:
MIL-C-39029/83 - PIN
MIL-C-39029/84 - SOCKET
FOR WIRE RANGE ACCOMODATIONS SEE TABLE III.

CONTACT SIZE DESIGNATION: THE CONTACT SIZE DESIGNATION FOR CRIMP CONTACTS SHALL BE THE MATING END AND WIRE BARREL SIZES AS SPECIFIED IN MIL-C-39029.

EXAMPLE OF CRIMP CONTACT:



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH DENSITY, SHIPBOARD

MIL-C-28840

TABLE I. CONNECTOR CLASSES - PHYSICAL CHARACTERISTIC

CLASS CODE	CLASS	FEATURE	FLUID	HOT SPOT TEMP °C	SERVICE LIFE	INSERT MATERIAL	SHELLS AND COUPLING RINGS	
							MATERIAL	FINISH
A	D	HIGH IMPACT SHOCK	COMPLETE	125 200	20YRS 1000HRS	FLUORO-SILICONE	WROUGHT ALUMINUM	CADMIUM, OLIVE DRAB OVER NICKEL
B	DS	HIGH IMPACT	COMPLETE	125	20YRS 1000HRS	FLUORO-SILICONE	CORROSION RESISTANT STEEL 316	CADMIUM
C	DJ	HIGH IMPACT SHOCK WITH BACKSHELL CONNECTOR ASSEMBLY	COMPLETE	125 200	20YRS 1000HRS	FLUORO-SILICONE	WROUGHT ALUMINUM	CADMIUM, OLIVE DRAB OVER NICKEL.
D	DJS	HIGH IMPACT SHOCK WITH BACKSHELL CONNECTOR ASSEMBLY	COMPLETE	125 200	20YRS 1000HRS	FLUORO-SILICONE	CORROSION RESISTANT STEEL 316	CADMIUM

TABLE II. SHELL SIZES

DESIGNATOR	SIZES	NO. CONTACTS
A	11	7
B	13	12
C	15	21
D	17	31
E	19	42
F	23	64
G	25	92
H	29	121
J	33	155


TABLE III. WIRE RANGE ACCOMODATIONS

CONTACT SIZE	WIRE SIZE	OD OF FINISHED WIRE (INCH) # CRIMP CONTACT CONNECTORS	
		MINIMUM	MAXIMUM
20-20	24 22 20	.040	.070
20-22	26 24 22	.040	.070
20-28@	32 30 28	.040	.070

\# WIRE REFERENCE - MIL-W-16878, AND MIL-C-915.
@ TO OBTAIN SEALING, WIRES MUST BE BUILT UP TO FINISHED WIRE DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH DENSITY, SHIPBOARD

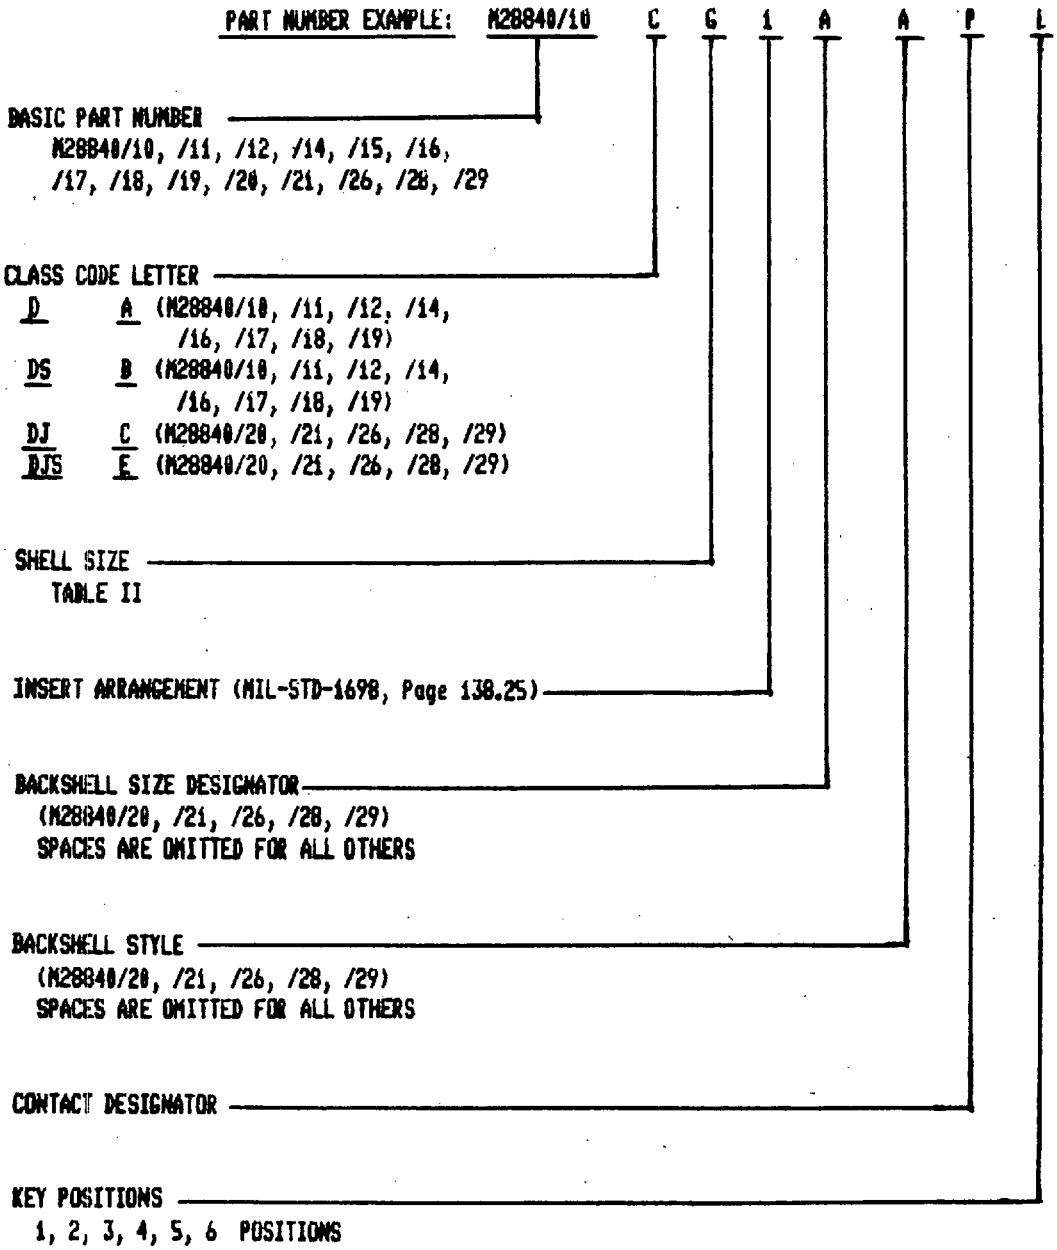

Source: https://assist.dla.mil downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-28840

GENERAL DUTY PER MIL-C-5015, CLASSES D, DS, DJ, AND DJS (SEE INDIVIDUAL MS SHEET)

CONTACT STYLES: THE FOLLOWING DESIGNATORS IDENTIFY THE VARIOUS CONTACT SYTLE.

P	PIN CONTACTS	-20-22
S	SOCKET CONTACTS	-20-22
D	PIN CONTACTS	-20-28
E	SOCKET CONTACTS	-20-28
F	PIN CONTACTS	-20-20
G	SOCKET CONTACTS	-20-20

CLASS VARIATION:

"D" - WROUGHT ALUMINUM SHELL, HIGH IMPACT SHOCK RESISTANCE
"DS" - STAINLESS STEEL SHELL, HIGH IMPACT SHOCK RESISTANCE
"DJ" - CONNECTOR BACKSHELL ASSEMBLY (RECEPTACLE OR PLUG)
"DJS" - CONNECTOR BACKSHELL ASSEMBLY (STAINLESS)


NOTES:

(A) ALL RECEPTACLES MATE WITH MIL-C-28840/16, /17, /18, /19, /26, /28, OR /29.
(B) ALL PLUGS MATE WITH MIL-C-28840/10, /11, /12, /14, /20, OR /21.
(C) SHELL POLARIZATION: 1 THRU 6 KEY POSITION
(4) INSTALLING AND REMOVAL TOOL: AS SPECIFIED IN MIL-I-81969/33 AND /34.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, RECEPTACLE, WALL MOUNTING

MIL-C-28840/10

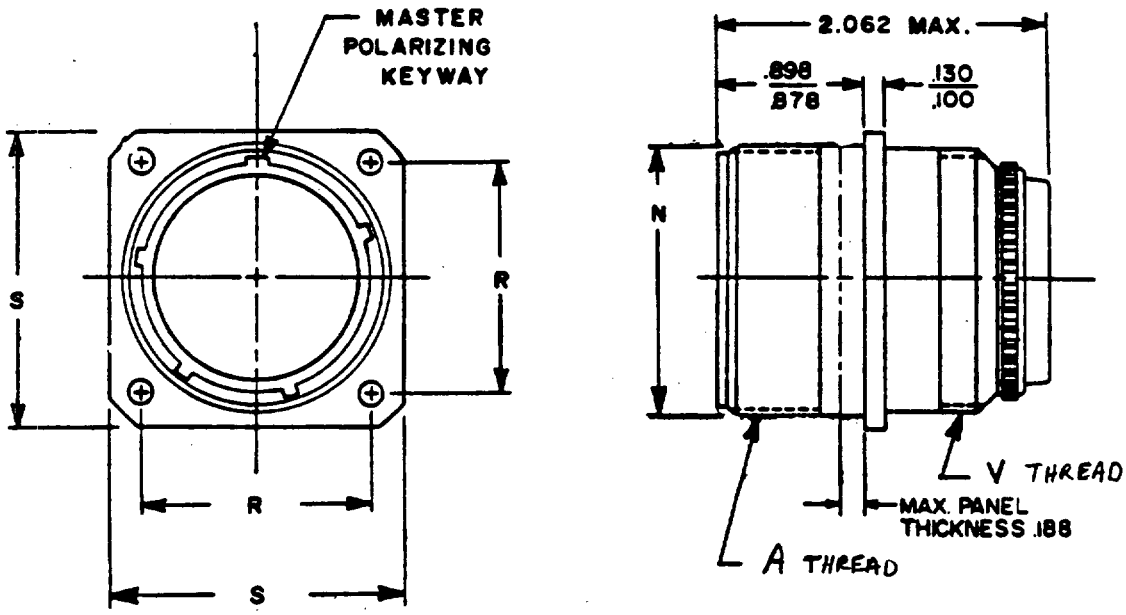


DESIGNATOR	N DIA MAX	R T.P. CL TO CL	S	A THREAD CLASS 2 B	V THREAD CLASS 2 A
A (11)	.750	.750	1.043 1.003	.750-.1P-.2L-U.S.	3/4-20 UNEF
B (13)	.875	.843	1.158 1.118	.875	7/8-20 UNEF
C (15)	1.062	.968	1.278 1.238	1.062	1-20 UNEF
D (17)	1.125	1.015	1.403 1.363	1.125	1 1/8-18 UNEF
E (19)	1.312	1.140	1.528 1.488	1.312	1 1/4-18 UNEF
F (23)	1.500	1.281	1.738 1.698	1.500	1 7/16-18 UNEF
G (25)	1.625	1.392	1.838 1.798	1.625	1 9/16-18 UNEF
H (29)	1.812	1.568	2.158 2.118	1.812	1 7/8-16 UN
J (33)	2.000	1.734	2.348 3.308	2.000	2 1/16-16 N

MATES WITH: (PLUG) MIL-C-28840/16, /17, /18, /19, /26, /28 AND /29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, RECEPTACLE, CABLE CONNECTING

MIL-C-28840/11

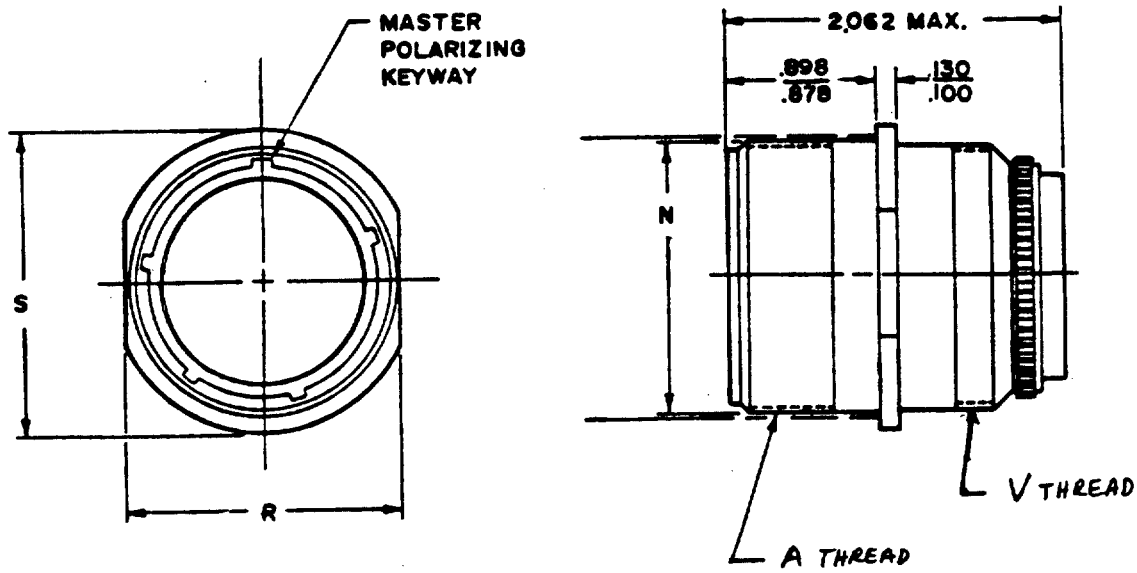


DESIGNATOR	N DIA MAX	R	S	A THREAD CLASS 2B	V THREAD CLASS 2A
A (11)	.750	.768 .758	.963 .943	.750-.1P-.2L-D.S.	3/4-20 UNEF
B (13)	.875	.893 .883	1.088 1.063	.875	7/8-20 UNEF
C (15)	1.062	1.080 1.070	1.275 1.255	1.062	1-20 UNEF
D (17)	1.125	1.143 1.133	1.338 1.318	1.125	1 1/8-18 UNEF
E (19)	1.312	1.330 1.320	1.525 1.505	1.312	1 1/4-18 UNEF
F (23)	1.500	1.518 1.508	1.713 1.693	1.500	1 7/16-18 UNEF
G (25)	1.625	1.643 1.633	1.838 1.818	1.625	1 9/16-18 UNEF
H (29)	1.812	1.893 1.883	2.088 2.068	1.812	1 7/8-16 UN
J (33)	2.000	2.080 2.070	2.275 2.255	2.000	2 1/16-16 N

MATES WITH: (PLUG) MIL-C-28840/16, /17, /18, /19, /26, /28 AND /29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, RECEPTACLE, BOX MOUNTING

MIL-C-28840/12

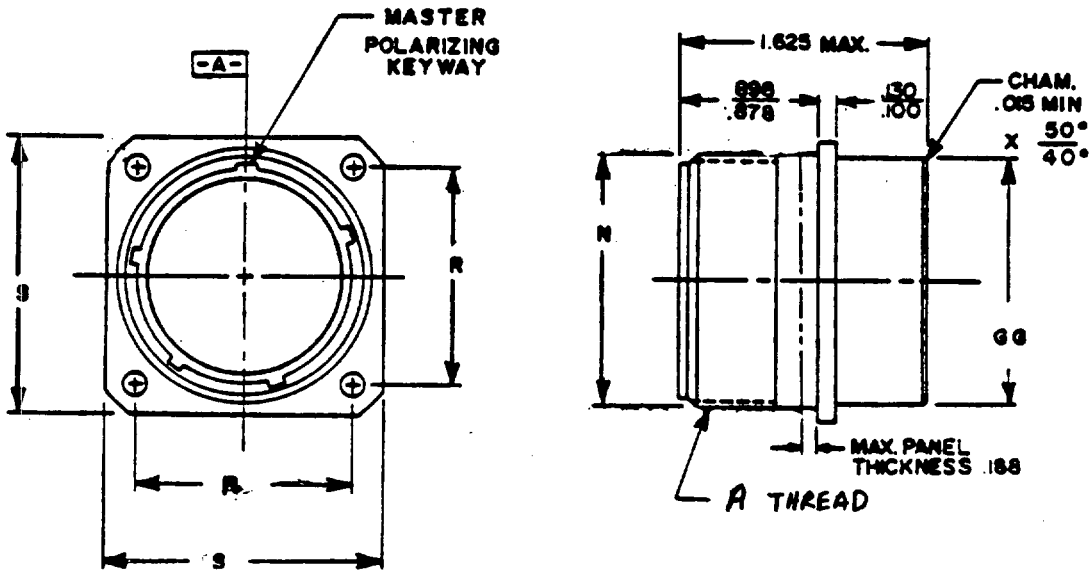

DESIGNATOR	N DIA MAX	R T.P. CL TO CL	S	GG DIA MAX	A THREAD CLASS 2B
A (11)	.750	.750	1.043 1.003	.758	.750-.1P-.2L-D.S.
B (13)	.875	.843	1.158 1.118	.880	.875
C (15)	1.062	.968	1.278 1.238	1.085	1.062
D (17)	1.125	1.015	1.403 1.363	1.130	1.125
E (19)	1.312	1.140	1.528 1.488	1.255	1.312
F (23)	1.500	1.281	1.738 1.698	1.443	1.500
G (25)	1.625	1.392	1.838 1.798	1.567	1.625
H (29)	1.812	1.568	2.158 2.118	1.880	1.812
J (33)	2.000	1.734	2.348 3.308	2.067	2.000

MATES WITH: (PLUG) MIL-C-28840/16, /17, /18, /19, /26, /28 AND /29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, RECEPTACLE, JAM NUT MOUNTING

MIL-C-28840/14

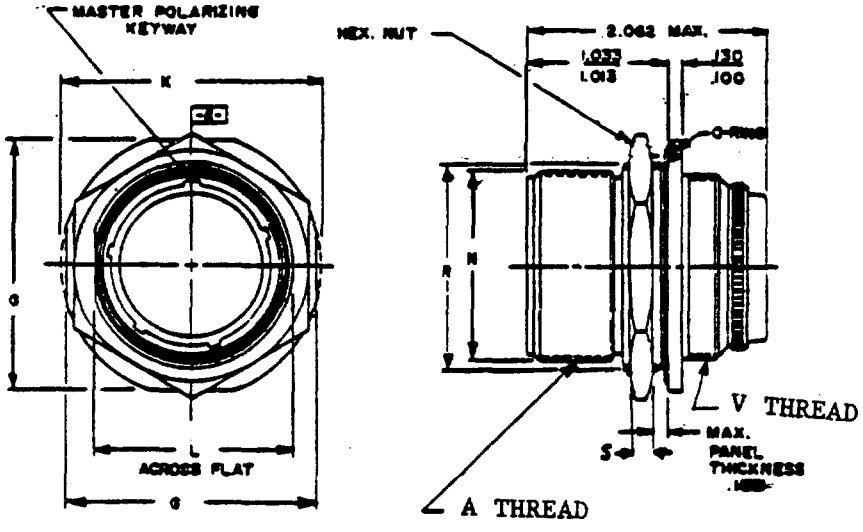



TABLE I. DIMENSIONS AND CONFIGURATION

DESIGNATOR	G	K	L ACROSS FLAT	N MAX.	R MAX.	S HEX NUT THICKNESS	A THREAD CLASS 2B	V THREAD CLASS 2A
	1.274	1.368	.841	.750	.875	.125	.750-.1P	3/4-20
A (11)	1.254	1.348	.832				-.2L-D.S.	UNEF
	1.399	1.508	.966	.875	1.000	.125	.875-.1P	7/8-20
B (13)	1.379	1.488	.957				-.2L-D.S.	UNEF
	1.587	1.681	1.153	1.062	1.188	.125	1.062-.1P	1-20
C (15)	1.567	1.661	1.144				-.2L-D.S.	UNEF
	1.649	1.743	1.216	1.125	1.250	.125	1.125-.1P	1 1/8-18
D (17)	1.629	1.723	1.207				-.2L-D.S.	UNEF
	1.837	1.931	1.403	1.312	1.438	.125	1.312-.1P	1 1/4-18
E (19)	1.817	1.911	1.394				-.2L-D.S.	UNEF
	2.024	2.118	1.591	1.500	1.625	.125	1.500-.1P	1 7/16-18
F (23)	2.004	2.098	1.582				-.2L-D.S.	UNEF
	2.149	2.243	1.716	1.625	1.750	.189	1.625-.1P	1 9/16-18
G (25)	2.129	2.223	1.707				-.2L-D.S.	UNEF
	2.337	2.435	1.903	1.812	1.938	.189	1.812-.1P	1 7/8-16
H (29)	2.317	2.415	1.894				-.2L-D.S.	UN
	2.524	2.618	2.091	2.000	2.125	.189	2.000-.1P	2 1/16-16
J (33)	2.504	2.598	2.082				-.2L-D.S.	N

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG

MIL-C-28840/16

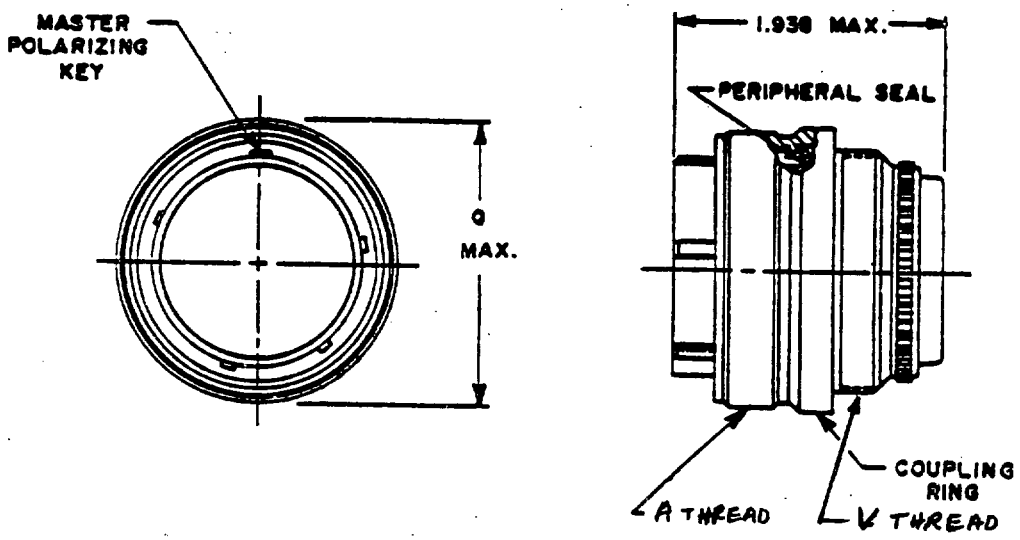


DESIGNATOR	Q DIA MAX	A THREAD CLASS 2B	V THREAD CLASS 2A
A (11)	1.028	.750-.1P-.2L-D.S.	3/4-20 UNEF
B (13)	1.141	.875	7/8-20 UNEF
C (15)	1.263	1.062	1-20 UNEF
D (17)	1.387	1.125	1 1/8-18 UNEF
E (19)	1.513	1.312	1 1/4-18 UNEF
F (23)	1.783	1.500	1 7/16-18 UNEF
G (25)	1.825	1.625	1 9/16-18 UNEF
H (29)	2.143	1.812	1 7/8-16 UN
J (33)	2.329	2.000	2 1/16-16 N

MATES WITH: (RECEPTACLE) MIL-C-28840/10, /11, /12, /14, /20 AND /21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, ASSEMBLY OPEN WIRE

MIL-C-28840/17

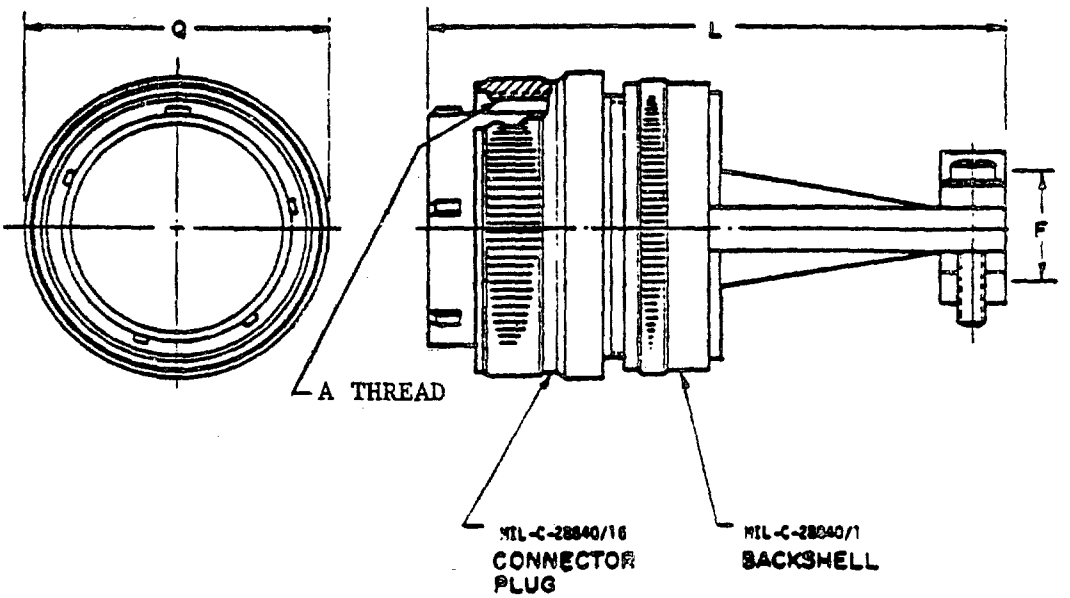


DESIGNATOR	ASSY NO. M28840/17X	CONNECTOR PLUG NO. M28840/16X	BACKSHELL ASSY NO. M28840/1	F CABLE ENTRY OPEN	F CABLE ENTRY CLOSED	L MAX	Q MAX	A THREAD CLASS 2B
A (11)	AXXX	AXXX	AX	.286	.177	2.438	1.028	.750-.1P-.2L-D.S.
B (13)	BXXX	BXXX	BX	.286	.177	2.438	1.141	.875
C (15)	CXXX	CXXX	CX	.416	.250	2.438	1.263	1.062
D (17)	DXXX	DXXX	DX	.476	.291	2.688	1.387	1.125
E (19)	EXXX	EXXX	EX	.626	.348	2.812	1.513	1.312
F (23)	FXXX	FXXX	FX	.851	.429	2.938	1.703	1.500
G (25)	GXXX	GXXX	GX	.956	.523	3.062	1.825	1.625
H (29)	HXXX	HXXX	HX	1.081	.643	3.188	2.143	1.812
J (33)	JXXX	JXXX	JX	1.187	.704	3.375	2.329	2.000

MATES WITH: (RECEPTACLE) MIL-C-28840/10, /11, /12, /14, /20 AND /21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, ASSEMBLY OPEN WIRE, 90

MIL-C-28840/18

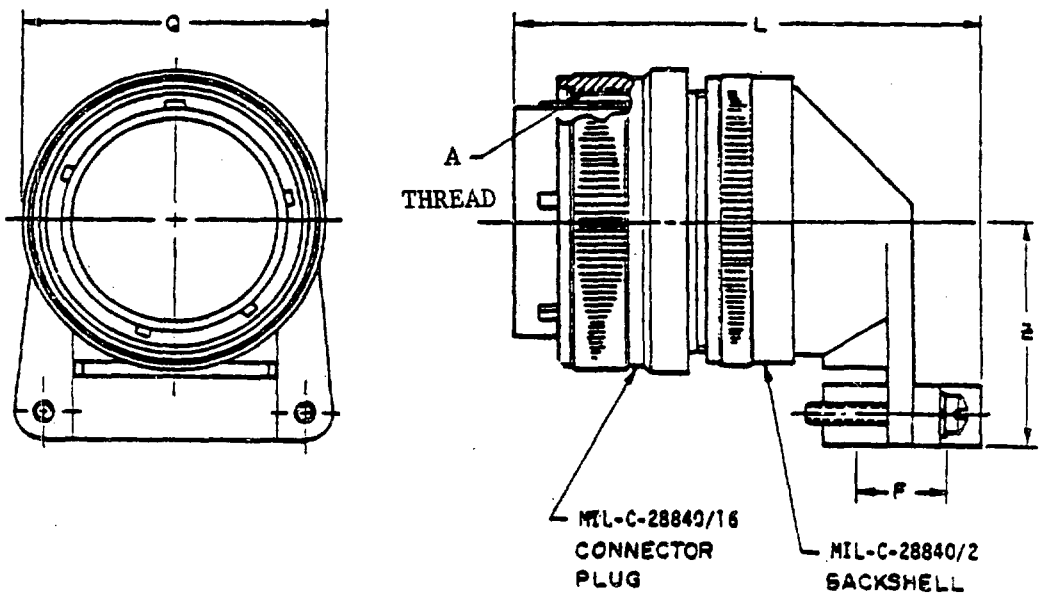

DESIGNATOR	ASSY NO. M28840/18X	CONNECTOR PLUG NO. M28840/16X	BACKSHELL ASSY NO. M28840/2	F CABLE ENTRY OPEN	F CABLE ENTRY CLOSED	L MAX	Q MAX	Z MAX	A THREAD CLASS 2B
A (11)	AXXX	AXXX	AX	.286	.177	2.562	1.028	.929	.750-.1P-.2L-D.S.
B (13)	BXXX	BXXX	BX	↓	↓	↓	1.141	↓	.875
C (15)	CXXX	CXXX	CX	.416	.250	2.750	1.263	1.056	1.062
D (17)	DXXX	DXXX	DX	.476	.291	2.875	1.387	1.233	1.125
E (19)	EXXX	EXXX	EX	.626	.348	3.000	1.513	1.296	1.312
F (23)	FXXX	FXXX	FX	.831	.429	3.125	1.703	1.358	1.500
G (25)	GXXX	GXXX	GX	.956	.523	3.250	1.825	1.420	1.625
H (29)	HXXX	HXXX	HX	1.081	.643	3.375	2.143	1.634	1.812
J (33)	JXXX	JXXX	JX	1.187	.704	3.438	2.329	1.859	2.000

MATES WITH: (RECEPTACLE) MIL-C-28840/10, /11, /12, /14, /20 AND /21

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ASSEMBLY, OPEN WIRE 45

MIL-C-28840/19

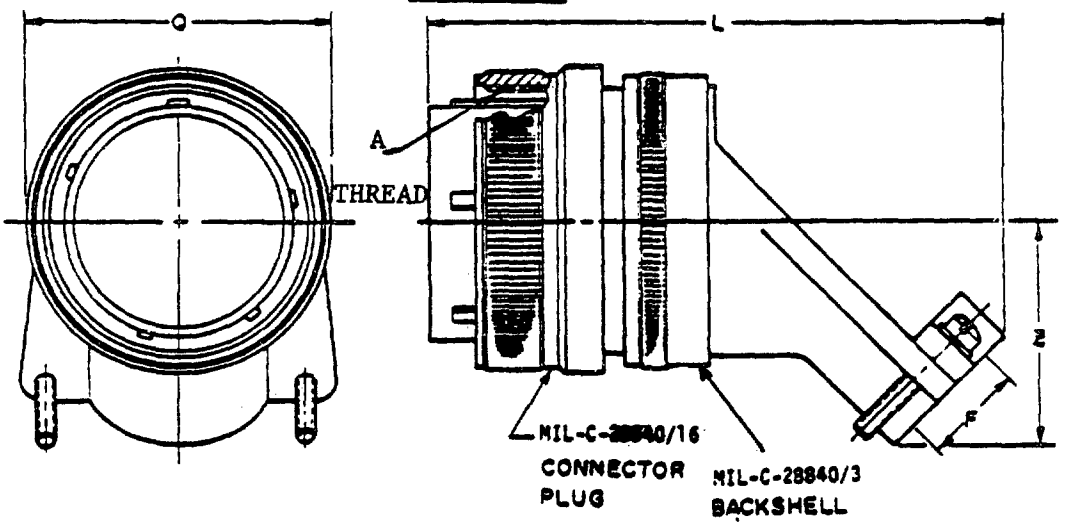


TABLE I. DIMENSIONS AND CONFIGURATION

DESIGNATOR ♦	ASSEMBLY NUMBER § M28840/19X	CONNECTOR PLUG NUMBER § M28840/16X	BACKSHELL ASSEMBLY NUMBER § M28840/3X	B THREAD CLASS 2B	F CABLE ENTRY OPEN	F CABLE ENTRY CLOSED	L MAX.	Q MAX.	Z MAX.
A (11)	AXXX	AXXX	AX	.750-.1P-.2L-D.S.	.286	.177	3.125	1.028	.928
B (13)	BXXX	BXXX	BX	.875-.1P-.2L-D.S.	.286	.177	3.125	1.141	.928
C (15)	CXXX	CXXX	CX	1.062-.1P-.2L-D.S.	.416	.250	3.250	1.263	.991
D (17)	DXXX	DXXX	DX	1.125-.1P-.2L-D.S.	.476	.291	3.312	1.387	1.110
E (19)	EXXX	EXXX	EX	1.312-.1P-.2L-D.S.	.626	.348	3.375	1.513	1.172
F (23)	FXXX	FXXX	FX	1.500-.1P-.2L-D.S.	.831	.429	3.438	1.703	1.235
G (25)	GXXX	GXXX	GX	1.625-.1P-.2L-D.S.	.956	.523	3.500	1.825	1.297
H (29)	HXXX	HXXX	HX	1.812-.1P-.2L-D.S.	1.081	.643	3.750	2.143	1.543
J (33)	JXXX	JXXX	JX	2.000-.1P-.2L-D.S.	1.187	.704	3.875	2.329	1.668

♦ SHELL SIZES ARE PROVIDED WITHIN PARENTHESES FOR INFORMATION AND ARE NOT A PART OF THE DESIGNATOR.
§ ASSEMBLY SHALL BE MADE UP OF A CONNECTOR AND BACKSHELL OF THE SAME MATERIAL.

MATES WITH: MIL-C-28840/10, /11, /12, /14, /20 AND /21.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, RECEPTACLE, WALL MOUNTING, ASSEMBLY, STRAIGHT CLASSES DJ AND DJS

MIL-C-28840/20

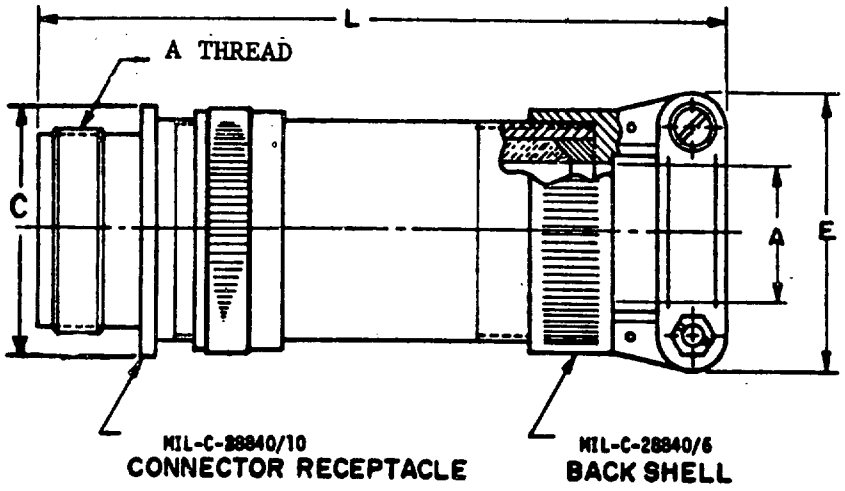


TABLE I. DIMENSIONS AND CONFIGURATION

DESIGNATOR #	ASSEMBLY NUMBER # M28840	CONNECTOR RECEPTACLE # M28840	BACKSHELL ASSEMBLY NO. # M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B	C DIA. MAX.	E MAX.	L MAX.
A (11)	/20XAXAXXX	/10XAXXX	/601XX	.312	.188	.750-.1P -.2L-D.S.	1.156	.938	6.625
A (11)	/20XAXBXXX	/10XAXXX	/624XX	.438	.281	.750-.1P -.2L-D.S.	1.156	1.125	6.625
A (11)	/20XACXXX	/10XAXXX	/625XX	.562	.344	.750-.1P -.2L-D.S.	1.218	1.312	6.625
B (13)	/20XBXBXXX	/10XBXXX	/603XX	.438	.281	.875-.1P -.2L-D.S.	1.156	1.125	6.625
B (13)	/20XBXCXXX	/10XBXXX	/626XX	.562	.344	.875-.1P -.2L-D.S.	1.281	1.312	6.625
B (13)	/20XBXDXXX	/10XBXXX	/627XX	.625	.375	.875-.1P -.2L-D.S	1.406	1.312	7.125
C (15)	/20XCXAXXX	/10XCXXX	/605XX	.438	.281	1.062-.1P -.2L-D.S.	1.218	1.125	6.625
C (15)	/20XCXBXXX	/10XCXXX	/606XX	.562	.344	1.062-.1P -.2L-D.S.	1.218	1.312	6.625
C (15)	/20XCXCXXX	/10XCXXX	/628XX	.625	.375	1.062-.1P -.2L-D.S.	1.406	1.312	7.125
C (15)	/20XCXDXXX	/10XCXXX	/607XX	.750	.438	1.062-.1P -.2L-D.S.	1.406	1.593	7.188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, RECEPTACLE, WALL MOUNTING, ASSEMBLY, STRAIGHT CLASSES DJ AND DJS

MIL-C-28840/20

TABLE I. DIMENSIONS AND CONFIGURATION (CONTINUED)

DESIGNATOR $	ASSEMBLY NUMBER $ M28840	CONNECTOR RECEPTACLE $ M28840	BACKSHELL ASSEMBLY NO. $ M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B	C DIA. MAX.	E MAX.	L MAX.
D (17)	/20XDXAXXX	/10XDXXX	/608XX	.625	.375	1.125-.1P -.2L-D.S	1.406	1.312	7.125
D (17)	/20XDXBXXX	/10XDXXX	/609XX	.750	.438	1.125-.1P -.2L-D.S.	1.406	1.593	7.188
E (19)	/20XEXAXXX	/10XEXXX	/611XX	.625	.375	1.312-.1P -.2L-D.S.	1.531	1.312	7.125
E (19)	/20XEXBXXX	/10XEXXX	/612XX	.938	.625	1.500-.1P -.2L-D.S.	1.531	1.750	7.250
F (23)	/20XFXAXXX	/10XFXXX	/613XX	.750	.438	1.500-.1P -.2L-D.S.	1.656	1.593	7.688
F (23)	/20XFXBXXX	/10XFXXX	/614XX	.938	.625	1.500-.1P -.2L-D.S.	1.656	1.750	7.812
F (23)	/20XFXCXXX	/10XFXXX	/615XX	1.188	.812	1.500-.1P -.2L-D.S.	1.656	2.093	7.938
G (25)	/20XGXAXXX	/10XGXXX	/616XX	.938	.625	1.625-.1P -.2L-D.S.	1.781	1.750	7.750
G (25)	/20XGXBXXX	/10XGXXX	/617XX	1.188	.812	1.625-.1P -.2L-D.S.	1.781	2.093	8.438
G (25)	/20XGXCXXX	/10XGXXX	/618XX	1.250	.875	1.625-.1P -.2L-D.S.	1.781	2.093	8.438
G (25)	/20XGXDXXX	/10XGXXX	/619XX	1.380	1.000	1.625-.1P -.2L-D.S	2.156	2.343	8.500
H (29)	/20XHXAXXX	/10XHXXX	/620XX	1.188	.812	1.812-.1P -.2L-D.S.	2.156	2.093	8.438
H (29)	/20XHXBXXX	/10XHXXX	/621XX	1.380	1.000	1.812-.1P -.2L-D.S.	2.156	2.343	8.500
J (33)	/20XJXAXXX	/10XJXXX	/622XX	1.380	1.000	2.000-.1P -.2L-D.S.	2.281	2.343	8.500
J (33)	/20XJXBXXX	/10XJXXX	/623XX	1.625	1.250	2.000-.1P -.2L-D.S.	2.281	2.750	8.750

$ SHELL SIZES ARE PROVIDED WITHIN PARENTHESES FOR INFORMATION AND ARE NOT A PART OF THE DESIGNATOR.

$ ASSEMBLY SHALL BE MADE UP OF A CONNECTOR AND A BACKSHELL OF THE SAME MATERIAL.

MATES WITH: MIL-C-28840/16, /17, /18, /19, /26, /28 AND /29.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, RECEPTACLE, CABLE CONNECTING ASSEMBLY, STRAIGHT CLASSES DJ AND DJS

MIL-C-28840/21

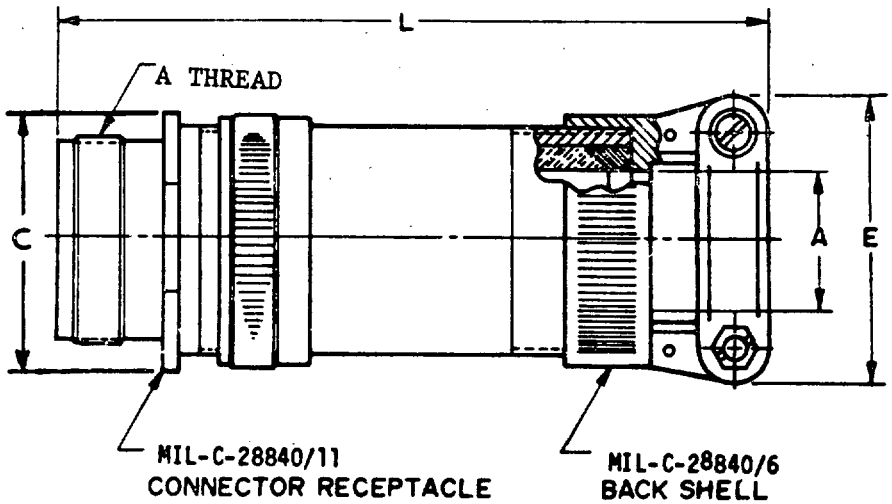


TABLE I. DIMENSIONS AND CONFIGURATION

DESIGNATOR #	ASSEMBLY NUMBER # M28840	CONNECTOR RECEPTACLE # M28840	BACKSHELL ASSEMBLY NO. # M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B	C DIA. MAX.	E MAX.	L MAX.
A (11)	/21XAXAXXX	/11XAXXX	/601XX	.312	.188	.750-.1P -.2L-D.S.	1.156	.938	6.625
A (11)	/21XAXBXXX	/11XAXXX	/624XX	.438	.281	.750-.1P -.2L-D.S.	1.156	1.125	6.625
A (11)	/21XAXCXXX	/11XAXXX	/625XX	.562	.344	.750-.1P -.2L-D.S.	1.218	1.312	6.625
B (13)	/21XBXBXXX	/11XBXXX	/603XX	.438	.281	.875-.1P -.2L-D.S.	1.156	1.125	6.625
B (13)	/21XBXCXXX	/11XBXXX	/626XX	.562	.344	.875-.1P -.2L-D.S.	1.281	1.312	6.625
B (13)	/21XBXDXXX	/11XBXXX	/627XX	.625	.375	.875-.1P -.2L-D.S.	1.406	1.312	7.125
C (15)	/21XCXAXXX	/11XCXXX	/605XX	.438	.281	1.062-.1P -.2L-D.S.	1.218	1.125	6.625
C (15)	/21XCXBXXX	/11XCXXX	/606XX	.562	.344	1.062-.1P -.2L-D.S.	1.218	1.312	6.625
C (15)	/21XCXCXXX	/11XCXXX	/628XX	.625	.375	1.062-.1P -.2L-D.S.	1.406	1.312	7.125
C (15)	/21XCXDXXX	/11XCXXX	/607XX	.750	.438	1.062-.1P -.2L-D.S.	1.406	1.593	7.188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, RECEPTACLE, CABLE CONNECTING ASSEMBLY, STRAIGHT CLASSES DJ AND DJS

MIL-C-28840/21

TABLE I. DIMENSIONS AND CONFIGURATION

DESIGNATOR #	ASSEMBLY NUMBER $ M28840	CONNECTOR RECEPTACLE $ M28840	BACKSHELL ASSEMBLY NO. $ M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B	C DIA. MAX.	E MAX.	L MAX.
D (17)	/21XDXAXXX	/11XDXXX	/608XX	.625	.375	1.125-.1P -.2L-D.S.	1.406	1.312	7.125
D (17)	/21XDXBXXX	/11XDXXX	/609XX	.750	.438	1.125-.1P -.2L-D.S.	1.406	1.593	7.188
E (19)	/21XEXAXXX	/11XEXXX	/611XX	.625	.375	1.312-.1P -.2L-D.S.	1.531	1.312	7.125
E (19)	/21XEXBXXX	/11XEXXX	/612XX	.938	.625	1.312-.1P -.2L-D.S.	1.531	1.750	7.250
F (23)	/21XFXAXXX	/11XFXXX	/613XX	.750	.438	1.500-.1P -.2L-D.S.	1.656	1.593	7.688
F (23)	/21XFXBXXX	/11XFXXX	/614XX	.938	.625	1.500-.1P -.2L-D.S.	1.656	1.750	7.812
F (23)	/21XFXCXXX	/11XFXXX	/615XX	1.188	.812	1.500-.1P -.2L-D.S.	1.656	2.093	7.938
G (25)	/21XGXAXXX	/11XGXXX	/616XX	.938	.625	1.625-.1P -.2L-D.S.	1.781	1.750	7.750
G (25)	/21XGXBXXX	/11XGXXX	/617XX	1.188	.812	1.625-.1P -.2L-D.S.	1.781	2.093	8.438
G (25)	/21XGXCXXX	/11XGXXX	/618XX	1.250	.875	1.625-.1P -.2L-D.S.	1.781	2.093	8.438
G (25)	/10XGXDXXX	/11XGXXX	/619XX	1.380	1.000	1.625-.1P -.2L-D.S.	2.156	2.343	8.500
H (29)	/21XHXAXXX	/11XHXXX	/629XX	1.188	.812	1.812-.1P -.2L-D.S.	2.156	2.093	8.438
H (29)	/21XHXBXXX	/11XHXXX	/621XX	1.380	1.000	1.812-.1P -.2L-D.S.	2.156	2.343	8.500
J (33)	/21XJXAXXX	/11XJXXX	/622XX	1.380	1.000	2.000-.1P -.2L-D.S.	2.281	2.343	8.500
J (33)	/21XJXBXXX	/11XJXXX	/623XX	1.625	1.250	2.000-.1P -.2L-D.S.	2.281	2.750	8.750

SHELL SIZES ARE PROVIDED WITHIN PARENTHESES FOR INFORMATION AND ARE NOT A PART OF THE DESIGNATOR.

$ ASSEMBLY SHALL BE MADE UP OF A CONNECTOR AND A BACKSHELL OF THE SAME MATERIAL.

MATES WITH: MIL-C-28840/16, /17, /18, /19, /26, /28 AND /29.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG ASSEMBLY, STRAIGHT CLASSES DJ AND DJS

MIL-C-28840/26

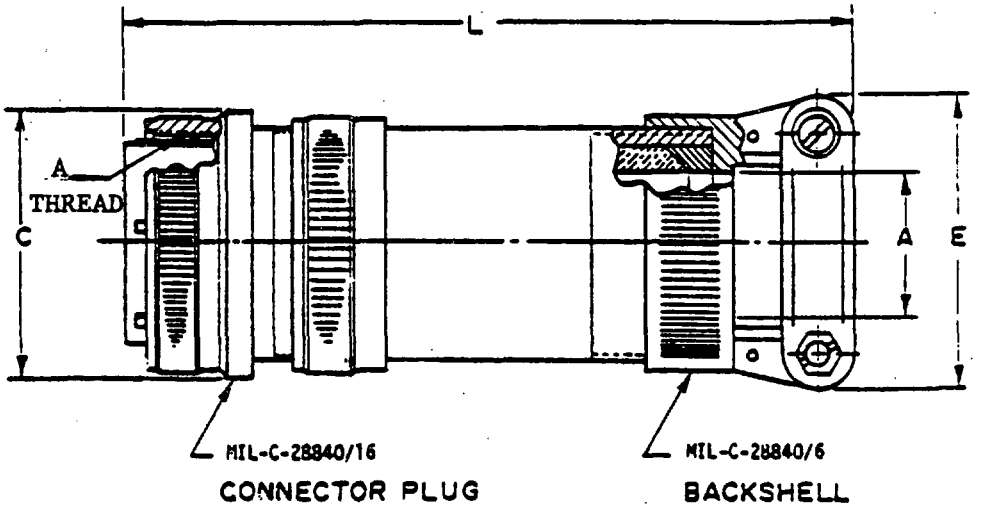


TABLE I. DIMENSIONS AND CONFIGURATION

DESIGNATOR #	ASSEMBLY NUMBER # M28840	CONNECTOR RECEPTACLE # M28840	BACKSHELL ASSEMBLY NO. # M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B	C DIA. MAX.	E MAX.	L MAX.
A (11)	/26XAXAXXX	/16XAXXX	/601XX	.312	.188	.750-.1P -.2L-D.S.	1.156	.938	6.500
A (11)	/26XAXBXXX	/16XAXXX	/624XX	.438	.281	.750-.1P -.2L-D.S.	1.156	1.125	6.500
A (11)	/26XAXCXXX	/16XAXXX	/625XX	.562	.344	.750-.1P -.2L-D.S.	1.281	1.312	6.500
B (13)	/26XBXBXXX	/16XBXXX	/603XX	.438	.281	.875-.1P -.2L-D.S.	1.156	1.125	6.500
B (13)	/26XBXCXXX	/16XBXXX	/626XX	.562	.344	.875-.1P -.2L-D.S.	1.281	1.312	6.500
B (13)	/26XBXDXXX	/16XBXXX	/627XX	.625	.375	.875-.1P -.2L-D.S.	1.406	1.312	7.000
C (15)	/26XCXAXXX	/16XCXXX	/605XX	.438	.281	1.062-.1P -.2L-D.S.	1.281	1.125	6.500
C (15)	/26XCXBXXX	/16XCXXX	/606XX	.562	.344	1.062-.1P -.2L-D.S.	1.281	1.312	6.500
C (15)	/26XCXCXXX	/16XCXXX	/628XX	.625	.375	1.062-.1P -.2L-D.S.	1.406	1.312	7.000
C (15)	/26XCXDXXX	/16XCXXX	/607XX	.750	.438	1.062-.1P -.2L-D.S.	1.406	1.593	7.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG ASSEMBLY, STRAIGHT CLASSES DJ AND DJS

MIL-C-28840/26

TABLE I. DIMENSIONS AND CONFIGURATION

DESIGNATOR #	ASSEMBLY NUMBER $ M28840	CONNECTOR RECEPTACLE $ M28840	BACKSHELL ASSEMBLY NO. $ M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B	C DIA. MAX.	E MAX.	L MAX.
D (17)	/26XDXAXXX	/16XDXXX	/608XX	.625	.375	1.125-.1P -.2L-D.S.	1.406	1.312	7.000
D (17)	/26XDXBXXX	/16XDXXX	/609XX	.750	.438	1.125-.1P -.2L-D.S.	1.406	1.593	7.000
E (19)	/26XEXAXXX	/16XEXXX	/611XX	.625	.375	1.312-.1P -.2L-D.S.	1.531	1.321	7.000
E (19)	/26XEXBXXX	/16XEXXX	/612XX	.938	.625	1.312-.1P -.2L-D.S.	1.531	1.750	7.000
F (23)	/26XFXAXXX	/16XFXXX	/613XX	.750	.438	1.500-.1P -.2L-D.S.	1.656	1.593	7.500
F (23)	/26XFXBXXX	/16XFXXX	/614XX	.938	.625	1.500-.1P -.2L-D.S.	1.656	1.750	7.625
F (23)	/26XFXCXXX	/16XFXXX	/615XX	1.188	.812	1.500-.1P -.2L-D.S.	1.656	2.093	7.8[illegible]
G (25)	/26XGXAXXX	/16XAXXX	/616XX	.938	.625	1.625-.1P -.2L-D.S.	1.781	1.750	7.625
G (25)	/26XGXBXXX	/16XGXXX	/617XX	1.188	.812	1.625-.1P -.2L-D.S.	1.781	2.093	8.312
G (25)	/26XGXCXXX	/16XGXXX	/618XX	1.250	.875	1.625-.1P -.2L-D.S.	1.781	2.093	8.312
G (25)	/26XGXDXXX	/16XGXXX	/619XX	1.380	1.000	1.625-.1P -.2L-D.S	2.156	2.343	8.312
H (29)	/26XHXAXXX	/16XHXXX	/620XX	1.188	.812	1.812-.1P -.2L-D.S.	2.156	2.093	8.312
H (29)	/26XHXBXXX	/16XHXXX	/621XX	1.380	1.000	1.812-.1P -.2L-D.S.	2.156	2.343	8.312
J (33)	/26XJXAXXX	/16XJXXX	/622XX	1.380	1.000	2.000-.1P -.2L-D.S.	2.281	2.343	8.312
J (33)	/26XHXBXXX	/16XJXXX	/623XX	1.625	1.250	2.000-.1P -.2L-D.S.	2.281	2.750	8.625

SHELL SIZES ARE PROVIDED WITHIN PARENTHESES FOR INFORMATION AND ARE NOT A PART OF THE DESIGNATOR.


$ ASSEMBLY SHALL BE MADE UP OF A CONNECTOR AND A BACKSHELL OF THE SAME MATERIAL.

MATES WITH: MIL-C-28840/10, /11, /12, /14, /20 AND /21.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ASSEMBLY, 90 , CLASSES DJ AND DJS

MIL-C-28840/28

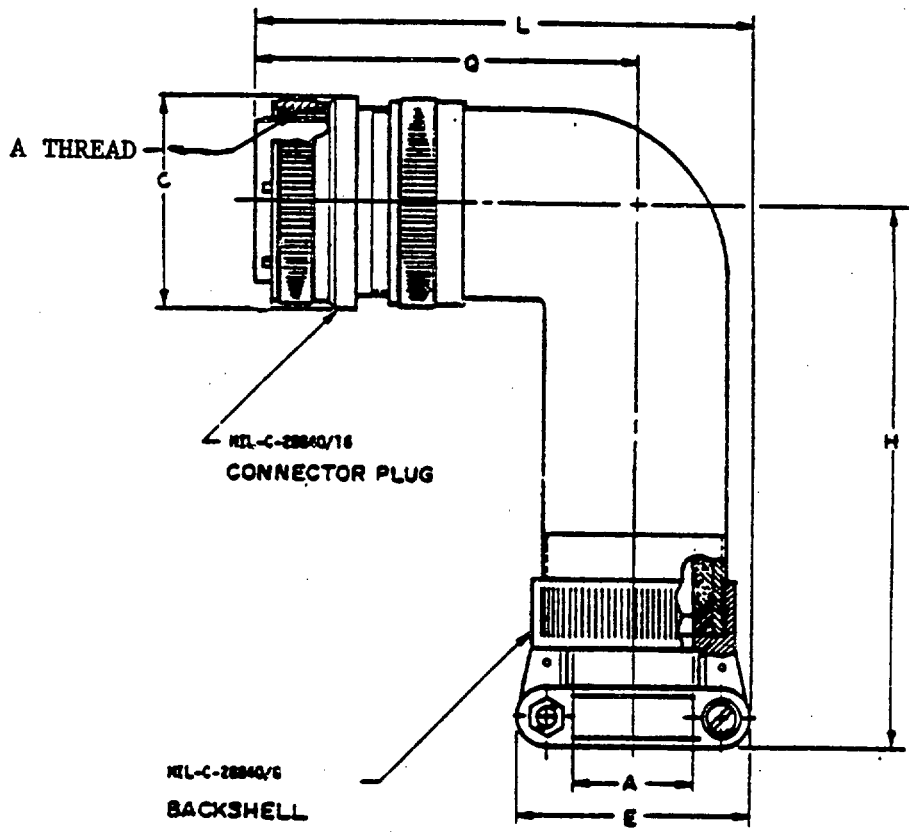

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ASSEMBLY, 90, CLASSES DJ AND DJS

MIL-C-28840/28

TABLE I. DIMENSIONS AND CONFIGURATION

DESIGNATOR #	ASSEMBLY NUMBER # M28840	CONNECTOR RECEPTACLE # M28840	BACKSHELL ASSEMBLY NO. # M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B	C DIA. MAX.	E MAX.
A (11)	/28XAXAXXX	/16XAXXX	/801XX	.312	.188	.750-.1P -.2L-D.S.	1.031	.938
A (11)	/28XAXBXXX	/16XAXXX	/824XX	.438	.281	.750-.1P -.2L-D.S.	1.031	1.125
A (11)	/28XAXCXXX	/16XAXXX	/825XX	.562	.344	.750-.1P -.2L-D.S.	1.281	1.312
B (13)	/28XBXBXXX	/16XBXXX	/803XX	.438	.281	.875-.1P -.2L-D.S.	1.031	1.125
B (13)	/28XBXCXXX	/16XBXXX	/826XX	.562	.344	.875-.1P -.2L-D.S.	1.281	1.312
B (13)	/28XBXDXXX	/16XBXXX	/827XX	.625	.375	.875-.1P -.2L-D.S	1.531	1.312
C (15)	/28XCXAXXX	/16XCXXX	/805XX	.438	.281	1.062-.1P -.2L-D.S.	1.218	1.125
C (15)	/28XCXBXXX	/16XCXXX	/806XX	.562	.344	1.062-.1P -.2L-D.S.	1.281	1.312
C (15)	/28XCXCXXX	/16XCXXX	/828XX	.625	.375	1.062-.1P -.2L-D.S.	1.531	1.312
C (15)	/28XCXDXXX	/16XCXXX	/807XX	.750	.438	1.062-.1P -.2L-D.S.	1.531	1.593
D (17)	/28XDXAXXX	/16XDXXX	/808XX	.625	.375	1.125-.1P -.2L-D.S.	1.531	1.312
D (17)	/28XDXBXXX	/16XDXX	/809XX	.750	.438	1.125-.1P -.2L-D.S.	1.531	1.593
E (19)	/28XEXAXXX	/16XEXXX	/811XX	.625	.375	1.312-.1P -.2L-D.S.	1.531	1.312
E (19)	/28XEXBXXX	/16XEXXX	/812XX	.938	.625	1.312-.1P -.2L-D.S.	1.781	1.750

DESIGNATOR #	H MAX.	L MAX.	Q MAX.
A (11)	3.125	3.812	3.250
A (11)	3.125	3.812	3.250
A (11)	3.250	4.000	3.375
B (13)	3.125	3.812	3.250
B (13)	3.250	4.000	3.375
B (13)	3.375	4.250	3.500
C (15)	3.250	4.000	3.375
C (15)	3.250	4.000	3.375
C (15)	3.375	4.250	3.500
C (15)	3.438	4.125	3.500
D (17)	3.375	4.250	3.500
D (17)	3.438	4.250	3.500
E (19)	3.375	4.250	3.500
E (19)	3.625	4.375	3.625

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, ASSEMBLY, 90, CLASSES DJ AND DJS

MIL-C-28840/28

TABLE I. DIMENSIONS AND CONFIGURATION (CONTINUED)

DESIGNATOR #	ASSEMBLY NUMBER $ M28840	CONNECTOR RECEPTACLE $ M28840	BACKSHELL ASSEMBLY NO. $ M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B	C DIA. MAX.	E MAX.
F (23)	/28XFXAXXX	/16XFXXX	/813XX	.750	.438	1.500-.1P -.2L-D.S.	1.781	1.593
F (23)	/28XFXBXXX	/16XFXXX	/814XX	.938	.625	1.500-.1P -.2L-D.S.	1.781	1.750
F (23)	/28XFXCXXX	/16XFXXX	/815XX	1.188	.812	1.500-.1P -.2L-D.S.	1.781	2.093
G (25)	/28XGXAXXX	/16XGXXX	/816XX	.938	.625	1.625-.1P -.2L-D.S.	1.781	1.750
G (25)	/28XCXBXXX	/16XGXXX	/817XX	1.188	.812	1.625-.1P -.2L-D.S.	1.781	2.093
G (25)	/28XGXCXXX	/16XGXXX	/818XX	1.250	.875	1.625-.1P -.2L-D.S	2.031	2.093
G (25)	/28XGXDXXX	/16XGXXX	/819XX	1.380	1.000	1.625-.1P -.2L-D.S.	2.031	2.343
H (29)	/28XHXAXXX	/16XHXXX	/820XX	1.188	.812	1.812-.1P -.2L-D.S.	2.031	2.093
H (29)	/28XHXBXXX	/16XHXXX	/821XX	1.380	1.000	1.812-.1P -.2L-D.S.	2.031	2.343
J (33)	/28XJXAXXX	/16XJXXX	/822XX	1.380	1.000	2.000-.1P -.2L-D.S.	2.531	2.343
J (33)	/28XJXBXXX	/16XJXXX	/823XX	1.625	1.250	2.000-.1P -.2L-D.S.	2.531	2.750

DESIGNATOR #	H MAX.	L MAX.	Q MAX.
F (23)	3.562	4.500	3.625
F (23)	3.688	4.500	3.625
F (23)	3.875	4.688	3.625
G (25)	3.625	4.500	3.625
G (25)	3.812	4.688	3.625
G (25)	3.938	4.688	3.750
G (25)	4.000	4.938	3.750
H (29)	3.938	4.812	3.750
H (29)	4.000	4.938	3.750
J (33)	4.250	5.188	4.000
J (33)	4.500	5.375	4.000

MATES WITH: MIL-C-28840/10, /11, /12, /14, /20 AND /21.


1/ SHELL SIZES ARE PROVIDED WITHIN PARENTHESES FOR INFORMATION AND ARE NOT A PART OF THE DESIGNATOR.

2/ ASSEMBLY SHALL BE MADE UP OF A CONNECTOR AND A BACKSHELL OF THE SAME MATERIAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ASSEMBLY, 45 , CLASSES DJ AND DJS

MIL-C-28840/29

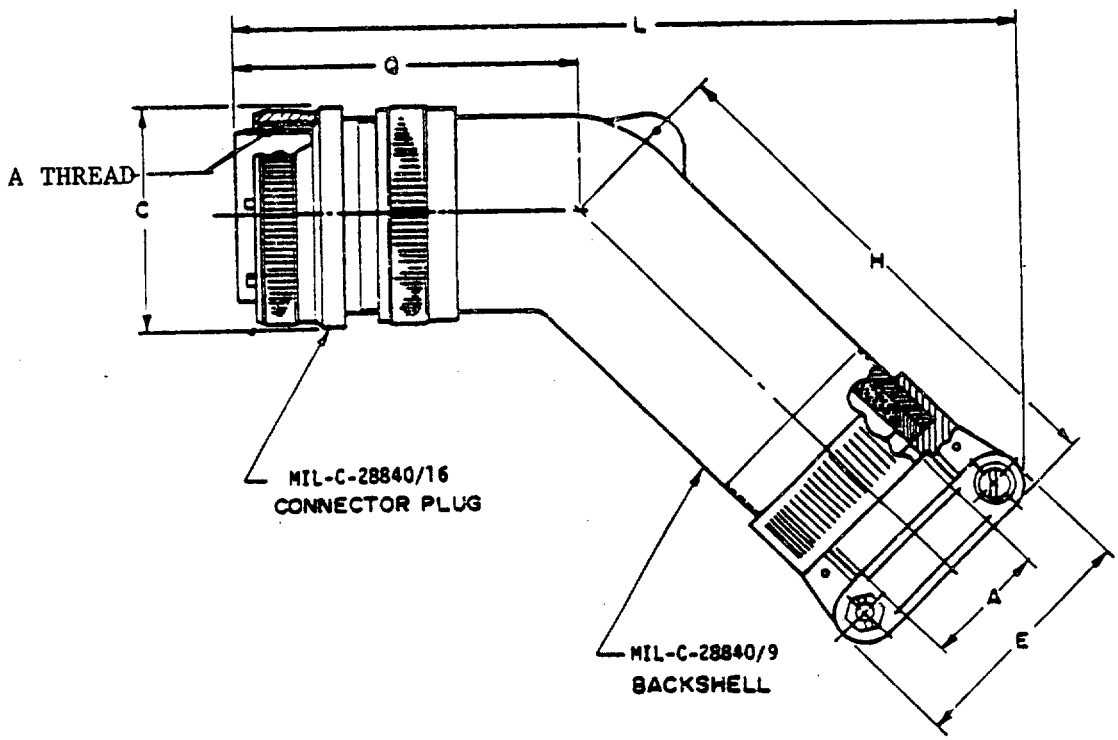

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ASSEMBLY, 45 , CLASSES DJ AND DJS

MIL-C-28840/29

TABLE I. DIMENSIONS AND CONFIGURATION

DESIGNATOR #	ASSEMBLY NUMBER # M28840	CONNECTOR RECEPTACLE # M28840	BACKSHELL ASSEMBLY NO. # M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B.	C DIA. MAX.	E MAX.
A (11)	/29XAXAXXX	/16XAXXX	/901XX	.312	.188	.750-.1P -.2L-D.S.	1.1031	.938
A (11)	/29XAXBXXX	/16XA/XXX	/924XX	.438	.281	.750-.1P -.2L-D.S.	1.031	1.125
A (11)	/29XAXCXXX	/16XAXXX	/925XX	.562	.344	.750-.1P -.2L-D.S.	1.281	1.312
B (13)	/29XBXBXXX	/16XBXXX	/903XX	.438	.281	.875-.1P -.2L-D.S.	1.031	1.125
B (13)	/29XBXCXXX	/16XBXXX	/926XX	.562	.344	.875-.1P -.2L-D.S.	1.281	1.312
B (13)	/29XBXDXXX	/16XBXXX	/927XX	.625	.375	.875-.1P -.2L-D.S	1.531	1.312
C (15)	/29XCXAXXX	/16XCXXX	/905XX	.438	.281	1.062-.1P -.2L-D.S.	1.281	1.125
C (15)	/29XCXBXXX	/16XCXXX	/906XX	.562	.344	1.062-.1P -.2L-D.S.	1.281	1.312
C (15)	/29XCXCXXX	/16XCXXX	/928XX	.625	.375	1.062-.1P -.2L-D.S.	1.531	1.312
C (15)	/29XCXDXXX	/16XCXXX	/907XX	.750	.438	1.062-.1P -.2L-D.S.	1.531	1.593
D (17)	/29XDXAXXX	/16XDXXX	/908XX	.625	.375	1.125-.1P -.2L-D.S.	1.531	1.312
D (17)	/29XDXBXXX	/16XDXXX	/909XX	.750	.438	1.125-.1P -.2L-D.S.	1.531	1.593
E (19)	/29XEXAXXX	/16XEXXX	/911XX	.625	.375	1.312-.1P -.2L-D.S.	1.531	1.312
E (19)	/29XEXBXXX	/16XEXXX	/912XX	.938	.625	1.312-.1P -.2L-D.S.	1.781	1.750
F (23)	/29XFXAXXX	/16XFXXX	/913XX	.750	.438	1.500-.1P -.2L-D.S.	1.781	1.593

DESIGNATOR #	H	L	G
A	3.125	6.750	3.250
A	3.125	6.750	3.250
A	3.250	7.000	3.375
B	3.125	6.750	3.250
B	3.250	7.000	3.375
B	3.375	7.250	3.500
C	3.250	7.000	3.375
C	3.250	7.000	3.375
C	3.375	7.250	3.500
C	3.438	7.062	3.500
D	3.375	7.250	3.500
D	3.438	7.812	3.500
E	3.375	7.250	3.500
E	3.625	7.875	3.625
F	3.562	8.312	3.625

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, RECEPTACLE, CABLE CONNECTING ASSEMBLY, STRAIGHT CLASSES DJ AND DJS

MIL-C-28840/29

TABLE I. DIMENSIONS AND CONFIGURATION (CONTINUED)

DESIGNATOR #	ASSEMBLY NUMBER $ M28840	CONNECTOR RECEPTACLE $ M28840	BACKSHELL ASSEMBLY NO. $ M28840	F CABLE ENTRY MAX.	F CABLE ENTRY MIN.	A THREAD CLASS 2B	C DIA. MAX.	E MAX.
F (23)	/29XFXBXXX	/16XFXXX	/914XX	.938	.625	1.500-.1P -.2L-D.S.	1.781	1.750
F (23)	/29XFXCXXX	/16XFXXX	/915XX	1.188	.812	1.500-.1P -.2L-D.S.	1.781	2.093
G (25)	/29XCXAXXX	/16XGXXX	/916XX	.938	625	1.625-.1P -.2L-D.S.	1.781	1.750
G (25)	/29XCXBXXX	/16XGXXX	/917XX	1.188	.812	1.625-.1P -.2L-D.S.	1.781	2.093
G (25)	/29XGXCXXX	/16XGXXX	/918XX	1.250	.875	1.625-.1P -.2L-D.S.	2.031	2.093
G (25)	/29XGXDXXX	/16XGXXX	/919XX	1.380	1.000	1.625-.1P -.2L-D.S	2.031	2.343
H (29)	/29XHXAXXX	/16XHXXX	/920XX	1.188	.812	1.812-.1P -.2L-D.S.	2.031	2.093
H (29)	/29XHXBXXX	/16XHXXX	/921XX	1.380	1.000	1.812-.1P -.2L-D.S.	2.031	2.343
J (33)	/29XJXAXXX	/16XJXXX	/922XX	1.380	1.000	2.000-.1P -.2L-D.S.	2.531	2.343
J 33)	/29XJXBXXX	/16XJXXX	/923XX	1.625	1.250	2.000-.1P -.2L-D.S.	2.531	2.750

DESIGNATOR #	H MAX.	L MAX.	Q MAX.
F	3.625	8.375	3.625
F	3.750	8.500	3.625
G	3.625	8.375	3.625
G	3.812	8.500	3.625
G	3.938	8.500	3.750
G	4.000	9.000	3.750
H	3.938	9.000	3.750
H	4.000	9.000	3.750
J	4.250	10.000	4.000
J	4.500	10.188	4.000

MATES WITH: MIL-C-28840/10, /11, /12, /14, /20 AND /21.

SHELL SIZES ARE PROVIDED WITHIN PARENTHESES FOR INFORMATION AND ARE NOT A PART OF THE DESIGNATOR.

$ ASSEMBLY SHALL BE MADE UP OF A CONNECTOR AND A BACKSHELL OF THE SAME MATERIAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-26840

CONNECTOR, INSERT ARRANGEMENTS

MIL-STD-1698


SHELL		ARRANGEMENT NUMBER	CONTACTS		SERVICE RATING	CONTACT LOCATION
SIZE DESIGNATOR	SIZE		NO. OF	SIZE OF		
A	11	1	7	20	A	ALL
B	13	1	12	20	A	ALL
C	15	1	21	20	A	ALL
D	17	1	31	20	A	ALL
E	19	1	42	20	A	ALL
F	23	1	64	20	A	ALL
G	25	1	92	20	A	ALL
H	29	1	121	20	A	ALL
J	33	1	155	20	A	ALL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-28840

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1698

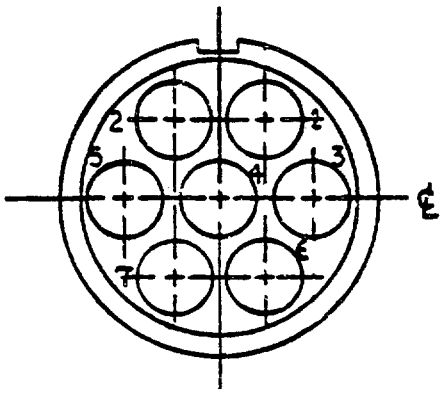


11-1

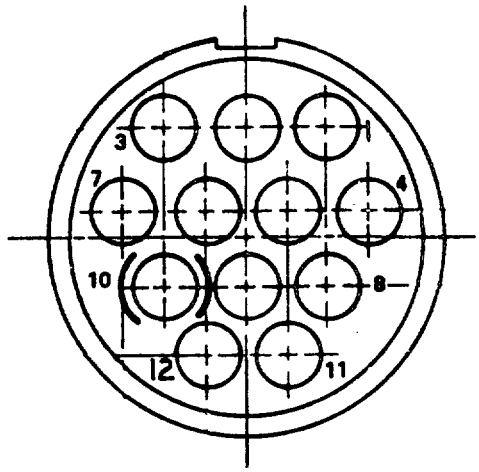

13-1

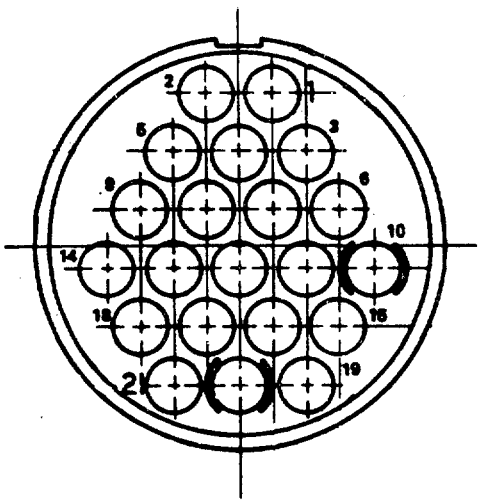

15-1

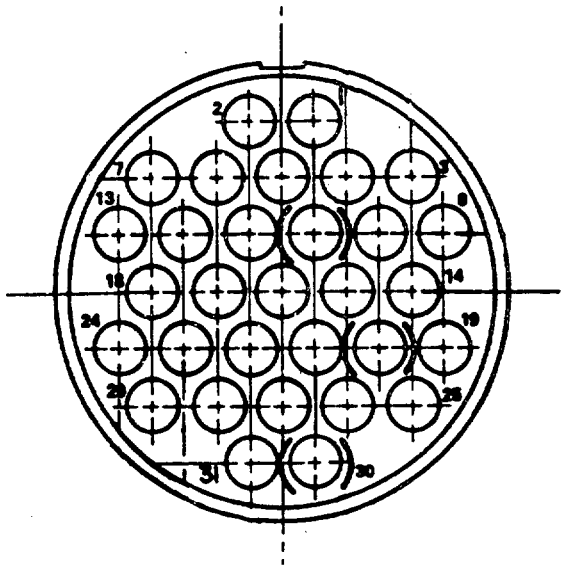


17-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-28840

CONNECTOR, INSERT ARRANGEMENTS

MIL-STD-1698

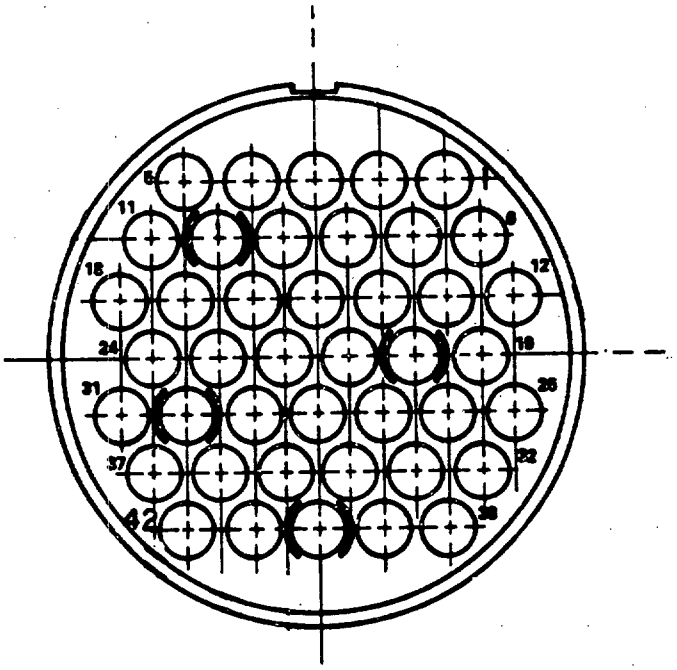

19-1

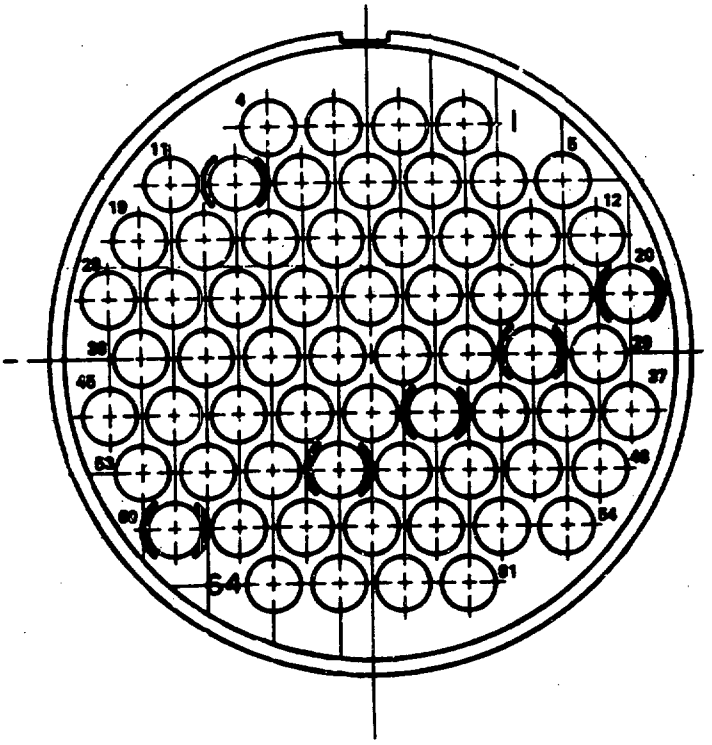


23-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-28840

CONNECTOR, INSERT ARRANGEMENTS

MIL-STD-1698

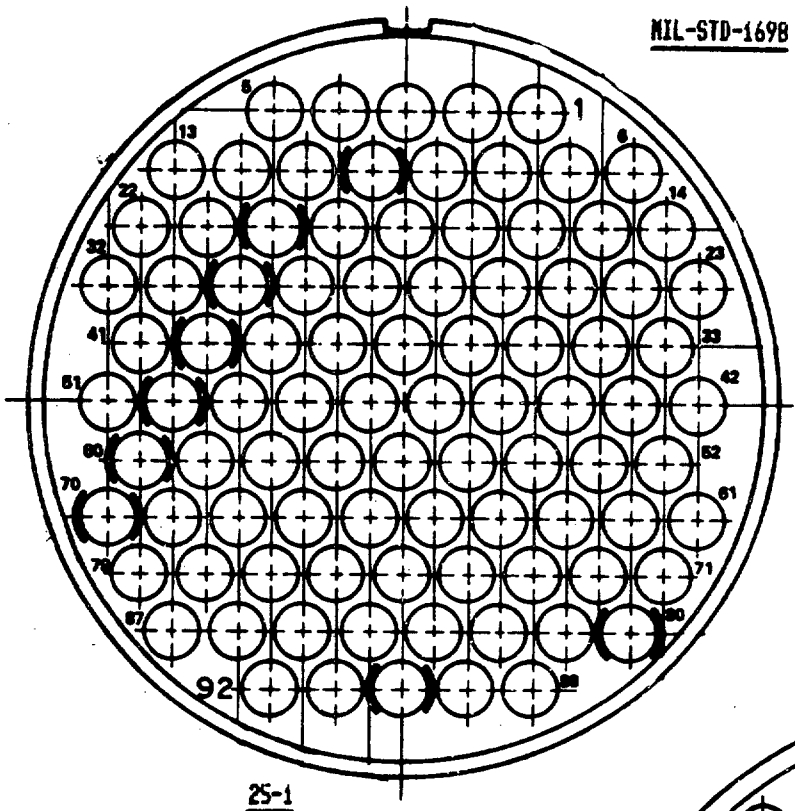

25-1

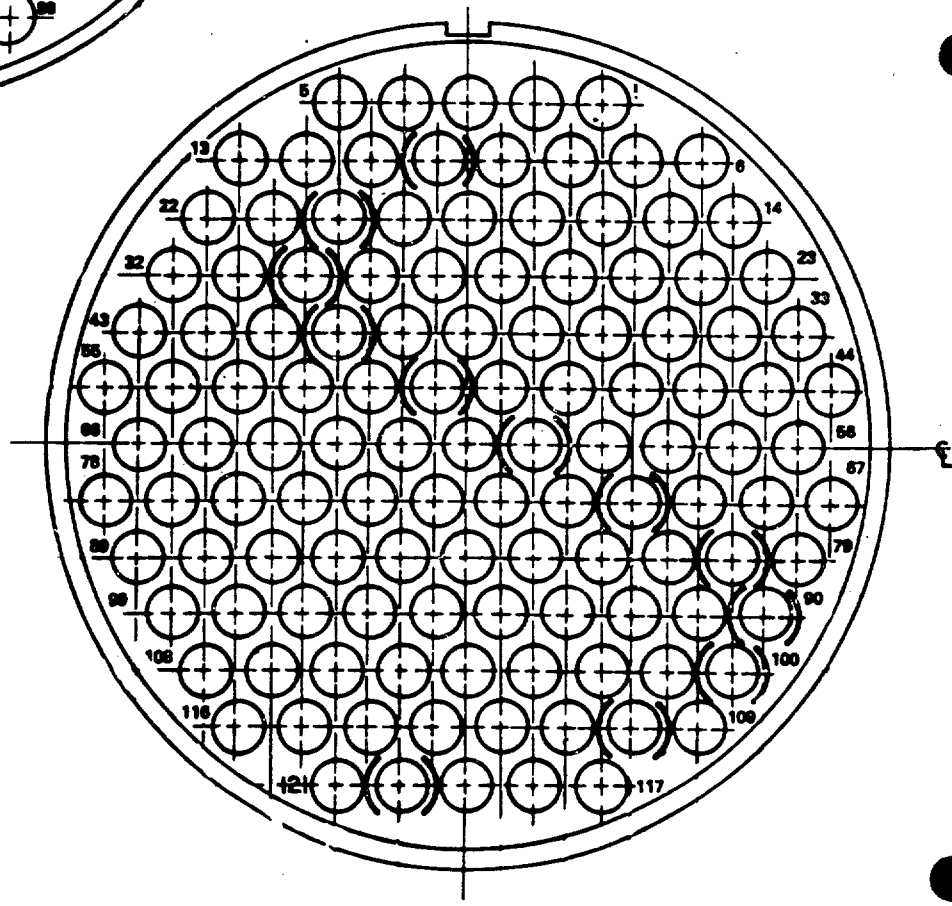


29-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-28840

CONNECTOR, INSERT ARRANGEMENTS

MIL-STD-1698

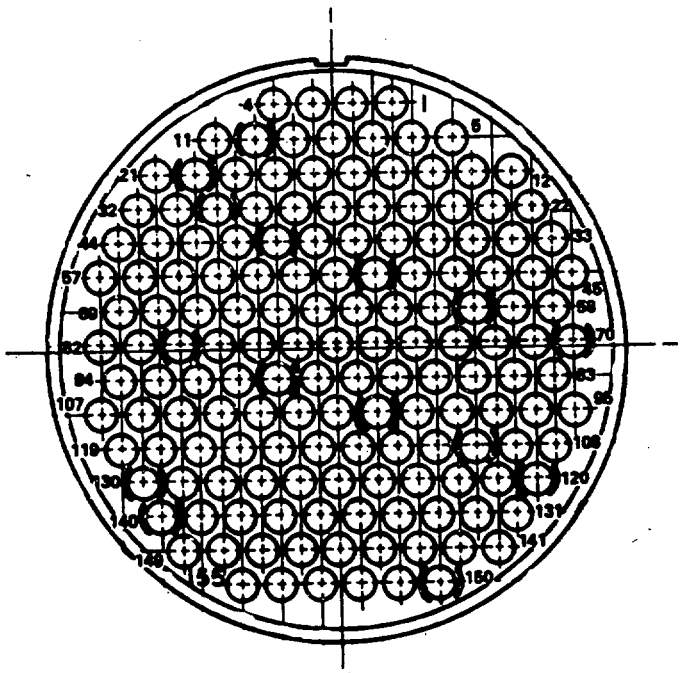

33-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL CIRCULAR, MINIATURE, HIGH DENSITY 2 WICK DISCONNECT (BAYONET, THREADED AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS

MIL-C-38999

SCOPE: THIS SECTION COVERS SERIES I, III AND IV OF MINIATURE, HIGH DENSI BAYONET, THREADED, OR BREECH COUPLING, CIRCULAR, ENVIRONMENT RESISTANT, ELECTRICAL CONNECTORS USING REMOVABLE CRIMP OR FIXED HERMETIC SOLDER CONTACTS, AND ARE CAPABLE OF CONTINUOUS OPERATION WITHIN A TEMPERATURE RANGE OF -65°C TO +150°C. THE INTENDED USE FOR SERIES III AND IV CONNECTORS ARE GENERAL APPLICATION WITHIN WEAPONS SYSTEMS AND ARE SUITABLE FOR BLIND MATING AREAS. THESE CONNECTORS PROVIDE HIGH-VIBRATION CHARACTERISTICS AT ELEVATED TEMPERATURE AND ARE SUITABLE FOR SWAMP AREAS WITH THE PROPER CONNECTOR ACCESSORIES.

CLASS Y - HERMETICALLY SEALED (MS27469, MS27470, MS27471)
CLASS T - ENVIRONMENTAL RESISTING (MS27466, MS27467, MS27468 AND MS27656)
CLASS E - ENVIRONMENTAL RESISTING(MS27496 AND MS27505)

INSERT ARRANGEMENT: MIL-STD-1560, PAGE 146.27

PART NUMBER EXAMPLE: MS27467 T 13 B 35 P N

- MS NUMBER — MS27467
- CLASS — T
- SHELL SIZE — 13
- FINISH (D - CLASS Y ONLY) — B
- INSERT ARRANGEMENT NO. — 35
- CONTACT STYLE — P
- POLARIZING POSITION (NO LETTER IS REQUIRED FOR NORMAL POSITION) — N

PART NUMBER EXAMPLE: D38999/ 20 F A 35 P N


- DOD NO. PREFIX — D38999/
- SPECIFICATION SHEET NO. — 20
- CLASS — F
- SHELL SIZE CODE — A
- INSERT ARRANGEMENT — 35
- CONTACT STYLE — P
- POLARIZING POSITION (N IS REQUIRED FOR NORMAL POSITION) — N

NOTE: NOT FOR SHIP BOARD JACKETED CABLE APPLICATION-- FOR HOOK UP WIRE APPLICATION ONLY
NOTE: DIMENSIONS ARE IN MILLIMETERS FOR ALL MIL-C-38999 CONNECTORS ENCLOSED IN THIS SECTION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT, (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, WALL MOUNTING FLANGE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

MIL-C-38999/20

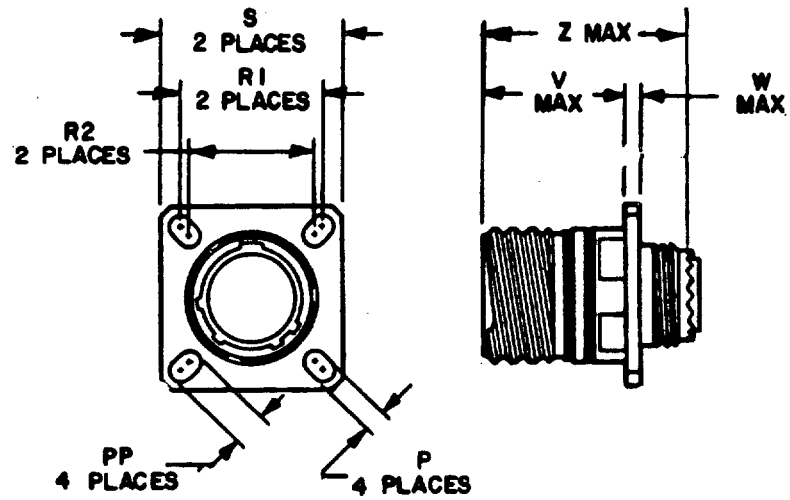

RECEPTACLES, CLASSES F, K AND W.

NOTE: FINISHES F AND N NOT FOR NAVY USE.

SHELL SIZE	SHELL SIZE CODE	P DIA	PP	R1 $	R2 #	S	V MAX	W MAX	Z MAX
11	B	3.25	4.93	20.62	18.26	26.2	20.9	2.5	31.5
13	C		4.93	23.01	20.62	28.6			
15	D		4.39	24.61	23.01	31.0			
17	E		4.93	26.97	24.61	33.3			
19	F		4.93	29.36	26.97	36.5			
21	G		4.93	31.75	29.36	39.7	20.1	3.2	
23	H	3.91	6.15	34.93	31.75	42.9			
25	J		6.15	38.10	34.93	46.0			


$ FRONT OR REAR PANEL MOUNTING.
FRONT PANEL MOUNTING ONLY.

MATES WITH: DOD-C-38999/26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, BOX MOUNTING FLANGE, HERMETIC, TRIPLE START THREADED COUPLING, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

MIL-C-38999/21

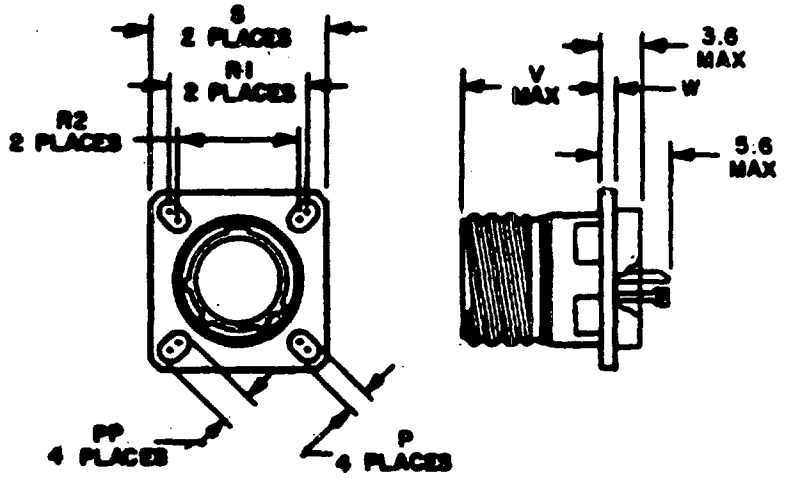

RECEPTACLE, CLASSES Y

SHELL SIZE	SHELL SIZE CODE	P DIA	PP DIA	R1 $	R2 $ #	S	V MAX	W MAX
11	B	3.25	4.93	20.62	18.26	26.2	21.4	2.5
13	C		4.93	23.01	20.62	28.6		
15	D		4.39	24.61	23.01	31.0		
17	E		4.93	26.97	24.61	33.3		
19	F		4.93	29.36	26.97	36.5		
21	G		4.93	31.75	29.36	39.7		
23	H	3.91	6.15	34.93	31.75	42.9		
25	J		6.15	38.10	34.93	46.0		


$ FRONT OR REAR PANEL MOUNTING.
FRONT PANEL MOUNTING ONLY.

MATES WITH: DOD-C-38999/26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, JAM-NUT MOUNTING, HERMETIC, TRIPLE START THREADED COUPLING, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

MIL-C-38999/23

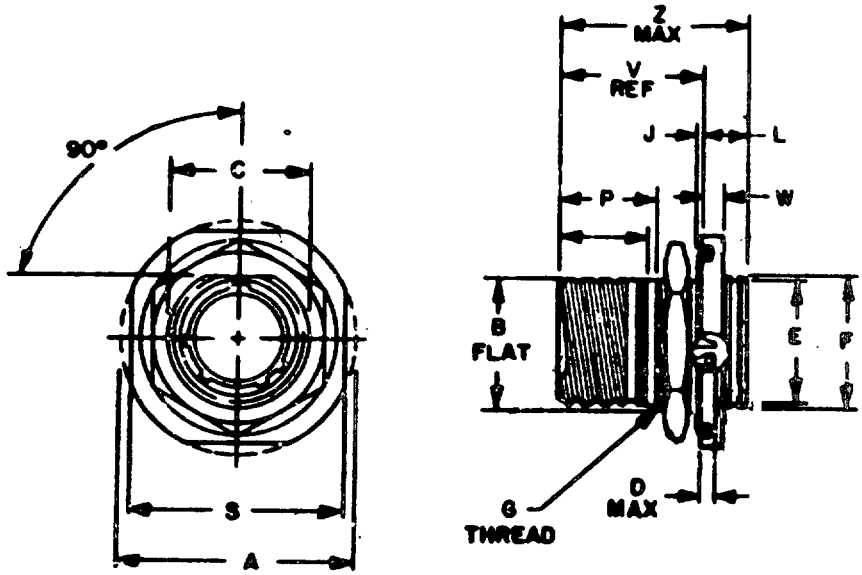

RECEPTACLES, CLASS Y

SHELL SIZE	SHELL SIZE CODE	A DIA	B FLAT	C DIA	C MAX		E DIA	F DIA	G THREAD	J MAX	L MAX	P	S	V REF	W	Z MAX
					WITH PIN	WITH SOCKET										
11	B	34.9	19.07	20.6	5.3	5.9	18.4	19.4	M20X1-6G 0.100R	1.5	9.1	14.1	31.8	22.1	2.6	29.2
13	C	38.1	23.82	25.4	5.1	5.7	21.6	22.7	M25			14.3	34.9	22.3		
15	D	41.3	26.97	28.5			24.8	25.9	M28				38.1			
17	E	44.5	30.15	---			28.0	29.0	M32	---			41.3			
19	F	49.2	33.32	---			31.2	32.2	M35	---	9.7		46.0		3.4	30.1
21	G	52.4	36.50	---			34.3	35.4	M38	---			49.2			
23	H	55.6	39.67	41.2			37.5	38.6	M41	1.5			52.4			
25	J	58.7	42.85	44.4			40.7	41.7	M44				55.6			


MATES WITH: DOD-C-38999/26.

EYELET CONTACT TERMINATION AVAILABLE IN SIZE 16 AND 20 ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, JAM-NUT MOUNTING, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

MIL-C-38999/24

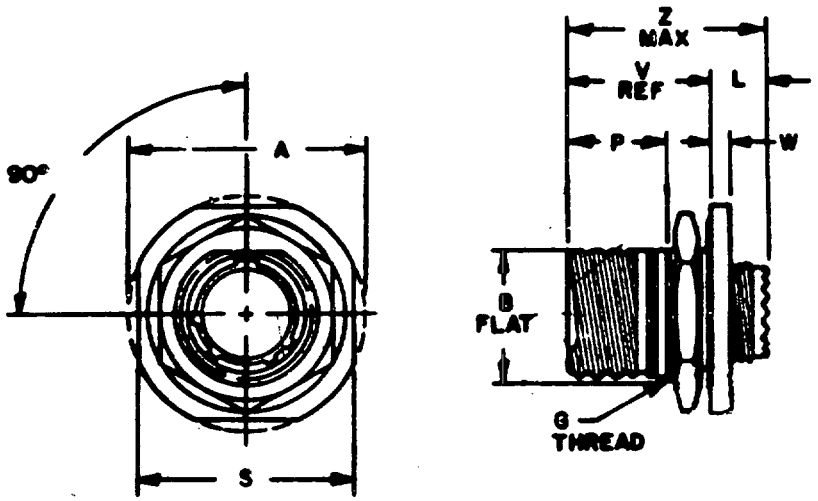

RECEPTACLE, CLASSES F, K, AND W


SHELL SIZE	SHELL SIZE	A DIA	B FLAT	C DIA	G THREAD	J MAX	L MAX	P	S	V REF	W	Z MAX	D	E
11	B	34.9	19.07	20.6	M20X1-6G 0.100R	1.5	9.5	14.1	31.8	16.5	2.6	26.0	.094	.045
13	C	38.1	23.82	25.4	M25		9.3	14.3	34.9	16.7				
15	D	41.3	26.97	28.5	M28				38.1					
17	E	44.5	30.15	---	M32	---			41.3					
19	F	49.2	33.32	---	M35	---			46.0		3.4			
21	G	52.4	36.50	---	M38	---			49.2				.141	.075
23	H	55.6	39.67	41.2	M41	1.5			52.4	17.5		26.8		
25	J	58.7	42.85	44.4	M44				55.6					

MATES WITH: DOD-C-38999/26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, SOLDER MOUNTING, HERMETIC, TRIPLE START THREADED COUPLING, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

MIL-C-38999/25

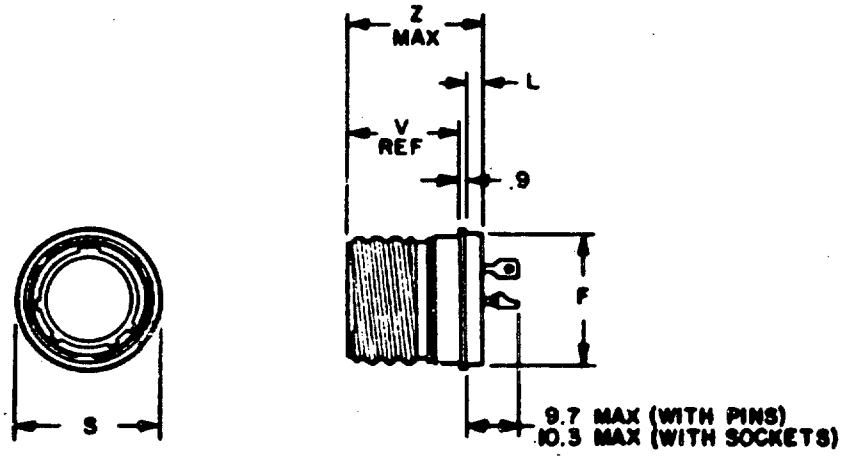

RECEPTACLE, CLASS Y


SHELL SIZE	SHELL SIZE CODE	F MAX	L MAX	S MAX	V WITH PINS	V WITH SOCKETS	Z MAX
11	B	19.9	5.1	21.8	17.2	19.4	23.8
13	C	23.1		24.9			
15	D	26.2		28.1			
17	E	29.4		31.3			
19	F	31.8		33.6			
21	G	35.0		36.8			
23	H	38.2	5.9	40.0			24.6
25	J	41.3		43.2			

MATES WITH: DOD-C-3899/26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, STRAIGHT, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

MIL-C-38999/26

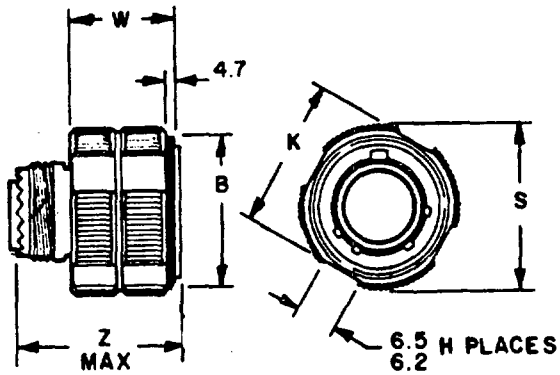

PLUG, CLASS K


SHELL SIZE	SHELL SIZE CODE	B	H NUMBER OF FLATS	K MAX	S DIA MAX	W	Z MAX
11	B	21.1	4	21.9	25.0	19.3	31.0
13	C	25.4	4	26.1	29.4		
15	D	28.7	4	29.3	32.5		
17	E	32.2	4	32.8	35.7		
19	F	34.9	8	35.5	38.5		
21	G	38.1	8	38.7	41.7		
23	H	41.1	8	41.7	44.9		
25	J	44.3	8	44.9	48.0		

MATES WITH: DOD-C-38999/20, /21, /23, /24, /25 AND /27

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, LANYARD RELEASE, FAIL-SAFE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, PINS, SERIES III, METRIC

MIL-C-38999/29

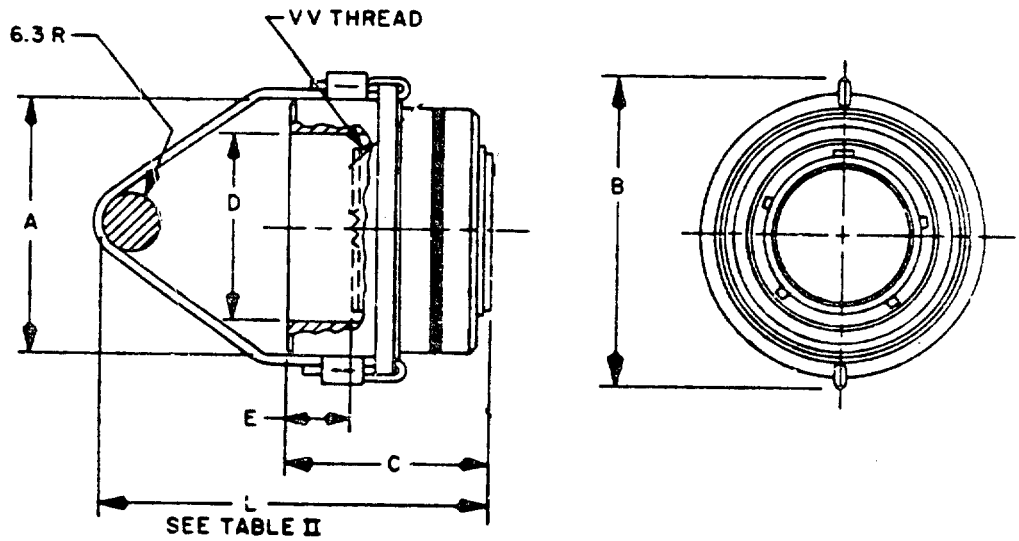

PLUG, CLASSES F AND W

SHELL SIZE	SHELL SIZE CODE	A MAX OVER KNURL	B MAX	C MAX	D MIN	E MAX	VV THREAD
17	E	46.1	56.0	46.1	29.8	21.0	M25x1.0-6G 0.100R
19	F	49.3	59.2	46.1	33.0	21.0	M28x1.0-6G 0.100R
25	J	58.4	68.7	46.1	42.5	21.0	M37X1.0-6G 0.100R

MATES WITH: DOD-C-38999/20, /21, /23, /24, /25 AND 27


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, LANYARD RELEASE, FAIL-SAFE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, PINS, SERIES III, METRIC

MIL-C-38999/29

TABLE II. LANYARD LENGTH CODES.


CODE	L	CODE	L
A	102	N	267
B	115		
C	127	P	280
D	140	R	293
E	153	S	305
F	166	T	318
G	178	U	331
H	191	V	356
I	203	W	381
J	216	X	407
K	229	Y	432
L	242	Z	458
M	254		

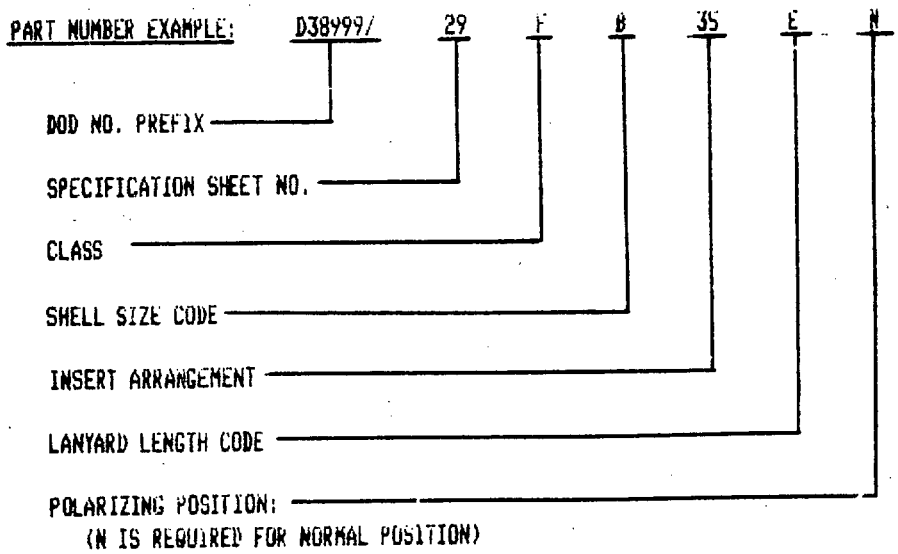

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, LANYARD RELEASE, FAIL-SAFE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SOCKETS, SERIES III, METRIC

MIL-C-38999/30

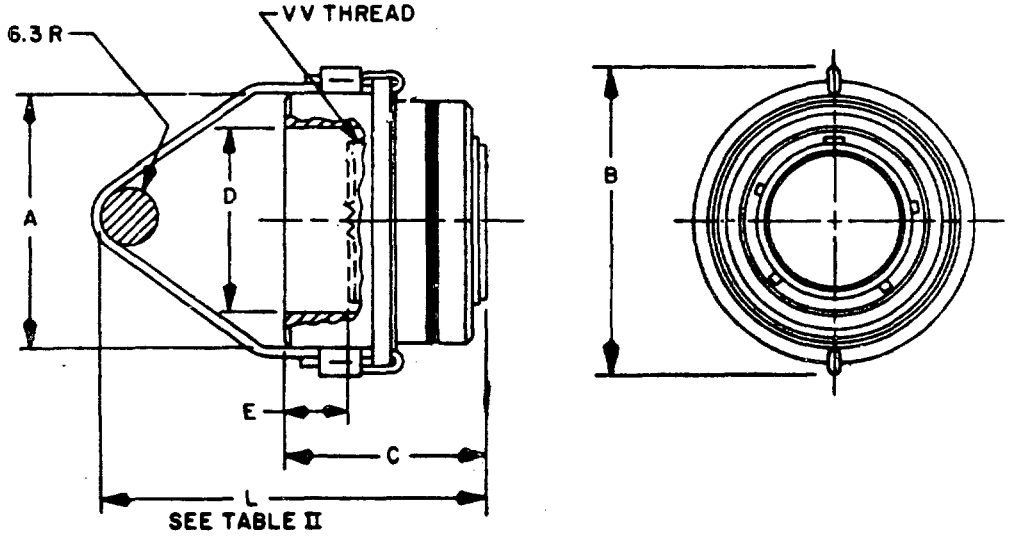

PLUG, CLASSES F AND W

SHELL SIZE	SHELL SIZE CODE	A MAX OVER KNURL	B MAX	C MAX	D MIN	E MAX	VV THREAD
17	E	46.1	56.0	46.1	29.8	21.0	M25x1.0-6G 0.100R
19	F	49.3	59.2	46.1	33.0	21.0	M28x1.0-6G 0.100R
25	J	58.4	68.7	46.1	42.5	21.0	M37x1.0-6G 0.100R

MATES WITH: DOD-C-38999/20, /21, /23, /24, /25 AND /27


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT, (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, LANYARD RELEASE, FAIL-SAFE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SOCKETS, SERIES III, METRIC

MIL-C-38999/30

TABLE II. LANYARD LENGTH CODES.


CODE	L	CODE	L
A	102	N	267
B	115		
C	127	P	280
D	140	R	293
E	153	S	305
F	166	T	318
G	178	U	331
H	191	V	356
I	203	W	381
J	216	X	407
K	229	Y	432
L	242	Z	458
M	254		

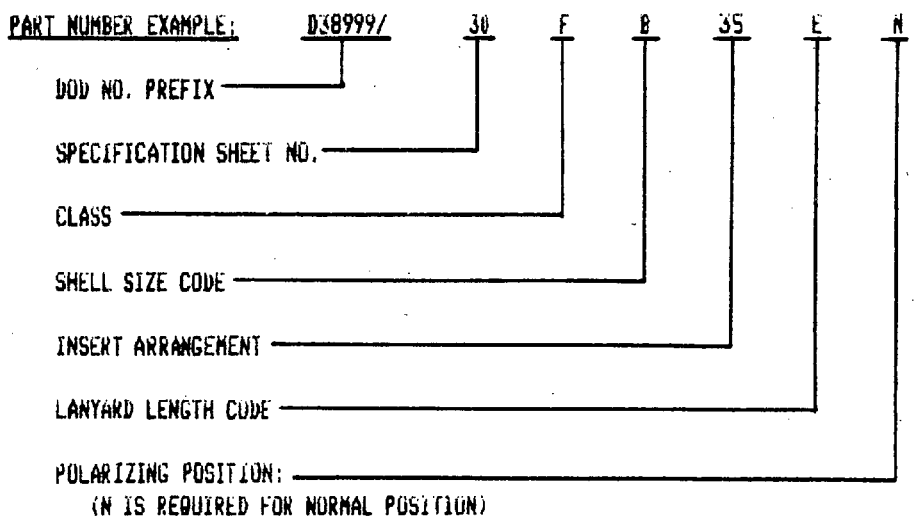

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, WALL MOUNTING FLANGE, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

MIL-C-38999/48

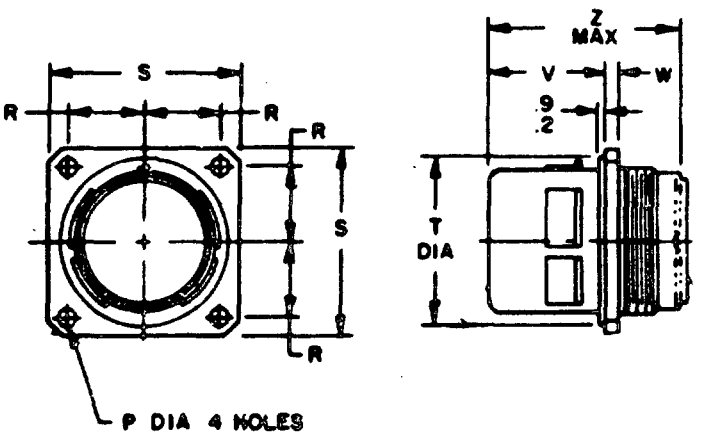

RECEPTACLE, CLASSES C, F AND W


SHELL SIZE	SHELL SIZE CODE	P DIA	R BSC	S	T DIA	V	W	Z MAX
11	B	3.5 3.1	10.31	26.7 25.6	20.15 19.76	20.8 19.2	2.6 2.1	32.0
13	C		11.51	29.1 28.0	23.35 22.96			
15	D		12.31	31.5 30.4	26.52 26.13			
17	E		13.49	33.9 32.8	29.72 29.33			
19	F		14.68	37.1 36.0	32.87 32.48			
21	G		15.88	40.2 39.1	36.05 35.66			
23	H	4.0 3.6	17.46	43.4 43.3	39.22 38.83		3.4 2.9	
25	J		19.05	46.6 45.5	42.40 42.01			

MATES WITH: DOD-C-38999/46 AND /47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, BOX MOUNTING FLANGE, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

MIL-C-38999/42

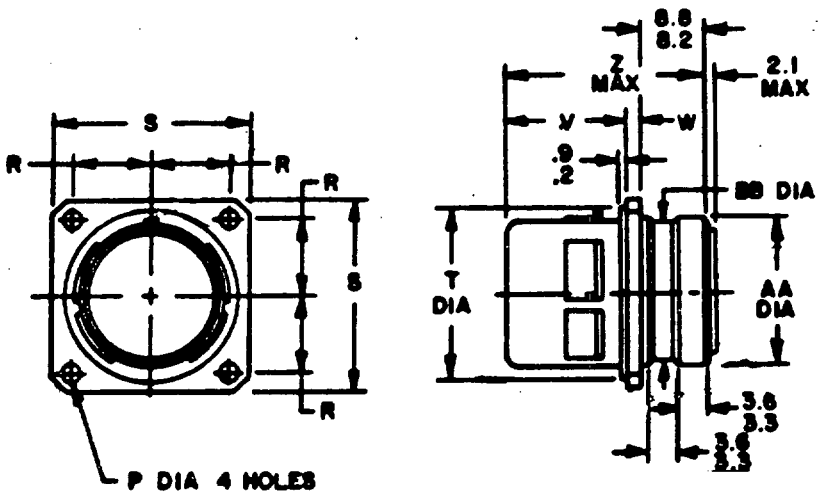

RECEPTACLE, CLASSES C, F AND W


SHELL SIZE	SHELL SIZE CODE	AA DIA	BB DIA	P DIA	R BSC	S	T DIA	V	W	Z MAX
		14.7	13.6			26.7	20.15			
11	B	14.3	13.2		10.31	25.6	19.76			
		17.6	16.5			29.1	23.35			
13	C	17.2	16.1		11.51	28.0	22.96		2.6	
		20.8	19.6			31.5	26.52		2.1	
15	D	20.4	19.2	3.5	12.31	30.4	26.13			
		24.0	22.8	3.1		33.9	29.72			
17	E	23.6	22.4		13.49	32.8	29.33	20.8		
		26.7	25.5			37.1	32.87	19.2		32.0
19	F	26.3	25.1		14.68	36.0	32.48			
		29.8	28.7			40.2	36.05			
21	G	29.4	28.3		15.88	39.1	35.66			
		33.0	31.9			43.4	39.22		3.4	
23	H	32.6	31.5	4.0	17.46	43.3	33.83		2.9	
		36.2	35.0	3.6		46.6	42.40			
25	J	35.8	34.6		19.05	45.5	42.01			

MATES WITH: DOD-C-38999/46 AND /47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, JAM-NUT MOUNTING, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

MIL-C-38999/44

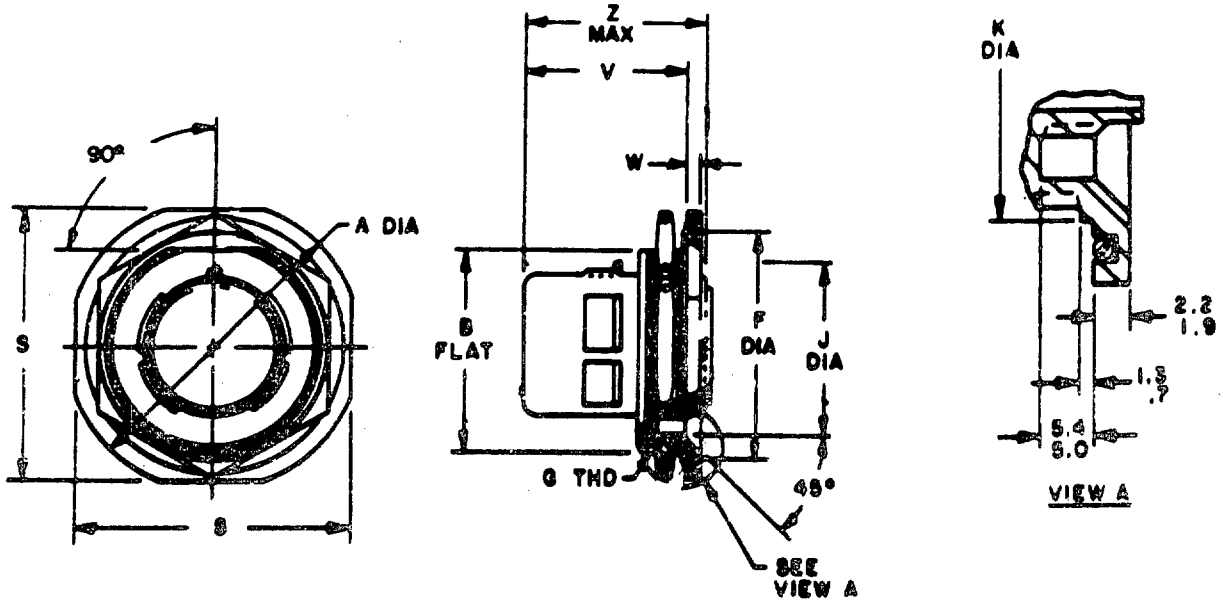

RECEPTACLE, CLASSES C, F AND W


SHELL SIZE	SHELL SIZE CODE	A DIA	B FLAT	F DIA	G THREAD PLATED	J DIA	K DIA	S	V	W	Z MAX
		38.6	23.93	27.84		20.42	25.40	35.4			
11	B	37.6	23.74	27.55	M25x1-6G 0.1R	20.17	20.15	34.4			
		41.7	27.08	31.02		23.57	28.58	38.6			
13	C	40.7	26.89	30.73	M28	23.32	28.33	37.6			
		44.9	30.26	34.19		26.56	31.75	41.7			
15	D	43.9	30.07	33.98	M31	26.31	31.50	40.7			
		49.7	33.56	37.67		30.02	34.92	45.7			
17	E	48.7	33.37	37.38	M34	29.77	34.67	44.7	28.4	2.7	
		51.7	36.61	40.85		32.91	38.10	48.5	27.5	2.1	32.0
19	F	50.7	36.42	40.56	M38	32.66	37.85	47.5			
		54.8	39.78	44.02		36.11	41.28	51.7			
21	G	53.8	39.59	43.73	M41	35.86	41.03	50.7			
		58.0	42.96	47.20		39.26	44.45	54.8			
23	H	57.0	42.77	46.91	M44	39.01	44.20	53.0			
		61.2	46.13	50.37		42.46	47.63	58.0			
25	J	60.2	45.94	50.08	M47	42.21	47.38	57.0			

MATES WITH: DOD-C-38999/46 AND /47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, BREECH COUPLING, EMI GROUNDING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

MIL-C-38999/46

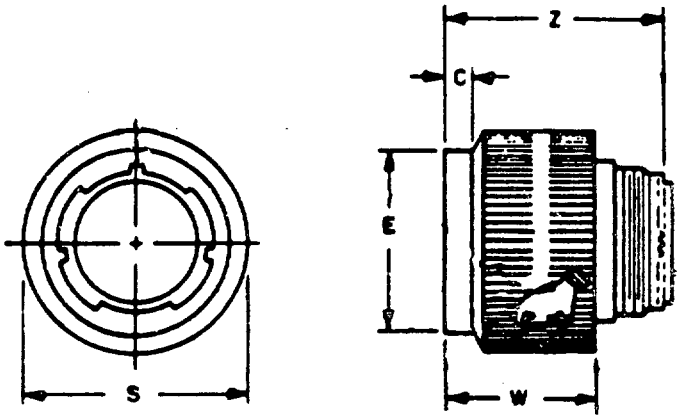

PLUG, CLASSES F AND W


SHELL SIZE	SHELL SIZE CODE	C MIN	E DIA MAX	S DIA MAX	W MAX	Z MAX	
						MATED	UNMATED
11	B		19.7	26.6			
13	C		22.9	31.0			
15	D		26.4	34.2			
17	E		29.2	37.4			
19	F	4.8	32.4	40.2	27.0	36.5	38.9
21	G		35.6	43.3			
23	H		38.8	46.5			
25	J		41.9	49.7			

MATES WITH: DOD-C-38999/40, /42 AND /44

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

MIL-C-38999/47

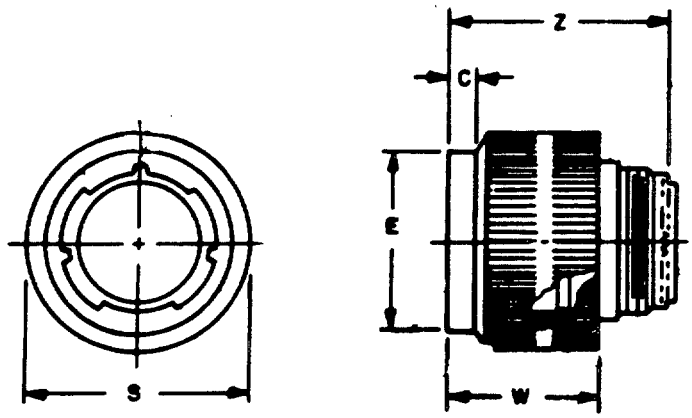

PLUG, CLASS C


SHELL SIZE	SHELL SIZE CODE	C MIN	E DIA MAX	S DIA MAX	W MAX	Z MAX MATED	Z MAX UNMATED
11	B		19.7	26.6			
13	C		22.9	31.0			
15	D		26.4	34.2			
17	E		29.2	37.4			
19	F	4.8	32.4	40.2	27.8	36.5	38.9
21	G		35.6	43.3			
23	H		38.8	46.5			
25	J		41.9	49.7			

MATES WITH: DOD-C-38999/40, /42 AND /44

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT, (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE, CRIMP AND HERMETIC SOLDEI CONTACTS, RECEPTACLE, IN LINE CABLE, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

MIL-C-38999/49

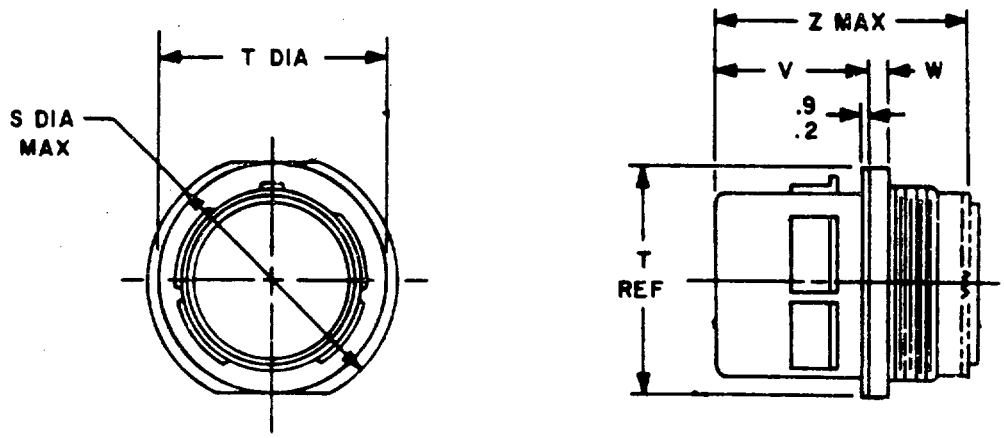

RECEPTACLE, CLASSES C AND W

SHELL SIZE	SHELL SIZE CODE	S DIA MAX	T DIA	V	W	Z DIA
11	B	26.78	20.15 19.76	20.8 19.2	2.6 2.1	32.0
13	C	31.15	23.35 22.96			
15	D	34.32	26.52 26.13			
17	E	37.50	29.72 29.33			
19	F	40.29	32.87 32.48			
21	G	43.46	36.05 35.66		3.4 2.9	
23	H	46.64	39.22 38.83			
25	J	49.89	42.40 42.01			


MATES WITH: DOD-C-38999/46 AND /47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, ELECTRICAL, RECEPTACLE, WALL MOUNTING FLANGE,
CRIMP TYPE, BAYONET COUPLING, SERIES I

MIL-C-38999

MS27466

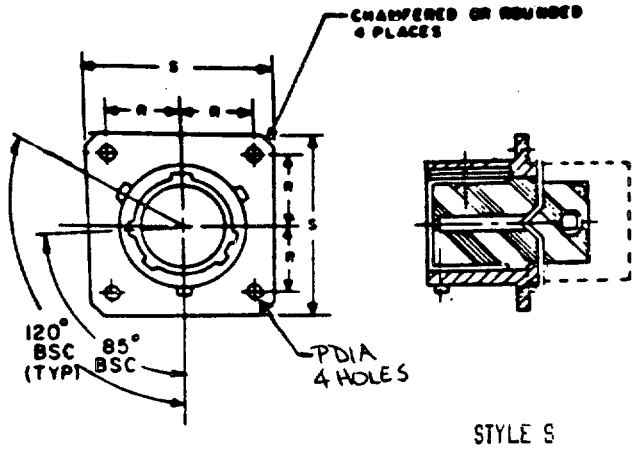

STYLE S

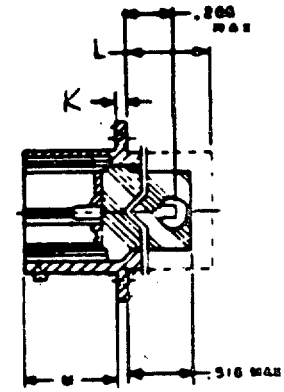

STYLE P

TABLE I. SHELL SIZE AND DIMENSIONS


SHELL SIZE	K	SEE BASIC LE/LT MAX	SEE BASIC LP MAX	M	P DIA	R BSC	S
11	.085	.531	.953	.632	.128	.406	1.031
13						.453	1.125
15						.4845	1.219
17						.531	1.312
19						.578	1.438
21	.115		1.047	.602		.625	1.562
23					.147	.6875	1.688
25			1.156			.750	1.812

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ELECTRICAL STRAIGHT,
CRIMP TYPE, BAYONET COUPLING, SERIES I

MIL-C-38999

MS27467

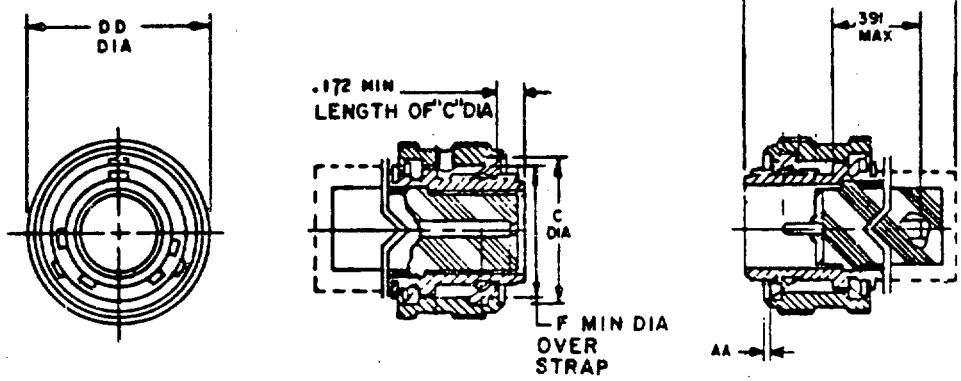

STYLE S

STYLE P

TABLE I. SHELL SIZE AND DIMENSIONS


SHELL SIZE	C DIA	F MIN DIA	L MAX CLASS T	DD DIA MAX	AA
11	.832	.575	1.234	.984	.068
13	.981	.692		1.156	
15	1.106	.817		1.281	
17	1.230	.942		1.406	
19	1.347	1.047		1.516	
21	1.462	1.172		1.641	
23	1.587	1.297		1.766	
25	1.712	1.422		1.891	.047

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECEPTACLE, JAM NUT MOUNTING,
CRIMP TYPE, BAYONET COUPLING, SERIES I

MIL-C-38999

MS27468

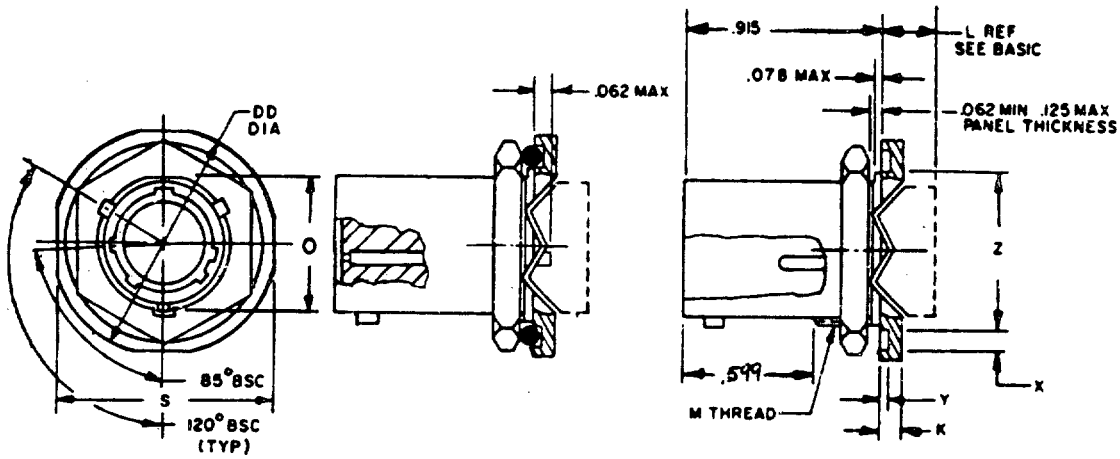

STYLE S

STYLE P

TABLE I. SHELL SIZE AND DIMENSIONS


SHELL SIZE	K	SEE BASIC LE/LT MAX	SEE BASIC LP MAX	M THREAD	DD DIA	S	X	Y	Z DIA	O DIA
11	.109	.328	.438	.8125-20	1.375	1.250	.094	.045	.965	.755
13				1.0000-20	1.500	1.375			1.909	.942
15				1.1250-18	1.625	1.500			1.215	1.066
17				1.2500-18	1.750	1.625			1.340	1.191
19	.140		.460	1.3750-18	1.938	1.812	.141	.075	1.449	1.316
21				1.5000-18	2.062	1.938			1.574	1.441
23				1.6250-18	2.188	2.062			1.699	1.566
25				1.7500-18	2.312	2.188			1.824	1.691


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECEPTACLE, WALL MOUNTING FLANGE,
SOLDER TYPE, HERMETIC SEAL, SERIES I

MIL-C-38999

MSZ7469

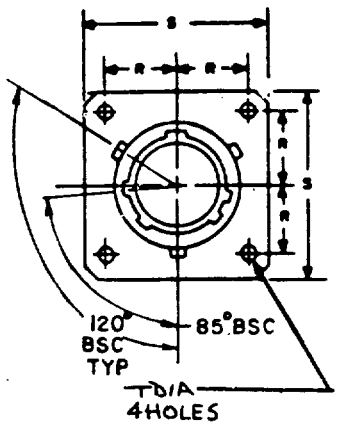

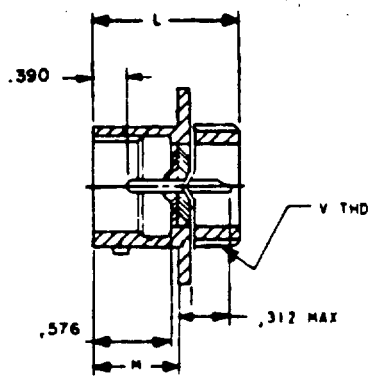

STYLE P

TABLE I. SHELL SIZE AND DIMENSIONS


SHELL SIZE	L MAX	M	R BSC	S	T DIA	V THREAD CLASS 2A UNEF(PLATED)
11	1.093	.659	.406	1.031	.128	.8125-20
13			.453	1.125		.9375-20
15			.4845	1.219		1.0625-18
17			.531	1.312		1.1875-18
19			.578	1.438		1.3125-18
21			.625	1.562		1.4375-18
23			.6875	1.688	.147	1.5625-18
25			.750	1.812		1.6875-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECEPTACLE, JAM NUT MOUNTING,
SOLDER TYPE, HERMETIC SEAL, SERIES I

MIL-C-38999

MS27470

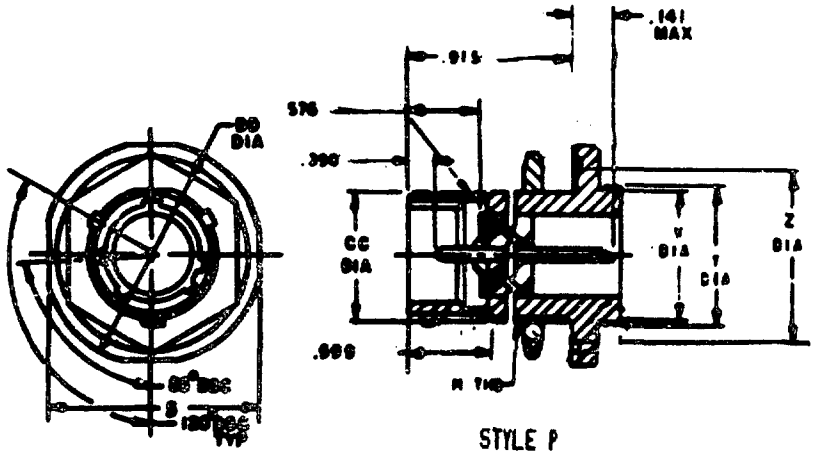

STYLE P

TABLE I. SHELL SIZE AND DIMENSIONS

SHELL SIZE	V DIA	T DIA	M THREAD	DD DIA	S	X	Y	Z DIA	CC DIA
11	.726	.766	.8125-20	1.375	1.250	.094	.045	.965	.755
13	.852	.892	1.0000-20	1.500	1.375			1.909	.942
15	.978	1.018	1.1250-18	1.625	1.500			1.215	1.066
17	1.102	1.142	1.2500-18	1.750	1.625			1.340	1.191
19	1.226	1.268	1.3750-18	1.938	1.812	.141	.075	1.449	1.316
21	1.352	1.392	1.5000-18	2.062	1.938			1.574	1.441
23	1.478	1.518	1.6250-18	2.188	2.062			1.699	1.566
25	1.602	1.642	1.7500-18	2.312	2.188			1.824	1.691


UNS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECEPTACLE, SOLDER MOUNTING,
SOLDER TYPE, HERMETIC SEAL, SERIES I

MIL-C-38999

MS27471

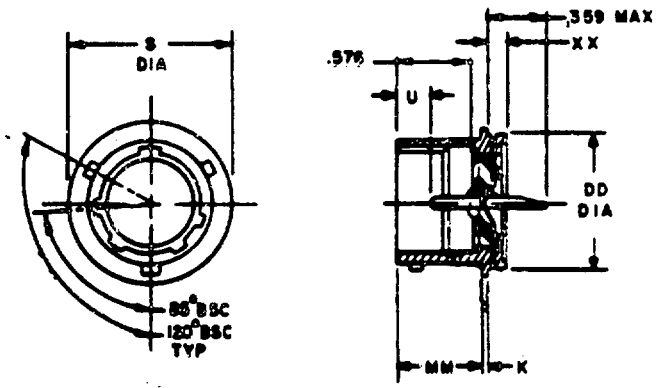

STYLE P

TABLE 1. SHELL SIZE AND DIMENSIONS


SHELL SIZE	N	MM	DD DIA	S DIA	U
11	.747	.659	.781	.844	.390
13			.906	.969	
15			1.031	1.094	
17			1.156	1.218	
19			1.250	1.312	
21			1.375	1.438	
23			1.500	1.563	
25			1.625	1.688	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, ELECTRICAL, RECEPTACLE, BOX MOUNTING,
CRIMP TYPE, BAYONET COUPLING, SERIES I

MIL-C-38999

MS27496

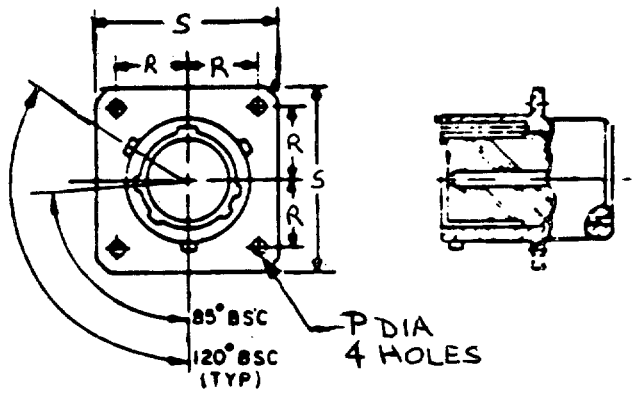

STYLE S

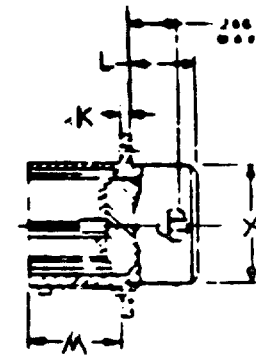

STYLE P

TABLE I. SHELL SIZE AND DIMENSIONS


SHELL SIZE	K	L MAX	X MAX DIA	M	P DIA	N BSC	S
11	.085	.312	.594	.632	.128	.406	1.031
13			.719			.453	1.125
15			.844			.4845	1.219
17			.969			.531	1.312
19			1.078			.578	1.438
21	.115		1.203	.602		.625	1.562
23			1.328		.147	.6875	1.688
25			1.453			.750	1.812


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECEPTACLE, BOX MOUNTING FLANGE,
BACK PANEL, CRIMP TYPE, BAYONET COUPLING, SERIES I


MIL-C-38999

MS27505

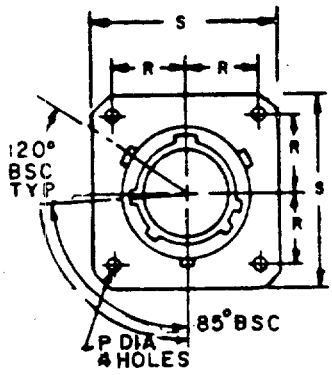

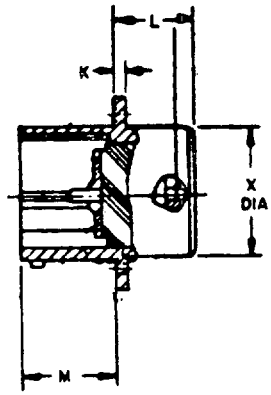

STYLE P



STYLE S

TABLE I. SHELL SIZE AND DIMENSIONS


SHELL SIZE	K	L MAX	X MAX DIA	M	P DIA	R BSC	S
11	.085	.219	.656	.820	.128	.406	1.031
13			.828			.453	1.125
15			.953			.4845	1.219
17			1.078			.531	1.312
19			1.203			.578	1.438
21	.115	.250	1.328	.790		.625	1.562
23			1.453		.147	.6875	1.688
25			1.578			.750	1.812

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECEPTACLE, BACK PANEL WALL MOUNTING FLANGE,
CRIMP TYPE, BAYONET COUPLING, SERIES I

MIL-C-38999

MS27656

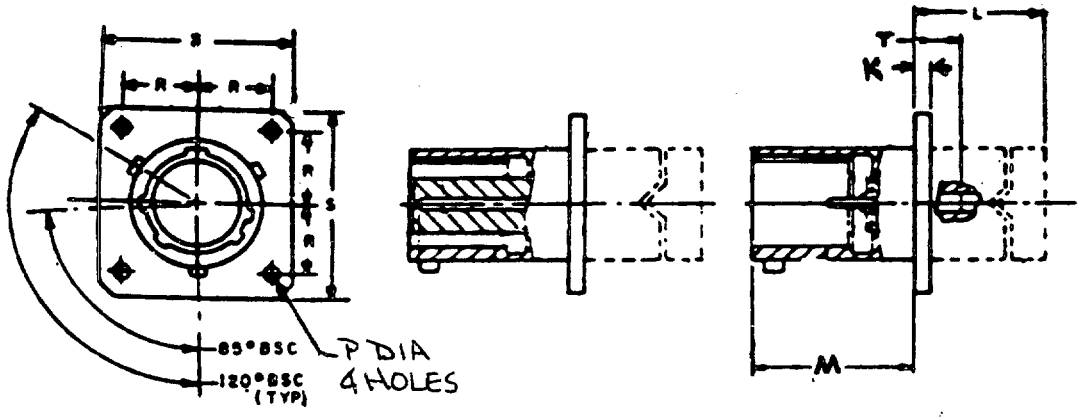

STYLE S STYLE P

TABLE I. SHELL SIZE AND DIMENSIONS

SHELL SIZE	K	SEE BASIC LE/LT MAX	SEE BASIC LP MAX	M	P DIA	R BSC	S	T MAX
11	.085	.469	.719	.820	.128	.406	1.031	.156
13						.453	1.125	
15						.4845	1.219	
17						.531	1.312	
19						.578	1.438	
21	.115	.500	.750	.790		.625	1.562	.188
23					.147	.6875	1.688	
25						.750	1.812	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-38999

CONNECTOR, INSERT ARRANGEMENTS

MIL-STD-1560


SHELL SIZE	ARRANGEMENT NUMBER	CONTACTS		SERVICE RATING	CONTACT LOCATION
		NO. OF	SIZE OF		
11	-35	13	22D	M	ALL
11	-98	6	20	I	ALL
11	-99	7	20	I	ALL
13	-35	22	22D	M	ALL
15	-5	5	16	II	ALL
15	-18	18	20	I	ALL
15	-35	37	22D	M	ALL
17	-8	8	16	II	ALL
17	-26	26	20	I	ALL
17	-99	2	16	I	W, Z
		21	20	I	ALL OTHERS
17	-35	55	22D	M	ALL
19	-11	11	16	II	ALL
19	-32	32	20	I	ALL
19	-35	66	22D	M	ALL
21	-16	16	16	II	ALL
21	-35	79	22D	M	ALL
23	-21	21	16	II	ALL
23	-35	100	22D	M	ALL
25	-4	8	16	I	Y, Z, AA, DD
					EE, FF, LL, JJ
		48	20	I	ALL OTHERS
25	-24	12	12	I	A, B, D, E, L, M,
					P, R, S, T, X, Y
		12	16	I	ALL OTHERS
25	-35	128	22D	M	ALL
25	-61	61	20	I	ALL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-38999

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1560




11-35




11-98



11-99

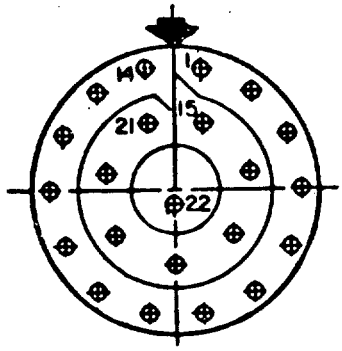

13-35




15-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-38999

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1560




15-18

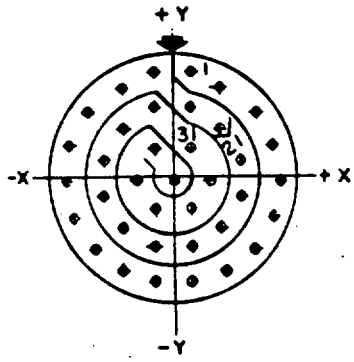


15-35



17-8



17-26




17-99

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-38999

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1560

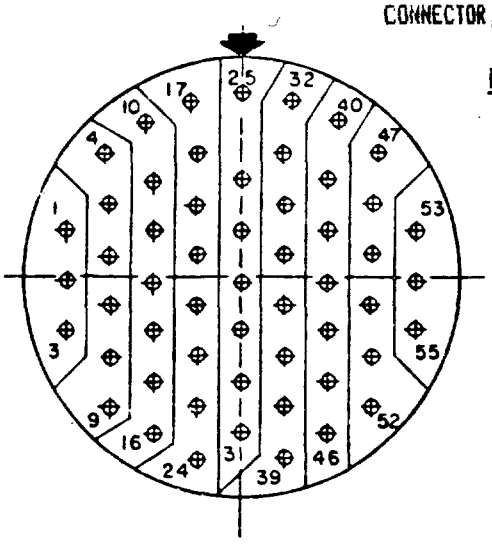


17-35

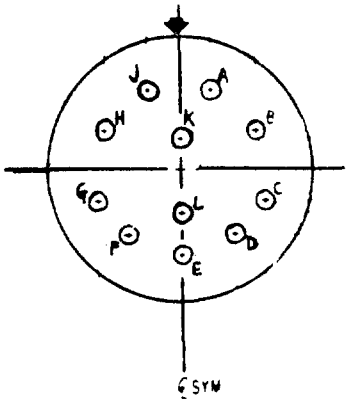

19-11



19-32

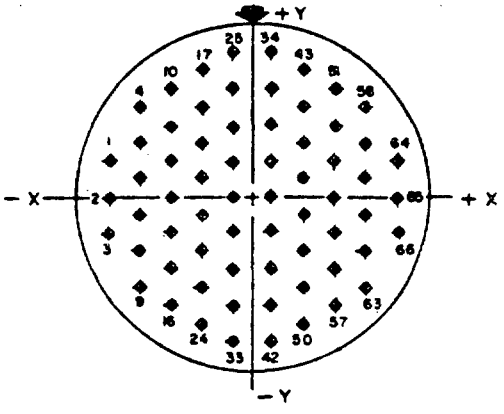


19-35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-38999

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1560

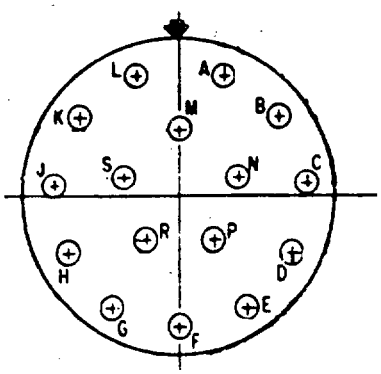


21-16

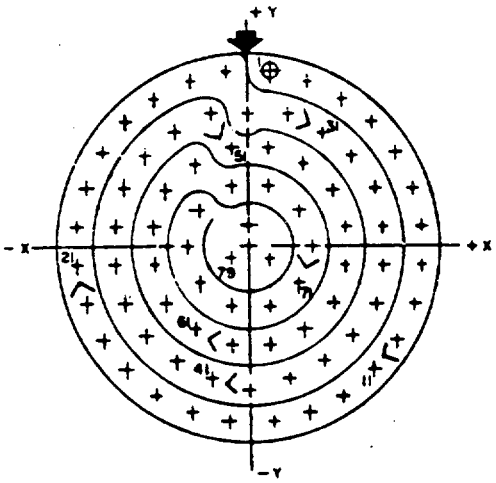

21-35

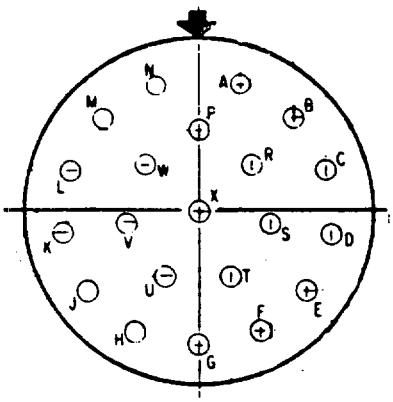

23-21

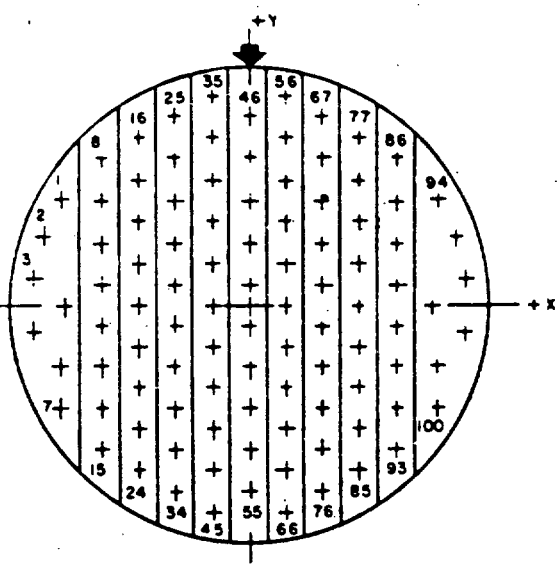


23-35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-38999

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1560

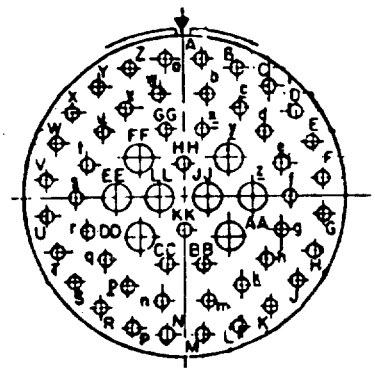


25-4



25-24

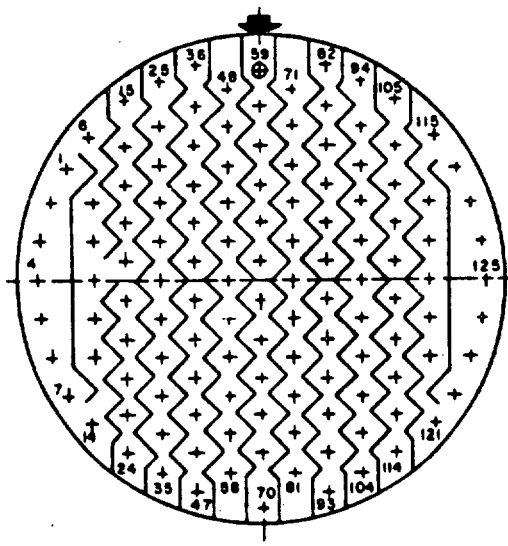

25-35

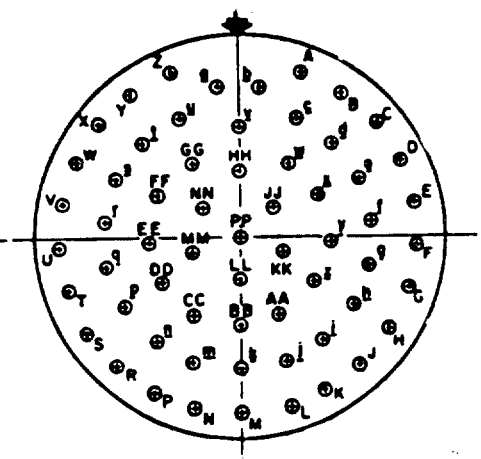

25-61


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER

W-C-596

SCOPE: THIS SECTION COVERS ELECTRIC PLUGS, RECEPTACLES AND CABLE OUTLETS FOR SERVICE FROM 120 TO 600 VOLTS WITH CURRENT RATINGS UP TO 60 AMPERES AND A FREQUENCY RATING OF 60 Hz. CONNECTORS ARE TO BE USED WITH COPPER OR COPPERCLAD ALUMINUM WIRE ONLY. THESE CONNECTORS ARE INTENDED FOR USE IN ANY ELECTRICAL CIRCUIT WITHIN THEIR VOLTAGE, CURRENT, FREQUENCY AND PHYSICAL LIMITATIONS. THEY ARE DESIGNED WITH MATING POLARIZATION FOR SPECIFIC CURRENT RATING, VOLTAGE, FREQUENCY (Hz), PHASE, AND GROUNDING REQUIREMENTS. THIS PREVENTS MATING WITH A CONNECTOR OF INCOMPATIBLE POWER CHARACTERISITCS.

PART NUMBER: WC596/11-DASH NUMBER

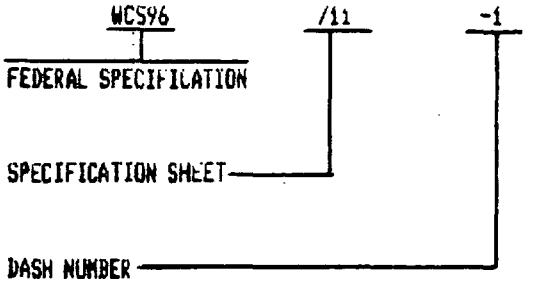

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER

W-C-596

STANDARD CONNECTORS, WC596 TYPE.

RATING		TYPE OF CONNECTOR	WC596 PART NUMBER	CONFIGURATION
AMPERES	VOLTAGE 50/60 Hz			
NONLOCKING 2 POLE, 3 WIRE, GROUNDING, 50/60 Hz				
15	125	RECEPTACLE/SINGLE	WC596/11-1	
15	125	RECEPTACLE/SINGLE	WC596/11-2	
15	125	RECEPTACLE/DUPLEX	WC596/12-1	
15	125	RECEPTACLE/DUPLEX	WC596/12-2	
15	125	RECEPTACLE/DUPLEX	WC596/12-3	
15	125	RECEPTACLE/DUPLEX	WC596/12-4	
15	125	PLUG, STRAIGHT	WC596/13-3	
15	125	PLUG, RIGHT ANGLE	WC596/13-4	
15	125	CABLE OUTLET	WC596/14-2	
15	125	MALE INLET	WC596/140-1	
15	250	RECEPTACLE/SINGLE	WC596/15-1	
15	250	RECEPTACLE/DUPLEX	WC596/16-1	
15	250	PLUG	WC596/17-1	
15	250	CABLE OUTLET	WC596/18-1	
15	250	MALE INLET	WC596/141-1	
15	277	PLUG, STRAIGHT	WC596/73-1	
15	277	CABLE OUTLET	WC596/74-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER

W-C-596

TABLE 106-I. STANDARD CONNECTORS, WC596 TYPE - CONTINUED.

RATING		TYPE OF CONNECTOR	WC596 PART-NUMBER	CONFIGURATION
AMPERES	VOLTAGE 50/60 Hz			
NONLOCKING 2 POLE, 3 WIRE, GROUNDING, 50/60 Hz				
20 20 20 20	125 125 125 125	RECEPTACLE/DUPLEX RECEPTACLE/DUPLEX RECEPTACLE/SINGLE RECEPTACLE/SINGLE	WC596/40-1 WC596/40-2 WC596/41-1 WC596/41-2	
20 20	125 125	PLUG PLUG	WC596/42-1 WC596/42-2	
20	125	CABLE OUTLET	WC596/143-1	
20	125	MALE INLET	WC596/142-1	
20 20	250 250	RECEPTACLE/SINGLE RECEPTACLE/DUPLEX	WC596/64-1 WC596/65-1	
20 20	250 250	PLUG, STRAIGHT PLUG, RIGHT ANGLE	WC596/66-1 WC596/66-2	
20	250	CABLE OUTLET	WC596/67-1	
20	250	MALE INLET	WC596/144-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER

W-C-596

TABLE 106-I. STANDARD CONNECTORS, WC596 TYPE-CONTINUED.



RATING		TYPE OF CONNECTOR	WC596 PART NUMBER	CONFIGURATION
AMPERES	VOLTAGE 50/60 Hz			
LOCKING 2 POLE, 3 WIRE, GROUNDING, 50/60 Hz				
15	125	MALE INLET	WC596/147-1	
15 15	125 125	PLUG, STRAIGHT PLUG, RIGHT ANGLE	WC596/100-1 WC596/100-2	
15	125	CABLE OUTLET	WC596/101-1	
15	125	MALE INLET	WC596/102-1	
15 15	250 250	PLUG, STRAIGHT PLUG, RIGHT ANGLE	WC596/87-1 WC596/87-2	
15	250	CABLE OUTLET	WC596/88-1	
15	250	MALE INLET	WC596/89-1	
15	277	PLUG, STRAIGHT	WC596/113-1	
15	277	CABLE OUTLET	WC596/114-1	
15	277	MALE INLET	WC596/115-1	
20	125	RECEPTACLE, SINGLE	WC596/94-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER

W-C-596

TABLE 106-I. STANDARD CONNECTORS, WC596 TYPE-CONTINUED.

RATING		TYPE OF CONNECTOR	WC596 PART NUMBER	CONFIGURATION
AMPERES	VOLTAGE 50/60 Hz			
LOCKING 2 POLE, 3 WIRE, GROUNDING, 50/60 Hz				
20 20	125 125	PLUG, STRAIGHT PLUG, RIGHT ANGLE	WC596/95-1 WC596/95-2	
20	125	CABLE OUTLET	WC596/96-1	
20	250	RECEPTACLE, SINGLE	WC596/81-1	
20 20	250 250	PLUG, STRAIGHT PLUG, RIGHT ANGLE	WC596/82-1 WC596/82-2	
20	250	CABLE OUTLET	WC596/83-1	
20	277	RECEPTACLE, SINGLE	WC596/107-1	
20	277	PLUG, STRAIGHT	WC596/108-1	
20	277	CABLE OUTLET	WC596/109-1	
30	125	PLUG, STRAIGHT	WC596/91-1	
30	125	CABLE OUTLET	WC596/92-1	
30	250	PLUG	WC596/78-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER
W-C-596

TABLE 106-1. STANDARD CONNECTORS, WC596 TYPE-CONTINUED.


RATING		TYPE OF CONNECTOR	WC596 PART NUMBER	CONFIGURATION
AMPERES	VOLTAGE 50/60 Hz			
30	250	CABLE OUTLET	WC596/79-1	
30	277	PLUG, STRAIGHT	WC596/104-1	
30	277 1-PH	CABLE OUTLET	WC596/105-1	
LOCKING 3 POLE, 4 WIRE, GROUNDING, 50/60 Hz				
20	125/250	PLUG, STRAIGHT	WC596/121-1	
20	125/250	CABLE OUTLET	WC596/122-1	
20	250 3-PH	PLUG, STRAIGHT	WC596/125-1	
20	250 3-PH	CABLE OUTLET	WC596/126-1	
30	125/250 1-PH	PLUG, STRAIGHT	WC596/117-1	
30	125/250 1-PH	CABLE OUTLET	WC596/118-1	
30	250	PLUG, STRAIGHT	WC596/129-1	
30	250	CABLE OUTLET	WC596/130-1	
LOCKING 4 POLE, 5 WIRE, GROUNDING, 50/60 Hz				
30	120/208	PLUG, STRAIGHT	WC596/133-1	
30	120/208	CABLE OUTLET	WC596/134-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR AND COMPONENT PARTS

MIL-C-28754

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR RACK AND PANEL CONNECTORS, BASE PLATE CONNECTORS, MODULAR CONNECTORS, CABLE CONNECTORS AND THE COMPONENT PARTS. THESE CONNECTORS ARE INTENDED TO BE USED IN GROUND SUPPORT, AIRBORNE AND SHIPBOARD ELECTRICAL AND ELECTRONIC EQUIPMENT.

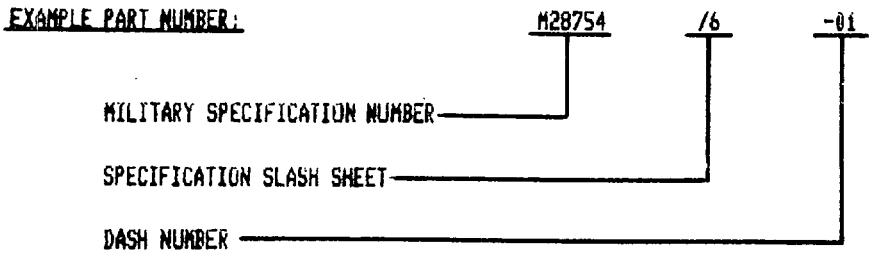


TEMPERATURE RATING: -55°C TO 105°C

VOLTAGE RATING: 300 VOLTS, ac (rms)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL MODULAR, TYPE IV, 40 PIN, STRAIGHT THROUGH


MIL-C-28754/6

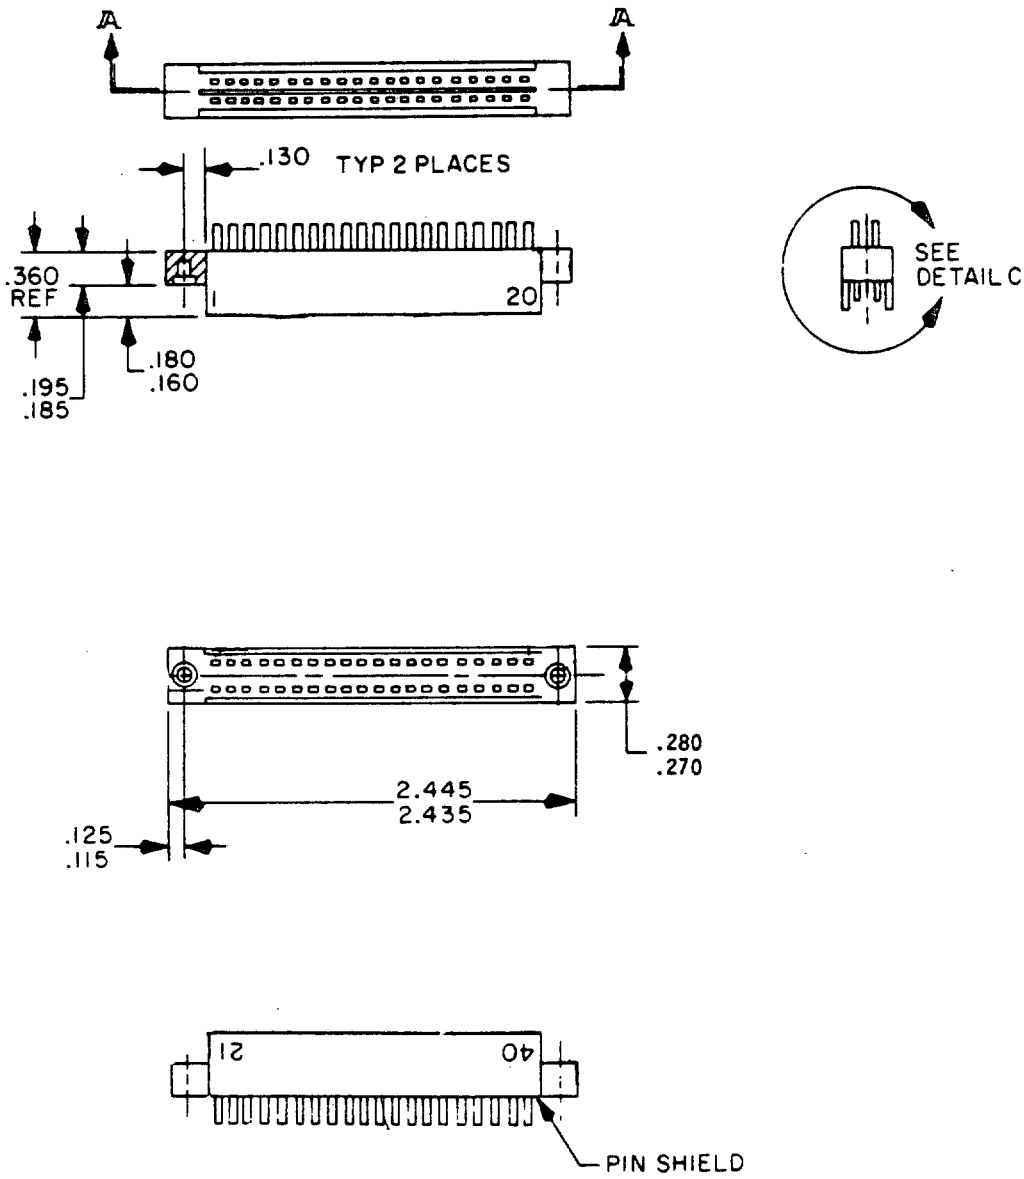


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE 1V, 40 PIN, STRAIGHT THROUGH

MIL-C-28754/6

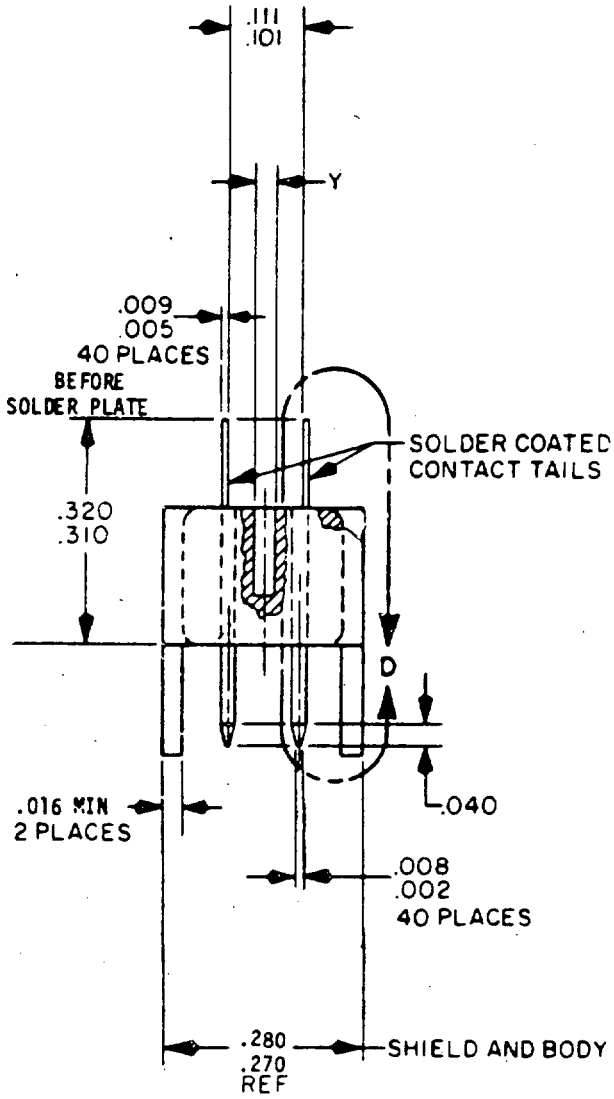


DETAIL-C

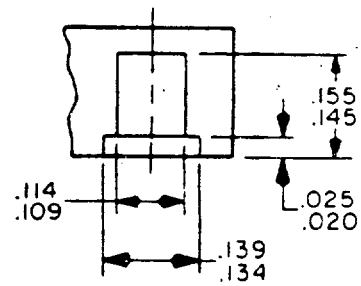

TAPER PERMITTED
WITHIN DIMENSIONAL
TOLERANCES

DETAIL-B

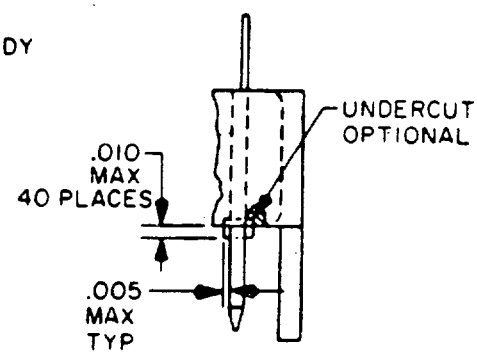


DETAIL-D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 PIN, STRAIGHT THROUGH

MIL-C-28754/6

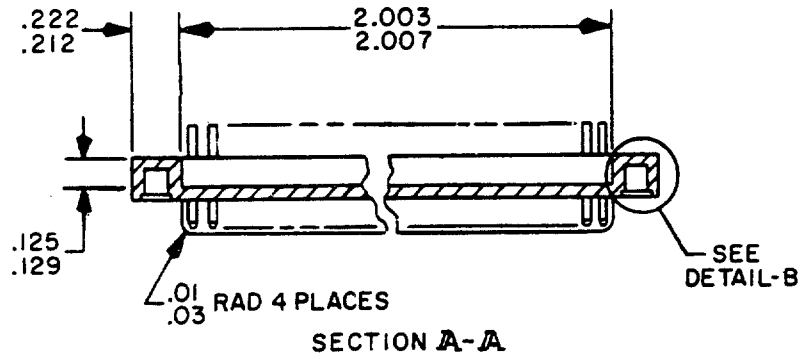

SECTION A-A


TABLE I. DASH NUMBER AND DIMENSIONS.

DASH NO.	Y
03	.058 .062
04	.031 .035


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, SINGLE SPAN, CONNECTOR ASSEMBLY

MIL-C-28754/7

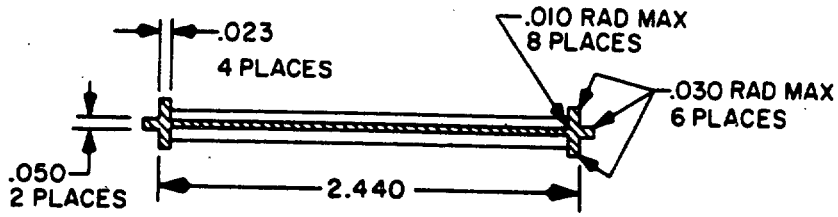

SECTION 18-18

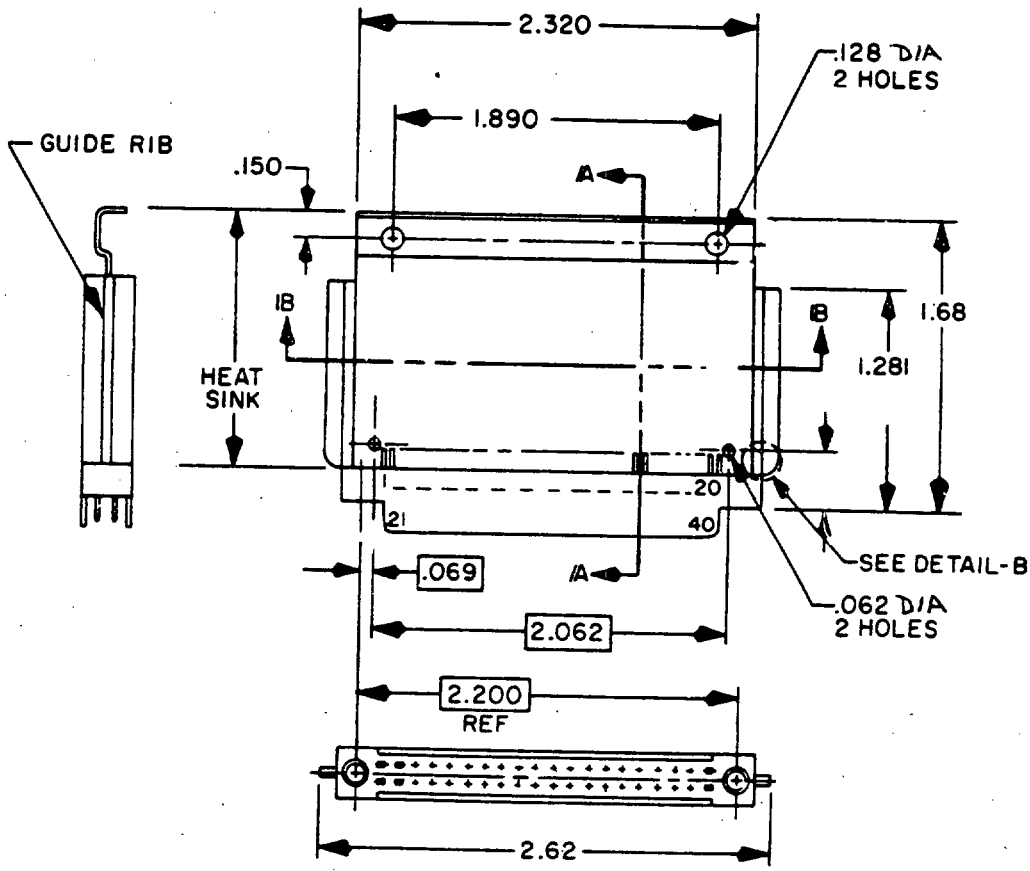

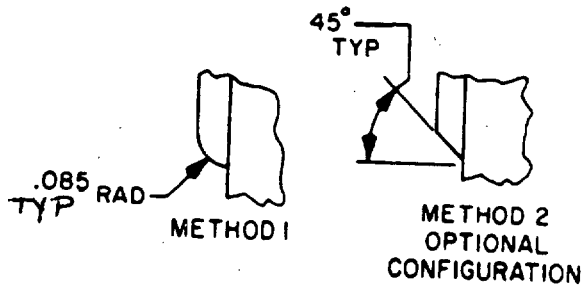


DETAIL-B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, SINGLE SPAN, CONNECTOR ASSEMBLY

MIL-C-28754/7

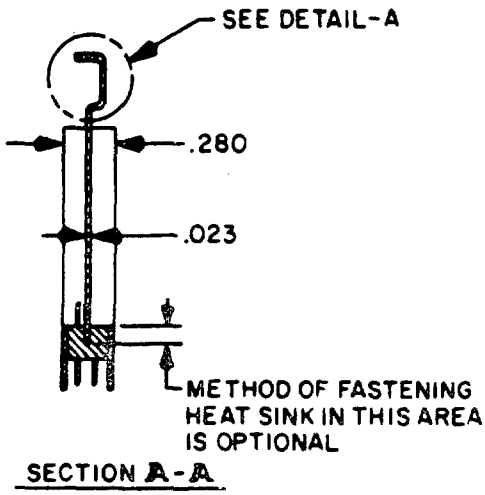

SECTION A-A

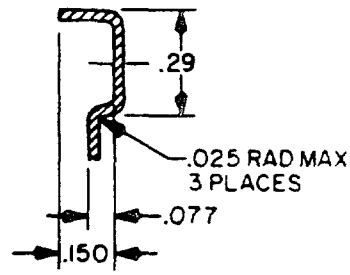

DETAIL-A
HEAT DISSIPATING
FIN


TABLE 1. DASH NUMBER AND APPLICABLE CONNECTOR.

DASH NUMBER	APPLICABLE CONNECTOR	DESCRIPTION INSULATED PIN SHIELD
04	M28754/6-04	CONTACT TAILS ON .100 CENTERS
05	M28754/10-05	CONTACT TAILS ON .050 CENTERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 PIN, RIGHT ANGLE (FOR DIE CAST FRAME)


MIL-C-28754/8

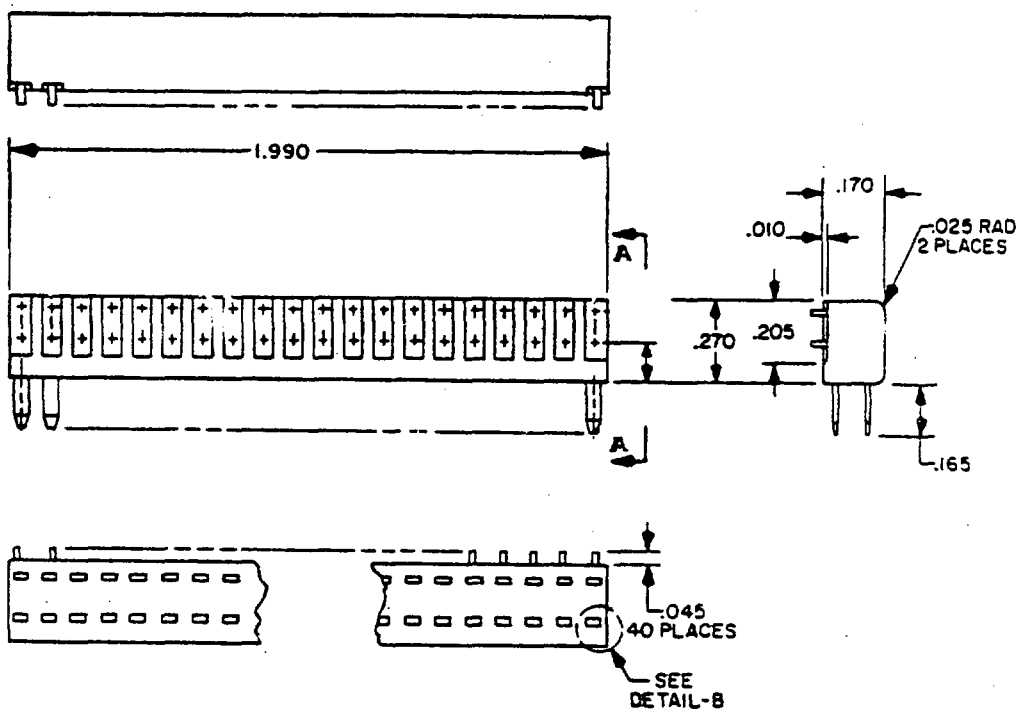

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 PIN, RIGHT ANGLE FOR DIE CAST FRAME

MIL-C-28754/8

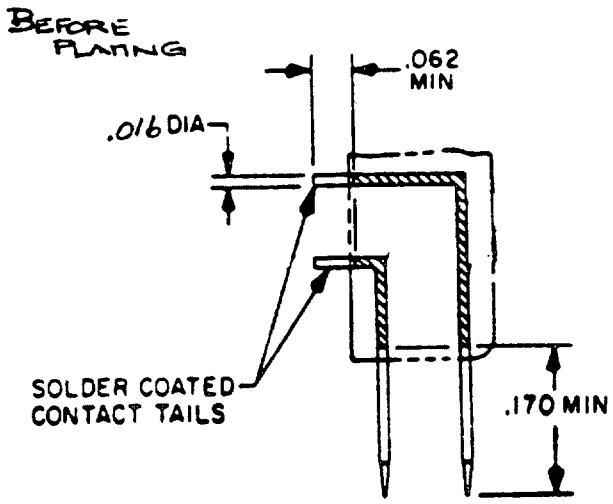


VIEW A-A
WITH CONNECTOR BODY REMOVED SHOWING CONTACT PIN CONFIGURATION

PART NO. M28754/08-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, DOUBLE SPAN, CONNECTOR ASSEMBLY, (DIP FRAME)


MIL-C-28754/9

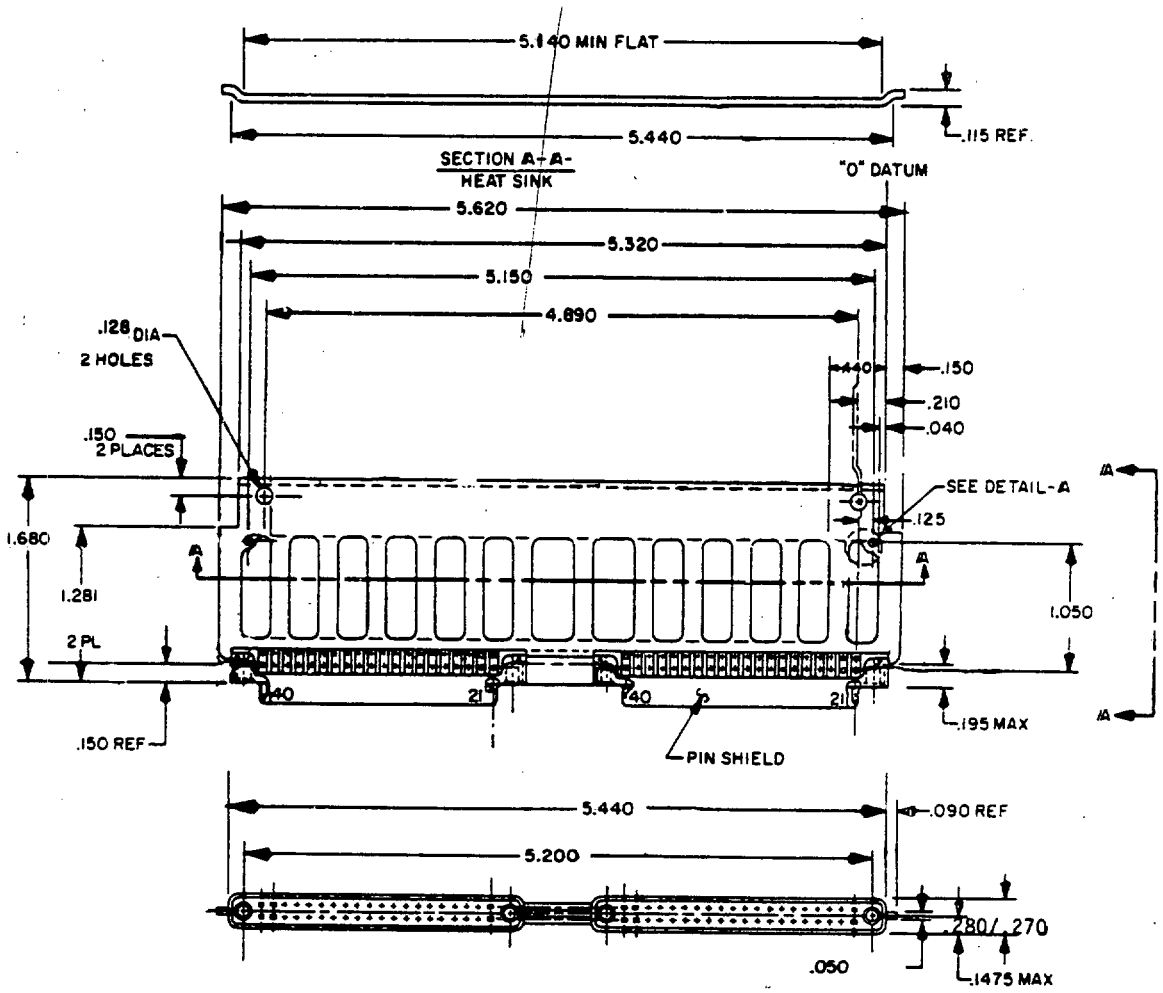

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE 1V, DOUBLE SPAN, CONNECTOR ASSEMBLY, (DIP FRAME)

MIL-C-28754/9

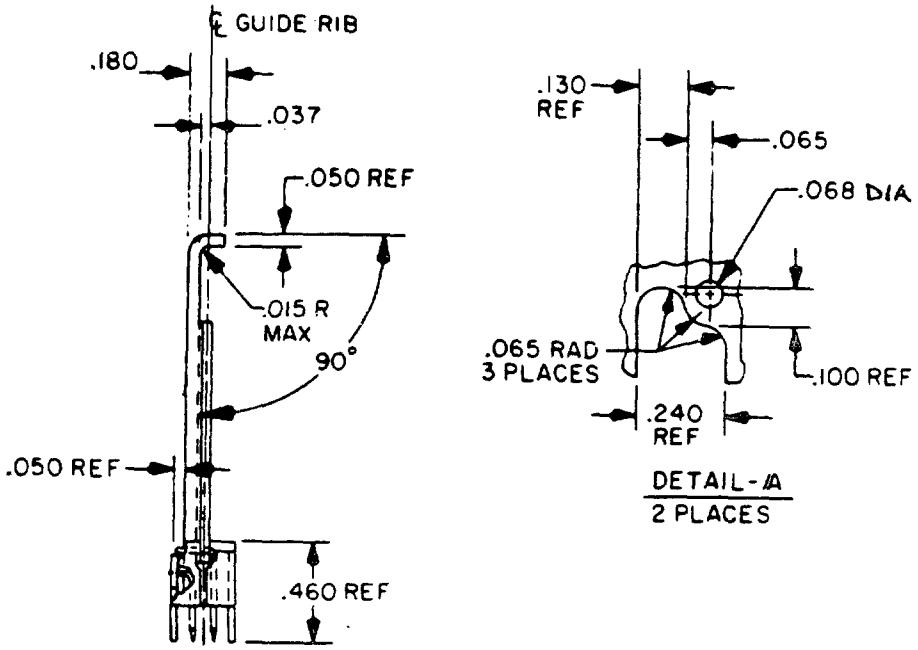

VIEW A-A


TABLE 1. PART NUMBER AND APPLICABLE CONNECTOR.

PART NUMBER	APPLICABLE CONNECTOR	DESCRIPTION
02	M28754/11-02	INSULATED PIN SHIELD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE 1V, 40 PIN, CONTACT TAILS ON .050 CENTERS


MIL-C-28754/10

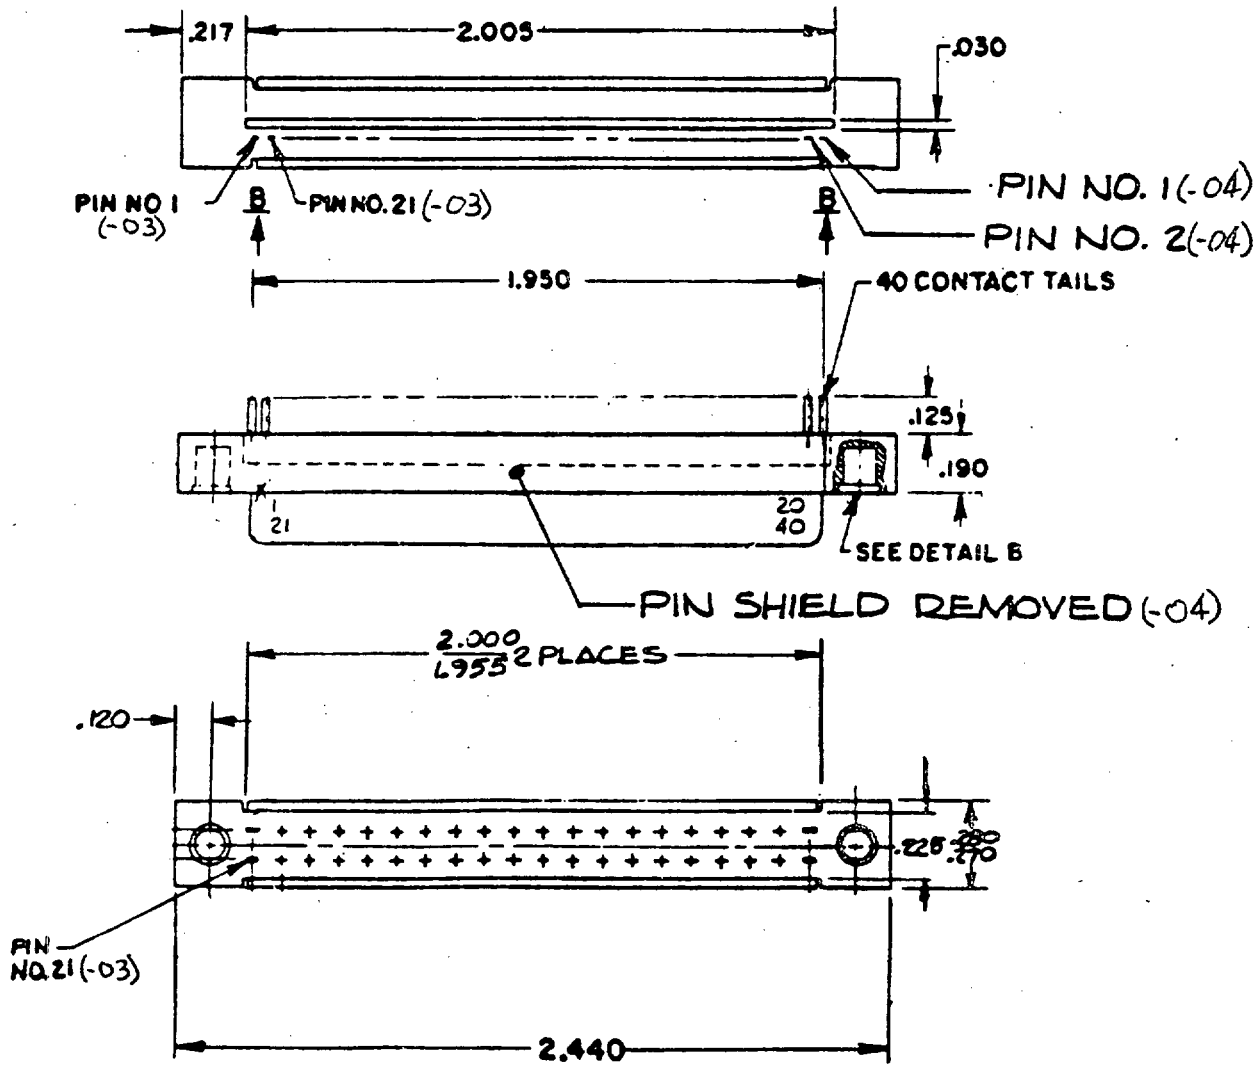

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE 1V, 40 PIN, CONTACT TAILS ON .050 CENTERS

MIL-C-28754/10

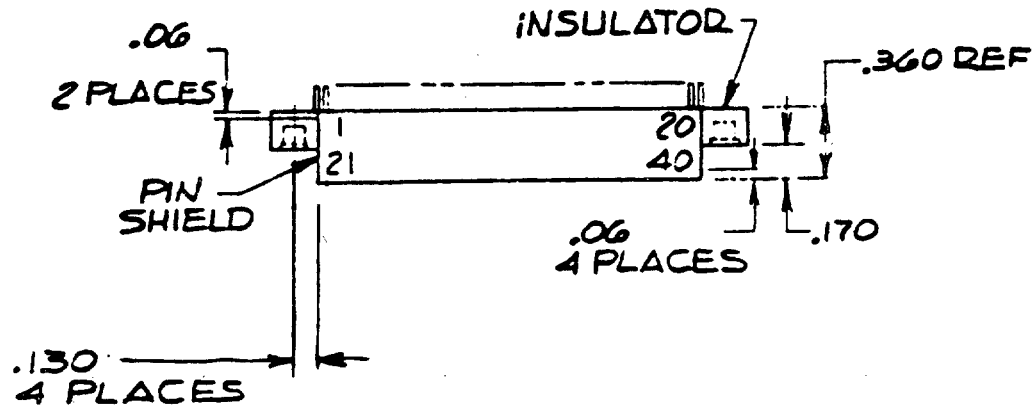

VIEW B-B


TABLE I. DASH NUMBER AND DESIGN CHARACTERISTICS.

DASH NUMBER	CHARACTERISTICS	APPLICABLE CONNECTOR ASSEMBLY
-03	TWO PIN SHIELDS	M28754/7-05
-04	ONE PIN SHIELD	M28754/48-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 PIN, RIGHT ANGLE (FOR SOLID OR DIP FRAME)

MIL-C-28754/11

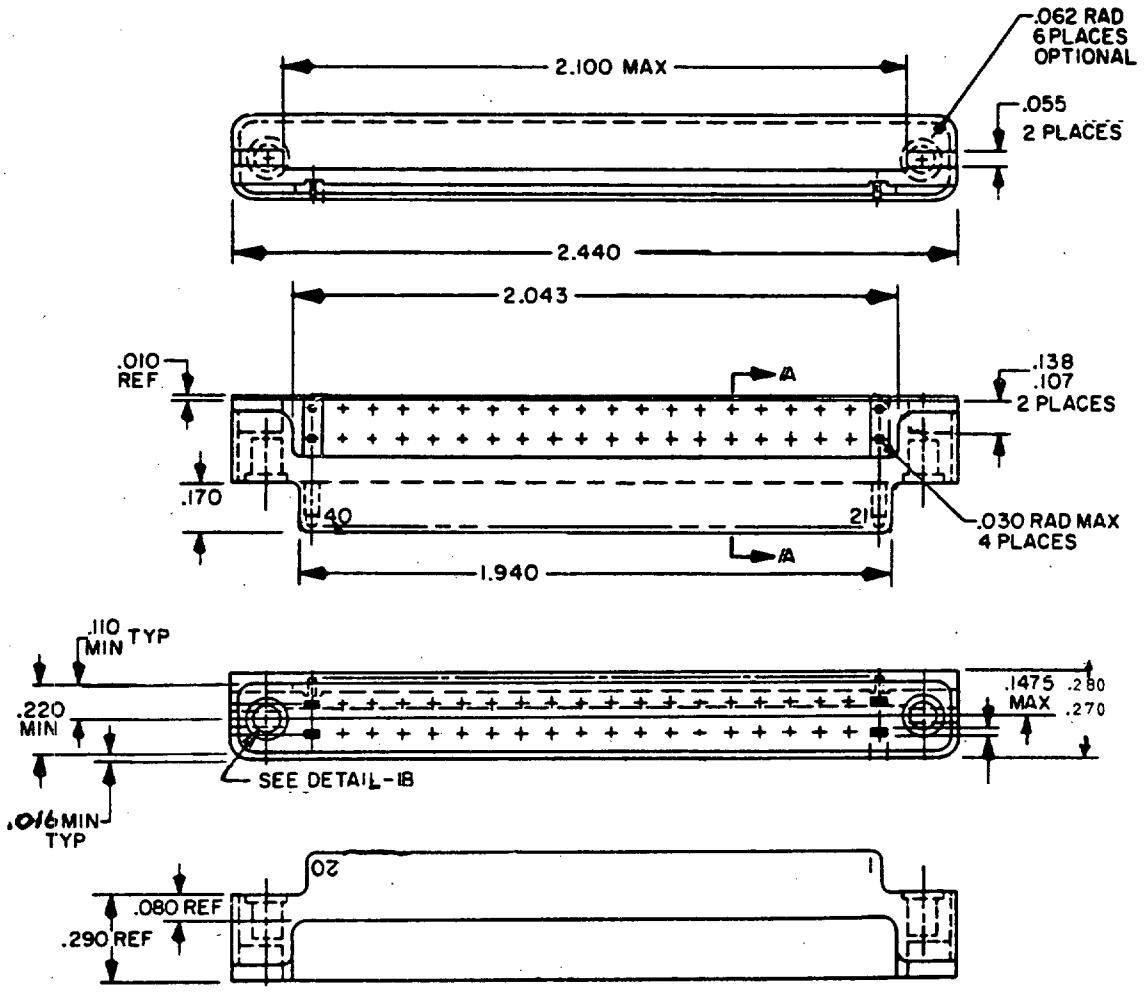

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE 1V, 40 PIN, RIGHT ANGLE (FOR SOLID OR DIP FRAME)

MIL-C-28754/11

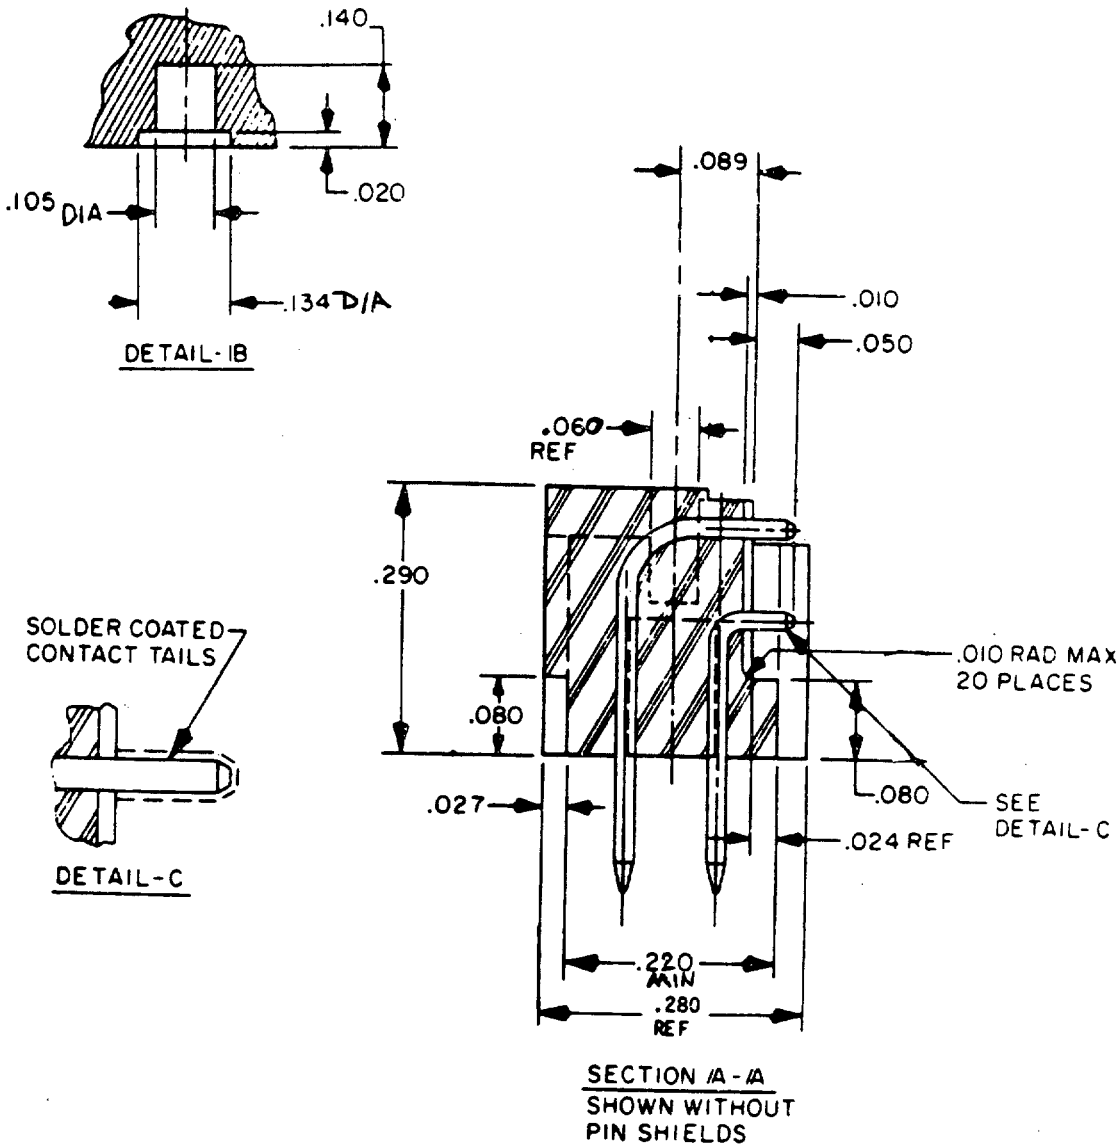



TABLE I. PART NUMBER AND APPLICABLE CONNECTOR ASSEMBLY.

PART NUMBER	APPLICABLE CONNECTOR ASSEMBLY
02	M28754/12-03, M28754/12-04 M28754/12-06, M28754/12-08 M28754/9-02

Source: https://assist.dla.mil/ downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN (FOR SOLID OR DIP FRAME)


MIL-C-28754/12

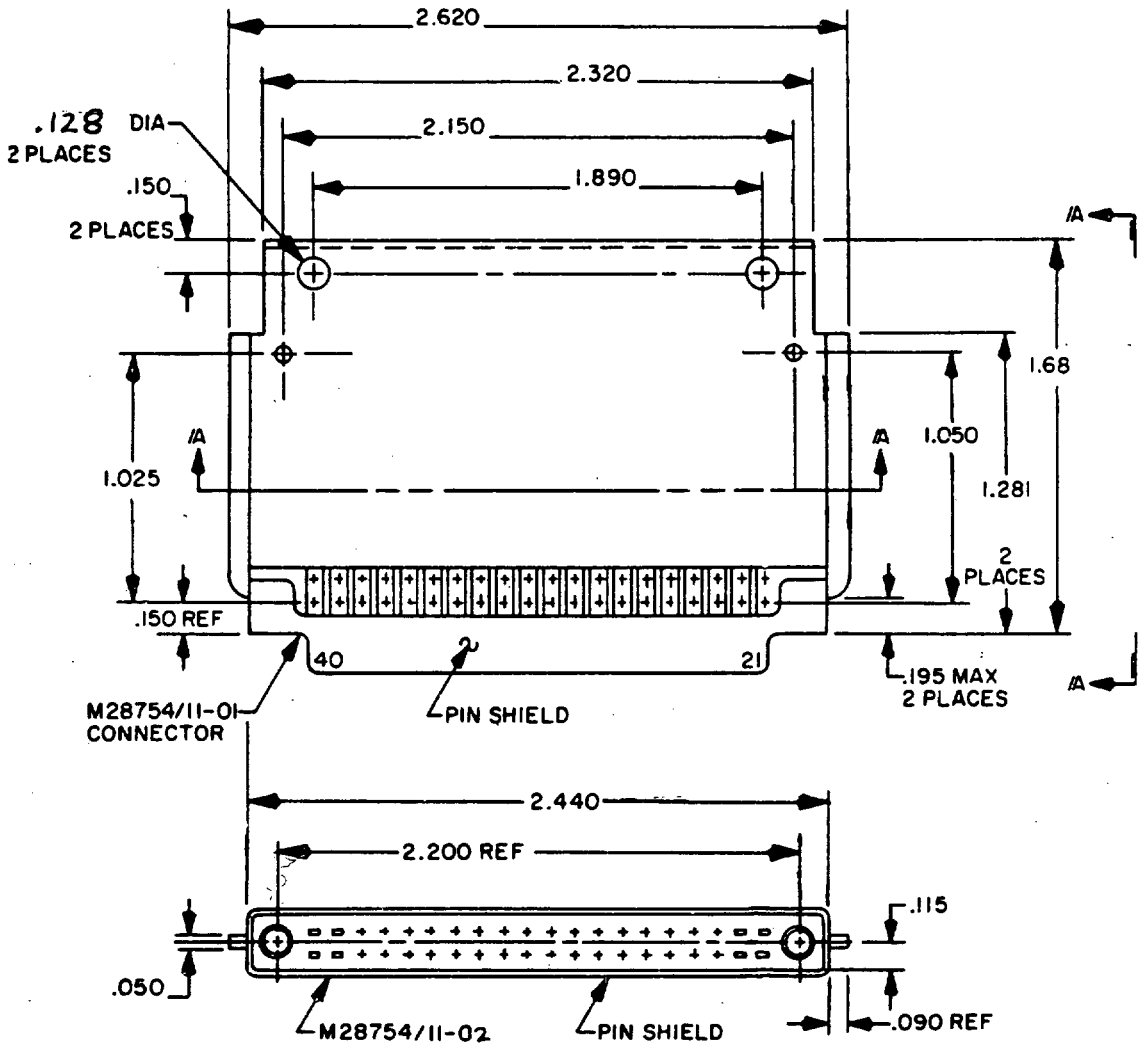


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN (FOR SOLID OR DIP FRAME)

MIL-C-28754/12

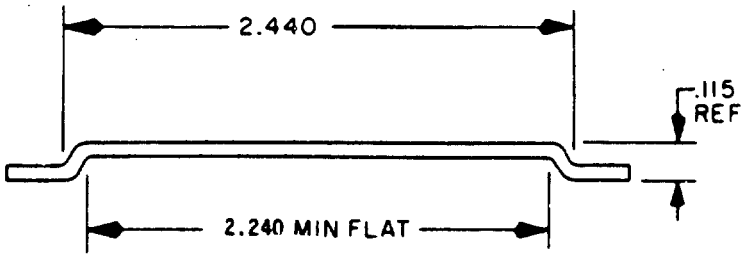


SECTION A-A
(HEAT SINK)

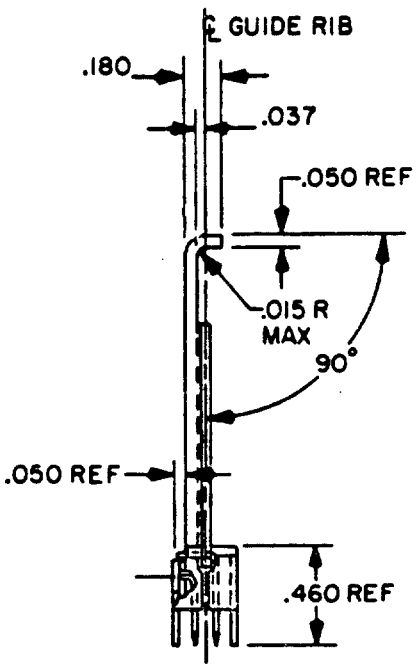


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN (FOR SOLID OR DIP FRAME)

MIL-C-28754/12

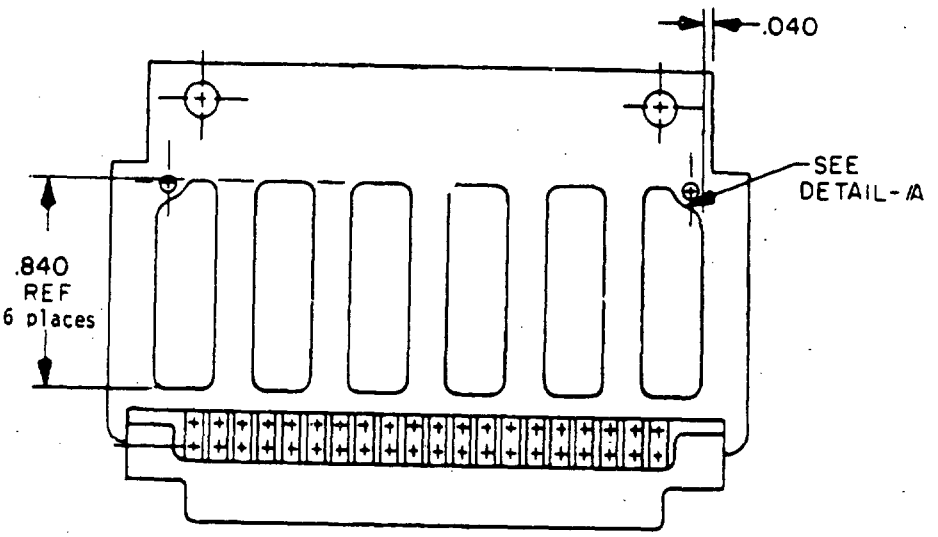

Hole patterns - M28754/12-03

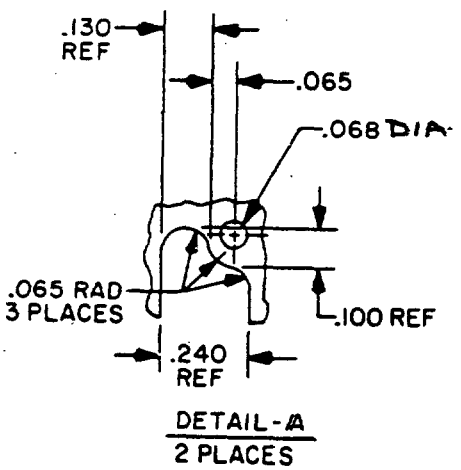


DETAIL-A
2 PLACES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN (FOR SOLID OR DIP FRAME)

MIL-C-28754/12

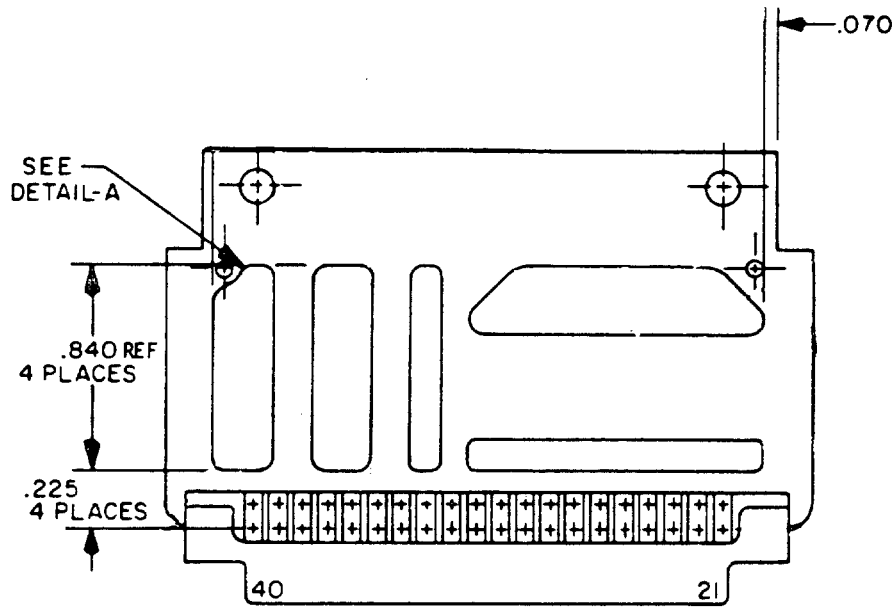

Hole patterns - M28754/12-04


TABLE 1. PART NUMBER AND APPLICABLE CONNECTOR.


DASH NUMBER	APPLICABLE CONNECTOR	DESCRIPTION
03	M28754/11-02	INSULATED PIN SHIELD
04	M28754/11-02	INSULATED PIN SHIELD


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE 1V, 20 PIN, RIGHT ANGLE (FOR DIE CAST FRAME)

MIL-C-28754/14

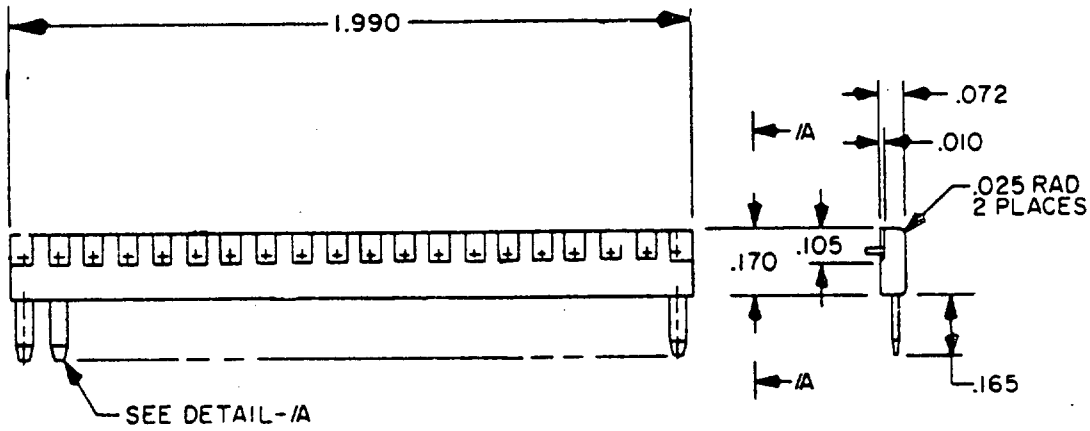

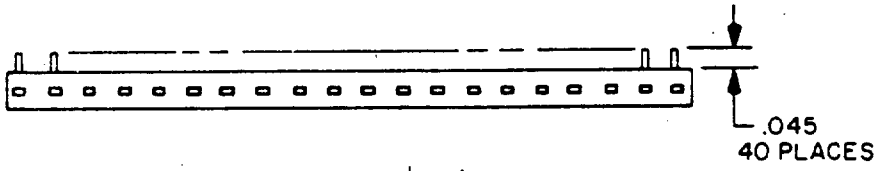

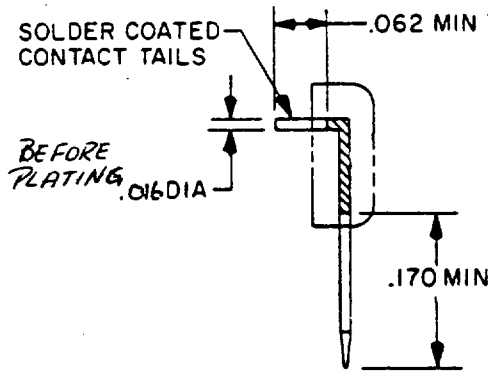

VIEW /A-/A
WITH CONNECTOR BODY
REMOVED SHOWING
CONTACT PIN CONFIGURATION

PART NUMBER: M28754/14-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CRIMP, CONTACT, TYPE V

MIL-C-28754/15

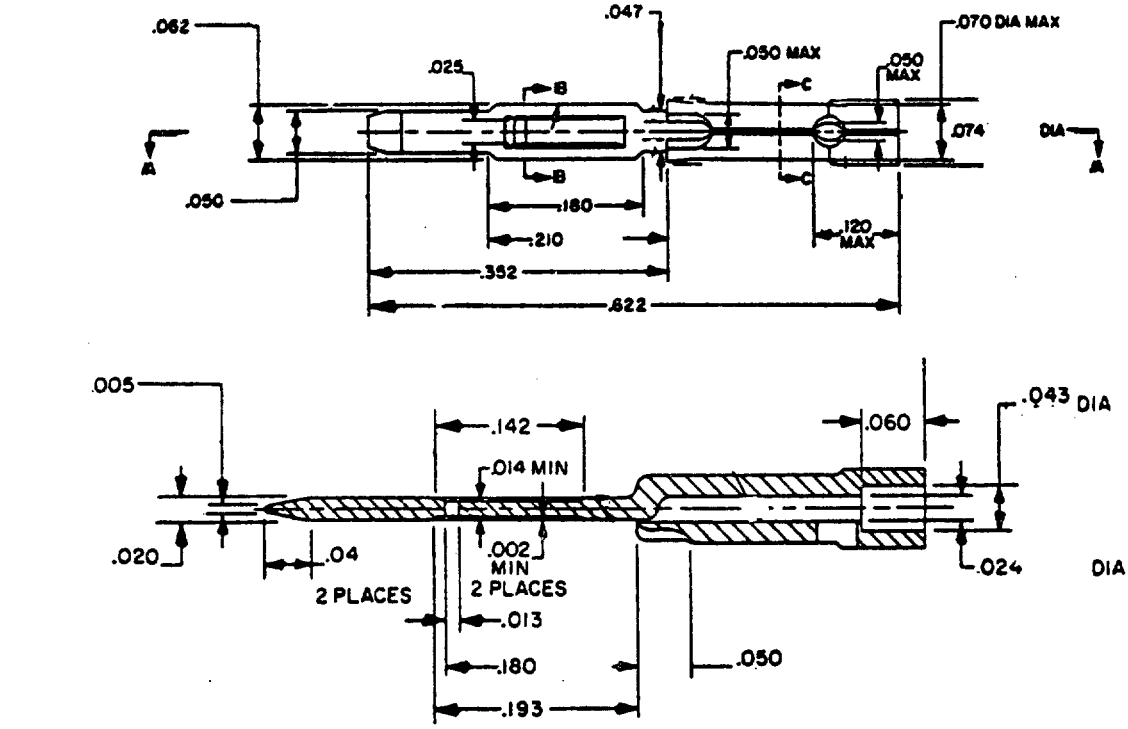


FIG. 2

TABLE 1. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER	CONTACT FIGURE	BACKEND FIGURE	CONDUCTOR SIZE AWG	CURRENT RATING AMPS	CONTACT RESISTANCE MV	DURABILITY MV	CRIMP JOINT RESISTANCE MV
01	2	1	26	2.4	16.0	16.0	4.0
			28	2.0	13.3	13.3	4.0
			30	1.1	7.4	7.4	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, BLOCK, 40 PIN, TYPE V, STRAIGHT THROUGH

MIL-C-28754/16

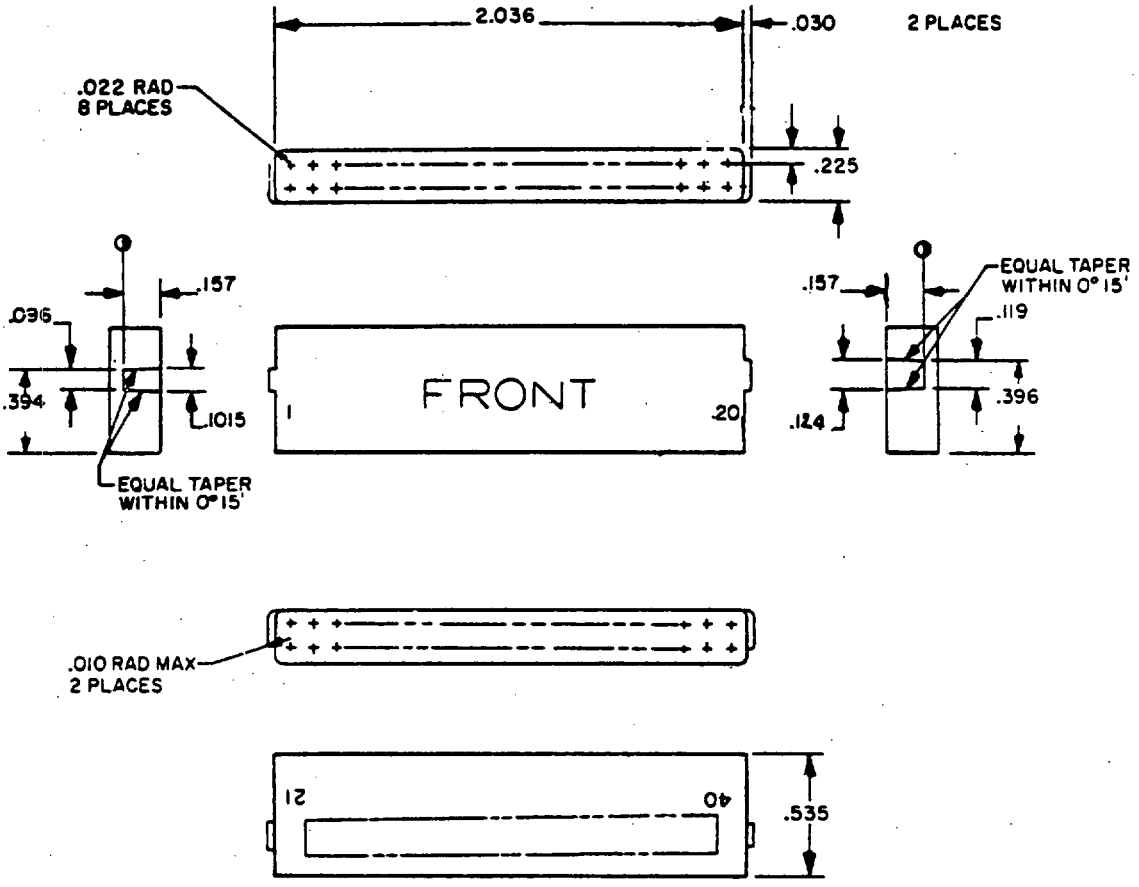



TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER	CRIMP CONTACT	B DIA.	APPLICABLE CONTACT
01	26 28 30	.076	M28754/15-01 BLUE COLOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, STYLE 1, CONTACT TAILS ON .100 CENTERS

MIL-C-28754/17

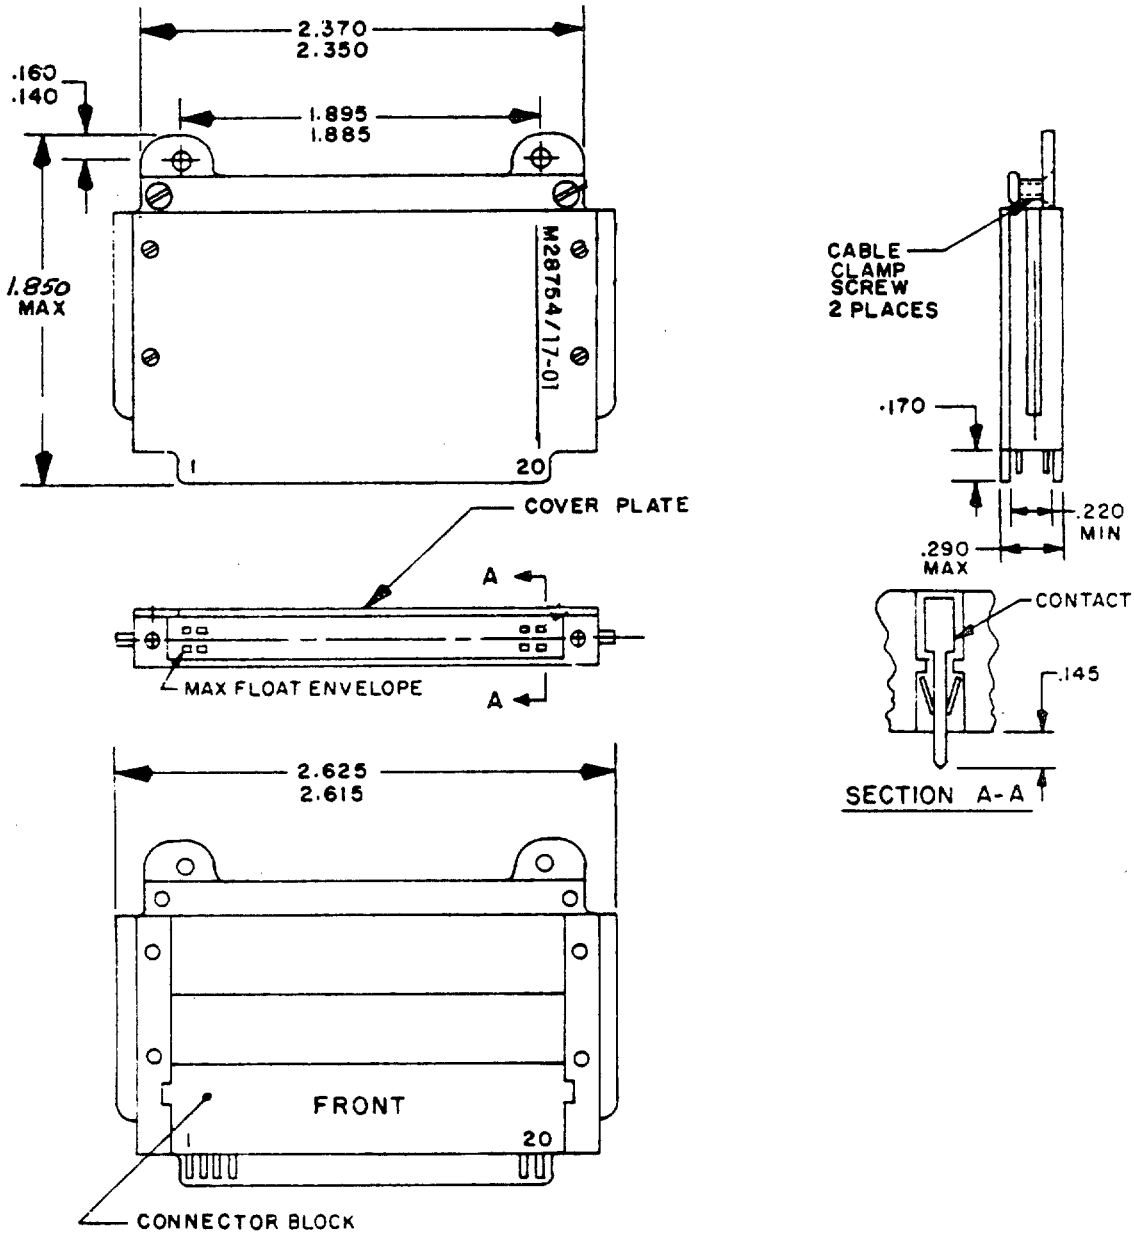

CONNECTOR ASSEMBLY WITH COVER PLATE REMOVED


TABLE I. DASH NUMBER AND CHARACTERISTICS.


DASH NUMBER	CONNECTOR	MIL-C-28754/49 HOUSING (TYPE)	MS14061 COVER PLATE (TYPE)
01	M28754/16-01	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, ELECTRICAL, MODULAR, SPACER, PIN, TYPE IV, SINGLE SPAN

MIL-C-28754/18

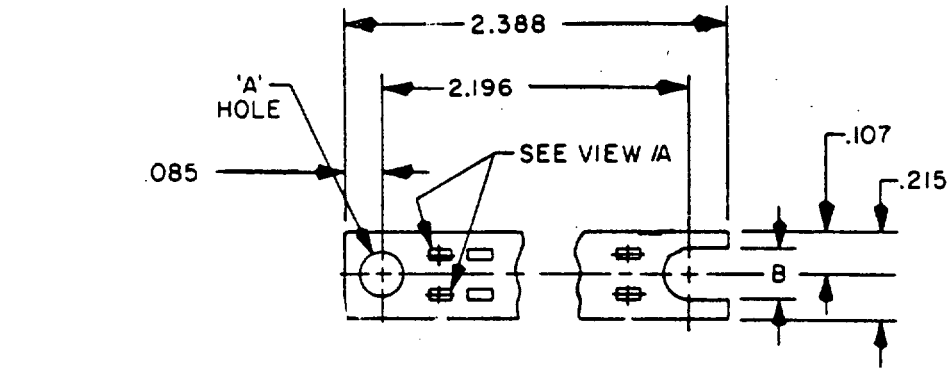

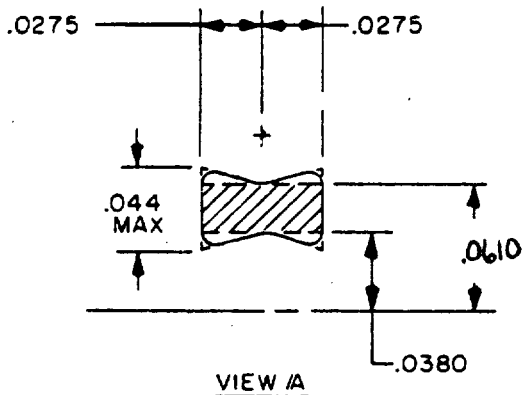

VIEW /A
40 PLACES
FOR ALTN CONFIGURATION
SEE VIEW IB

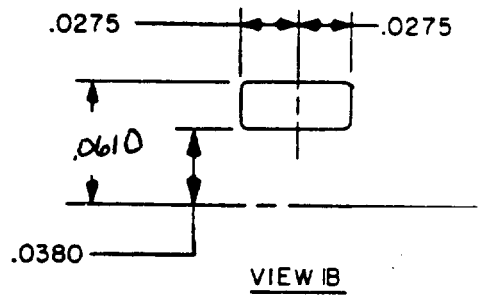


VIEW IB


DASH NUMBER	"A" DIA	"B" DIM	THICKNESS
01	.1005	.1255	.018
02	.1005	.1005	
03	.1255	.1255	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, ELECTRICAL, MODULAR, SPACER, PIN, TYPE IV, SINGLE SPAN

MIL-C-28754/19

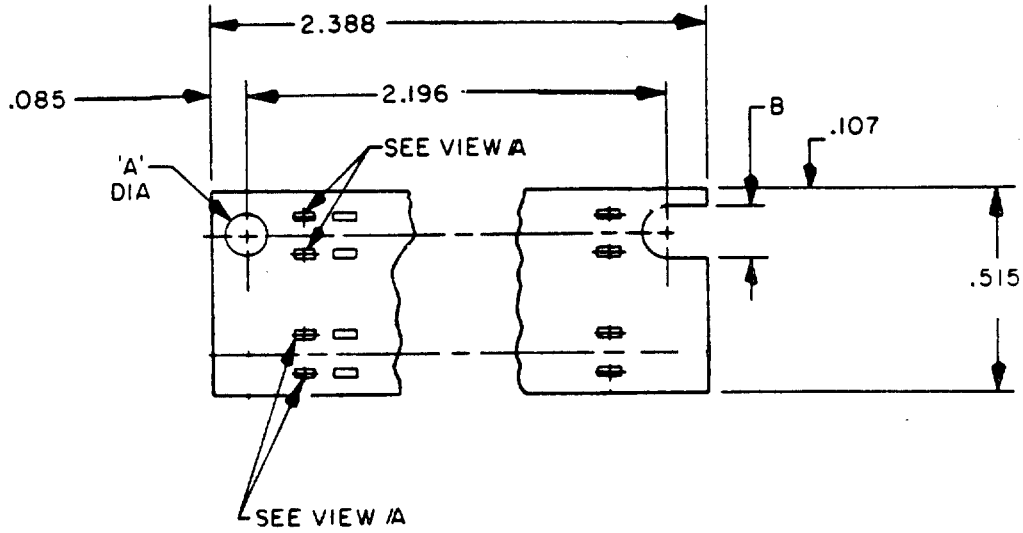

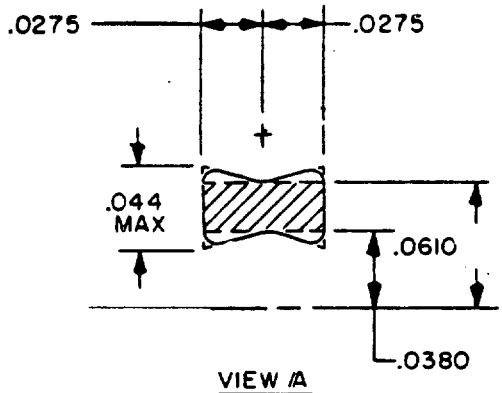

VIEW A
80 PLACES
FOR ALTN CONFIGURATION
SEE VIEW IB

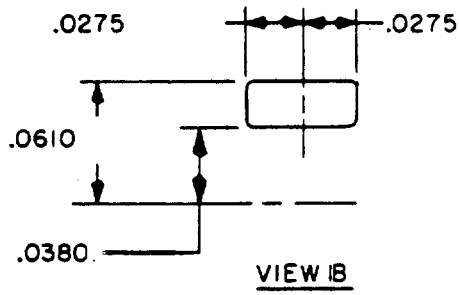


VIEW IB

DASH NUMBER	"A" DIA	"B" DIA	THICKNESS
01	.1005	.1255	.018
02	.1005	.1005	
03	.1255	.1255	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, FRAME, CASTING, TYPE IV, SINGLE SPAN


MIL-C-28754/22

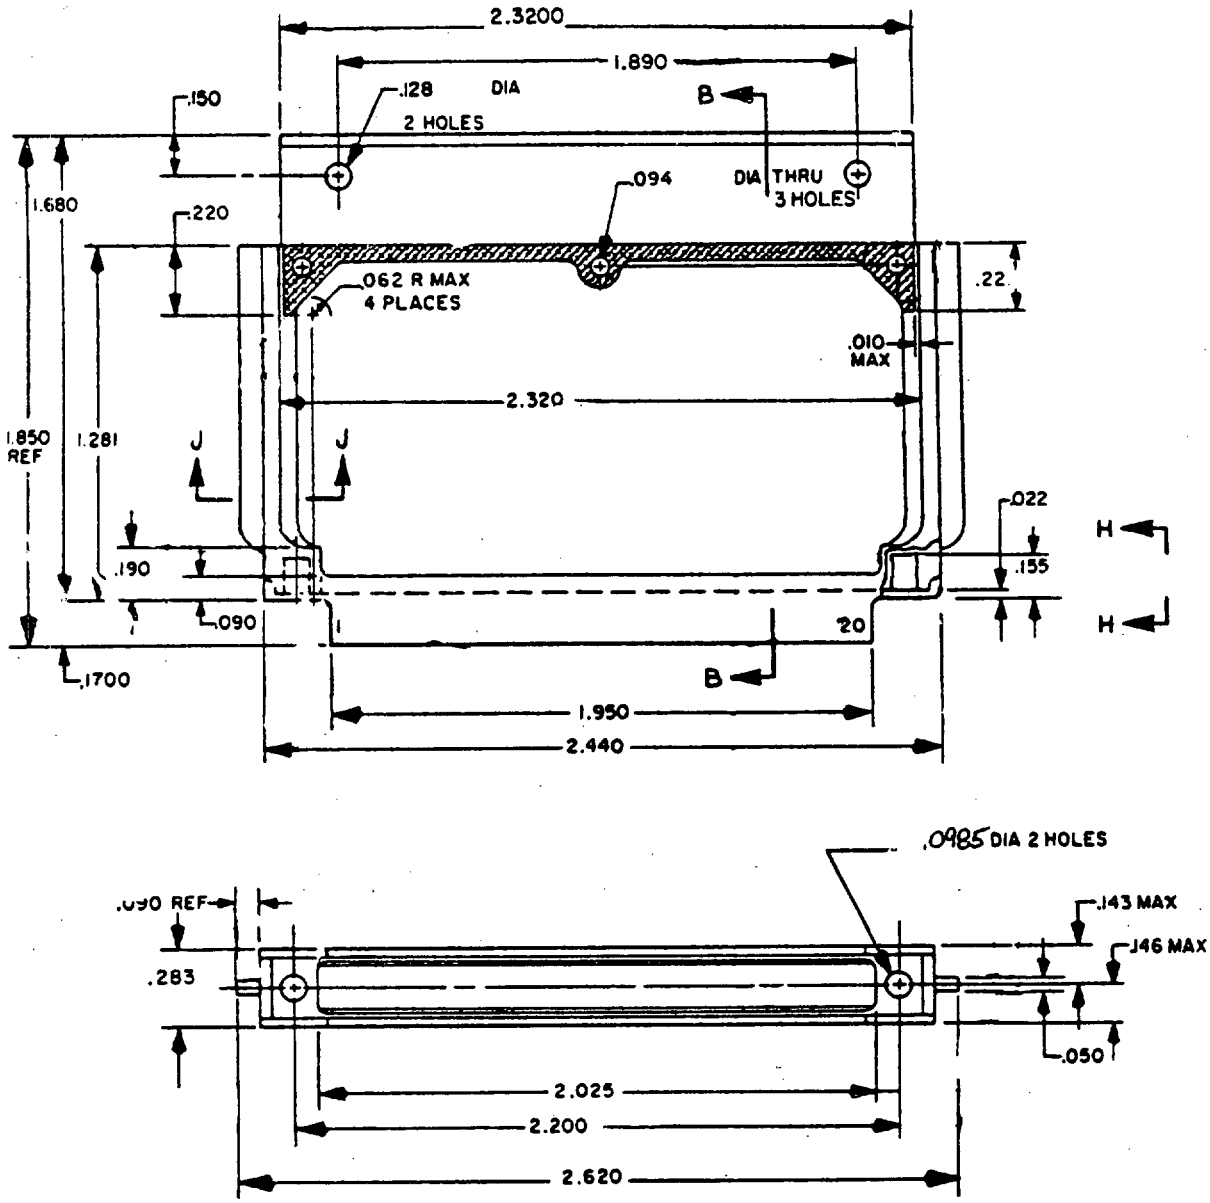


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, FRAME, CASTING, TYPE IV, SINGLE SPAN


MIL-C-28754/22

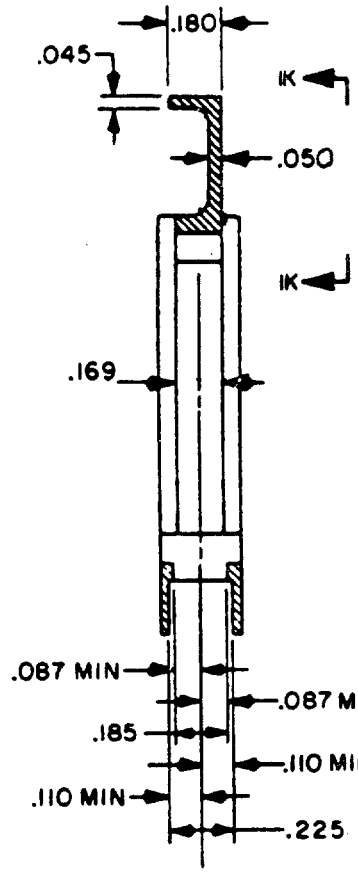


SECTION B-B



VIEW H-H



SECTION J-J



PARTIAL VIEW IK-IK


TABLE 1. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER	SURFACE TREATMENT
01	WITH ANODIZE AND CHEMICAL FILM
02	WITHOUT ANODIZING, WITHOUT CHEMICAL FILM, WITHOUT ANY MARKINGS
03	WITH ANODIZE, CHEMICAL FILM AND PIN SHIELD MARKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN


MIL-C-28754/23

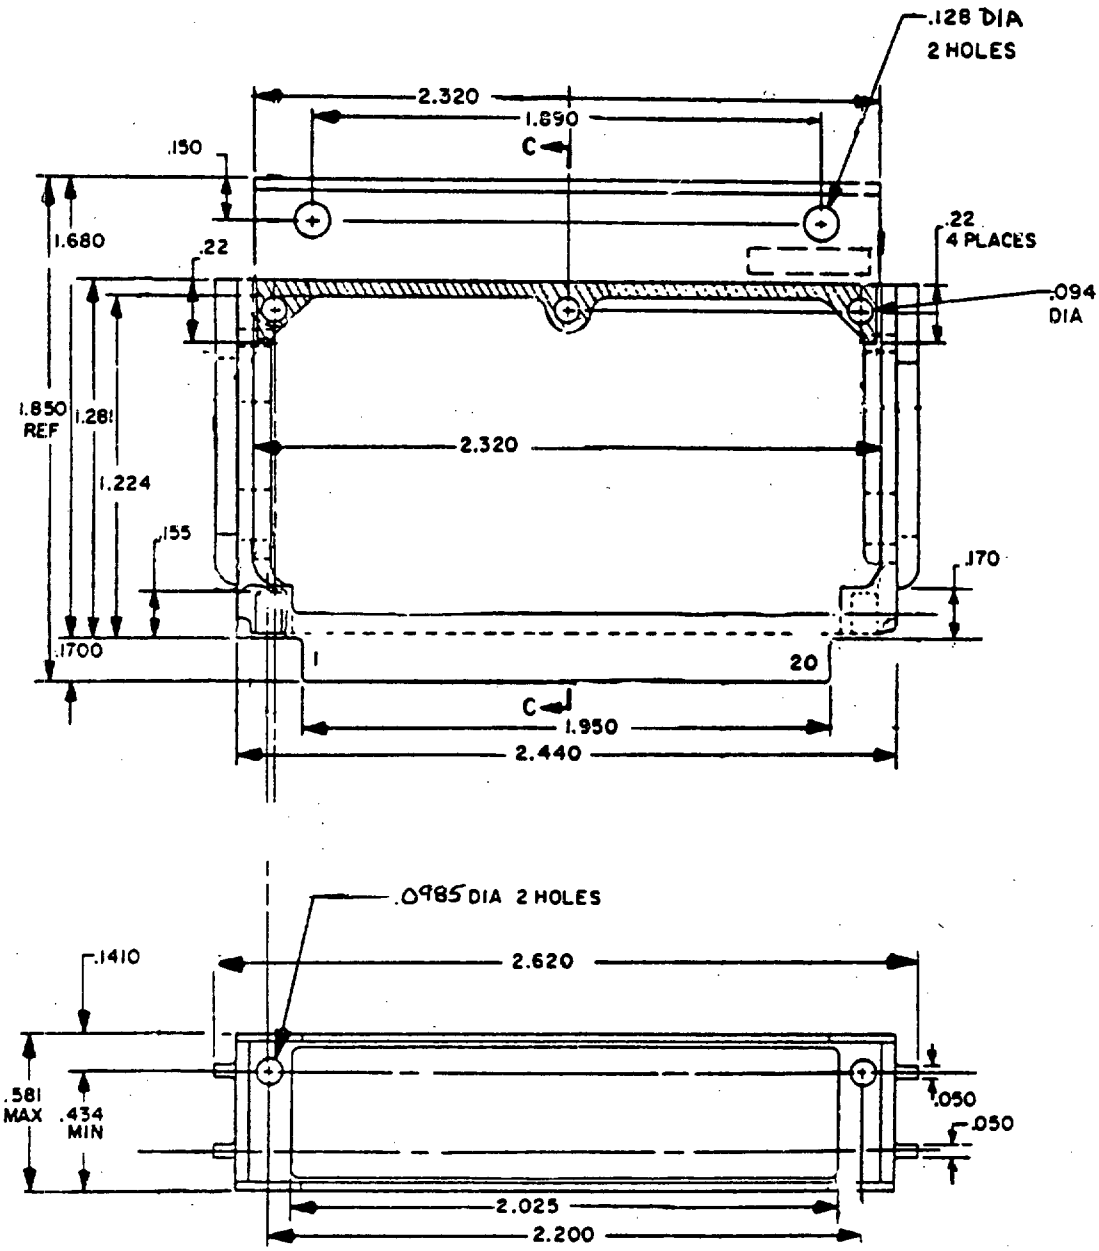


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN

MIL-C-28754/23



PARTIAL VIEW IE-IE

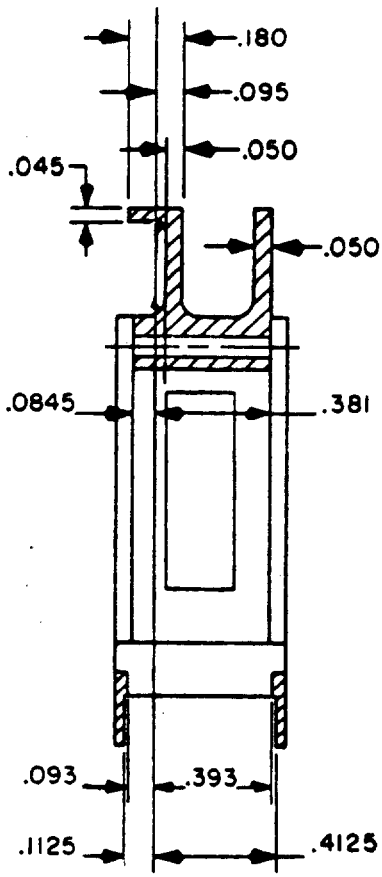

SECTION C-C

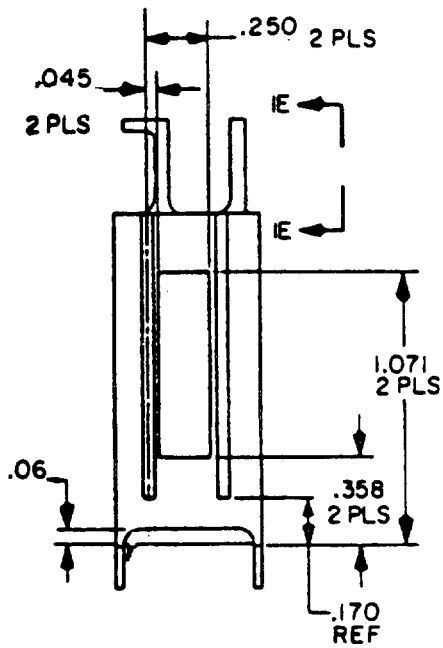



TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER	SURFACE TRETMENT
01	WITH ANODIZE AND CHEMICAL FILM
02	WITHOUT ANODIZE AND CHEMICAL FILM
03	WITHOUT ANODIZING, WITHOUT CHEMICAL FILM, WITHOUT ANY MARKING


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, PIN, KEYING

MIL-C-28754/24

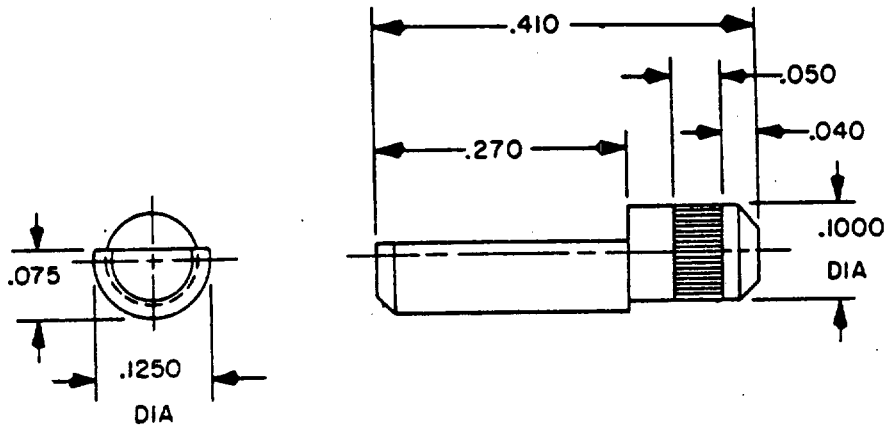

CONFIGURATION 1

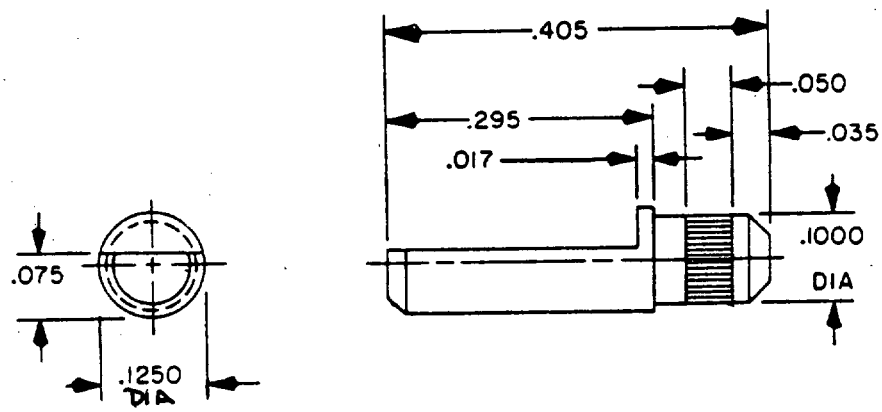



CONFIGURATION 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, PIN, KEYING

MIL-C-28754/24

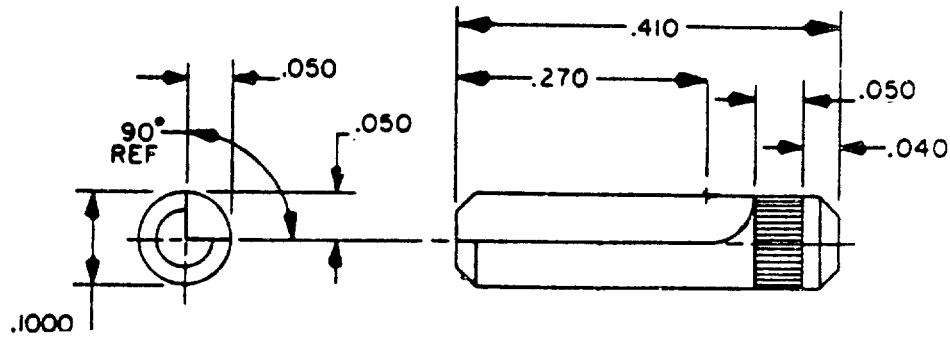

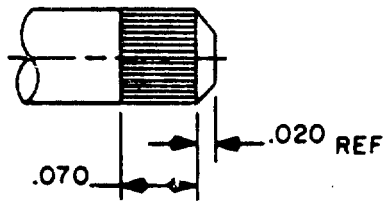

DETAIL - A
ALTN KNURL
CONFIGURATION

CONFIGURATION 3


TABLE I. DASH NUMBER AND CHARACTERISTICS.

DASH NUMBER	PIN CONFIGURATION	KNURL CONFIGURATION
01	1	STANDARD
02	2	
03	3	
04	1	PER DETAIL A
05	2	
06	3	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, 40-PIN, TWO PIECE INSERT AND 20-PIN, ONE HALF, ONE PIECE INSERT

MIL-C-28754/31

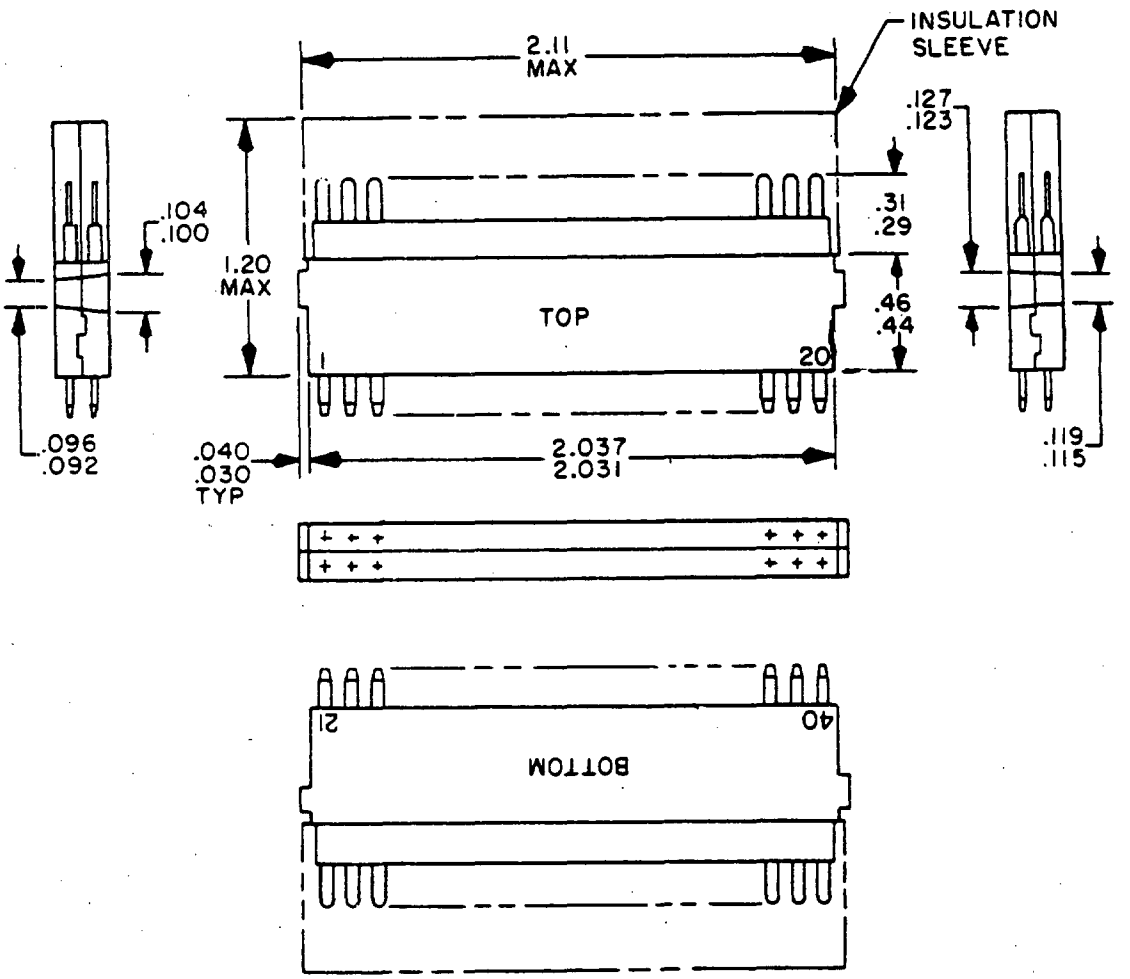

Top and bottom inserts.

FIG. 1A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, 40-PIN, TWO PIECE INSERT, AND 20-PIN, ONE HALF, ONE PIECE INSERT

MIL-C-28754/31

TABLE I. DASH NUMBER AND APPLICABLE INSERT.

DASH NUMBER	TOP INSERT MIL-C-28754/50	BOTTOM INSERT MIL-C-28754/51	FIGURE
01	01	01	1A
02		02, 04	1A
03		03	1A
04	02, 04	01	1A
05		02, 04	1A
06		03	1A
07	03	01	1A
08		02, 04	1A
09		03	1A

TABLE II. DESIGN CHARACTERISTICS.

CONDUCTOR SIZE (AWG)	CURRENT RATING (AMPS)	CONTACT RESISTANCE (MV)	DURABILITY (MV)	SOLDER JOINT RESISTANCE (MV)
20	3	20	20	4.0
22	3	20	20	4.0
24	3	20	20	4.0
26	2	13.3	13.3	4.0
28	1.5	10.0	10.0	4.0
30	1.0	6.7	6.7	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, STYLE I
SLIP LOCK COVER PLATE

MIL-C-28754/32

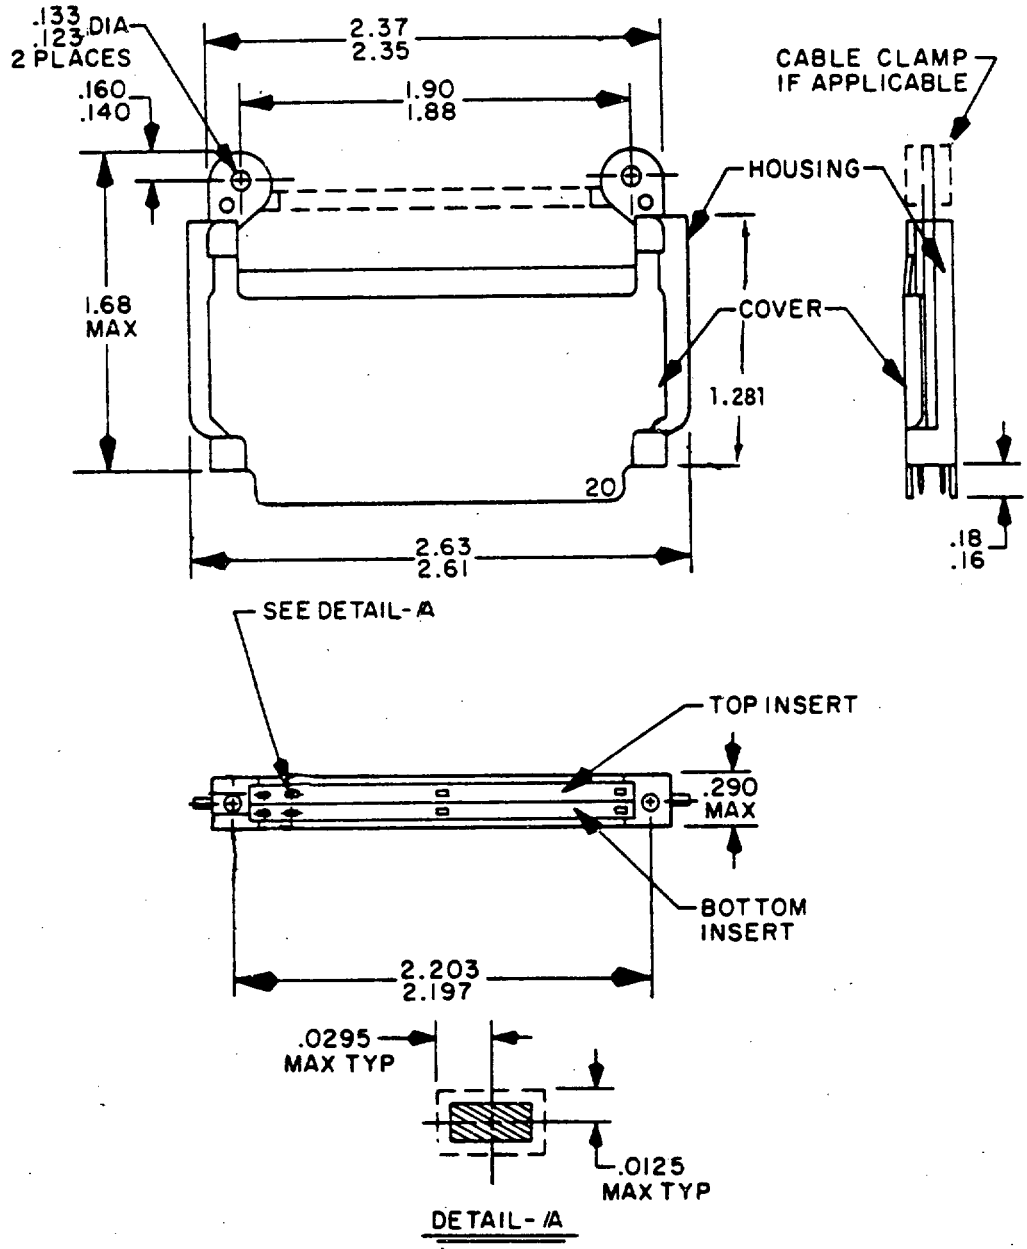


FIG 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, STYLE I
SLIP LOCK COVER PLATE

MIL-C-28754/32

TABLE I. DASH NUMBER AND APPLICABLE CONNECTOR, HOUSING AND CABLE CLAMP.

DASH NUMBER	CONNECTOR INSERT	HOUSING ASSEMBLY	CABLE CLAMP
11	M28754/31-05	M28754/52-01	N/A
12	M28754/31-06	M28754/52-01	N/A
14	M28754/31-08	M28754/52-01	N/A
15	M28754/31-09	M28754/52-01	N/A
20	M28754/31-05	M28754/52-01	M28754/32-02
21	M28754/31-06	M28754/52-01	M28754/32-02
22	M28754/31-08	M28754/52-01	M28754/32-02
23	M28754/31-09	M28754/52-01	M28754/32-02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, STYLE 11, SLIP LOCK COVER PLATE

MIL-C-28754/33

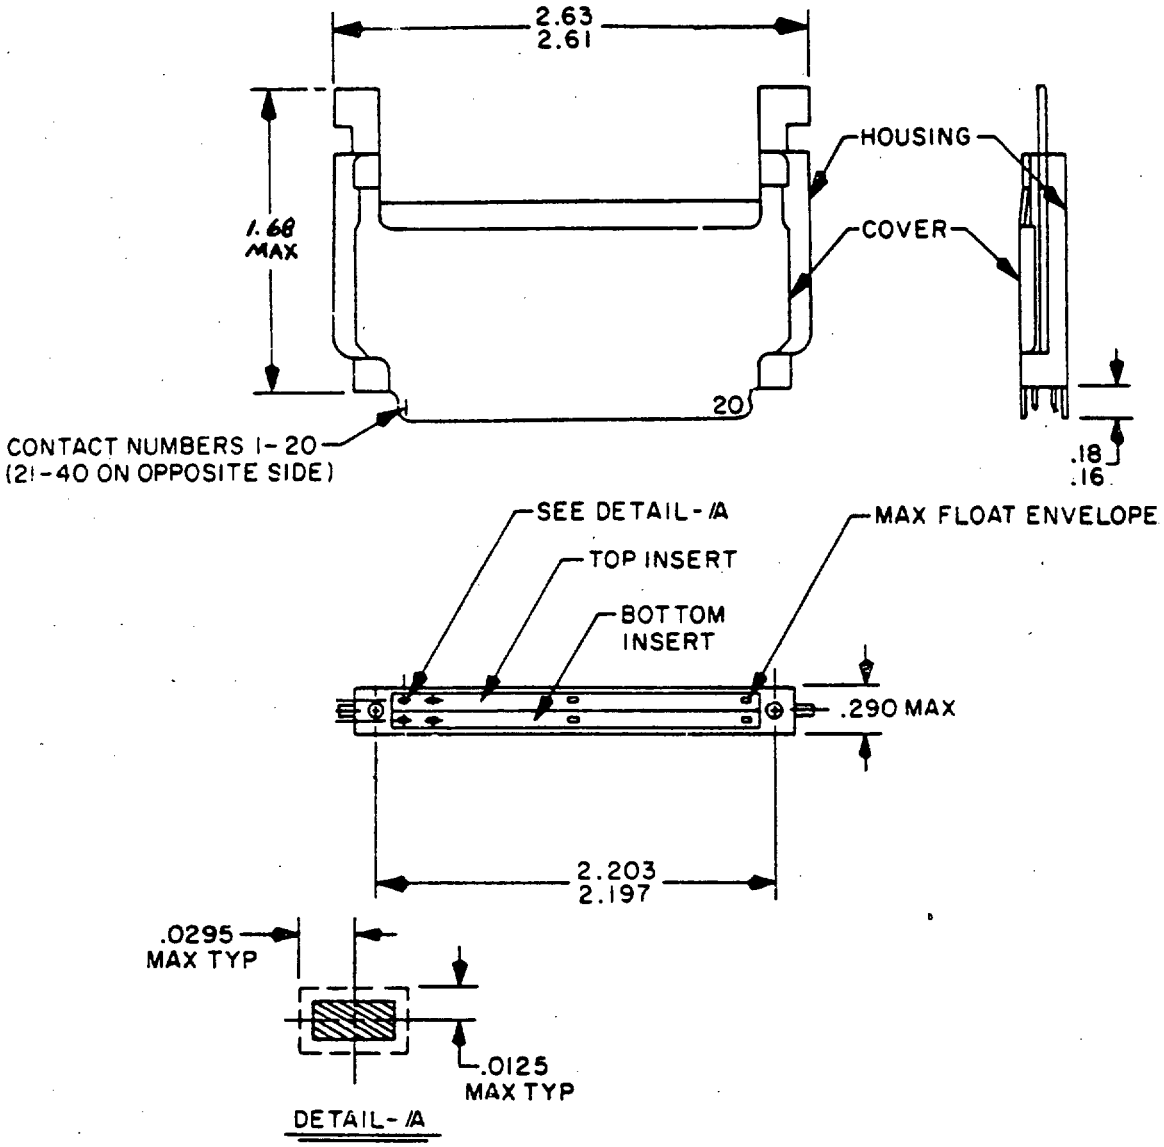


FIG 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, STYLE 11, SLIP LOCK COVER PLATE

MIL-C-28754/33

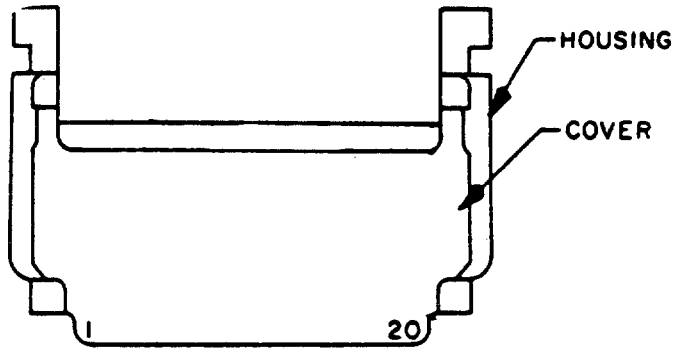


FIG 2

COVER PLATE AND HOUSING: MIL-C-28754/53


TABLE I. DASH NUMBER AND APPLICABLE CONNECTOR(S).

DASH NUMBER	FIGURE	CONNECTOR INSERT	HOUSING
01	2	N/A	M28754/53-01
07	1	M28754/31-01	
08	1	M28754/31-02	
09	1	M28754/31-03	
10	1	M28754/31-04	
11	1	M28754/31-05	
12	1	M28754/31-06	
13	1	M28754/31-07	
14	1	M28754/31-08	
15	1	M28754/31-09	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND INSULATOR BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/34

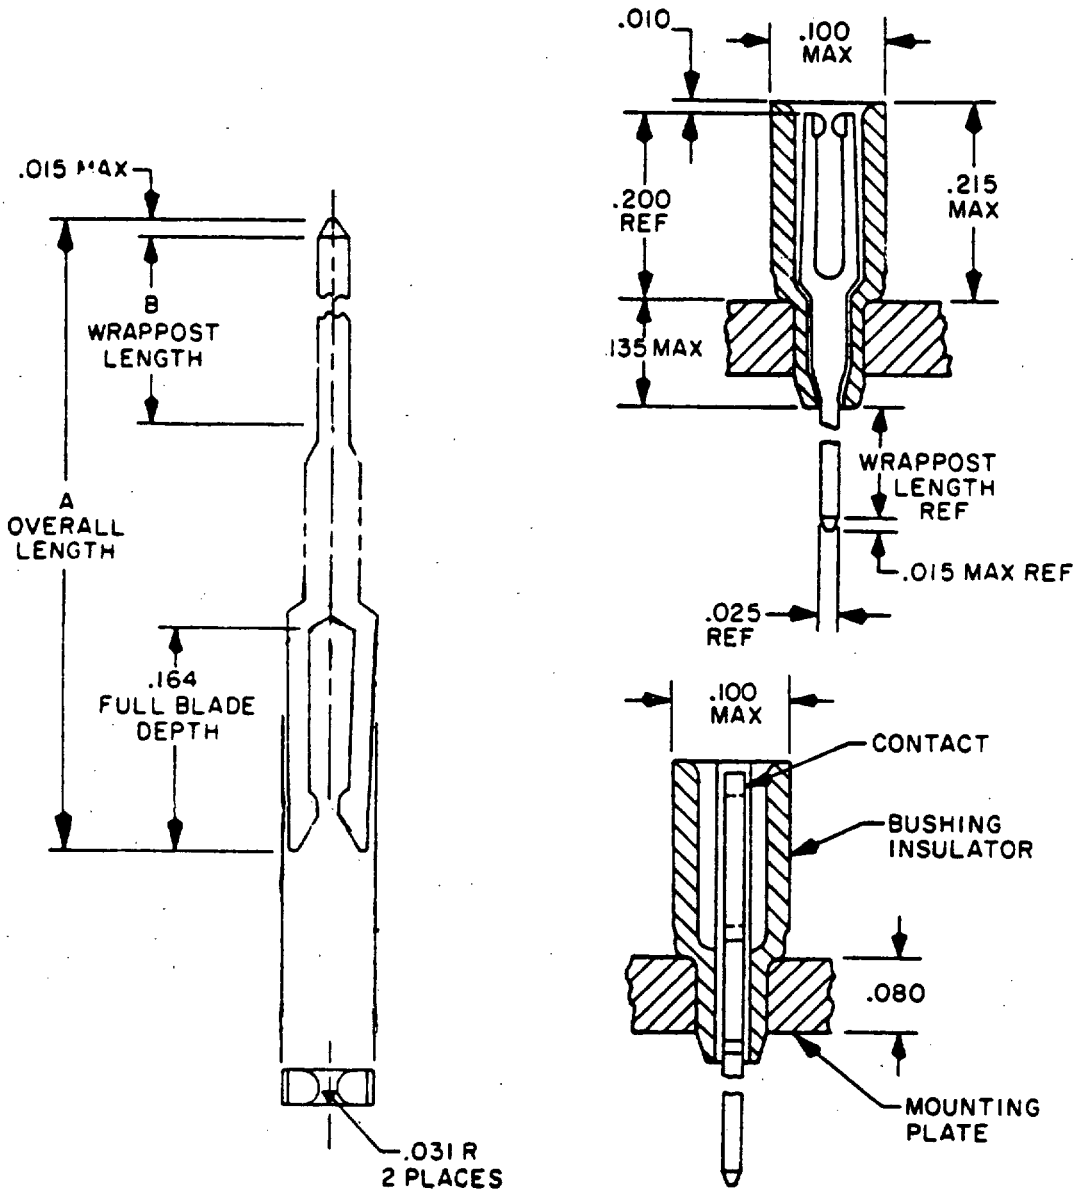

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR TYPE 111, FEMALE CONTACT AND INSULATOR BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/34

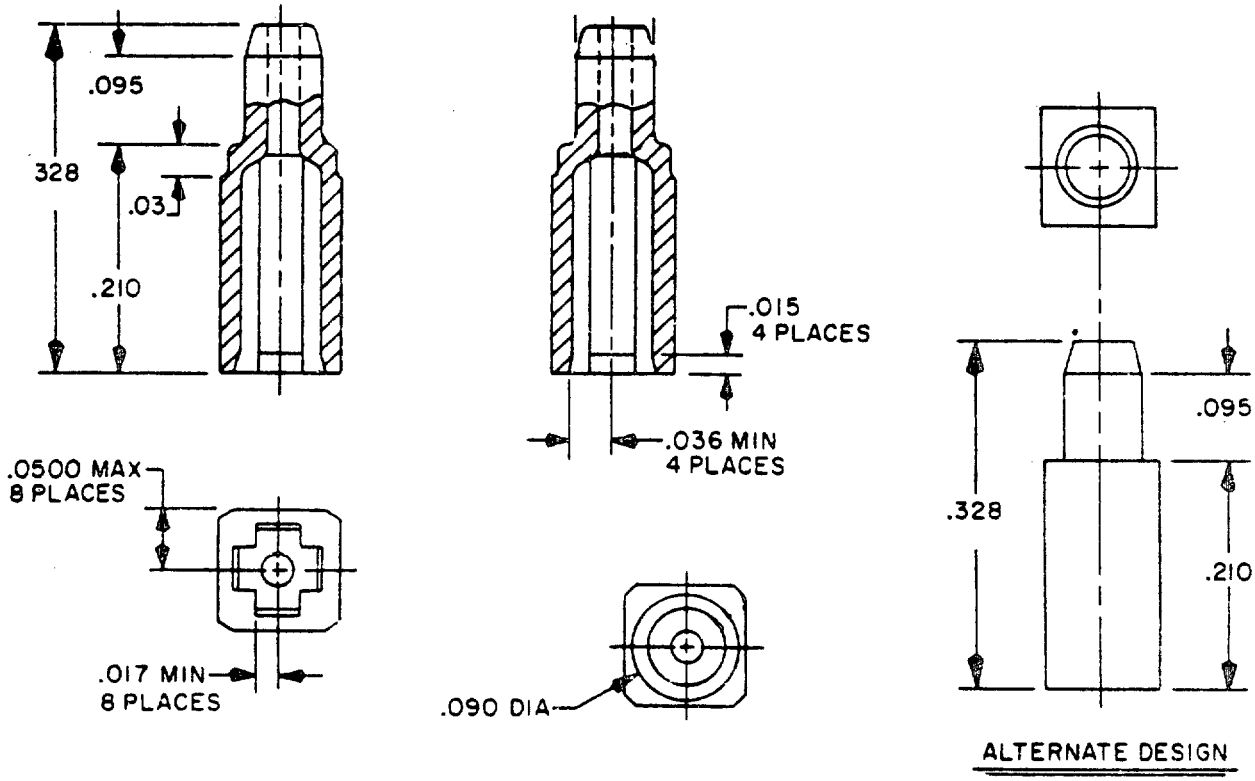



TABLE 1. DASH NUMBERS AND DIMENSIONS.


DASH NUMBER	OVERALL LENGTH "A"	WRAPPOST LENGTH "B" (REF)
01	0.513	0.175
02	0.588	0.250
03	0.688	0.350
04	0.838	0.500
05	0.963	0.625
06	1.088	0.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR TYPE III, MALE CONTACT AND INSULATOR BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/35

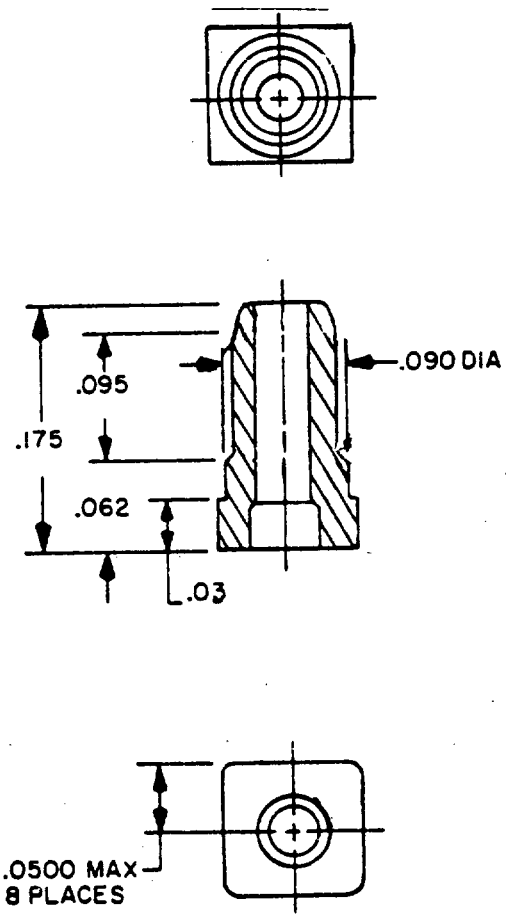

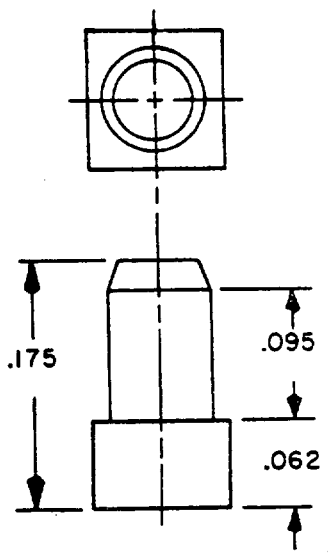



ALTERNATE DESIGN

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR TYPE 111, MALE CONTACT AND INSULATOR BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/35

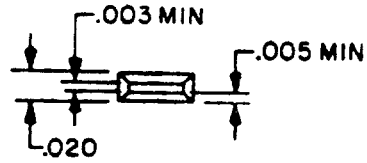

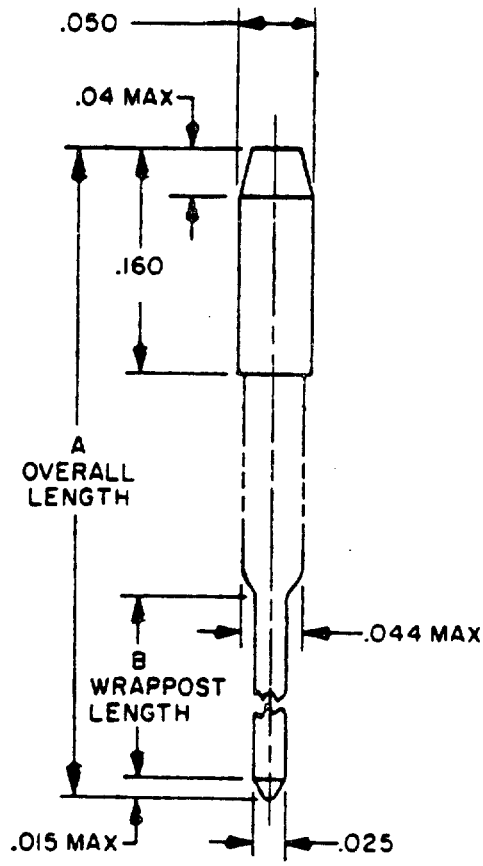

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR TYPE 111, MALE CONTACT AND INSULATOR BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/35

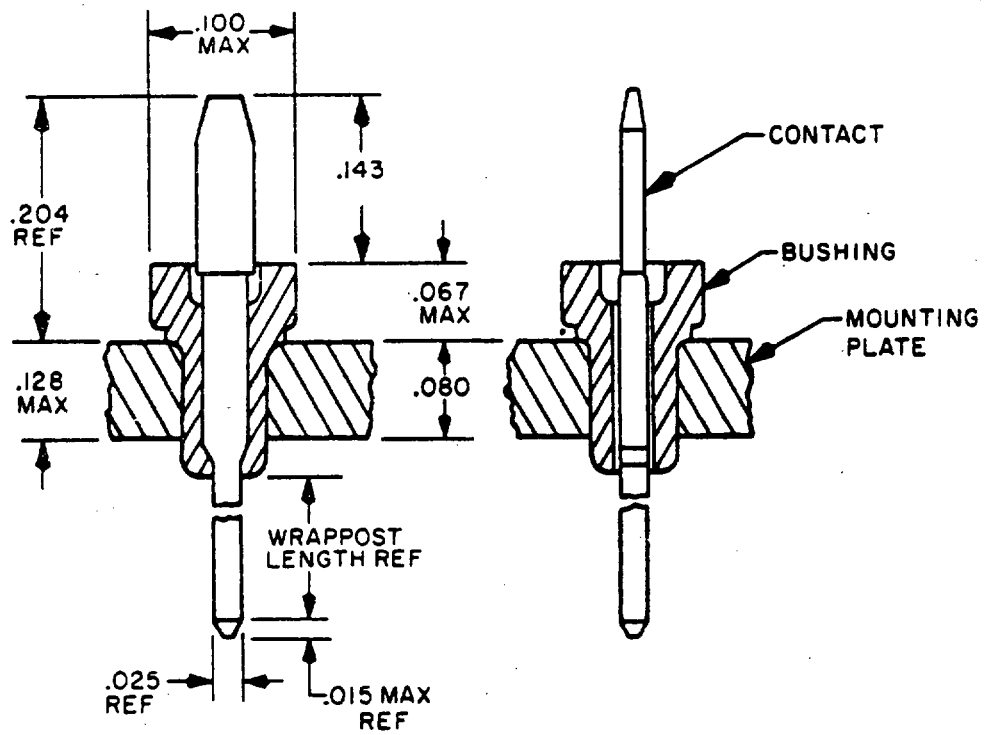



TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	OVERALL LENGTH "A"	WRAPPOST LENGTH "B" (REF)
01	0.513	0.175
02	0.588	0.250
03	0.688	0.350
04	0.838	0.500
05	0.963	0.625
06	1.088	0.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE 111, FEMALE CONTACT AND GROUNDING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL


MIL-C-28754/36

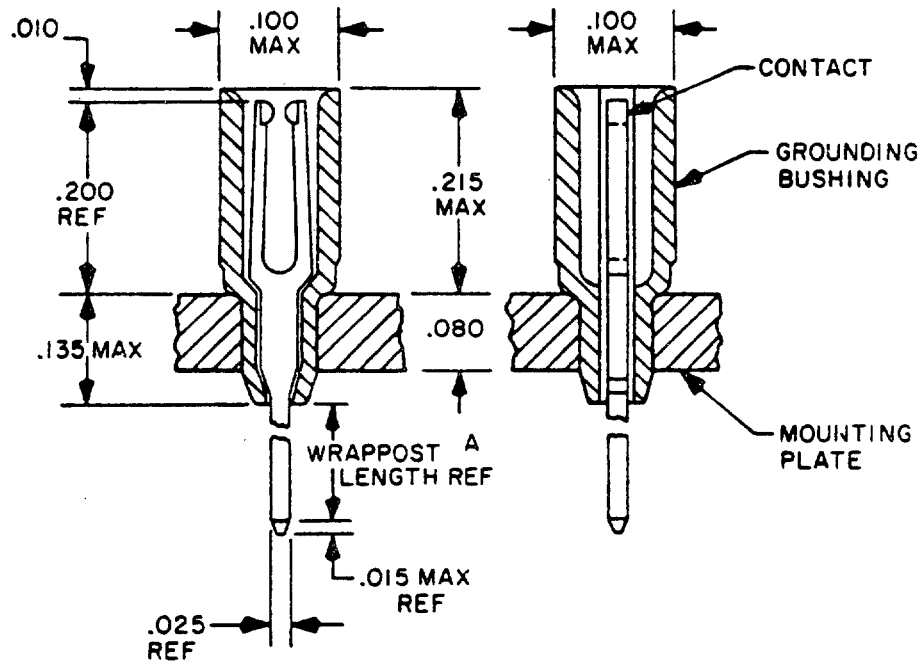

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE 111, FEMALE CONTACT AND GROUNDING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/36

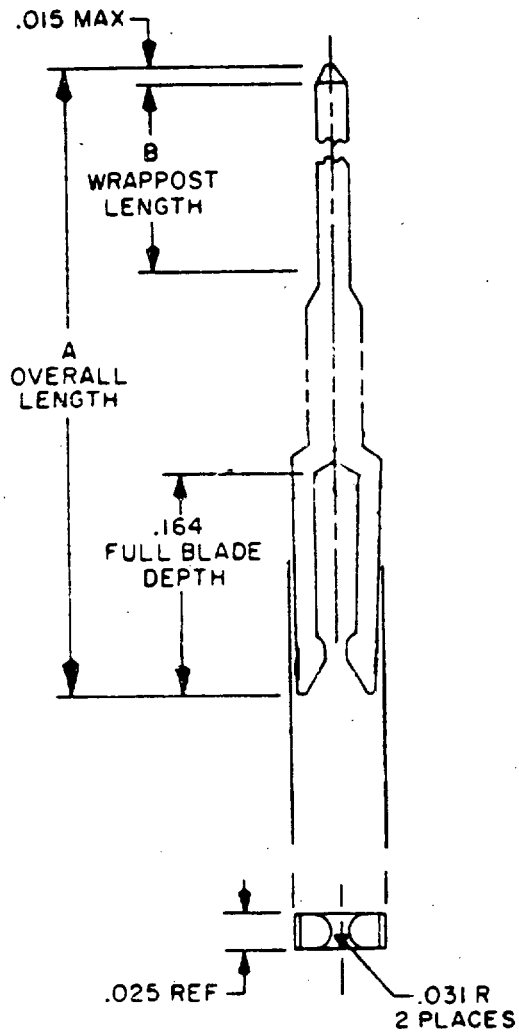

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND GROUNDING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/36

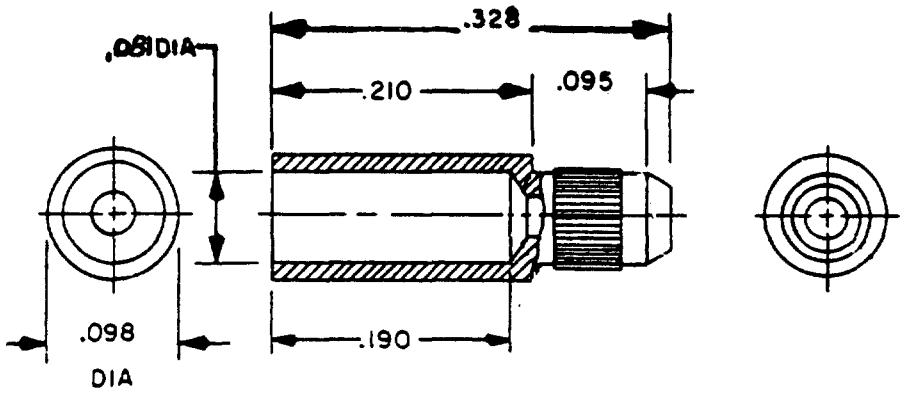


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	OVERALL LENGTH "A"	WRAPPOST LENGTH "B" (REF)
01	0.513	0.175
02	0.588	0.250
03	0.688	0.350
04	0.838	0.500
05	0.963	0.625
06	1.088	0.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE 111, FEMALE CONTACT AND POLARIZATION BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/37

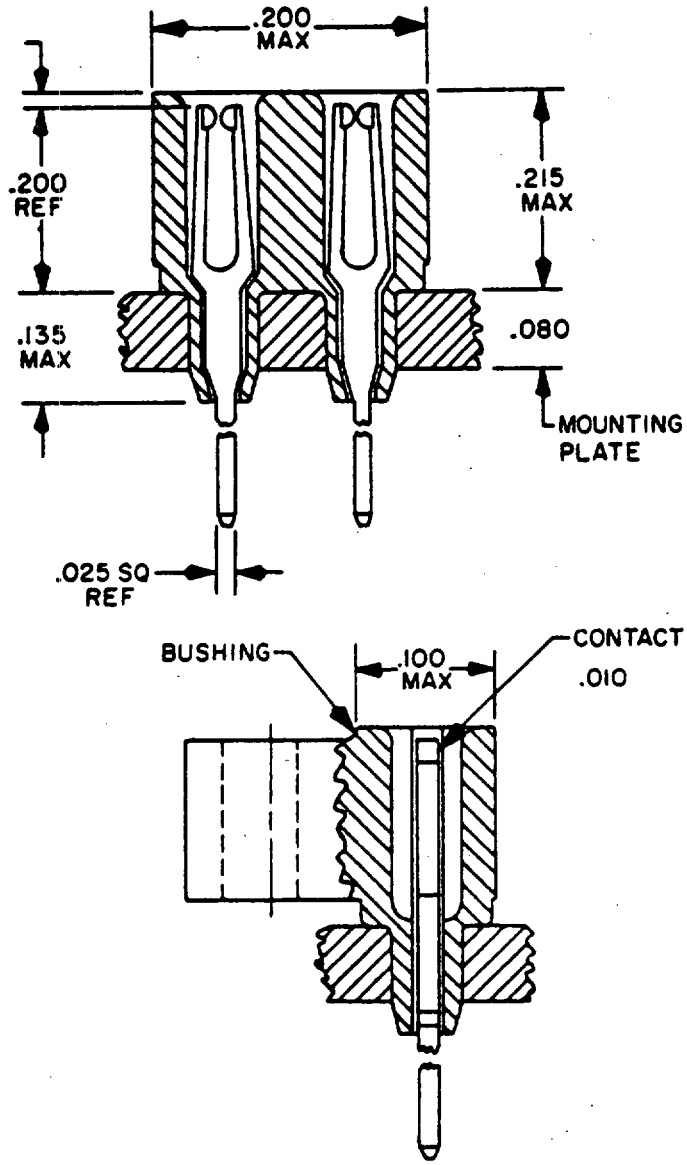


FIG 1


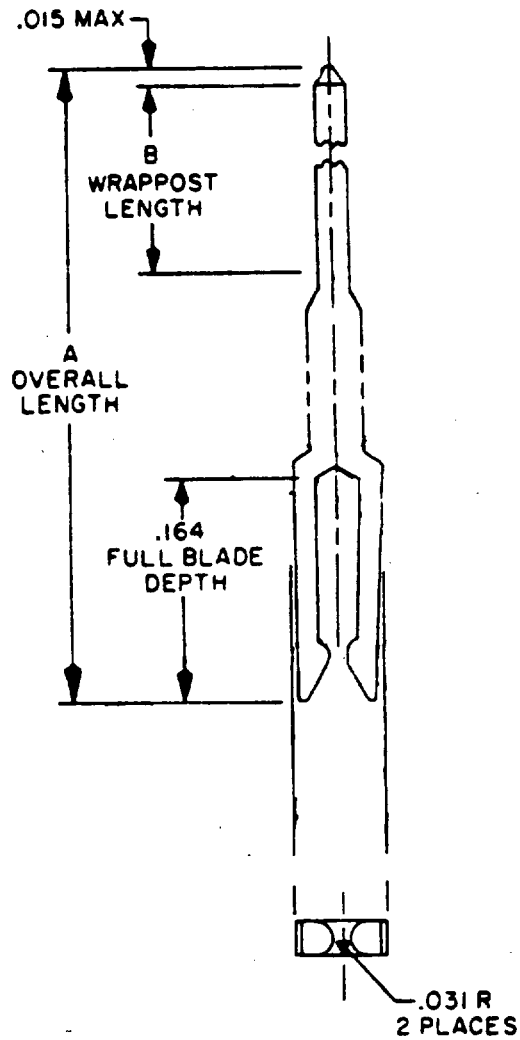


FIG 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND POLARIZING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/37

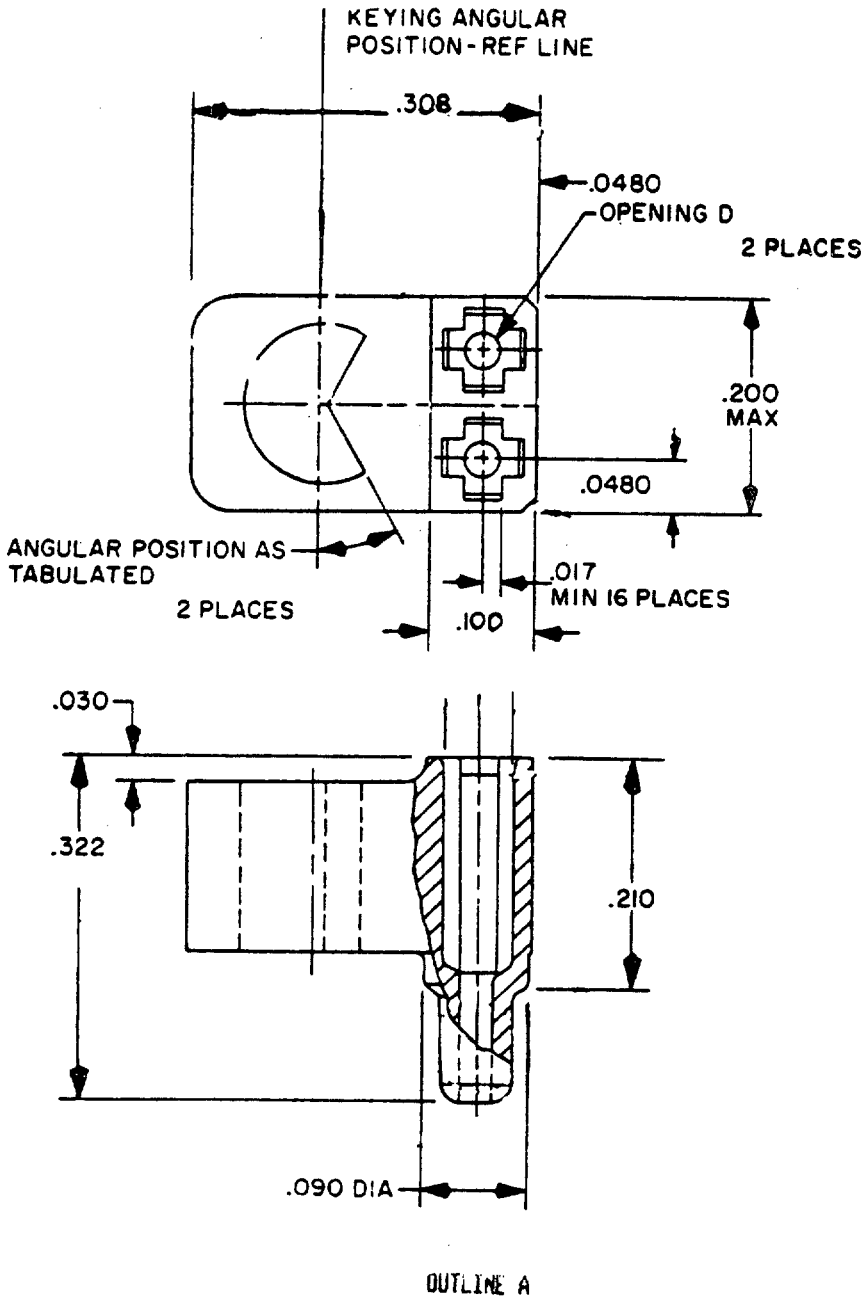

OUTLINE A

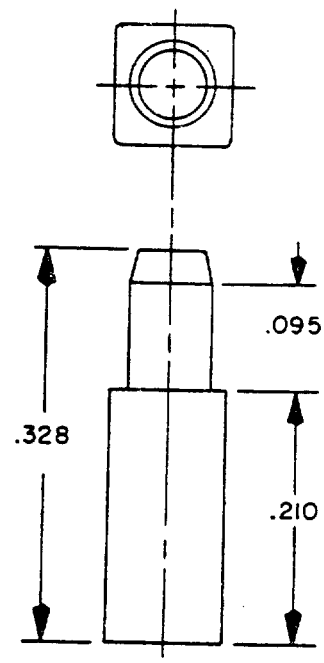


ALTERNATE DESIGN


FIG 3A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND POLARIZING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/37

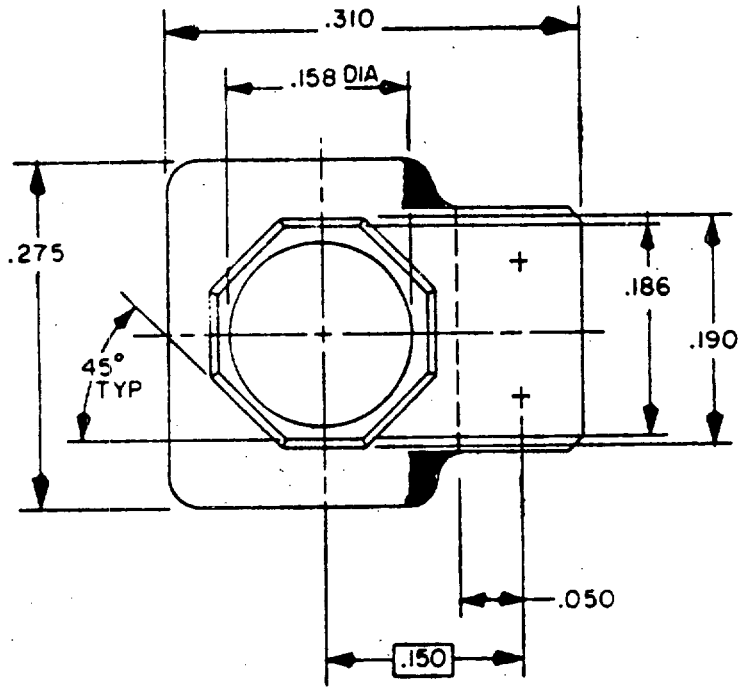


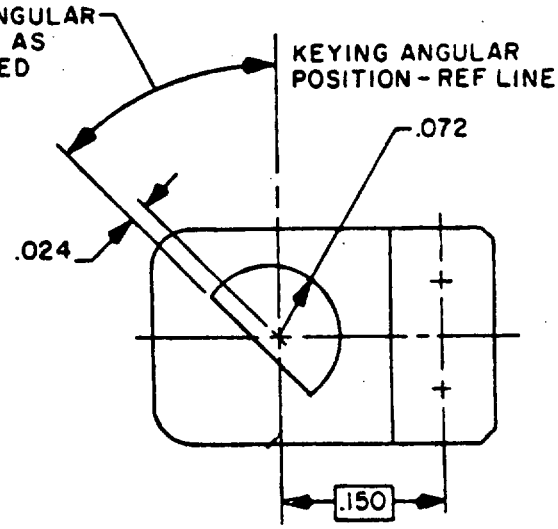

OUTLINE B

OTHERWISE SAME AS OUTLINE A

FIG 3B

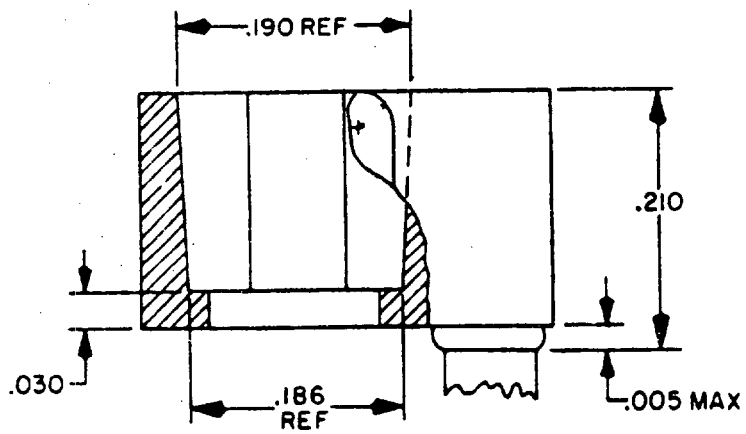

OUTLINE C

OTHERWISE SAME AS OUTLINE A

FIG 3C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND POLARIZING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/37

POLARIZING STYLE	OUTLINE LETTER	KEYING POSITION AS VIEWED AT BUSHINGS TOP SURFACE
C	A	0° 
B	A	45° 
C	A	90° 
D	A	135° 
E	A	180° 
F	A	225° 
G	A	270° 
H	A	315° 
L	B	0° 


POLARIZING STYLE	OUTLINE LETTER	KEYING POSITION AS VIEWED AT BUSHINGS TOP SURFACE
J	B	45° 
K	B	90° 
L	B	135° 
M	B	180° 
N	B	225° 
P	B	270° 
Q	B	315° 
R	SAME AS 'A' EXCEPT- FOR THRU HOLE AS SHOWN	.093° DIA. 
S	C	

FIG 3D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND POLARIZING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/37

TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	POLARIZING STYLE	OVERALL LENGTH "A"	WRAPPOST LENGTH "B" (REF)
01	A	0.513	0.175
02	B	0.513	0.175
03	C	0.513	0.175
04	D	0.513	0.175
05	E	0.513	0.175
06	F	0.513	0.175
07	G	0.513	0.175
08	H	0.513	0.175
09	I	0.513	0.175
10	J	0.513	0.175
11	K	0.513	0.175
12	L	0.513	0.175
13	M	0.513	0.175
14	N	0.513	0.175
15	P	0.513	0.175
16	Q	0.513	0.175
17	R	0.513	0.175
18	S	0.513	0.175
19	A	0.588	0.250
20	B	0.588	0.250
21	C	0.588	0.250
22	D	0.588	0.250
23	E	0.588	0.250
24	F	0.588	0.250
25	G	0.588	0.250
26	H	0.588	0.250
27	I	0.588	0.250
28	J	0.588	0.250
29	K	0.588	0.250
30	L	0.588	0.250
31	M	0.588	0.250
32	N	0.588	0.250
33	P	0.588	0.250
34	Q	0.588	0.250
35	R	0.588	0.250
36	S	0.588	0.250
37	A	0.688	0.350
38	B	0.688	0.350
39	C	0.688	0.350
40	D	0.688	0.350
41	E	0.688	0.350
42	F	0.688	0.350
43	G	0.688	0.350
44	H	0.688	0.350
45	I	0.688	0.350

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND POLARIZING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/37

TABLE I. DASH NUMBERS AND DIMENSIONS. - CONTINUED

DASH NUMBER	POLARIZING STYLE (FIGURE 3B)	OVERALL LENGTH "A"	WRAPPOST LENGTH "B" (REF)
46	J	0.688	0.350
47	K	0.688	0.350
48	L	0.688	0.350
49	M	0.688	0.350
50	N	0.688	0.350
51	P	0.688	0.350
52	Q	0.688	0.350
53	R	0.688	0.350
54	S	0.688	0.350
55	A	0.838	0.500
56	B	0.838	0.500
57	C	0.838	0.500
58	D	0.838	0.500
59	E	0.838	0.500
60	F	0.838	0.500
61	G	0.838	0.500
62	H	0.838	0.500
63	I	0.838	0.500
64	J	0.838	0.500
65	K	0.838	0.500
66	L	0.838	0.500
67	M	0.838	0.500
68	N	0.838	0.500
69	P	0.838	0.500
70	Q	0.838	0.500
71	R	0.838	0.500
72	S	0.838	0.500
73	A	0.963	0.625
74	B	0.963	0.625
75	C	0.963	0.625
76	D	0.963	0.625
77	E	0.963	0.625
78	F	0.963	0.625
79	G	0.963	0.625
80	H	0.963	0.625
81	I	0.963	0.625
82	J	0.963	0.625
83	K	0.963	0.625
84	L	0.963	0.625
85	M	0.963	0.625
86	N	0.963	0.625

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE III, FEMALE CONTACT AND POLARIZING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C28754/37

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED.


DASH NUMBER	POLARIZING STYLE (FIGURE 3D)	OVERALL LENGTH "A"	WRAPPOST LENGTH "B" (REF)
87	P	0.963	0.625
88	Q	0.963	0.625
89	R	0.963	0.625
90	S	0.963	0.625
91	A	1.088	0.750
92	B	1.088	0.750
93	C	1.088	0.750
94	D	1.088	0.750
95	E	1.088	0.750
96	F	1.088	0.750
97	G	1.088	0.750
98	H	1.088	0.750
99	J	1.088	0.750
100	J	1.088	0.750
101	K	1.088	0.750
102	L	1.088	0.750
103	M	1.088	0.750
104	N	1.088	0.750
105	P	1.088	0.750
106	Q	1.088	0.750
107	R	1.088	0.750
108	S	1.088	0.750

KEYING PEGS FOR INSERTIONS INTO THE OCTAL HOLE ARE COVERED BY MIL-C28754/39.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, WRAPPOST CONTACT AND GROUNDING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL


MIL-C-28754/38

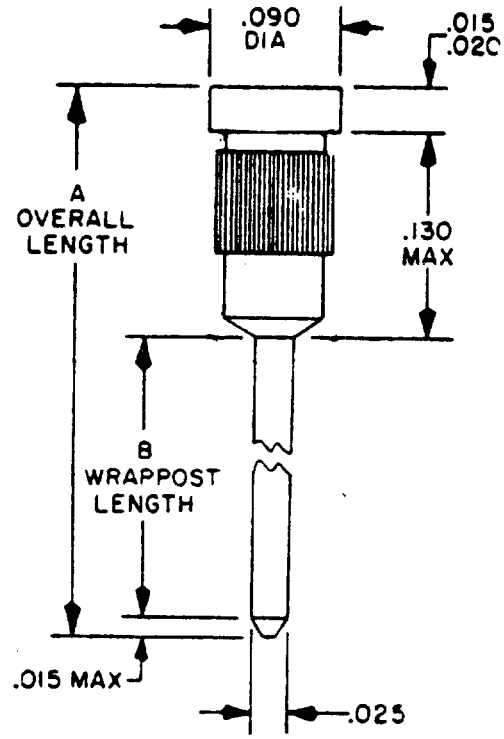

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, WRAPPOST CONTACT AND GROUNDING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C28754/38

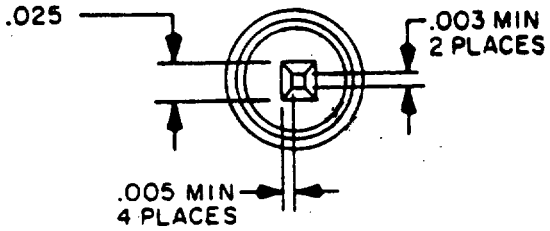

OPTIONAL DESIGN

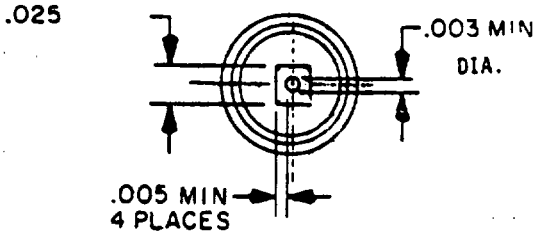


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	OVERALL LENGTH "A"	WRAPPOST LENGTH "B" (REF)
01	0.320	0.175
02	0.395	0.250
03	0.495	0.350
04	0.645	0.500
05	0.770	0.625
06	0.895	0.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, KEYING PEGS

MIL-C-28754/39

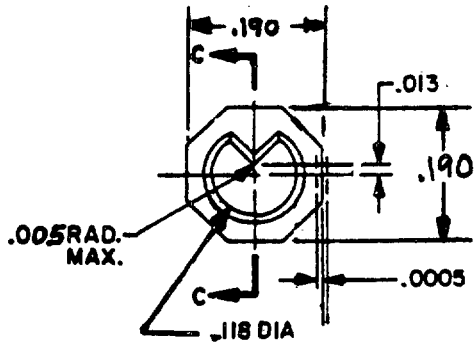


FIGURE 1A




FIGURE 1B
OUTSIDE DIMENSIONS
SAME AS FIGURE 1A






FIGURE 1C
OUTSIDE DIMENSIONS
SAME AS FIGURE 1A

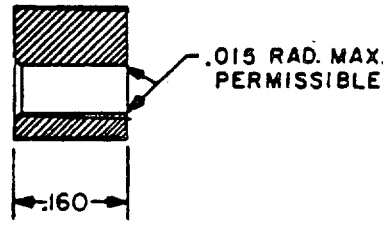

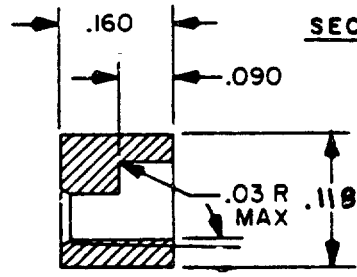

SECTION C-C

SECTION C-C (OPTIONAL)

TABLE 1. DASH NUMBERS AND CHARACTERISTICS.

DASH NUMBER	FIGURE NUMBER	MATERIAL	SUPERSEDES NAVORD PART NUMBER	MIL-C-28754/24 MATING KEYING PIN
001	1A	POLYCARBONATE	2300799-1	M28754/24-03
002	1B		2300799-2	M28754/24-01 OR 02
003	1C		2300799-3	NOT APPLICABLE
005	1B	SINTERED METAL		M28754/24-01 OR 02
006	1C			NOT APPLICABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SCREW

MIL-C-28754/40

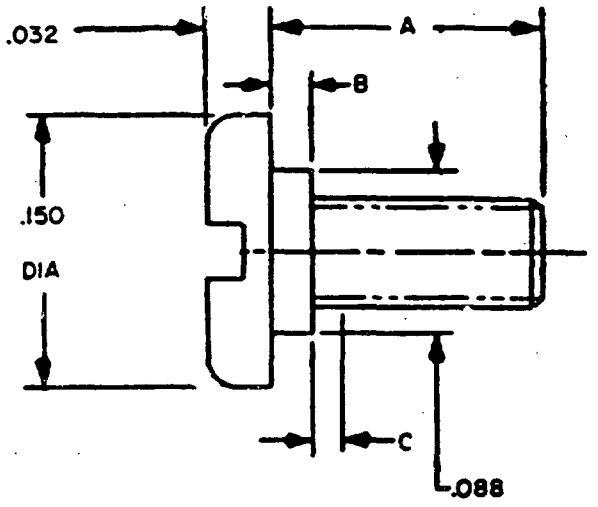


TABLE I. DIMENSIONS AND SUPERSESSION DATA.

PART NUMBER	DIMENSIONS			USED WITH
	A	B	C	
M28754/40-01	.160	.023	2 MAX IMPERFECT THREADS	MIL-C-28754/21 MIL-C-28754/22
M28754/40-02	.460	.070	2 1/2 MAX IMPERFECT THREADS	
M28754/40-03	.460	.023	2 1/2 MAX IMPERFECT THREADS	MIL-C-28754/25

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SCREW, INSERT

MIL-C-28754/41

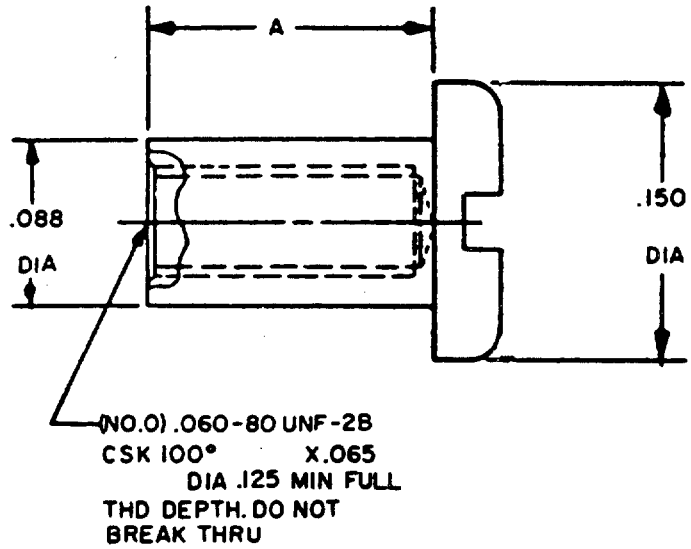



TABLE I. DIMENSIONS AND SUPERSESSION DATA.

PART NUMBER	DIMENSION A	USED WITH
M29754/41-01	.155	MIL-C-28754/21 MIL-C-28754/22
M28754/41-02	.437	MIL-C-28754/23
M28754/41-03	1.344	
M28754/41-04	.485	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, 100 PIN, CONTACT TAILS, RIGHT ANGLE, .050 CENTERS


MIL-C-28754/47

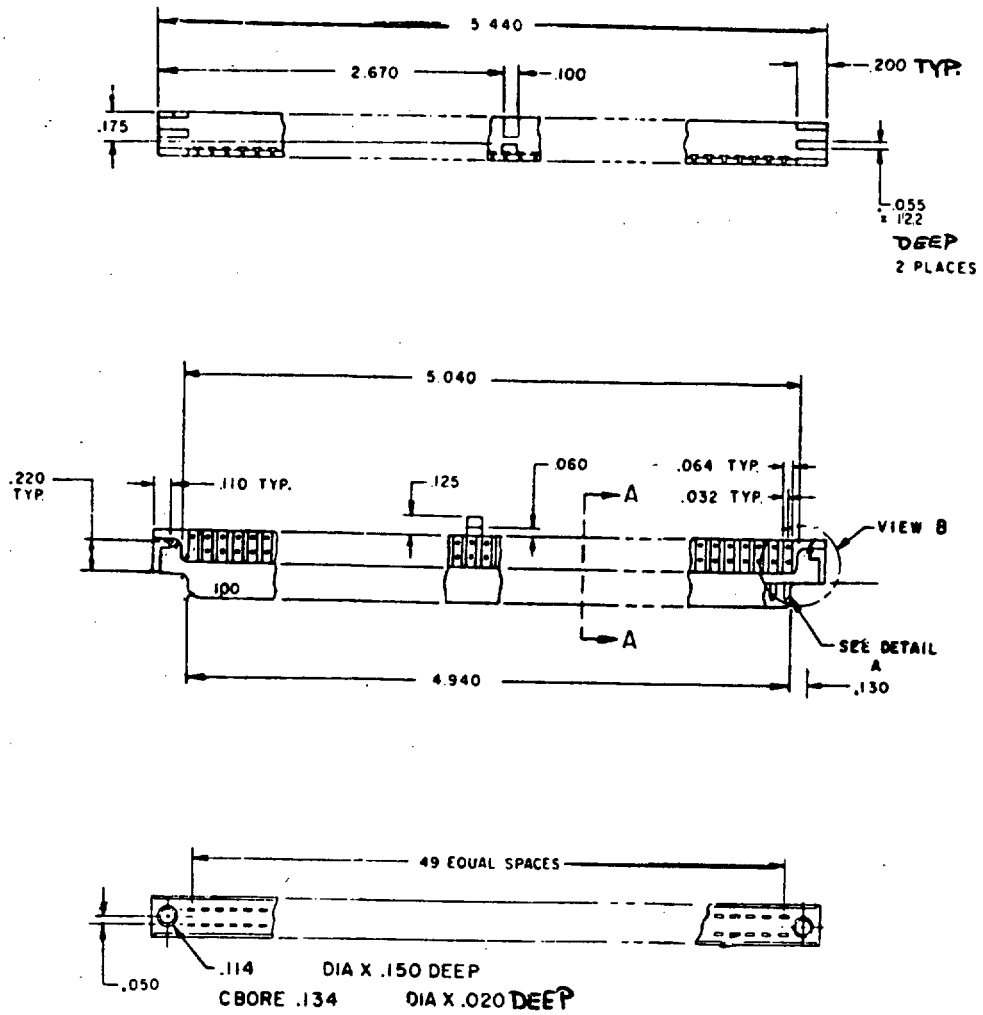


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, 100 PIN, CONTACT TAILS, RIGHT ANGLE, .050 CENTERS

MIL-C-28754/47

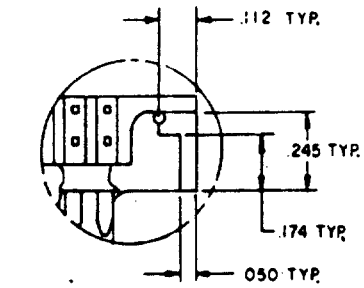


VIEW B

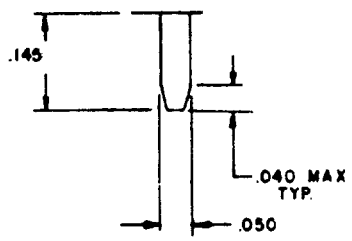

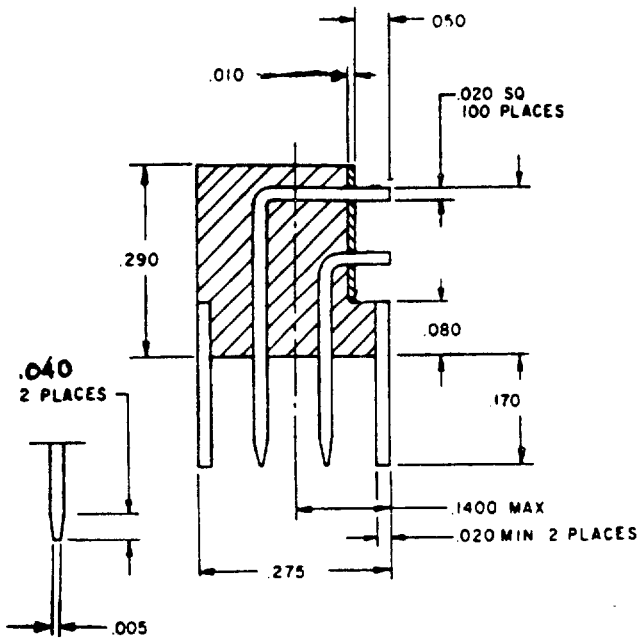

SECTION A-A




DETAIL A

PART NUMBER: M28754/47-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SINGLE SPAN

MIL-C-28754/48

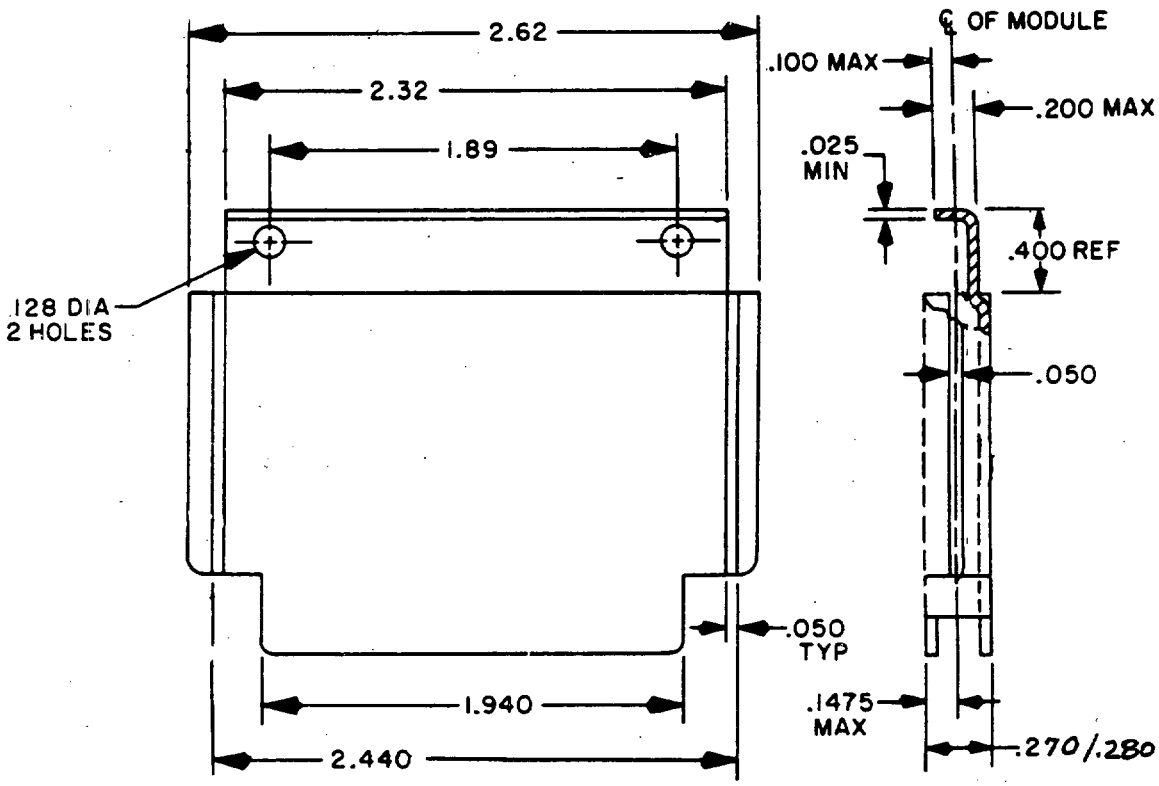

COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SINGLE SPAN

MIL-C-28754/48

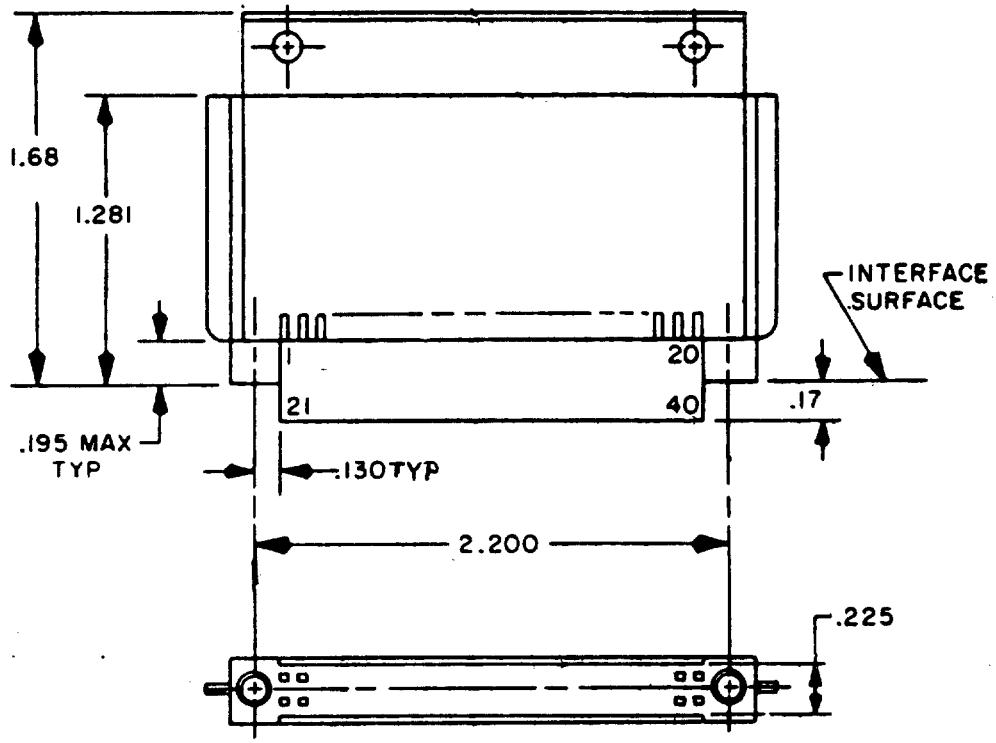



TABLE I. DASH NUMBER AND APPLICABLE CONNECTOR.

DASH NUMBER	APPLICABLE CONNECTOR	DESCRIPTION
02	M28754/18-04	UNINSULATED PIN SHIELD


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING

MIL-C-28754/49

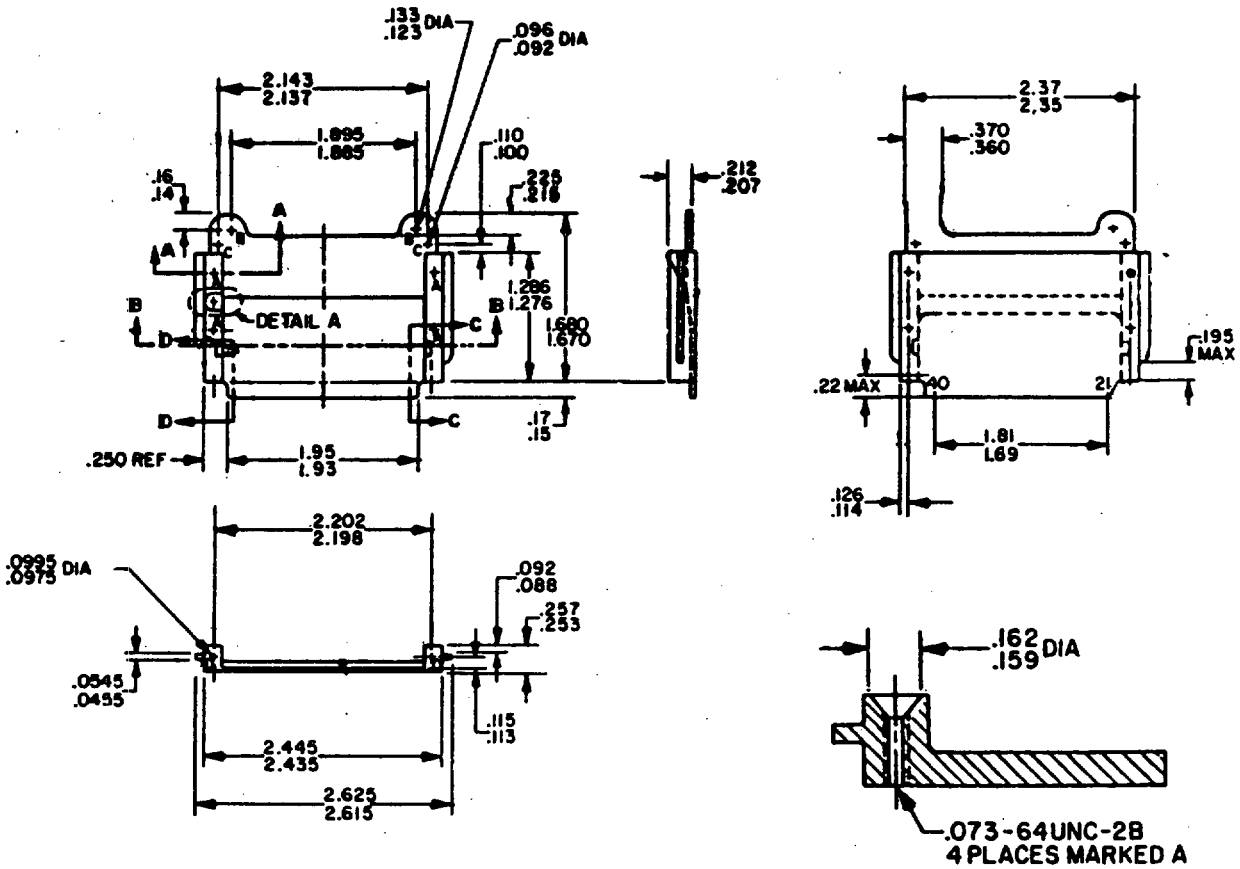

SECTION A-A

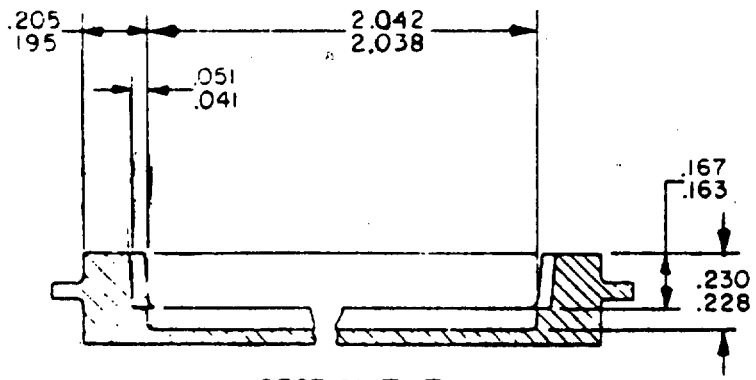


SECTION B-B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING


MIL-C-26754/49

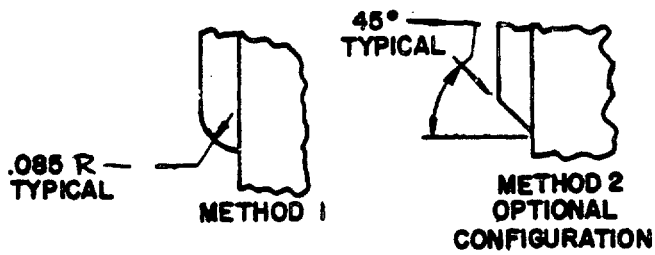


DETAIL B

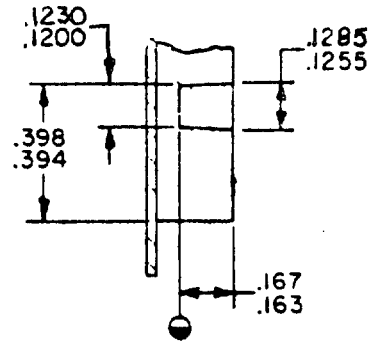

SECTION C-C

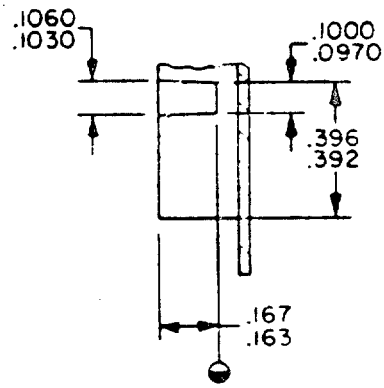

SECTION D-D

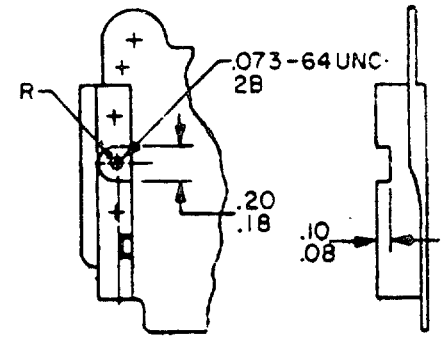

DETAIL A


TABLE I. DASH NUMBER

DASH NUMBER	TYPE	FINISH	WITH DETAIL A
01	A	ANODIZE PER MIL-A-8625, TYPE 2, DYED BLACK	NO
02	B	ANODIZE PER MIL-A-8625, TYPE 2, DYED RED. COAT DETAIL A PER MIL-C-5541, CLASS 3, TYPE AND GRADE OPTIONAL.	YES
03	C	ANODIZE PER MIL-A-8625, TYPE 2, DYED BLACK. COAT DETAIL A PER MIL-C-5541 CLASS 3, TYPE AND GRADE OPTIONAL.	YES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, INSERT, TOP

MIL-C-28754/50

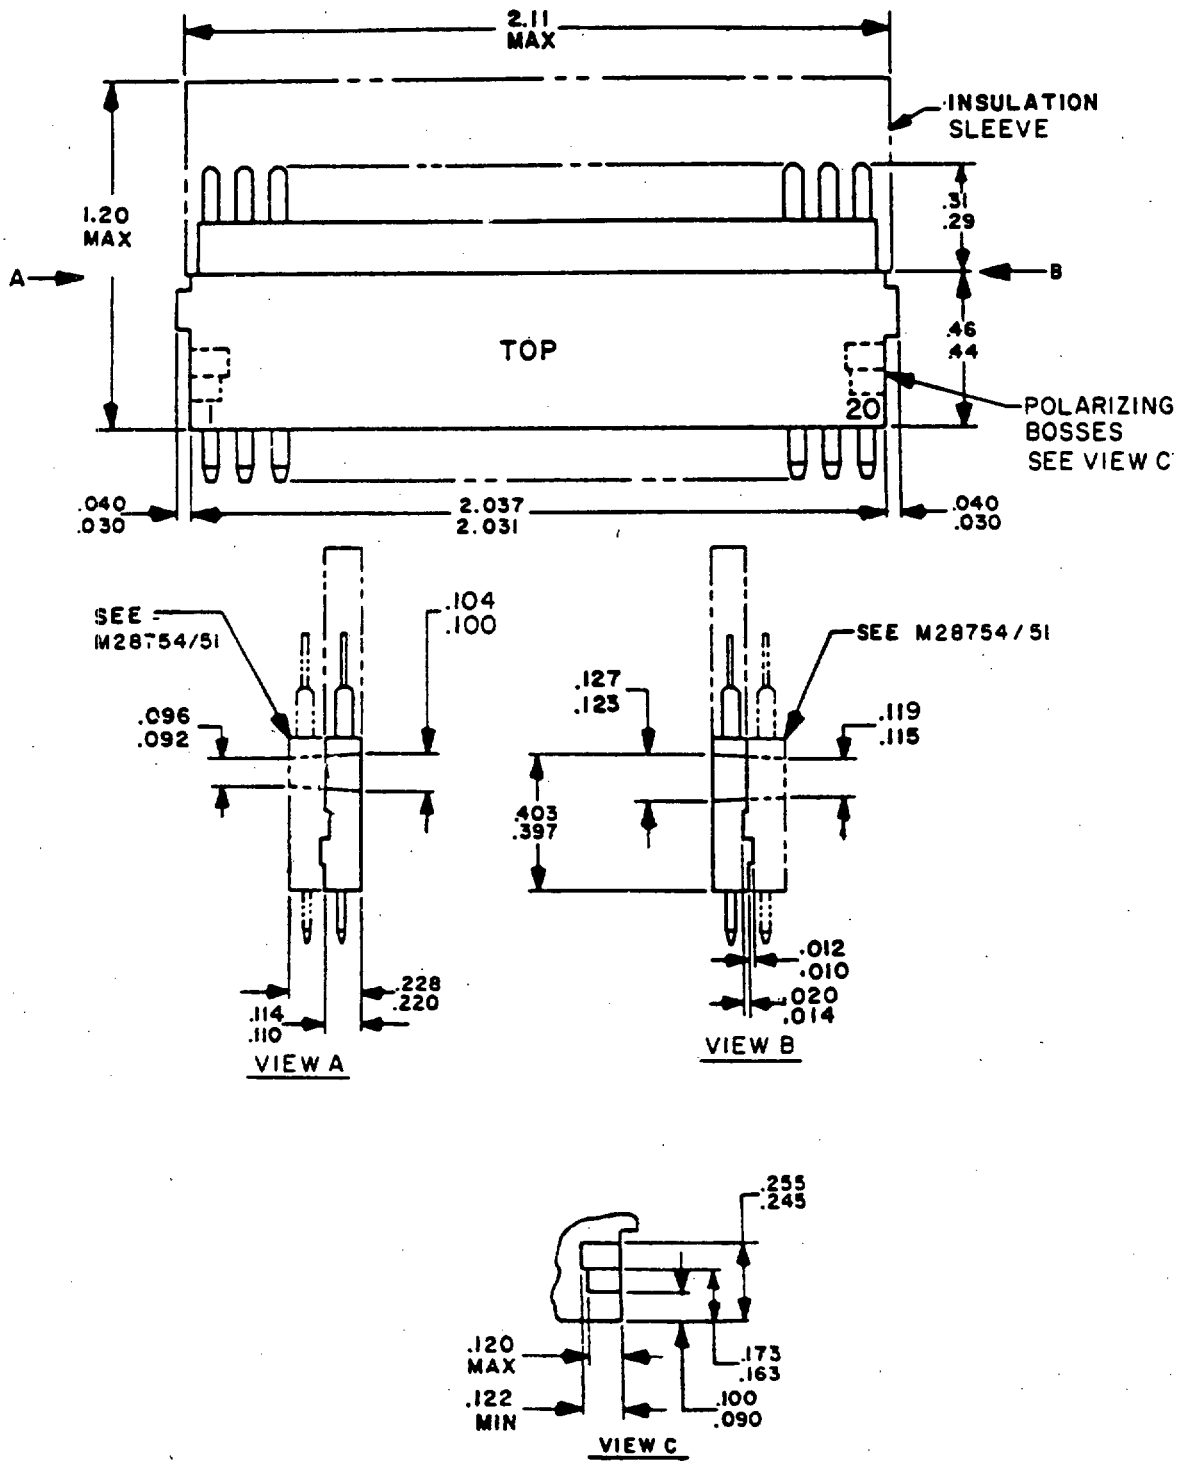

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, INSERT, TOP

MIL-C-28754/50

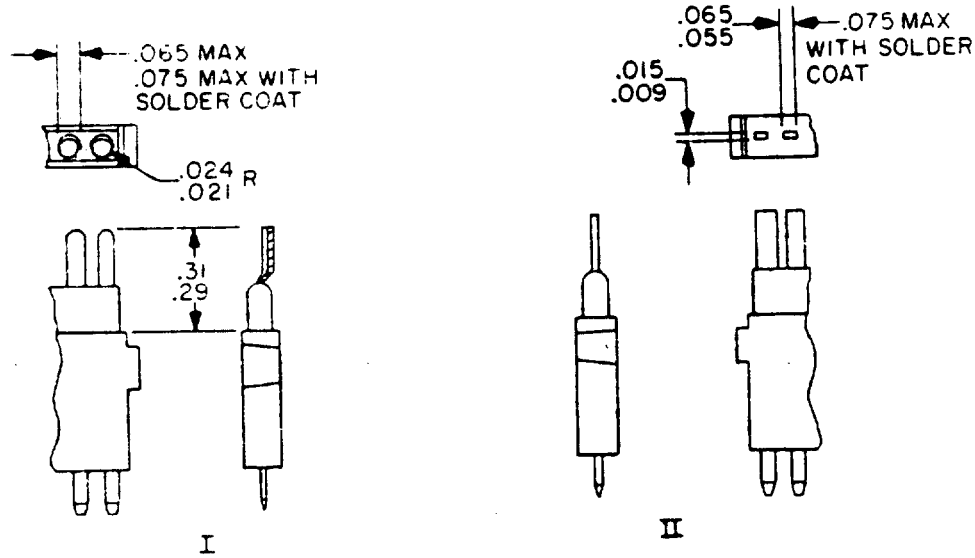



TABLE I. DASH NUMBER

DASH NUMBER	WIRE ACCOMMODATION	CONTACT STYLE	WIRE SIZE
01	FLAT CONDUCTOR CABLE	I	22-24
02	SINGLE ROUND WIRES	II	24-30
03	MULTIPLE ROUND WIRE CABLE	II	20-30
04	SINGLE ROUND WIRES SOLDER COATED	II	24-30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, INSERT, BOTTOM


MIL-C-28754/51

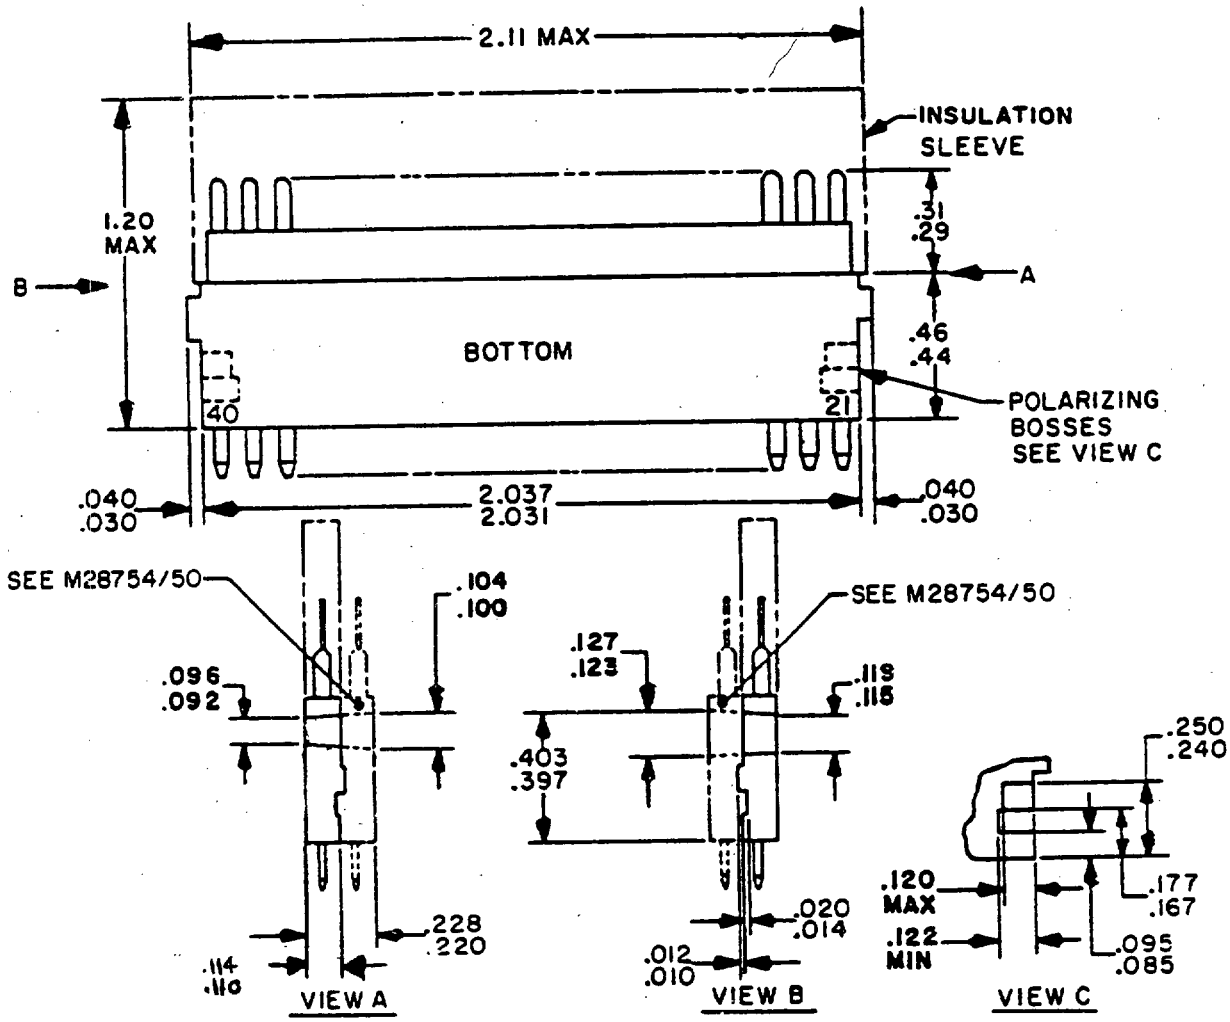

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, INSERT, BOTTOM

MIL-C-28754/51

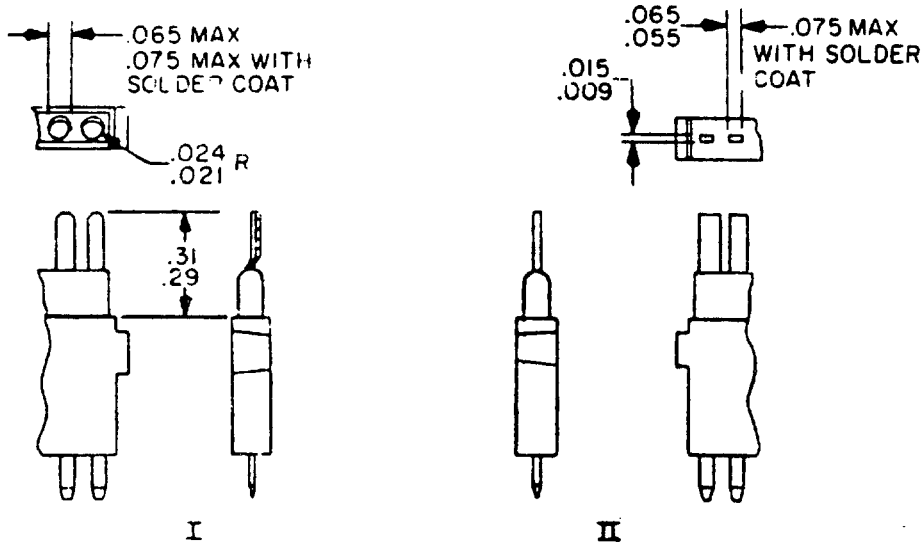

CONTACT STYLE


TABLE I. DASH NUMBER

DASH NUMBER	WIRE ACCOMMODATION	CONTACT STYLE	WIRE SIZE
01	FLAT CONDUCTOR CABLE	I	22-24
02	SINGLE ROUND WIRES	II	24-30
03	MULTIPLE ROUND WIRE CABLE	II	20-30
04	SINGLE ROUND WIRES SOLDER COATED	II	24-30


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING, CONNECTOR ASSEMBLY, STYLE I

MIL-C-28754/52

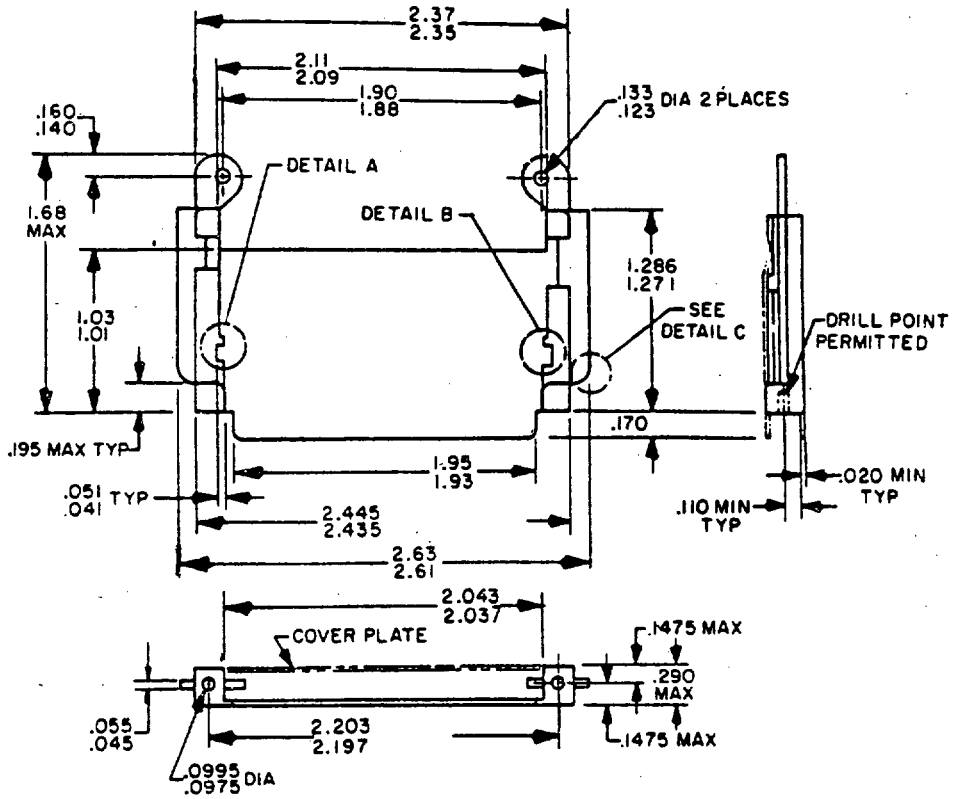

NOTE: COVER SHOWN AS A PHANTOM LINE

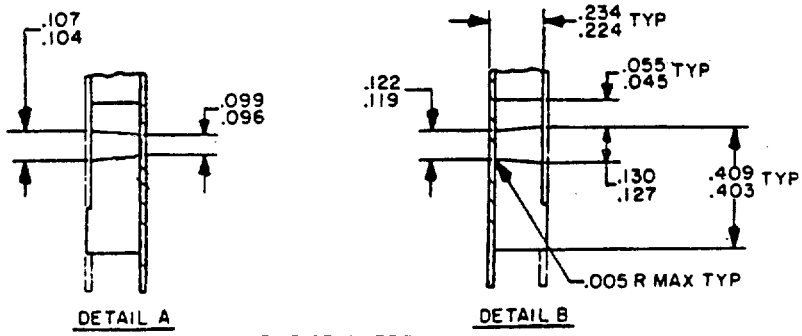


VIEWS OF INSERT
POSITIONING GROOVES

PART NUMBER: M28754/52-01 NOTE: FOR USE WITH M28754/52


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING, CONNECTOR ASSEMBLY, STYLE I

MIL-C-28754/52

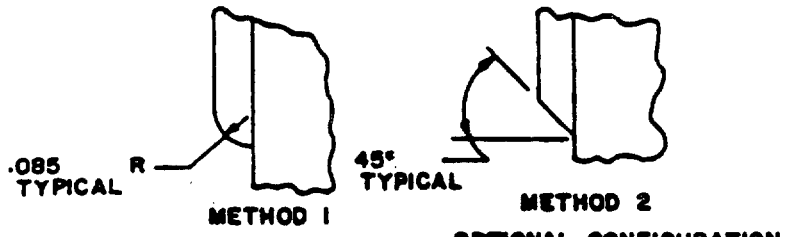


DETAIL C

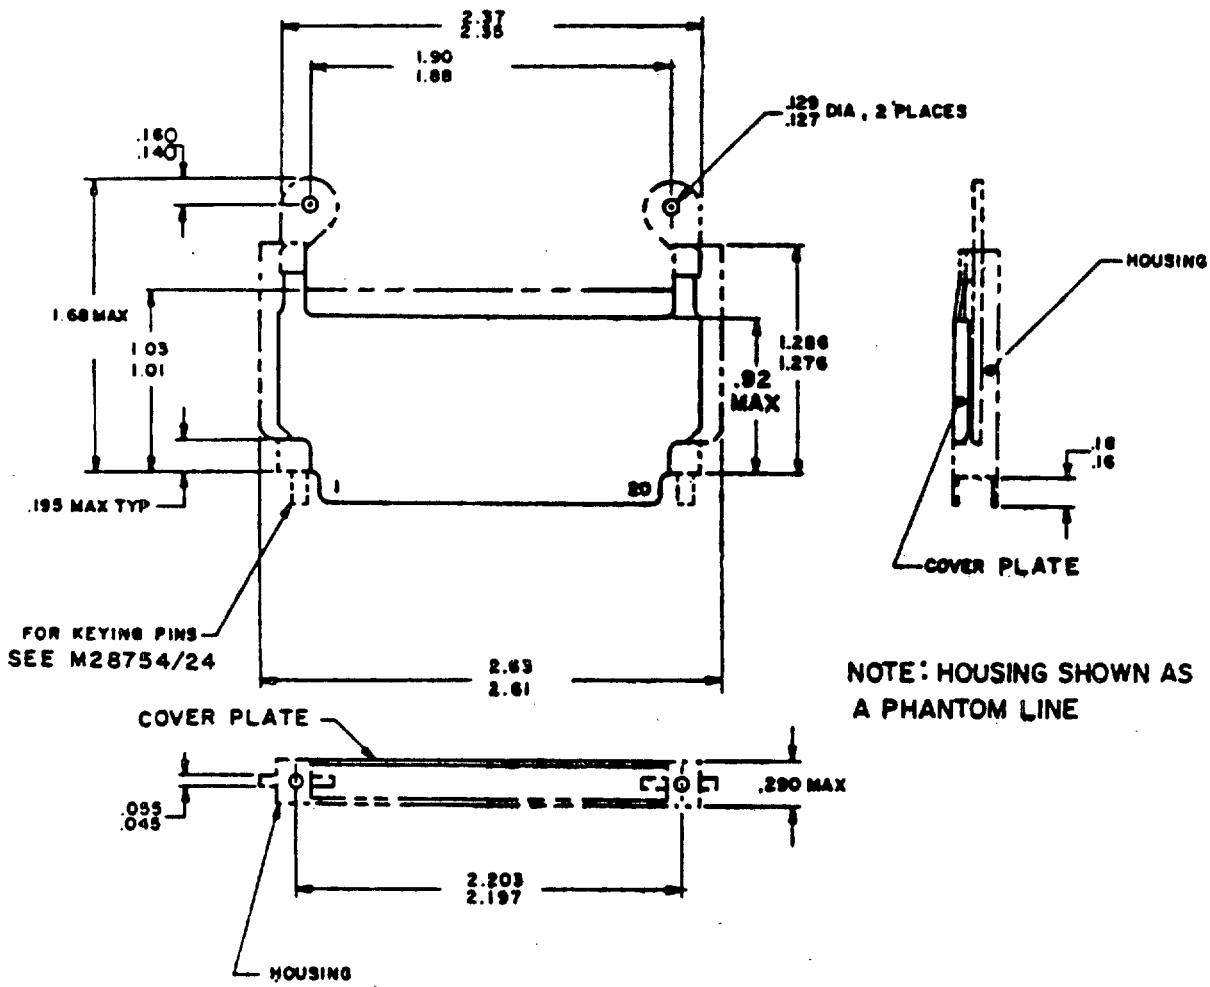

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING, CONNECTOR ASSEMBLY, STYLE II

MIL-C-28754/33

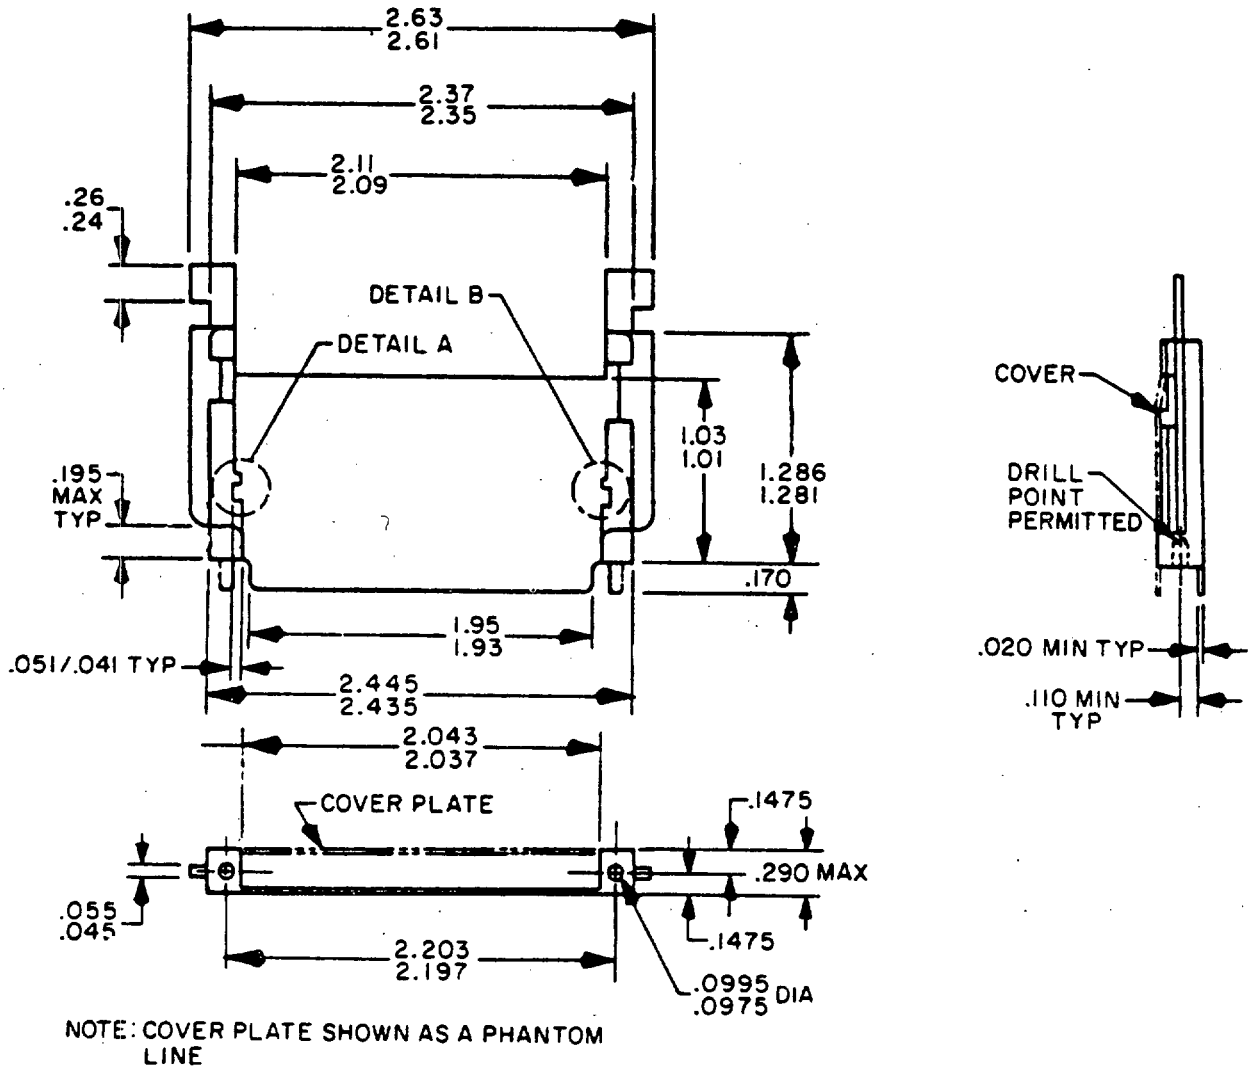


NOTE: COVER PLATE SHOWN AS A PHANTOM LINE


NOTE: FOR USE WITH M28754/33


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING, CONNECTOR ASSEMBLY, STYLE II


MIL-C-28754/53

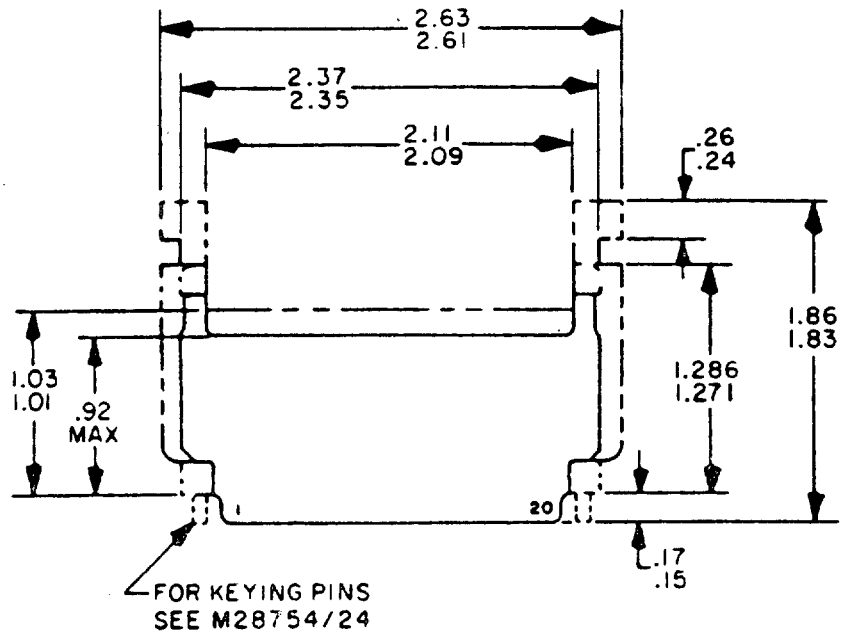

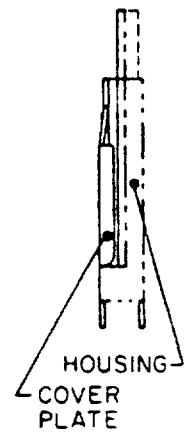

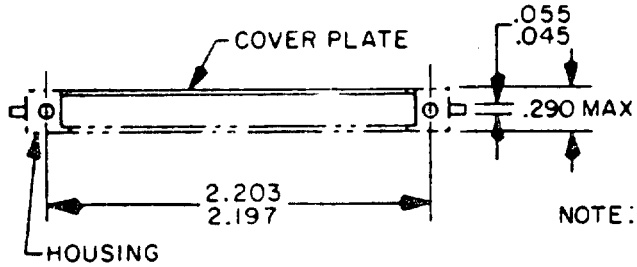

NOTE: HOUSING SHOWN AS A PHANTOM LINE

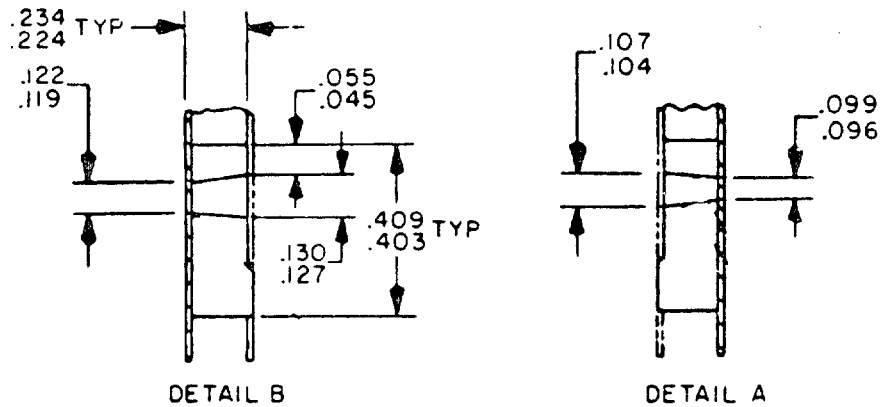

DETAIL B DETAIL A

VIEWS OF INSERT
POSITIONING GROOVES


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
PLUG, PIN CONTACTS, RIGHT-ANGLE, FOR PRINTED WIRING BOARDS (.150 SPACING)

MIL-C-55302

SCOPE: THIS SECTION COVERS CONNECTORS (PLUGS AND RECEPTACLES) FOR PRINTED CIRCUIT SUBASSEMBLY AND THEIR ACCESSORIES, FOR USE WITH SINGLE-SIDED PRINTED WIRING, DOUBLE-SIDED PRINTED WIRING, AND MULTILAYER PRINTED WIRING CONFORMING TO MIL-STD-275, MIL-P-55110, AND MIL-P-55424. THESE CONNECTORS ARE DESIGNED FOR PRINTED WIRING BOARD-TO-PRINTED WIRING BOARD OR PRINTED WIRING BOARD OR PRINTED WIRING BOARD-TO-CABLE INTERCONNECTION OF MINIATURIZED EQUIPMENT SUBASSEMBLIES WITH LOW-POWER REQUIRMENTS.

MIL-C-55302/1

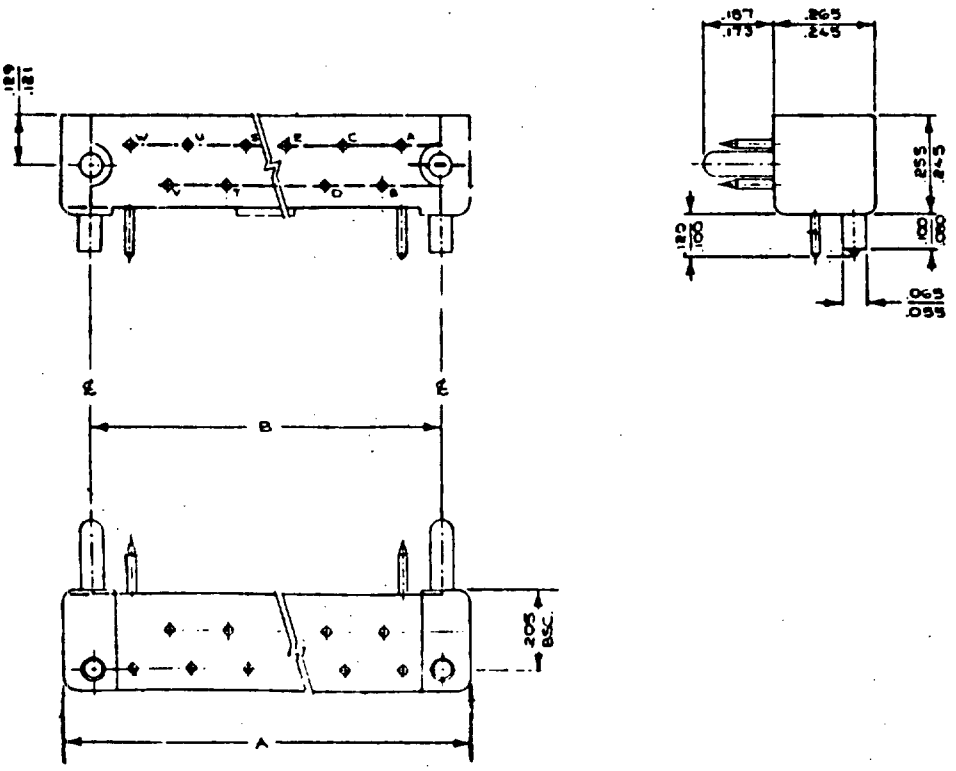

PART NUMBER: M55302/1-*

TABLE I. DIMENSIONS

DASH NUMBER*	NO. OF CONTACTS	A	B BASIC
03	17	1.550	1.400
04	23	2.000	1.850
05	28	2.400	2.250


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


MATES WITH MIL-C-55302/2 CURRENT RATING 5 AMPERES MAX


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
RECEPTACLE, SOCKET CONTACTS, STRAIGHT-THRU, FOR PRINTED WIRING BOARDS (.150 SPACING)

MIL-C-55302/2

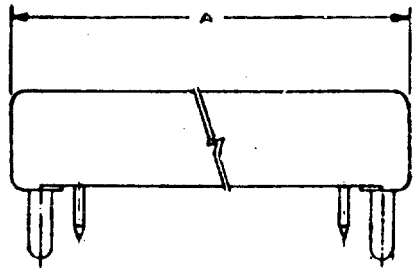

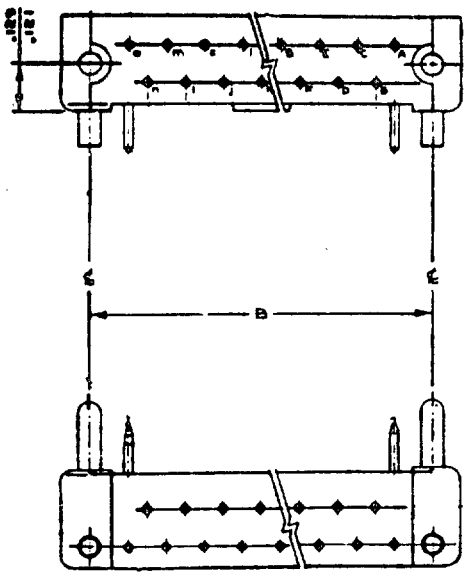



PART NUMBER: M55302/2-#

TABLE I. DIMENSIONS

DASH NUMBER#	NO. OF CONTACTS	A	B BASIC
03	17	1.550	1.400
04	23	2.000	1.850
05	28	2.400	2.250


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/1 AND MIL-C-55302/3 CONTACT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
PLUG, PIN CONTACTS, RIGHT-ANGLE, FOR MULTILAYERED PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/4

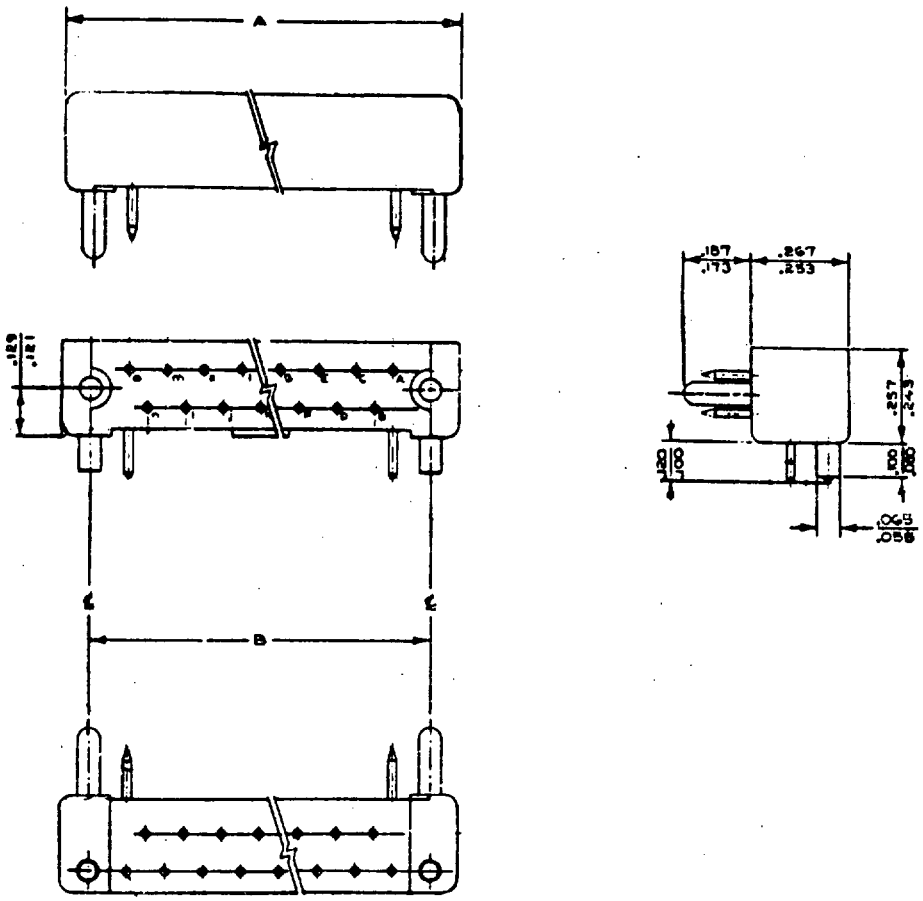

PART NUMBER: M55302/4-#

TABLE I. DIMENSIONS

DASH NUMBER#	NO. OF CONTACTS	A	B BASIC
02	17	1.150	1.000
03	25	1.550	1.400
04	33	1.950	1.800
05	41	2.350	2.200
06	77	4.150	4.000


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/6 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
PLUG, PIN CONTACTS, STRAIGHT-THRU, FOR MULTILAYERED PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/5

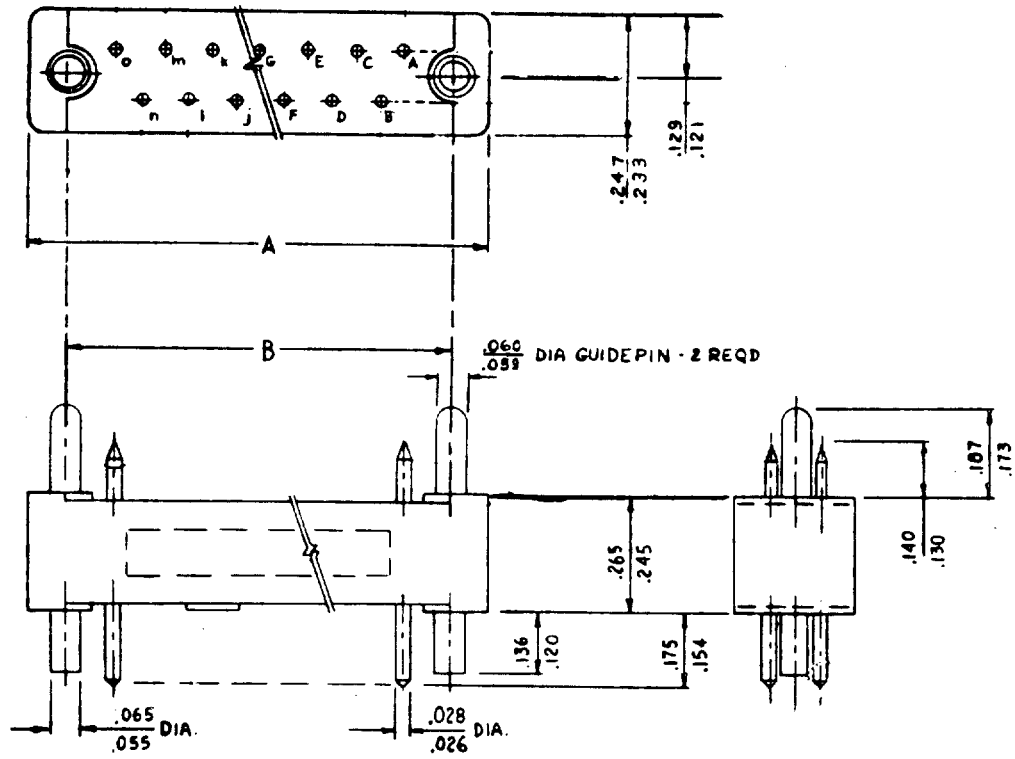

PART NUMBER: M55302/5-*

TABLE I. DIMENSIONS

DASH NUMBER*	NO. OF CONTACTS	A	B BASIC
05	41	2.350	2.200


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/6 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
RECEPTACLE, SOCKET CONTACTS, STRAIGHT-THRU, FOR MULTILAYERED PRINTED
WIRING BOARDS (.100 SPACING)

MIL-C-55302/6

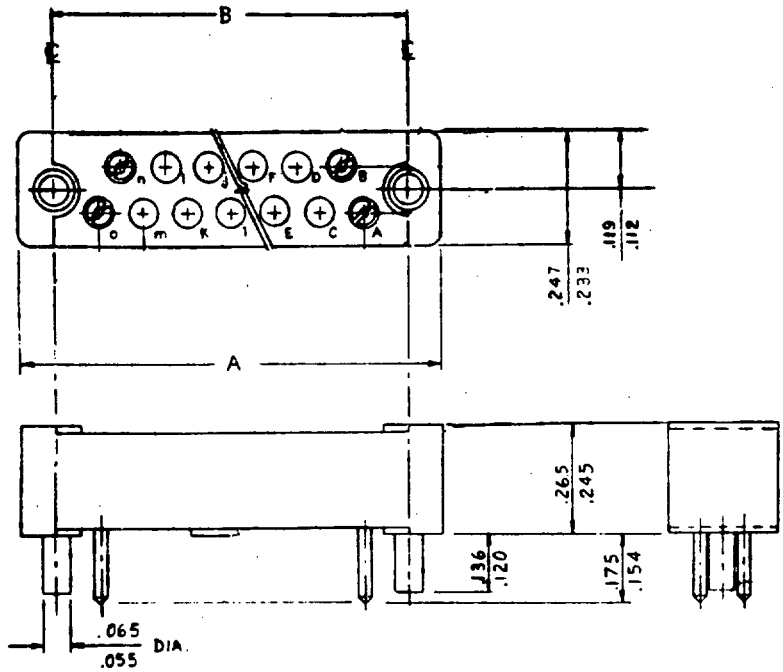

PART NUMBER: M55302/6-*

TABLE I. DIMENSIONS

DASH NUMBER*	NO. OF CONTACTS	A	B BASIC
02	17	1.150	1.000
03	25	1.550	1.400
04	33	1.950	1.800
05	41	2.350	2.200
06	77	4.150	4.000


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/4 AND MIL-C-55302/5 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, RIGHT ANGLE, FOR MULTILAYERED PRINTED WIRING BOARDS (.100 SPACING)RINTED WIRING

MIL-C-55302/7

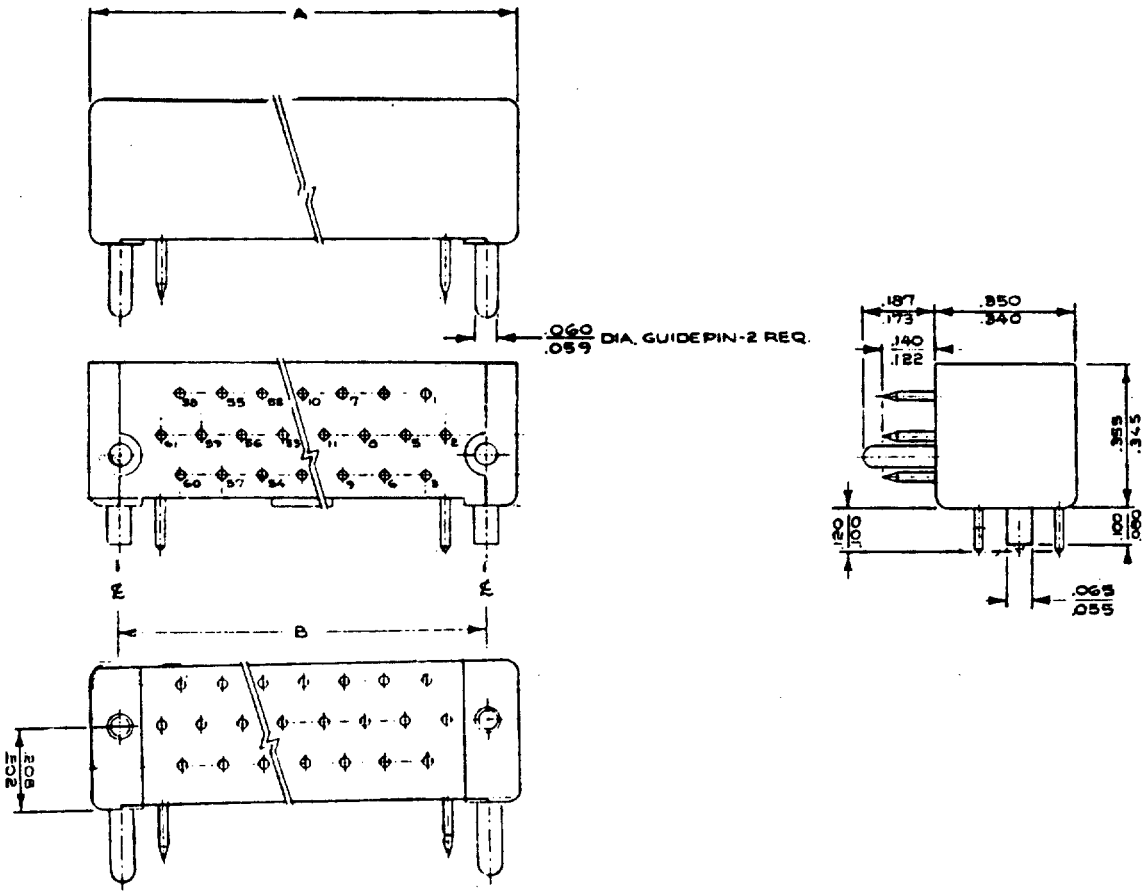

PART NUMBER: M55302/7-*

TABLE I. DIMENSIONS

DASH NUMBER*	NO. OF CONTACTS	A	B BASIC
01	13	.800	.600
02	25	1.200	1.000
03	37	1.600	1.400
04	49	2.000	1.800
05	61	2.400	2.200


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/8 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, STRAIGHT-THRU, FOR MULTI-LAYERED PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/8

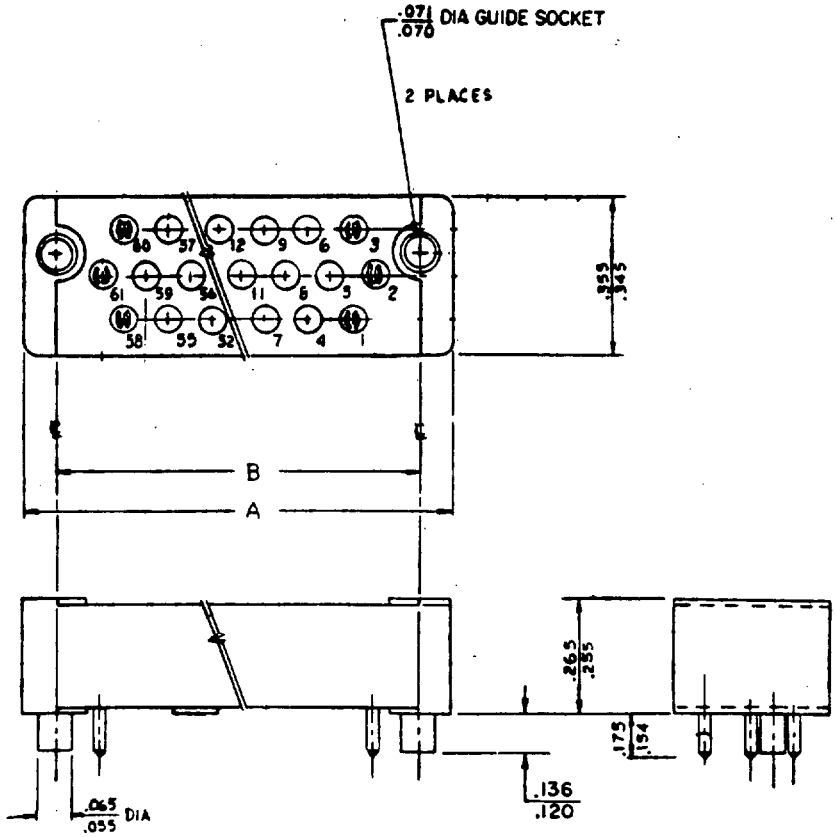

PART NUMBER: M55302/8-#

TABLE I. DIMENSIONS

DASH NUMBER#	NO. OF CONTACTS	A	B BASIC
01	13	.800	.600
02	25	1.200	1.000
03	37	1.600	1.400
04	49	2.000	1.800
05	61	2.400	2.200


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/7 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS RIGHT-ANGLE, 41 COMPOSITE CONTACT, FOR PRINTED WIRING BOARDS (.150 SPACING)

MIL-C-55302/19

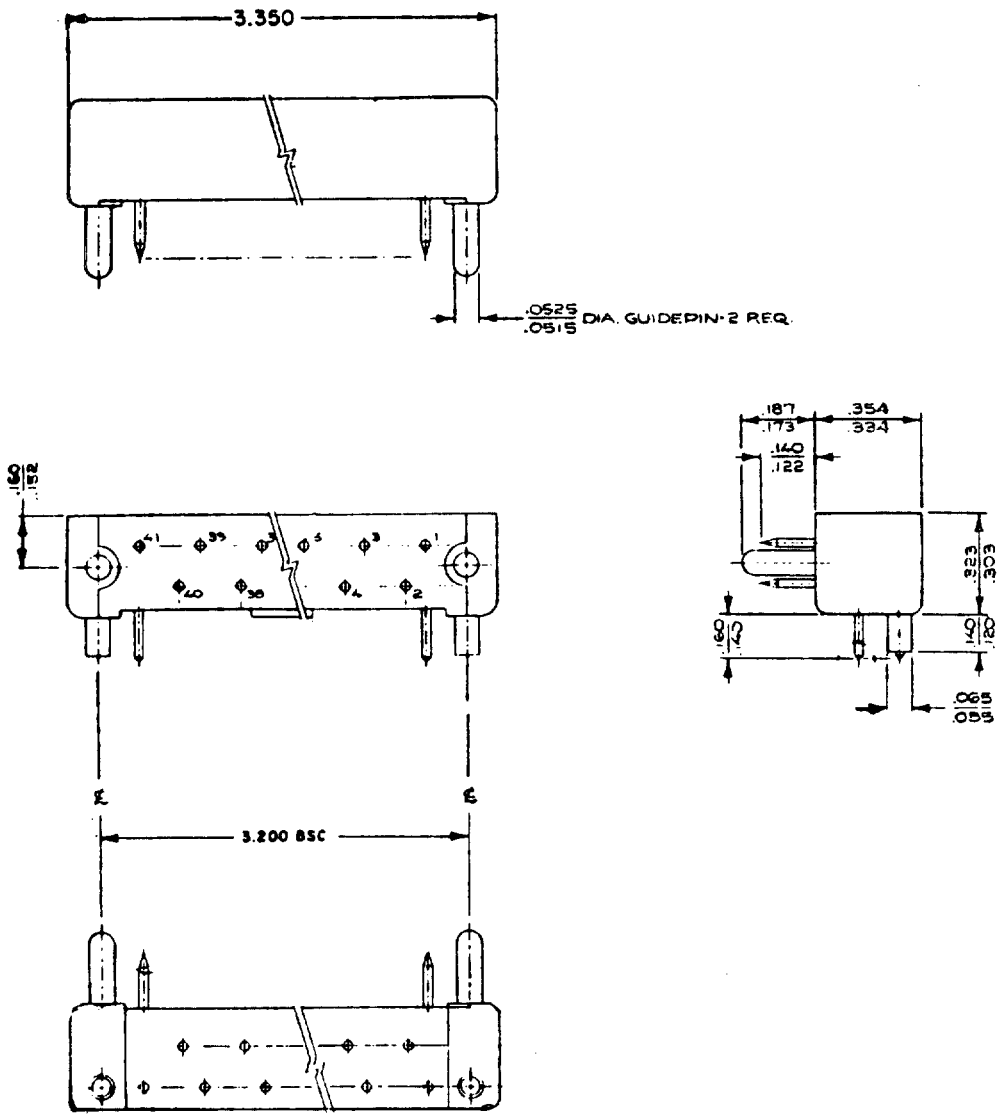


PART NUMBER: M55302/19-01

MATES WITH MIL-C-55302/20 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACT, STRAIGHT-THRU, FOR PRINTED WIRING BOARDS (.150 SPACING)

MIL-C-55302/20

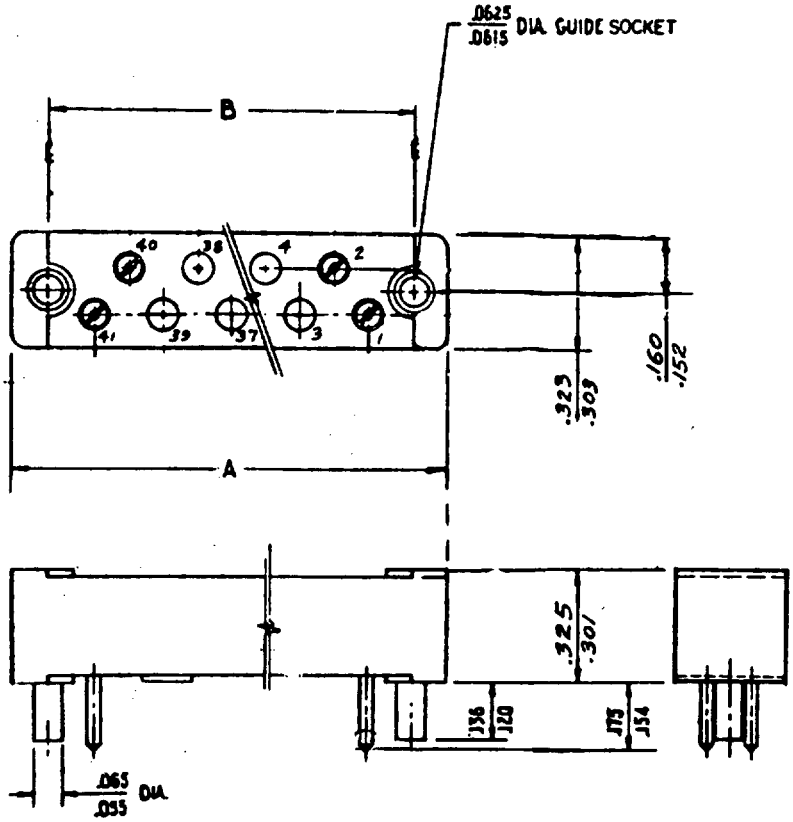

PART NUMBER: M55302/20-01

TABLE I. DIMENSIONS

DASH NUMBER#	NO. OF CONTACTS	A	B BASIC
01	41	3.350	3.200


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/19 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, RIGHT-ANGLE, 92 COMPOSITE CONTACT, FOR MULTILAYERED PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/21

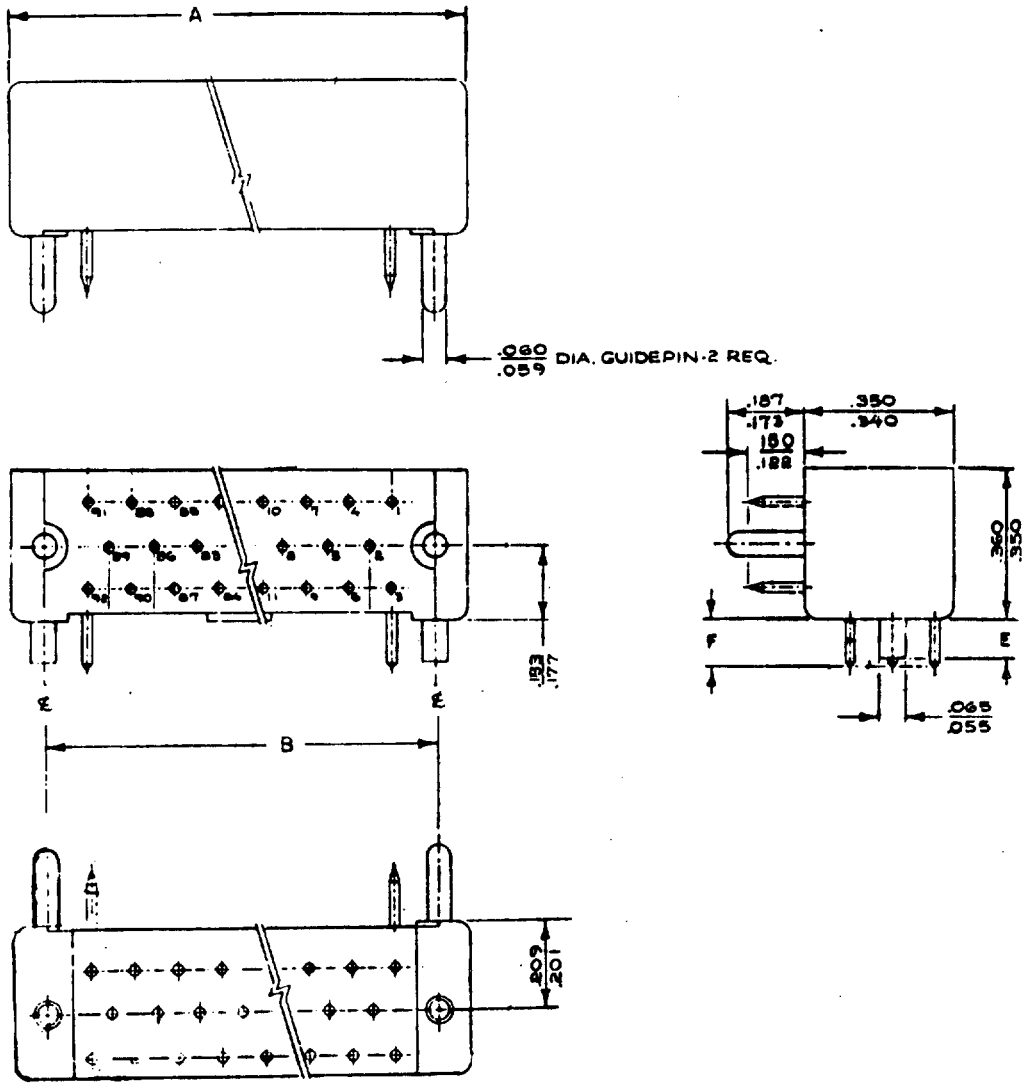

PART NUMBER: M55302/21-01

TABLE I. DIMENSIONS

DASH NUMBER#	A	B BASIC	E	F
01	3.426	3.240	.087	.092


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/22 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, STRAIGHT-THRU, FOR MULTILAYERED PRINTED WIRING-BOARDS (.100 SPACING)

MIL-C-55302/22

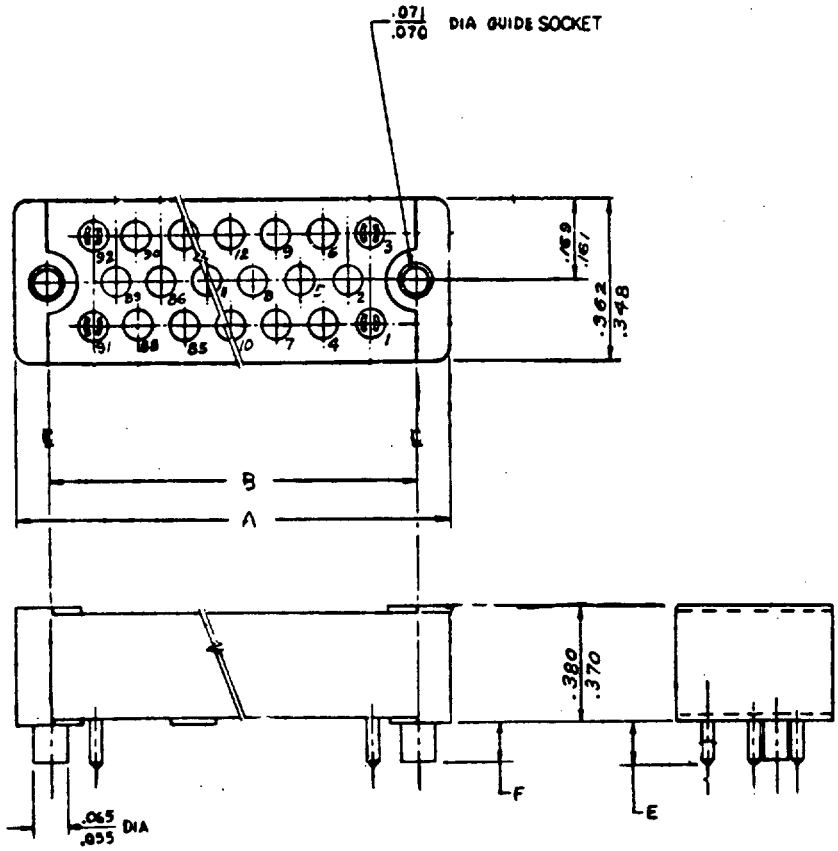

PART NUMBER: M55302/22-#

TABLE I. DIMENSIONS

DASH NUMBER#	NO. OF CONTACTS	A	B BASIC	E	F
01	92	3.426	3.240	.390	.112
02				.158	.145


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/21 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, DECADE INCREMENT 10 THRU 120, 150, 160, AND 180 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.075 SPACING)


MIL-C-55302/23

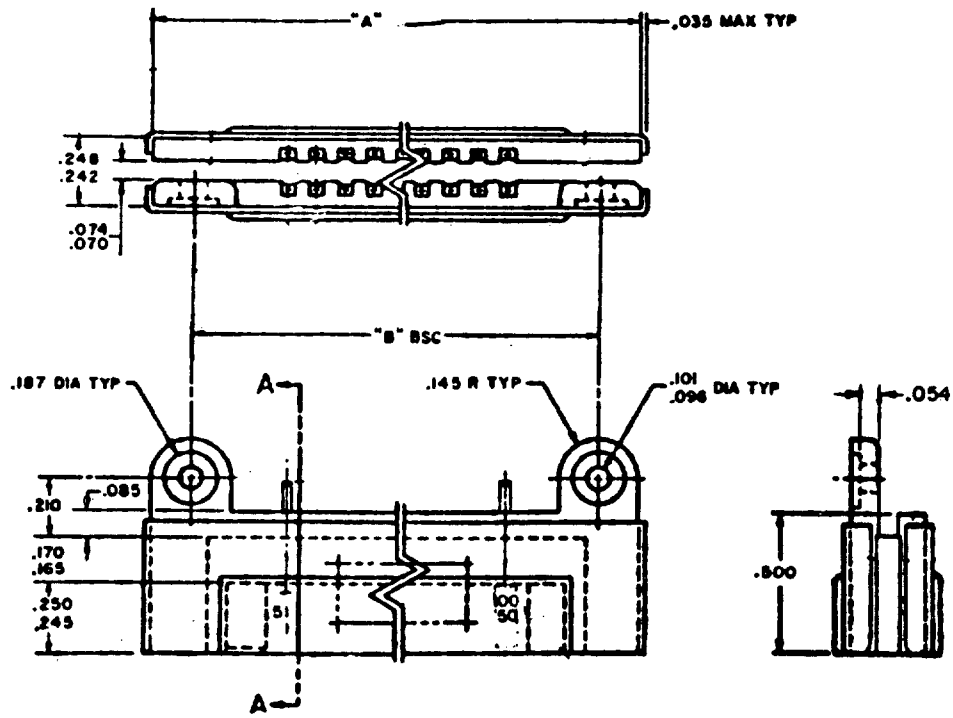

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, DECADE INCREMENT 10 THRU 120,150, 160 AND 180 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.075 SPACING)

MIL-C-55302/23

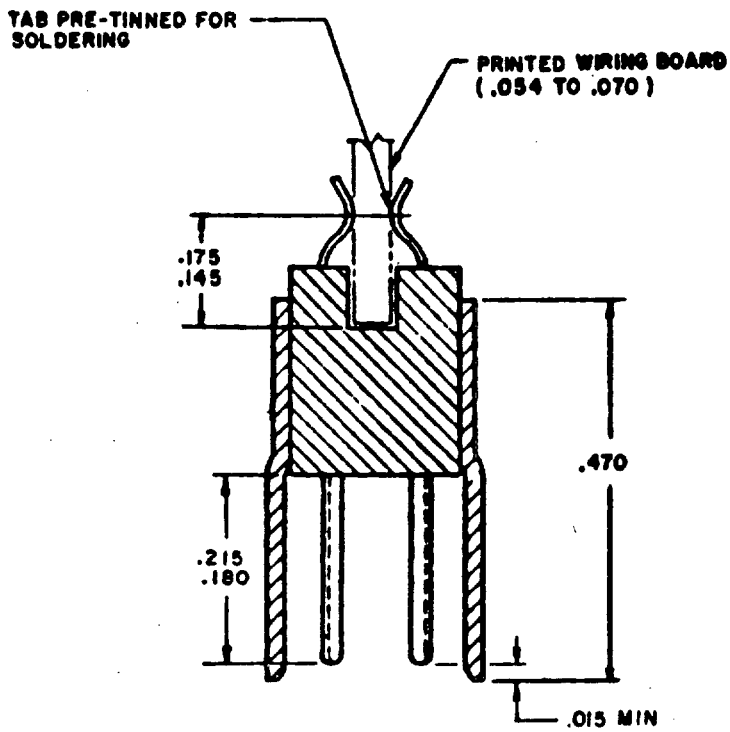

SECTION A-A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, DECADE INCREMENT 10 THRU 120, 150, 160 AND 180 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.075 SPACING)

MIL-C-55302/23

PART NUMBER: M55302/23-#

TABLE I. DIMENSIONS (INTERNAL KEYING)

DASH NUMBER#	NO. OF CONTACTS	DIMENSIONS A	DIMENSIONS B	CONTACT IDENTIFICATION NUMBERS
01	10	1.255	.965	1 - 5 6 - 10
02	20	1.630	1.340	1 - 10 11 - 20
03	30	2.005	1.715	1 - 15 16 - 30
04	40	2.380	2.090	1 - 20 21 - 40
05	50	2.755	2.465	1 - 25 26 - 50
06	60	3.130	2.840	1 - 30 31 - 60
07	70	3.505	3.215	1 - 35 36 - 70
08	80	3.880	3.590	1 - 40 41 - 80
09	90	4.255	3.965	1 - 45 46 - 90
10	100	4.630	4.340	1 - 50 51 - 100
11	110	5.005	4.715	1 - 55 56 - 110
12	120	5.380	5.090	1 - 60 61 - 120
13	150	6.505	6.215	1 - 75 76 - 150
14	160	6.880	6.590	1 - 80 81 - 160
15	180	7.630	7.340	1 - 90 91 - 180


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/24 AND MIL-C-55302/25 CONTACT RATING 3 AMPERES MAX PER CONTACT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, DECADE INCREMENT 10 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.075 SPACING)

MIL-C-55302/24

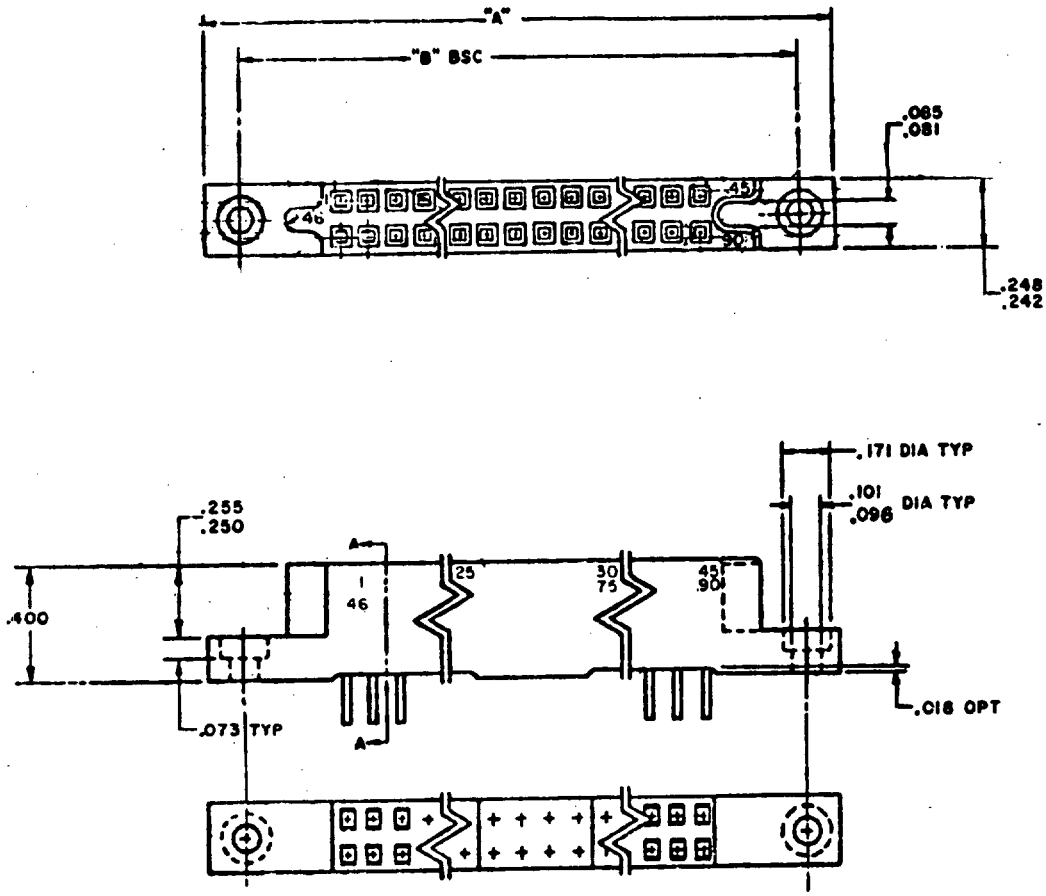


STYLE I (INTERNAL KEYING)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, DECADE INCREMENT 10 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.075 SPACING)


MIL-C-55302/24

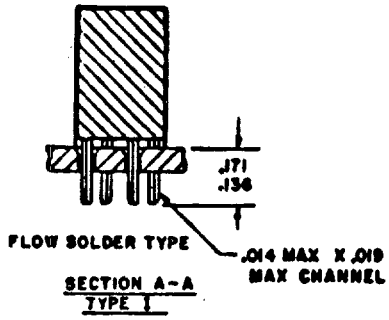


SECTION A-A
TYPE I

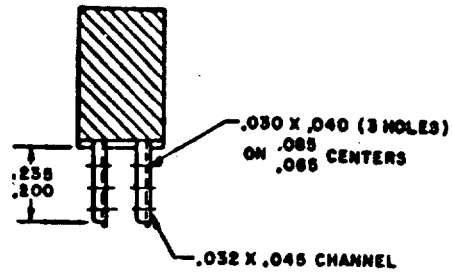

SECTION A-A
TYPE II



SECTION A-A
TYPE III

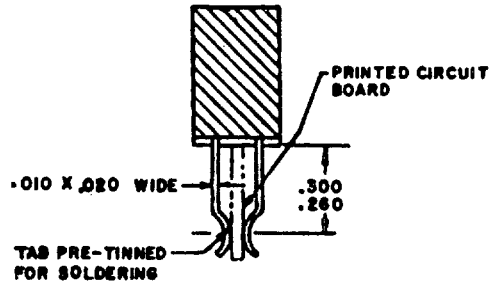

SECTION A-A
TYPE IV

PART NUMBER: M55302/24-8

MATES WITH MIL-C55302/23 CONTACT RATING 3 AMPERES MAX PER CONTACT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, DECADE INCREMENT 10 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.075 SPACING)
MIL-C-55302/24

TABLE I. DIMENSIONS (INTERNAL KEYING)


DASH NUMBER *	NO. OF CONTACTS	TYPE	DIMENSIONS A	DIMENSIONS B	CONTACT IDENTIFICATION NUMBERS
01	10	I	1.255	.965	1 - 5
02		II			6 - 10
03		III			
04		IV			
05	20	I	1.630	1.340	1 - 10
06		II			11 - 20
07		III			
08		IV			
09	30	I	2.005	1.715	1 - 15
10		II			16 - 30
11		III			
12		IV			
13	40	I	2.380	2.090	1 - 20
14		II			21 - 40
15		III			
16		IV			
17	50	I	2.755	2.465	1 - 25
18		II			26 - 50
19		III			
20		IV			
21	60	I	3.130	2.840	1 - 30
22		II			31 - 60
23		III			
24		IV			
25	70	I	3.505	3.215	1 - 35
26		II			36 - 70
27		III			
28		IV			
29	80	I	3.880	3.590	1 - 40
30		II			41 - 80
31		III			
32		IV			
33	90	I	4.255	3.965	1 - 45
34		II			46 - 90
35		III			
36		IV			
37	100	I	4.630	4.340	1 - 50
38		II			51 - 100
39		III			
40		IV			
41	110	I	5.005	4.715	1 - 55
42		II			56 - 110
43		III			
44		IV			


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, 120, 150, 160, AND 180 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.075 SPACING)


MIL-C-55302/25

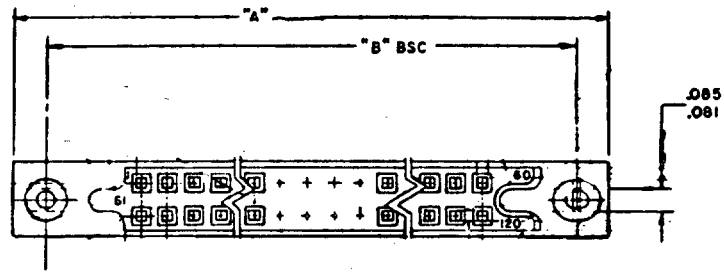

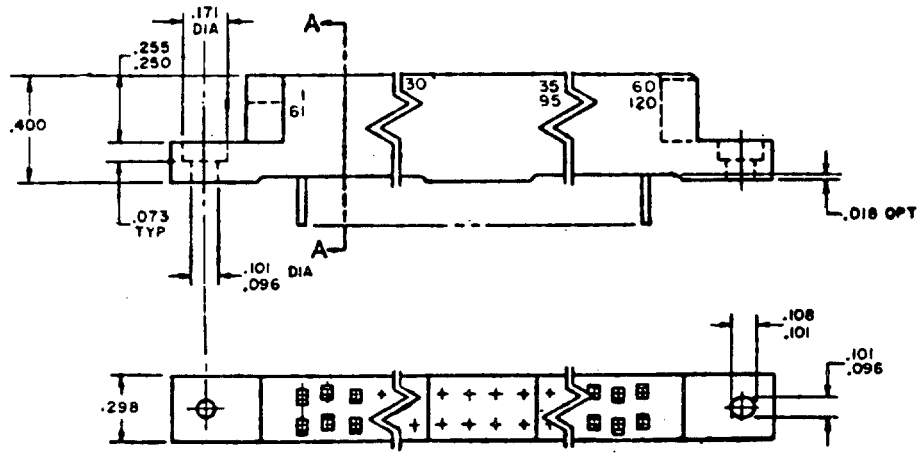

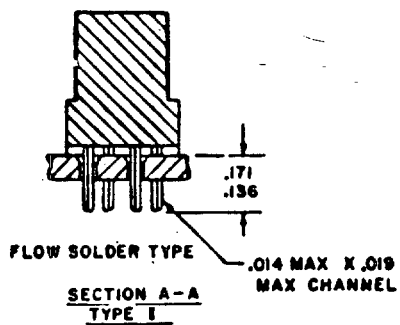

SECTION A-A
TYPE I

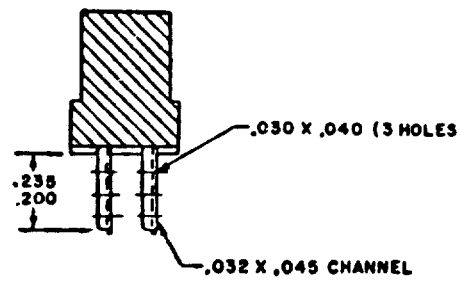


SECTION A-A
TYPE II


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, 120, 150, 160, AND 180 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.075 SPACING)

MIL-C-55302/25

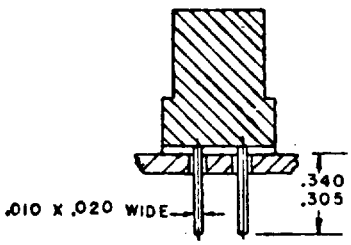

SOLDER POST TYPE
SECTION A-A
TYPE III

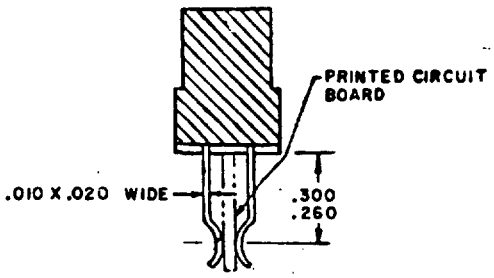

CARD EXTENDER TYPE CONTACT
SECTION A-A
TYPE IV

PART NUMBER: M55302/25-*

TABLE I. DIMENSIONS (INTERNAL KEYING)

DASH NUMBER*	NO. OF CONTACTS	TYPE	DIMENSIONS A	DIMENSIONS B	CONTACT IDENTIFICATION NUMBERS
01	120	I	5.380	5.090	1 - 60
02		II			61 - 120
03		III			
04		IV			
05	150	I	6.505	6.215	1 - 75
06		II			76 - 150
07		III			
08		IV			
09	160	I	6.880	6.590	1 - 80
10		II			81 - 160
11		III			
12		IV			
13	180	I	7.630	7.340	1 - 90
14		II			91 - 180
15		III			
16		IV			


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/23 CONTACT RATING 3 AMPERES MAX PER CONTACT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, 30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)


MIL-C-55302/26

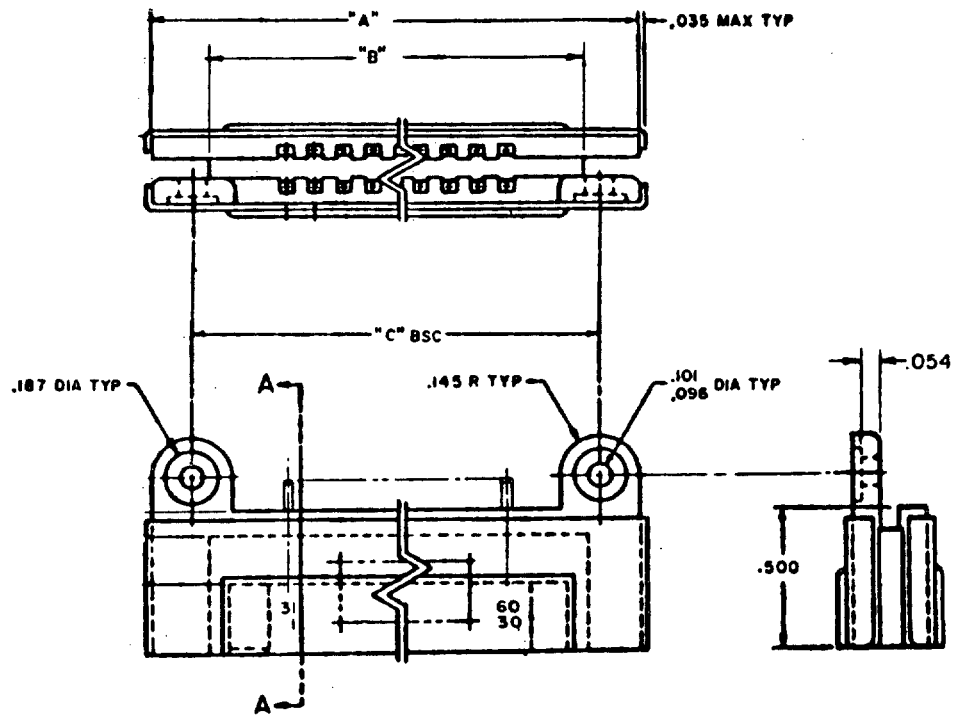

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, 30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/26

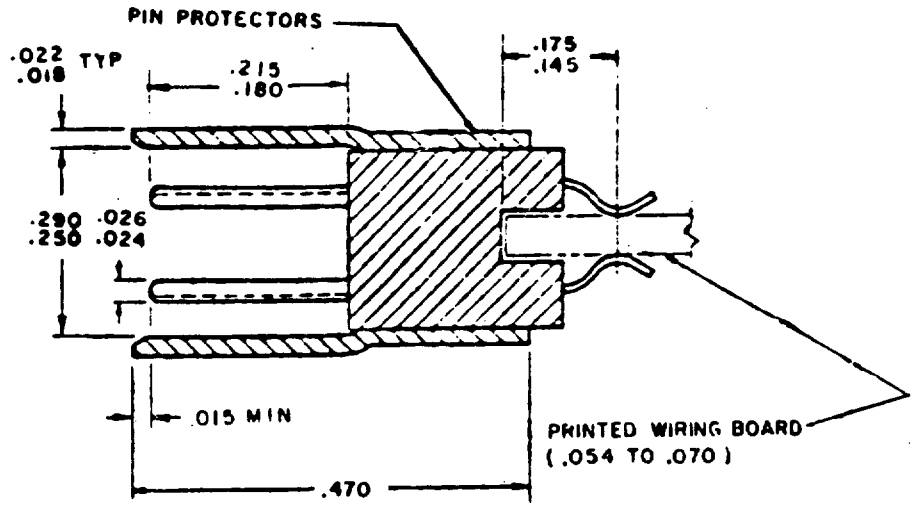

SECTION A-A

PART NUMBER: M55302/26-*

TABLE I. DIMENSIONS (INTERNAL KEYING)

DASH NUMBER*	NO. OF CONTACTS	DIMENSIONS			CONTACT IDENTIFICATION NUMBERS
		A	B	C	
01	50	3.355	2.955	3.065	1 - 25 26 - 50
02	60	3.855	3.455	3.565	1 - 30 31 - 60
03	80	4.855	4.455	4.565	1 - 40 41 - 80
04	90	5.355	4.955	5.065	1 - 45 46 - 90
05	100	5.855	5.455	5.565	1 - 50 51 - 100
06	110	6.355	5.955	6.065	1 - 55 56 - 110
07	30	2.355	1.955	2.065	1 - 15 16 - 30
08	40	2.855	2.455	2.565	1 - 20 21 - 40
09	70	4.355	3.955	4.065	1 - 35 36 - 70


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/27 CONTACT RATING 3 AMPERES MAX PER CONTACT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLES,
30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/27

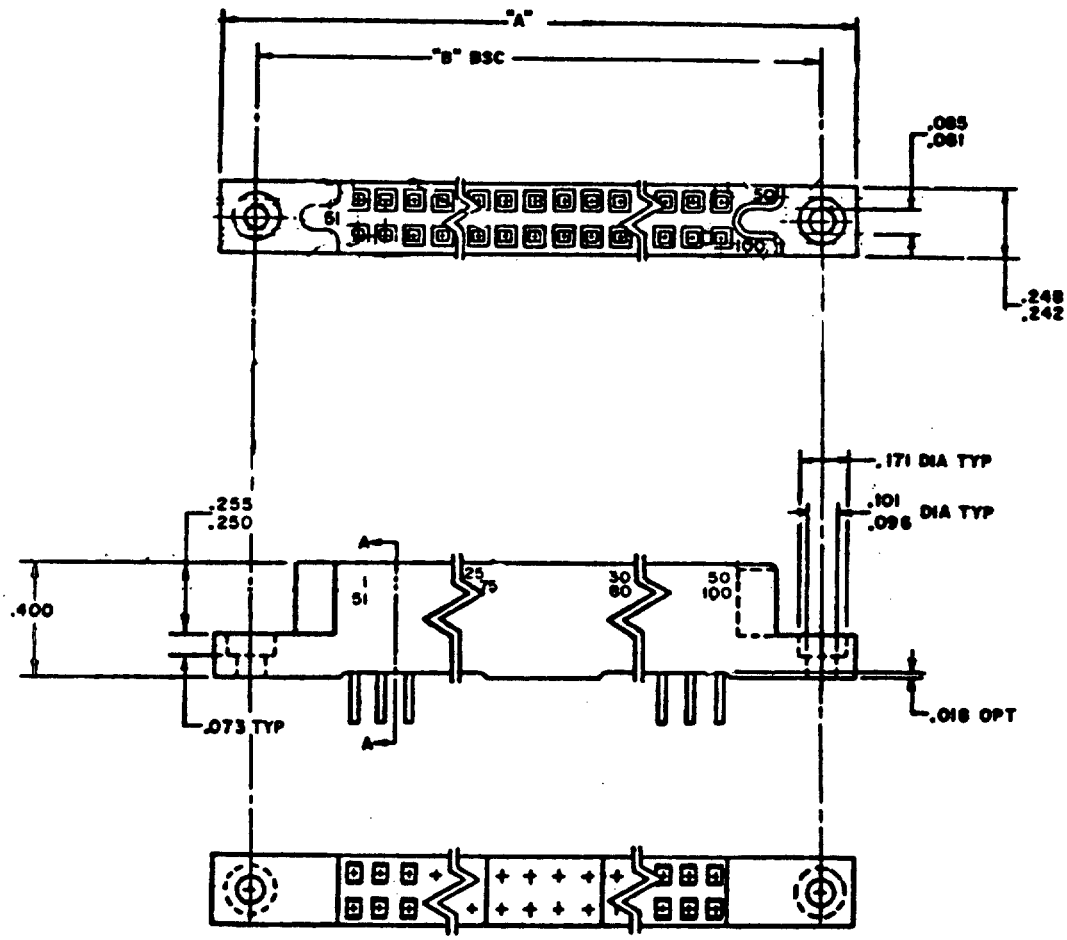


Style 1 (internal keying).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACESSORIES: RECEPTACLES
30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/27

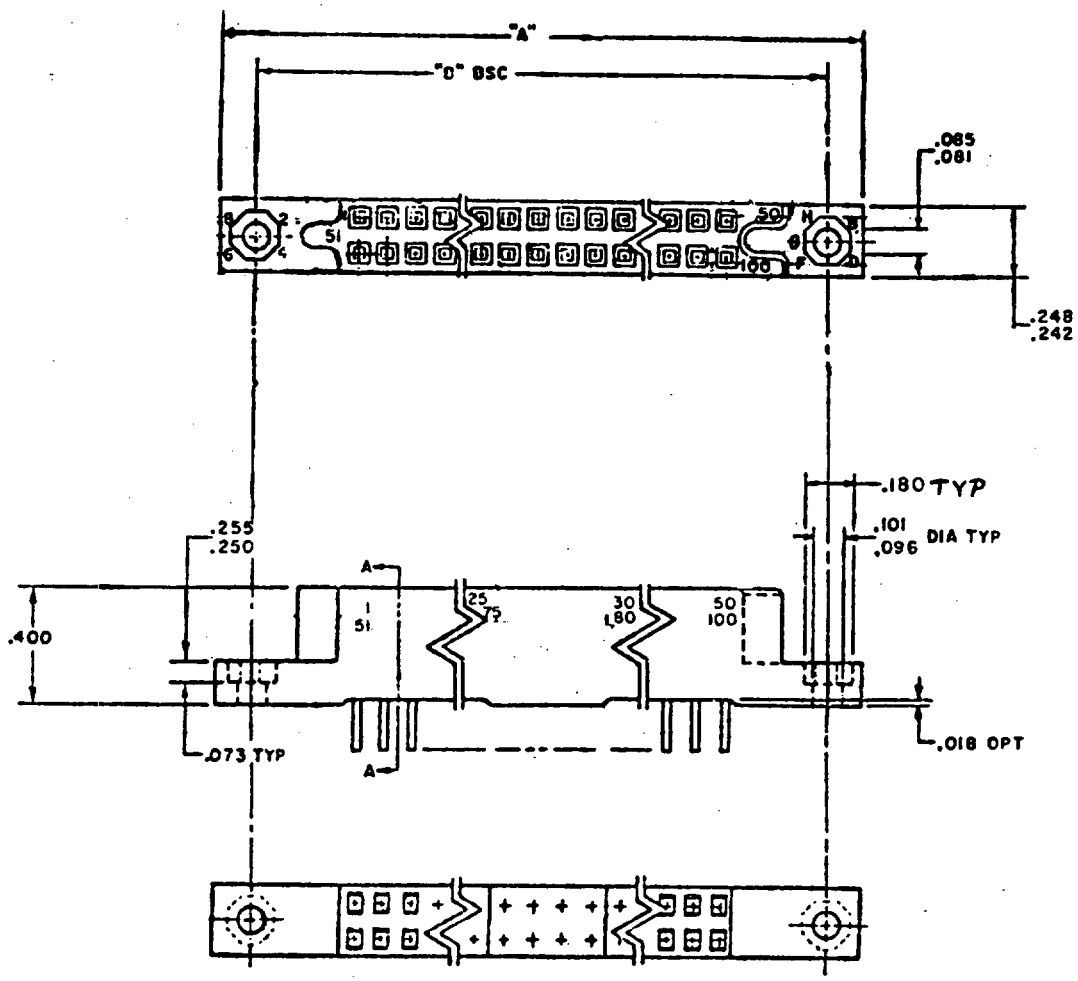


Style 2 (external keying).


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACESSORIES: RECEPTACLES
30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/27

POST LENGTH TYPE	F
1	.405
2	.565
3	.725

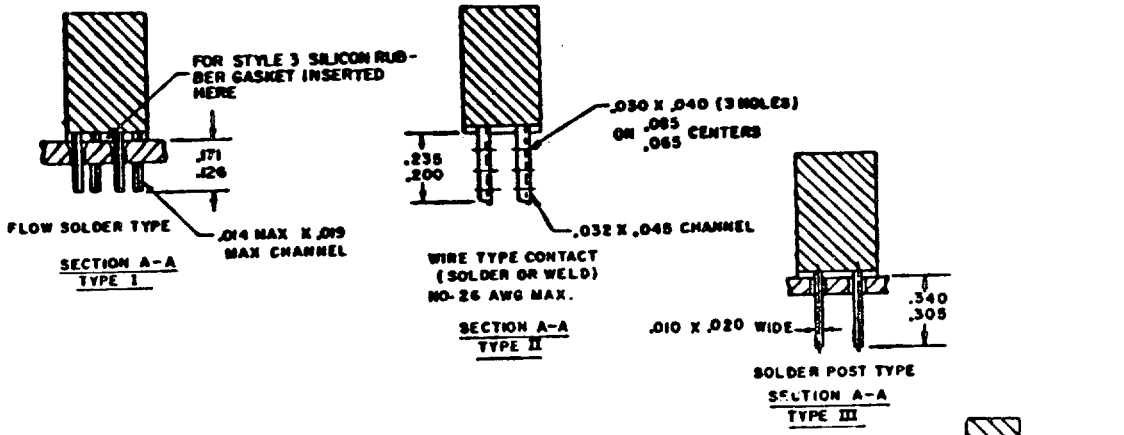

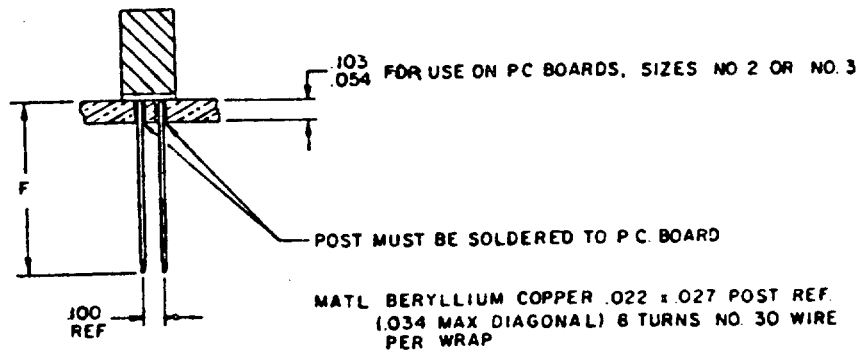

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACESSORIES: RECEPTACLES
30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/27

PART NUMBER: M55302/27-#

TABLE I. DIMENSIONS

DASH # NUMBER #	NUMBER CONTACTS	TYPE	DIMENSIONS A	DIMENSIONS B	POST LENGTH TYPE	CONTACT IDENTIFICAION NUMBERS
25	30	I	2.355	2.065	N/A	1 - 15
26		II				16 - 30
27		III				
28		IV				
37		V			1	
38		VI				
39		V			2	
40		VI				
41		V			3	
42		VI				
29	40	I	2.855	2.565	N/A	1 - 20
30		II				21 - 40
31		III				
32		IV				
43		V			1	
44		VI				
45		V			2	
46		VI				
47		V			3	
48		VI				
01	50	I	3.355	3.065	N/A	1 - 25
02		II				26 - 50
03		III				
04		IV				
49		V			1	
50		VI				
51		V			2	
52		VI				
53		V			3	
54		VI				
05	60	I	3.855	3.565	N/A	1 - 30
06		II				31 - 60
07		III				
08		IV				
55		V			1	
56		VI				
57		V			2	
58		VI				
59		V			3	
60		VI				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLES
30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-22302/27

TABLE I. DIMENSIONS (CONTINUED)

DASH # NUMBER #	NUMBER CONTACTS	TYPE	DIMENSIONS A	DIMENSIONS B	POST LENGTH TYPE	CONTACT IDENTIFICAION NUMBERS
33	70	I	4.355	4.065	N/A	1 - 35
34		II				36 - 70
35		III				
36		IV				
61		V			1	
62		VI				
63		V			2	
64		VI				
65		V			3	
66		VI				
09	80	I	4.855	4.565	N/A	1 - 40
10		II				41 - 80
11		III				
12		IV				
67		V			1	
68		VI				
69		V			2	
70		VI				
71		V			3	
72		VI				
13	90	I	5.355	5.065	N/A	1 - 45
14		II				46 - 90
15		III				
16		IV				
73		V			1	
74		VI				
75		V			2	
76		VI				
77		V			3	
78		VI				
17	100	I	5.855	5.565	N/A	1 - 50
18		II				51 - 100
19		III				
20		IV				
79		V			1	
80		VI				
81		V			2	
82		VI				
83		V			3	
84		VI				
21	110	I	6.355	6.065	N/A	1 - 55
22		II				56 - 110
23		III				
24		IV				

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLES
30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/27

TABLE I. DIMENSIONS (CONTINUED)

DASH # NUMBER X	NUMBER CONTACTS	TYPE	DIMENSIONS A	DIMENSIONS B	POST LENGTH TYPE	CONTACT IDENTIFICAION NUMBERS
85	110	V	6.355	6.065	1	1 - 55
86		VI				56 - 110
87		V			2	
88		VI				
89		V			3	
90		VI				
91	30	I	2.355	2.065	N/A	1 - 15
100		II				16 - 30
109		III				
118		VI			3	
127					2	
136					1	
145		V			3	
154					2	
163					1	
172		IV			N/A	
92	40	I	2.855	2.565		1 - 20
101		II				21 - 40
110		III				
119		VI			3	
128					2	
137					1	
146		V			3	
155					2	
164					1	
173		IV			N/A	
93	50	I	3.355	3.065		1 - 25
102		II				26 - 50
111		III				
120		VI			3	
129					2	
138					1	
147		V			3	
156					2	
165					1	
174		IV			N/A	
94	60	I	3.855	3.565		1 - 30
103		II				31 - 60
112		III				
121		VI			3	
130					2	
139					1	
148		V			3	
157					2	

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLES
30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/27

TABLE I. DIMENSIONS (CONTINUED)

DASH # NUMBER #	NUMBER CONTACTS	TYPE	DIMENSIONS A	DIMENSIONS B	POST LENGTH TYPE	CONTACT IDENTIFICAION NUMBERS
166	60	V	3.855	3.565	1	1 - 30
175		IV			N/A	31 - 60
95	70	I	4.355	4.065		1 - 35
104		II				36 - 70
113						
122		VI			3	
131					2	
140					1	
149		V			3	
158					2	
167					1	
176		IV			N/A	
96	80	I	4.855	5.565	N/A	1 - 40
105		II				41 - 80
114		III				
123		VI			3	
132					2	
141					1	
150		V			3	
159					2	
168					1	
177		IV			N/A	
97	90	I	5.355	5.065		1 - 45
106		II				46 - 90
115		III				
124		VI			3	
133					2	
142					1	
151		V			3	
160					2	
169					1	
178		IV			N/A	
98	100	I	5.855	5.565		1 - 50
107		II				51 - 100
116		III				
125		VI			3	
134					2	
143					1	
152		V			3	
161					2	
170					1	
179		IV			N/A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECPTACLES
30 THRU 110 POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/27

TABLE I. DIMENSIONS (CONTINUED)

DASH # NUMBER *	NUMBER CONTACTS	TYPE	DIMENSIONS A	DIMENSIONS B	POST LENGTH TYPE	CONTACT IDENTIFICAION NUMBERS
99	110	I	6.355	6.065	N/A	1 - 56
108		II				56 - 110
117		III				
126		VI			3	
135					2	
144					1	
153		V			3	
162					2	
171					1	
180		IV			N/A	

DASH NUMBER 91 THRU 180 ARE FOR STYLE 2 (EXTERNAL KEYING) CONNECTORS.


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/26 AND MIL-C-55302/110 CONTACT RATING 3 AMPERES MAX PER CONTACT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, STRAIGHT-THRU, HERMAPHRODITIC CONTACT FOR PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/52

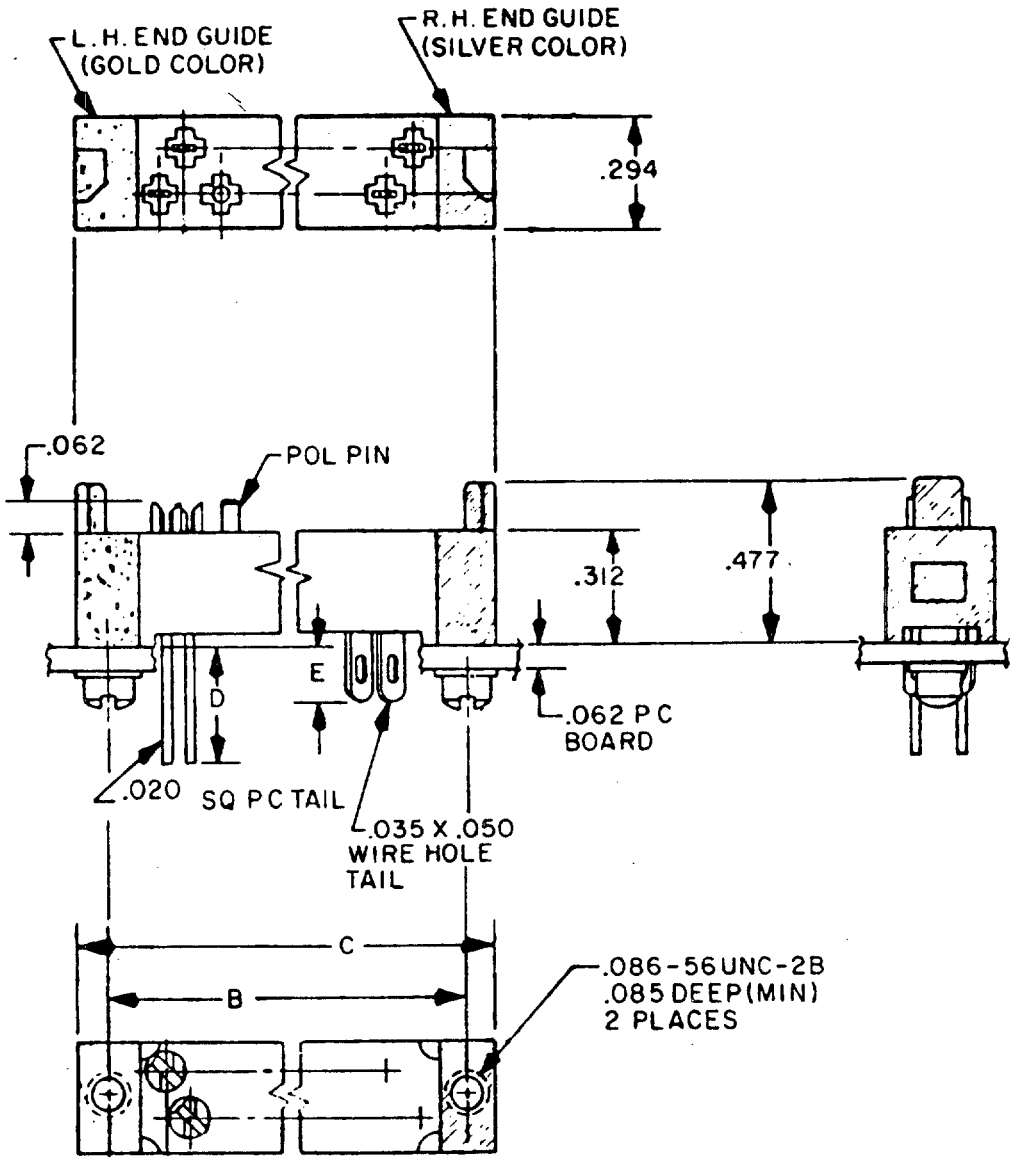

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, STRAIGHT-THRU, HERMAPHRODITIC CONTACT FOR PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/52

PART NUMBER: M55302/52-*

TABLE I. DIMENSIONS

DASH NUMBER*	NO. OF CONTACTS	DIMENSIONS			
		B	C REF	D	E
01	18	1.150	1.300	---	.187
02				.250	---
03				.281	---
04				.562	---
05				.125	---
06				.484	---
07	30	1.750	1.900	---	.187
08				.250	---
09				.281	---
10				.562	---
11				.125	---
12				.484	---
13	36	2.050	2.200	---	.187
14				.250	---
15				.281	---
16				.562	---
17				.125	---
18				.484	---
19	42	2.350	2.500	---	.187
20				.250	---
21				.281	---
22				.562	---
23				.125	---
24				.484	---
25	54	2.950	3.100	---	.187
26				.250	---
27				.281	---
28				.562	---
29				.125	---
30				.484	---
31	72	3.850	4.000	---	.187
32				.250	---
33				.281	---
34				.562	---
35				.125	---
36				.484	---


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATES WITH MIL-C-55302/53 AND MIL-C-55302/54 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT-ANGLE, HERMAPHRODITIC CONTACT FOR PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/53

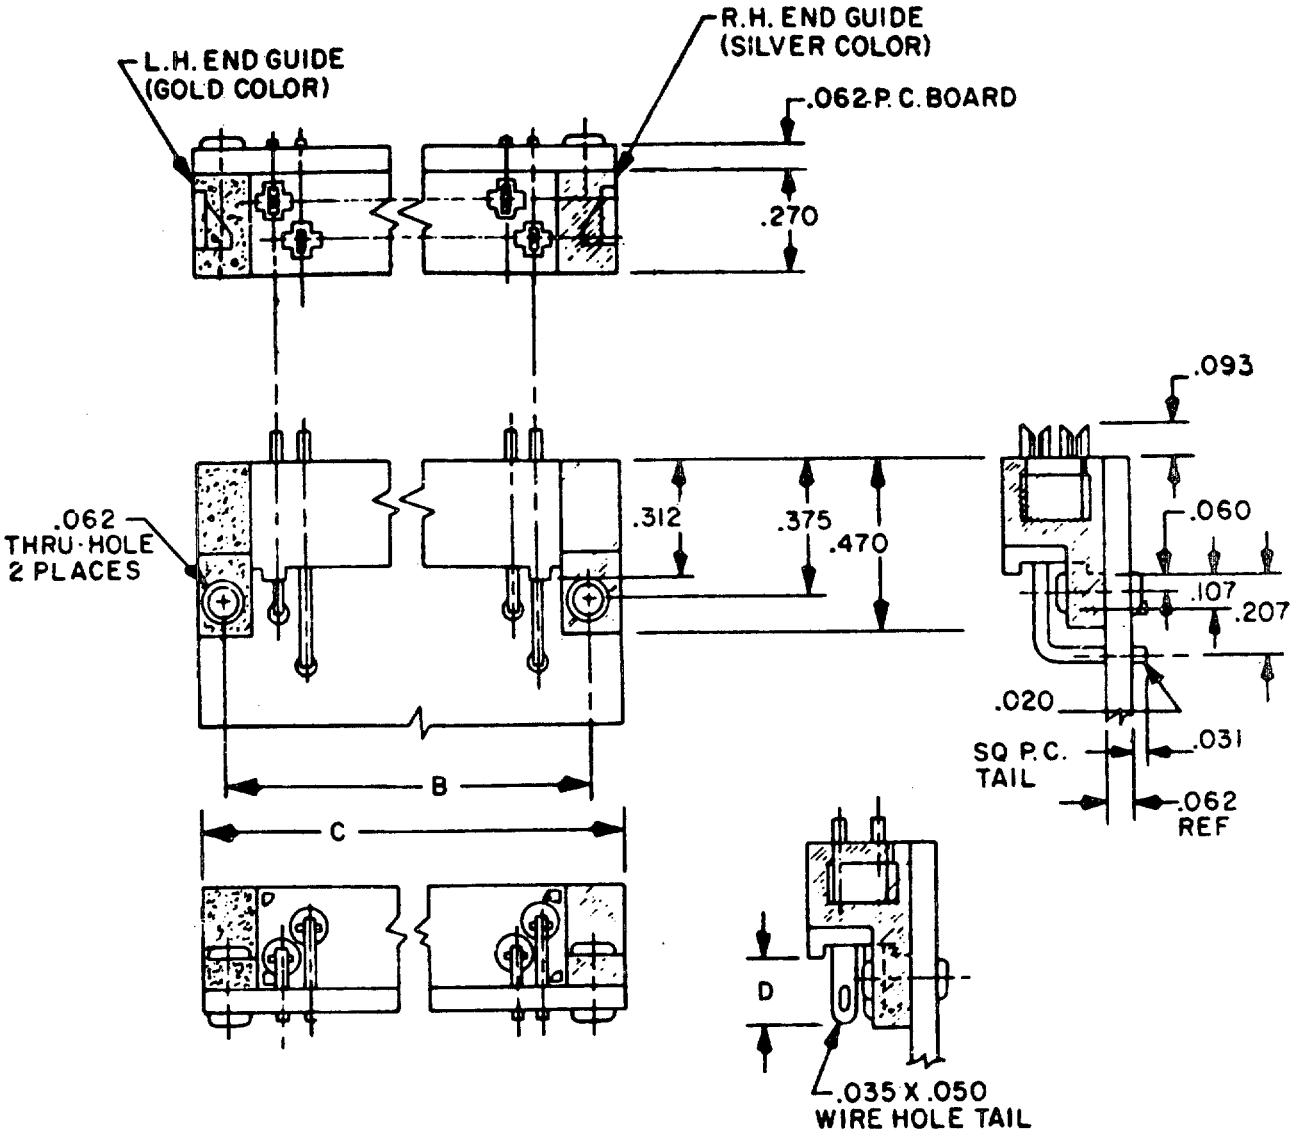

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT-ANGLE, HERMAPHRODITIC CONTACT FOR PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/53

PART NUMBER: M55302/53-*

TABLE I. DIMENSIONS

DASH NUMBER*	NO. OF CONTACTS	B	C REF	D
01	18	1.150	1.290	.157
02				---
03	30	1.750	1.890	.157
04				---
05	36	2.050	2.190	.157
06				---
07	42	2.350	2.490	.157
08				---
09	54	2.950	3.090	.157
10				---
11	72	3.850	3.990	.157
12				---


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

MATES WITH MIL-C-55302/52 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, STRAIGHT-THRU, HERMAPHRODITIC CONTACT FOR PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/54

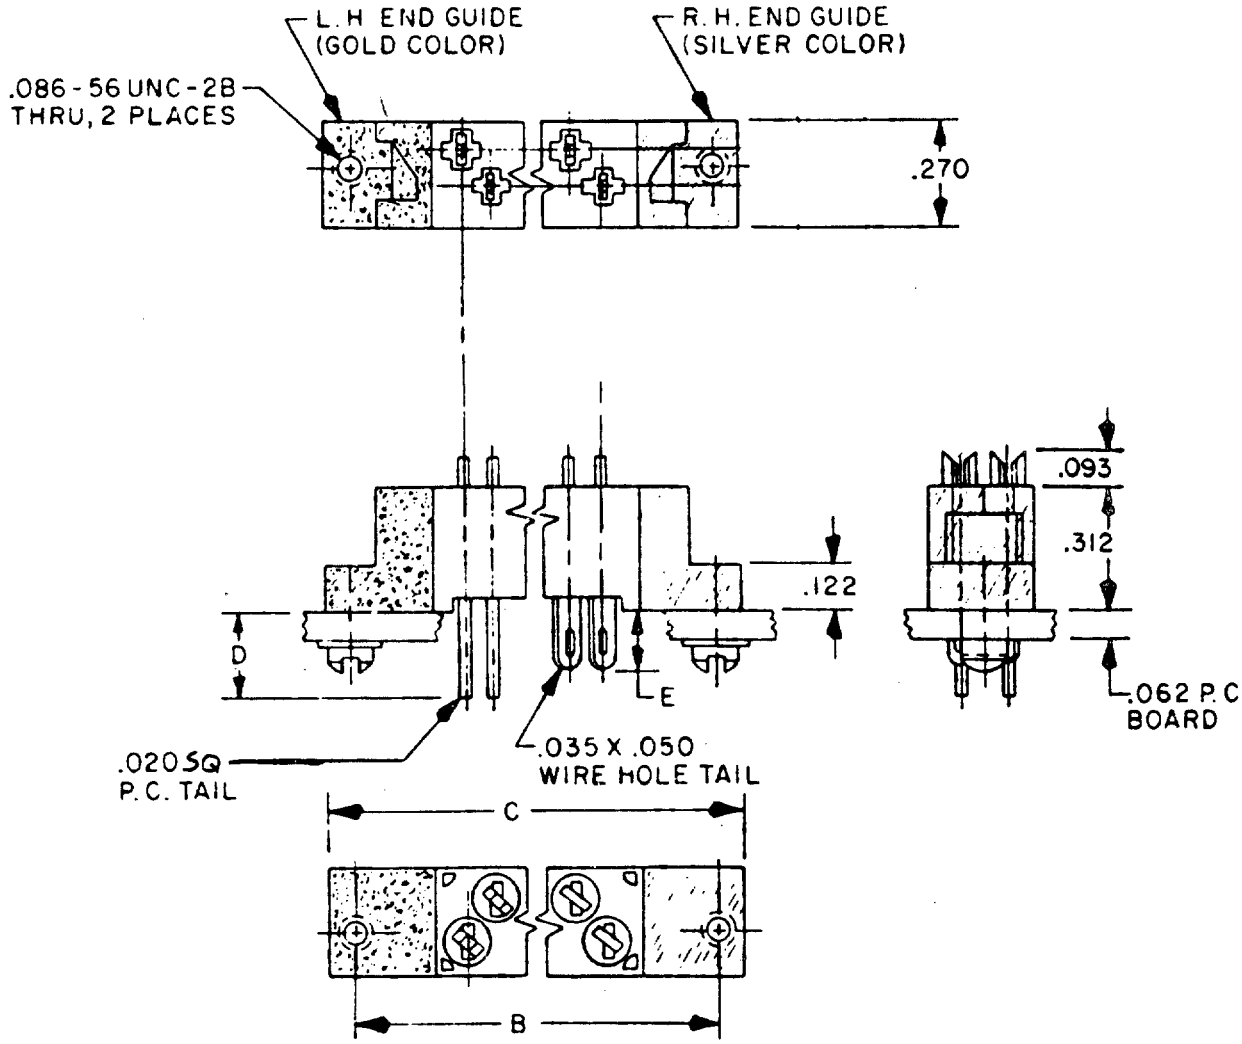

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, STRAIGHT-THRU, HERMAPHRODITIC CONTACT FOR PRINTED WIRING BOARDS (.100 SPACING)

MIL-C-55302/54

PART NUMBER: M55302/54-*

TABLE I. DIMENSIONS

DASH NUMBER*	NO. OF CONTACTS	DIMENSIONS			
		B	C REF	D	E
01	18	1.400	1.540	---	.157
02				.219	---
03				.250	---
04				.531	---
05				.093	---
06				.453	---
07	30	2.000	2.140	---	.157
08				.219	---
09				.250	---
10				.531	---
11				.093	---
12				.453	---
13	36	2.300	2.440	---	.157
14				.219	---
15				.250	---
16				.531	---
17				.093	---
18				.453	---
19	42	2.600	2.740	---	.157
20				.219	---
21				.250	---
22				.531	---
23				.093	---
24				.453	---
25	54	3.200	3.340	---	.157
26				.219	---
27				.250	---
28				.531	---
29				.093	---
30				.453	---
31	72	4.100	4.240	---	.157
32				.219	---
33				.250	---
34				.531	---
35				.093	---
36				.453	---


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


MATES WITH MIL-C-55302/52 CURRENT RATING 5 AMPERES MAX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/55

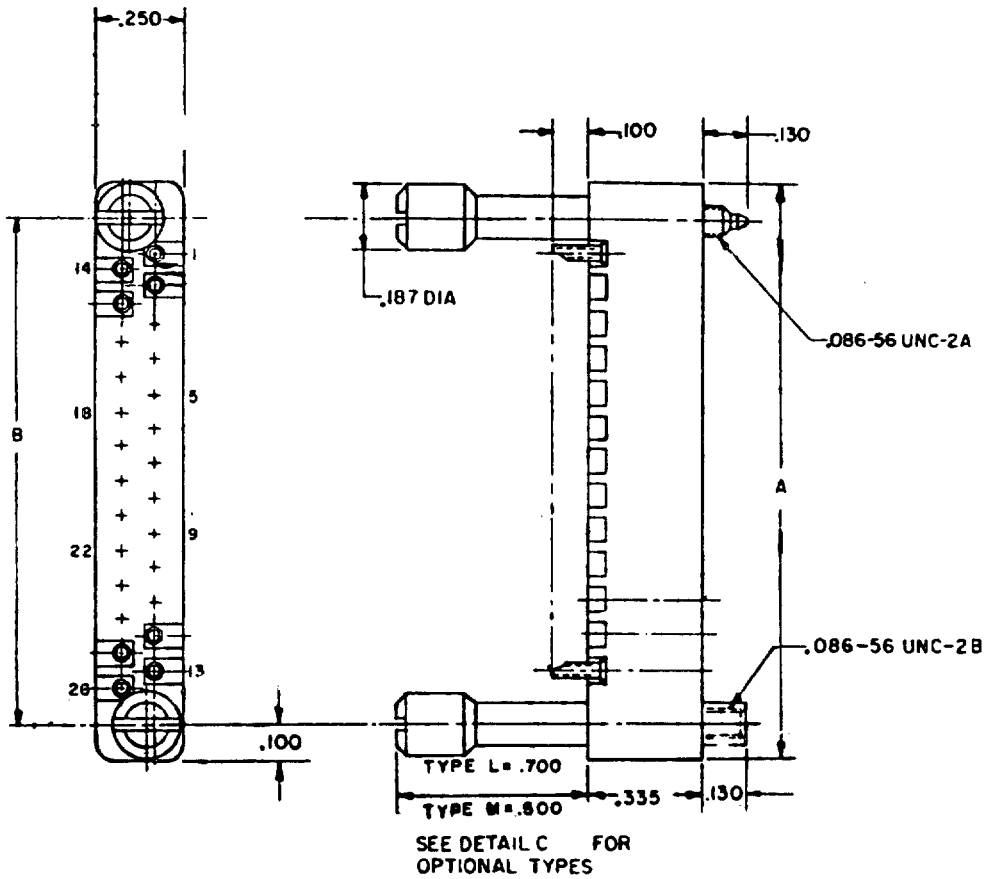


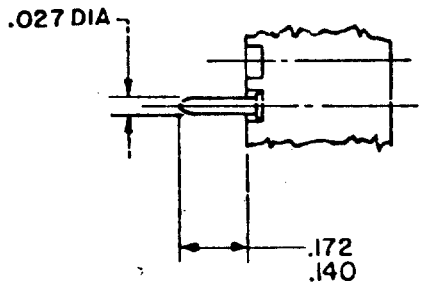

DIP TERMINAL

DETAIL A

FOR TYPE C DIP TERM
FOR TYPE B DIP TERM

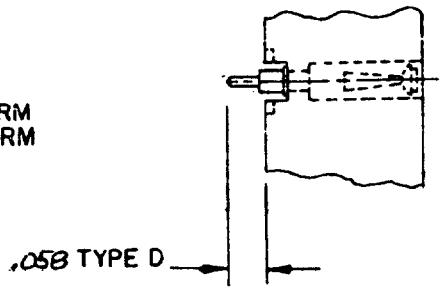

FLEXIBLE CIRCUIT TERMINAL

DETAIL B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/55

MATES WITH MIL-C-55302/56 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS A	DIMENSIONS BSC B
10	.850	.650
14	1.050	.850
20	1.350	1.150
24	1.550	1.350
26	1.650	1.450
30	1.850	1.650
36	2.150	1.950
40	2.350	2.150
44	2.550	2.350
50	2.850	2.650
54	3.050	2.850
56	3.150	2.950
60	3.350	3.150
66	3.650	3.450
70	3.850	3.650

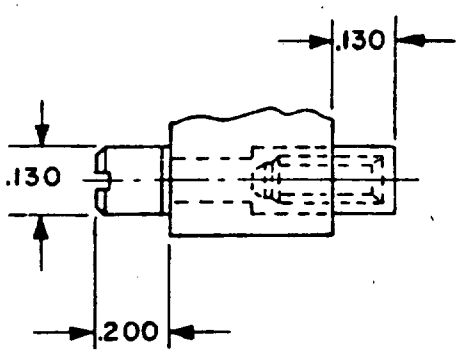

TYPE S SHORT TURNING JACKSCREW
DETAIL C

EXAMPLE OF PART NUMBER:


M55302/55- | A | 10 | L


- M55302/55-: BASIC NUMBER OF SPECIFICATION SHEET
- A: TYPE OF TERMINAL (SEE FIGURE 1)
  - A = SOLDER CUP
  - B = DIP TERMINAL .140 LONG
  - C = DIP TERMINAL .172 LONG
  - D = FLEXIBLE CIRCUIT TERMINAL .058
- 10: NUMBER OF CONTACTS (SEE FIGURE 1)
- L: TYPE MOUNTING HARDWARE
  - L = .700 TURNING JACKSCREW SLOTTED
  - M = .500 TURNING JACKSCREW SLOTTED
  - S = .200 TURNING JACKSKEW SLOTTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS,PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/56

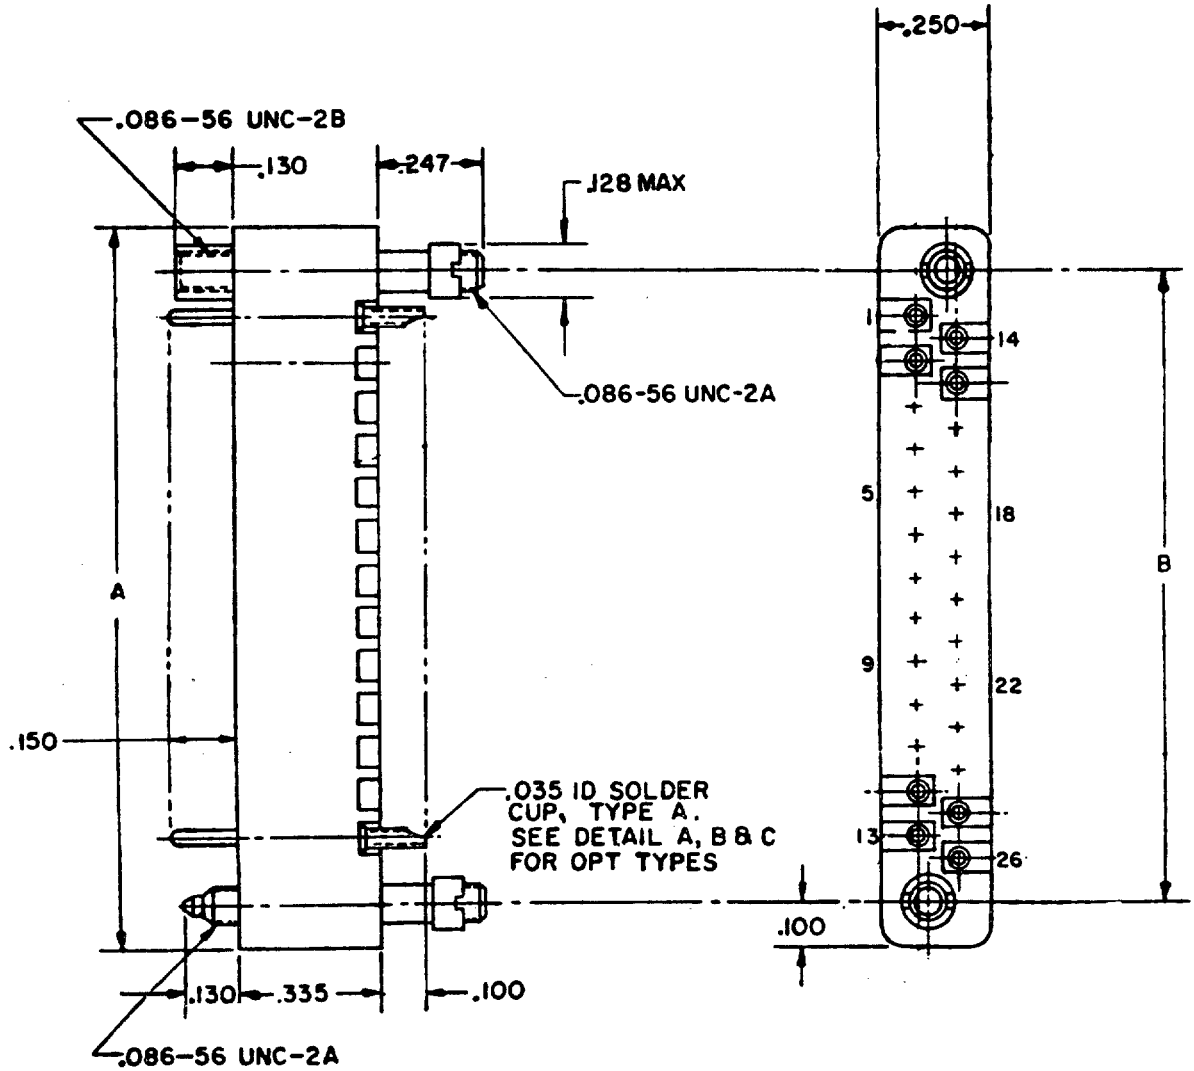



DETAIL A




WIRE WRAP TERM (TYPE D)
DETAIL B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/56

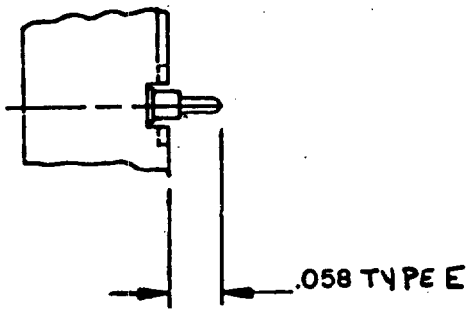

FLEXIBLE CIRCUIT TERMINAL

DETAIL C

MATES WITH MIL-C-55302/55
CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS A	DIMENSIONS BSC B
10	.850	.650
14	1.050	.850
20	1.350	1.150
24	1.550	1.350
26	1.650	1.450
30	1.850	1.650
36	2.150	1.950
40	2.350	2.150
44	2.550	2.350
50	2.850	2.650
54	3.050	2.850
56	3.150	2.950
60	3.350	3.150
66	3.650	3.450
70	3.850	3.650

EXAMPLE OF PART NUMBER:

M55302/56- A 10

M55302/56- : BASIC NUMBER OF SPECIFICATION SHEET

A : TYPE OF TERMINAL


- A = SOLDER CUP
- B = DIP TERMINAL .140 LONG
- C = DIP TERMINAL .172 LONG
- D = WIRE WRAP
- E = FLEXIBLE CIRCUIT TERMINAL .058

10 : NUMBER OF CONTACTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/57

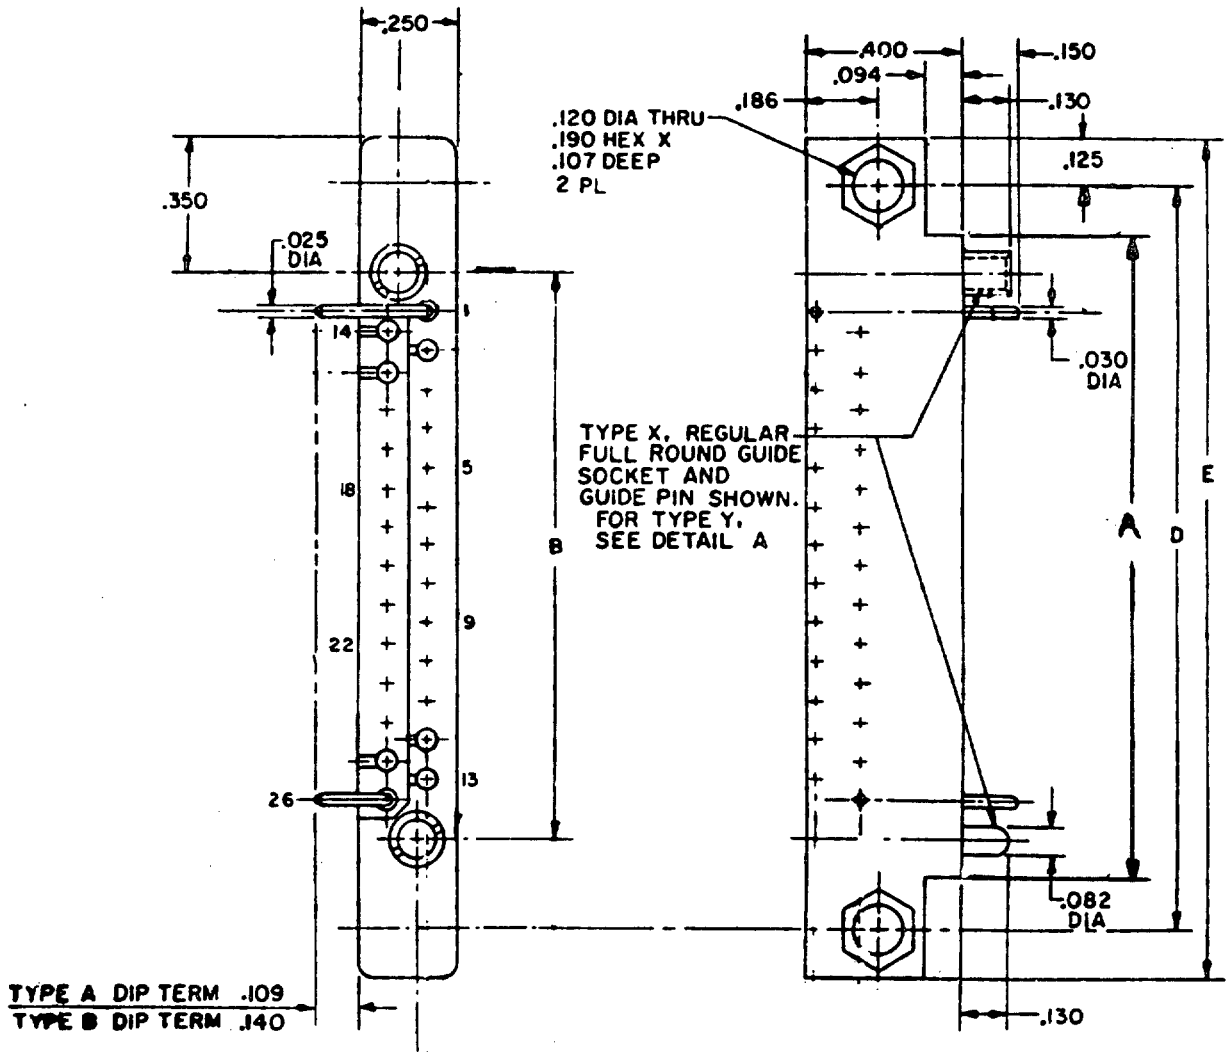


Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/57

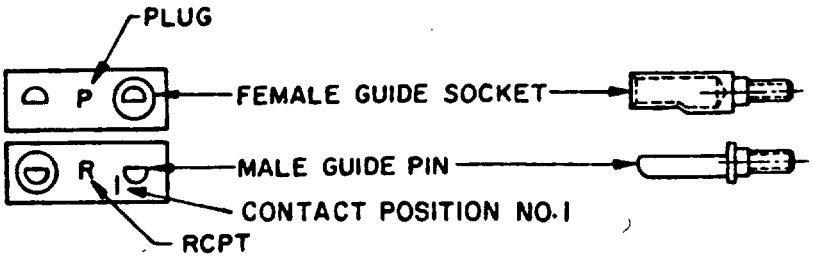


CONNECTOR POLARIZATION WITH D SHADED GUIDE PINS AND SOCKETS. (TYPE Y)

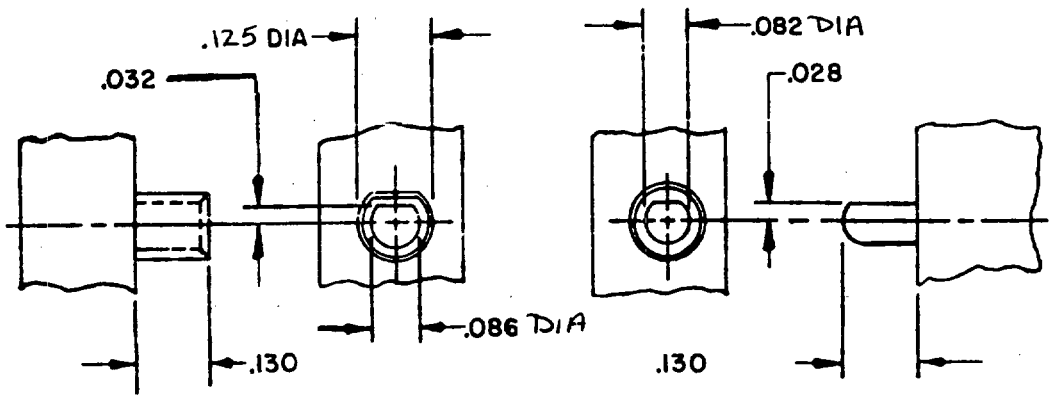

Detail A. Polarization pins/socket. (For polarization configuration see detail B)

DETAIL B. Polarization configuration chart.

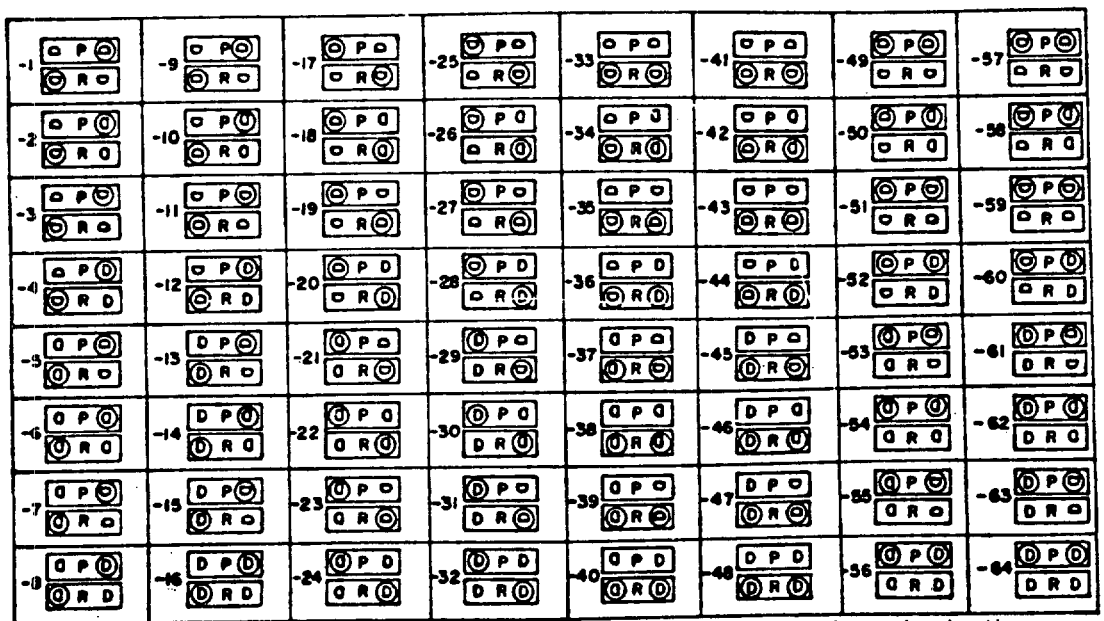

NOTE: Pins/socketsin chart can be easily adjusted to any desired configuration by the spanner wrench (see detail C).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/57

MATES WITH MIL-C-55302/58, /62, /64, /65, AND /66 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	A	BSC B	BSC D	E
10	.850	.650	1.100	1.350
14	1.050	.850	1.300	1.550
20	1.350	1.150	1.600	1.850
24	1.550	1.350	1.800	2.050
26	1.650	1.450	1.900	2.150
30	1.850	1.650	2.100	2.350
36	2.150	1.950	2.400	2.650
40	2.350	2.150	2.600	2.850
44	2.550	2.350	2.800	3.050
50	2.850	2.650	3.100	3.350
54	3.050	2.850	3.300	3.550
56	3.150	2.950	3.400	3.650
60	3.350	3.150	3.600	3.850
66	3.650	3.450	3.900	4.150
70	3.850	3.650	4.100	4.350


EXAMPLE OF PART NUMBER:

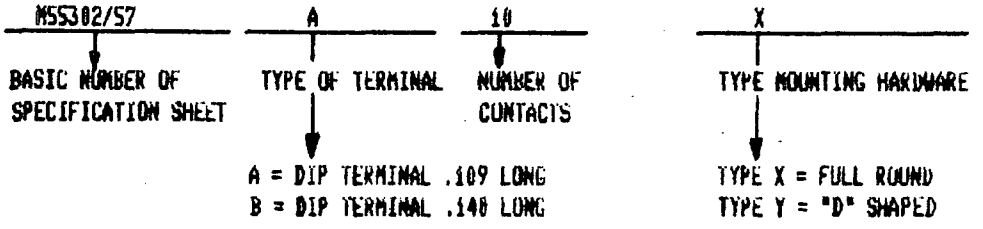

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/58

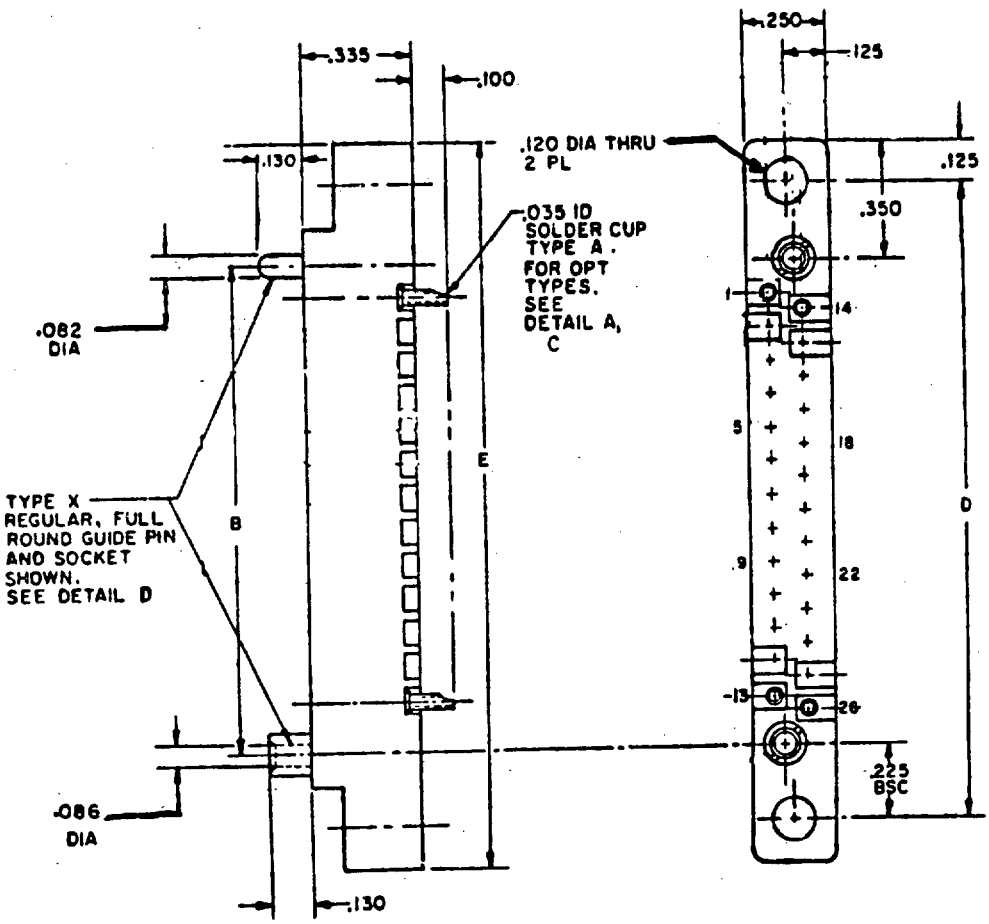


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/58

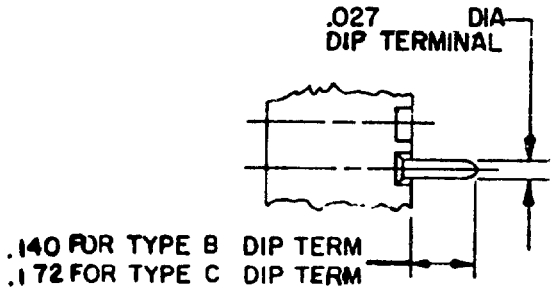


DETAIL A

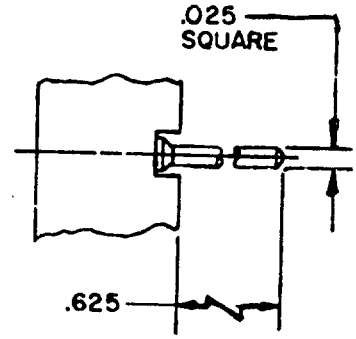

WIRE WRAP TERMINAL (TYPE D)

DETAIL C

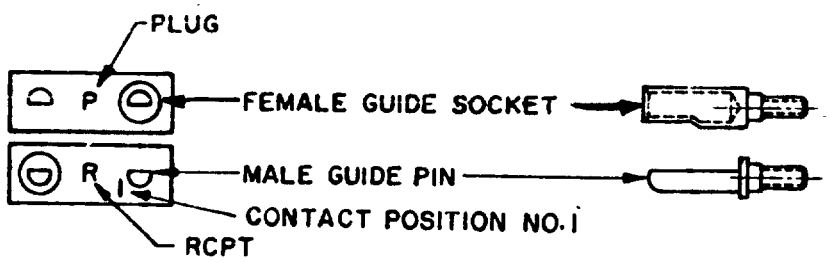

CONNECTOR POLARIZATION WITH D SHAPED GUIDE PINS AND SOCKETS. (TYPE Y)

DETAIL D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/58

MATES WITH MIL-C-55302/57, /61, AND /63

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS		
	B BSC	D BSC	E
10	.650	1.100	1.350
14	.850	1.300	1.550
20	1.150	1.600	1.850
24	1.350	1.800	2.050
26	1.450	1.900	2.150
30	1.650	2.100	2.350
36	1.950	2.400	2.650
40	2.150	2.600	2.850
44	2.350	2.800	3.050
50	2.650	3.100	3.350
54	2.850	3.300	3.550
56	2.950	3.400	3.650
60	3.150	3.600	3.850
66	3.450	3.900	4.150
70	3.650	4.100	4.350


EXAMPLE OF PART NUMBER:

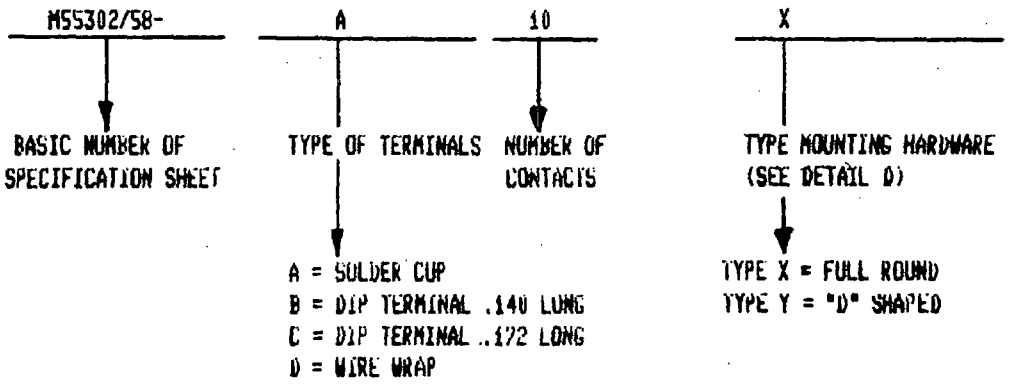

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES,CNTACTS,
PLUG, PIN CONTACTS, DECADE INCREMENTS 90, 100 AND 120 CONTACT POSITIONSNCH SPACING)
FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/59

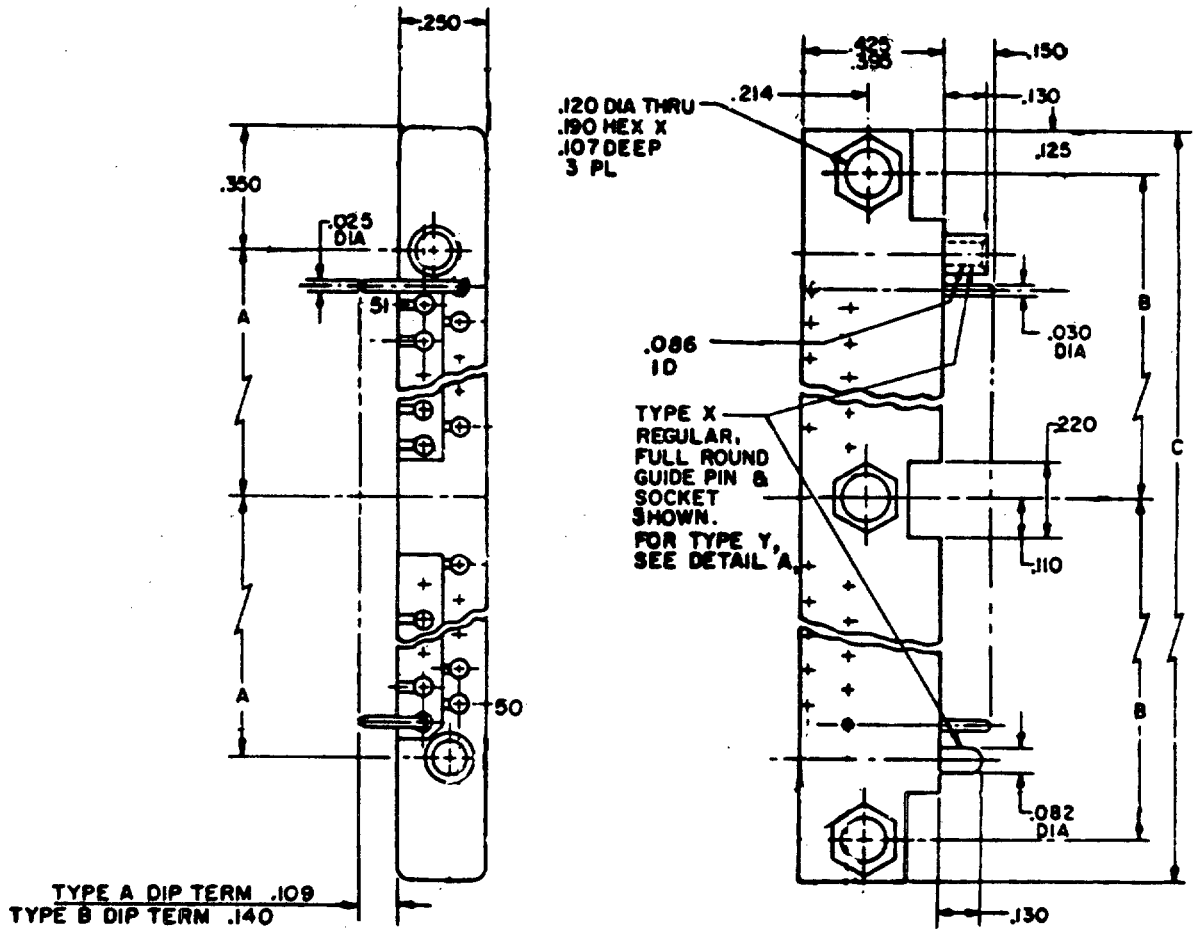

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES,
PLUG, PIN CONTACTS, DECADE INCREMENTS 90, 100 AND 120 CONTACT POSITIONS
FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/59

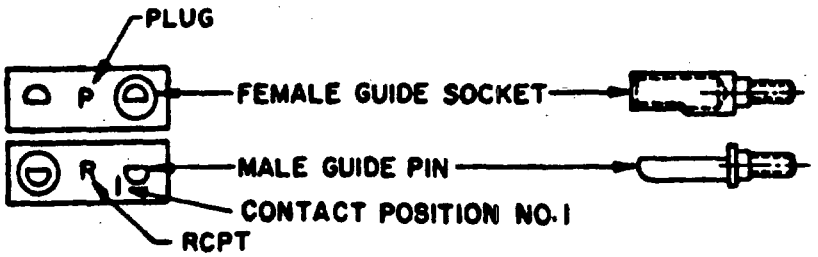

CONNECTOR POLARIZATION WITH D SHAPED GUIDE
PINS AND SOCKETS. (TYPE Y)

DETAIL A

MATES WITH MIL-C-55302/60 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS		
	BSC A	BSC B	C
90	2.475	2.700	5.650
100	2.725	2.950	6.150
120	3.225	3.450	7.150

EXAMPLE OF PART NUMBER:

M55302/59- A 100 X

M55302/59- : BASIC NUMBER OF SPECIFICATION SHEET

A : TYPE OF TERMINAL
A = DIP TERMINAL .109 LONG
B = DIP TERMINAL .140 LONG


100 : NUMBER OF CONTACTS


X : TYPE MOUNTING HARDWARE
TYPE X = FULL ROUND
TYPE Y = "D" SHAPED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES,
RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 90 THRU 120
CONTACT POSITIONS (.100 INCH SPACING)

MIL-C-55302/60

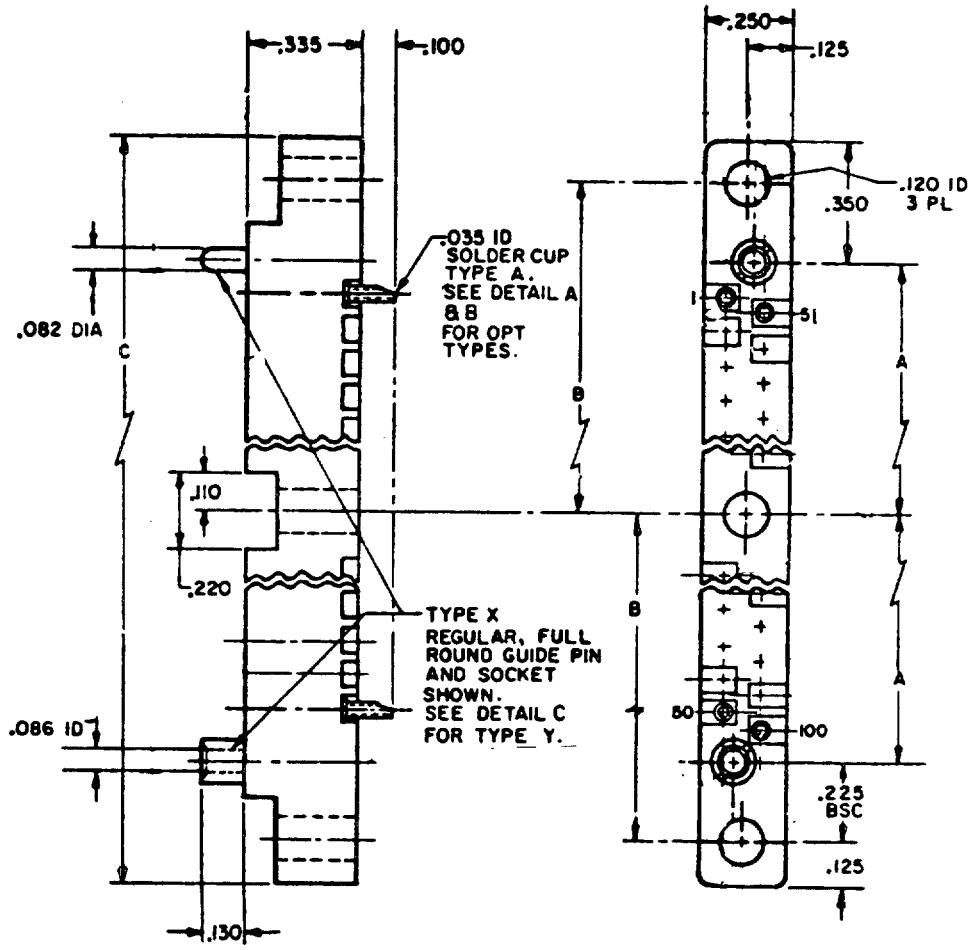




.172 FOR TYPE C DIP TERM
.140 FOR TYPE B DIP TERM

DETAIL A

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES,
RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 90 THRU 120
CONTACT POSITIONS (.100 INCH SPACING)

MIL-C-55302/60



WIRE WRAP TERMINAL (TYPE D)

DETAIL B

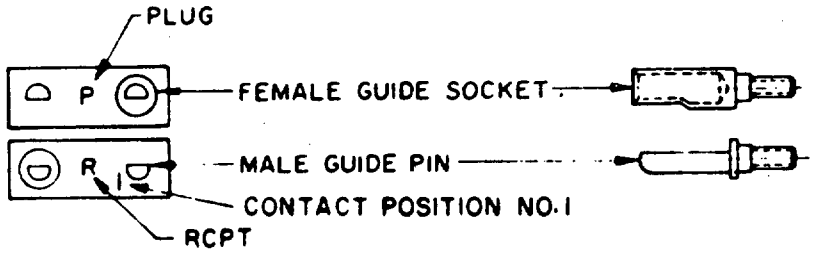

CONNECTOR POLARIZATION WITH D SHAPED GUIDE
PINS AND SOCKETS. (TYPE Y)

DETAIL C

MATES WITH MIL-C-55302/59 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS		
	BSC A	BSC B	C
90	2.475	2.700	5.650
100	2.725	2.950	6.150
120	3.225	3.450	7.150

EXAMPLE OF PART NUMBER:

M55302/60- A 100 X

M55302/60- : BASIC NUMBER OF SPECIFICATION SHEET

A : TYPE OF TERMINAL
- A = SOLDER CUP
- B = DIP TERMINAL .140 LONG
- C = DIP TERMINAL .172 LONG
- D = WIRE WRAP


100 : NUMBER OF CONTACTS

X : TYPE OF GUIDE PIN AND /OR SOCKET
- TYPE X = FULL ROUND
- TYPE Y = "D" SHAPED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/61

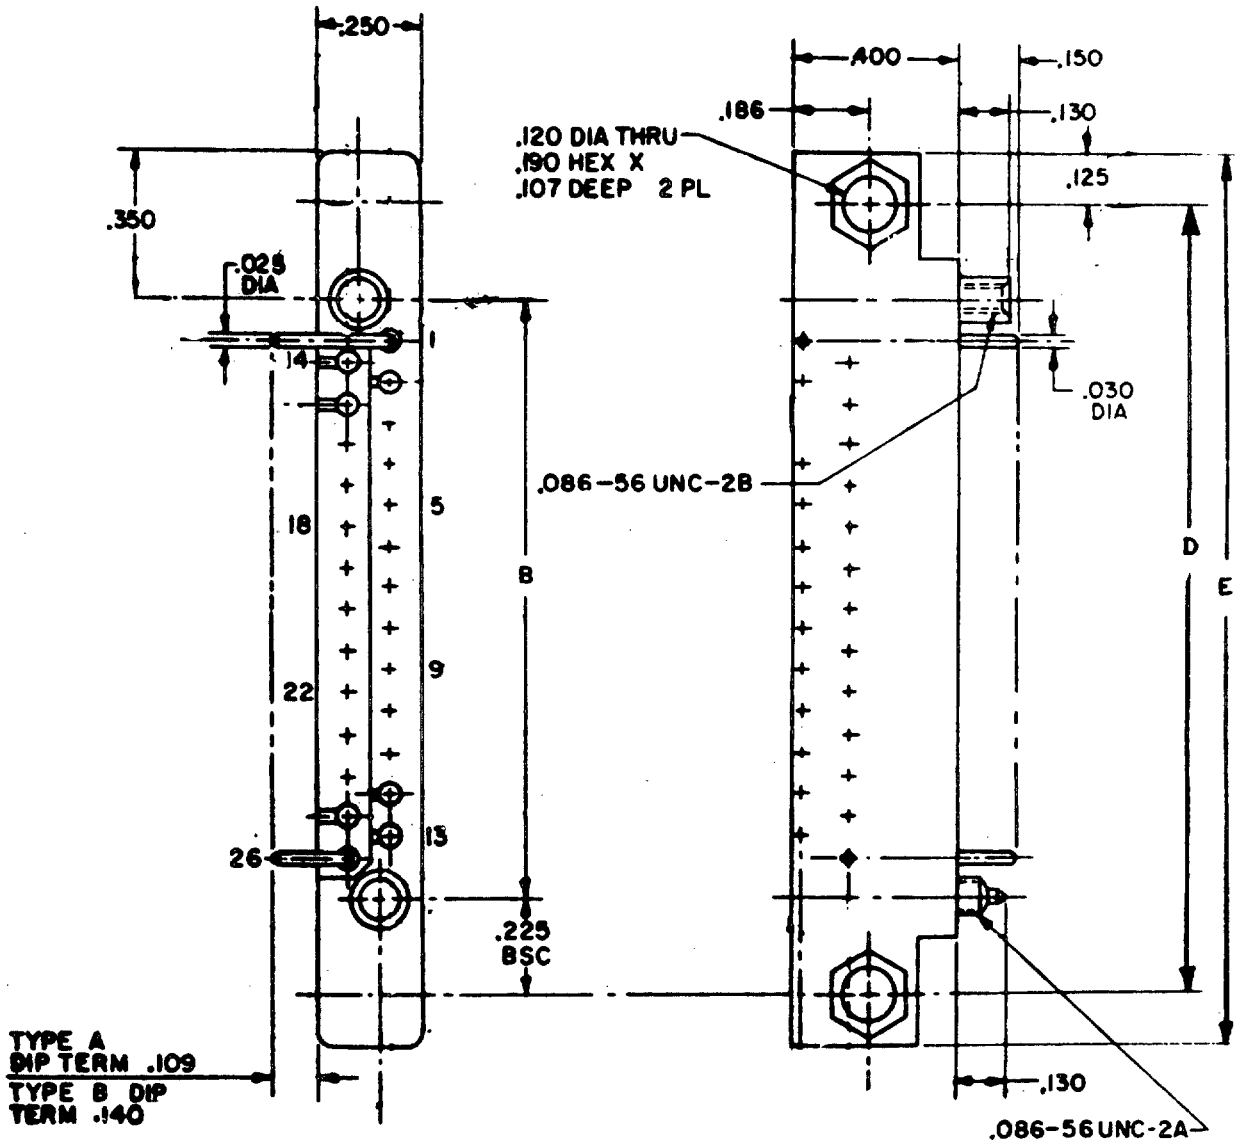

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/61

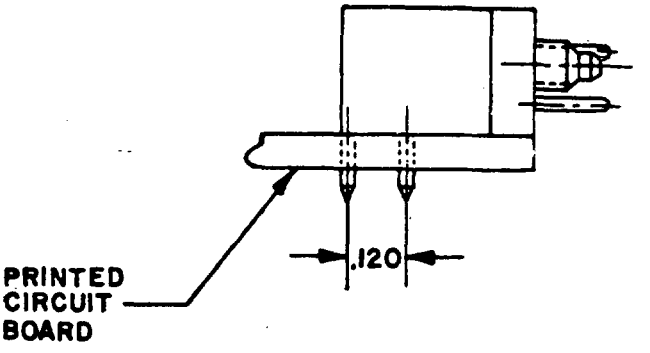

MATES WITH MIL-C-55302/62, /65, /66, AND /58 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS		
	BSC B	BSC D	E
10	.650	1.100	1.350
14	.850	1.300	1.550
20	1.150	1.600	1.850
24	1.350	1.800	2.050
26	1.450	1.900	2.150
30	1.650	2.100	2.350
36	1.950	2.400	2.650
40	2.150	2.600	2.850
44	2.350	2.800	3.050
50	2.650	3.100	3.350
54	2.850	3.300	3.550
56	2.950	3.400	3.650
60	3.150	3.600	3.850
66	3.450	3.900	4.150
70	3.650	4.100	4.350

EXAMPLE OF PART NUMBER:

M55302/61- A 10

M55302/61- : BASIC NUMBER OF SPECIFICATION SHEET

A : TYPE OF TERMINAL


10 : NUMBER OF CONTACTS


A = DIP TERMINAL .109 LONG
B = DIP TERMINAL .140 LONG

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/62

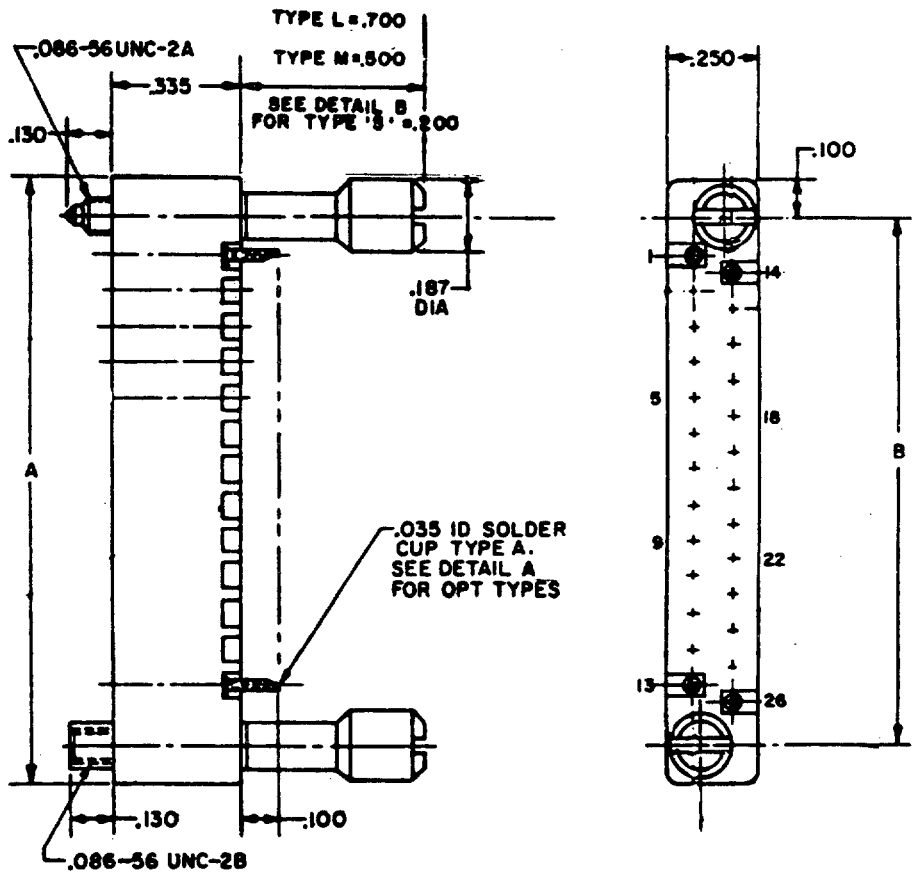

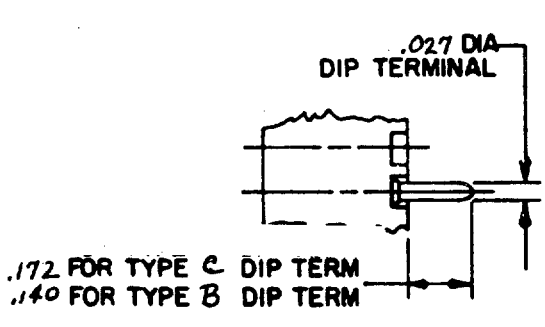

DETAIL A

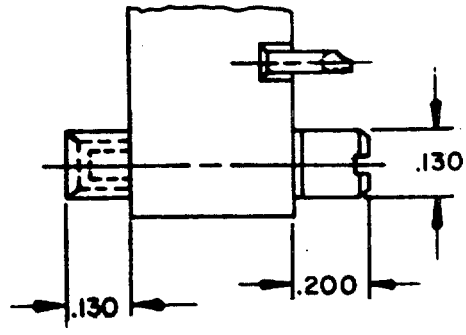

TYPE S SHORT TURNING JACKSCREW

DETAIL B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLES, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/62

MATES WITH MIL-C-55302/61, /57, AND /63 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS	
	A	BSC B
10	.850	.650
14	1.050	.850
20	1.350	1.150
24	1.550	1.350
26	1.650	1.450
30	1.850	1.650
36	2.150	1.950
40	2.350	2.150
44	2.550	2.350
50	2.850	2.650
54	3.050	2.850
56	3.150	2.950
60	3.350	3.150
66	3.650	3.450
70	3.850	3.650

EXAMPLE OF PART NUMBER:


M55302/62- A 10 L

- M55302/62- : BASIC NUMBER OF SPECIFICATION SHEET
- A : TYPE OF TERMINAL
  - A = SOLDER CUP
  - B = DIP TERMINAL .140 LONG
  - C = DIP TERMINAL .172 LONG
- 10 : NUMBER OF CONTACTS
- L : TYPE MOUNTING HARDWARE
  - L = .700 SLOTTED TURNING JACKSCREW
  - M = .500 SLOTTED TURNING JACKSCREW
  - S = .200 SLOTTED TURNING JACKSCREW

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/63

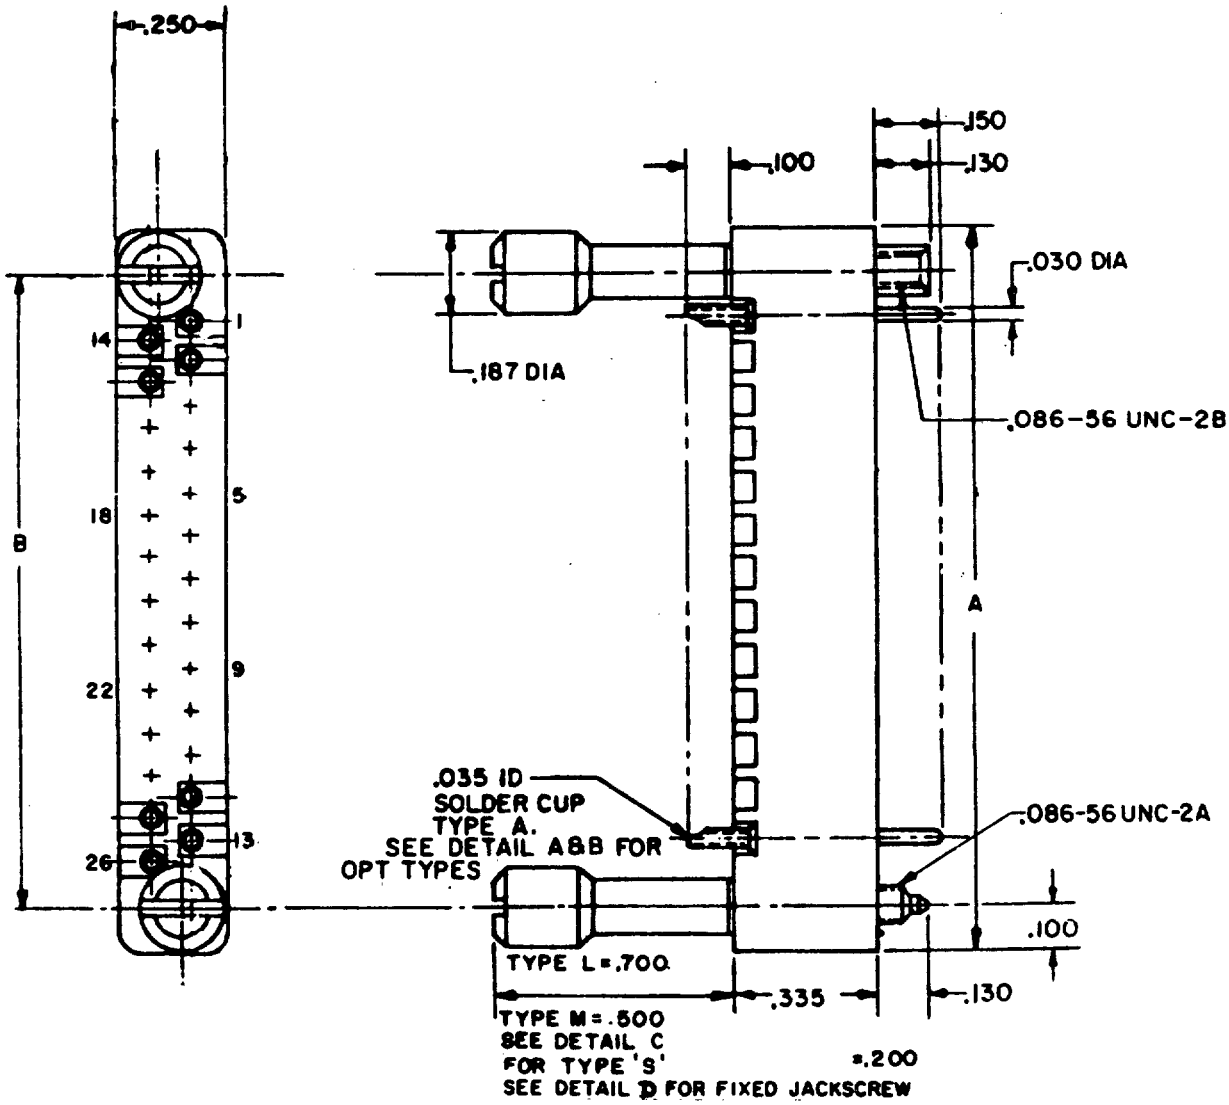


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/63

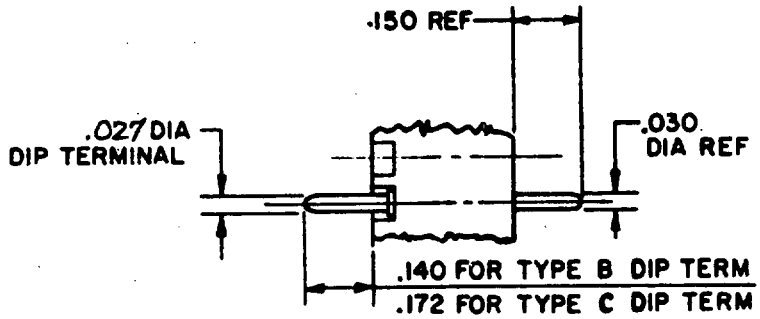


DETAIL A

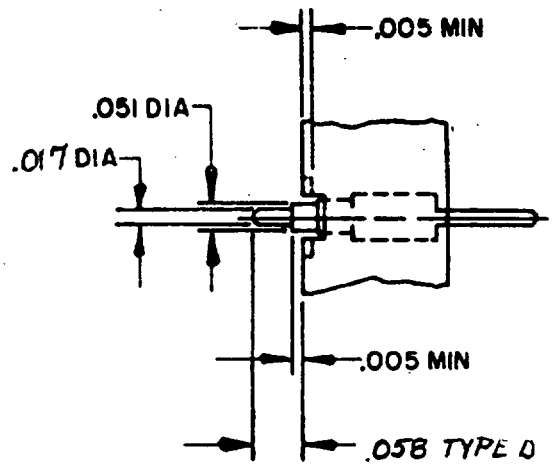


FLEXIBLE CIRCUIT TERMINAL

DETAIL B

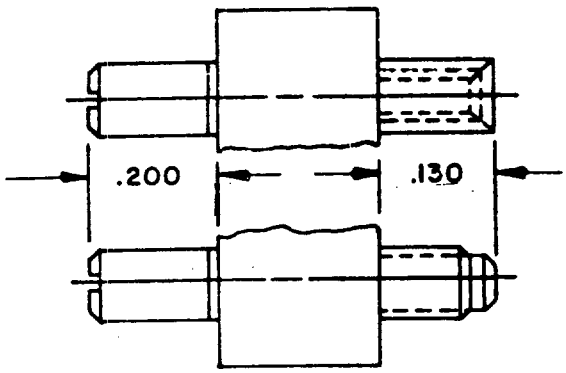

TYPE S SHORT TURNING
SLOTTED JACKSCREWS

DETAIL C

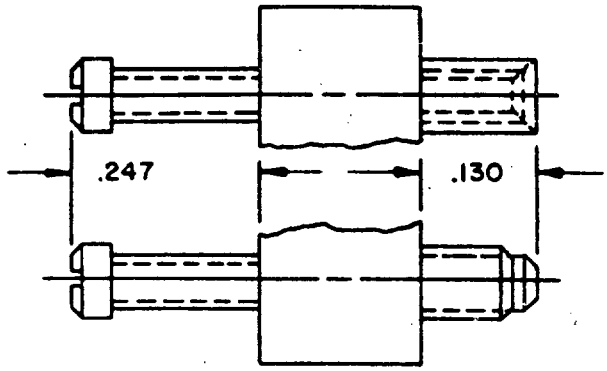

TYPE F FIXED JACKSCREWS

DETAIL D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/63

MATES WITH MIL-C-55302/58, /62, /64, AND /65 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS	
	A	BSC B
10	.850	.650
14	1.050	.850
20	1.350	1.150
24	1.550	1.350
26	1.650	1.450
30	1.850	1.650
36	2.150	1.950
40	2.350	2.150
44	2.550	2.350
50	2.850	2.650
54	3.050	2.850
56	3.150	2.950
60	3.350	3.15
66	3.650	3.450
70	3.850	3.650

EXAMPLE OF PART NUMBER:


M55302/63- A 10 F

- M55302/63- : BASIC NUMBER OF SPECIFICATION SHEET
- A : TYPE OF TERMINAL
  - A = SOLDER CUP
  - B = DIP TERMINAL .140 LONG
  - C = DIP TERMINAL .172 LONG
  - D = .058 FLEXIBLE CIRCUIT TERMINAL
  - E = .100 FLEXIBLE CIRCUIT TERMINAL
- 10 : NUMBER OF CONTACTS
- F : TYPE MOUNTING HARDWARE
  - F = FIXED JACKSCREW
  - X = FULL ROUND
  - Y = "D" SHAPED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLES, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/64

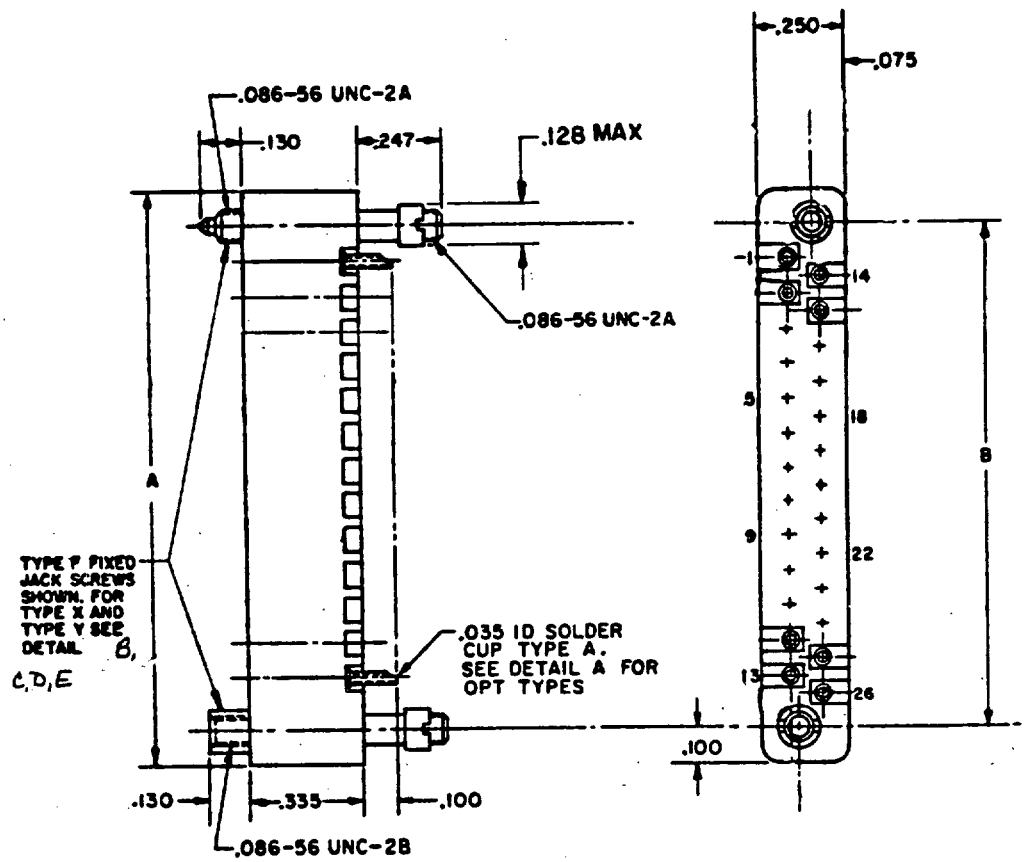


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED CIRCUIT WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/64

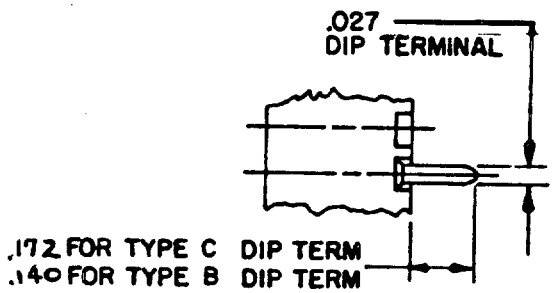


DETAIL A

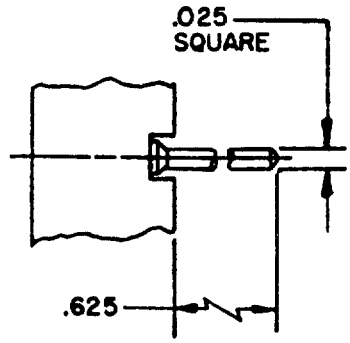


WIRE WRAP TERMINAL (TYPE D)

DETAIL B

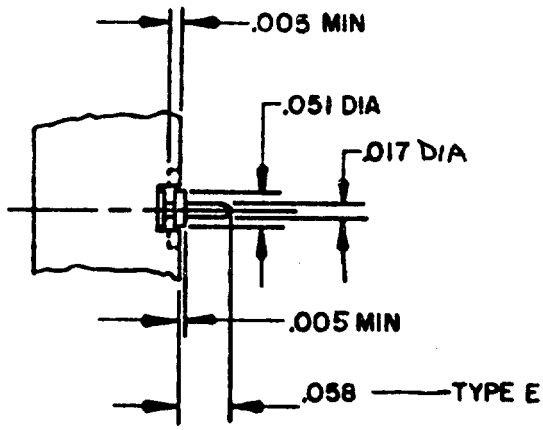


FLEXIBLE CIRCUIT TEMINAL

DETAIL C

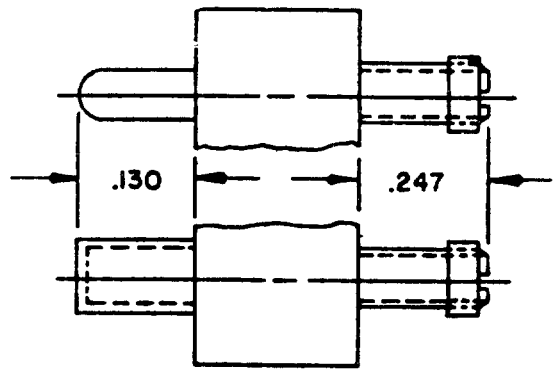

TYPE X FULL ROUND GUIDE PIN AND SOCKET

DETAIL D

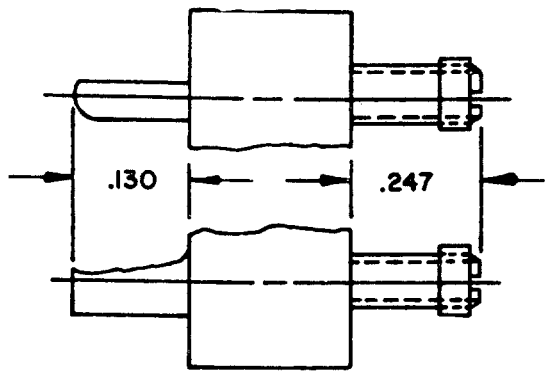

TYPE Y D SHAPED GUIDE PIN AND SOCKET

DETAIL E

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/64

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS	
	A	BSC B
10	.850	.650
14	1.050	.850
20	1.350	1.150
24	1.550	1.350
26	1.650	1.450
30	1.850	1.650
36	2.150	1.950
40	2.350	2.150
44	2.550	2.350
50	2.850	2.650
54	3.050	2.850
56	3.150	2.950
60	3.350	3.150
66	3.650	3.450
70	3.850	3.650

MATES WITH MIL-C-55302/57, AND /63 CURRENT RATING 5 AMPERES MAX PER CONTACT

EXAMPLE OF PART NUMBER:


M55302/64- | A | 10 | L

- M55302/64- : BASIC NUMBER OF SPECIFICATION SHEET
- A : TYPE OF TERMINAL
  - A = SOLDER CUP
  - B = DIP TERMINAL .140 LONG
  - C = DIP TERMINAL .172 LONG
  - D = WIRE WRAP
  - E = .100 FLEXIBLE CIRCUIT TERMINAL
- 10 : NUMBER OF CONTACTS
- L : TYPE MOUNTING HARDWARE
  - F = FIXED JACKSCREW
  - X = FULL ROUND
  - Y = "D" SHAPED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/65

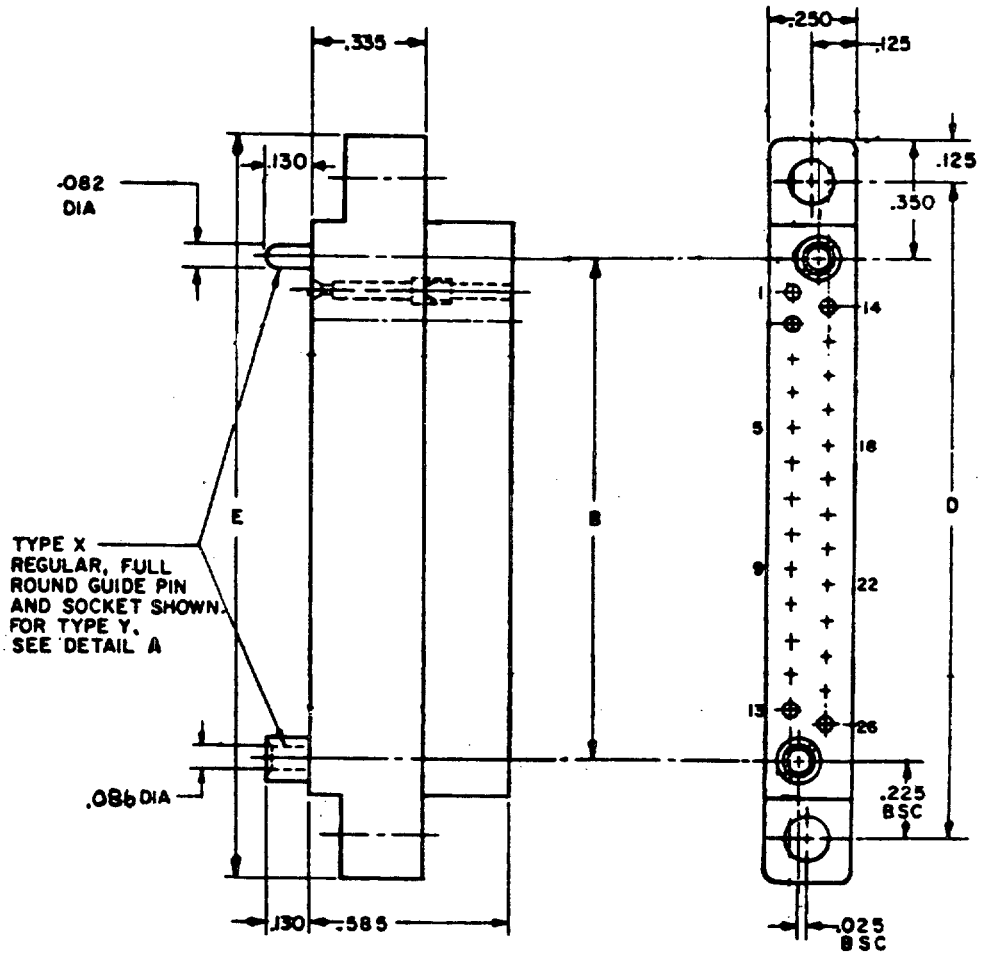

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/65

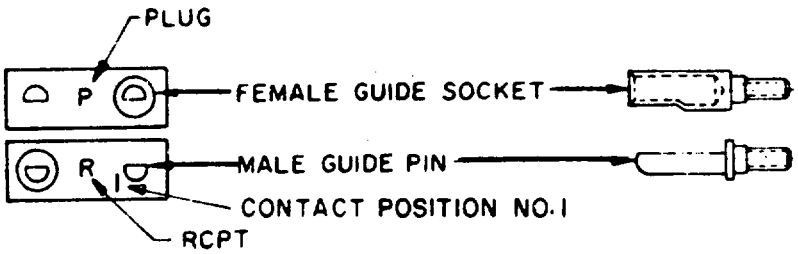

CONNECTOR POLARIZATION WITH D SHAPED GUIDE PINS AND SOCKETS. (TYPE Y)

DETAIL A

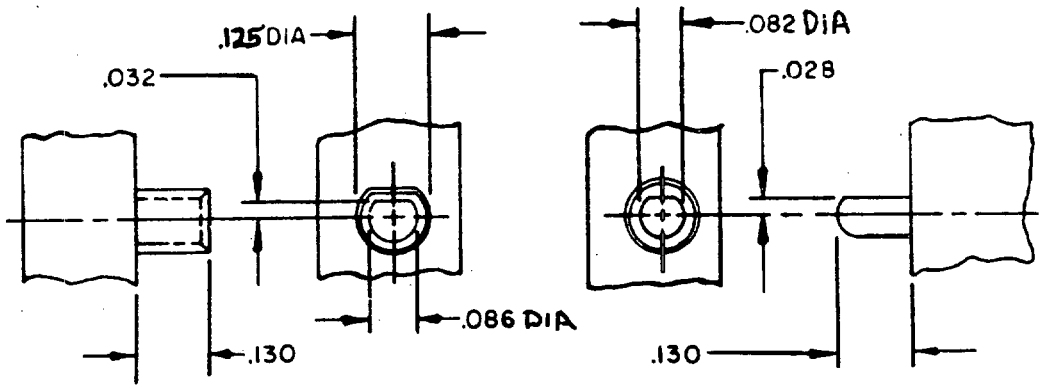

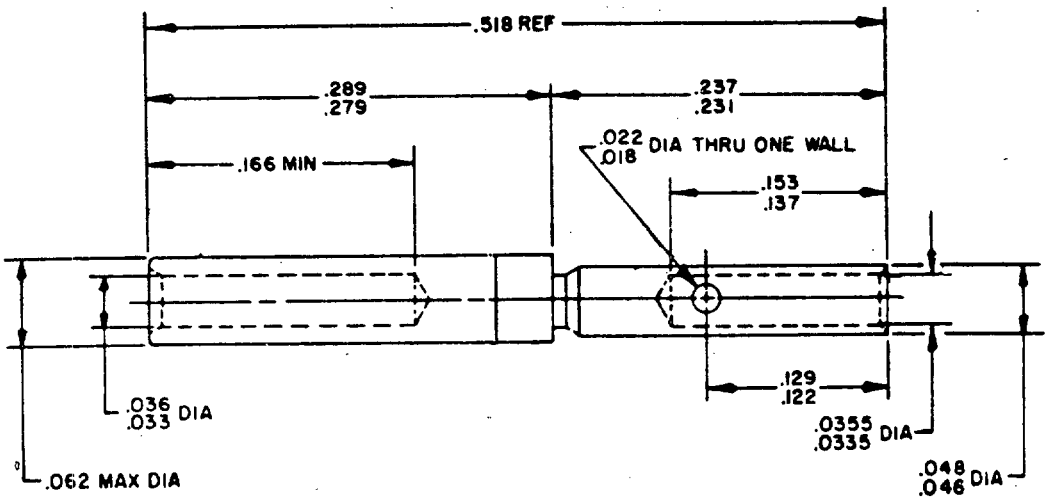

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/65

MATES WITH MIL-C-55302/57, /61, AND /63 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS		
	BSC B	BSC D	E
10	.650	1.100	1.350
14	.850	1.300	1.550
20	1.150	1.600	1.850
24	1.350	1.800	2.050
26	1.450	1.900	2.150
30	1.650	2.100	2.350
36	1.950	2.400	2.650
40	2.150	2.600	2.850
44	2.350	2.800	3.050
50	2.650	3.100	3.350
54	2.850	3.300	3.550
56	2.950	3.400	3.650
60	3.150	3.600	3.850
66	3.450	3.900	4.150
70	3.650	4.100	4.350

EXAMPLE:

M55302/65- 10 X

M55302/65- : BASIC NUMBER OF SPECIFICATION SHEET


10 : NUMBER OF CONTACTS (CONTACTS SUPPLIED WITH CONNECTOR, ARE CRIMP REMOVABLE TYPE FOR NO. 22 MAXIMUM WIRE SIZE 048 MAXIMUM INSULATION)


X : TYPE OF GUIDE PIN AND/OR SOCKET
TYPE X = FULL ROUND.
TYPE Y = "D" SHAPED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES,
RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND
INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR
PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/66

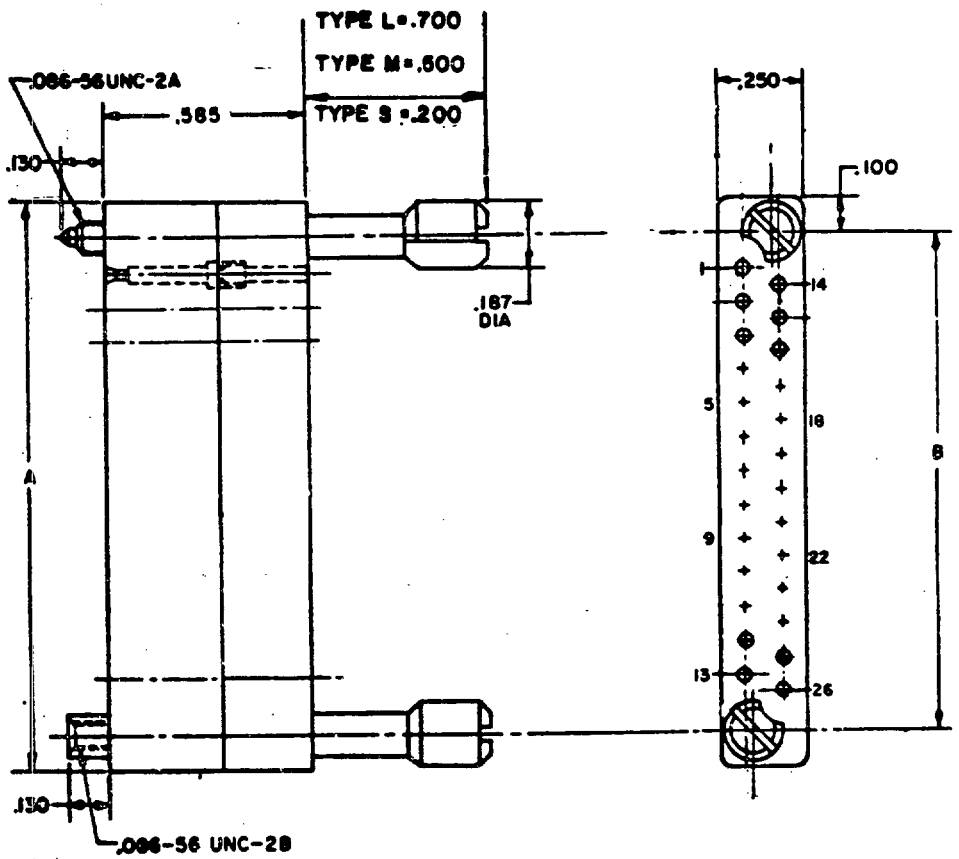

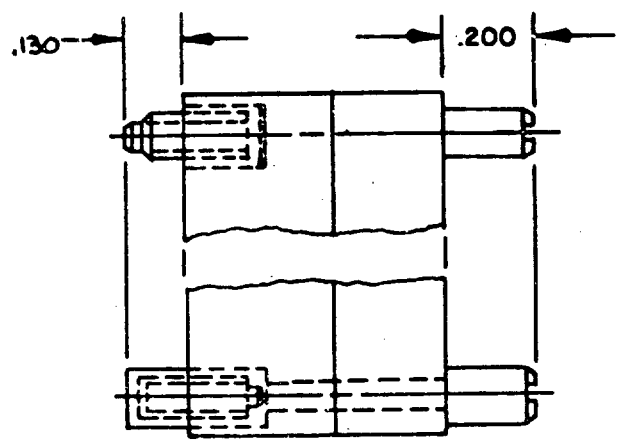

TYPE S SHORT TURNING SLOTTED JACKSCREWS

DETAIL A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES,
RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 1 THRU 70 CONTACT POSITIONS AND
INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR
PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/66

MATES WITH MIL-C-55302/57, /61, AND /63 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS

NUMBER OF CONTACTS	DIMENSIONS	
	A	BSC B
10	.850	.650
14	1.050	.850
20	1.350	1.150
24	1.550	1.350
26	1.650	1.450
30	1.850	1.650
36	2.150	1.950
40	2.350	2.150
44	2.550	2.350
50	2.850	2.650
54	3.050	2.850
56	3.150	2.950
60	3.350	3.150
66	3.650	3.450
70	3.850	3.650

EXAMPLE OF PART NUMBER:

M55302/66- | 10 | L

M55302/66- : BASIC NUMBER OF SPECIFICATION SHEET


10 : NUMBER OF CONTACTS (CONTACTS SUPPLIED WITH CONNECTOR ARE CRIMP REMOVABLE TYPE FOR NO. 22 MAXIMUM WIRE SIZE .048 MAXIMUM INSULATION)

L : TYPE OF MOUNTING
L = .700 SLOTTED TURNING JACKSCREW
M = .500 SLOTTED TURNING JACKSCREW
S = .200 SLOTTED TURNING JACKSCREW

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT ANGLE, 30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/110

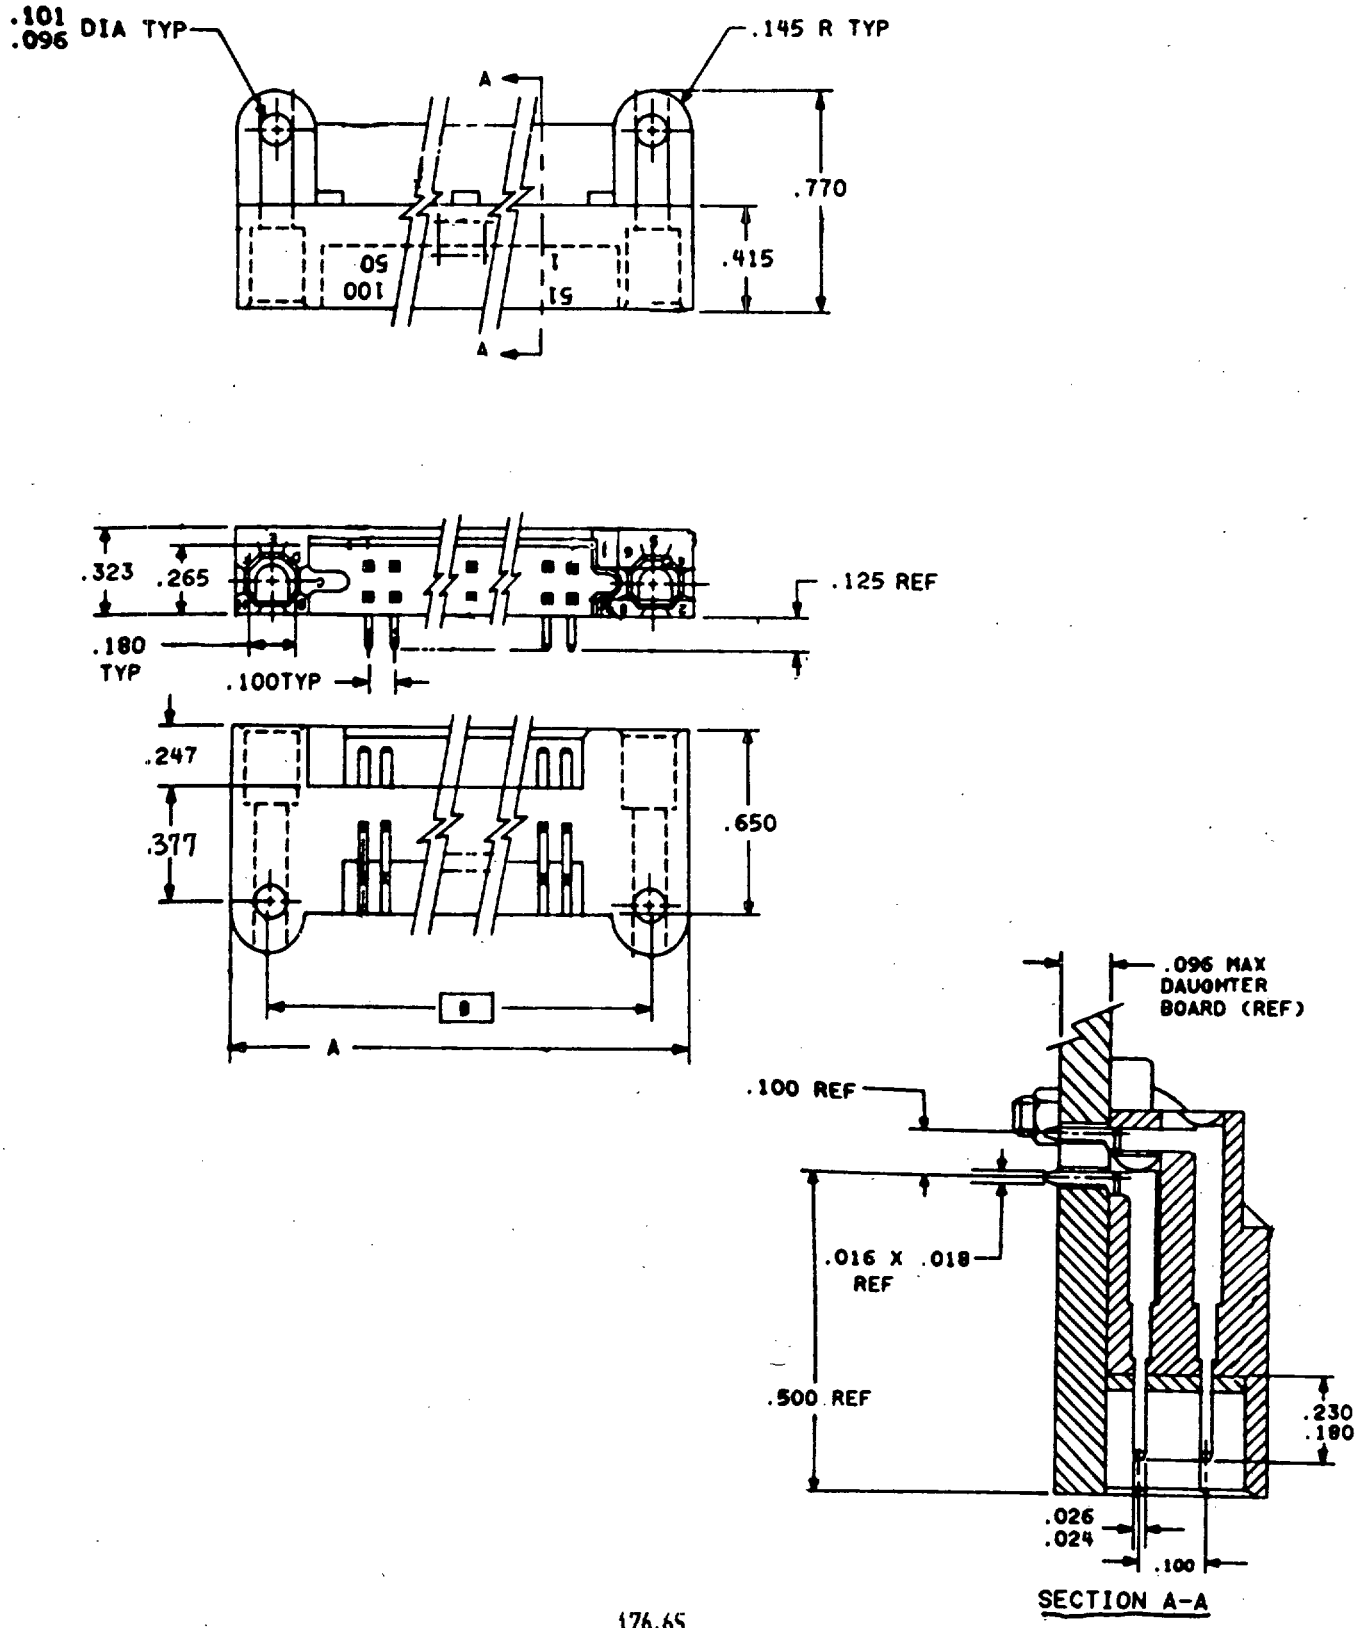

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT ANGLE, 30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/110

PART NUMBER: M55303/110-*

MATES WITH MIL-C-553032/27 CONTACT RATING 3 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS (TYPES 1 AND 2 CONNECTORS)


DASH NUMBER*	TYPE NUMBER	NO. OF CONTACTS	DIMENSIONS		CONTACT IDENTIFICATION NUMBERS
			A	B	
10	II	30	2.355	2.065	1, 16
11	II	40	2.855	2.565	1, 21
12	II	50	3.355	3.065	1, 26
13	II	60	3.855	3.565	1, 31
14	II	70	4.355	4.065	1, 36
15	II	80	4.855	4.565	1, 41
16	II	90	5.355	5.065	1, 46
17	II	100	5.855	5.565	1, 51
18	II	110	6.355	6.065	1, 56

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, SOCKET CONTACTS, STRAIGHT-THRU, FOR MULTILAYERED PRINTED WIRING BOARDS, (.100 SPACING)

MIL-C-55302/111

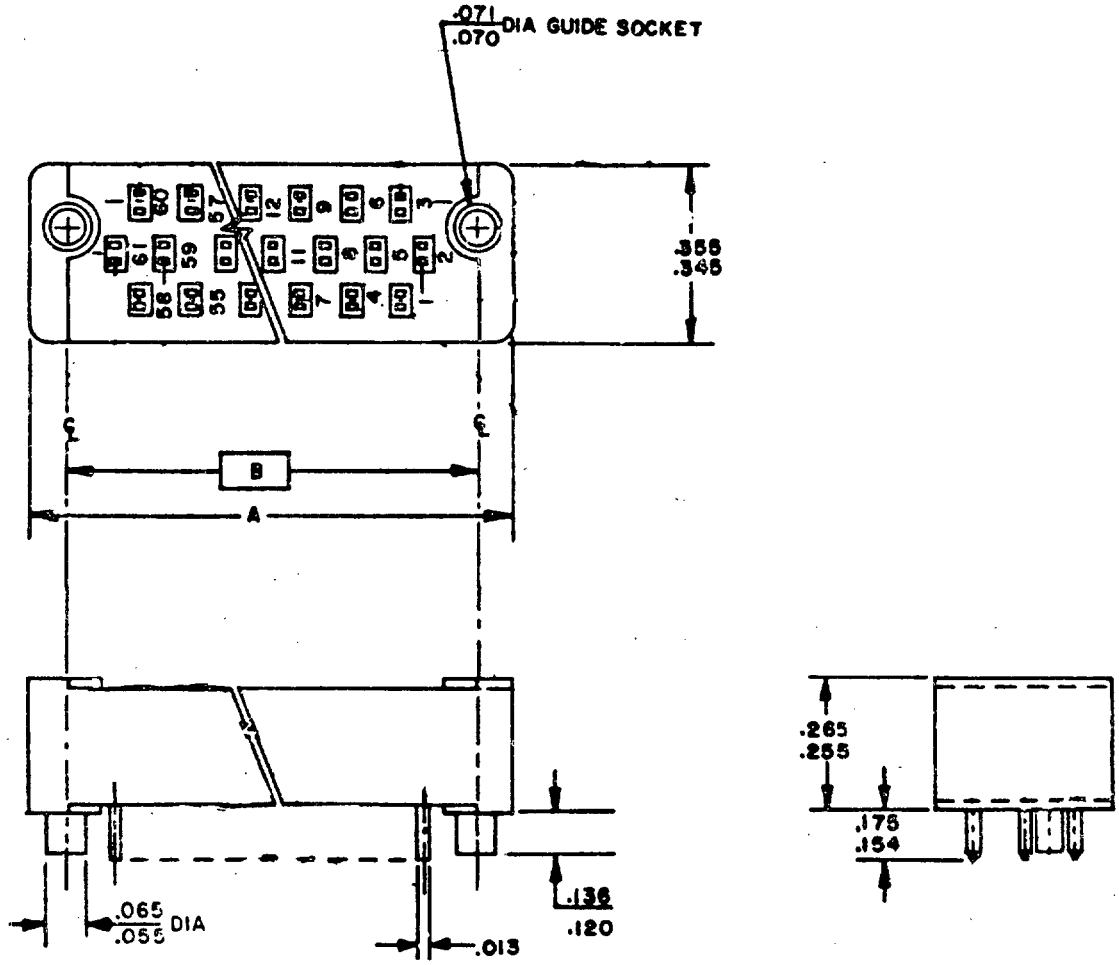

PART NUMBER: M55302/111-*

MATES WITH MIL-C-55302/7, AND ARE PRIMARILY FOR USE WITH MULTILAYERED PRINTED WIRING BOARDS.
CURRENT RATING 5 AMPERES MAX

TABLE I. DIMENSIONS


DASH NUMBER*	NO. OF CONTACTS	A	B BASIC
01	13	.800	.600
02	25	1.200	1.000
03	37	1.600	1.400
04	49	2.000	1.800

*--COMPLETE PART NUMBER INCLUDES DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
RECEPTACLE, SOCKET CONTACT, FOR PRINTED CIRCUIT BOARDS AND SOLDERLESS WRAP
(.100 INCH CONTACT SPACING) 12, 16, 20, 28, 40, 60, 80, AND 100 CONTACT POSITIONS

MIL-C-55302/114

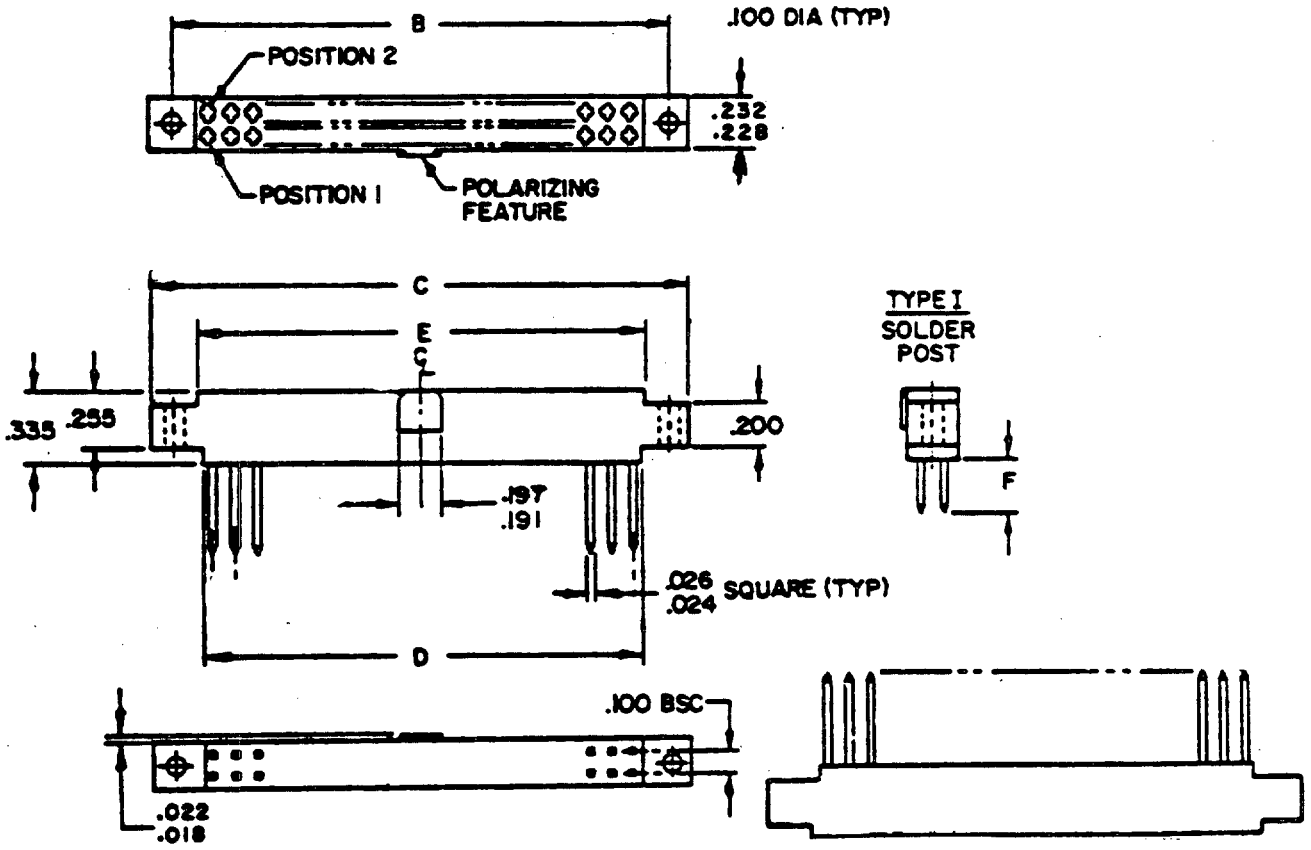

PART NUMBER: M55302/115-*

MATES WITH MIL-C-55302/115 CURRENT RATING 3 AMPERES MAX

TABLE I. DIMENSIONS


DASH NUMBER*	NO.OF CONTACTS	TYPE TERMINAL	B	C	D	E	F
05	20	I	1.240	1.440	.984	1.036	.250
09	40		2.240	2.440	1.984	2.036	
11	60		3.240	3.440	2.984	3.036	
13	80		4.240	4.440	3.984	4.036	
15	100		5.240	5.440	4.984	5.036	

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
PLUG, RIGHT-ANGLE, PIN CONTACTS, FOR PRINTED CIRCUIT BOARDS,
(.100 INCH CONTACT SPACING), 12, 16, 20, 28, 40, 60, 80, AND 100 CONTACT POSITIONS

MIL-C-55302/115

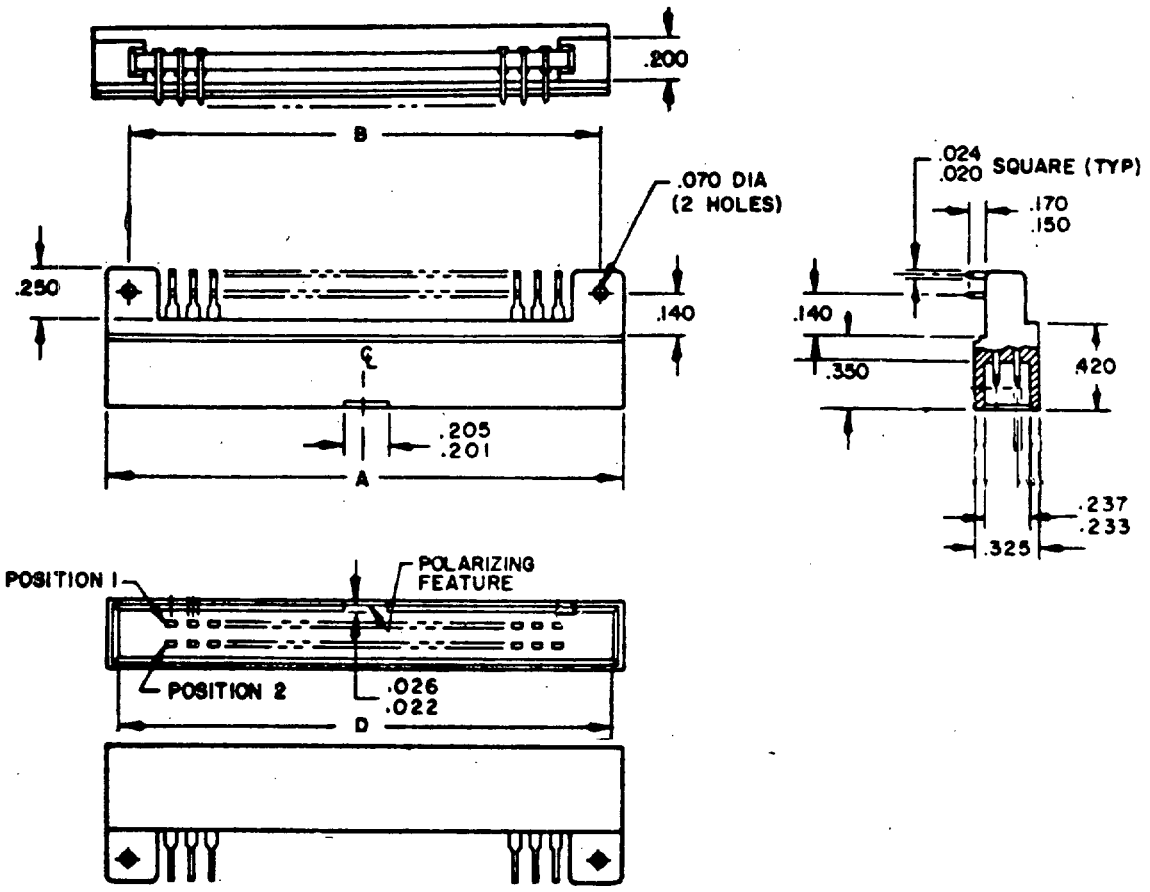

PART NUMBER: M55302/115-#

MATES WITH MIL-C-55302/114 CURRENT RATING 3 AMPERES MAX

TABLE I. DIMENSIONS


DASH NUMBER#	NO. OF CONTACTS	A	B	D
03	20	1.550	1.330	1.460
05	40	2.550	2.330	2.460
06	60	3.550	3.330	3.460
07	80	4.550	4.330	4.460
08	100	5.550	5.330	5.460


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
PLUG, RIGHT-ANGLE, 90 THRU 240 CONTACT POSITIONS, FOR PRINTED
WIRING BOARDS (.100 INCH CONTACT SPACING)

MIL-C-55302/129

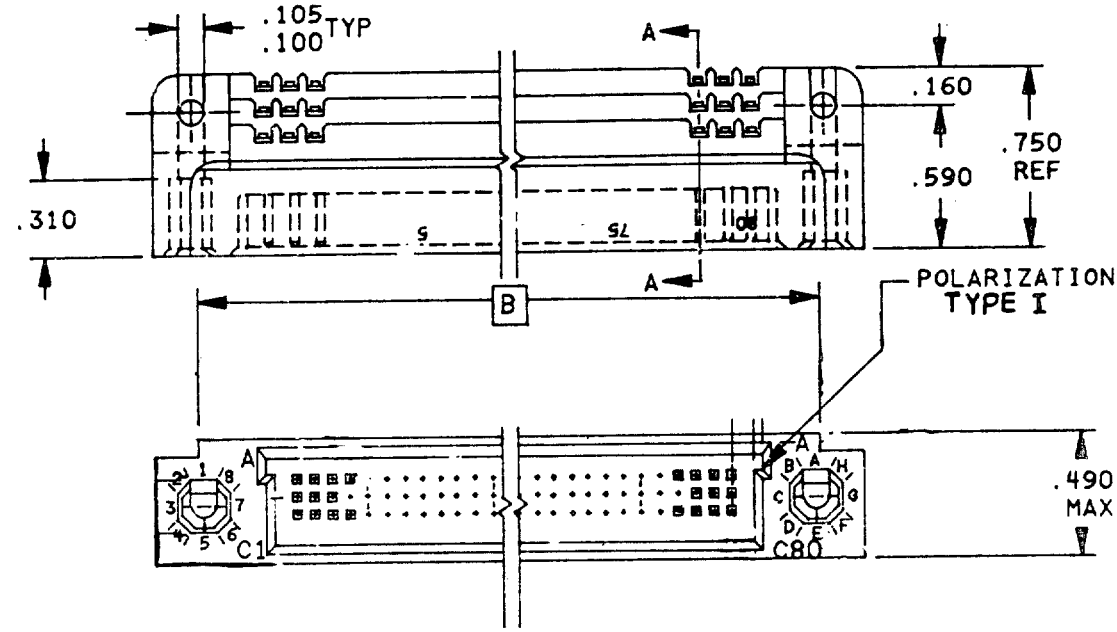


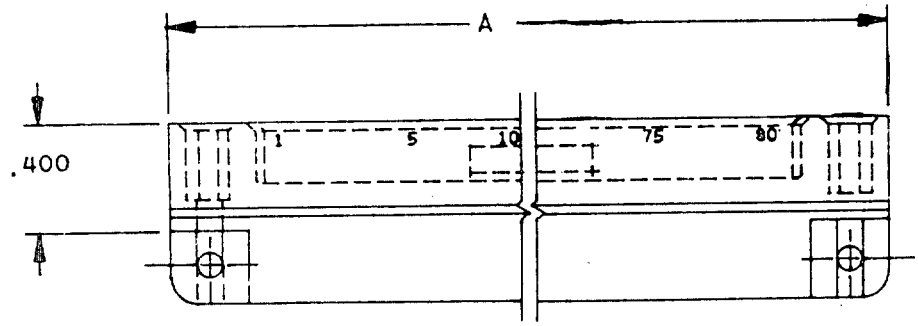

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
PLUG, RIGHT-ANGLE, 90 THRU 240 CONTACT POSITIONS, FOR PRINTED
WIRING BOARDS (.100 INCH CONTACT SPACING)

MIL-C-55302/129

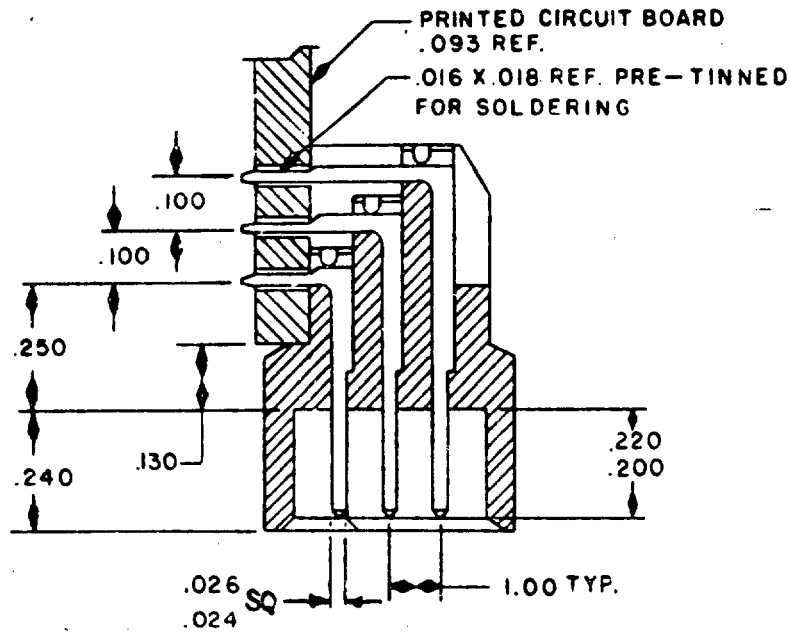

SECTION A-A

PART NUMBER: M55302/129-#

MATES WITH MIL-C-55302/130 CURRENT RATING 3 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS


DASH NUMBER#	NO. OF CONTACTS	DIMENSIONS		CONTACT IDENTIFICATION NUMBERS
		A	B	
09	90	3.750	3.450	1 - 30
10	105	4.250	3.950	1 - 35
11	120	4.750	4.450	1 - 40
12	135	5.250	4.950	1 - 45
13	150	5.750	5.450	1 - 50
14	165	6.250	5.950	1 - 55
15	180	6.750	6.450	1 - 60
16	195	7.250	6.950	1 - 65
17	210	7.750	7.450	1 - 70
18	240	8.750	8.450	1 - 80

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
RECEPTACLES, 90 THRU 240 CONTACT POSITIONS, FOR PRINTED
WIRING BOARDS (.100 INCH CONTACT SPACING)


MIL-C-55302/130

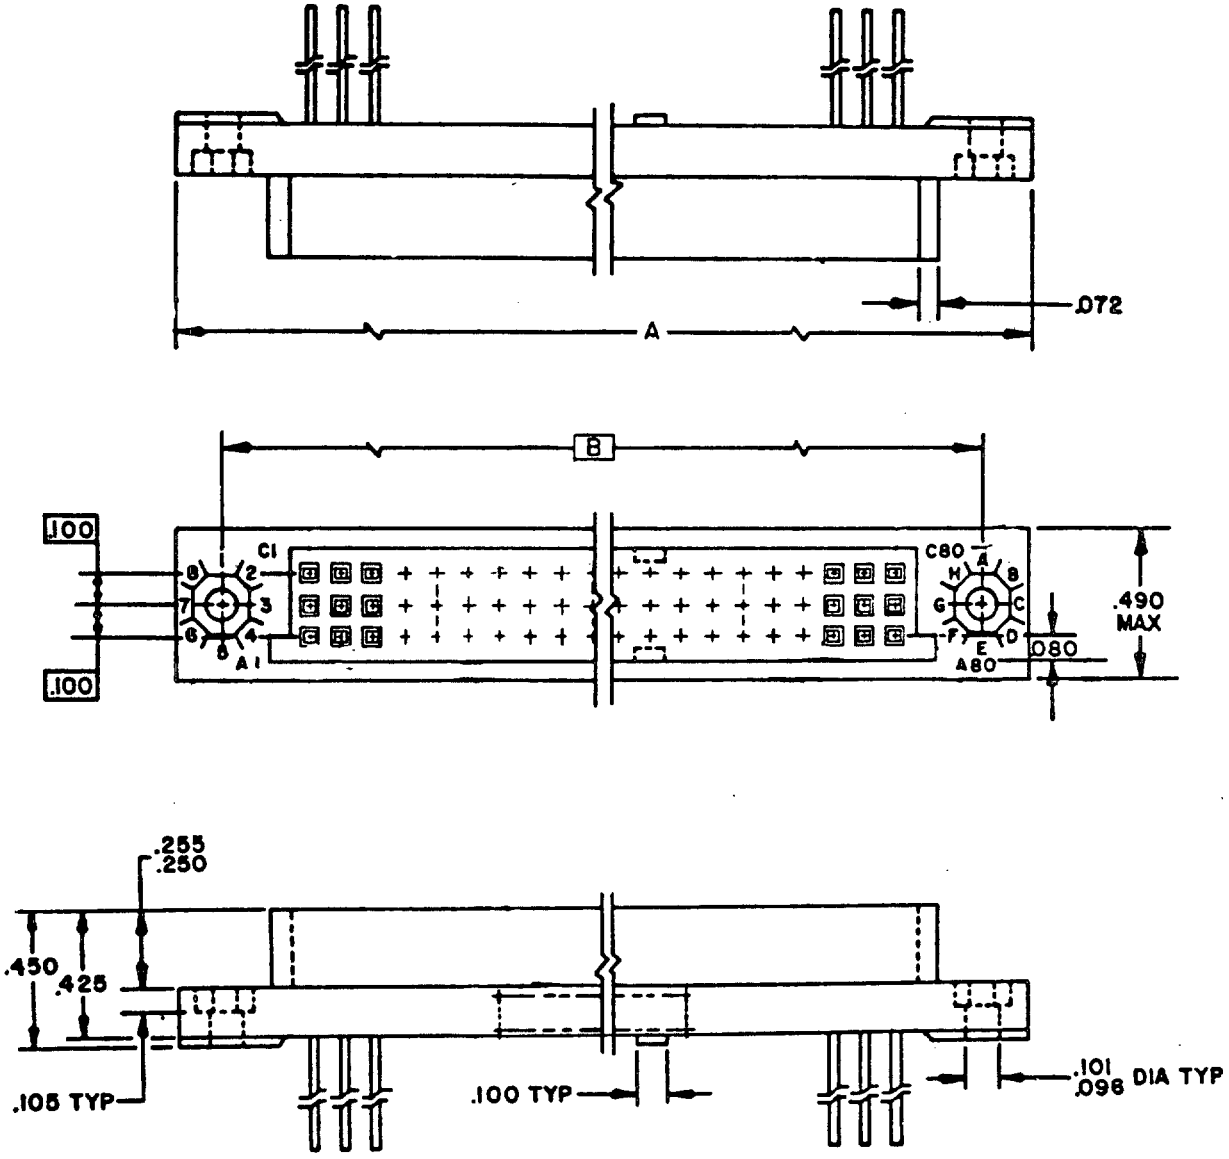


Source: https://assist.dla.mil Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
RECEPTACLES, 90 THRU 240 CONTACT POSITIONS, FOR PRINTED
WIRING BOARDS (.100 INCH CONTACT SPACING)


MIL-C-55302/130

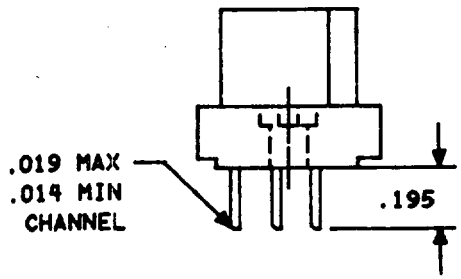

FLOW SOLDER TYPE
CONTACT TYPE 1

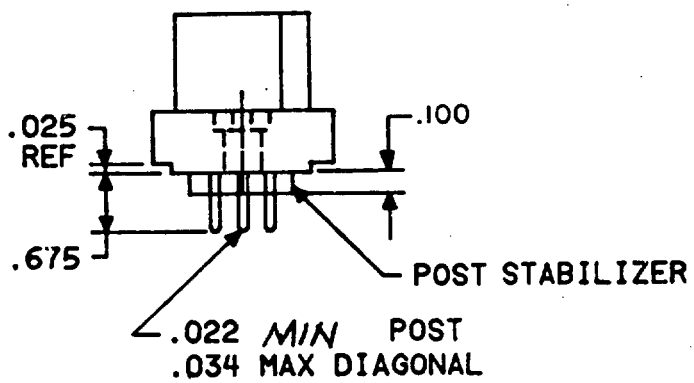


RACK MOUNT
WIRE WRAPPED TYPE
CONTACT TYPE 2

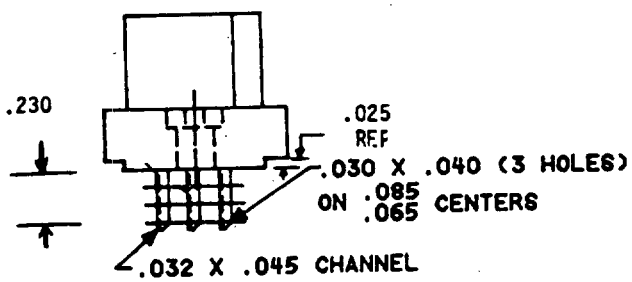

EYELET CONTACT
(SOLDER)
NO.26 AWG MAX

CONTACT TYPE 3

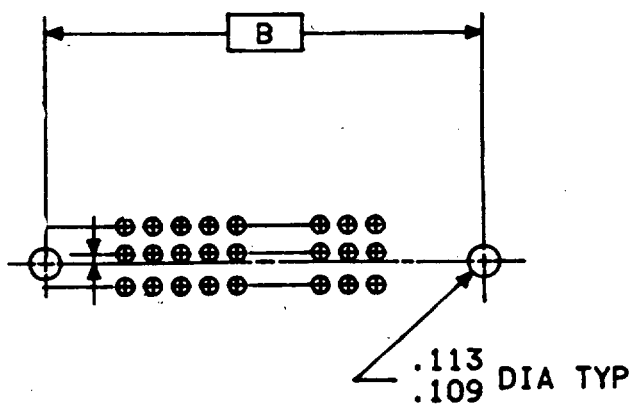

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
RECEPTACLES, 90 THRU 240 CONTACT POSITIONS, FOR PRINTED
WIRING BOARDS (.100 INCH CONTACT SPACING)

MIL-C-55302/130

PART NUMBER: M55302/130-*

MATES WITH MIL-C-55302/129 CURRENT RATING 3 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS


DASH NUMBER*	NO. OF CONTACTS	TYPE	DIMENSIONS		CONTACT IDENTIFICATION NUMBERS
			A	B	
17	90	1	3.750	3.450	1 - 30
18		2			
19		3			
20	105	1	4.250	3.950	1 - 35
21		2			
22		3			
23	120	1	4.750	4.450	1 - 40
24		2			
25		3			
26	135	1	5.250	4.950	1 - 45
27		2			
28		3			
29	150	1	5.750	5.450	1 - 50
30		2			
31		3			
32	165	1	6.250	5.950	1 - 55
33		2			
34		3			
35	180	1	6.750	6.450	1 - 60
36		2			
37		3			
38	195	1	7.250	6.950	1 - 65
39		2			
40		3			
41	210	1	7.750	7.450	1 - 70
42		2			
43		3			
44	240	1	8.750	8.450	1 - 80
45		2			
46		3			

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD COMPOSITE, RECEPTACLE, CONTACT SPACING 0.200, ALTERNATE, DUAL ROW, TYPE CR, REMOVABLE CONTACT

MIL-C-21097/13

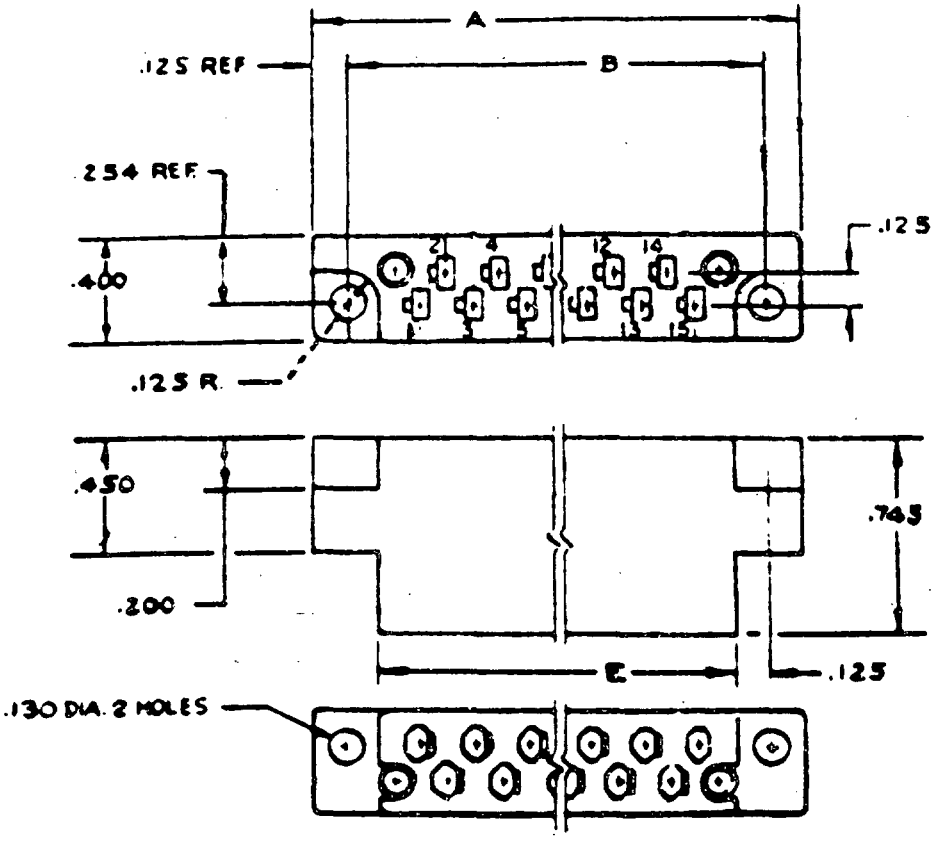

PART NUMBER: M21097/13-*

TABLE I. CONNECTOR, ELECTRICAL, COMPOSITE, RECEPTACLE, TYPE CR, MOUNTING PROVISION A.

DASH NUMBER *	STYLE	DIMENSIONS (IN INCHES)		
		A (MAX)	B	E (MAX)
01	17	2.390	2.130	1.897
02	23	2.990	2.730	2.497
03	29	3.590	3.330	3.097
04	35	4.190	3.930	3.697
05	41	4.790	4.530	4.297
06	47	5.623	5.363	5.130


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

MATING ADAPTER MIL-C-21097/14 OR /15
POLARIZED KEYS FOR USE WITH THIS CONNECTOR: PART NUMBER M2109?/11-07
CONTACTS FOR USE WITH THIS CONNECTOR: MIL-C-21097/16 OR 17

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD MALE ADAPTER, CONTACT SPACING:
0.200, ALTERNATE DUAL ROW, TYPE CS, BLADE CONTACT(MOUNTING PROVISION A)

MIL-C-21097/14

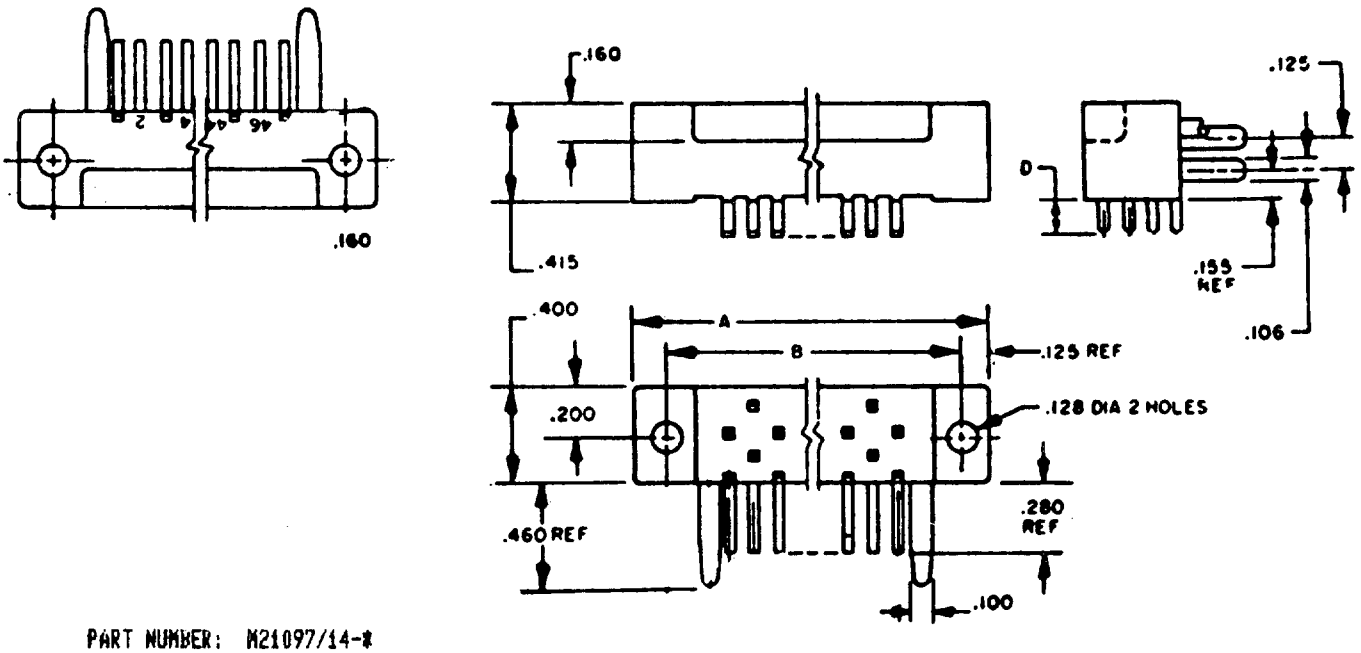

PART NUMBER: M21097/14-*

TABLE I. CONNECTOR, ELECTRICAL, MALE ADAPTER, TYPE CS, CLASS B, MOUNTING PROVISION A.


DASH NUMBER *	STYLE	SIZE	DIMENSIONS (IN INCHES) A (MAX)	B	D
01	17	2	2.390	2.130	0.120
02		3			0.152
03		4			0.183
04	23	2	2.990	2.730	0.120
05		3			0.152
06		4			0.183
07	29	2	3.590	3.330	0.120
08		3			0.152
09		4			0.183
10	35	2	4.190	3.930	0.120
11		3			0.152
12		4			0.183
13	41	2	4.790	4.530	0.010
14		3			0.152
15		4			0.183
16	47	2	5.623	5.363	0.381
17		3			0.152
18		4			0.183

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.
MATING RECEPTACLE: SHALL CONFORM TO MIL-C-21097/13

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, PRINTED WIRING BOARD, MALE ADAPTER, CONTACT SPACING: 0.200, ALTERNATE DUAL ROW, TYPE CS, BLADE CONTACT(NO MOUNTING PROVISION)

MIL-C-21097/15

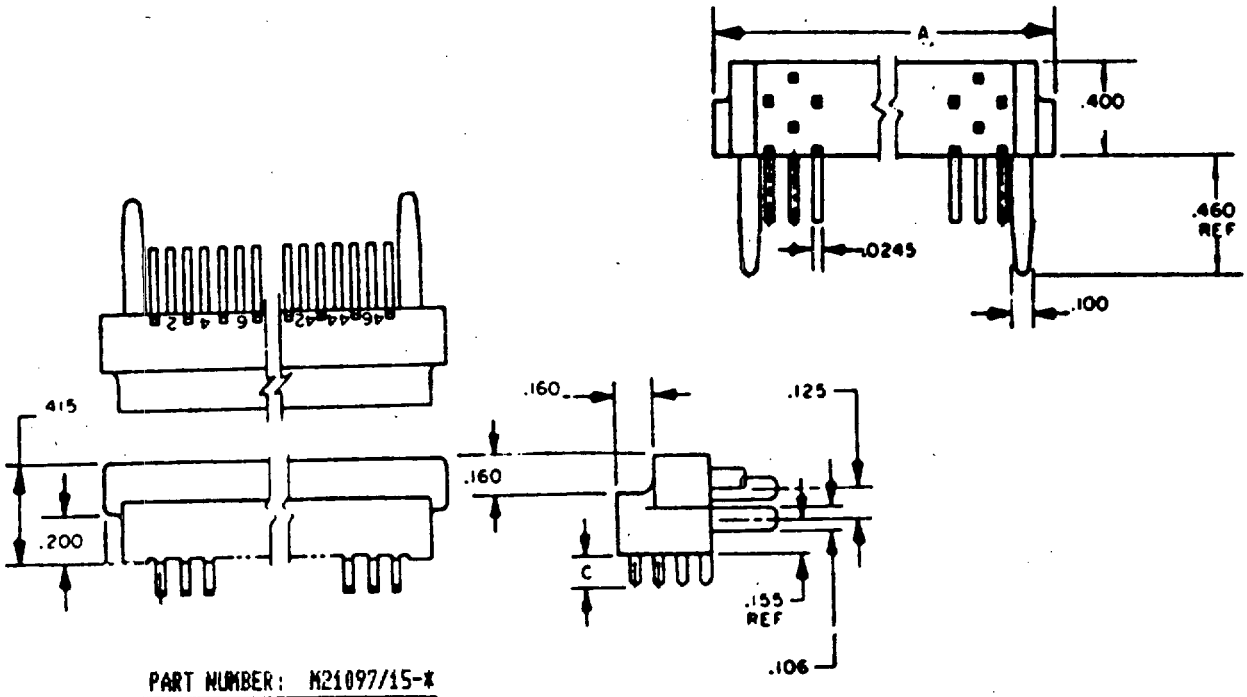

PART NUMBER: M21097/15-*

TABLE I. CONNECTOR, ELECTRICAL, MALE ADAPTER, TYPE CS, CLASS B, NO MOUNTING PROVISION.

DASH NUMBER *	STYLE	SIZE	DIMENSIONS (IN INCHES) A (MAX)	C
01	17	2	2.070	0.120
02		3		0.152
03		4		0.183
04	23	2	2.670	0.120
05		3		0.152
06		4		0.183
07	29	2	3.270	0.120
08		3		0.152
09		4		0.183
10	35	2	3.870	0.120
11		3		0.152
12		4		0.183
13	41	2	4.470	0.120
14		3		0.152
15		4		0.183
16	47	2	5.070	0.120
17		3		0.152
18		4		0.183

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.
MATING RECEPTACLE: SHALL CONFORM TO MIL-C-21097/13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES N (CABLED) - PLUG, PIN CONTACT, CLASS 2)

MIL-C-39012

SCOPE: THIS SECTION COVERS RADIO FREQUENCY CONNECTORS USED WITH RADIO FREQUENCY CABLES AND CERTAIN OTHER TYPES OF COAXIAL TRANSMISSION LINES. ALL CONNECTORS LISTED HAVE CAPTIVATED CENTER CONTACTS EXCEPT SLASH NUMBER(/6-/8, /10/14, /21-/24, /31-/34, /41&/42, /60-/62, /69, /71, /77, /93-/96). THESE CONNECTORS AND FITTINGS COVERED ARE INTENDED FOR USE IN RADIO FREQUENCY APPLICATION UP TO THE FREQUENCY SPECIFIED.

NOMINAL IMPEDANCE: 50 OHMS


FREQUENCY RANGE:
0 TO 11,00 MHz
0 TO 4,000 MHz (/16, /17, /18, /19, /20, /21, /22, /23, /24)
0 TO 11,000 MHz (/6, /7, /8, /10, /11, /36)
0 TO 12,400 MHz (/55, /56, /57, /58, /59)
NOT RATED (/60, /61, /62)
0 TO 4 GHz (/69, /71, /95, /96)
0 TO 10 GHz (/73, /74, /75, /76, /77)
0 TO 18 GHz (/79, /81, /82)
0 TO 12.4 GHz (/80)
.5 TO 18 GHz (/93, /94)


TEMPERATURE RATING: -65°C TO +165°C
-65°C TO +105°C (/93, /94)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES N (CABLED), -PLUG, PIN CONTACT, CLASS 2)

MIL-C-39012/1

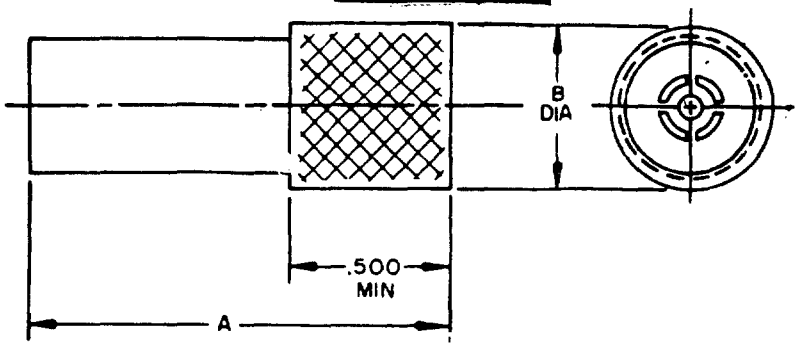

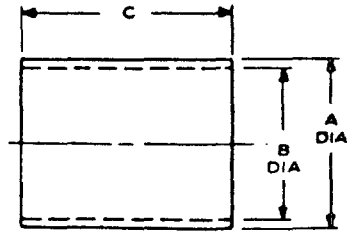

CRIMP FERRULE

PART NUMBER: M39012/01-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
0016	RG-212/U	A	2.000													
		B	.827													
0021	RG-165/U	A	2.000													
		B	.827													
0023	RG-11/U															
0024	RG-216/U															
0027	RG-6/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0501	RG-393/U	A	1.593	1-10	.098	.006	1-01	1-13	RED	BLK	1-50	.492	.438	.600	S-01	S-25 CLOS A
		B	.827													
0503	RG-142/U	A	1.516	1-11	.043	.006 x30 +5	1-01	1-13	BLUE		1-52	.250	.220	.500		S-57 CLOS A
		B	.827													


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES N (CABLED) - PLUGS AND FLANGE MOUNTED RECEPTACLES, SOCKET CONTACT, CLASS 2)

MIL-C-39012/2

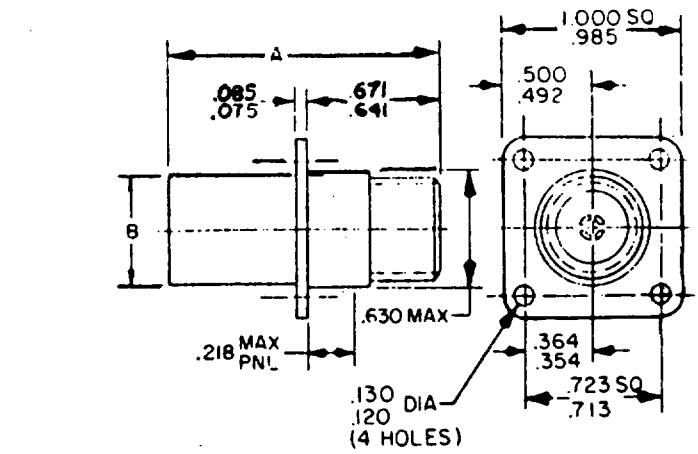



CRIMP FERRULE

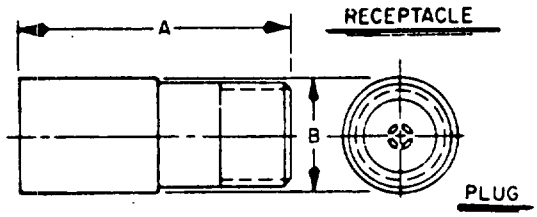

RECEPTACLE

PLUG

PART NUMBER: M39012/2-$

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.$	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	USC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	F	C	USC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
0022	RG-217/U	A	2.312													
		B	.906													
0027	RG-212/U	A	1.938													
0030	RG-216/U	B	.750													
0041	RG-165/U															
0042	RG-11/U															
0043	RG-6/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0511	RG-393/U	A	1.656	2-10	.098		1-01	1-13	RED	BRN	2-50	.492	.438	.600	S-01	S-25 CLOS A
		B	.750													
0513	RG-142/U	A	1.593	2-11	.043				BLUE		2-52	.250	.220	.500		S-57
		B	.750													


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTRUCTION.

$—COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES N (CABLED) -RECEPTACLES - JAM NUT MOUNTED, SOCKET CONTACT, CLASS 2)

MIL-C-39012/3

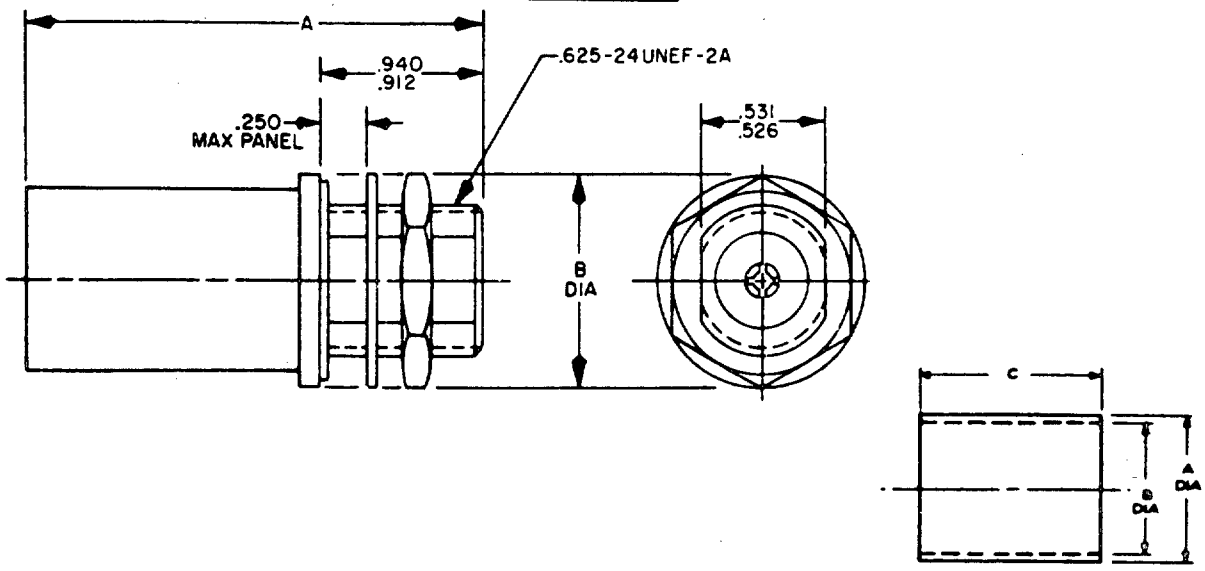

PART NUMBER: M39012/3-#

CRIMP FERRULE

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN MAX $	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) &																
0013	RG-212/U	A	2.031													
0018	RG-165/U	B	.900													
0020	RG-11/U															
0021	RG-216/U															
0023	RG-6/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0501	RG-393/U	A	1.875	3-10	.098		1-01	1-14	RED	RED	3-50	.492	.438	.600	5-01	5-25 CLOS A
		B	.900													
0503	RG-142/U	A	1.781	3-11	.043		1-01	1-14	BLUE		3-52	.250	.220	.500		5-57 CLOS A
		B	.900													

& CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

$--DIMENSIONS SHOWN ARE MAXIMUM, BUT MINIMUM DIMENSION OF .850 APPLIES.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES N (UNCABLED) - RECEPTACLES - JAM NUT AND FLANGE MOUNTED, SOCKET CONTACT, CLASS 2)


MIL-C-39012/4

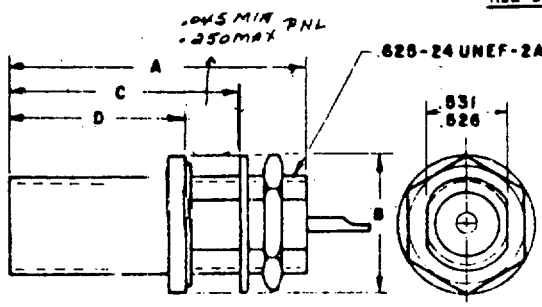

0001

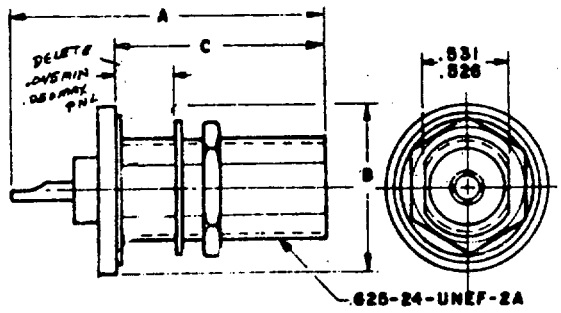

0003

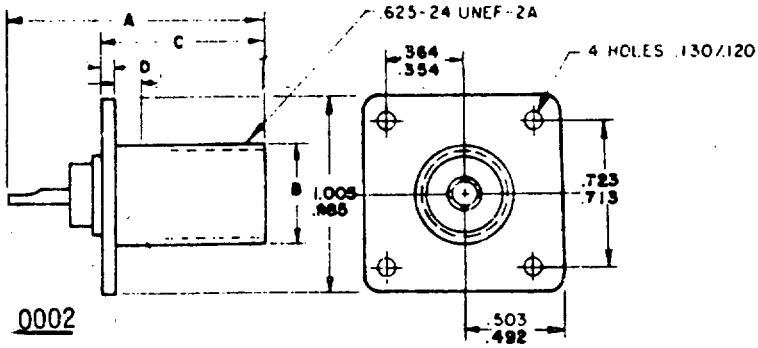

0002

PART NUMBER: M39012/4-*

TABLE I. DASH NUMBERS AND CHARACTERISTICS.


DASH NUMBER*	TYPE	DIMENSIONS	INCHES	
			MINIMUM	MAXIMUM
0001	BULKHEAD (FRONT MOUNTED - HERMETIC SEALED)	A	-	1.750
		B	-	.885
		C	1.125	1.250
		D	.702	.712
0002	FLANGE (REAR MOUNTED)	A	1.062	1.156
		B	.620	.670
		C	.721	.751
		D	.075	.085
0003	BULKHEAD (REAR MOUNTED)	A	-	1.343
		B	.850	.900
		C	.912	.940

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES N (CABLED) - PLUG,
RIGHT ANGLE, PIN CONTACT, CLASS 2)

MIL-C-39012/5

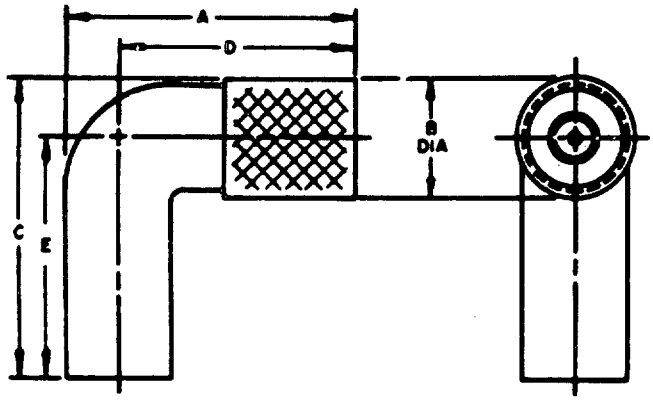

PART NUMBER: M39012/5-#

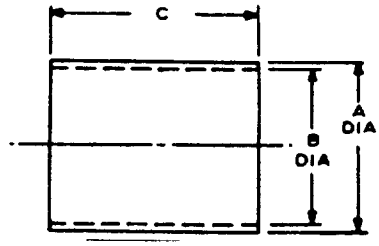

CRIMP FERRULE

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN MAX $	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
0004	RG-213	A	1.531													
		B	.827													
0005	RG-214	C	2.375													
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0501	RG-214/U RG-393/U	A B C D E	1.406 .827 2.218 1.078 1.812	S-10	.098		1-01	1-13	RED	ORN	S-50	.492	.438	.600	S-01	S-25 CLOS A
0502	RG-213/U										S-51		.418			
0503	RG-142/U			S-11	.043						S-52	.250	.220	.500		S-57 CLOS A

CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

$--DIMENSIONS SHOWN ARE MAXIMUM, BUT MINIMUM DIMENSION OF 1.312 APPLIES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES C (CABLED) - PLUG, MALE, CLASS 2)

MIL-C-39012/6

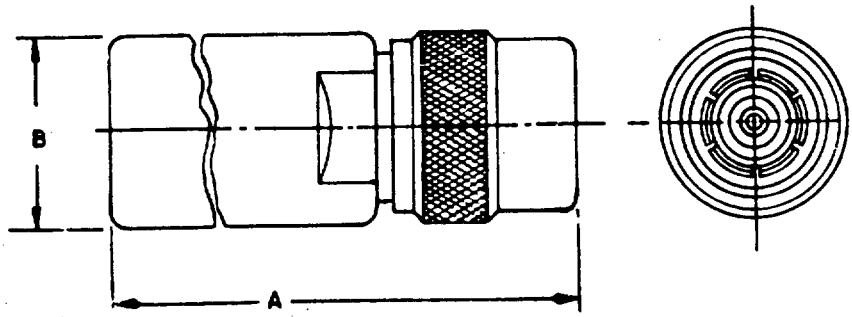

PART NUMBER: M39012/6-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.


CATEGORY A - FIELD SERVICEABLE			
# DASH NUMBER	APPLICABLE CABLE NO.	DIM	INCHES MAX
0001	RG-212/U	A	1.609
	RG-304/U	B	.781
0002	RG-165/U	A	1.609
	RG-213/U	B	.781
	RG-214/U		
	RG-225/U		
0004	RG-211/U	A	2.250
		B	1.328

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES C (CABLED) - PLUG, FEMALE, CLASS 2)

MIL-C-39012/7

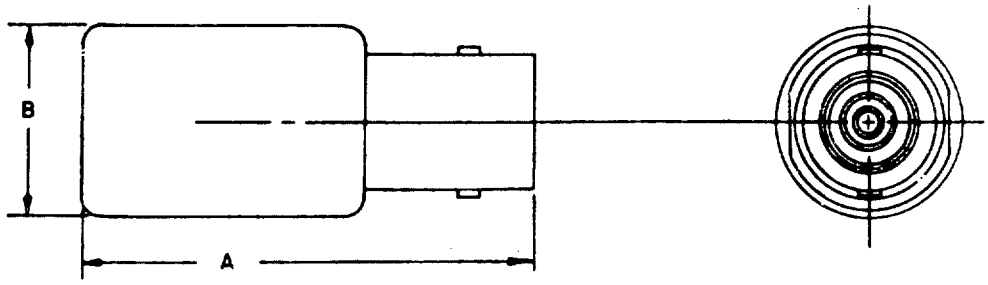

PART NUMBER: M39012/7-*

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.


CATEGORY A - FIELD SERVICEABLE			
* DASH NUMBER	APPLICABLE CABLE NO.	DIM	INCHES MAX
0001	RG-165/U	A	1.531
	RG-213/U	B	.760
	RG-214/U		
	RG-225/U		
0002	RG-304/U	A	1.531
	RG-212/U	B	.760

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES C (CABLED) - RECEPTACLE, FEMALE, FLANGE MOUNTED, REAR MOUNTED, CLASS 2)

MIL-C-39012/8

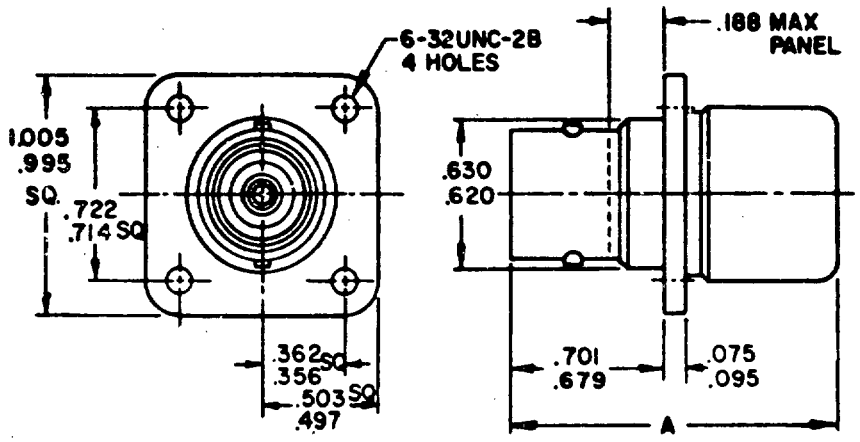

PART NUMBER: M39012/8-*

TABLE 1. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.


CATEGORY A - FIELD SERVICEABLE			
* DASH NUMBER	APPLICABLE CABLE NO.	DIM	INCHES MAX
0001	RG-165/U	A	1.531
	RG-213/U		
	RG-214/U		
	RG-225/U		
0002	RG-304/U	A	1.531
	RG-212/U		

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES C (CABLED) - PLUG MALE, RIGHT ANGLE, CLASS 2)

MIL-C-39012/10

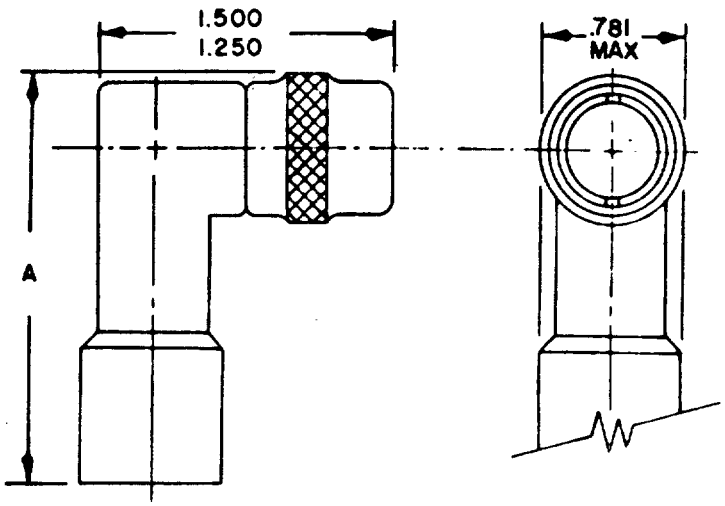

PART NUMBER: M39012/10-*

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.


CATEGORY A - FIELD SERVICEABLE				
* DASH NUMBER	APPLICABLE CABLE NO.	DIM	INCHES	
			MIN	MAX
0001	RG-165/U	A	1.625	1.875
	RG-213/U			
	RG-214/U			
	RG-225/U			

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES C (CABLED) - RECEPTACLE, FEMALE, JAM NUT, REAR MOUNTED, PRESSURIZED, CLASS 2)

MIL-C-39012/11

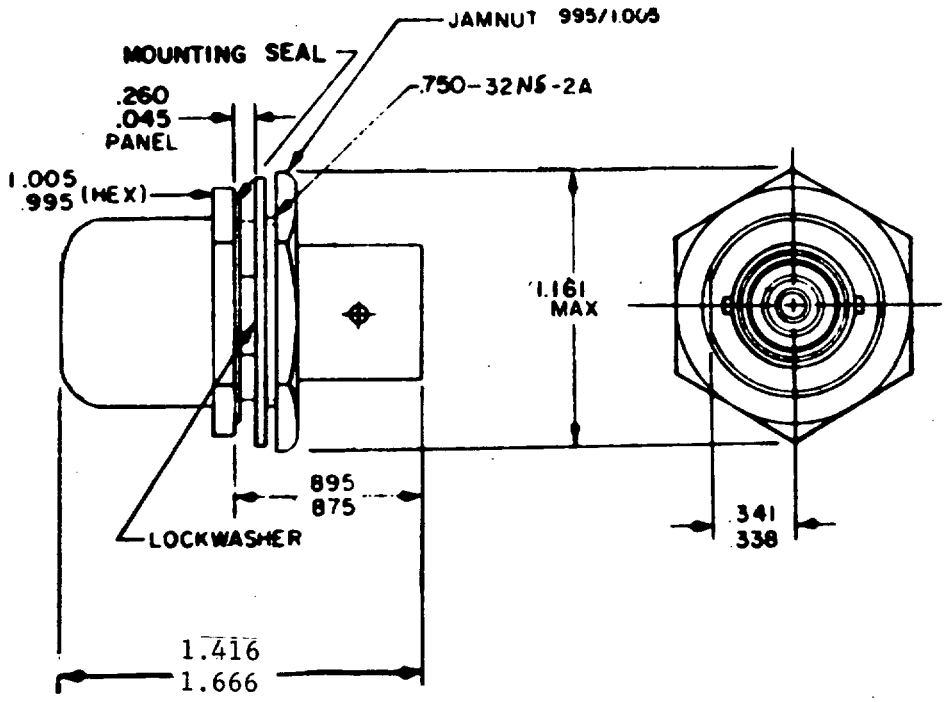

PART NUMBER: M39012/11-*

TABLE I. DASH NUMBERS, CROSS REFERENCE


CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO.
0001	RG-304/U
	RG-212/U
0002	RG-165/U
	RG-213/U
	RG-214/U
	RG-225/U

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY, SERIES C (UNCABLED-RECEPTACLE, FEMALE, FLANGE MOUNTED, REAR MOUNTED, CLASS 2)

MIL-C-39012/12

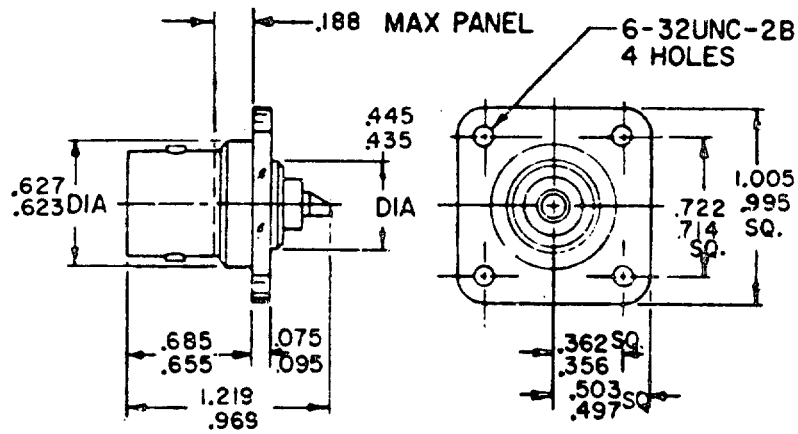


PART NUMBER: M39012/12-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY,SERIES C (UNCABLED-RECEPTACLE, FEMALE, JAM NUT MOUNTED, FRONT MOUNTED, PRESSURIZED, CLASS 2)

MIL-C-39012/13

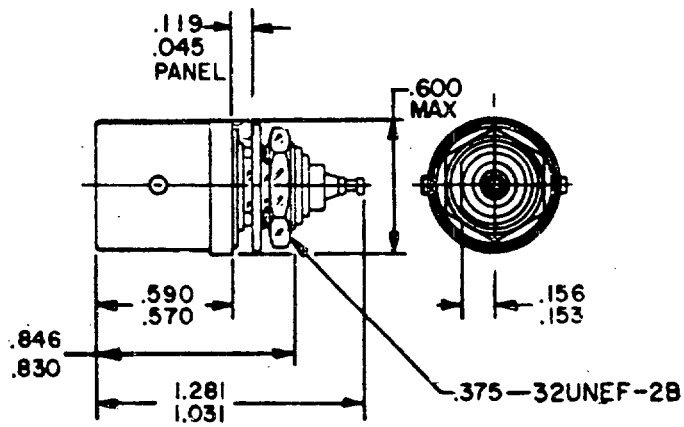


PART NUMBER: M39012/13-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY SERIES C (UNCABLED-RECEPTACLE, FEMALE, JAM NUT MOUNTED, HERMETIC SEAL, CLASS 2)

MIL-C-39012/14

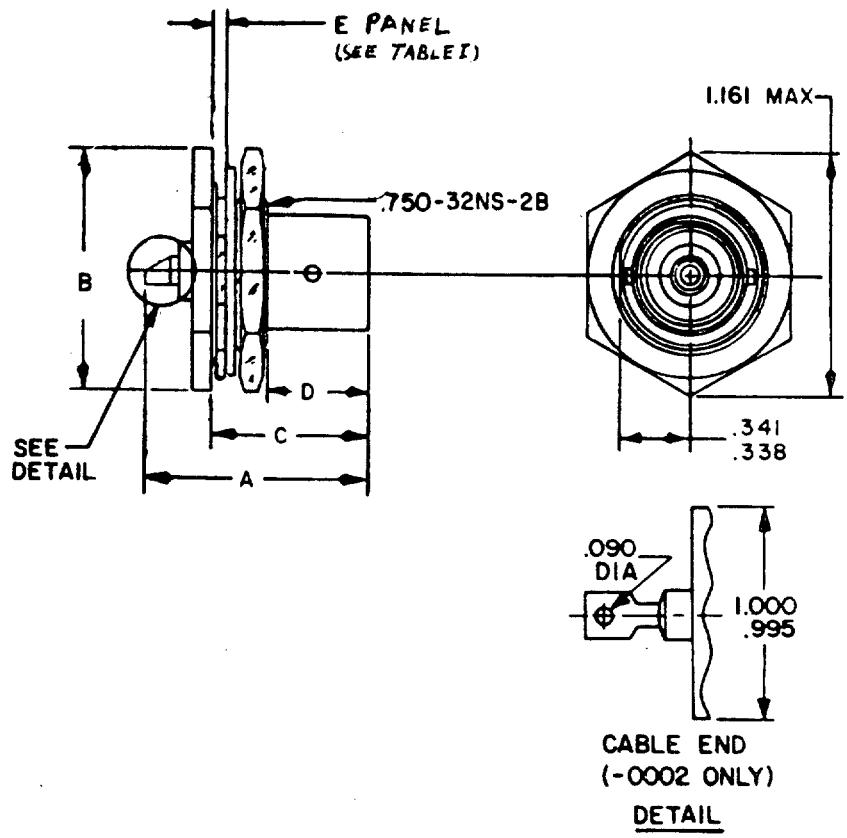

PART NUMBER: M39012/14-*

TABLE I. PART NUMBER AND BASIC OVERALL DIMENSIONS.


DASH NUMBER*	DIMENSION	INCHES		TYPE OF SEAL
		MINIMUM	MAXIMUM	
0001	A	---	1.219	PRESSURIZED
	B #	.995	1.005	
	C	.738	.762	
	D	.495	.505	
	E	.045	.113	
0002	A	---	1.531	HERMETIC
	B #	.995	1.005	
	C	.799	.809	
	D	.484	.497	
	E	.045	.182	

0001 HEX DIMENSION OF FLANGE 0002 DIAMETER OF FLANGE.
*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES TNC (CABLED) - PLUG, PIN CONTACT, CLASS 2)

MIL-C-39012/26

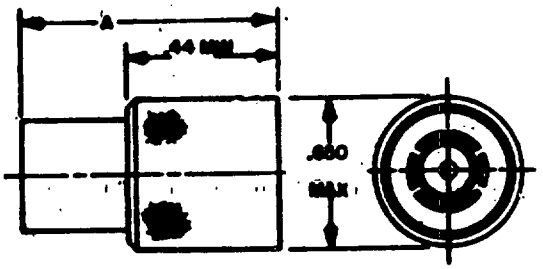

LANE

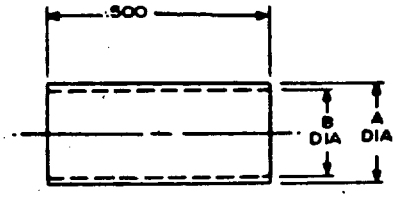

CRIMP FERRULE

PART NUMBER: M39012/26-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
0010	RG-303/U	A	1.500													
0011	RG-223/U															
0012	RG-59/U															
	RG-62/U															
0021	RG-302/U															
0022	RG-316/U															
	RG-174/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0502	RG-180/U	A	1.187	26-11	.017	.005 X30	1-01	1-12	BLUE	YEL	26-50	.212	.175		5-01	5-05 CLUS B


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES TNC (CABLED) - PLUG, SOCKET CONTACT, CLASS 2)

MIL-C-39012/27

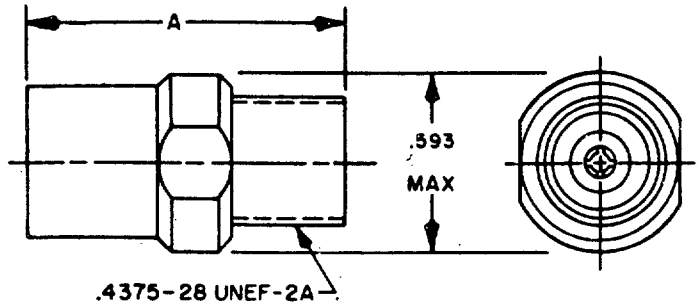

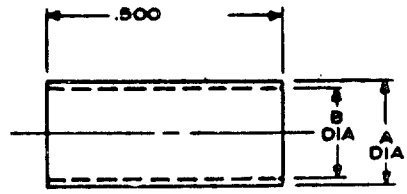

CRIMP FERRULE

PART NUMBER: M39012/27-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0502	RG-180/U	A	1.234	27-11	.617		1-01	1-12	BLUE	GRN	27-50	.212	.175		5-01	5-05 CLOS B


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY SERIES TNC (CABLED) -
RECEPTACLE, SOCKET CONTACT, JAM NUT MOUNTED, CLASS 2)

MIL-C-39012/28

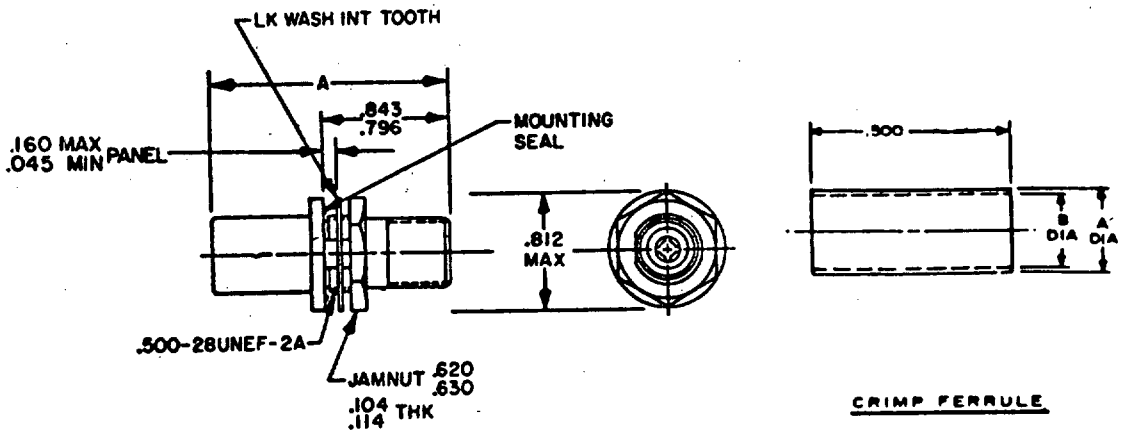

PART NUMBER: M39012/28-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
0010	RG-303/U	A	1.625													
0011	RG-223/U															
0012	RG-59/U															
	RG-62/U															
0021	RG-302/U															
0022	RG-316/U															
	RG-174/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0502	RG-188/U	A	1.468	28-11	.017		1-01	1-12	BLUE	BLUE	28-50	.212	.175		5-01	5-05 CLOS B


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES TNC (CABLED) - RECEPTACLES, SOCKET CONTACT, FLANGE MOUNTED, CLASS 2)

MIL-C-39012/29

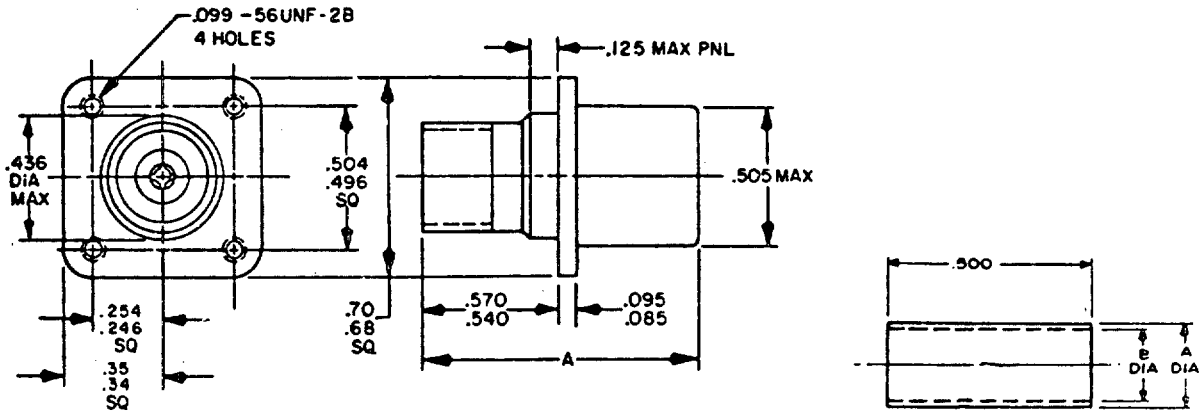

CRIMP FERRULE

PART NUMBER: M39012/29-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) *																
0010	RG-303/U	A	1.500													
0011	RG-223/U															
0012	RG-59/U															
	RG-62/U															
0021	RG-302/U															
0022	RG-316/U															
	RG-174/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. *																
0502	RG-180/U	A	1.468	29-11	.017		1-01	1-12	BLUE	GRN	29-50	.212	.175		5-01	5-05 CLOS


* CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES TNC (CABLED) - PLUG, PIN CONTACT, RIGHT ANGLE, CLASS 2)

MIL-C-39012/30

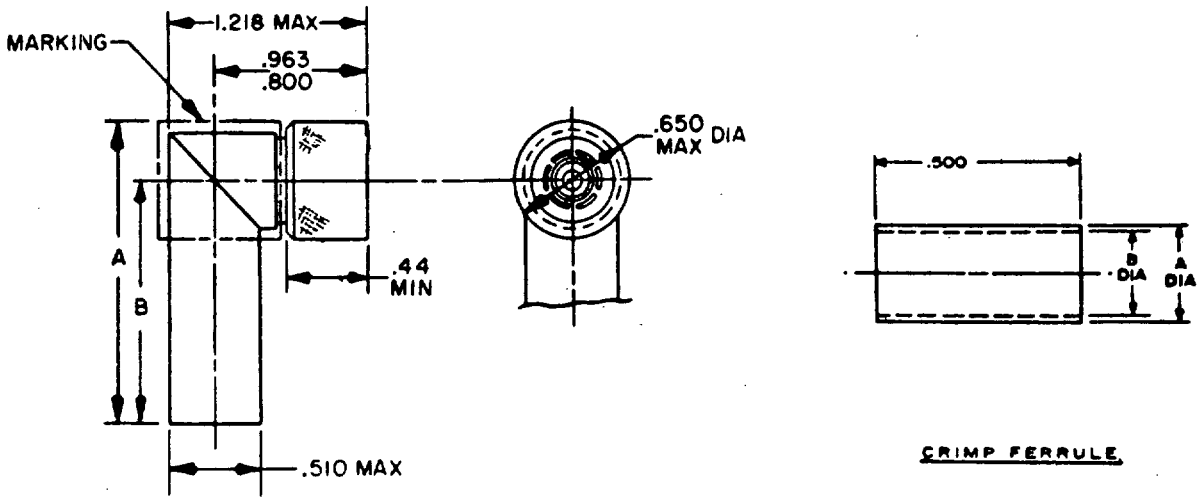

PART NUMBER: M39012/30-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
0010	RG-303/U	A	2.000													
0011	RG-223/U															
0012	RG-59/U															
	RG-62/U															
0021	RG-302/U															
0022	RG-316/U															
	RG-174/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0502	RG-188/U	A	1.859	30-11	.817		1-01	1-12	BLUE	VLT	30-50	.212	.175		5-01	5-05 CLOS B
		B	1.468													


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY,
(SERIES TNC (UNCABLED) - RECEPTACLES, SOCKET, JAM NUT MOUNTED, CLASS 2)

MIL-C-39012/31

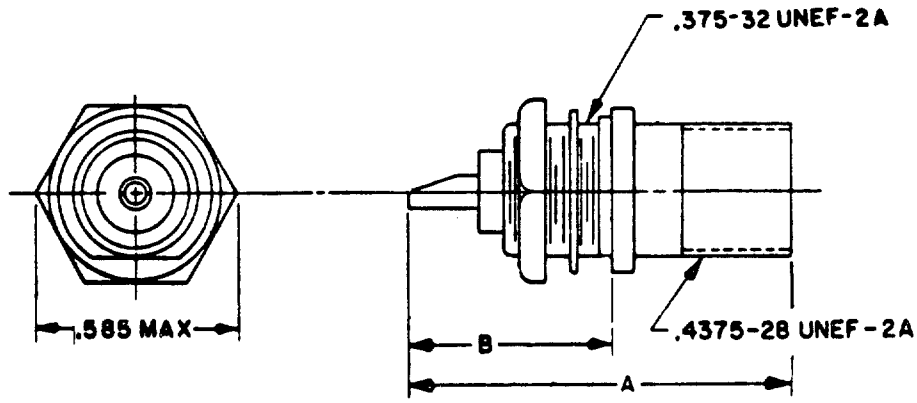

PART NUMBER: M39012/31-#

TABLE I. DASH NUMBER AND OVERALL DIMENSIONS.


DASH NUMBER#	DIMENSION	INCHES		PANEL THICKNESS	
		MINIMUM	MAXIMUM	MINIMUM	MAXIMUM
0002	A	---	1.312	.045	.250
	B	.654	.778		

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES TNC (UNCABLED - RECEPTACLE, SOCKET, FLANGE MOUNTED, CLASS 2)

MIL-C-39012/32

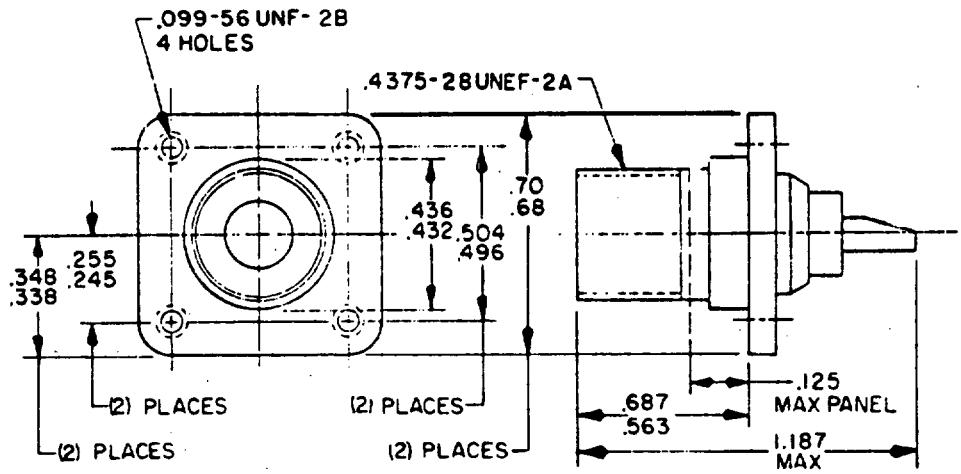


PART NUMBER: M39012/32-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY,
(SERIES TNC (UNCABLED) - RECEPTACLES, SOCKET, RIGHT ANGLE, CLASS 2)

MIL-C-39012/33

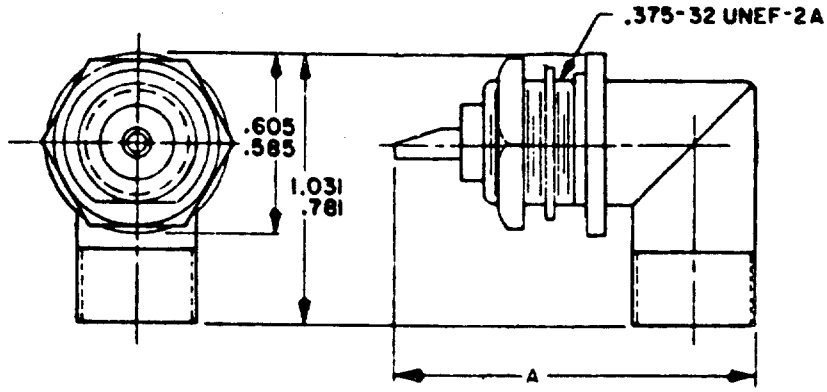

PART NUMBER: M39012/33-0001

TABLE I. DASH NUMBER AND OVERALL DIMENSIONS.


DASH NUMBER*	DIMENSION	INCHES MAXIMUM	MIN PANEL THICKNESS	MAXIMUM PANEL THICKNESS
0001	A	1.500	.045	.250

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SC (CABLED) - RECEPTACLE, SOCKET CONTACT, CLASS 2)

MIL-C-39012/36

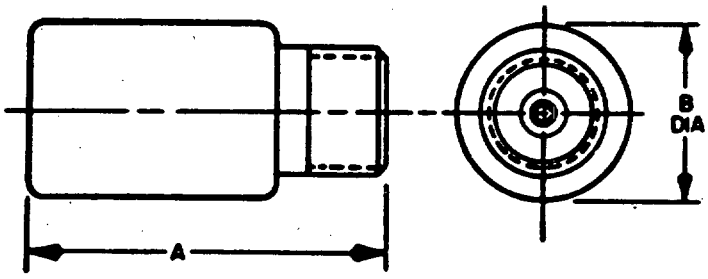

PART NUMBER: M39012/36-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
	CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #															
0501	RG-214/U	A	1.875	36-10	.098		1-01	1-14	RED	WHT	36-50	.492	.438	.600	5-01	5-25 CLOS A
	RG-225/U	B	.766													
	RG-393/U															
0502	RG-213/U										36-51	.492	.418	.600		


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE AND ASSY INSTR.

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY, SERIES TNC
(UNCABLED - RECEPTACLE, SOCKET, HERMTIC SEALED, JAM NUT MOUNTED, CLASS 2)

MIL-C-39012/34

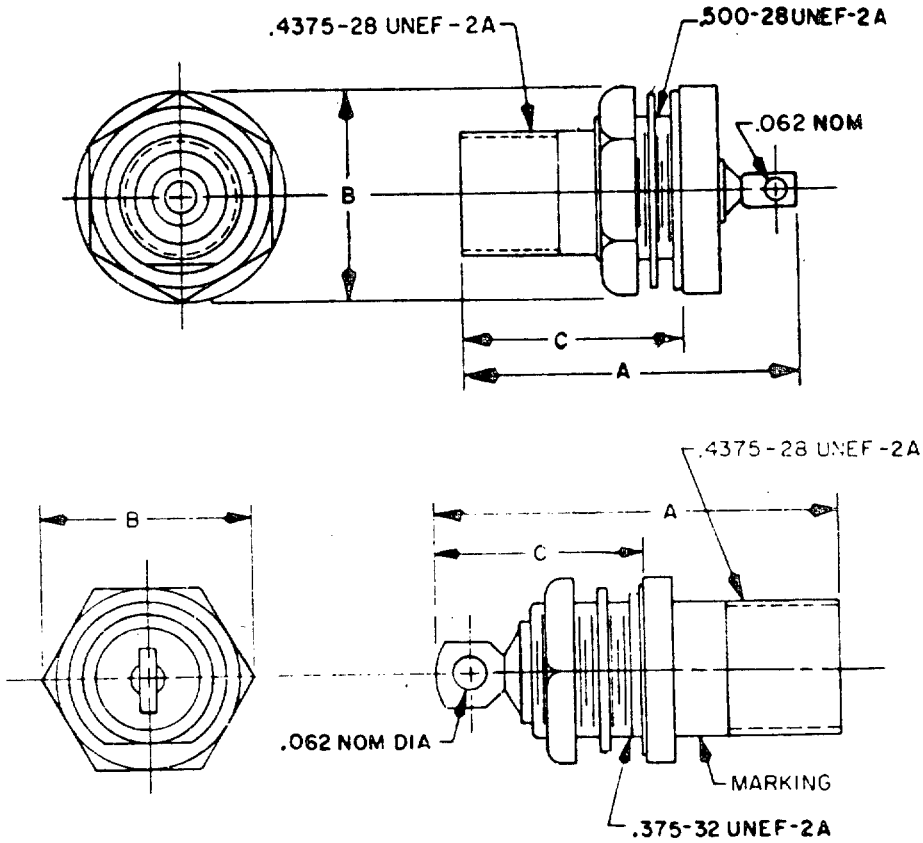

PART NUMBER: M39012/34-*

TABLE I. DASH NUMBER AND OVERALL DIMENSIONS.


DASH NUMBER*	DIMENSION	INCHES		PANEL THICKNESS	
		MINIMUM	MAXIMUM	MINIMUM	MAXIMUM
0002	A	---	1.328	.045	.250
	B	.630	.650		
	C	.626	.750		


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SC (CABLED) - RECEPTACLE, SOCKET CONTACT, FLANGE MOUNTED, REAR MOUNTED, CLASS 2)

MIL-C-39012/38

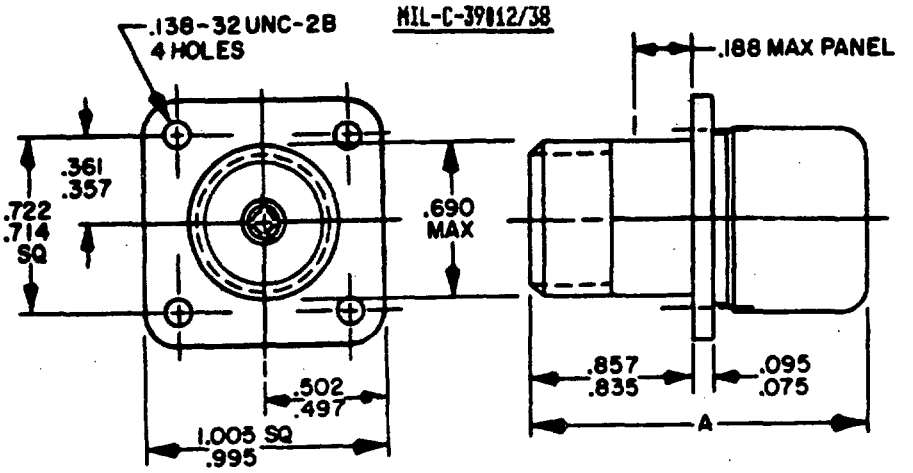

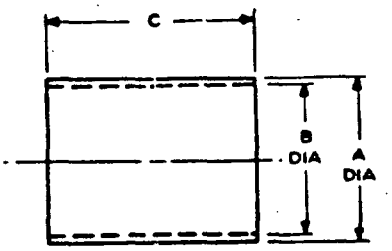

CRIMP FERRULE

PART NUMBER: M39012/38-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0501	RG-393/U	A	1.843	38-10	.098		1-01	1-14	RED	WHT	38-50	.492	.438	.600	5-01	5-25 CLOS A
0503	RG-142/U			38-11	.043				BLUE		38-52	.250	.220	.500		5-57 CLOS A


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SC (CABLED) - PLUG, PIN CONTACT, RIGHT ANGLE, CLASS 2)

MIL-C-39012/39

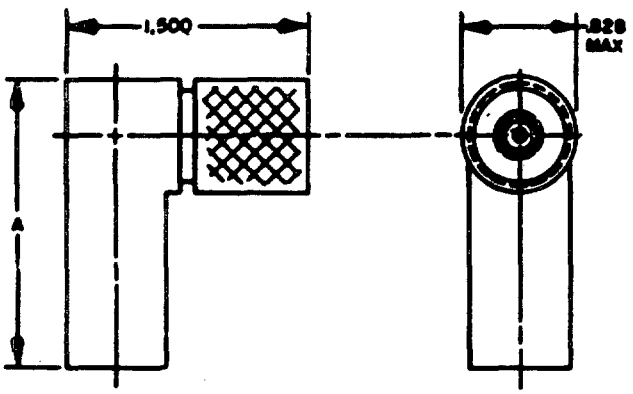



CRIMP FERRULE

PART NUMBER: M39012/39-0501

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0501	RC-393/U	A	2.125	39-10	.098		1-01	1-13	RED	ORN	39-50	.492	.438	.600	5-01	5-25 CLUS A


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SC (CABLED) - RECEPTACLE, SOCKET CONTACT, JAM NUT, REAR MOUNTED, CLASS 2)

MIL-C-39012/40

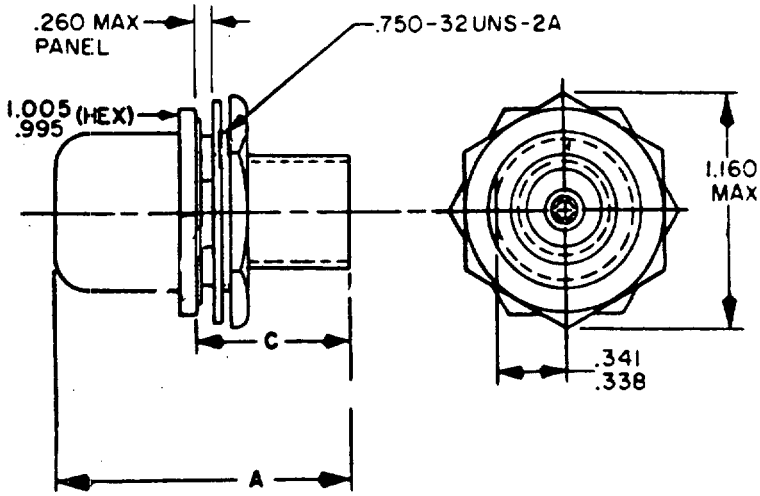



CRIMP FERRULE

PART NUMBER: M39012/40-0501

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN MAX $	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS, #																
0501	RG-393/U	A	2.030	40-10	.098		1-01	1-14	RED	GLD	40-50	.492	.438	.600	5-01	5-25 CLOS A
		C	1.045													

CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

$--DIMENSIONS SHOWN ARE MAXIMUM, BUT MINIMUM OF .915 APPLIES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
SERIES SC (UNCABLED-RECEPTACLE, FEMALE, FLANGE, REAR MOUNTED, CLASS 2)

MIL-C-39012/41

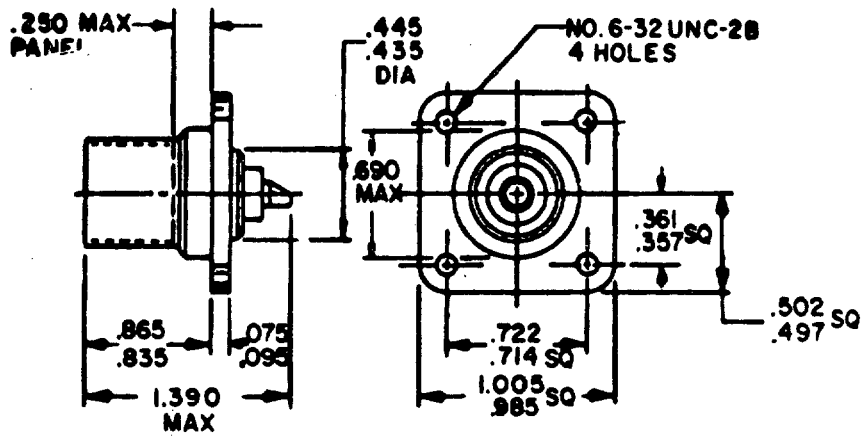


PART NUMBER: M39012/41-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY,
SERIES SC (UNCABLED - RECEPTACLE, FEMALE, JAM NUT MOUNTED, FRONT MOUNTED, CLASS 2)

MIL-C-39012/42

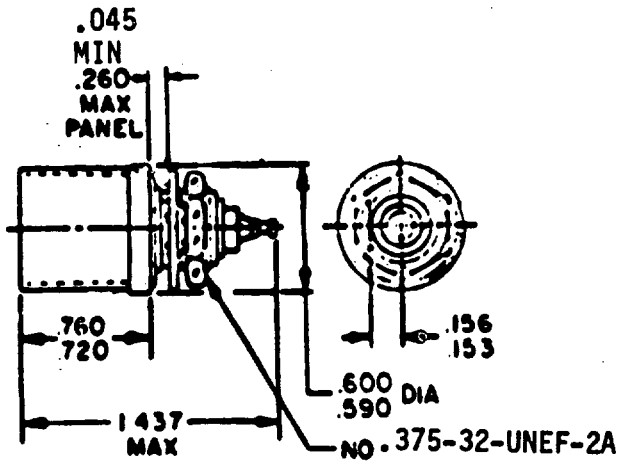


PART NUMBER: M39012/42-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SMA (CABLED) - PLUG, PIN CONTACT, CLASS 2)

MIL-C-39012/55

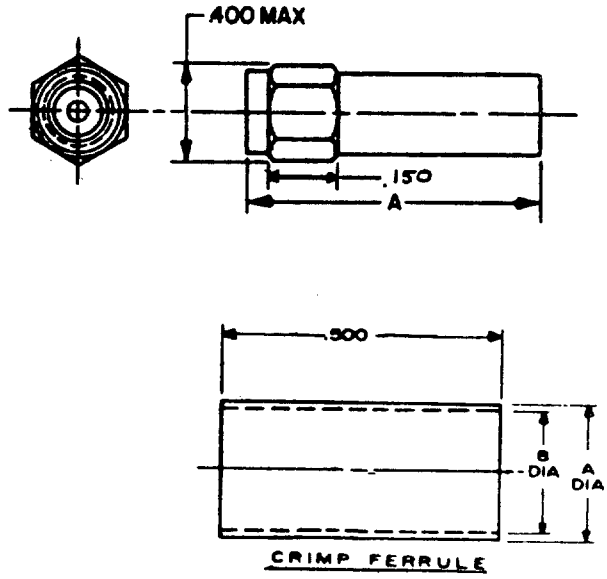

PART NUMBER: M39012/55-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) $																
3025	RG-178/U	A	1.250													
3026	RG-174/U															
4026	RG-316/U															
3027	RG-122/U															
4028	RG-223/U															
3029	RG-58/U															
4029	RG-303/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. # $																
4502	RG-142/U	A	1.250	55-10	.041		1-01	1-15 OR SOLDER	RED	SLV	55-50	.492	.418	.600	5-01	5-57 CLOS A

$ THESE CONNECTORS HAVE CAPTIVATED CENTER CONTACTS AND ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL TO THE SPECIFIED CABLES.


COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SMA (CABLED) - PLUG,PIN CONTACT, RIGHT ANGLE, CLASS 2)

MIL-C-39012/56

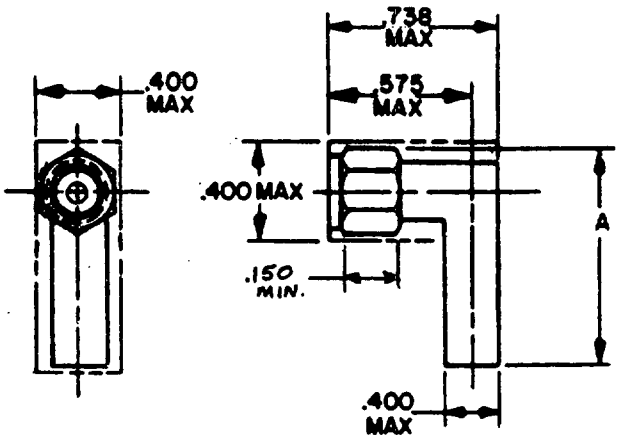

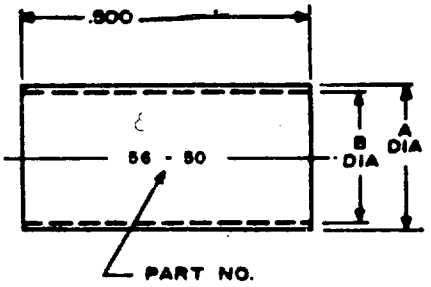

CRIMP FERRULE

PART NUMBER: M39012/56-*

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

CATEGORY C - FIELD REPLACEABLE - (MIL-C-22520 CRIMP TOOL) #			
	APPLICABLE CABLE		
DASH NO.*	CA M17/	DIM	IN-MAX
3026	RG-174/U	A	1.375
3028	RG-142/U		
3029	RG-58/U		


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES.


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SMA (CABLED) - PLUG, SOCKET CONTACT, CLASS 2)

MIL-C-39012/57

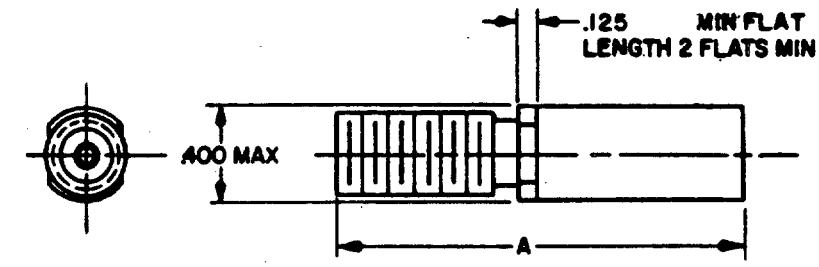

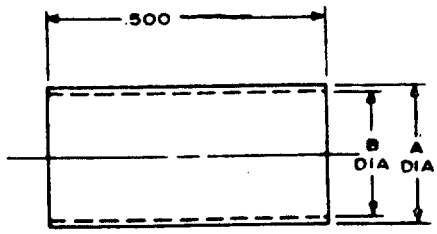

CRIMP FERRULE

PART NUMBER: M39012/57-$

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSMR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSMR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) $																
3025	RG-178/U	A	1.265													
3026	RG-174/U															
4026	RG-316/U															
3027	RG-122/U															
4028	RG-223/U															
3029	RG-58/U															
4029	RG-303/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. # $																
4502	RG-142/U	A	1.265	57-10	.041		1-01	1-15 OR SOLDER	RED	BRN	57-50	.250	.220		5-01	5-57 CLOS A

$ CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES.


‡ COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SMA (CABLED) - RECEPTACLE, SOCKET CONTACT, FLANGE MOUNTED, CLASS 2)

MIL-C-39012/58

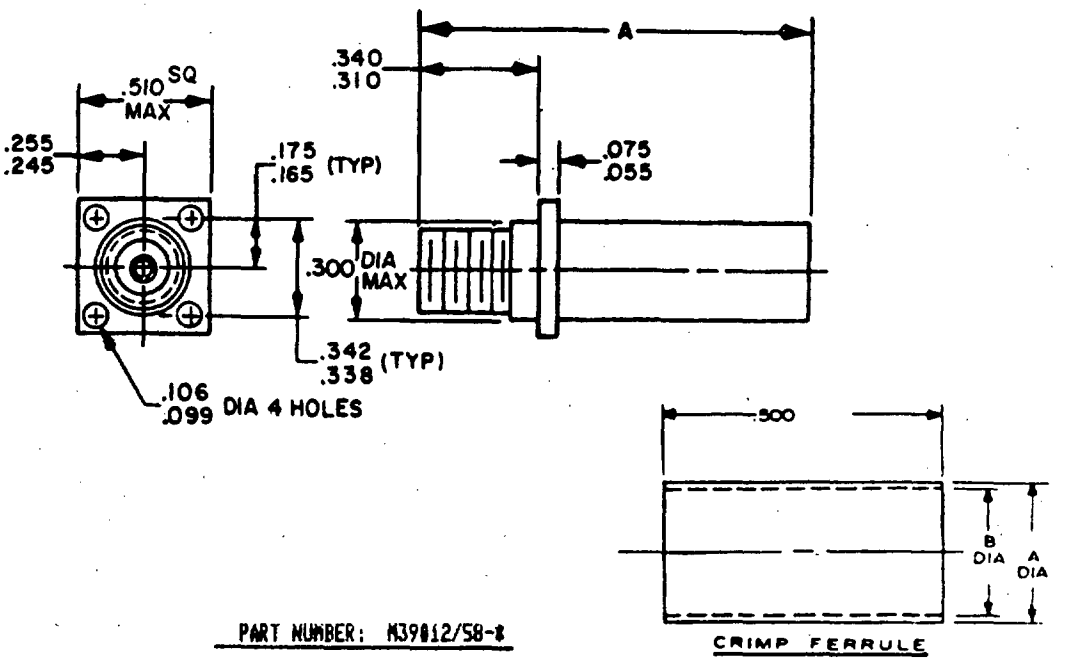

PART NUMBER: M39012/58-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
3025	RG-178/U	A	1.125													
3026	RG-174/U															
3027	RG-122/U															
3029	RG-58/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. # $																
4502	RG-142/U	A	1.125	58-10	.041		1-01	1-15 0k SOLDER	RED	BRN	58-50	.250	.220		5-01	5-57 CLOS A

CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES.


$ COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SMA (CABLED) - RECEPTACLE, SOCKET CONTACT, JAM NUT MOUNTED, CLASS 2)

MIL-C-39012/59

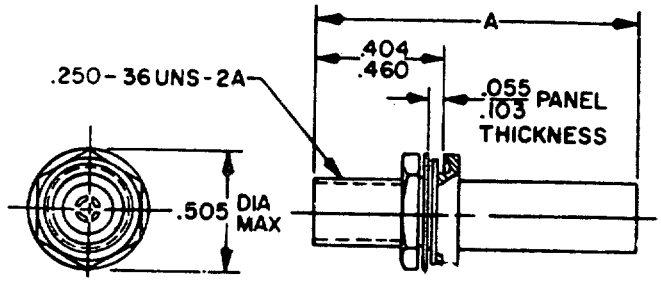

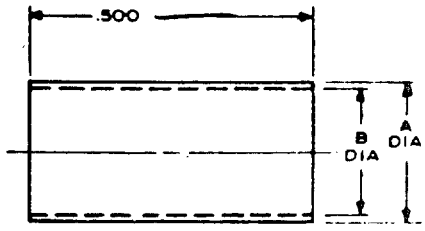

CRIMP FERRULE

PART NUMBER: M39012/59-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
3025	RG-178/U	A	1.125													
3026	RG-174/U															
3027	RG-122/U															
3029	RG-58/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. # $																
4502	RG-142/U	A	1.125	59-10	.041		1-01	1-15 OR SOLDER	RED	MRN	59-50	.250	.220		5-01	5-57 CLOS A

CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES.


$ COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
SERIES SMA (UNCABLED-RECEPTACLE, FEMALE, FLANGE MOUNTED, CLASS 2)

MIL-C-39012/60

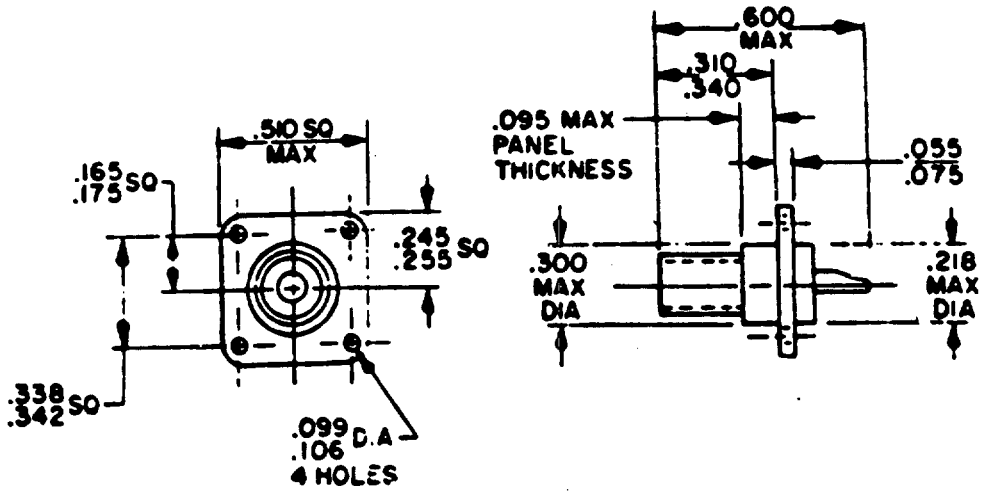


PART NUMBER: M39012/60-3001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY SERIES SMA
(UNCABLED-RECEPTACLE, FEMALE, JAM NUT MOUNTED, CLASS 2)

MIL-C-39012/61

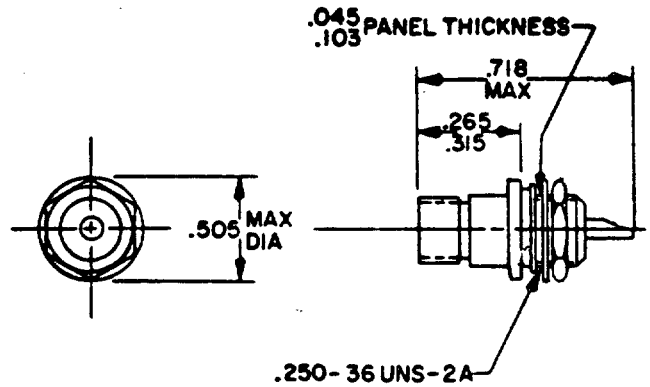


PART NUMBER: M39012/61-3002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY SERIES SMA
(UNCABLED-RECEPTACLE, FEMALE, JAM NUT MOUNTED, HERMETIC SEAL, CLASS 2)

MIL-C-39012/62

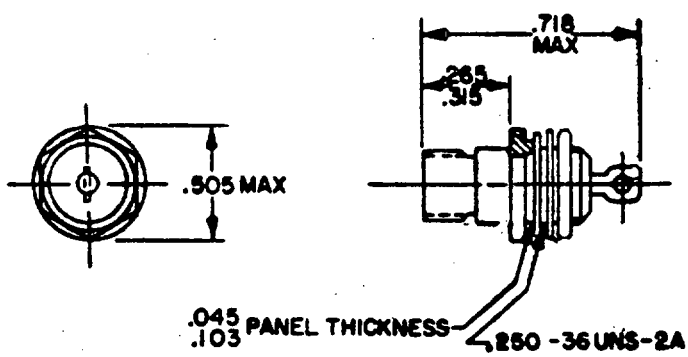


PART NUMBER: M39012/62-3002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
SERIES SMA (CABLED-PLUG, PIN, CLASS 2, SEMIRIGID CABLE)

MIL-C-39012/79

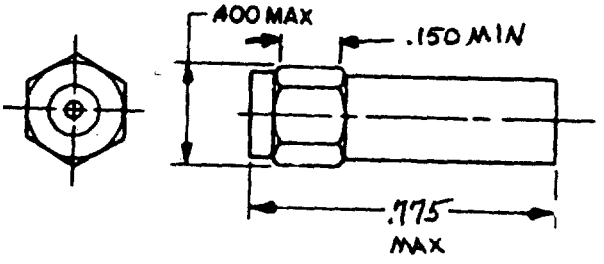

PART NUMBER: M39012/79-3008

TABLE I. DASH NUMBERS, CROSS REFERENCE

CATEGORY E - FIELD REPLACEABLE -(STANDARD ASSEMBLY TOOL KIT) #	
	APPLICABLE CABLE
DASH NO.$	CA M17/
3008	RG-402/U


KIT NUMBER - OMNI SPECTRA T-200, AMPHENOL 901-2500, OR EQUIVALENT.

$--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SMA (CABLED-PLUG, PIN RIGHT ANGLE, CLASS 2, SEMIRIGID CABLE)

MIL-C-39012/88

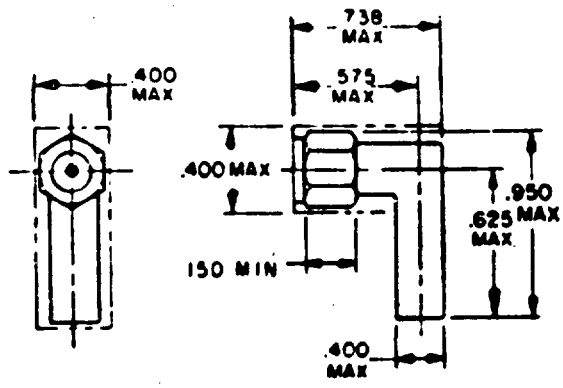

PART NUMBER: M39012/88-3008

TABLE I. DASH NUMBERS, CROSS REFERENCE

CATEGORY E - FIELD REPLACEABLE (STANDARD ASSEMBLY TOOL KIT) #	
	APPLICABLE CABLE
DASH NO.*	CA M17/
3008	RG-402/U


KIT NUMBER - OMNI SPECTRA T-200, AMPHENOL 901-2500, OR EQUIVALENT.

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
SERIES SMA (CABLED-PLUG, SOCKET, CLASS 2, SEMIRIGID CABLE)

MIL-C-39012/81

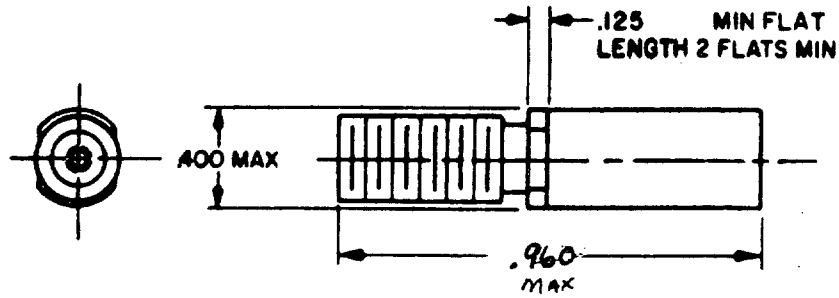

PART NUMBER: M39012/81-3008

TABLE I. DASH NUMBERS, CROSS REFERENCE

CATEGORY E - FIELD REPLACEABLE (STANDARD ASSEMBLY TOOL KIT) #	
	APPLICABLE CABLE
DASH NO.*	CA M17/
3008	RG-402/U


KIT NUMBER - OMNI SPECTRA T-200, AMPHENOL 901-2500, OR EQUIVALENT.

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
SERIES SMA (CABLED-RECEPTACLES, SOCKET, FLANGE MOUNTED, CLASS 2, SEMIRIGID CABLE)

MIL-C-39012/82

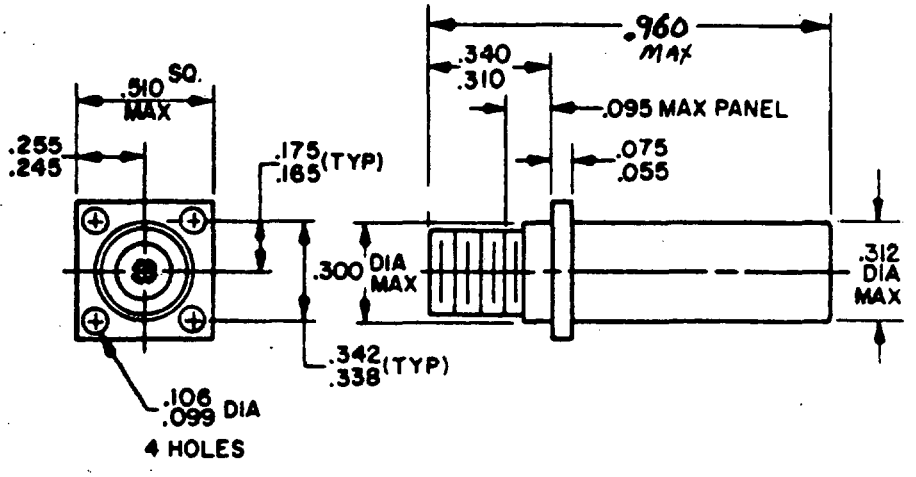

PART NUMBER: M39012/82-#

TABLE I. DASH NUMBERS, CROSS REFERENCE

CATEGORY E - FIELD REPLACEABLE (STANDARD ASSEMBLY TOOL KIT) #	
	APPLICABLE CABLE
DASH NO.#	CA M17/
3008	RG-402/U


KIT NUMBER - OMNI SPECTRA T-208, AMPHENOL 901-2500, OR EQUIVALENT.

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
SERIES SMA (CABLED-RECEPTACLE, SOCKET, JAM NUT MOUNTED, CLASS 2, SEMIGRID CABLE)

MIL-C-39012/83

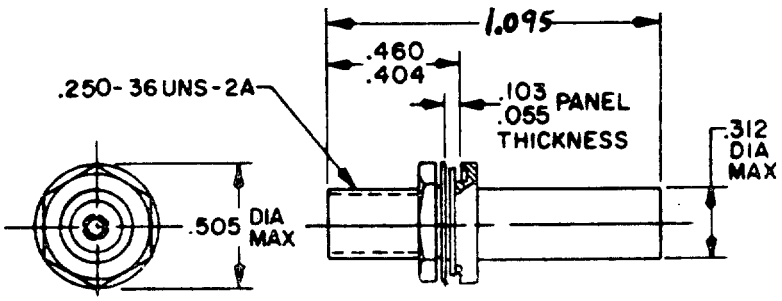

PART NUMBER: M39012/83-*

TABLE I. DASH NUMBERS, CROSS REFERENCE

CATEGORY E - FIELD REPLACABLE (STANDARD ASSEMBLY TOOL KIT) #	
DASH NO.	APPLICABLE CABLE CA M17/
3008	RG-402/U


KIT NUMBER - OMNI SPECTRA T-200, AMPHENOL 901-2500, OR EQUIVALENT.

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY,
SERIES SMA (UNCABLED-RECEPTACLE, FEMALE, PRINTED CIRCUIT, CLASS 2)

MIL-C-39012/93

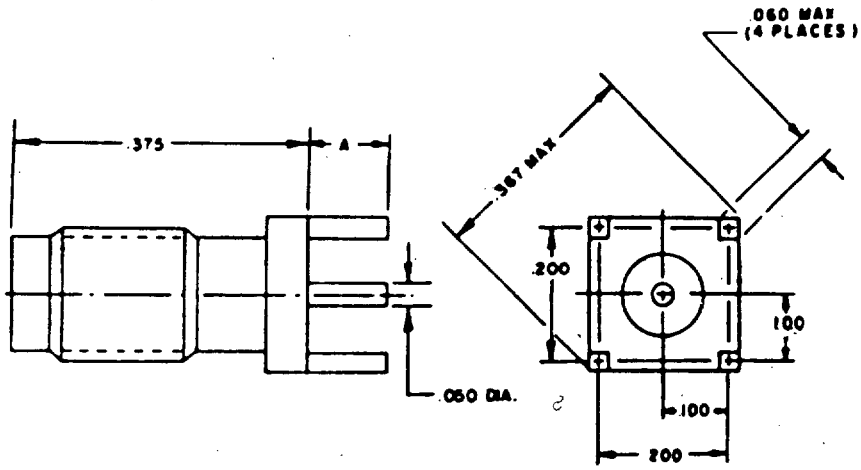

PART NUMBER: M39012/93-*

TABLE I. DASH NUMBERS, DIMENSIONS


DASH NUMBER*	DIMENSION
3001	.155
3002	.125
3003	.093

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY,
SERIES SMA (UNCABLED-RECEPTACLE, FEMALE, PRINTED CIRCUIT, RIGHT ANGLE, CLASS 2)

MIL-C-39012/94

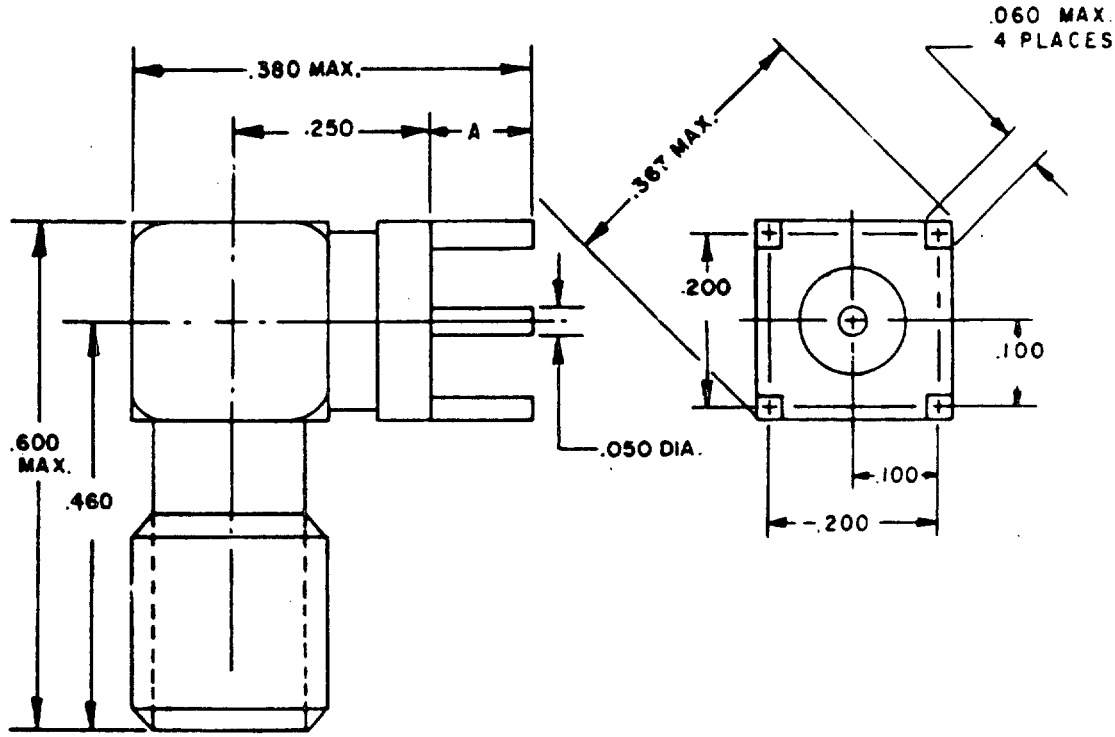

PART NUMBER: M39012/94-*

TABLE I. DASH NUMBERS, DIMENSIONS


DASH NUMBER*	DIMENSION
3001	.155
3002	.125
3003	.093

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES SMC (CABLED) - PLUG, FEMALE, CLASS 2)

MIL-C-39012/73

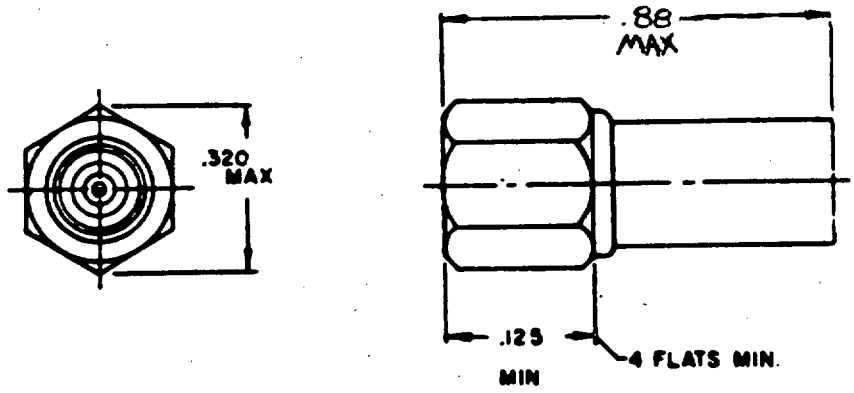

PART NUMBER: M39012/73-*

TABLE I. DASH NUMBERS, CROSS REFERENCE


CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO.
0001	RG-178/U
0002	RG-174/U
	RG-316/U
	RG-179/U
0003	RG-178/U
0004	RG-174/U
	RG-316/U
	RG-179/U

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES SMC (CABLED) - PLUG, MALE, CLASS 2)

MIL-C-39012/74

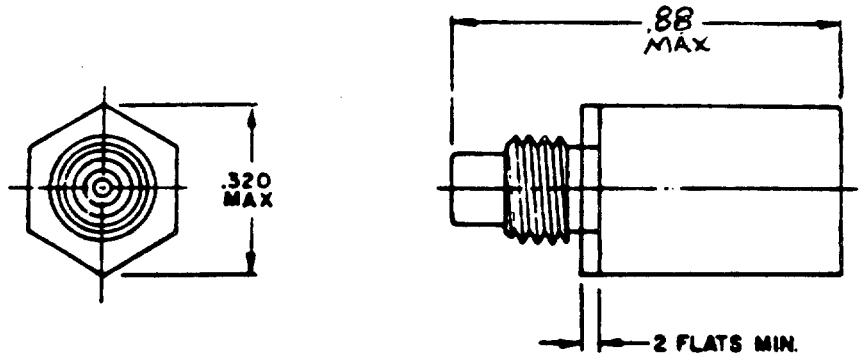

PART NUMBER: M39012/74-*

TABLE I. DASH NUMBERS, CROSS REFERENCE


CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO.
0001	RG-178/U
0002	RG-174/U
	RG-316/U
	RG-179/U
0003	RG-178/U
0004	RG-174/U
	RG-316/U
	RG-179/U

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES SMC (CABLED) - PLUG,FEMALE, RIGHT ANGLE, CLASS 2)

MIL-C-39012/75

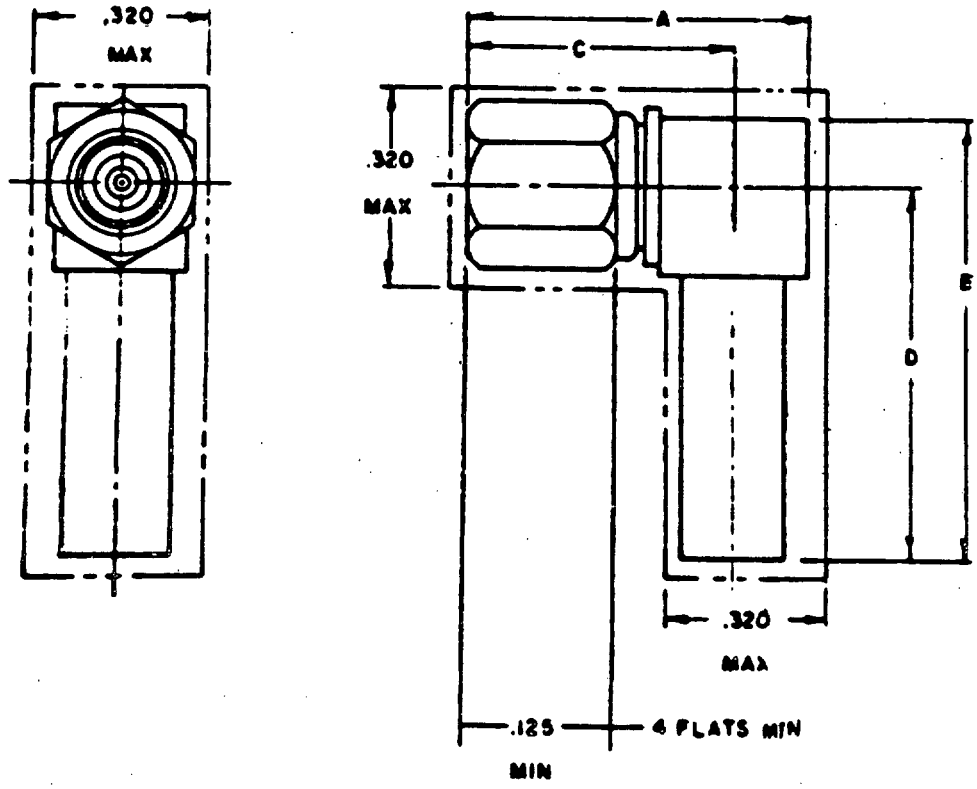

PART NUMBER: M39012/75-*

TABLE I. DASH NUMBERS, CROSS REFERENCE, AND DIMENSIONS


CATEGORY A - FIELD SERVICEABLE			
* DASH NUMBER	APPLICABLE CABLE NO.	DIM	INCHES
0001	RG-178/U	A	.63
0002	RG-174/U	B	.80
	RG-316/U	C	.50
	RG-179/U	D	.67
0003	RG-178/U		
0004	RG-174/U		
	RG-316/U		
	RG-179/U		

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES SMC (CABLED) - RECEPTACLE, MALE, JAMNUT MOUNTED, REAR MOUNTED, CLASS 2)

MIL-C-39012/76

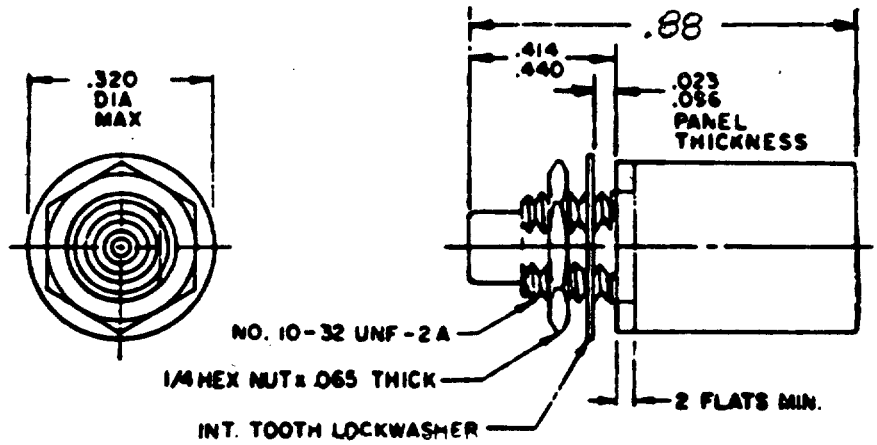

PART NUMBER: M39012/76-*

TABLE I. DASH NUMBERS, CROSS REFERENCE


CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO.
0001	RG-178/U
0002	RG-174/U
	RG-316/U
	RG-179/U
0003	RG-178/U
0004	RG-174/U
	RG-316/U
	RG-179/U

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY,
SERIES SNC (UNCABLED-RECEPTACLE, MALE, JAMNUT MOUNTED, CLASS 2)

MIL-C-39012/77

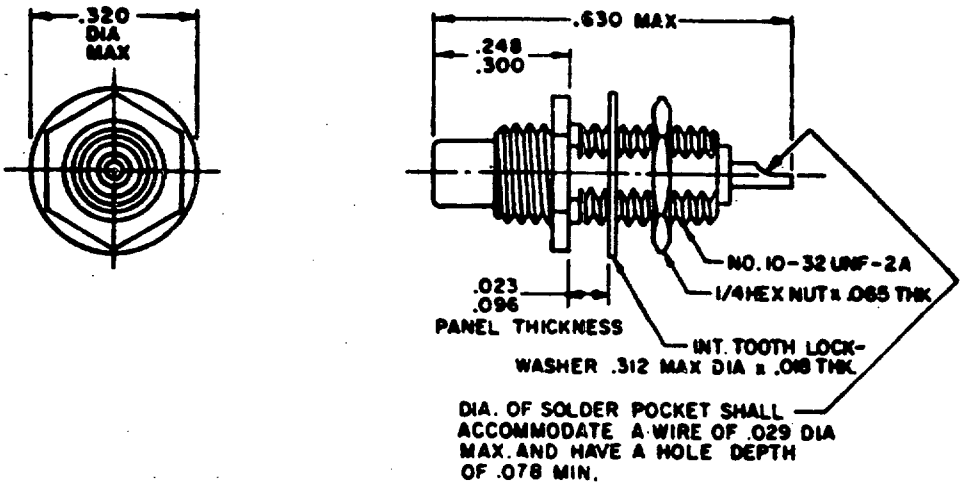

PART NUMBER: M39012/77-0002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUGS AND RECEPTACLES ELECTRICAL, WATERPROOF, QUICK DISCONNECT, HEAVY DUTY

MIL-C-22992

SCOPE: THIS SECTION COVERS MULTICONTACT HEAVY DUTY, QUICK DISCONNECT WATERPROOF, ELECTRICAL PLUG AND RECEPTACLE CONNECTORS AND ASSOCIATED ACCESSORIES FOR ELECTRONIC AND ELECTRICAL POWER AND CONTROL CIRCUIT. THESE ARE BROKEN INTO THREE CLASSES AND ARE EXPLAINED AS FOLLOWS:

CONTACTS: NONREMOVABLE SOLDER

CLASS C- CONTACT SIZES: 0, 4, 8, 12, 16
TEMPERATURE RANGE: -55°C TO 125°C
COUPLING: THREADED

INTENDED USE: CONNECTORS ARE INTENDED FOR HEAVY DUTY (ROUGH SERVICE) APPLICATIONS FOR EXTERNAL ELECTRICAL INTERCONNECTION OF EQUIPMENTS SUCH AS SHELTERS, VANS, BUILDINGS, MISSILE/SPACE LAUNCH SITES.

CONTACTS: NONREMOVABLE SOLDER

CLASS R- CONTACT SIZES: 0, 4, 8, 12, 16
TEMPERATURE RANGE: -55°C TO 125°C
COUPLING: THREADED

INTENDED USE: CONNECTORS ARE INTENDED FOR HEAVY DUTY (ROUGH SERVICE) APPLICATIONS IN PROTECTED ENCLOSURES WHERE WATERPROOFING (UNMATED) OR PRESSURIZATION IS NOT REQUIRED.

CONTACTS: FRONT RELEASE-REAR REMOVABLE CRIMP OR SOLDER

CLASS L- CONTACT SIZES: 1/0, 4, 6
TEMPERATURE RANGE: -55°C TO 125°C
COUPLING: THREADED


INTENDED USE: CONNECTORS ARE INTENDED TO BE USED FOR POWER CONNECTIONS IN THE CURRENT RANGE OF 60 TO 200 AMPERES AND WILL BE USED ONLY WITH THE HEAVY DUTY JACKETED CABLES SPECIFIED ON THE APPLICABLE INSERT STANDARD AND CAN WITHSTAND SEVERE IMPACT AND EXTREME FIELD USE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUGS AND RECEPTACLES ELECTRICAL, WATERPROOF, QUICK DISCONNECT, HEAVY DUTY

MIL-C-22992
CLASSES C AND R

PART NO. EXAMPLE: MS17345R20C27PW

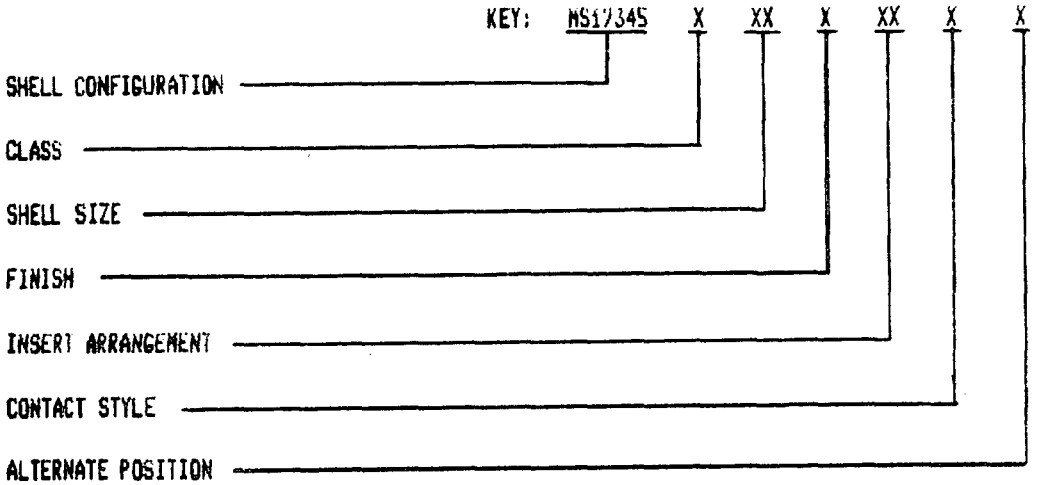

CRITERIA:

SHELL CONFIGURATION:	
WALL MOUNTING RECEPTACLE	MS17343
STRAIGHT PLUG	MS17344
CABLE CONNECTING PLUG (WITHOUT RING)	MS17345
BOX MOUNTING RECEPTACLE	MS17346
JAM-NUT RECEPTACLE	MS17347
JAM-NUT (BOX) RECEPTACLE	MS17348

CLASS: C - PRESSURIZED
R - ENVIRONMENTAL
L - ARC QUENCHING

SHELL SIZE : 16, 18, 20, 22, 24, 28, 32, 36, 40 ,44

FINISH: C - CONDUCTIVE
N - NONCONDUCTIVE

INSERT ARRANGEMENTS: SEE MIL-STD-1651(PAGE 192.18)

STYLE: P - PINS
S - SOCKETS

ALTERNATE INSERT POSITION: LEAVE BLANK FOR PREFERRED NORMAL POSITION

SERVICE RATING:

INST.	- 1000	
A	- 2000	
D	- 2800	Vac RMS TEST VOLTAGE
E	- 3500	
B	- 4500	
C	- 7000	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUGS AND RECEPTACLES ELECTRICAL, WATERPROOF, QUICK DISCONNECT, HEAVY DUTY

MIL-C-22992

TABLE I. STANDARD CONNECTORS, MIL-C-22992 TYPE

SHELL CONFIGURATION	CLASS	SHELL SIZE	FINISH	INSERT ARRANGEMENT MIL-STD-1651	CONTACT STYLE	ALTERNATE POSITION	SERVICE RATING	# CONTACT	CONTACT SIZE
MS17343 MS17344 MS17345 MS17346 MS17347 MS17348	C R	16	C N	9	P S	-	A	4	(2)-12, (2)16
		16	C N	10	P S	-	A	3	12
		16	C N	11	P S	-	A D	2 3	12 8
		18	C N	4	P S	-	D	4	16
			C N	8	P S	-	A	8	(1)-12, (7)-16
			C N	9	P S	-	INST.	7	(2)-12, (5)-16
			C N	11	P S	-	A	5	12
		20	C N	4	P S	-	D	4	12
		20	C N	7	P S	-	D/A	8	16
		20	C N	9	P S	-	D/A	8	(1)-12, (7)-16
		20	C N	14	P S	-	A	5	(2)-8, (3)-12
		20	C N	15	P S	-	A	7	12
		20	C N	18	P S	-	A	9	(3)-12, (6)-16
		20	C N	22	P S	-	A	6	(3)-8, (3)-16
		20	C N	24	P S	-	A	4	(2)-8, (2)-16
		20	C N	29	P S	-	A	17	16
		22	C N	2	P S	-	D	3	8
			C N	12	P S	-	D	5	(2)-8, (3)-16
			C N	15	P S	-	E/A	6	(5)-12, (1)-16
			C N	19	P S	-	A	14	16
			C N	23	P S	-	D/A	8	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUGS AND RECEPTACLES ELECTRICAL, WATERPROOF, QUICK DISCONNECT, HEAVY DUTY

MIL-C-22992

TABLE I. STANDARD CONNECTORS, MIL-C-22992 TYPE (CONT.)

SHELL CONFIGURATION	CLASS	SHELL SIZE	FINISH	INSERT ARRANGEMENT MIL-STD-1651	CONTACT STYLE	ALTERNATE POSITION	SERVICE RATING	# CONTACT	CONTACT SIZE
MS17343 MS17344 MS17345 MS17346 MS17347 MS17348	C R	24	C N	6	P S	-	D/A	8	12
			C N	7	P S	-	A	16	(2)-12, (14)-16
			C N	10	P S	-	A	7	8
			C N	20	P S	-	D	11	(2)-12, (9)-16
			C N	22	P S	-	D	4	8
		28	C N	1	P S	-	D	9	(3)-8, (6)-12
			C N	5	P S	-	D	5	(2)-4, (1)-12, (2)-16
			C N	9	P S	-	D	12	(6)-12, (6)-16
			C N	10	P S	-	D/A		(2)-4, (2)-8, (3)-12
			C N	12	P S	-	A	26	16
			C N	20	P S	-	A	14	(10)-12, (4)-16
			C N	21	P S	-	A	37	16
			C N	22	P S	-	D	6	(3)-4, (3)-16
		32	C N	1	P S	-	A D	5	(2)-0, (3)-12
			C N	3	P S	-	D	9	(1)-0, (2)-4, (2)-12, (4)-16
			C N	6	P S	-	A	23	(2)-4, (3)-8, (2)-12, (16)-16
			C N	7	P S	-	INST.	35	(1)-12, (28)-16
			C N	13	P S	-	D A	23	(5)-12, (18)-16
			C N	15	P S	-	D	8	(2)-0, (6)-12
			C N	17	P S	-	D	4	4
		36	C N	3	P S	-	D	6	(3)-0, (3)-12
			C N	5	P S	-	A	4	0
			C N	6	P S	-	A	6	(2)-0, (4)-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUGS AND RECEPTACLES ELECTRICAL, WATERPROOF, QUICK DISCONNECT, HEAVY DUTY

MIL-C-22992

TABLE I. STANDARD CONNECTORS, MIL-C-22992 TYPE (CONT.)

SHELL CONFIG-URATION	CLASS	SHELL SIZE	FINISH	INSERT ARRANGEMENT MIL-STD-1651	CONTACT STYLE	ALTERNATE POSITION	SERVICE RATING	# CONTACT	CONTACT SIZE
MS17343 MS17344 MS17345 MS17346 MS17347 MS17348	C R	36	C N	7	P S	-	A	47	(7)-12, (40)-16
			C N	8	P S	-	A	47	(1)-12, (46)-16
			C N	9	P S	-	A	31	(1)-4, (2)-8, (14)-12, (14)-16
			C N	52	P S	-	A	52	16
		40	C N	9	P S	-		47	(1)-8, (22)-12, (24)-16
			C N	56	P S	-	A	85	16
		44	C N	52	P S	-	A	104	16

CONNECTORS, RECEPTACLES, ELECTRICAL, WALL MOUNTING

MS17343

SIZE	A THREAD (PLATED)	D DIA.	K	L	M	R (TP)	S	T
16	1.1250-0.1P-0.2L-DS	.817	.938	.840	.797	1.062	1.375	.150
18	1.2500-0.1P-0.2L-DS	.942	.953	.625		1.156	1.500	.177
20	1.3750-0.1P-0.2L-DS	1.068				1.250	1.625	
22	1.5000-0.1P-0.2L-DS	1.192				1.375	1.750	
24	1.7500-0.1P-0.2L-DS	1.317	1.047	.594	.859	1.562	2.000	
28	2.0000-0.1P-0.2L-DS	1.536				1.750	2.250	
32	2.2500-0.1P-0.2L-DS	1.706	1.111	.530	.922	1.938	2.500	.209
36	2.5000-0.1P-0.2L-DS	2.005				2.188	2.750	
40	2.7500-0.1P-0.2L-DS	2.255		.703		2.375	3.000	

SIZE	V THREAD (PLATED) CLASS 2A LH	Z # MAX.	YY DIA.	AAA	CCC
16	1.0000-20 UNEF	.726	.897	.182	.007
18	1.1250-18 NEF	.711	1.022		
20	1.2500-18 NEF		1.148		
22	1.3750-18 NEF		1.272		
24	1.6250-18 NEF	.617	1.473	.260	
28	1.8750-16 UN		1.692		
32	2.0625-16 N	.553	1.942		
36	2.3125-16 N		2.161		
40	2.6250-16 UN		2.411		


DIMENSION Z SHALL BE INCREASED BY .312 FOR SIZE 0 CONTACT ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL, WALL MOUNTING

MS17343

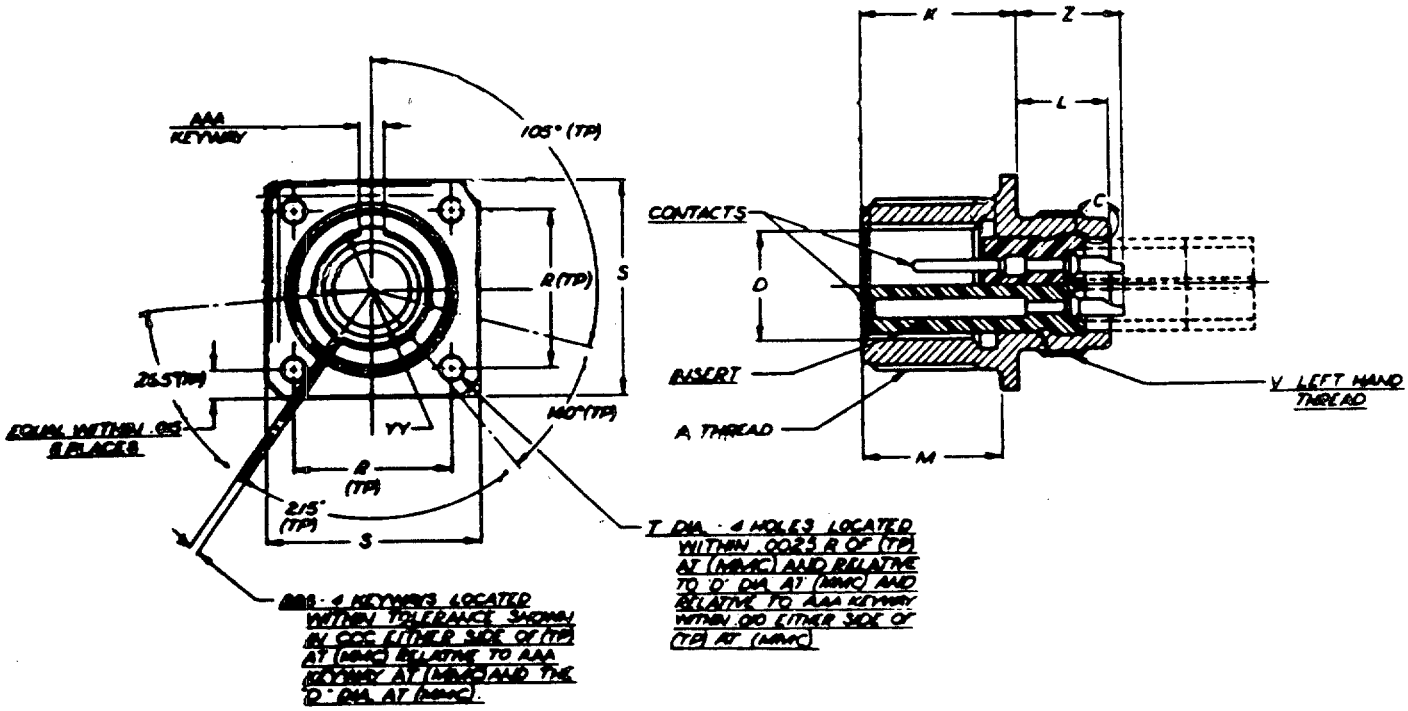


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL, STRAIGHT

MS17344

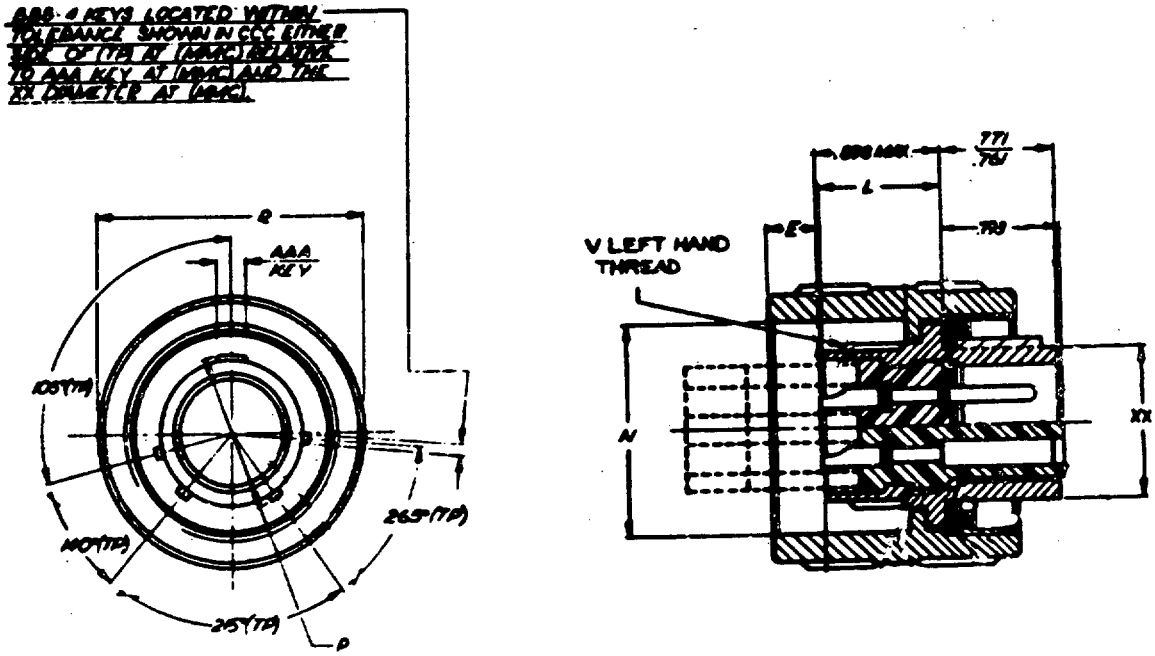

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL, STRAIGHT

MS17344

SIZE	A THREAD CLASS 2B	E MAX.	L	N DIA.	P	R DIA.
16	1.1250-0.1P-0.2L-DS	.150	.738	1.235	.877	1.469
18	1.2500-0.1P-0.2L-DS	.275		1.359	1.002	1.563
20	1.3750-0.1P-0.2L-DS			1.485	1.128	1.688
22	1.5000-0.1P-0.2L-DS			1.609	1.252	1.844
24	1.7500-0.1P-0.2L-DS		.800	1.859	1.453	2.094
28	2.0000-0.1P-0.2L-DS			2.109	1.672	2.344
32	2.2500-0.1P-0.2L-DS	.275	.875	2.359	1.922	2.594
36	2.5000-0.1P-0.2L-DS	.300	.875	2.609	2.141	2.844
40	2.7500-0.1P-0.2L-DS	.100	1.041	2.922	2.391	3.156


SIZE	V THREAD (PLATED) CLASS 2A LH	XX DIA.	AAA	BBB	CCC
16	1.0000-20 UNEF	.804	.172	.078	.007
18	1.1250-18 NEF	.929			
20	1.2500-18 NEF	1.052			
22	1.3750-18 NEF	1.177			
24	1.6250-18 NEF	1.302	.250	.125	
28	1.8750-16 UN	1.522			
32	2.0625-16 UN	1.772			
36	2.3125-16 N	1.982			
40	2.6250-16 UN	2.232			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL, CABLE CONNECTING(FEMALE)

MS17345

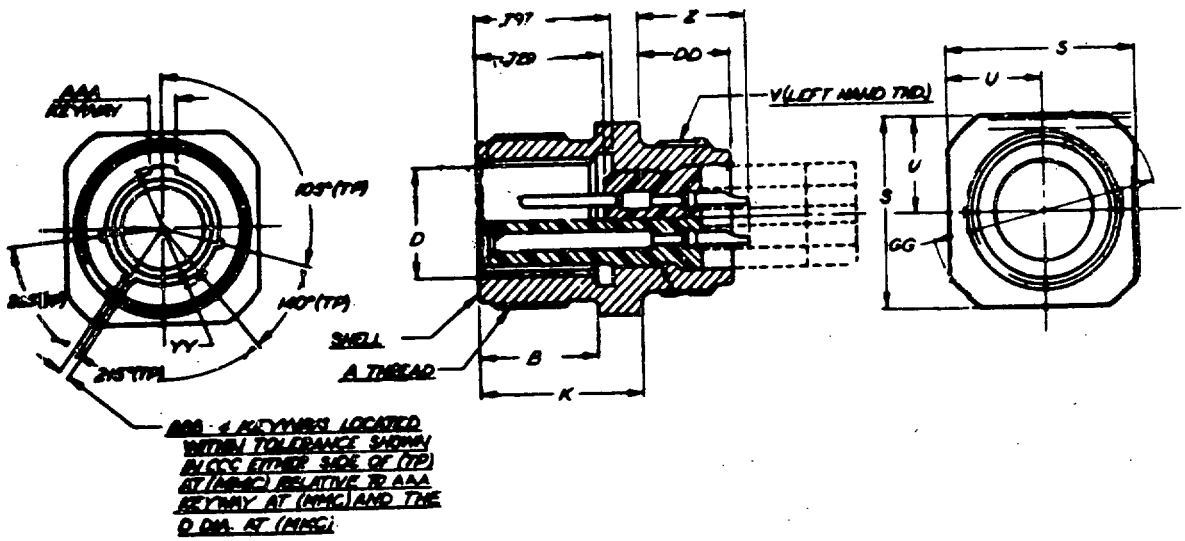

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTORS, PLUG ELECTRICAL, CABLE CONNECTING(FEMALE)

MS17345

SIZE	A THREAD (PLATED) CLASS 2A	D DIA.	K	S	U	V THREAD (PLATED) CLASS 2A LS
16	1.1250-0.1P-0.2L-DS	.817	.938	1.281	.641	1.0000-20 UNEF
18	1.2500-0.1P-0.2L-DS	.942	.953	1.375	.688	1.1250-18 NEF
20	1.3750-0.1P-0.2L-DS	1.068	.953	1.500	.750	1.2500-18 NEF
22	1.5000-0.1P-0.2L-DS	1.192	.953	1.625	.812	1.3750-18 NEF
24	1.7500-0.1P-0.2L-DS	1.317	1.016	1.875	.938	1.6250-18 NEF
28	2.0000-0.1P-0.2L-DS	1.536	1.016	2.125	1.062	1.8750-16 UN
32	2.2500-0.1P-0.2L-DS	1.786	1.078	2.375	1.188	2.0625-16 N
36	2.5000-0.1P-0.2L-DS	2.005	1.078	2.625	1.312	2.3125-16 N
40	2.7500-0.1P-0.2L-DS	2.255	1.078	3.000	1.500	2.6250-16 UN

SIZE	Z MAX. #	DD	GG DIA.	YY DIA.	AAA	BBB	CCC
16	.726	.641	1.500	.897	.182	.108	.007
18	.711	.625	1.625	1.022			
20	.711		1.750	1.148			
22	.711		1.875	1.272			
24	.648		2.125	1.473	.260	.155	
28	.648		2.375	1.692			
32	.576	.563	2.625	1.942			
36	.576	.563	2.875	2.161			
40	.576	.703	3.125	2.411			


DIMENSIONS Z SHALL BE INCREASED BY .312 FOR SIZE 0 CONTACT ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL, BOX MOUNTING

MS17346

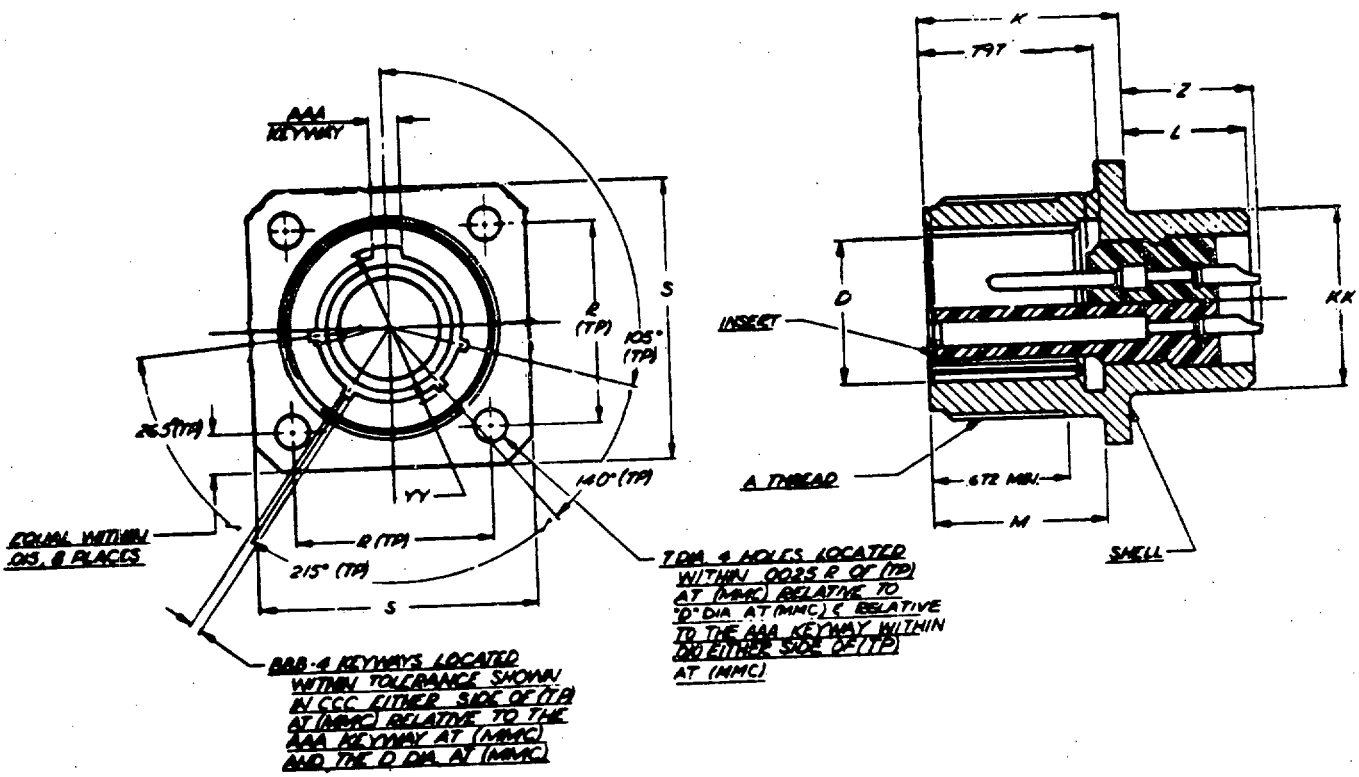

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL, BOX MOUNTING

MS17346

SIZE	A THREAD (PLATED) CLASS 2A	D DIA.	K	L	M	R (TP)	S
16	1.1250-0.1P-0.2L-DS	.817	.938	.640	.797	1.062	1.375
18	1.1250-0.1P-0.2L-DS	.942	.953	.625		1.156	1.500
20	1.3750-0.1P-0.2L-DS	1.068				1.250	1.625
22	1.5000-0.1P-0.2L-DS	1.192				1.375	1.750
24	1.7500-0.1P-0.2L-DS	1.317	1.047	.594	.859	1.562	2.000
28	2.0000-0.1P-0.2L-DS	1.536				1.750	2.250
32	2.2500-0.1P-0.2L-DS	1.786	1.110	.531	.922	1.938	2.500
36	2.5000-0.1P-0.2L-DS	2.005				2.186	2.750
40	2.7500-0.1P-0.2L-DS	2.255				2.375	3.000

SIZE	T DIA.	Z MAX. #	KK DIA.	YY DIA.	AAA	BBB	CCC
16	.150	.726	.890	.897	.182	.108	.007
18	.177	.711	1.015	1.022			
20			1.171	1.148			
22			1.296	1.272			
24		.648	1.421	1.473	.260	.155	
28			1.625	1.692			
32	.209	.528	1.891	1.942			
36			2.078	2.165			
40			2.312	2.411			


DIMENSION Z SHALL BE INCREASED BY .312 FOR SIZE 0 CONTACT ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL, JAM-NUT

MS17347

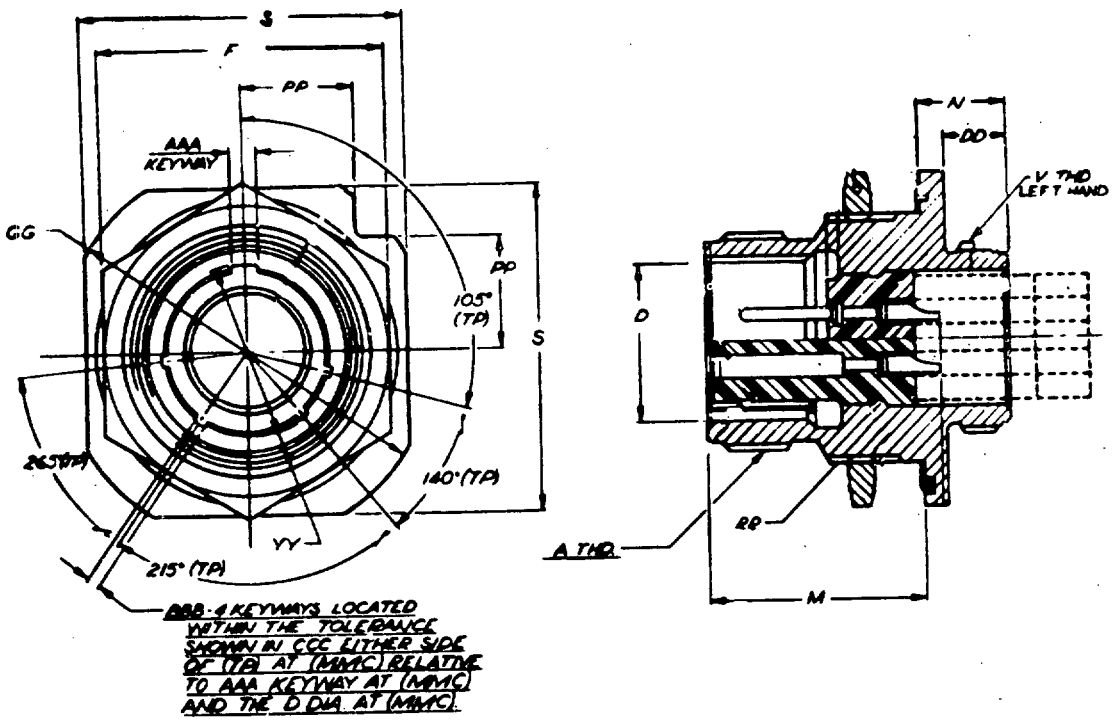

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL, JAM-NUT

MS17347

SIZE	A THREAD CLASS 2A	D DIA.	F MAX.	M	N
16	1.1250-0.1P-0.2L-DS	.817	1.500	1.141	.703
18	1.2500-0.1P-0.2L-DS	.942	1.562	1.156	
20	1.3750-0.1P-0.2L-DS	1.068	1.750	1.156	
22	1.5000-0.1P-0.2L-DS	1.192	1.875	1.156	
24	1.7500-0.1P-0.2L-DS	1.317	2.125	1.219	
28	2.0000-0.1P-0.2L-DS	1.536	2.375	1.231	.785
32	2.2500-0.1P-0.2L-DS	1.786	2.625		
36	2.5000-0.1P-0.2L-DS	2.005	2.875		
40	2.7500-0.1P-0.2L-DS	2.255	3.125		.972

SIZE	S	V THREAD (PLATED) CLASS 2A-	GG DIA.	PP	YY DIA.
16	1.750	1.0000-2- UNEF	2.000	.623	.897
18	1.875	1.1250-18 NEF	2.125	.663	1.022
20	2.000	1.2500-18 NEF	2.250	.707	1.148
22	2.125	1.3750-18 NEF	2.500	.751	1.272
24	2.375	1.6250-18 NEF	2.750	.840	1.473
28	2.625	1.8750-16 UN	3.000	.928	1.692
32	2.875	2.0625-16 N	3.250	1.017	1.942
36	3.125	2.3125-16 N	3.500	1.104	2.161
40	3.406	2.6250-16 UN	3.750	1.213	2.411

SIZE	RR THREAD (PLATED) CLASS 2A-RH	AAA	BBB	CCC
16	1.2500-18 NEF	.182	.108	.007
18	1.3750-18 NEF			
20	1.5000-18 NEF			
22	1.6250-18 NEF			
24	1.8750-16 UN	.260	.155	
28	2.1250-16 UN			
32	2.3750-16 UN			
36	2.6250-16 UN			
40	2.8750-16 UN			


DIMENSION Z SHALL BE INCREASED BY .312 FOR SIZE 0 CONTACTS ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL, JAM-NUT(BOX)

MS17348

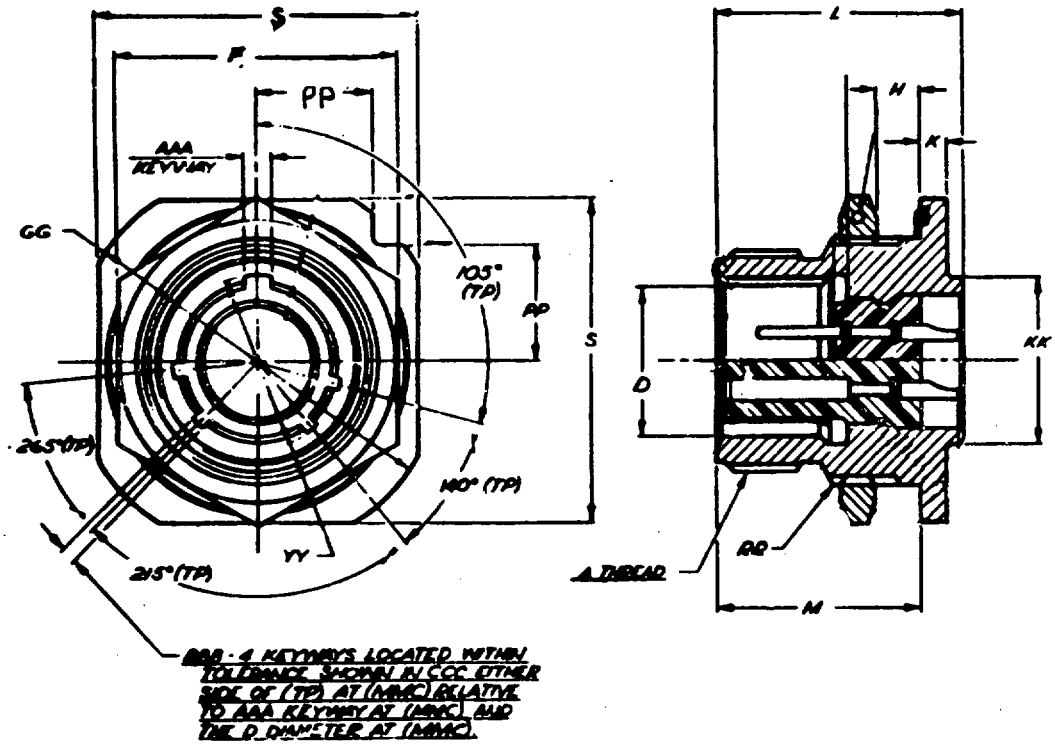

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL, JAM-NUT(BOX)

MS17348

SIZE	A THREAD (PLATED) CLASS 2A	D DIA.	F ±0.X	L	M	S
16	1.1250-0.1P-0.2L-DS	.817	1.500	1.578	1.235	1.750
18	1.2500-0.1P-0.2L-DS	.942	1.562		1.203	1.875
20	1.3750-0.1P-0.2L-DS	1.068	1.750		1.203	2.000
22	1.5000-0.1P-0.2L-DS	1.192	1.875		1.203	2.125
24	1.7500-0.1P-0.2L-DS	1.317	2.125	1.641	1.266	2.375
28	2.0000-0.1P-0.2L-DS	1.536	2.375		1.329	2.625
32	2.5000-0.1P-0.2L-DS	1.786	2.625			2.875
36	2.5000-0.1P-0.2L-DS	2.005	2.875			3.125
40	2.7500-0.1P-0.2L-DS	2.255	3.125			3.406

SIZE	GG DIA.	KK DIA.	PF	RR THREAD (PLATED) CLASS 2A	YY DIA.	AAA	BBB	CCC
16	2.000	.890	.623	1.2500-18 NEF	.897	.182	.108	.007
18	2.125	1.015	.663	1.3750-18 NEF	1.022			
20	2.250	1.171	.707	1.5000-18 NEF	1.148			
22	2.500	1.296	.751	1.6250-18 NEF	1.272			
24	2.750	1.421	.840	1.8750-16 UN	1.473	.260	.155	
28	3.000	1.625	.928	2.1250-16 UN	1.692			
32	3.250	1.891	1.017	2.3750-16 UN	1.942			
36	3.500	2.078	1.104	2.6250-16 UN	2.161			
40	3.750	2.312	1.213	2.8750-16 UN	2.411			

DIMENSIONS Z SHALL BE INCREASED BY .312 FOR SIZE 0 CONTACT ONLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS
MIL-STD-1651

SHELL SIZE	ARRANGEMENT NUMBER	CONTACTS		SERVICE RATING	SYMBOL	CONTACT LOCATION
		NO. OF	SIZE OF			
16	-9	2	16	A	●	ALL
		2	12	A	⊕	ALL
16	-10	3	12	A	⊕	ALL
16	-11	2	12	A	⊕	ALL
18	-4	4	16	D	●	ALL
18	-8	7	16	A	●	ALL
		1	12	A	⊕	
18	-9	5	16	INST	●	ALL
		2	12	A	⊕	ALL
18	-11	5	12	A	⊕	ALL
20	-4	4	12	D	⊕	ALL
20	-7	4	16	D	●	A,B,G,H
		4	16	A		ALL OTHERS
20	-9	1	12	D	⊕	H
		7	16	A	●	ALL OTHERS
20	-14	3	12	A	⊕	ALL
		2	8	A	◒	ALL
20	-15	7	12	A	⊕	ALL
20	-18	6	16	A	●	ALL
		3	12	A	⊕	ALL
20	-22	3	16	A	●	ALL
		3	8	A	◒	ALL
20	-24	2	16	A	●	ALL
		2	8	A	◒	ALL
20	-29	17	16	A	●	ALL
22	-2	3	8	D	◒	ALL
22	-12	3	16	D	●	ALL
		2	8	D	◒	ALL
22	-15	1	16	E	●	D
		5	12	A	⊕	ALL OTHERS
22	-19	14	16	A	●	ALL
22	-23	1	12	D	⊕	H
		7	12	A		ALL OTHERS
24	-6	3	12	D	⊕	A,G,H
		5	12	A		ALL OTHERS
24	-7	14	16	A	●	ALL
		2	12	A	⊕	ALL
24	-10	7	8	A	◒	ALL
24	-20	9	16	D	●	ALL
		2	12	D	⊕	ALL
24	-22	4	8	D	⊕	ALL
28	-1	2	12	D	⊕	A,E
		4	12	A		B,D,F,H
		1	8	D	◒	J
		2	8	A		G,C
28	-5	2	16	D	●	ALL
		1	12	D	⊕	ALL
		2	4	D	⊕	ALL

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS
MIL-STD-1651


SHELL SIZE	ARRANGEMENT NUMBER	CONTACTS NO. OF	CONTACTS SIZE OF	SERVICE RATING	SYMBOL	CONTACT LOCATION
28	-9	6	16	D		ALL
		6	12	D		ALL
28	-10	1	12	D		G
		2	12	D		A,F
		2	8	A		B,E
		2	4	A		C,D
28	-12	26	16	A		ALL
28	-20	4	16	A		ALL
		10	12	A		ALL
28	-21	37	16	A		ALL
28	-22	3	16	D		ALL
		3	4	D		ALL
32	-1	1	12	E		A
		2	12	D		D,C
		2	8	D		B,E
32	-3	4	16	D		ALL
		2	12	D		ALL
		2	4	D		ALL
		1	8	D		ALL
32	-6	16	16	A		ALL
		2	12	A		ALL
		3	8	A		ALL
		2	4	A		ALL
32	-7	4	16	INST		A,B,H,J
		24	16	A		A,B,H,J
		7	12	A		ALL OTHERS
32	-13	18	16	D		ALL
		5	12	D		ALL
32	-15	6	12	D		ALL
		2	8	D		ALL
32	-17	4	4	D		ALL
36	-3	3	12	D		ALL
		3	8	D		ALL
36	-5	4	8	A		ALL
36	-6	4	4	A		ALL
		2	8	A		ALL
36	-7	40	16	A		ALL
		7	12	A		ALL
36	-8	46	16	A		ALL
		1	12	A		ALL
36	-9	14	16	A		ALL
		14	12	A		ALL
		2	8	A		ALL
		1	4	A		ALL
36	-52	52	16	A		ALL
40	-9	24	16	A		ALL
		22	12	A		ALL
		1	8	A		ALL
40	-56	85	16	A		ALL
44	-52	104	16	A		ALL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651




16-9



16-10



16-11




18-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651




18-8



18-4



18-11




20-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651




20-7



20-9



20-14




20-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

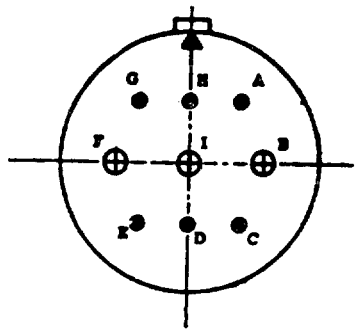


20-18

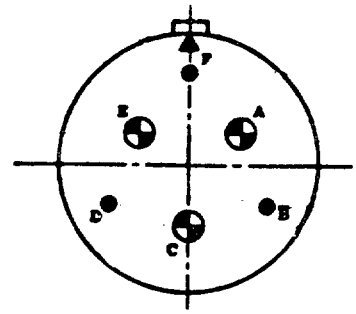

20-22



20-24

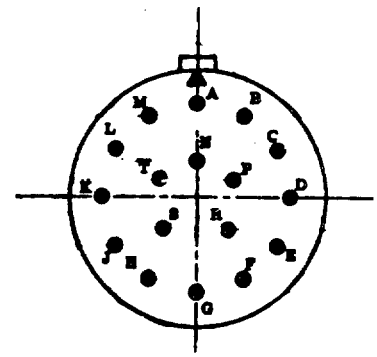


20-29

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

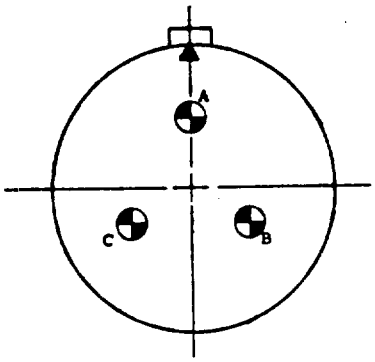


22-2

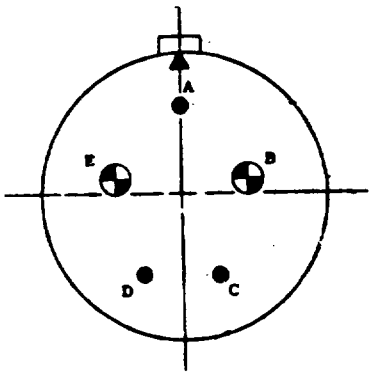

22-12

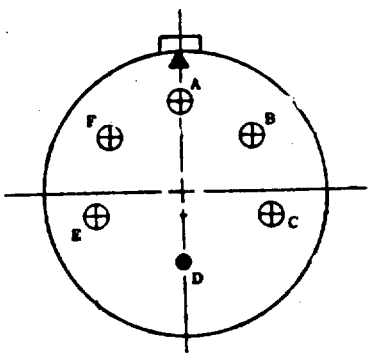

22-15

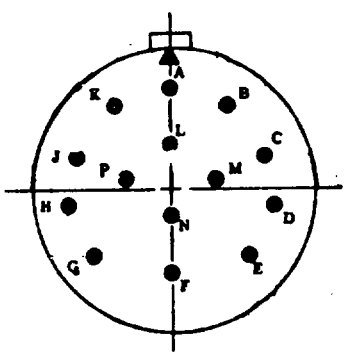


22-19

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

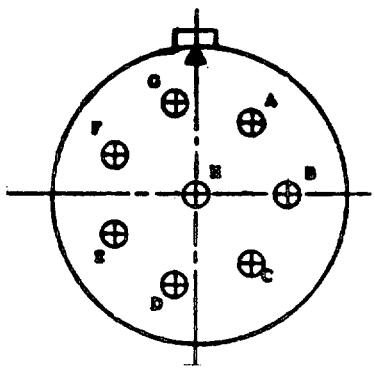


22-23

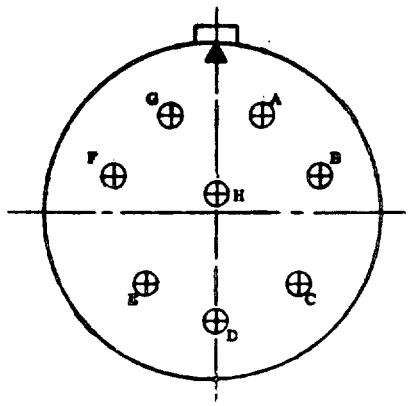

24-6

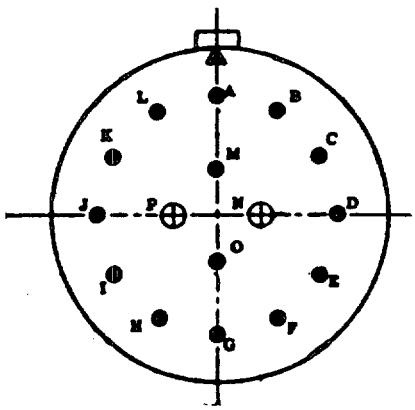

24-7

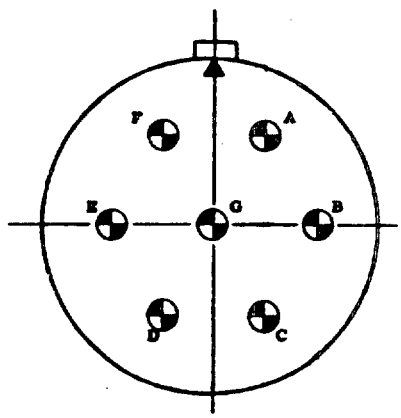


24-10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

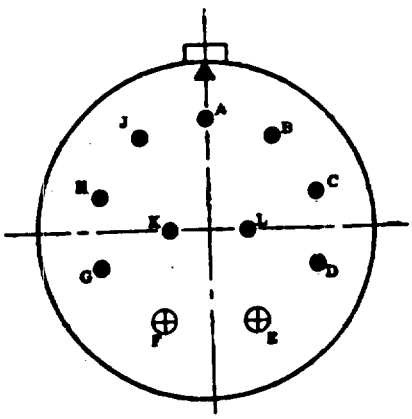


24-28

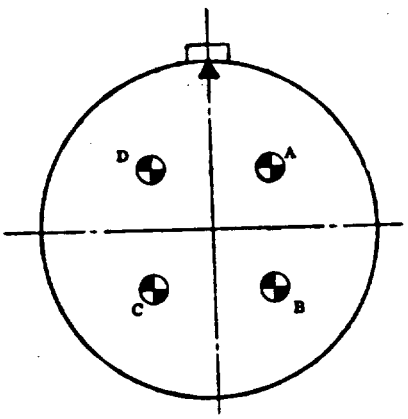

24-22

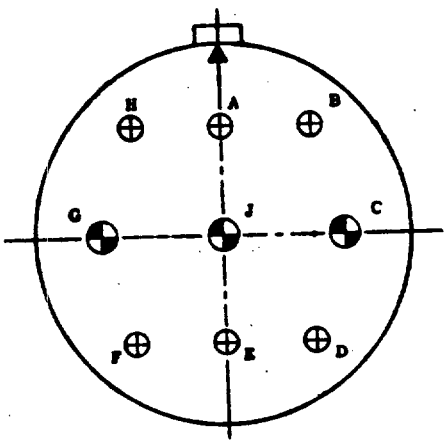

28-1

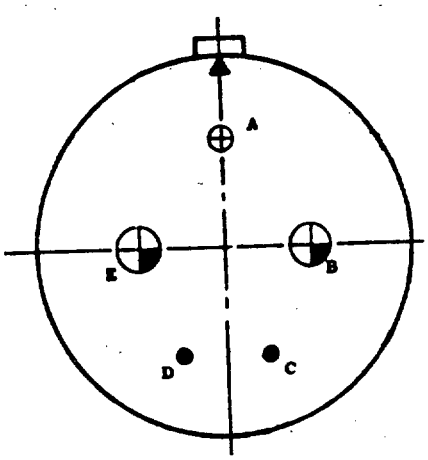


28-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

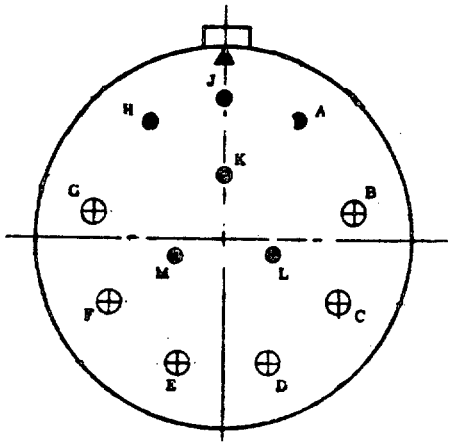


28-9

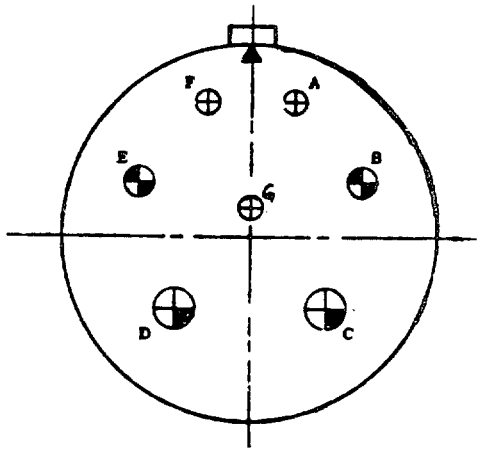

28-10

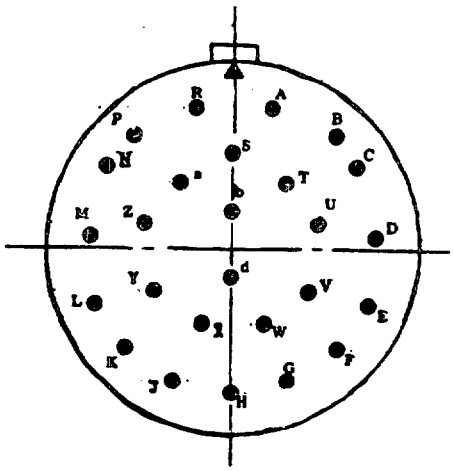

28-12

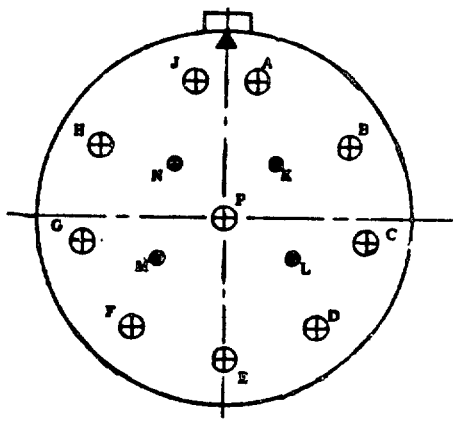


28-20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

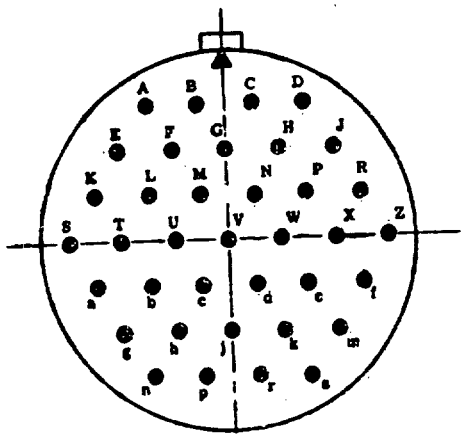


28-21

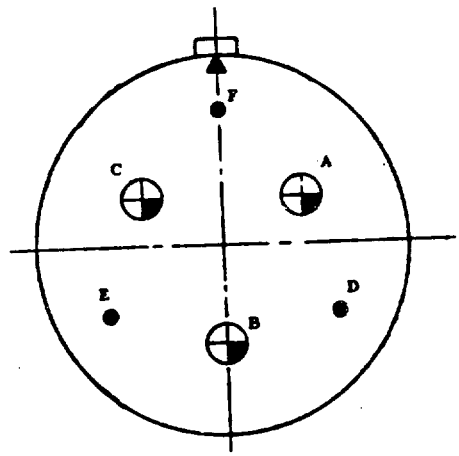

28-22

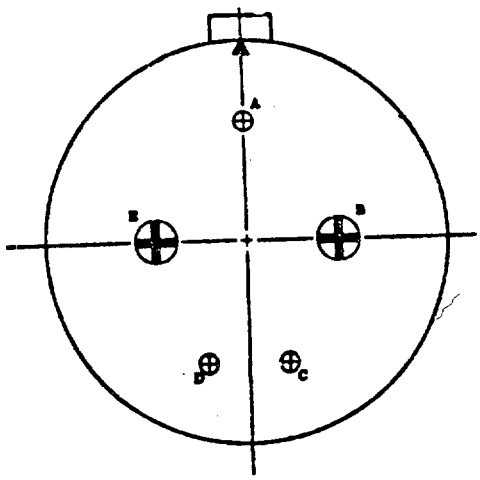

32-1

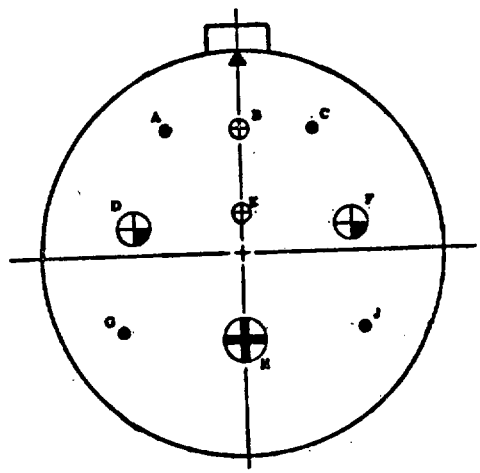


32-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

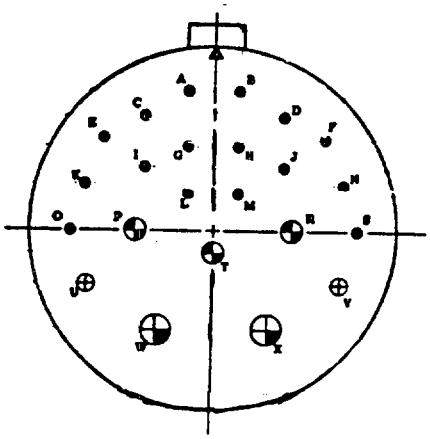


32-6

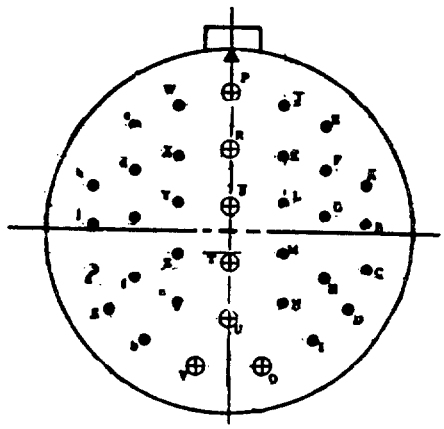

32-7

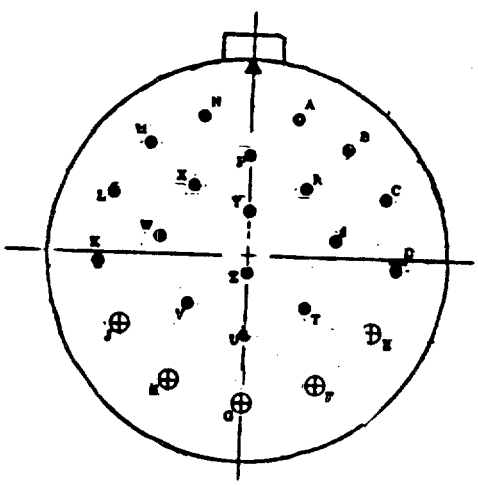

32-13

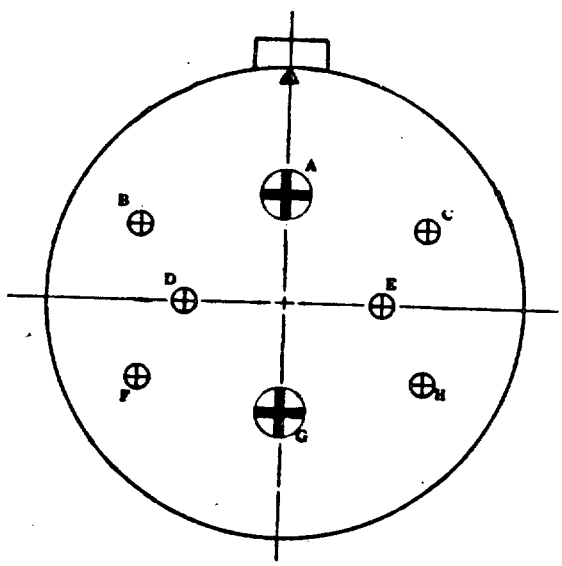


32-15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

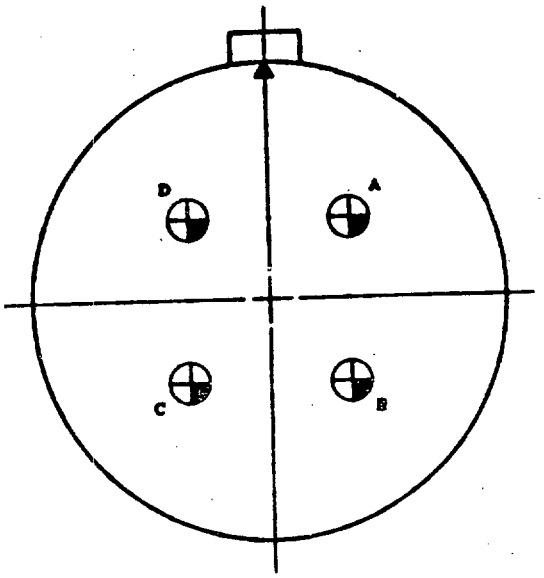


32-17

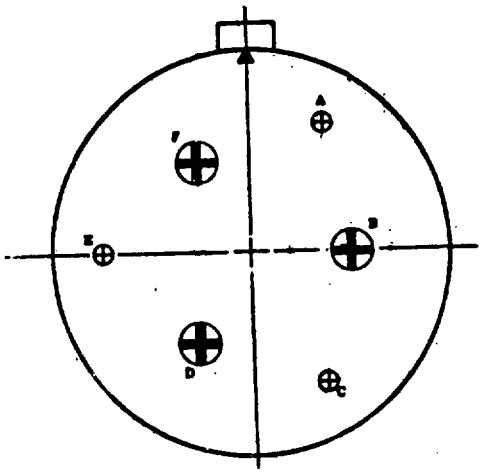

36-3

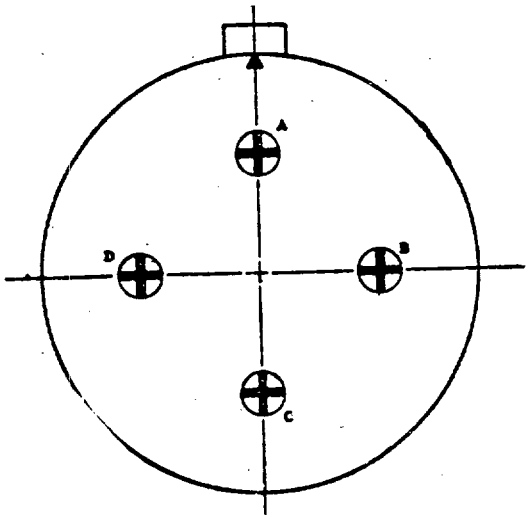

36-5

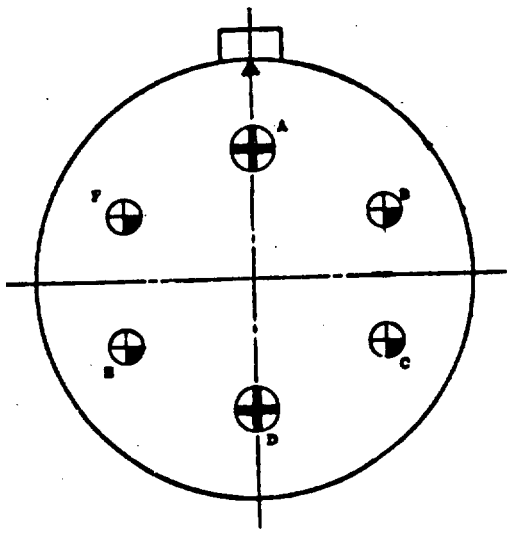


36-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

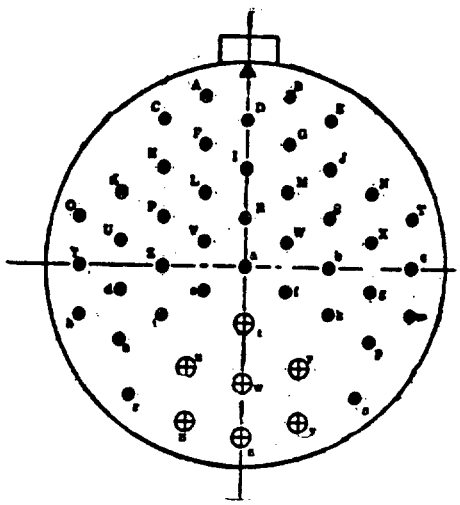


36-7

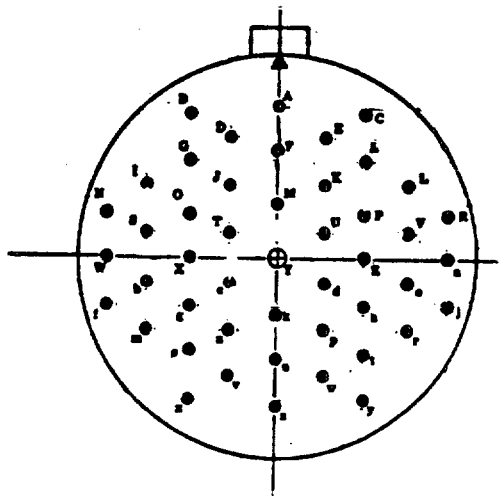

36-8

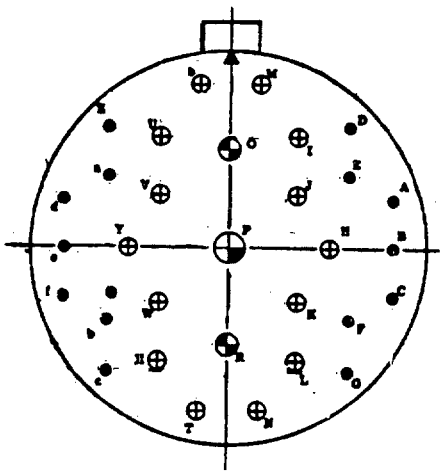

36-9

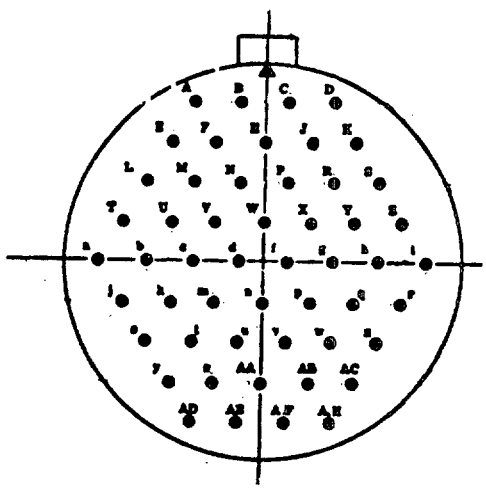


36-52

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, INSERT ARRANGEMENTS


MIL-STD-1651

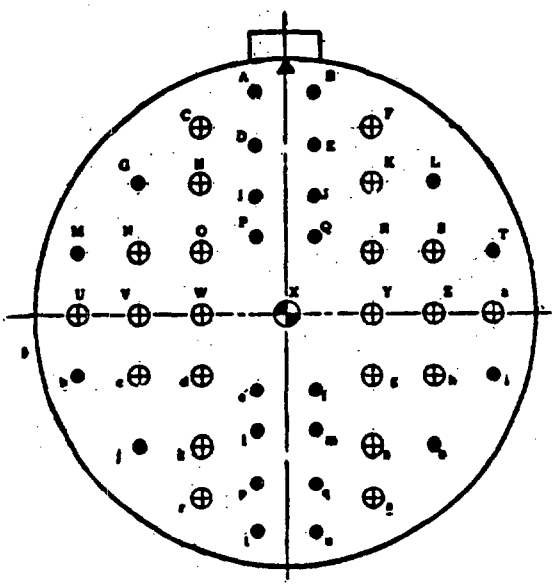

40-9

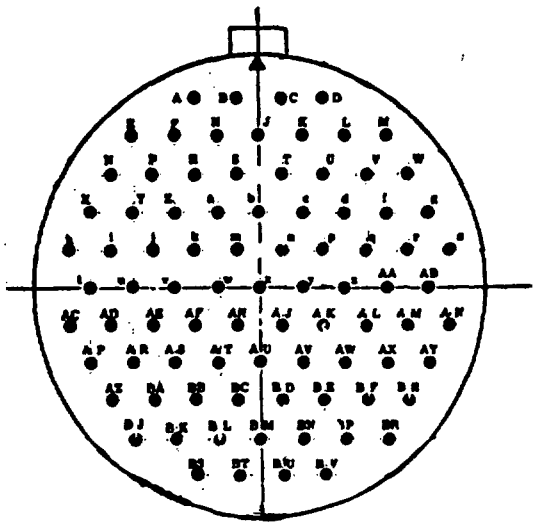

40-56

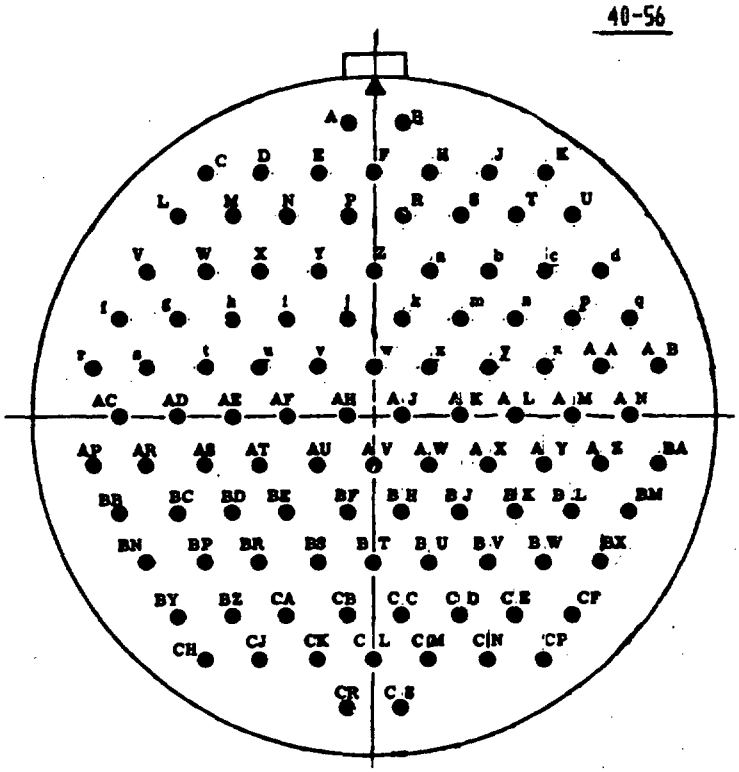

44-52

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


CONNECTORS, PLUGS AND RECEPTACLES ELECTRICAL, WATERPROOF, QUICK DISCONNECT, HEAVY DUTY

MIL-C-22992

TABLE II. STANDARD CONNECTORS, MIL-C-22992

SHELL	SHELL FINISH	SHELL SIZE	SHELL KEY POSITION	INSERT ARRANGEMENT	STYLE * *	ALTERNATE POSITION
MS90555 MS90556 MS90557 MS90558	C	32	4	12	S P	Y
		44	1	50 51 52 56	P S	
			4	12	P S	W
			5	12	P S	W
			6	12	P S	W
		52	4	12	S P	W

EXAMPLE PART NUMBER:

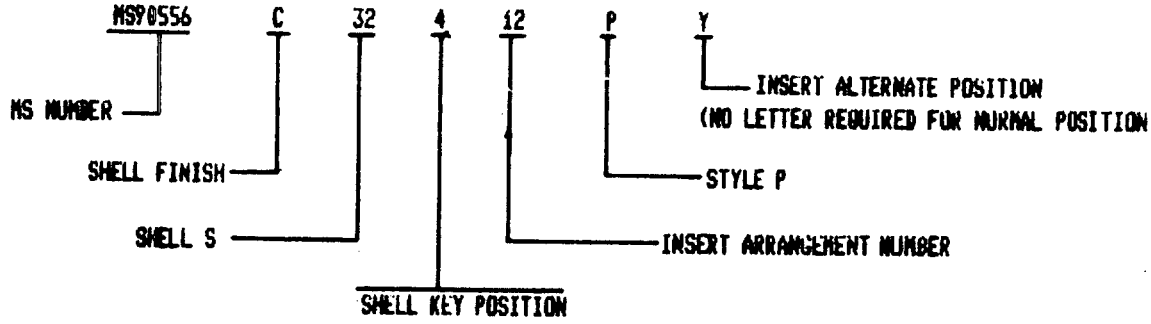

*Indicate MS90555 and MS90557 have only socket contacts and MS 90556 and MS90558 have only pin contacts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

TABLE III. STANDARD CONNECTORS, MIL-C-22992 TYPE, CLASS L


INTERCONNECTION SYSTEM	COMPONENT PARTS	INTERCONNECTION SYSTEM	COMPONENT PARTS
60 AMPERES 120/208 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90555C32412S MS90556C32412P MS90557C32412S MS90558C32412P	100 AMPERES 240/416 VAC 3 PHASE 4 WIRE GROUNDING 400 Hz	MS90555C44512SW MS90556C44512PW MS90557C44512SW MS90558C44512PW
60 AMPERES 120/208 VAC 3 PHASE 4 WIRE GROUNDING 400 Hz	MS90555C32412SY MS90556C32412PY MS90557C32412SY MS90558C32412PY	100 AMPERES 277/480 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90555C44612S MS90556C44612P MS90557C44612S MS90558C44612P
100 AMPERES 120/208 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90555C44412S MS90556C44412P MS90557C44412S MS90558C44412P	100 AMPERES 277/480 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90555C44612SW MS90556C44612PW MS90557C44612SW MS90558C44612PW
100 AMPERES 120/208 VAC 3 PHASE 4 WIRE GROUNDING 400 Hz	MS90555C44412SW MS90556C44412PW MS90557C44412SW MS90558C44412PW	200 AMPERES 120/208 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90555C52412S MS90556C52412P MS90557C52412S MS90558C52412P
100 AMPERES 240/416 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90555C44512S MS90556C44512P MS90557C44512S MS90558C44512P	200 AMPERES 120/208 VAC 3 PHASE 4 WIRE GROUNDING 400 Hz	MS90555C52412SW MS90556C52412PW MS90557C52412SW MS90558C52412PW
100 AMPERES 450/480 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90555C44150S MS90555C44151S MS90555C44152S MS90555C44156S	100 AMPERES 450/480 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90556C44150P MS90556C44151P MS90556C44152P MS90556C44156P
100 AMPERES 450/480 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90557C44150S MS90557C44151S MS90557C44152S MS90557C44156S	100 AMPERES 450/480 VAC 3 PHASE 4 WIRE GROUNDING 60 Hz	MS90558C44150P MS90558C44151P MS90558C44152P MS90558C44156P

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL WALL MOUNTING, CLASS L

MS90555

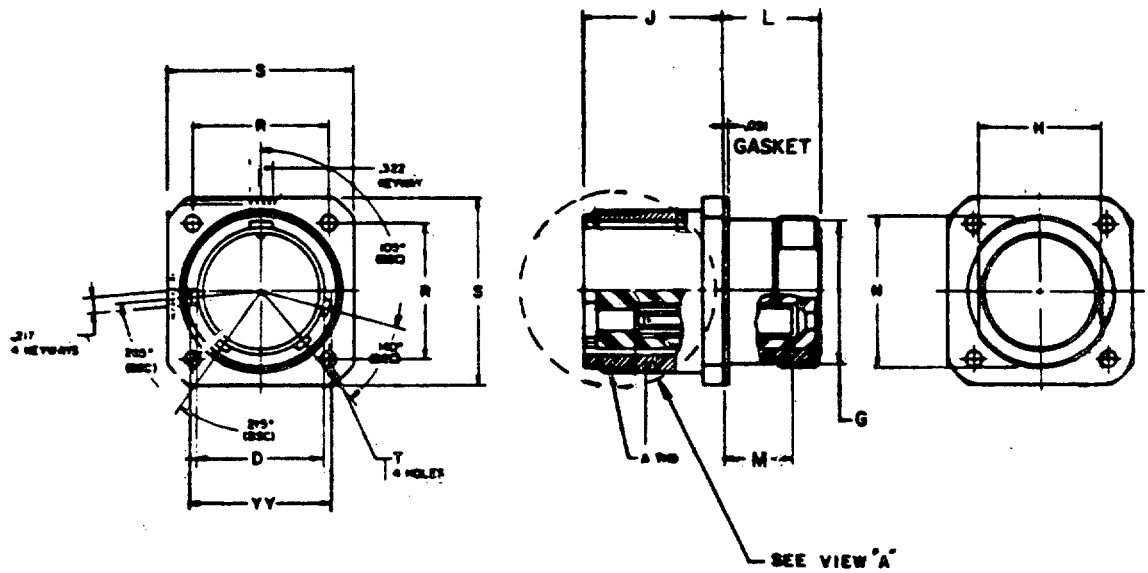

CONTACT SIZE	U DIA	V DIA WIRE SEALING RANGE
4/0	.510/.515	.780/.790
1/0	.367/.372	.457/.585
4	.235/.240	.356/.430
6	.188/.193	.300/.360

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.


MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL WALL MOUNTING, CLASS L

MS90555

SIZE	A THREAD CLASS 2A	B		D DIA	E DIA MAX	F
		PHASE & NEUTRAL	GROUND			
32	2.250-1428P-2857L	.523	.523	1.786	1.562	1.514
44	3.000-1428P-2857L	.742	.273	2.545	2.239	1.733
52	3.500-1428P-2857L	.742	.273	3.005	2.744	1.733

SIZE	G DIA	H	J	L	M	N DIA	R (BSC)	S	T	YY DIA
32	2.188	2.062	2.188	1.376	.750	2.250	2.062	2.625	.209	1.942
44	3.062	2.812	2.532	1.438	.812	3.125	2.812	3.375	.281	2.692
52	3.562	3.312	2.532	1.438	.812	3.625	3.156	3.875	.281	3.161

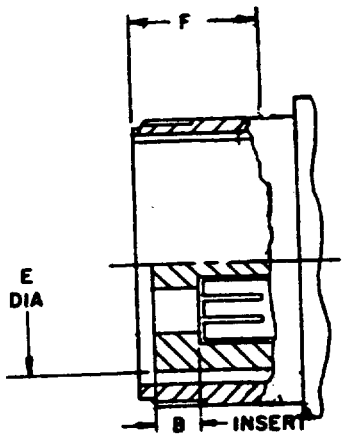

ENLARGED VIEW AT A


NON-GROUNDING ASSEMBLIES FINISH N	
SHELL SIZE	SHELL MAIN KEYWAY POSITIONS DC 2 WIRE 28 V
32	N (105)
44	
52	

Source: https://assist.dla.mil -- Downloaded: 2026-03-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL WALL MOUNTING, CLASS L

MS90555

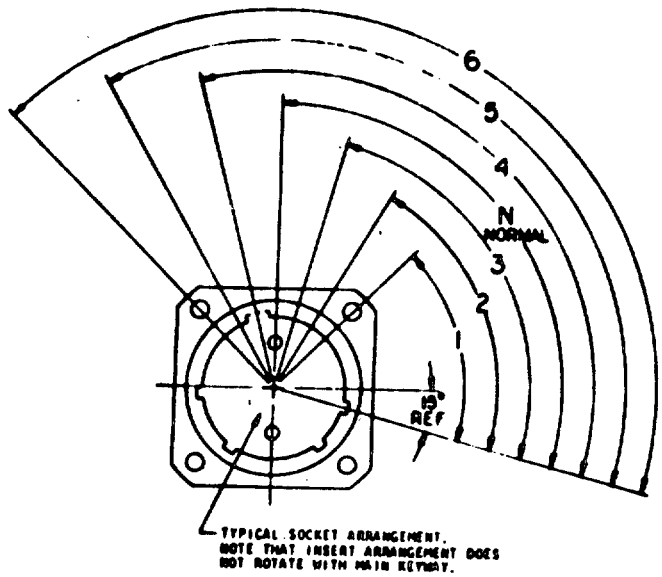

GROUNDING ASSEMBLIES: FINISH C


SHELL SIZE	SHELL MAIN KEY POSITIONS		
	60 Hz & 400 Hz		
	3-PH		
	4 WIRE		
	120/208 V	240/416 V	277/480 V
32 44 52	4(130°)	5(135°)	6(150°)

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL, STRAIGHT, CLASS L

MS90556

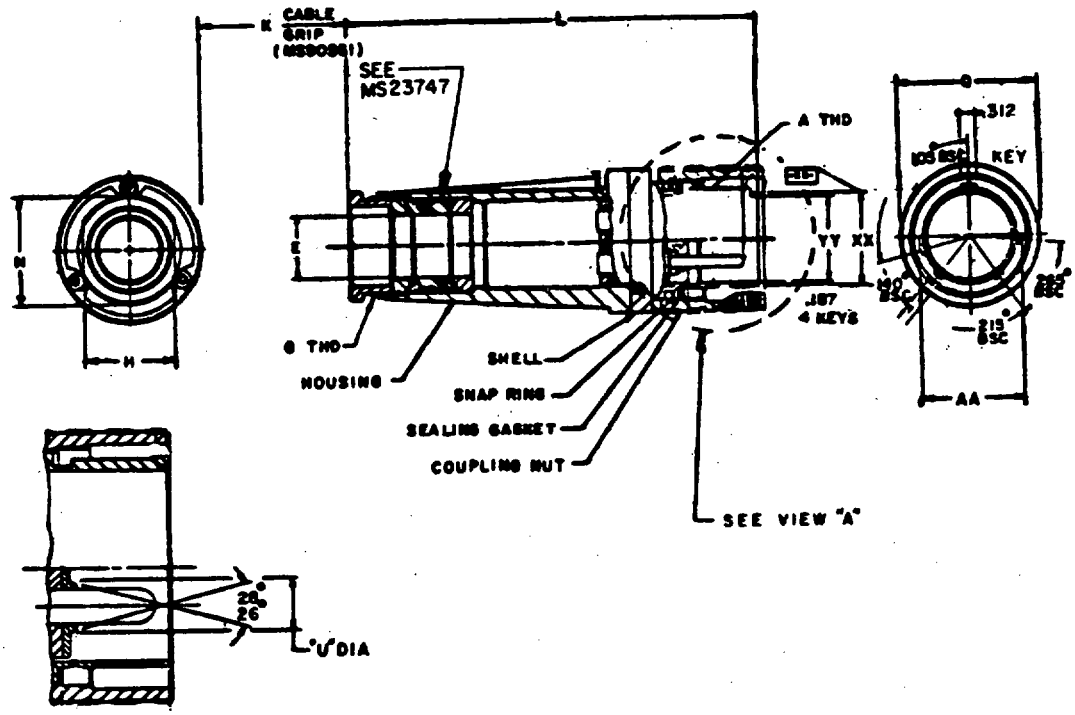

CONTACT SIZE	U DIA
4/0	.614/.624
1/0	.471/.481
4	.339/.349
6	.292/.382

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL, STRAIGHT, CLASS L

MS90556

SIZE	ARRANGE-MENT NO.	E CABLE RANGE	H	L MAX FREE LENGTH	N DIA	F	G THREAD CLASS 2 LEFT HAND	K APPROX. FREE LENGTH
32	-12	1.130/1.005	1.750	8.188	2.000	1.812	1.8750-16UN	7.188
44	-12	1.516/1.391	2.250	10.172	2.500	1.938	2.3125-16UNS	10.688
	-51	1.734/1.609						11.688
	-52	1.525/1.435						11.188
	-56	1.135/1.065						7.188
52	-12	2.328/2.183	2.875	11.109	3.250	2.188	3.0000-16UN	17.188

SHELL SIZE	A THREAD CLASS 2 B	Q DIA MAX	AA DIA	XX DIA	YY DIA
32	2.250-.1428P-.285/L	2.562	1.922	1.772	1.620
44	3.000-.1428P-.285/L	3.531	2.672	2.522	2.295
52	3.500-.1428P-.285/L	4.016	3.141	2.975	2.801

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL STRAIGHT, CLASS L

MS90556

ARRANGEMENT	CONTACTS $		CABLE $ CONDUCTORS		CONTACT BUSHINGS REQ.	
	QTY	SIZE	QTY	SIZE	QTY	P/N MS3348-
32-12	4	4	4	6	4	4-6L
	1	6(G)	4	12(G)	-	-
44-12	4	1/0	4	2	4	1-2L
	4	6(G)	4	9(G)	4	6-9L
44-52	3	1/0	3	2	3	1-2L
	1	1/0(G)	1	2(G)	1	1-2L
44-56	3	1/0	3	6	3	1-6L
	1	1/0(G)	1	6(G)	1	1-6L

$ (G) DESIGNATES GROUNDING.

NON GROUNDING ASSEMBLIES: FINISH N


SHELL SIZE	SHELL MAIN KEY POSITIONS @ 2 WIRE 28 V
32 44 52	N (105°)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL, STRAIGHT, CLASS L

MS90556

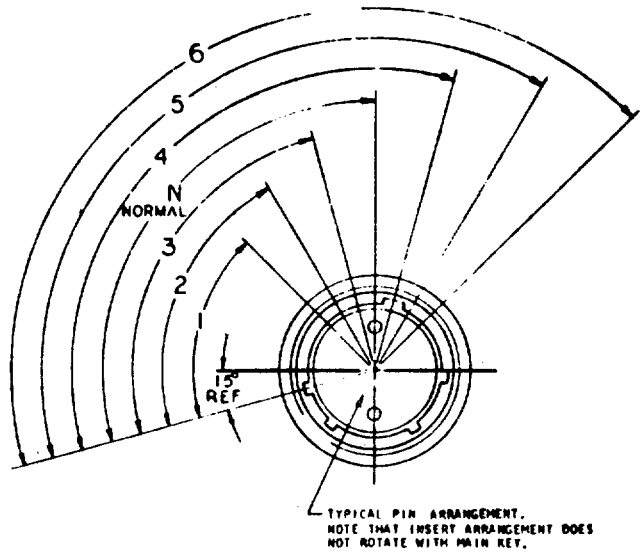

GROUNDING ASSEMBLIES: FINISH C


SHELL SIZE	SHELL MAIN KEY POSITIONS 60 Hz & 400 Hz 3-PH 4 WIRE		
	120/208 V	240/416 V	277/480 V
J2 44 52	4 (120°)	5 (135°)	6 (150°)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL; CABLE CONNECTING(WITHOUT COUPLING RING), CLASS L

MS90557

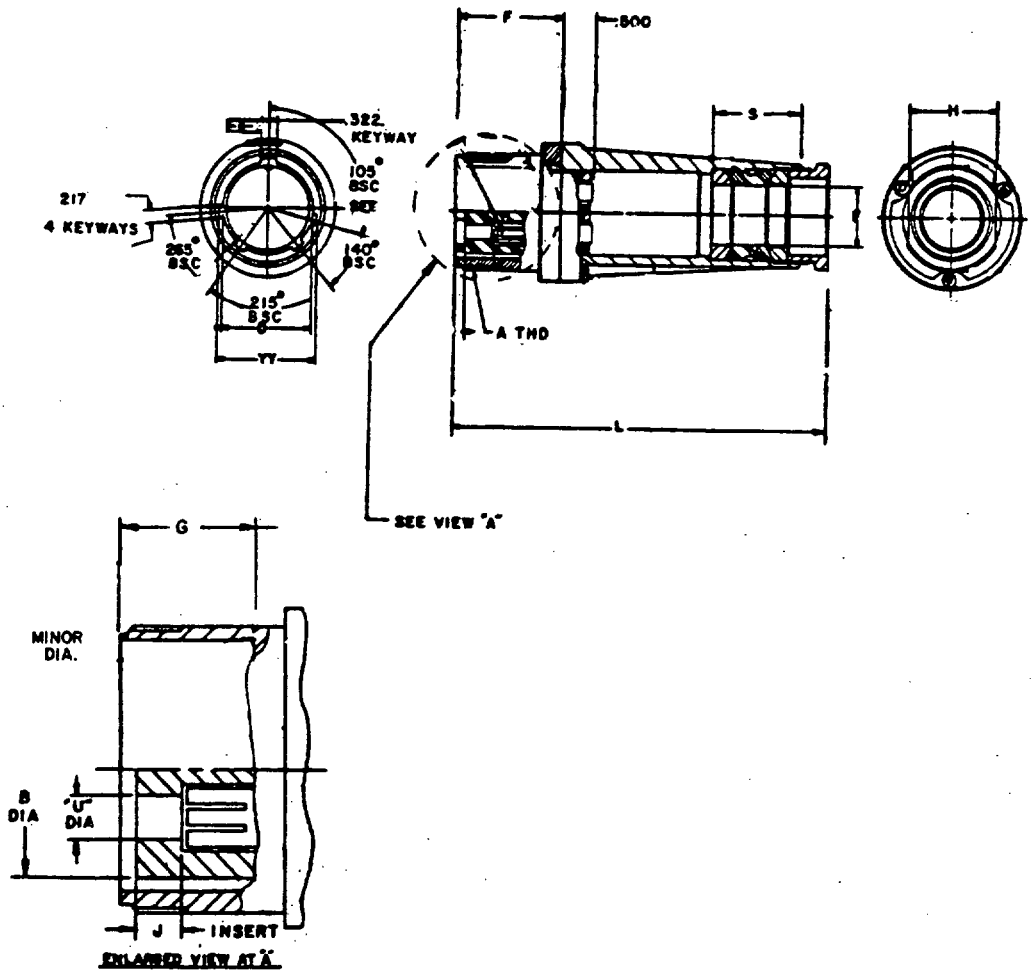

CONTACT SIZE	"U" DIA
4/0	.510/.515
1/0	.367/.372
4	.235/.240
6	.188/.193

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL, CABLE CONNECTING, CLASS L

MS90557

SIZE	ARRANGE-MENT NO.	E CABLE RANGE	H	L MAX FREE LENGTH	N DIA	F	YY DIA	A THREAD CLASS 2A	D DIA	J	
										PHASE & NEUTRAL	GROUND
32	-12	1.130/1.005	1.750	8.156	2.000	2.448	1.942	2.250-.1428P-2B/L	1.786	.523	.523
44	-12	1.516/1.391	1.250	10.125	2.500	2.854	2.692	3.000-.1428P-2B/L	2.545	.742	.273
	-51	1.734/1.609									
52	-12	2.328/2.183	1.875	11.062	3.250	2.854	3.161	3.500-.1428P-2B/L	3.005	.742	.273

SIZE	B DIA MAX	G	S
32	1.562	1.514	1.812
44	2.239	1.733	1.938
52	2.744	1.733	2.188

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL, CABLE CONNECTING, CLASS L

MS90557

ARRANGEMENT	CONTACTS $ QTY	CONTACTS $ SIZE	CABLE $ CONDUCTORS QTY	CABLE $ CONDUCTORS SIZE	CONTACT BUSHING REQ. QTY	CONTACT BUSHING REQ. P/N MS3348-
32-12	4	4	4	6	4	4-6L
	1	6(G)	4	12(G)	-	-
44-12	4	1/0	4	2	4	1-2L
	4	6(G)	4	9(G)	4	6-9L
44-52	3	1/0	3	2	3	1-2L
	1	1/0(G)	1	2(G)	1	1-2L
44-56	3	1/0	3	6	3	1-6L
	1	1/0(G)	1	6(G)	1	1-6L

$ (G) DESIGNATES GROUNDING.

NON-GROUNDING ASSEMBLIES: FINISH N


SHELL SIZE	SHELL MAIN KEY POSITIONS DC 2 WIRE 28 V
32 44 52	N (105°)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, PLUG, ELECTRICAL, CABLE CONNECTING, CLASS L

MS90557

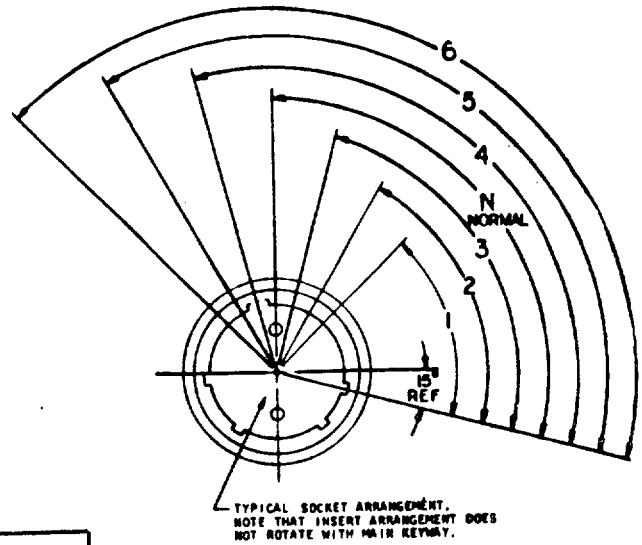

GROUNDING ASSEMBLIES: FINISH C

SHELL SIZE	60 Hz & 400 Hz		
	3-PH		
	4 WIRE		
	120/208 V	240/416 V	277/480 V
32 44 52	4 (120°)	5 (135°)	6 (150°)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL, WALL MOUNTING(WITH COUPLING RING), CLASS L

MS90558

CONTACT SIZE	Z DIA	V DIA WIRE SEALING RANGE
4/0	.614/.624	.700/.790
1/0	.471/.481	.457/.585
4	.339/.349	.356/.430
6	.292/.302	.300/.360

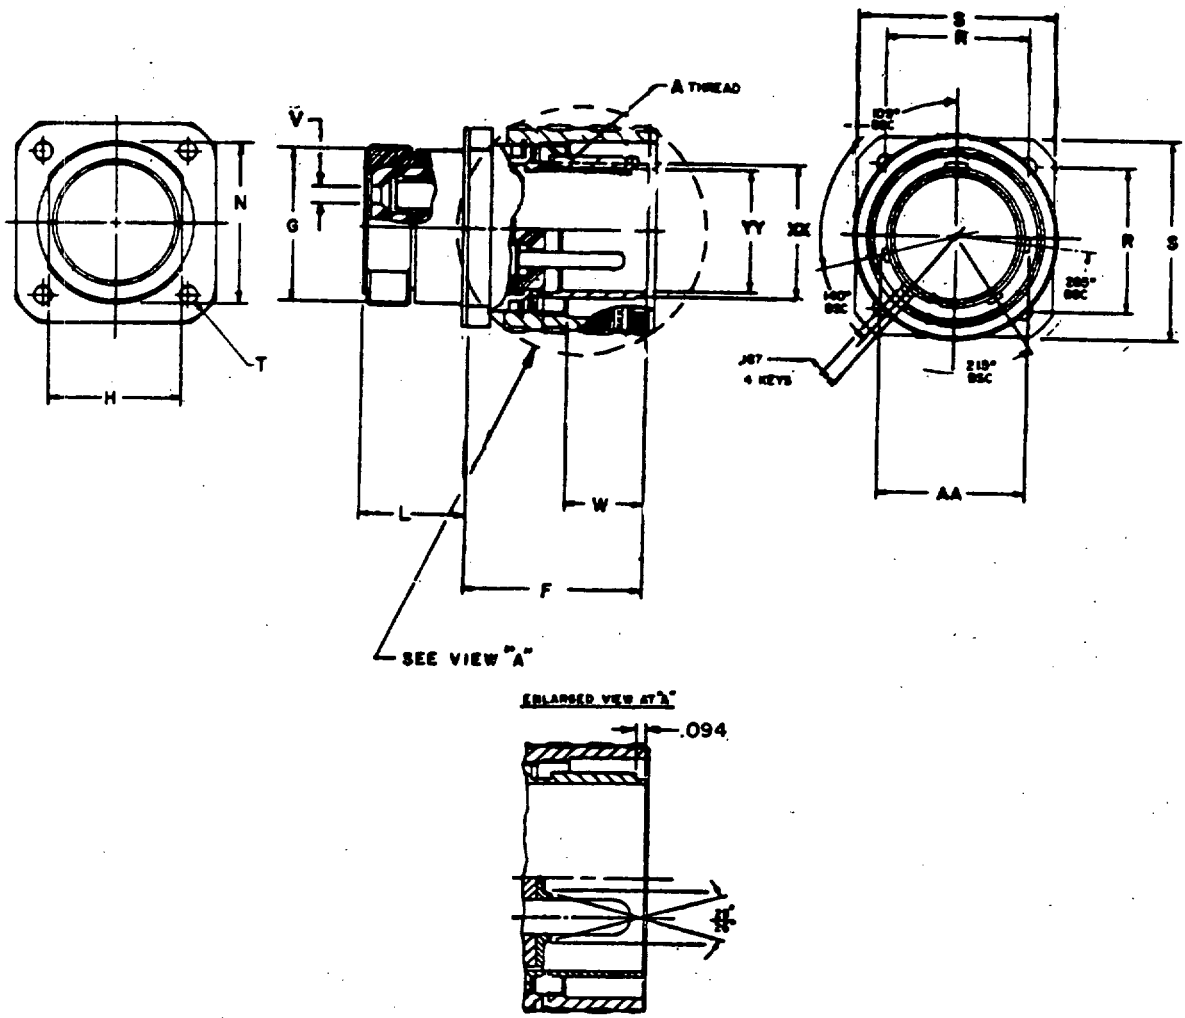


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

MIL-C-22992

CONNECTOR, RECEPTACLE, ELECTRICAL, WALL MOUNTING, CLASS L

MS90558

SIZE	A THREAD CLASS 2B	G DIA	H	L	F	N	R (BSC)	S	T	AA DIA.	XX DIA.	YY DIA.
32	2.250-.1428P-.2857L	2.188	2.062	.959	2.639	2.250	2.062	2.625	.209	1.922	1.772	1.620
44	3.000-.1428P-.2857L	3.062	2.812	1.021	2.998	3.125	2.812	3.375	.281	2.672	2.522	2.296
52	3.500-.1428P-.2857L	3.562	3.312	1.021	2.998	3.625	3.156	3.875	.281	3.141	2.975	2.801

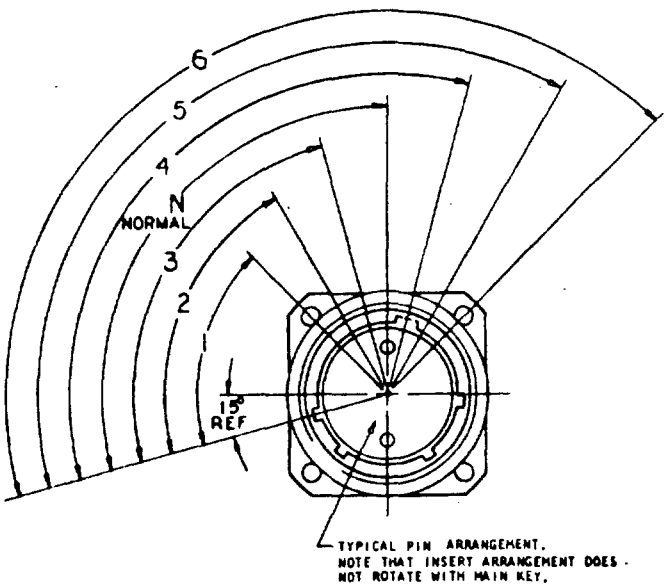

TYPICAL PIN ARRANGEMENT.
NOTE THAT INSERT ARRANGEMENT DOES NOT ROTATE WITH MAIN KEY.

NONGROUNDING ASSEMBLIES: FINISH N

SHELL SIZE	SHELL MAIN KEY POSITIONS DC 2 WIRE 28 V
32 44 52	N (105°)

GROUNDING ASSEMBLIES: FINISH C

SHELL SIZE	SHELL MAIN KEY POSITIONS 60 Hz & 400 Hz 3-PH 4 WIRE		
	120/208 V	240/416 V	277/480 V
32 44 52	4 (120°)	5 (135°)	6 (150°)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE, SINGLE TEST POINT (THREADED), LOW VOLTAGE


MIL-C-39024

SCOPE: THIS SECTION COVERS GENERAL REQUIREMENT FOR PANEL OR PRINTED WIRING TYPE TEST POINT CONNECTORS FOR USE IN ELECTRICAL AND ELECTRONIC EQUIPMENT. THE INTENDED USE ARE PRIMARILY FOR USE IN GROUND SUPPORT AND SHIPBOARD ELECTRICAL AND ELECTRONIC EQUIPMENT.

PART NUMBER: M39024/1-01

M39024	/1	-01
MILITARY DESIGNATOR AND SPECIFICATION NO.	SLASH SHEET NO.	DASH NO.

MIL-C-39024/1

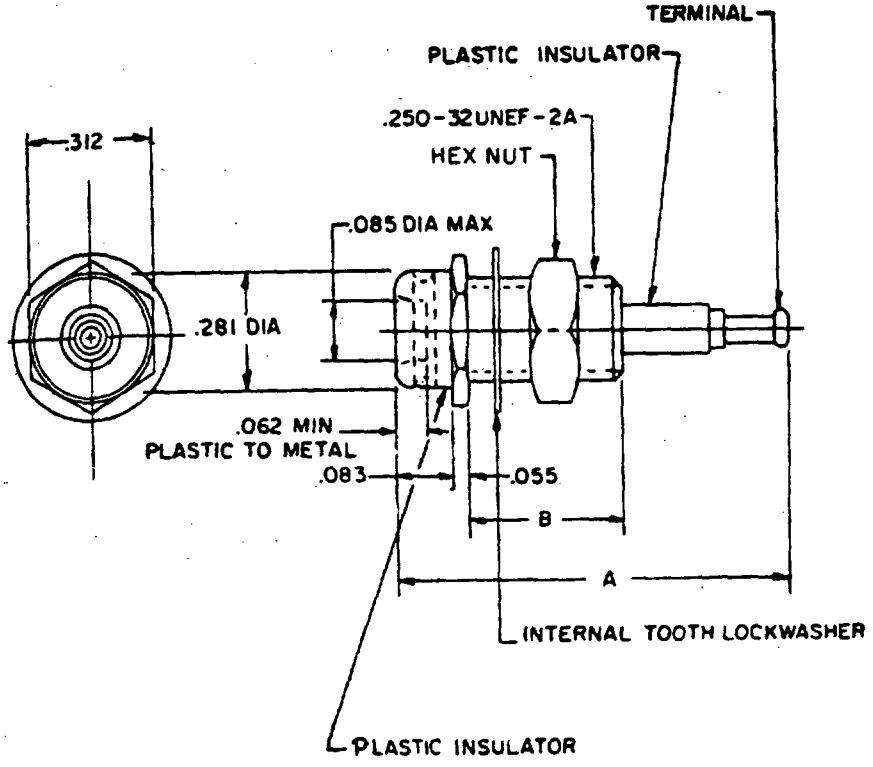

CONTACT RATING: 5 AMPERES

PART NUMBER: M39024/1-#

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE, SINGLE
TEST POINT (THREADED), LOW VOLTAGE


TABLE I. DESIGN AND IDENTIFICATION DATA.

DASH NUMBER1/	TERMINAL STYLE	DIMENSIONS (IN INCHES)						INSULATION COLOR	OPERATING VOLTAGE
		A	B	C	D	E	F		
01	TURRET	1.000 MAX	0.428	0.030	0.130	0.070	0.100	WHITE	2000 VOLTS rms 60 Hz
02								RED	
03								BLACK	
04								BROWN	
05								GREEN	
06								ORANGE	
07								BLUE	
08								YELLOW	
09								GRAY	
10								PURPLE	
11		.703 .672	.250	.020	.105	.060	.093	WHITE	1800 VOLTS rms 60 Hz
12								RED	
13								BLACK	
14								BROWN	
15								GREEN	
16								ORANGE	
17								BLUE	
18								YELLOW	
19								GRAY	
20								PURPLE	
21	EYELET	1.000 MAX	.428	---	---	---	---	WHITE	2000 VOLTS rms 60 Hz
22								RED	
23								BLACK	
24								BROWN	
25								GREEN	
26								ORANGE	
27								BLUE	
28								YELLOW	
29								GRAY	
30								PURPLE	
31		.750 .719	.250	---	---	---	---	WHITE	1800 VOLTS rms 60 Hz
32								RED	
33								BLACK	
34								BROWN	
35								GREEN	
36								ORANGE	
37								BLUE	
38								YELLOW	
39								GRAY	
40								PURPLE	

1/--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE SINGLE TEST POINT (THREADED), HIGH VOLTAGE

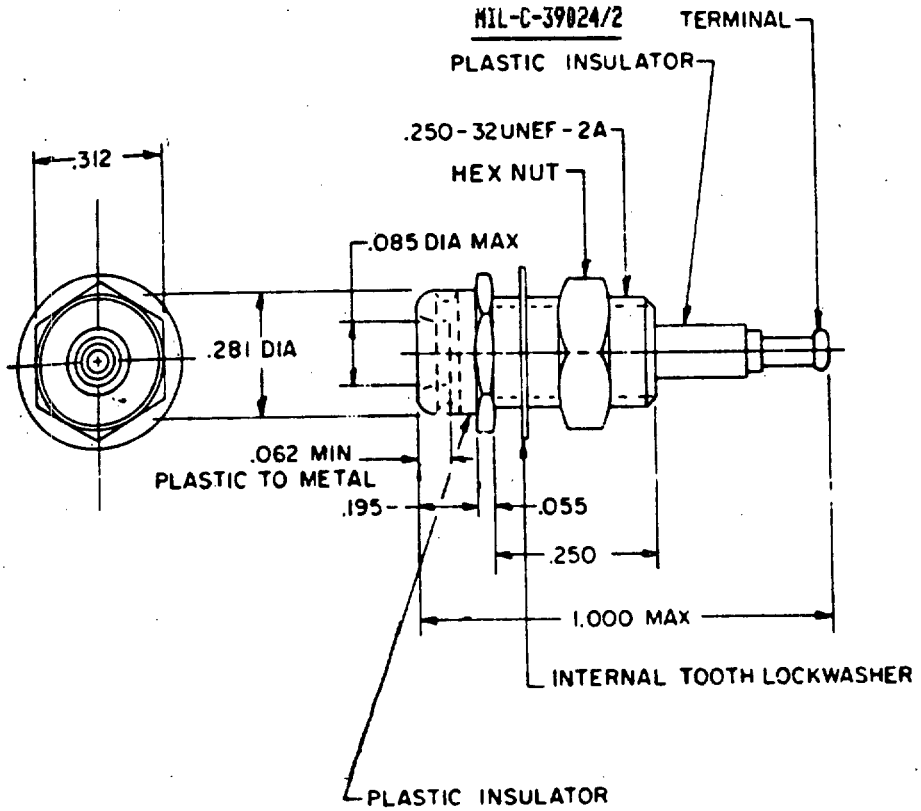

OPERATING TEMPERATURE: -65°C TO +200°C

CONTACT RATING: 5 AMPERES

PART NUMBER: M39024/2-#

TABLE I. DESIGN AND IDENTIFICATION DATA.


DASH NUMBER#	TERMINAL STYLE	INSULATION COLOR	OPERATING VOLTAGE
01	TURRET	WHITE	3700 VOLTS rms 60 Hz
02		RED	
03		BLACK	
04		BROWN	
05		GREEN	
06		ORANGE	
07		BLUE	
08		YELLOW	
09		GRAY	
10		PURPLE	

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING, SINGLE TEST POINT (RIGHT ANGLE, 2-LEG MOUNTING), LOW VOLTAGE

MIL-C-39024/3

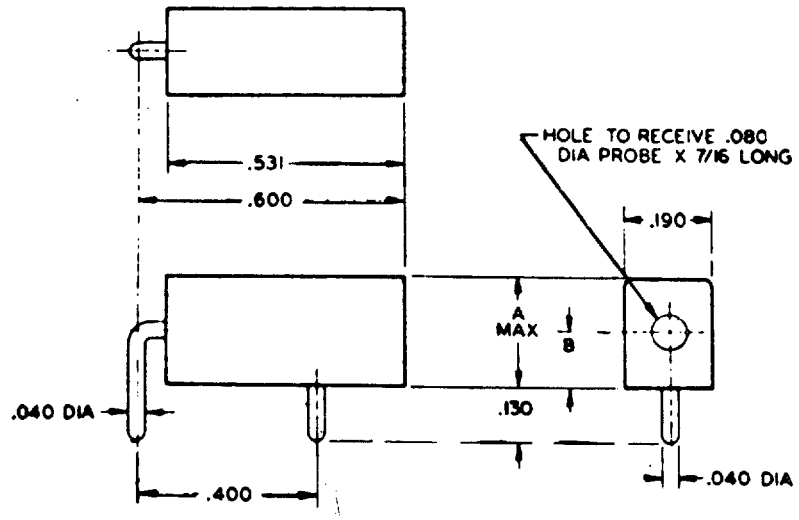

PART NUMBER: M39024/3-#

TABLE I. DIMENSIONS AND COLOR CODE.


DASH NUMBER#	DIMENSIONS		COLOR	OPERATING VOLTAGE
	A MAX	B		
01	0.230	0.130	WHITE	1800 VOLTS rms 60 Hz
02			RED	
03			BLACK	
04			BROWN	
05			GREEN	
06			ORANGE	
07			BLUE	
08			YELLOW	
09			GRAY	
10			PURPLE	
11	.467	.375	WHITE	
12			RED	
13			BLACK	
14			BROWN	
15			GREEN	
16			ORANGE	
17			BLUE	
18			YELLOW	
19			GRAY	
20			PURPLE	

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE
SINGLE TEST POINT (HOLE MOUNTING, PUSH-FIT), LOW VOLTAGE

MIL-C-39024/5

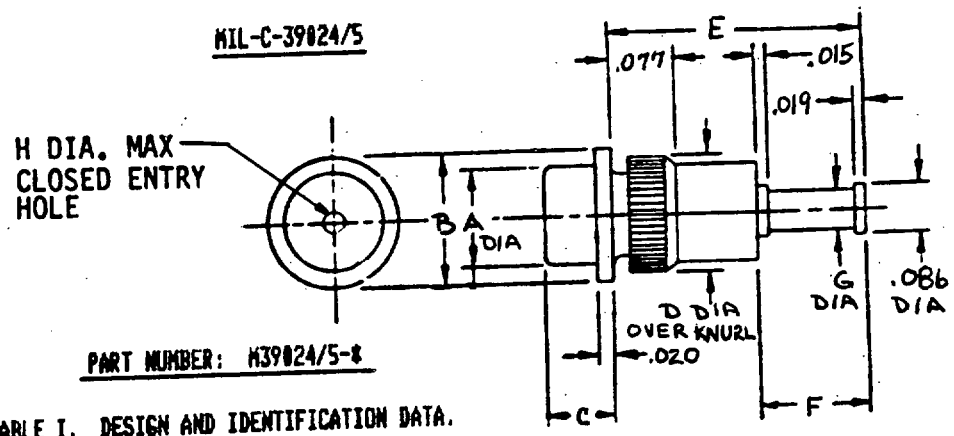

PART NUMBER: M39024/5-*

TABLE I. DESIGN AND IDENTIFICATION DATA.


DASH NUMBER*	DIMENSIONS (IN INCHES)								INSULATION COLOR	OPERATING VOLTAGE
	A	B	C	D	E	F	G	H (MAX)		
01	0.250	0.281	0.093	0.254	0.574	0.140	0.055	0.085	WHITE	2000 VOLTS rms 60 Hz
02									RED	
03									BLACK	
04									BROWN	
05									GREEN	
06									ORANGE	
07									BLUE	
08									YELLOW	
09									GRAY	
10									PURPLE	
11	0.177	0.216	0.098	0.176	0.315	0.118	0.039	0.045	WHITE	1000 VOLTS rms 60 Hz
12									RED	
13									BLACK	
14									BROWN	
15									GREEN	
16									ORANGE	
17									BLUE	
18									YELLOW	
19									GRAY	
20									PURPLE	
21	0.250	0.281	0.156	0.254	0.408	0.077	0.075	0.085	WHITE	3000 VOLTS rms 60 Hz
22									RED	
23									BLACK	
24									BROWN	
25									GREEN	
26									ORANGE	
27									BLUE	
28									YELLOW	
29									GRAY	
30									PURPLE	

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE SINGLE TEST POINT (THREADED), LOW VOLTAGE

MIL-C-39024/10

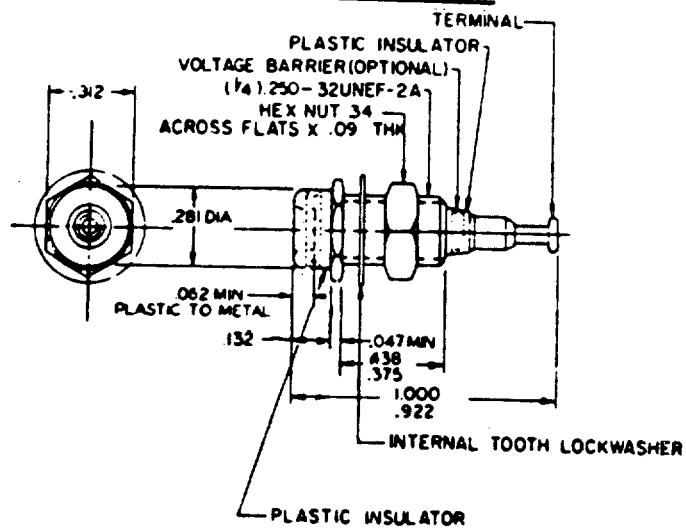

PART NUMBER: M39024/10-#

CONTACT CURRENT RATING: 5 AMPERES

TABLE I. DESIGN AND IDENTIFICATION DATA.


DASH NUMBER#	TERMINAL STYLE	INSULATION COLOR	OPERATING VOLTAGE
01	TURRET	WHITE	2000 VOLTS rms 60 Hz
02		RED	
03		BLACK	
04		BROWN	
05		GREEN	
06		ORANGE	
07		BLUE	
08		YELLOW	
09		GRAY	
10		PURPLE	
11	EYELET	WHITE	
12		RED	
13		BLACK	
14		BROWN	
15		GREEN	
16		ORANGE	
17		BLUE	
18		YELLOW	
19		GRAY	
20		PURPLE	

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE
SINGLE TEST POINT (RIGHT ANGLE, 2-LEG MOUNTING), LOW VOLTAGE, .081

MIL-C-39024/11

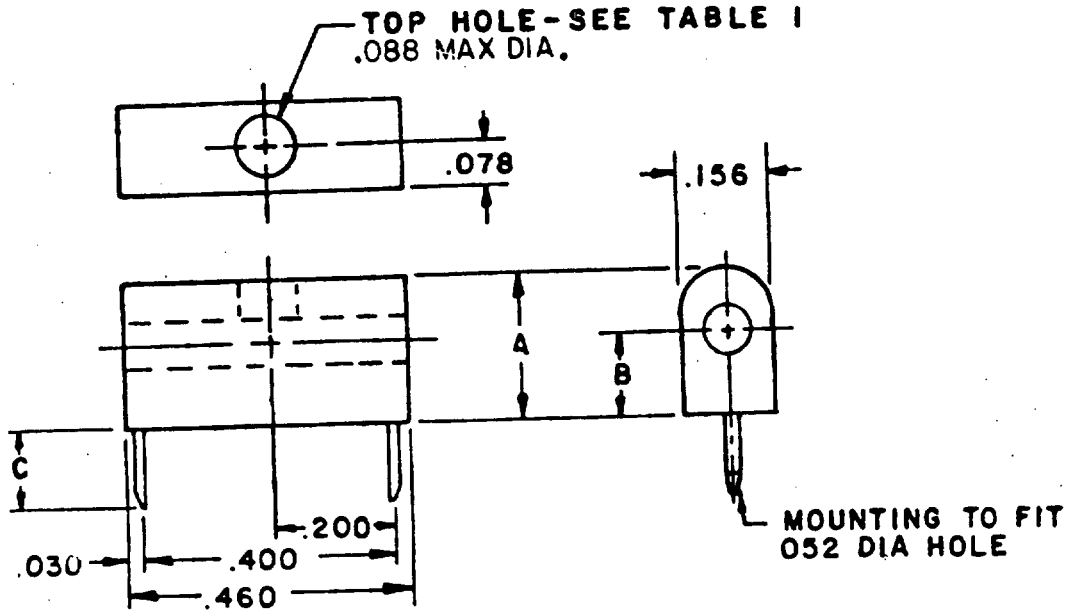

PART NUMBER: M39024/11-*

TABLE I. DESIGN AND IDENTIFICATION DATA.


DASH NUMBER*	DIMENSIONS (IN INCHES)			INSULATION COLOR	OPERATING VOLTAGE 1500 VOLTS rms
	A MAX	B	C		
01	0.220	0.130	0.130	WHITE	60 Hz
02				RED	
03				BLACK	
04				BROWN	
05				GREEN	
06				ORANGE	
07				BLUE	
08				YELLOW	
09				GRAY	
10				PURPLE	

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE
SINGLE TEST POINT (HOLE MOUNTING, PUSH-FIT), LOW VOLTAGE

MIL-C-39024/12

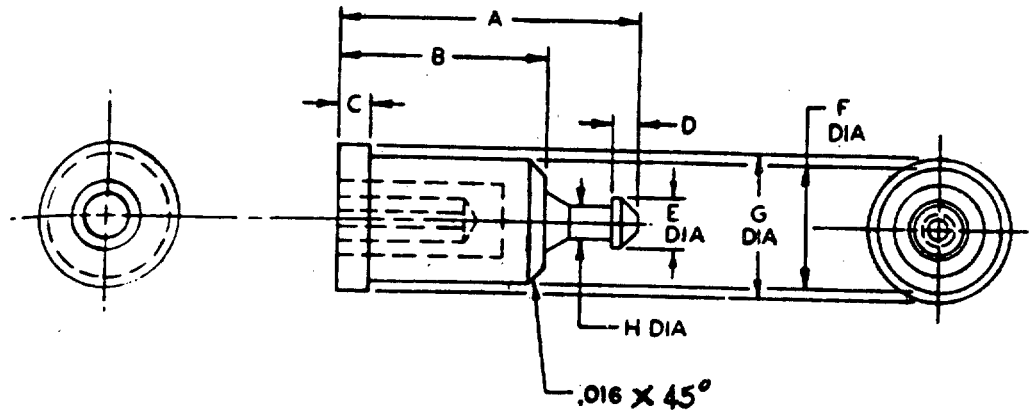

PART NUMBER: M39024/12-8 CONTACT CURRENT RATING: 5.5 AMPERES

TABLE I. DESIGN AND IDENTIFICATION DATA.


DASH NUMBER8	DIMENSIONS								INSULATION COLOR	OPERATING VOLTAGE
	A	B	C	D	E DIA	F DIA	G DIA	H DIA		
01	0.453	0.317	0.047	0.037	0.074	0.185	0.219	0.054	WHITE	800 VOLTS rms 60 Hz
02									RED	
03									BLACK	
04									BROWN	
05									GREEN	
06									ORANGE	
07									BLUE	
08									YELLOW	
09									GRAY	
10									PURPLE	
11									NATURAL	
12	0.390	0.265	0.046	0.023	0.068	0.149	0.172	0.040	WHITE	700 VOLTS rms 60 Hz
13									RED	
14									BLACK	
15									BROWN	
16									GREEN	
17									ORANGE	
18									BLUE	
19									YELLOW	
20									GRAY	
21									PURPLE	
22									NATURAL	

8--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE,
SINGLE TEST POINT (RIGHT ANGLE, 2-LEG MOUNTING), LOW VOLTAGE, .08[

MIL-C-39024/13

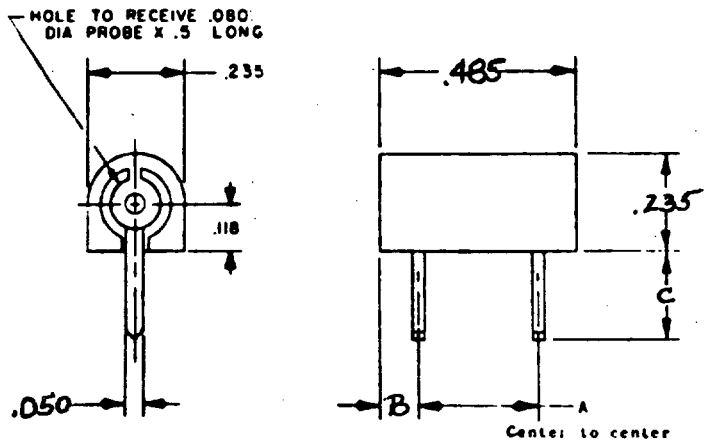

PART NUMBER: M39024/13-# CONTACT CURRENT RATING: 5 AMPERES MAX

TABLE I. DESIGN AND IDENTIFICATION DATA.


DASH NUMBER#	DIMENSIONS (IN INCHES)			INSULATION COLOR	OPERATING VOLTAGE
01	0.300	0.060	0.218	WHITE	2400 VOLTS rms
02				RED	60 Hz
03				BLACK	
04				BROWN	
05				GREEN	
06				ORANGE	
07				BLUE	
08				YELLOW	
09				GRAY	
10				PURPLE	
11				NATURAL	
12	0.400	0.025	0.175	WHITE	
13				RED	
14				BLACK	
15				BROWN	
16				GREEN	
17				ORANGE	
18				BLUE	
19				YELLOW	
20				GRAY	
21				PURPLE	
22				NATURAL	

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE,
SINGLE TEST TYPE POINT, SUBMINIATURE (PUSH-IN), LOW VOLTAGE, .080

MIL-C-39024/14

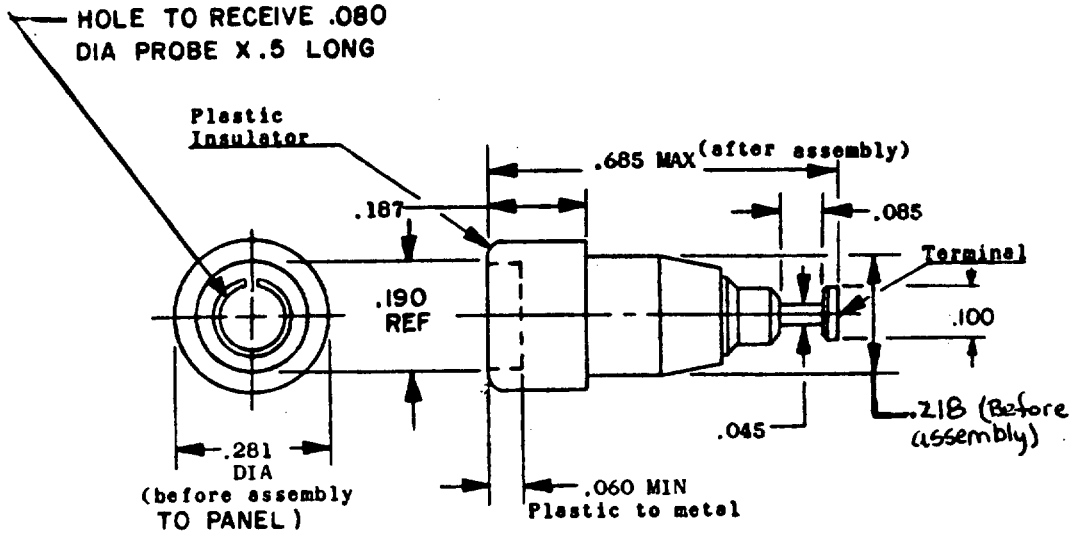

CONTACT CURRENT RATING: 5 AMPERES MAX

PART NUMBER: M39024/14-*

TABLE I. IDENTIFICATION DATA.


DASH NUMBER *	INSULATION		OPERATING VOLTAGE
	MATERIAL	COLOR	
01	L-P-410 OR MIL-M-20693	WHITE	2000 VOLTS rms 60 Hz
02		RED	
03		BLACK	
04		BROWN	
05		GREEN	
06		ORANGE	
07		BLUE	
08		YELLOW	
09		GRAY	
10		PURPLE	
11		NATURAL	

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE, SINLGE TEST POINT, LOW VOLTAGE, .080

MIL-C-39024/15

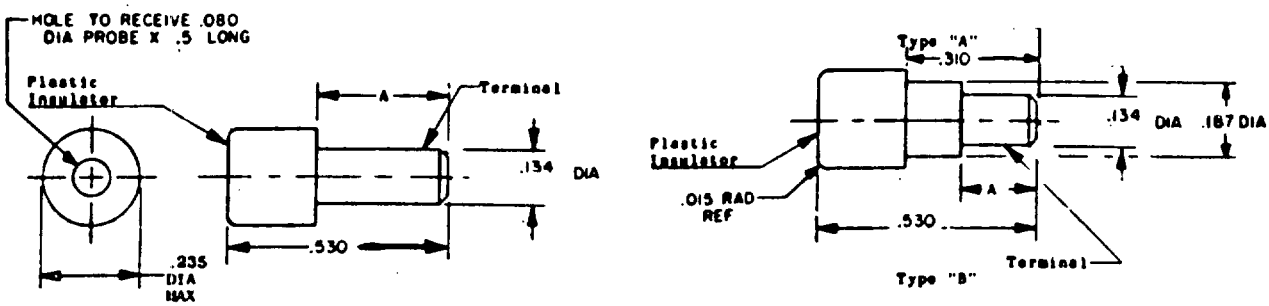

PART NUMBER: M39024/15-# CONTACT CURRENT RATING: 5 AMPERES MAX

TABLE I. DESIGN AND IDENTIFICATION DATA.


DASH NUMBER #	TERMINAL STYLE	DIMENSION A	INSULATION MATERIAL	INSULATION COLOR	OPERATING VOLTAGE
07	TYPE "A" LONG	.327 / .297	L-P-410 OR MIL-M-20693	BLUE	1200 VOLTS rms 60 Hz
08				YELLOW	
09				GRAY	
10				PURPLE	
11				NATURAL	
12	TYPE "B" MED SHORT	.180 / .160		WHITE	
13				RED	
14				BLACK	
15				BROWN	
16				GREEN	
17				ORANGE	
18				BLUE	
19				YELLOW	
20				GRAY	
21				PURPLE	
22				NATURAL	
23	TYPE "B" SHORT	.120 / .100		WHITE	
24				RED	
25				BLACK	
26				BROWN	
27				GREEN	
28				ORANGE	
29				BLUE	
30				YELLOW	
31				GRAY	
32				PURPLE	
33				NATURAL	

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE,
MICRO-MINIATURE, SINGLE TEST POINT (2-LEG MOUNTING)

MIL-C-39024/18

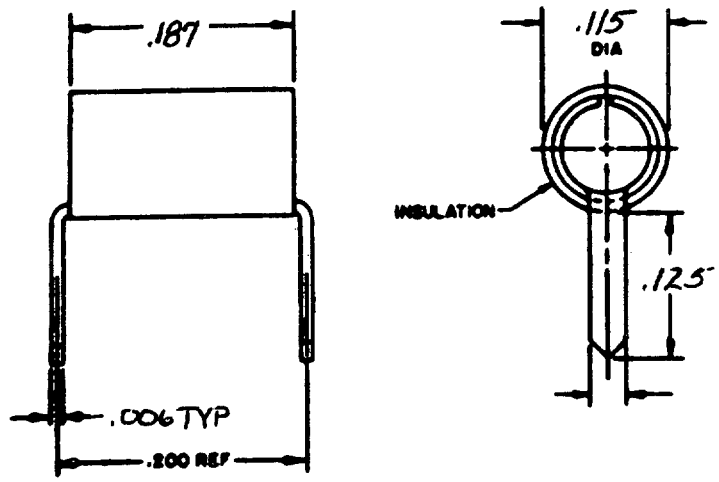

PART NUMBER: M39024/18-* OPERATING TEMPERATURE RANGE: -65°C TO +200°C

TABLE I. DASH NUMBER AND IDENTIFICATION DATA.

DASH NUMBER*	INSULATION COLOR PER MIL-STD-104	OPERATING VOLTAGE	DASH NUMBER	INSULATION COLOR PER MIL-STD-104	OPERATING VOLTAGE
01	WHITE	1000 VOLTS rms (MAX)	06	BLACK	1000 VOLTS rms (MAX)
02	YELLOW		07	GREEN	
03	BROWN		08	BLUE	
04	RED		09	GRAY	
05	ORANGE		10	PURPLE	

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:30Z
Check the source to verify that this is the current version before use.