MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS
CONNECTORS AND SOCKETS

TO ALL HOLDERS OF MIL-STD-242G(NAVY), PART 8:

1. THE FOLLOWING PAGES OF MIL-STD-242G(NAVY), PART 8 HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGES	DATE	SUPERSEDED PAGES	DATE
V	28 October 1985	V	16 August 1982
104.1	28 October 1985	104.1	16 August 1982
104.2	28 October 1985	104.2	16 August 1982
104.3	28 October 1985	104.3	16 August 1982
104.4	28 October 1985	104.4	16 August 1982
104.15	28 October 1985	104.15	16 August 1982
104.16	28 October 1985	104.16	16 August 1982
104.19	28 October 1985	104.19	16 August 1982
104.20	28 October 1985	104.20	16 August 1982
104.25	28 October 1985	104.25	16 August 1982
104.26	28 October 1985	NONE	----
108.1	28 October 1985	108.1	16 August 1982
108.2	28 October 1985	108.2	16 August 1982
108.3	28 October 1985	108.3	16 August 1982
108.4	28 October 1985	108.4	16 August 1982
108.5	28 October 1985	108.5	16 August 1982
108.6	28 October 1985	108.6	16 August 1982
108.15	28 October 1985	108.15	16 August 1982
108.16	28 October 1985	108.16	16 August 1982
108.17	28 October 1985	108.17	16 August 1982
108.18	28 October 1985	108.18	16 August 1982
108.19	28 October 1985	108.19	16 August 1982
110.3	28 October 1985	110.3	16 August 1982
110.4	28 October 1985	110.4	16 August 1982
110.21	28 October 1985	110.21	16 August 1982
110.22	28 October 1985	110.22	16 August 1982
112.1	28 October 1985	112.1	16 August 1982
112.2	28 October 1985	112.2	16 August 1982
134.7	28 October 1985	134.7	16 August 1982
134.8	28 October 1985	134.8	16 August 1982
134.9	28 October 1985	134.9	16 August 1982
134.10	28 October 1985	134.10	16 August 1982
134.11	28 October 1985	134.11	16 August 1982
134.12	28 October 1985	134.12	16 August 1982
134.13	28 October 1985	134.13	16 August 1982
134.14	28 October 1985	134.14	16 August 1982
138.1	28 October 1985	138.1	16 August 1982
138.2	28 October 1985	138.2	16 August 1982
138.3	28 October 1985	138.3	16 August 1982
138.4	28 October 1985	138.4	16 August 1982
138.17	28 October 1985	138.17	16 August 1982

FSC 59GP

DISTRIBUTION STATEMENT A. Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

NEW PAGES	DATE	SUPERSEDED PAGES	DATE
138.18	28 October 1985	138.18	16 August 1982
138.19	28 October 1985	138.19	16 August 1982
138.20	28 October 1985	138.20	16 August 1982
138.21	28 October 1985	138.21	16 August 1982
138.22	28 October 1985	138.22	16 August 1982
138.23	28 October 1985	138.23	16 August 1982
138.24	28 October 1985	138.24	16 August 1982
138.29	28 October 1985	138.29	16 August 1982
138.30 THRU 138.47	28 October 1985	NONE	----
146.1 THRU 146.17	28 October 1985	146.1 THRU 146.17	16 August 1982
164.1	28 October 1985	164.1	16 August 1982
164.2	(REPRINTED WITHOUT CHANGE)		16 August 1982
164.7	28 October 1985	NONE	----
164.8	28 October 1985	NONE	----
174.1	28 October 1985	174.1	16 August 1982
174.2	28 October 1985	174.2	16 August 1982
174.13	28 October 1985	174.13	16 August 1982
174.14	28 October 1985	174.14	16 August 1982
174.21	28 October 1985	174.21	16 August 1982
174.22	28 October 1985	174.22	16 August 1982
174.25	28 October 1985	174.25	16 August 1982
174.26	28 October 1985	174.26	16 August 1982
174.27	28 October 1985	174.27	16 August 1982
174.28	28 October 1985	174.28	16 August 1982
174.35	28 October 1985	174.35	16 August 1982
174.36	28 October 1985	174.36	16 August 1982
174.37	28 October 1985	174.37	16 August 1982
174.38	28 October 1985	174.38	16 August 1982
174.43	28 October 1985	174.43	16 August 1982
174.44	28 October 1985	174.44	16 August 1982
174.45	28 October 1985	174.45	16 August 1982
174.46	28 October 1985	174.46	16 August 1982
174.53	28 October 1985	174.53	16 August 1982
174.54	28 October 1985	174.54	16 August 1982
174.55	28 October 1985	174.55	16 August 1982
174.56	28 October 1985	174.56	16 August 1982
174.59	28 October 1985	174.59	16 August 1982
174.60	28 October 1985	174.60	16 August 1982
174.61	28 October 1985	174.61	16 August 1982
174.62	28 October 1985	174.62	16 August 1982
174.63	28 October 1985	174.63	16 August 1982
174.64	28 October 1985	174.64	16 August 1982
174.65	28 October 1985	174.65	16 August 1982
174.66	28 October 1985	174.66	16 August 1982
174.69	28 October 1985	174.69	16 August 1982
174.70	28 October 1985	174.70	16 August 1982

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

NEW PAGES	DATE	SUPERSEDED PAGES	DATE
176.39	28 October 1985	176.39	16 August 1982
176.40	28 October 1985	176.40	16 August 1982
176.41	28 October 1985	176.41	16 August 1982
176.42	28 October 1985	176.42	16 August 1982
176.51	(REPRINTED WITHOUT CHANGE)		16 August 1982
176.52	28 October 1985	176.52	16 August 1982
176.53	28 October 1985	176.53	16 August 1982
176.54	(REPRINTED WITHOUT CHANGE)		16 August 1982
176.65	28 October 1985	176.65	16 August 1982
176.66	28 October 1985	176.66	16 August 1982
176.71	28 October 1985	176.71	16 August 1982
176.72	28 October 1985	176.72	16 August 1982
182.1	28 October 1985	182.1	16 August 1982
182.2	(REPRINTED WITHOUT CHANGE)		16 August 1982
182.3	28 October 1985	182.3	16 August 1982
182.4	(REPRINTED WITHOUT CHANGE)		16 August 1982
182.7	28 October 1985	182.7	16 August 1982
182.9	28 October 1985	182.9	16 August 1982
182.10	28 October 1985	182.10	16 August 1982
182.11	28 October 1985	182.11	16 August 1982
182.12	28 October 1985	182.12	16 August 1982
182.33	28 October 1985	182.33	16 August 1982
182.34	28 October 1985	182.34	16 August 1982
182.45	28 October 1985	182.45	16 August 1982
182.46	28 October 1985	182.46	16 August 1982
182.47	28 October 1985	182.47	16 August 1982
182.48	28 October 1985	182.48	16 August 1982
210.4	28 October 1985	210.4	16 August 1982
210.5	28 October 1985	210.5	16 August 1982
210.6	28 October 1985	210.6	16 August 1982
210.7	28 October 1985	210.7	16 August 1982
210.8	28 October 1985	210.8	16 August 1982

2. THE FOLLOWING PAGES OF MIL-STD-242G(NAVY), PART 8 SHOULD BE DELETED WITH NO SUPERSEDING PAGES.

PAGE	DATE
112.10 THRU 112.13	16 August 1982
146.18 THRU 146.26	16 August 1982
174.52	16 August 1982
182.82	16 August 1982
182.38 THRU 182.42	16 August 1982
210.1 THRU 210.3	16 August 1982

3. RETAIN THIS NOTICE AND INSERT BEFORE TABLE OF CONTENTS.

4. HOLDERS OF MIL-STD-242G(NAVY), PART 8, WILL VERIFY THAT PAGE CHANGES AND ADDITIONS INDICATED ABOVE HAVE BEEN ENTERED. THIS NOTICE PAGE WILL BE RETAINED AS A CHECK SHEET. THIS ISSUANCE, TOGETHER WITH APPENDED PAGES, IS A SEPARATE PUBLICATION. EACH NOTICE IS TO BE RETAINED BY STOCKING POINTS UNTIL THE MILITARY STANDARD IS COMPLETELY REVISED OR CANCELLED.

Review activities:
Navy - AS, OS, SH

User activity:
Navy - MC

Preparing activity:
Navy - EC

(Project Number 59GP-N056)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS

TABLE OF CONTENTS

SUBJECT/SECTION		PAGE NUMBER
100 RECTANGULAR RACK AND PANEL		
104	MIL-C-24308	104.1 THROUGH 104.26
108	MIL-C-28731	108.1 THROUGH 108.19
110	MIL-C-28748	110.1 THROUGH 110.37
112	MIL-C-28804	112.1 THROUGH 112.9
130 CIRCULAR, THREADED AND BAYONET		
134	MIL-C-5015 (MIL-C-85049/11)	134.1 THROUGH 134.56
138	MIL-C-28840	138.1 THROUGH 138.47
146	MIL-C-38999	146.1 THROUGH 146.17
146	MIL-C-38999 (MIL-STD-1560)	146.27 THROUGH 146.32
160 POWER, PLUG AND RECEPTACLE		
164	W-C-596	164.1 THROUGH 164.8
170 PRINTED CIRCUIT		
174	MIL-C-28754	174.1 THROUGH 174.70
176	MIL-C-55302	176.1 THROUGH 176.74
176	MIL-C-21097	176.75 THROUGH 176.77
180 RADIO FREQUENCY		
182	MIL-C-39012	182.1 THROUGH 182.49
190 PLUG AND RECEPTACLE, HIGH DENSITY		
192	MIL-C-22992	192.1 THROUGH 192.49
210 TEST POINT		
210	MIL-C-39024	210.4 THROUGH 210.12

Supersedes Page V of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, NONENVIRONMENTAL, MINATURE,
POLARIZED SHELL, RACK AND PANEL

MIL-C-24308

SCOPE: THIS SECTION COVERS POLARIZED SHELL MINIATURE RACK AND PANEL CONNECTORS, WITH REMOVABLE CRIMP AND NON-REMOVABLE SOLDER-TYPE CONTACTS. THESE ARE INTENDED FOR GENERAL USE. CLASSES G AND N CONNECTORS ARE FOR USE IN NONENVIRONMENT-RESISTING APPLICATIONS WHERE THE OPERATING TEMPERATURE RANGE OF -55°C TO +125°C AND CLASS N SHOULD BE USED IN APPLICATIONS WHEREIN PRESENCE OF RESIDUAL MAGNETISM MUST BE HELD TO VERY LOW LEVELS TO AVOID INTERFERENCE WITH NEARBY SENSITIVE INSTRUMENTATION. CLASS H HERMETIC RECEPTACLES ARE INTENDED FOR USE WHERE AIR LEAKAGE REQUIREMENTS ARE CRITICAL.

CONNECTORS, ELECTRIC, RECTANGULAR, MINATURE, POLARIZED SHELL, RACK AND PANEL,
RECEPTACLE, SOCKET CONTACTS, GENERAL PURPOSE, CLASS G, SOLDER TYPE

MIL-C-24308/1

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/1-	SHELL SIZE	MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18269-1	MS18273-1	9	20	MS18281-1
2	2	MS18269-2	MS18274-1	15		
3	3	MS18269-3	MS18275-1	25		
4	4	MS18269-4	MS18276-1	37		
5	5	MS18269-5	MS18277-1	50		
23	1	MS18269-13	MS18273-1	9		
24	2	MS18269-14	MS18274-1	15		
25	3	MS18269-15	MS18275-1	25		
26	4	MS18269-16	MS18276-1	37		
27	5	MS18269-17	MS18277-1	50		

NOTE--MATE WITH CONNECTORS SPECIFIED IN MIL-C-24308/3,
/4, /7, /8, /9 AND /24.

Supersedes Page 104.1 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED
SHELL, RACK AND PANEL, RECEPTACLE, SOCKET CONTACT, GENERAL
PURPOSE, CLASS G, CRIMP TYPE

MIL-C-24308/2

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/2-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18270-1	MS18273-1	9	20	M39029/63
2	2	MS18270-2	MS18274-1	15		
3	3	MS18270-3	MS18275-1	25		
4	4	MS18270-4	MS18276-1	37		
5	5	MS18270-5	MS18277-1	50		
11	1	MS18270-1	MS18273-2	15	22	M39029/57
12	2	MS18270-2	MS18274-2	26		
13	3	MS18270-3	MS18275-2	44		
14	4	MS18270-4	MS18276-2	62		
15	5	MS18270-5	MS18277-2	78		
16	6	MS18270-6	MS14004-1	104		
342	1	MS18270-19	MS18273-1	9	20	M39029/63
343	2	MS18270-20	MS18274-1	15		
344	3	MS18270-21	MS18275-1	25		
345	4	MS18270-22	MS18276-1	37		
346	5	MS18270-23	MS18277-1	50		

NOTE---MATE WITH CONNECTORS SPECIFIED IN MIL-C-24308/3, /4, /7, /8, /9, AND /24.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINATURE,
POLARIZED SHELL, RACK AND PANEL,
PIN CONTACTS, GENERAL PURPOSE, CLASS G, SOLDER TYPE

MIL-C-24308/3

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/3-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18268-1	MS18273-1	9	20	MS18281-2
2	2	MS18268-2	MS18274-1	15		
3	3	MS18268-3	MS18275-1	25		
4	4	MS18268-4	MS18276-1	37		
5	5	MS18268-5	MS18277-1	50		
12	1	MS18268-7	MS18273-1	9		
13	2	MS18268-8	MS18274-1	15		
14	3	MS18268-9	MS18275-1	25		
15	4	MS18268-10	MS18276-1	37		
16	5	MS18268-11	MS18277-1	50		

Supersedes Page 104.3 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED
SHELL, RACK AND PANEL, PIN CONTACTS, GENERAL PURPOSE,
CLASS G, CRIMP TYPE

MIL-C-24308/4

TABLE I. DESIGN STANDARDS.

PART NUMBER M24308/4-	SHELL SIZE	SHELL MS NUMBER	INSERT ARRANGEMENT MS NUMBER	CONTACT		
				NO. OF	SIZE OF	PART NUMBER
1	1	MS18271-1	MS18273-1	9	20	M39029/64
2	2	MS18271-2	MS18274-1	15		
3	3	MS18271-3	MS18275-1	25		
4	4	MS18271-4	MS18276-1	37		
5	5	MS18271-5	MS18277-1	50		
11	1	MS18271-1	MS18273-2	15	22	M39029/58
12	2	MS18271-2	MS18274-2	26		
14	4	MS18271-4	MS18276-2	62		
15	5	MS18271-5	MS18277-2	78		
16	6	MS18271-6	MS14004-1	104		
302	1	MS18271-7	MS18273-1	9	20	M39029/64
303	2	MS18271-8	MS18274-1	15		
304	3	MS18271-9	MS18275-1	25		
305	4	MS18271-10	MS18276-1	37		
306	5	MS18271-11	MS18277-1	50		
307	1	MS18271-7	MS18273-2	15	22	M39029/58
308	2	MS18271-8	MS18274-2	26		
309	3	MS18271-9	MS18275-2	44		
310	4	MS18271-10	MS18276-2	62		
311	5	MS18271-11	MS18277-2	78		
312	6	MS18271-12	MS14004-1	104		

Supersedes Page 104.4 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MS18270

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, RECEPTACLE SOCKET CONTACTS, CRIMP TYPE

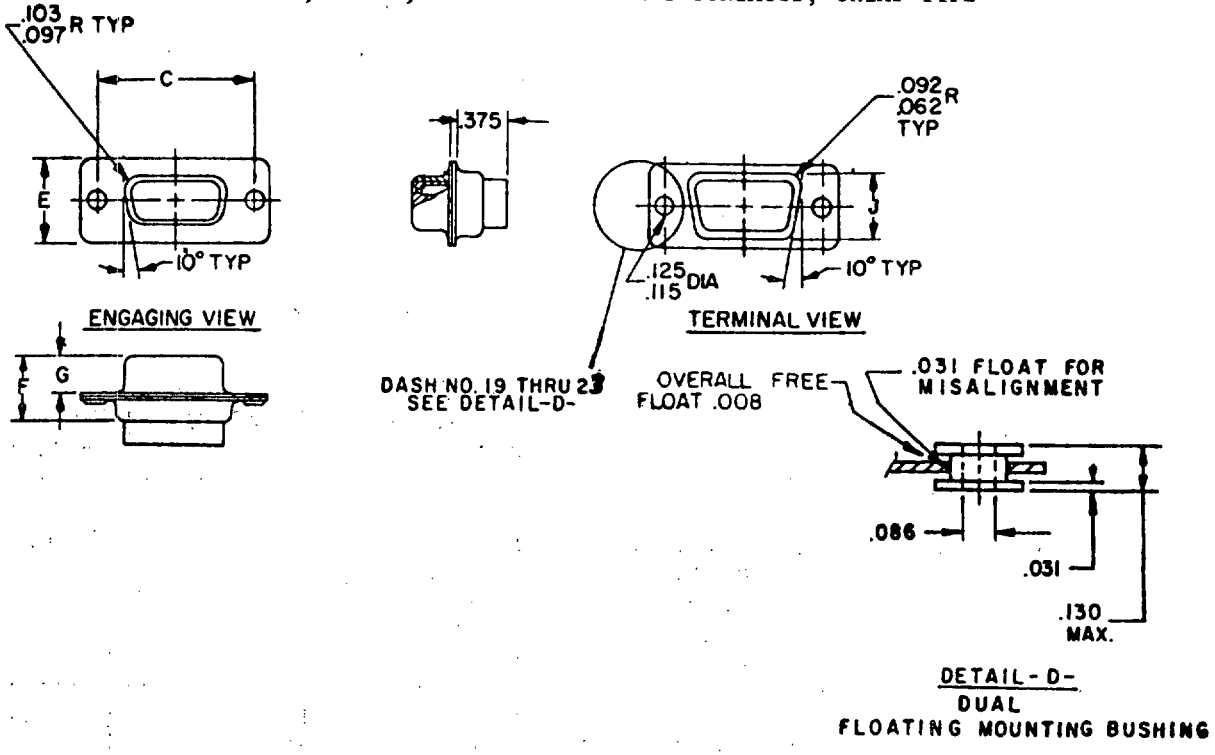


TABLE I. DIMENSIONS AND SHELL SIZE.

MS NUMBER	SHELL SIZE	DIMENSIONS				
		C	E	F	G	J
MS18270-1	1	.989 .979	.509 .479	.439 .419	.248 .238	.432 .412
MS18270-2	2	1.317 1.307				
MS18270-3	3	1.857 1.847				
MS18270-4	4	2.505 2.495				
MS18270-5	5	2.411 2.401	.620 .590			.544 .524
MS18270-6	6	2.505 2.495	.683 .653			.606 .586
MS18270-19	1	SAME AS MS18270-1 EXCEPT IN ACCORDANCE WITH DETAIL D				
MS18270-20	2	MS18270-2				
MS18270-21	3	MS18270-3				
MS18270-22	4	MS18270-4				
MS18270-23	5	MS18270-5				

Supersedes Page 104.15 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MS18271

CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, CRIMP TYPE

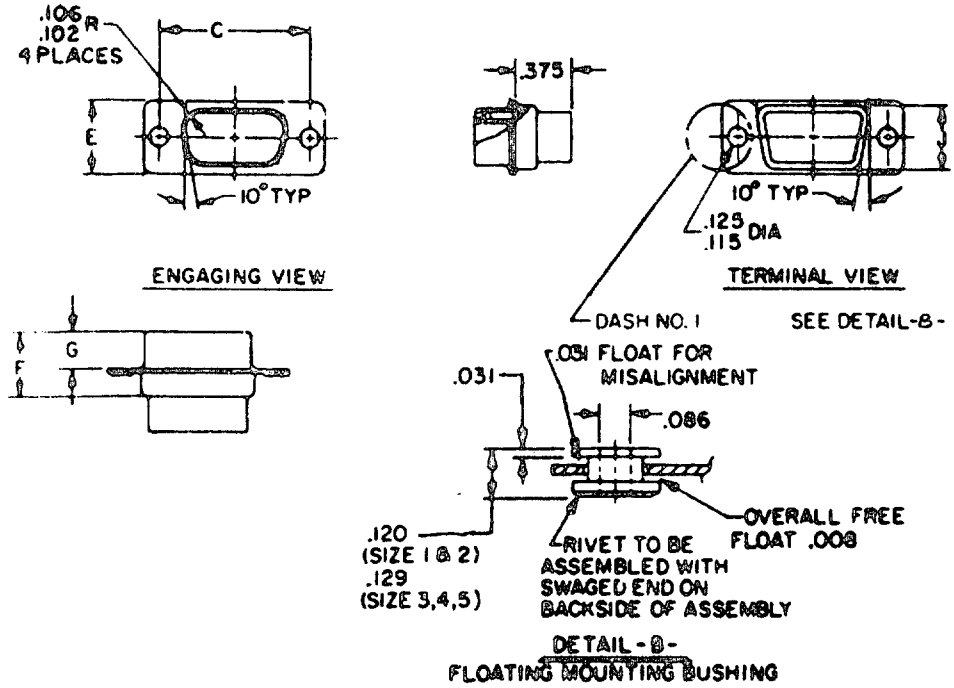


TABLE I. DIMENSIONS AND SHELL SIZE.


MS NUMBER	SHELL SIZE	DIMENSIONS				
		C	E	F	G	J
MS18271-1	1	.989 .979	.509 .479	.432 .412	.241 .229	.432 .412
MS18271-2	2	1.317 1.307				
MS18271-3	3	1.857 1.847		.436 .416	.236 .224	
MS18271-4	4	2.505 2.495				
MS18271-5	5	2.411 2.401	.620 .590			.544 .524
MS18271-6	6	2.505 2.495	.683 .653			.606 .586
MS18271-7 MS18271-8 MS18271-9 MS18271-10 MS18271-11 MS18271-12	1 2 3 4 5 6	SAME AS MS18271-1 EXCEPT PER DETAIL B MS18271-2 MS18271-3 MS18271-4 MS18271-5 MS18271-6				

Supersedes Page 104.16 of 16 August 1982.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MS18275

INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SHELL SIZE 3



ARRANGEMENT 1

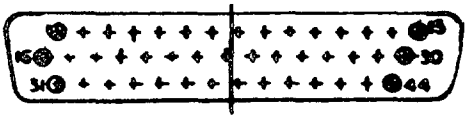


ARRANGEMENT 2


MS NUMBER	ARRANGEMENT NUMBER	CONTACTS			
		NO. 22D	NO. 20	NO. 16 SHIELDED	NO. 8 SHIELDED
MS18275-1	1	0	25	0	0
MS18275-2	2	44	0	0	0

MS18276

INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR SHELL SIZE 4



ARRANGEMENT 1

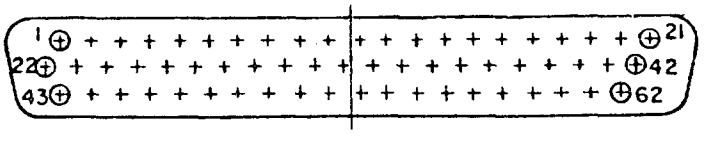

ARRANGEMENT 2


MS NUMBER	ARRANGEMENT NUMBER	CONTACTS			
		NO. 22D	NO. 20	NO. 16 SHIELDED	NO. 8 SHIELDED
MS18276-1	1	0	37	0	0
MS18276-2	2	62	0	0	0

Supersedes Page 104.19 of 16 August 1982.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MS18277

INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SHELL SIZE 5

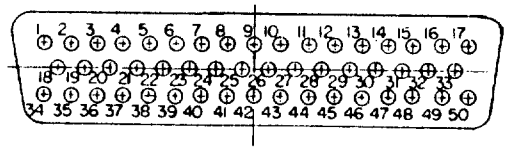

ARRANGEMENT 1

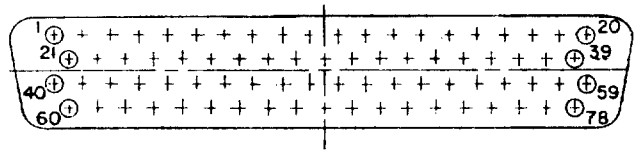

ARRANGEMENT 2


MS NUMBER	ARRANGEMENT NUMBER	CONTACTS			
		NO. 22D	NO. 20	NO. 16 SHIELD	NO. 8 SHIELDED
MS18277-1	1	0	50	0	0
MS18277-2	2	78	0	0	0

Supersedes Page 104.20 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MS14004

INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR
SHELL SIZE 6

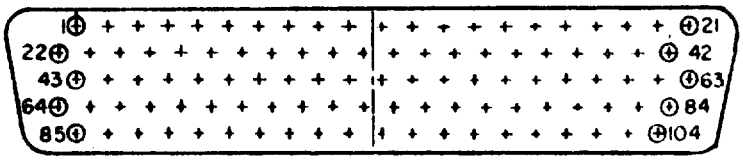

ARRANGEMENT 1

TABLE I. CONTACTS AND ARRANGEMENT NUMBER.

MS NUMBER	ARRANGEMENT NUMBER	CONTACTS			
		NO. 22D	NO. 20	NO. 16 SHIELDED	NO. 8 SHIELDED
MS14004-1	1	104	0	0	0

Supersedes Page 104.25 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MS18281

CONTACTS, PIN AND SOCKET, CLASSES G, N, AND H, SOLDER TYPE, NON-REMOVABLE

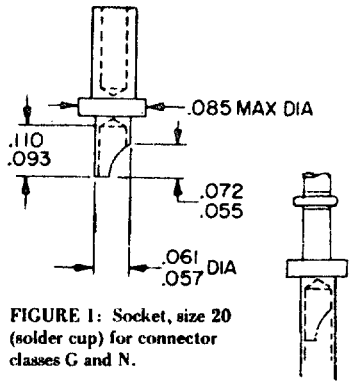


FIGURE 1: Socket, size 20 (solder cup) for connector classes G and N.




FIGURE 2: Pin, size 20 (solder cup) for connector classes G and N.




FIGURE 3: Pin, size 20, eyelet for connector class H

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CONNECTOR, ELECTRICAL, RECTANGULAR, REMOVABLE CONTACT, FORMED BLADE FORK TYPE

MIL-C-28731

SCOPE: THE CONNECTORS COVERED IN THIS SECTION ARE INTENDED FOR, BUT ARE NOT LIMITED TO USE IN AIRBORNE, GROUND SUPPORT, AND SHIPBOARD ELECTRICAL AND ELECTRONIC EQUIPMENT. THIS SECTION COVERS RECTANGULAR, ELECTRICAL CONNECTORS WITH REMOVABLE FORMED BLADE, FORK TYPE CONTACTS. THE MATING AND UNMATING FORCES (TORQUE) IN INCH-OUNCES, MAXIMUM ARE: 35 FOR MIL-C-28731/9 AND /10; 70 FOR /11 AND /12; 100 FOR /13 AND /14; 185 FOR /15 AND /16; AND 225 FOR /17 AND /18.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 20 REMOVABLE CONTACTS

MIL-C-28731/9

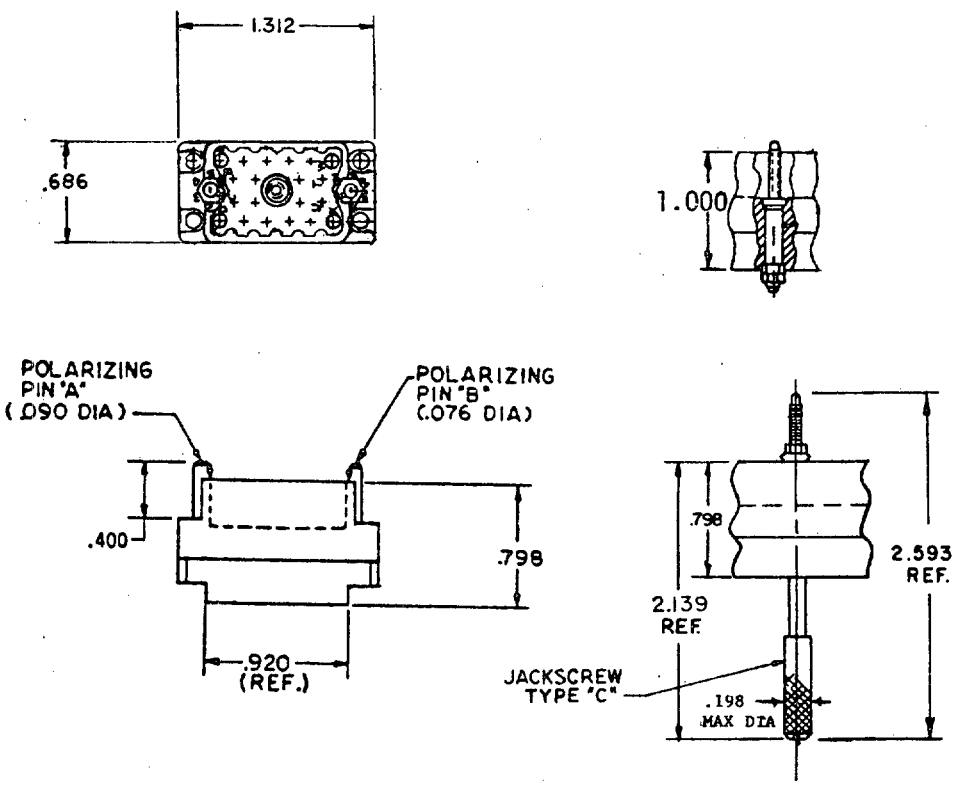


Supersedes Page 108.1 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 20 REMOVABLE CONTACTS

MIL-C-28731/9

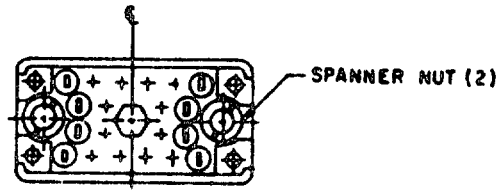

PART NUMBER: M28731/9-* 20 CONTACTS

TABLE I. PART NUMBER INFORMATION

DASH NUMBER*	ACTUATING HARDWARE	CONTACT TYPE
0109	JACKSCREW TYPE C	CRIMP MIL-C-28731/20
0110	FIXED SOCKET TYPE F	
0111	FIXED SCREW TYPE E	
0112	JACKSCREW TYPE C	SOLDER HOLE MIL-C-28731/25
0113	FIXED SOCKET TYPE F	
0114	FIXED SCREW TYPE E	
0115	FIXED SOCKET TYPE F	WRAPPOST MIL-C-28731/26
0116	FIXED SCREW TYPE E	


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/9-0109 AND -0112 MATE WITH M28731/10-0110, -0113 AND -0115.
M28731/9-0110, -0113 AND -0115 MATE WITH M28731/10-0109 AND -0112.
M28731/9-0111, -0114, AND -0116 MATE WITH M28731/10-0111 AND -0114.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 20 REMOVABLE CONTACTS

MIL-C-28731/10

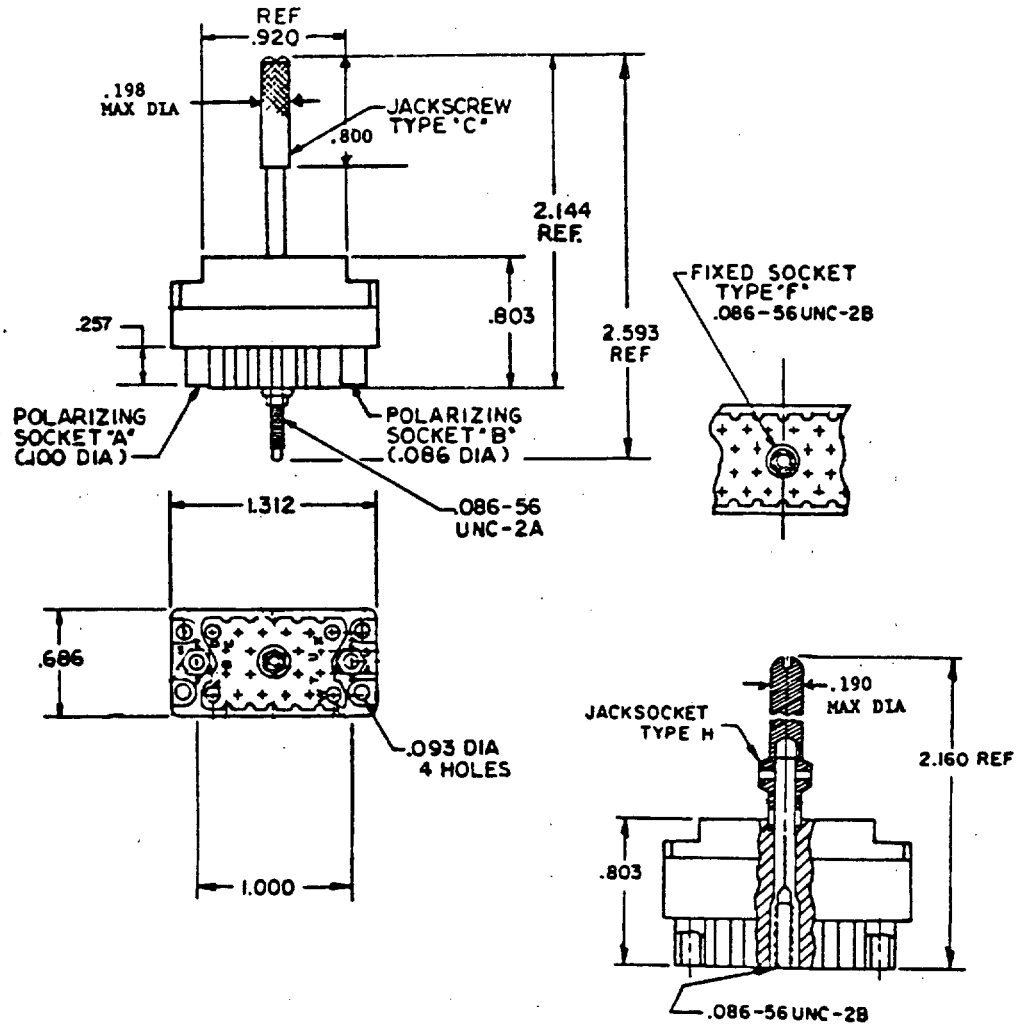


Supersedes Page 108.3 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 20 REMOVABLE CONTACTS

MIL-C-28731/10

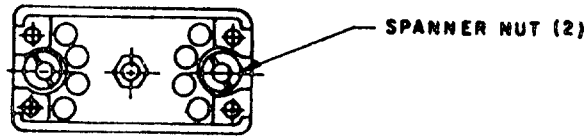

PART NUMBER M28731/10-* 20 CONTACTS

TABLE I. PART NUMBER INFORMATION.

DASH NUMBER*	ACTUATING HARDWARE	CONTACT TYPE
0109	JACKSCREW TYPE C	CRIMP MIL-C-28731/20
0110	FIXED SOCKET TYPE F	
0111	JACK SOCKET TYPE H	
0112	JACKSCREW TYPE C	SOLDER HOLE MIL-C-28731/25
0113	FIXED SOCKET TYPE F	
0114	JACK SOCKET TYPE H	
0115	FIXED SOCKET TYPE F	WRAPPOST MIL-C-28731/26


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/10-0109 AND -0112 MATE WITH M28731/9-0110, -0113 AND -0115.
M28731/10-0110, -0113 AND -0115 MATE WITH M28731/9-0109 AND -0112.
M28731/10-0111 AND -0114 MATE WITH M28731/9-0111, -0114 AND -0116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 38 REMOVABLE CONTACTS

MIL-C-28731/11

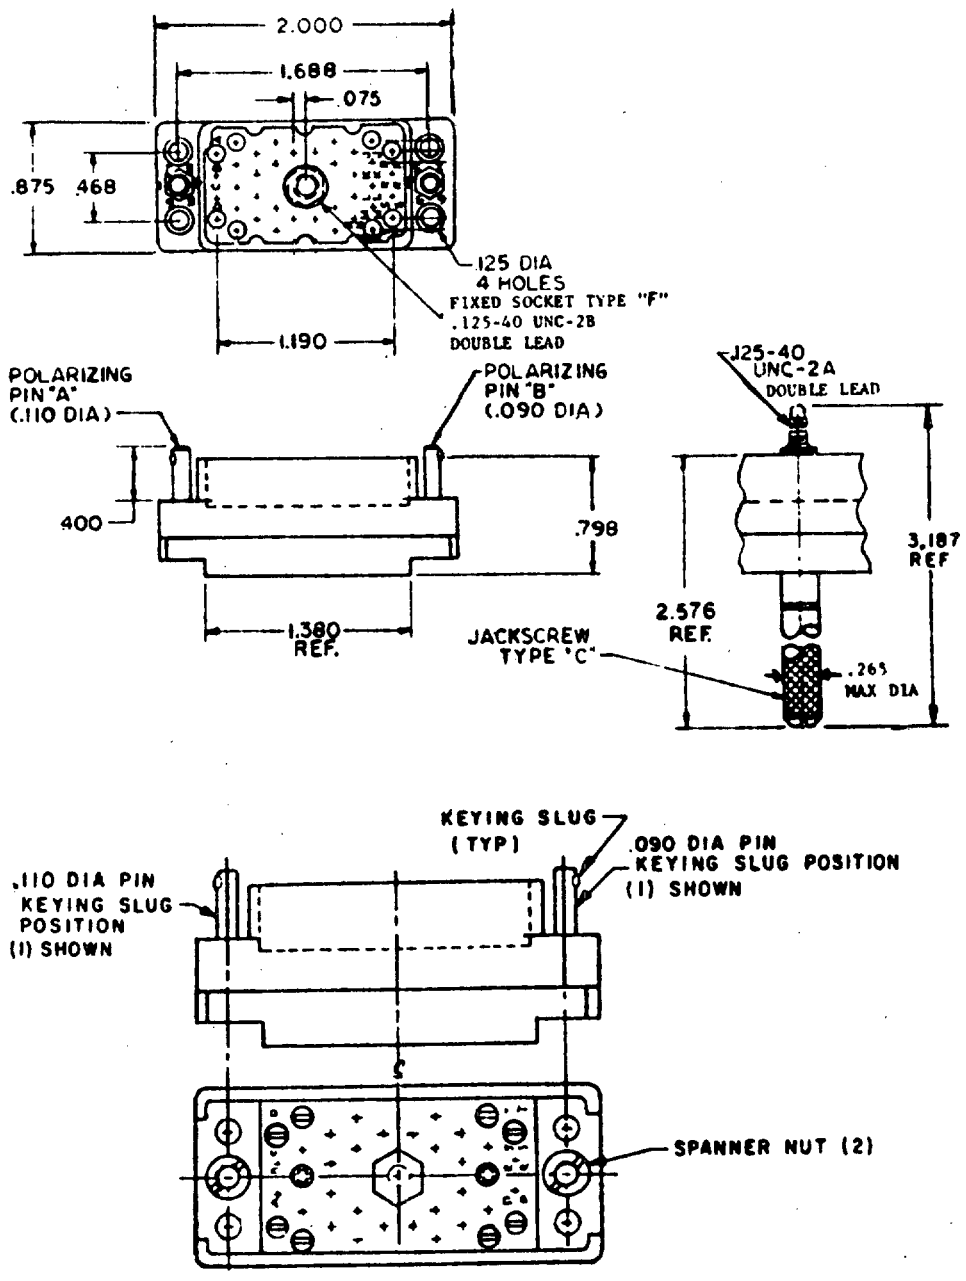

Supersedes Page 108.5 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 38 REMOVABLE CONTACTS

MIL-C-C28731/11

PART NUMBER: M28731/11-* 38 CONTACTS

TABLE I. PART NUMBER INFORMATION.

DASH NUMBER*	ACTUATING HARDWARE	CONTACT TYPE
0073	JACKSCREW TYPE C	CRIMP MIL-C-28731/20
0074	FIXED SOCKET TYPE F	
0075	JACKSCREW TYPE C	SOLDER HOLE MIL-C-28731/25
0076	FIXED SOCKET TYPE F	SOLDER HOLE MIL-C-28731/25
0077		WRAPPOST MIL-C-28731/26


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/11-0073 AND -0075 MATE WITH M28731/12-0074, -0076 AND -0077.
M28731/11-0074, -0076 AND -0077 MATE WITH M28731/12-0073 AND -0075.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 90 REMOVABLE CONTACTS

MIL-C-28731/16

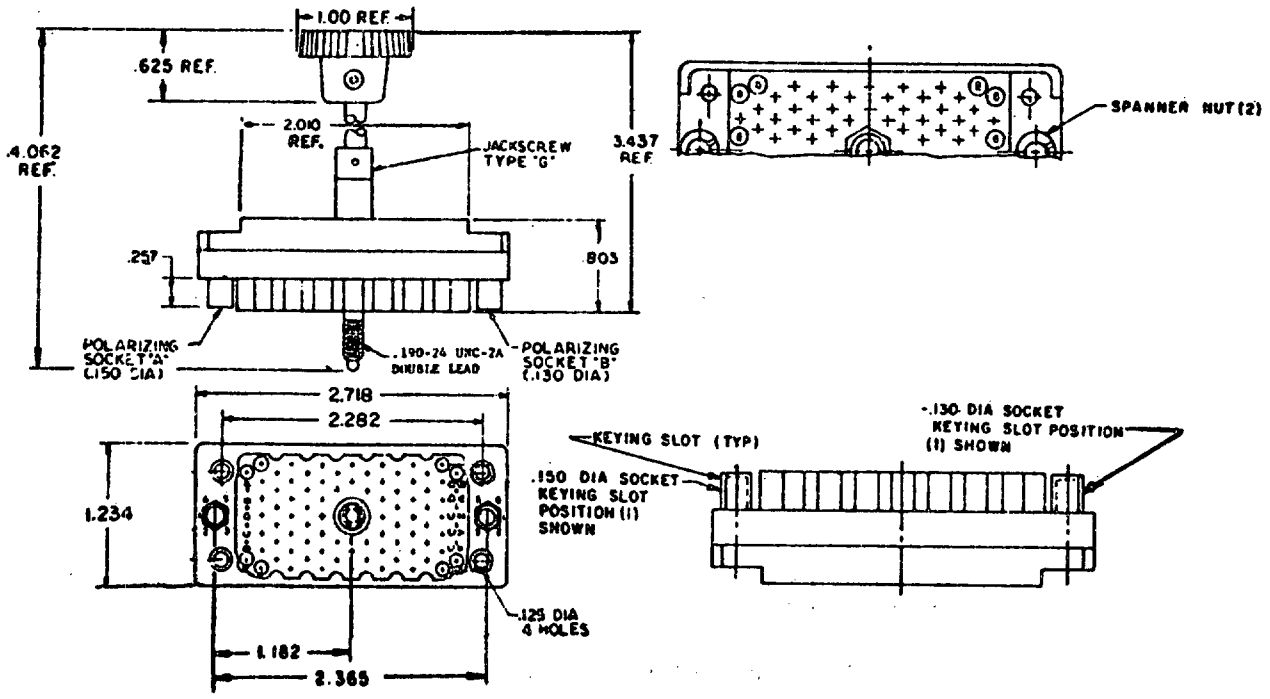

PART NUMBER: M28731/16-* 90 CONTACTS

TABLE I. PART NUMBER INFORMATION.

DASH NUMBER*	ACTUATING HARDWARE	CONTACT TYPE
0073	JACKSCREW TYPE G	CRIMP MIL-C-28731/20
0074	FIXED SOCKET TYPE F	
0075	JACKSCREW TYPE G	SOLDER HOLE MIL-C-28731/25
0076	FIXED SOCKET TYPE F	
0077		WRAPPOST MIL-C-28731/26

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


NOTE--MATING CONNECTOR INFORMATION:
M28731/16-0073 AND -0075 MATE WITH M28731/15-0074, -0076 AND -0077.
M28731/16-0074, -0076 AND -0077 MATE WITH M28731/15-0073 AND -0075.

Supersedes Page 108.15 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 120 REMOVABLE CONTACTS


MIL-C-28731/17

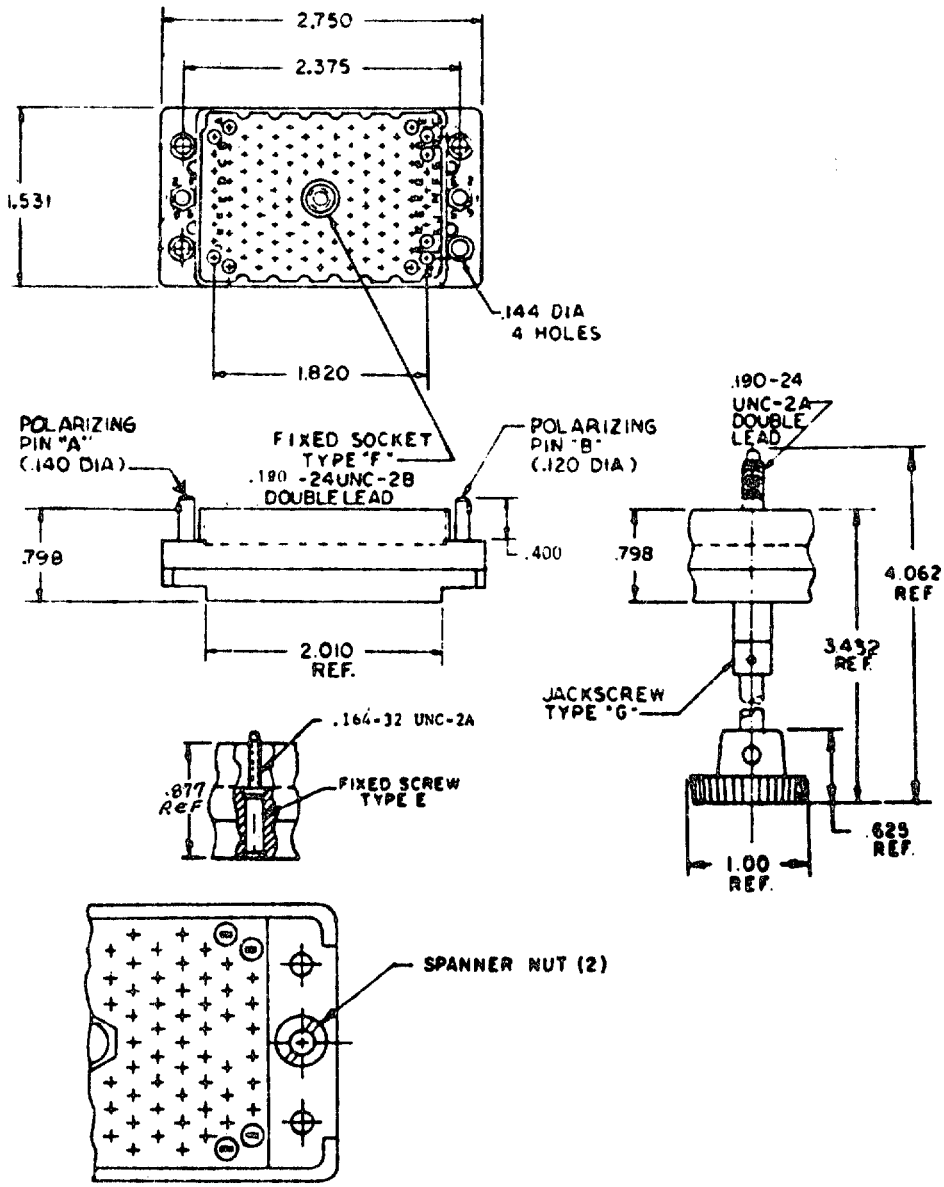

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), MALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 120 REMOVABLE CONTACTS

MIL-C-28731/17

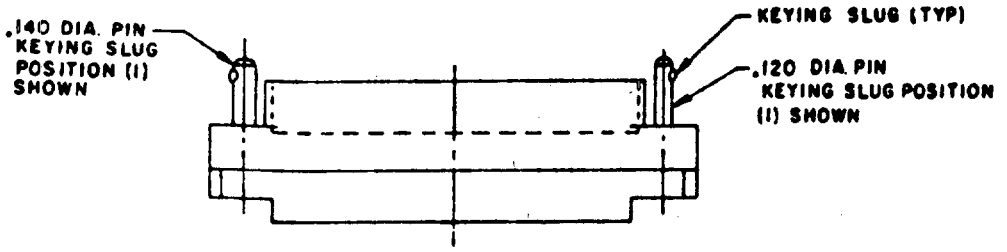

PART NUMBER: M28731/17-*

120 CONTACTS

TABLE I. PART NUMBER INFORMATION.

DASH NUMBER*	ACTUATING HARDWARE	CONTACT TYPE
0109	JACKSCREW TYPE G	CRIMP MIL-C-28731/20
0110	FIXED SOCKET TYPE F	
0111	FIXED SCREW TYPE E	
0112	JACKSCREW TYPE G	SOLDER HOLE MIL-C-28731/25
0113	FIXED SOCKET TYPE F	
0114	FIXED SCREW TYPE E	
0115	FIXED SOCKET TYPE F	WRAPPOST MIL-C-28731/26
0116	FIXED SCREW TYPE E	

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


NOTE--MATING CONNECTOR INFORMATION:
M28731/17-0109 AND -0112 MATE WITH M28731/18-0110, -0113 AND -0115.
M28731/17-0110, -0113 AND -0115 MATE WITH M28731/18-0109 AND -0112.
M28731/17-0111, -0114 AND -0116 MATE WITH M28731/18-0111 AND -0114.

Supersedes Page 108.17 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 120 REMOVABLE CONTACTS

MIL-C-28731/18

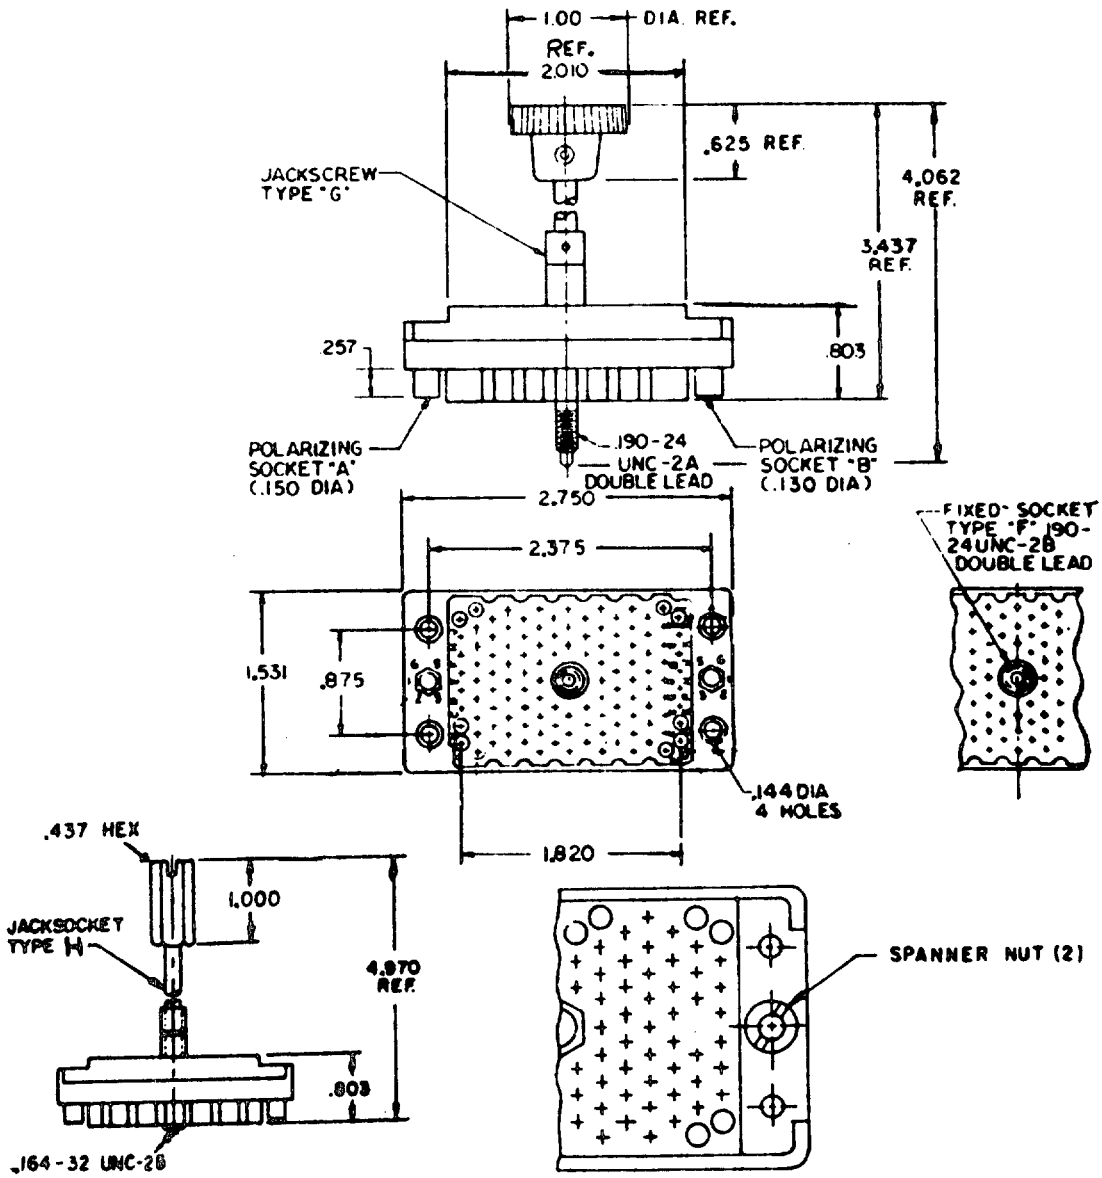


Supersedes Page 108.18 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, ELECTRICAL, INSERT (INSULATOR), FEMALE RECTANGULAR, POLARIZED, CENTER SCREW LOCK, FOR 120 REMOVABLE CONTACTS

MIL-C-28731/18

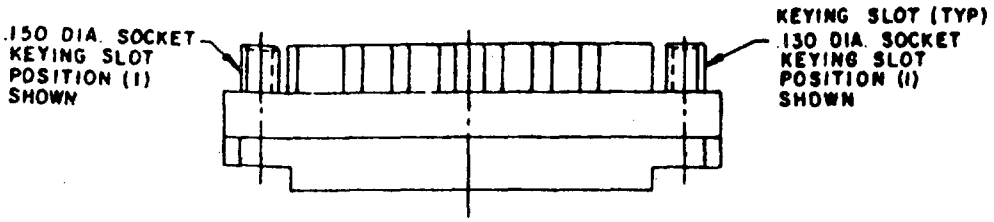

PART NUMBER: M28731/18-* 120 CONTACTS

TABLE I. PART NUMBER INFORMATION.

DASH NUMBER*	ACTUATING HARDWARE	CONTACT TYPE
0109	JACKSCREW TYPE G	CRIMP MIL-C-28731/20
0110	FIXED SOCKET TYPE F	
0111	FIXED SCREW TYPE H	
0112	JACKSCREW TYPE G	SOLDER HOLE MIL-C-28731/25
0113	FIXED SOCKET TYPE F	
0114	FIXED SCREW TYPE H	
0115	FIXED SOCKET TYPE F	WRAPPOST MIL-C-28731/26

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

NOTE--MATING CONNECTOR INFORMATION:
M28731/18-0109 AND -0112 MATE WITH M28731/17-0110, -0113 AND -0115.
M28731/18-0110, -0113 AND -0115 MATE WITH M28731/17-0109 AND -0112.
M28731/18-0111, AND -0114 MATE WITH M28731/17-0111, -0114 AND -0116.

Supersedes Page 108.19 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL,
POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE,
CRIMP TYPE REMOVABLE PIN CONTACTS, SIZE 16

MIL-C-28748/9

CONTACTS AND SIZE.

CONTACT	SIZE * 16 - 16 MIL-C-39029/36-278 PERCENT	SIZE * 16 - 20 MIL-C-39029/36-277 PERCENT	SHIELDED MS18232 ** PERCENT
1A	100	0	0
2A	0	100	0

* CRIMP TOOL: M22520/1-01
POSITIONER: M22520/1-03 (A)
INSTALLING TOOL: M81969/18-01
REMOVAL TOOL: M81969/20-01

** CRIMP TOOL: M22520/2-01 (INNER CONTACT)
POSITIONER: M22520/2-04
CRIMP TOOL: M22520/1-01 (OUTER CONTACT)
POSITIONER: M22520/1-07
INSTALLING TOOL: M81969/18-01
REMOVAL TOOL: M81969/20-01

TABLE I. CURRENT RATING (CRIMP).


CONTACT SIZE	WIRE SIZE (AWG)	AMPERES (MAX)
16 - 16	16	13
16 - 16	18	10
16 - 16	20	7.5
16 - 20	20	7.5
16 - 20	22	5.0
16 - 20	24	3.0


Supersedes Page 110.3 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

INSERT, RECTANGULAR CONNECTOR,
POLARIZED CENTER SCREW-LOCK, ELECTRICAL,
10 PIN CONTACTS (SIZE 16 CRIMP REMOVABLE)

MS18155

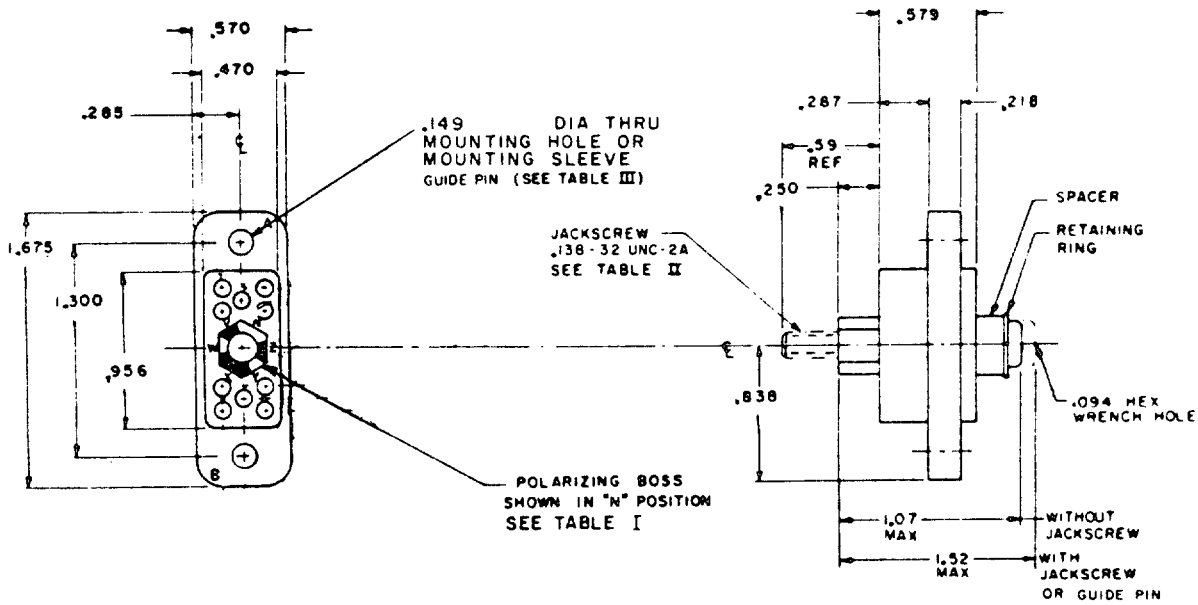



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL, POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE, CRIMP TYPE REMOVABLE SOCKET CONTACTS, SIZE 16

MIL-C-28748/10

PART NUMBER: M28748/10-* EXAMPLE OF PART NUMBER:

(SEE PART NUMBER CODE)

M28748/10	A	0	A	L	1A
BASIC NUMBER OF SPECIFICATION SHEET	INSERT	SHIELD AND SHIELD CLAMP LOCATION OR RETAINING PLATE	SHELL TYPE	JACKSCREWS OR GUIDEPINS	CONTACTS

PART NUMBER CODE:

INSERT WITH THRU MOUNTING HOLE	NUMBER OF CONTACTS
A - MS18156	10
B - MS18158	20
C - MS18160	36
D - MS18162	52
E - MS18164	80
F - MS17779	104
G - MS18166	158
H - MS18168	212

INSERT WITH MOUNTING SLEEVE	NUMBER OF CONTACTS
J - MS18156	10
K - MS18158	20
L - MS18160	36
M - MS18162	52
N - MS18164	80
P - MS17779	104
R - MS18166	158
S - MS18168	212

SHIELD AND SHIELD CLAMP LOCATION OR RETAINING PLATE
0 - NONE INCLUDED

SHELL TYPE (POLARIZATION) (SEE TABLES II + III)

A - 1 N
B - 1 V
C - 1 W
D - 1 X
E - 1 Y
F - 1 Z
N - 2 N
V - 2 V
W - 2 W
X - 2 X
Y - 2 Y
Z - 2 Z
G - 3 N
H - 3 V
J - 3 W
K - 3 X
L - 3 Y
M - 3 Z
P - 4 N
Q - 4 V
R - 4 W
S - 4 X
T - 4 Y
U - 4 Z

} SEE APPLICABLE INSERT MS PART NUMBER

JACKSCREWS OR GUIDEPINS

L - LONG JACKSCREW FROM APPLICABLE INSERT MS.
G - GUIDEPIN FROM APPLICABLE MS.
0 - BOSS FOR JACKSCREW.
B - BOSS FOR GUIDEPIN.

NOTE: MATING CONNECTORS: MIL-C-28748/9

Supersedes Page 110.21 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, RECTANGULAR, RACK AND PANEL,
POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE,
CRIMP TYPE REMOVABLE SOCKET CONTACTS, SIZE 16

MIL-C-28748/10

CONTACTS AND SIZE.

CONTACT	SIZE * 16 - 16 MIL-C-39029/37-280 PERCENT	SIZE * 16 - 20 MIL-C-39029/37-279 PERCENT	SHIELDED MS18233 ** PERCENT
1A	100	0	0
2A	0	100	0

* CRIMP TOOL: M22520/1-01
POSITIONER: M22520/1-03 (A)
INSTALLING TOOL: M81969/18-01
REMOVAL TOOL: M81969/20-01

** CRIMP TOOL: M22520/2-01 (INNER CONTACT)
POSITIONER: M22520/2-04
CRIMP TOOL: M22520/1-01 (OUTER CONTACT)
POSITIONER: M22520/1-07
INSTALLING TOOL: M81969/18-01
REMOVAL TOOL: M81969/20-01

Supersedes Page 110.22 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW

MIL-C-28804

SCOPE: CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, HAVE SIZE 22 NONREMOVABLE SOLDER TYPE CONTACTS, AND REAR REMOVABLE CRIMP TYPE CONTACTS. THESE CONNECTORS ARE USED WHERE PRESENCE OF RESIDUAL MAGNETISM MUST BE HELD TO VERY LOW LEVELS TO AVOID INTERFERENCE WITH NEARBY SENSITIVE INSTRUMENTATION.


CLASSES:

A. CLASS G CONNECTORS ARE INTENDED FOR USE IN NONENVIRONMENTAL RESISTING APPLICATIONS WHERE THE OPERATING TEMPERATURE RANGE OF -55° TO +125°C IS EXPERIENCED.
B. CLASS E CONNECTORS ARE INTENDED FOR ENVIRONMENTAL RESISTING APPLICATIONS. PROVISIONS ARE MADE FOR SEALING AROUND WIRE AT REAR OF CONNECTORS.

TABLE A. CLASS USED WITH SLASH SHEET.

CLASS	SLASH SHEET NO.
G	1, 2
E	3, 4


PART NUMBER EXAMPLE: M28804/1-2N

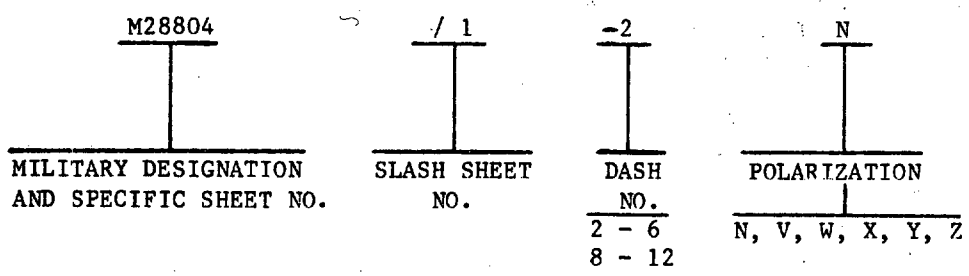

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRIC, RECTANGULAR, HIGH DENSITY, POLARIZED CENTER JACKSCREW, RECEPTACLE, CRIMP REMOVABLE SOCKET CONTACTS, CLASS G

MIL-C-28804/1

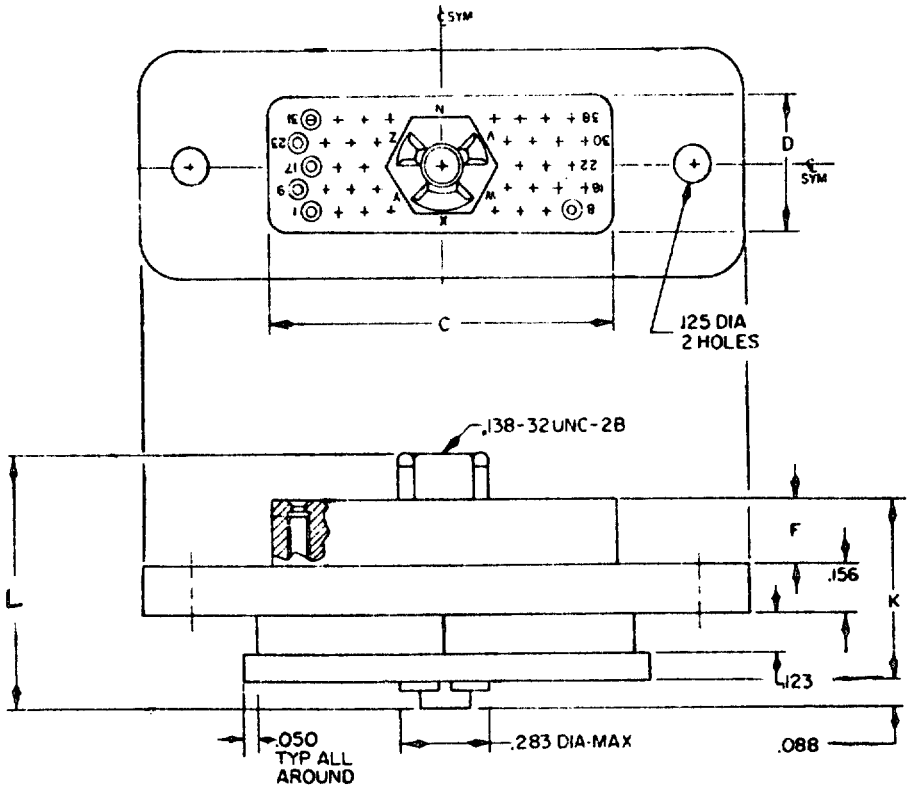

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE(MIL-C-915) TO CONNECTORS(MIL-C-28840AND/OR MIL-C-5015)

CABLE		MIL-C-28840 SHELL SIZE AND NO. OF CONTACTS	MIL-C-5015 SHELL SIZE INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
TYPE	MIL-C-915 SLASH SHEET			
DCOP-1	3		12S-3	MS340*DJ 13A3P/S
DCOP-1-1/2	3		12S-3	MS340*DJ 13E3P/S
DCOP-2	3		12S-3	MS340*DJ 13E3P/S
DHOF-3	6		12S-3	MS340*DJ 13D3P/S
DHOF-4	6		20-4	MS340*DJ 20A4P/S
DHOF-6	6		20-4	MS340*DJ 20A4P/S
DHOF-9	6		22-22	MS340*DJ 22A22P/S
DHOF-14	6		22-22	MS340*DJ 22B22P/S
DHOF-23	6		32-17	MS340*DJ 32A17P/S
DHOF-30	6		32-17	MS340*DJ 32B17P/S
DHOF-83	6		36-5	MS345*W 36-5P/S
DHOF-83	6		36-5	MS3450KS36-5P/S
DHOF-83	6		36-5	MS3456KS36-5P/S
DHOF-83	6		36-5	MS3459KS36-5P/S
DNW-3	68		12S-3	MS340*DJ 13E3P/S
DNW-4	68		20-4	MS340*DJ 20F4P/S
DNW-9	68		22-22	MS340*DJ 22A22P/S
DNW-14	68		22-22	MS340*DJ 22A22P/S
DNW-23	68		22-22	MS340*DJ 22B22P/S
DNW-50	68		32-17	MS340*DJ 32A17P/S
DNW-75	68		36-5	MS345*W 36-5P/S
DNW-75	68		36-5	MS3450KS36-5P/S
DNW-75	68		36-5	MS3456KS36-5P/S
DNW-75	68		36-5	MS3459KS36-5P/S
DNW-100	68		36-5	MS345*W 36-5P/S
DNW-100	68		36-5	MS3450KS36-5P/S
DNW-100	68		36-5	MS3456KS36-5P/S
DNW-100	68		36-5	MS3459KS36-5P/S
DPS-3	40		12S-3	MS340*DJ 13D3P/S
DPS-4	40		20-4	MS340*DJ 20A4P/S
DPS-6	40		20-4	MS340*DJ 20A4P/S
DPS-9	40		22-22	MS340*DJ 22B22P/S
DPS-14	40		22-22	MS340*DJ 22D22P/S
DSGU-3	29		12S-3	MS340*DJ 13D3P/S
DSGU-4	29		20-4	MS340*DJ 20F4P/S
DSGU-9	29		22-22	MS340*DJ 22A22P/S
DSGU-14	29		22-22	MS340*DJ 22B22P/S
DSGU-23	29		22-22	MS340*DJ 22D22P/S
DSGU-50	29		32-17	MS340*DJ 32A17P/S
DSGU-75	29		36-5	MS345*W 36-5P/S
DSGU-75	29		36-5	MS3450KS36-5P/S
DSGU-75	29		36-5	MS3456KS36-5P/S
DSGU-75	29		36-5	MS3459KS36-5P/S
DSGU-100	29		36-5	MS345*W 36-5P/S
DSGU-100	29		36-5	MS3450KS36-5P/S
DSGU-100	29		36-5	MS3456KS36-5P/S
DSGU-100	29		36-5	MS3459KS36-5P/S
DSS-2	8		10SL-3	MS340*DJ 11B3P/S

Supersedes Page 134.7 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE (MIL-C-915) TO CONNECTORS (MIL-C-28840 AND/OR MIL-C-5015) CONT.

CABLE		MIL-C-28840	MIL-C-5015	
TYPE	MIL-C-915 SLASH SHEET	SHELL SIZE AND NO. OF CONTACTS	SHELL SIZE INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
DSS-3	8		14S-2	MS340*DJ 15D2P/S
DSS-4	8		20-4	MS340*DJ 20A4P/S
ECM	54		40-56	MS340*DJ 40B56P/S
FHOF-3	6		14S-2	MS340*DJ 15D2P/S
FHOF-4	6		20-4	MS340*DJ 20A4P/S
FHOF-9	6		22-22	MS340*DJ 22B22P/S
FHOF-42	6		32-17	MS340*DJ 32E17P/S
FHOF-60	6		36-5	MS345*W 36-5P/S
FHOF-60	6		36-5	MS3450KS36-5P/S
FHOF-60	6		36-5	MS3456KS36-5P/S
FHOF-60	6		36-5	MS3459KS36-5P/S
FNW-3	70		14S-2	MS340*DJ 15D2P/S
FNW-4	70		20-4	MS340*DJ 20A4P/S
FNW-9	70		22-22	MS340*DJ 22B22P/S
FNW-23	70		22-22	MS340*DJ 22D22P/S
FPS-14	40		22-22	MS340*DJ 22D22P/S
FSGU-3	31		14S-2	MS340*DJ 15D2P/S
FSGU-4	31		20-4	MS340*DJ 20A4P/S
FSGU-9	31		22-22	MS340*DJ 22B22P/S
FSGU-23	31		22-22	MS340*DJ 22H22P/S
FSGU-50	31		32-17	MS340*DJ 32B17P/S
FSGU-75	31		36-5	MS345*W 36-5P/S
FSGU-75	31		36-5	MS3450KS36-5P/S
FSGU-75	31		36-5	MS3456KS36-5P/S
FSGU-75	31		36-5	MS3459KS36-5P/S
FSGU-100	31		36-5	MS345*W 36-5P/S
FSGU-100	31		36-5	MS3450KS36-5P/S
FSGU-100	31		36-5	MS3456KS36-5P/S
FSGU-100	31		36-5	MS3459KS36-5P/S
FSS-2	8		16S-1	MS340*DJ 17E1P/S
FSS-3	8		16S-1	MS340*DJ 17E1P/S
FSS-4	8		22-23	MS340*DJ 22B23P/S
MCOS-2	11		14S-2	MS340*DJ 15D2P/S
MCOS-4	11		16S-1	MS340*DJ 17E1P/S
MCOS-5	11		16S-1	MS340*DJ 17D1P/S
MCOS-6	11		18-1	MS340*DJ 18A1P/S
MCOS-7	11		18-1	MS340*DJ 18A1P/S
MHOF-7	14		16S-1	MS340*DJ 17E1P/S
MHOF-10	14		18-1	MS340*DJ 18A1P/S
MHOF-14	14		20-27	MS340*DJ 20B27P/S
MHOF-19	14		24-28	MS340*DJ 24A28P/S
MHOF-24	14		24-28	MS340*DJ 24D28P/S
MHOF-30	14		28-21	MS340*DJ 28B21P/S
MHOF-37	14		28-21	MS340*DJ 28B21P/S
MHOF-44	14		36-10	MS340*DJ 36A10P/S
MHOF-61	14		40-56	MS340*DJ 40A56P/S
MMOP-5	15	11-7		M28840/26CA1AB*1
MNW-7	71		16S-1	MS340*DJ 17D1P/S
MNW-10	71		18-1	MS340*DJ 18A1P/S

Supersedes Page 134.8 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE (MIL-C-915) TO CONNECTORS (MIL-C-28840 AND/OR MIL-C-5015) CONT.

CABLE		MIL-C-28840	MIL-C-5015	
TYPE	MIL-C-915 SLASH SHEET	SHELL SIZE AND NO. OF CONTACTS	SHELL SIZE INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
MNW-14	71		20-27	MS340*DJ 20A27P/S
MNW-19	71		24-28	MS340*DJ 24A28P/S
MNW-24	71		24-28	MS340*DJ 24A28P/S
MNW-30	71		28-21	MS340*DJ 28A21P/S
MNW-37	71		28-21	MS340*DJ 28A21P/S
MNW-44	71		36-10	MS340*DJ 36G10P/S
MS-37	50		36-10	MS340*DJ 36G10P/S
MSCU-7	32		16S-1	MS340*DJ 17E1P/S
MSCU-10	32		18-1	MS340*DJ 18B1P/S
MSCU-14	32		20-27	MS340*DJ 20B27P/S
MSCU-19	32		24-28	MS340*DJ 24B28P/S
MSCU-24	32		24-28	MS340*DJ 24D28P/S
MSCU-30	32		28-21	MS340*DJ 28D21P/S
MSCU-37	32		28-21	MS340*DJ 28D21P/S
MSCU-44	32		36-10	MS340*DJ 36A10P/S
MSCU-61	32		40-56	MS340*DJ 40B56P/S
MSCU-91	32		44-52	MS340*DJ 44D52P/S
MSP	67		44-52	MS340*DJ 44E52D/E
MSPW	66		44-52	MS340*DJ 44E52D/E
MU-14	43	15-21		M28840/26CC1DB*1
MUS-14	43	15-21		M28840/26CC1BB*1
MWF-7	58		16S-1	MS340*DJ 17E1P/S
MWF-10	58		18-1	MS340*DJ 18B1P/S
MWF-14	58		20-27	MS340*DJ 20B27P/S
MWF-19	58		24-28	MS340*DJ 24A28P/S
MWF-24	58		24-28	MS340*DJ 24D28P/S
MWF-30	58		28-21	MS340*DJ 28D21P/S
MWF-37	58		28-21	MS340*DJ 28D21P/S
PBTMU-5	17	13-12		M28840/26CB1CB*1
PBTMU-15	17	17-31		M28840/26CD1BB*1
PBTMU-30	17	23-64		M28840/26CF1CB*1
PI-3	39		18-1	MS340*DJ 18B1P/S
PI-7	39		24-28	MS340*DJ 24D28P/S
PI-12	39		28-21	MS340*DJ 28D21P/S
SSGU-50	28		18-6	MS340*DJ 18A6P/S
SSGU-75	28		20-2	MS340*DJ 20B2P/S
SSGU-100	28		20-2	MS340*DJ 20B2P/S
TCOP-2	3		10SL-3	MS340*DJ 11B3P/S
TCJU-4	25		20-4	MS340*DJ 20A4A/B
TCJX-3	38		16S-1	MS340*DJ 17B1A/B
TCJX-7	38		20-27	MS340*DJ 20E27A/B
TCJX-12	38		28-21	MS340*DJ 28E21A/B
TCKX-1	38		12S-3	MS340*DJ 13D3A/B
TCKX-3	38		16S-1	MS340*DJ 17B1A/B
TCKX-7	38		20-27	MS340*DJ 20E27A/B
TCKX-12	38		28-21	MS340*DJ 28E21A/B
TCTU-4	38		20-4	MS340*DJ 20A4A/B
TCTX-1	38		12S-3	MS340*DJ 13E3A/B
TCTX-3	38		16S-1	MS340*DJ 17E1A/B

Supersedes Page 134.9 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE (MIL-C-915) TO CONNECTORS (MIL-C-28840 AND/OR MIL-C-5015) CONT.

CABLE		MIL-C-28840	MIL-C-5015	
TYPE	MIL-C-915 SLASH SHEET	SHELL SIZE AND NO. OF CONTACTS	SHELL SIZE INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
TCTX-7	38		20-27	MS340*DJ 20B27A/B
TCTX-12	38		24-28	MS340*DJ 24G28A/B
THOF-3	6		14S-2	MS340*DJ 15D2P/S
THOF-4	6		20-4	MS340*DJ 20A4P/S
THOF-6	6		20-4	MS340*DJ 20A4P/S
THOF-9	6		22-22	MS340*DJ 22A22P/S
THOF-14	6		22-22	MS340*DJ 22D22P/S
THOF-23	6		32-17	MS340*DJ 32A17P/S
THOF-42	6		32-17	MS340*DJ 32D17P/S
TNW-3	69		10SL-3	MS340*DJ 11B3P/S
TNW-4	69		20-4	MS340*DJ 20A4P/S
TNW-9	69		22-22	MS340*DJ 22B22P/S
TNW-14	69		22-22	MS340*DJ 22B22P/S
TNW-23	69		22-22	MS340*DJ 22D22P/S
TNW-50	69		32-17	MS340*DJ 32B17P/S
TNW-75	69		36-5	MS345*W 36-5P/S
TNW-75	69		36-5	MS3450KS36-5P/S
TNW-75	69		36-5	MS3456KS36-5P/S
TNW-75	69		36-5	MS3459KS36-5P/S
TNW-100	69		36-5	MS345*W 36-5P/S
TNW-100	69		36-5	MS3450KS36-5P/S
TNW-100	69		36-5	MS3456KS36-5P/S
TNW-100	69		36-5	MS3459KS36-5P/S
TPNW-1-1/2	72	11-7		M28840/26CA1AB*1
TPNW-3	72	11-7		M28840/26CA1AB*1
TPNW-5	72	13-12		M28840/26CB1BB*1
TPNW-10	72	15-21		M28840/26CC1BB*1
TPNW-15	72	17-31		M28840/26CD1AB*1
TPNW-20	72	19-42		M28840/26CE1AB*1
TPNW-30	72	23-64		M28840/26CF1AB*1
TPNW-40	72	25-92		M28840/26CG1AB*1
TPS-3	40		14S-2	MS340*DJ 15D2P/S
TPS-4	40		20-4	MS340*DJ 20A4P/S
TPS-6	40		20-4	MS340*DJ 20B4P/S
TPS-9	40		22-22	MS340*DJ 22B22P/S
TPS-14	40		22-22	MS340*DJ 22D22P/S
TPS-23	40		22-22	MS340*DJ 22D22P/S
TPS-30	40		32-17	MS340*DJ 32B17P/S
TSGU-3	30		14S-2	MS340*DJ 15A2P/S
TSGU-4	30		20-4	MS340*DJ 20A4P/S
TSGU-9	30		22-22	MS340*DJ 22B22P/S
TSGU-14	30		22-22	MS340*DJ 22D22P/S
TSGU-23	30		22-22	MS340*DJ 22D22P/S
TSGU-50	30		32-17	MS340*DJ 32B17P/S
TSGU-75	30		36-5	MS345*W 36-5P/S
TSGU-75	30		36-5	MS3450KS36-5P/S
TSGU-75	30		36-5	MS3456KS36-5P/S
TSGU-75	30		36-5	MS3459KS36-5P/S

Supersedes Page 134.10 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE (MIL-C-915) TO CONNECTORS (MIL-C-28840 AND/OR MIL-C-5015) CONT.

CABLE		MIL-C-28840	MIL-C-5015	
TYPE	MIL-C-915 SLASH SHEET	SHELL SIZE AND NO. OF CONTACTS	SHELL SIZE INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
TSGU-100	30		36-5	MS345*W 36-5P/S
TSGU-100	30		36-5	MS3450KS36-5P/S
TSGU-100	30		36-5	MS3456KS36-5P/S
TSGU-100	30		36-5	MS3459KS36-5P/S
TSP-11	22	17-31		M28840/26CD1BB*1
TSP-31	22	23-64		M28840/26CF1CB*1
TSS-2	8		14S-2	MS340*DJ 15A2P/S
TSS-3	8		14S-2	MS340*DJ 15A2P/S
TSS-4	8		20-4	MS340*DJ 20A4P/S
TTOP-3	24		16S-1	MS340*DJ 17E1P/S
TTOP-5	24		18-1	MS340*DJ 18A1P/S
TTOP-10	24		24-28	MS340*DJ 24A28P/S
TTOP-15	24		28-21	MS340*DJ 28B21P/S
TTRS-2	25		16S-1	MS340*DJ 17A1P/S
TTRS-4	25		20-27	MS340*DJ 20B27P/S
TTRS-6	25		24-28	MS340*DJ 24D28P/S
TTRS-8	25		24-28	MS340*DJ 24G28P/S
TTRS-10	25		28-21	MS340*DJ 28D21P/S
TTRS-12	25		28-21	MS340*DJ 28D21P/S
TTRS-16	25		36-10	MS340*DJ 36A10P/S
TTSU-1-1/2	37		10S-3	MS340*DJ 11B3D/E
TTSU-3	37		16S-1	MS340*DJ 17E1P/S
TTSU-5	37		18-1	MS340*DJ 18A1D/E
TTSU-10	37		24-28	MS340*DJ 24A28D/E
TTSU-15	37		28-21	MS340*DJ 28B21D/E
TTSU-20	37		36-10	MS340*DJ 36G10D/E
TTSU-30	37		40-62	MS340*DJ 40A62D/E
TTSU-40	37		40-56	MS340*DJ 40B56D/E
TTSU-50	37		44-52	MS340*DJ 44D52D/E
1SAU-44	57	25-92		M28840/26CG1BB*1
1SMU-5	56		18-1	MS340*DJ 18A1D/E
1SU-36	59		40-56	MS340*DJ 40A56P/S
1SWF-2	47		14S-2	MS340*DJ 15B2D/E
1SWU-2	44		14S-2	MS340*DJ 15D2D/E
1SWU-14	44		28-21	MS340*DJ 28B21D/E
1SWU-20	44		36-10	MS340*DJ 36A10D/E
1SWU-30	44		40-62	MS340*DJ 40A62D/E
1S50MU-16	42		28-21	MS340*DJ 28B21D/E
1S50MU-20	42		36-10	MS340*DJ 36G10D/E
1S50MU-40	42		40-56	MS340*DJ 40A56D/E
1S50MUS-16	42		28-21	MS340*DJ 28B21D/E
1S50MUS-20	42		36-10	MS340*DJ 36G10D/E
1S50MUS-40	42		40-56	MS340*DJ 40A56D/E
1S75MU-8	55		24-28	MS340*DJ 24G28D/E
2AU-40	41		40-56	MS340*DJ 40B56D/E
2AUS-40	41		40-56	MS340*DJ 40D56D/E

Supersedes Page 134.11 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE (MIL-C-915) TO CONNECTORS (MIL-C-28840 AND/OR MIL-C-5015) CONT.

CABLE		MIL-C-28840	MIL-C-5015	
TYPE	MIL-C-915 SLASH SHEET	SHELL SIZE AND NO. OF CONTACTS	SHELL SIZE INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
2SJ-7	60		22-22	MS340*DJ 22A22P/S
2SJ-9	60		22-22	MS340*DJ 22A22P/S
2SJ-11	60		22-22	MS340*DJ 22A22P/S
2SJ-12	60		20-4	MS340*DJ 20F4P/S
2SJ-14	60		20-4	MS340*DJ 20F4P/S
2SJ-16	60		10SL-3	MS340*DJ 11B3P/S
2SJ-18	60		10SL-3	MS340*DJ 11A3P/S
2SJ-20	60		10SL-3	MS340*DJ 11A3P/S
2SJ-22	10		10SL-3	MS340*DJ 11A3P/S
2SU-3	45	13-12		M28840/26CB1CB*1
2SU-7	45	15-12		M28840/26CC1DB*1
2SU-10	45	19-42		M28840/26CE1BB*1
2SU-14	45	19-42		M28840/26CE1BB*1
2SU-19	45	23-64		M28840/26CF1CB*1
2SU-24	45	25-92		M28840/26CG1DB*1
2SU-30	45	25-92		M28840/26CG1DB*1
2SU-37	45	29-121		M28840/26CH1BB*1
2SU-44	45	33-155		M28840/26CJ1BB*1
2SWAU-3	45	13-12		M28840/26CB1CB*1
2SWAU-7	45	15-21		M28840/26CC1DB*1
2SWAU-10	45	19-42		M28840/26CE1BB*1
2SWAU-14	45	19-42		M28840/26CE1BB*1
2SWAU-19	46	23-64		M28840/26CF1CB*1
2SWAU-24	46	25-92		M28840/26CG1DB*1
2SWAU-30	46	25-92		M28840/26CG1DB*1
2SWAU-37	46	29-121		M28840/26CH1BB*1
2SWAU-44	46	33-155		M28840/26CJ1BB*1
2SWF-3	48	13-12		M28840/26CB1DB*1
2SWF-4	48	13-12		M28840/26CB1DB*1
2SWF-7	48	19-42		M28840/26CE1BB*1
2SWL-7	77		24-28	MS340*DJ 24A28P/S
2SWU-1	49		10SL-3	MS340*DJ 11B3P/S
2SWU-3	49		18-1	MS340*DJ 18B1P/S
2SWU-7	49		24-28	MS340*DJ 24D28P/S
2SWU-12	49		28-21	MS340*DJ 28D21P/S
2SWU-19	49		40-62	MS340*DJ 40D62P/S
2SWU-24	49		40-56	MS340*DJ 40D56P/S
2SWU-30	40		44-52	MS340*DJ 44E52P/S
2U-10	63	15-21		M28840/26CC1BB*1
2U-15	63	17-31		M28840/26CD1AB*1
2U-19	63	19-42		M28840/26CE1AB*1
2U-30	63	23-64		M28840/26CF1AB*1
2U-45	63	25-92		M28840/26CG1AB*1
2U-60	63	29-121		M28840/26CH1AB*1
2UW-42	78	25-92		M28840/26CG1AB*1
2WAU-40	64		40-56	MS340*DJ 40B56D/E
3SF-7	62		28-21	MS340*DJ 28D21P/S

Supersedes Page 134.12 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840 AND/OR MIL-C-5015

TABLE IV. CABLE (MIL-C-915) TO CONNECTORS (MIL-C-28840 AND/OR MIL-C-5015) CONT.

CABLE		MIL-C-28840	MIL-C-5015	
TYPE	MIL-C-915 SLASH SHEET	SHELL SIZE AND NO. OF CONTACTS	SHELL SIZE INSERT ARRANGMT	PART NUMBER ORDERING INFORMATION
3SJ-9	60		22-22	MS340*DJ 22A22P/S
3SJ-12	60		20-4	MS340*DJ 20A4P/S
3SJ-14	60		20-4	MS340*DJ 20F4P/S
3SJ-16	60		14S-2	MS340*DJ 15E2P/S
3SJ-18	50		14S-2	MS340*DJ 15E2P/S
3SJ-20	50		14S-2	MS340*DJ 15E2P/S
3SJ-22	50		14S-2	MS340*DJ 15E2P/S
3SU-3	51		20-27	MS340*DJ 20B27P/S
3SU-7	51		28-21	MS340*DJ 28B21P/S
3SU-10	51		36-10	MS340*DJ 36A10P/S
3SU-14	51		40-62	MS340*DJ 40B62P/S
3SU-19	51		40-56	MS340*DJ 40D56P/S
3SU-24	51		44-52	MS340*DJ 44E52P/S
3SWU-3	52		20-27	MS340*DJ 20B27P/S
3SWU-7	52		28-21	MS340*DJ 28B21P/S
3SWU-10	52		36-10	MS340*DJ 36A10P/S
3SWU-14	52		40-62	MS340*DJ 40B62P/S
3SWU-19	52		40-56	MS340*DJ 40D56P/S
3SWU-24	52		44-52	MS340*DJ 44E52P/S
3U-3	53		18-1	MS340*DJ 18B1D/E
3U-7	53		24-28	MS340*DJ 24D28P/S
3U-12	53		28-21	MS340*DJ 28D21P/S
4NW-8	76		22-22	MS340*DJ 22D22P/S
4SJ-14	60		22-23	MS340*DJ 22G23P/S
4SJ-16	60		16S-1	MS340*DJ 17D1P/S
4SJ-20	60		16S-1	MS340*DJ 17D1P/S
5SS	74		16S-1	MS340*DJ 17A1P/S
7PS-6	40		22-23	MS340*DJ 22D23P/S
7SGU-3	34		16S-1	MS340*DJ 17A1P/S
7SGU-4	34		22-23	MS340*DJ 22A23P/S
7SS-2	8		18-1	MS340*DJ 18B1P/S
8NW-6	75		22-23	MS340*DJ 22B23P/S


Supersedes Page 134.13 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


MIL-C-5015

CONNECTOR, RECEPTACLE, ELECTRIC, WALL MOUNTING,
FRONT RELEASE, CRIMP CONTACT, AN TYPE

MS3400

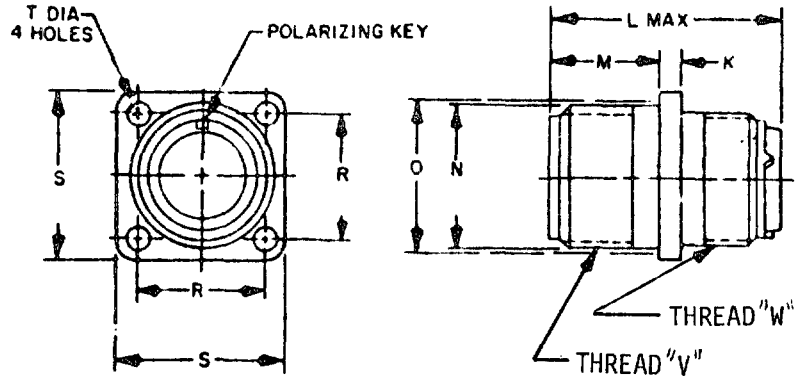

CLASSES D ENVIRONMENT RESISTANT

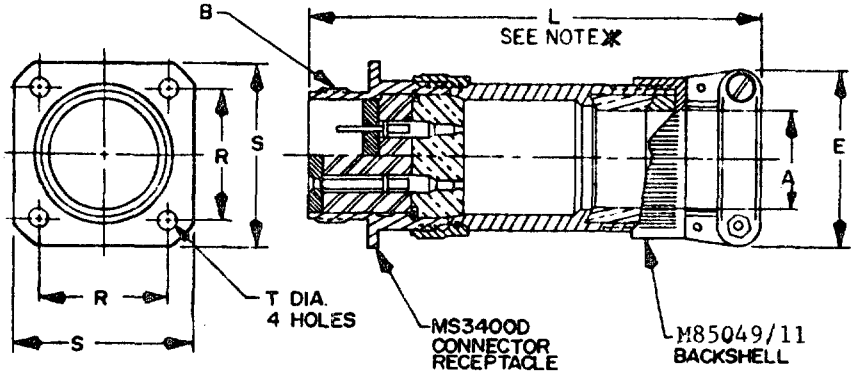

CLASS DJ ENVIRONMENT RESISTANT

* FOR SIZE 8, 4 AND 0 CONTACTS, ADD .375 TO OVERALL LENGTH.
NOTE: THIS ASSEMBLY IS AVAILABLE ONLY WITH CLASS D OR DS CONNECTOR RECEPTACLE FOR JACKETED CABLE.

Supersedes Page 134.14 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH DENSITY, SHIPBOARD

MIL-C-28840

SCOPE: THIS SECTION COVERS CIRCULAR ELECTRICAL, HIGH DENSITY, HIGH SHOCK CONNECTORS WITH REMOVABLE CRIMP CONTACTS (FRONT RELEASE) AND ARE USED WITH JACKETED CABLE IN SHIPBOARD APPLICATIONS.

TEMPERATURE RANGE: -55°C TO +200°C.

APPLICABLE DOCUMENTS:

MIL-C-39029 - CONTACTS, ELECTRICAL CONNECTOR, GENERAL SPECIFICATION FOR
MIL-C-22520 - CRIMP TOOLS, REMOVABLE CONTACTS, GENERAL SPECIFICATION FOR
MIL-I-81969 - INSTALLING AND REMOVABLE TOOLS, CONNECTOR, ELECTRICAL CONTACT, GENERAL SPECIFICATION FOR
MIL-STD-1698 - INSERT ARRANGEMENTS FOR MIL-C-28840 CONNECTORS

CONNECTORS - CABLE APPLICATION: CABLE TYPE (MIL-C-915) TO CONNECTORS MIL-C-28840 AND/OR MIL-C-5015, SEE TABLE IV, PAGE 134.7.


CLASS: SEE TABLE I.

SHELL SIZE DESIGNATOR: SEE TABLE II.

CONTACTS: THE CONTACTS USED IN MIL-C-28840 CONNECTORS ARE:
MIL-C-39029/83 - PIN
MIL-C-39029/84 - SOCKET
FOR WIRE RANGE ACCOMODATIONS SEE TABLE III.

CONTACT SIZE DESIGNATION: THE CONTACT SIZE DESIGNATION FOR CRIMP CONTACTS SHALL BE THE MATING END AND WIRE BARREL SIZES AS SPECIFIED IN MIL-C-39029.

EXAMPLE OF CRIMP CONTACT:

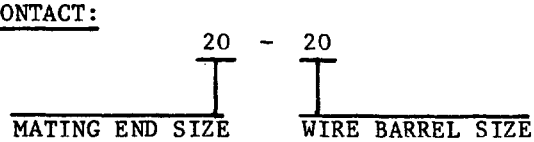

Supersedes Page 138.1 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH DENSITY, SHIPBOARD

MIL-C-28840

TABLE I. CONNECTOR CLASSES - PHYSICAL CHARACTERISTICS.

CLASS CODE	CLASS	FEATURE	FLUID	HOT SPOT TEMP °C	SERVICE LIFE	INSERT MATERIAL	SHELLS AND COUPLING RINGS	
							MATERIAL	FINISH
A	D	HIGH IMPACT SHOCK	COMPLETE	125 200	20YRS 1000HRS	FLUORO-SILICONE	WROUGHT ALUMINUM	CADMIUM, OLIVE DRAB OVER NICKEL
B	DS	HIGH IMPACT	COMPLETE	125	20YRS 1000HRS	FLUORO-SILICONE	CORROSION RESISTANT STEEL 316	CADMIUM
C	DJ	HIGH IMPACT SHOCK WITH BACKSHELL CONNECTOR ASSEMBLY	COMPLETE	125 200	20YRS 1000HRS	FLUORO-SILICONE	WROUGHT ALUMINUM	CADMIUM, OLIVE DRAB OVER NICKEL
E	DJS	HIGH IMPACT SHOCK WITH BACKSHELL CONNECTOR ASSEMBLY	COMPLETE	125 200	20YRS 1000HRS	FLUORO-SILICONE	CORROSION RESISTANT STEEL 316	CADMIUM

TABLE II. SHELL SIZES.

DESIGNATOR	SIZES	NO. OF CONTACTS
A	11	7
B	13	12
C	15	21
D	17	31
E	19	42
F	23	64
G	25	92
H	29	121
J	33	155

TABLE III. WIRE RANGE ACCOMODATIONS.

PART NO. BIN CODE M39029/	CONTACT SIZE	WIRE SIZE	OD OF FINISHED WIRE (INCH) * CRIMP CONTACT CONNECTORS	
			MINIMUM	MAXIMUM
83-508 84-509	20-20	24 22 20	.048	.050
83-450 84-452	20-22	26 24 22	.0335	.0355
83-451 84-453	20-28#	32 30 28	.0180	.0200

* WIRE REFERENCE - MIL-W-16878, AND MIL-C-915.
\# TO OBTAIN SEALING, WIRES MUST BE BUILT UP TO FINISHED WIRE DIAMETER.


Supersedes Page 138.2 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH DENSITY, SHIPBOARD

PART NUMBER EXAMPLE: M28840/10CG1AAP1

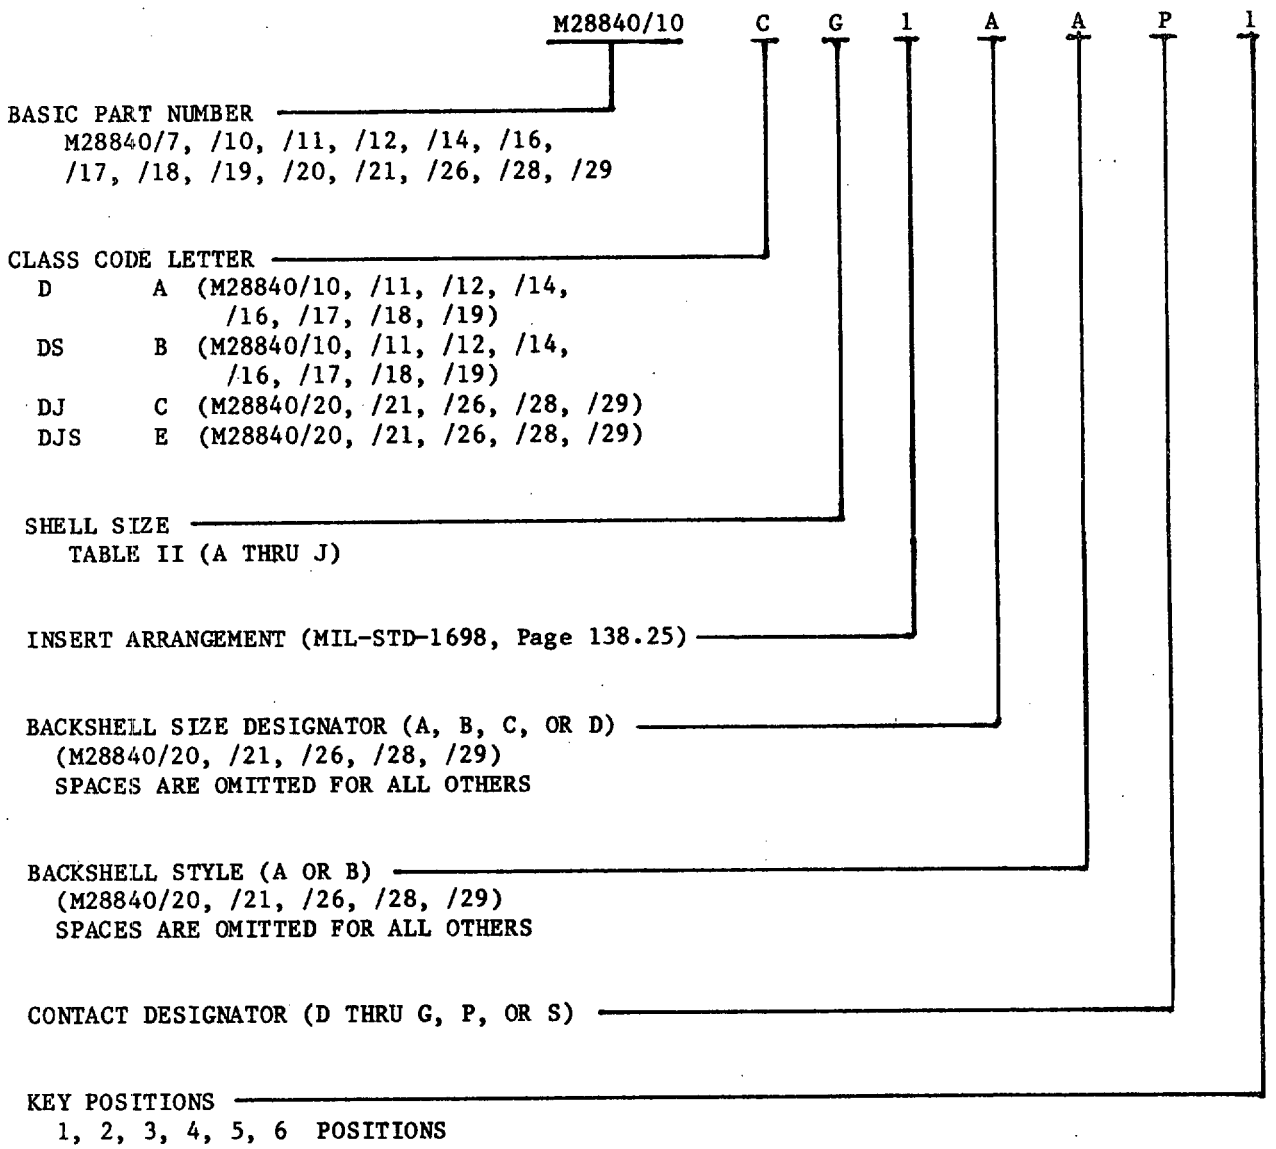

NOTE: M28840/7 IS MADE UP OF ONLY SHELL SIZE AND KEY POSITIONS.

Supersedes Page 138.3 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840

GENERAL DUTY PER MIL-C-5015, CLASSES D, DS, DJ, AND DJS (SEE INDIVIDUAL MS SHEET)

CONTACT STYLES: THE FOLLOWING DESIGNATORS IDENTIFY THE VARIOUS CONTACT SYTLE.

P	PIN CONTACTS	-20-22
S	SOCKET CONTACTS	-20-22
D	PIN CONTACTS	-20-28
E	SOCKET CONTACTS	-20-28
F	PIN CONTACTS	-20-20
G	SOCKET CONTACTS	-20-20

CLASS VARIATION:

"D" - WROUGHT ALUMIMUM SHELL, HIGH IMPACT SHOCK RESISTANCE
"DS" - STAINLESS STEEL SHELL, HIGH IMPACT SHOCK RESISTANCE
"DJ" - CONNECTOR BACKSHELL ASSEMBLY (RECEPTACLE OR PLUG)
"DJS" - CONNECTOR BACKSHELL ASSEMBLY (STAINLESS)

NOTES:

(A) ALL RECEPTACLES MATE WITH MIL-C-28840/16, /17, /18, /19, /26, /28, OR /29.
(B) ALL PLUGS MATE WITH MIL-C-28840/10, /11, /12, /14, /20, OR /21.
(C) SHELL POLARIZATION: 1 THRU 6 KEY POSITION
(4) INSTALLING AND REMOVAL TOOL: AS SPECIFIED IN MIL-I-81969/33 AND /34.

Supersedes Page 138.4 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG ASSEMBLY, STRAIGHT CLASSES DJ AND DJS

MIL-C-28840/26

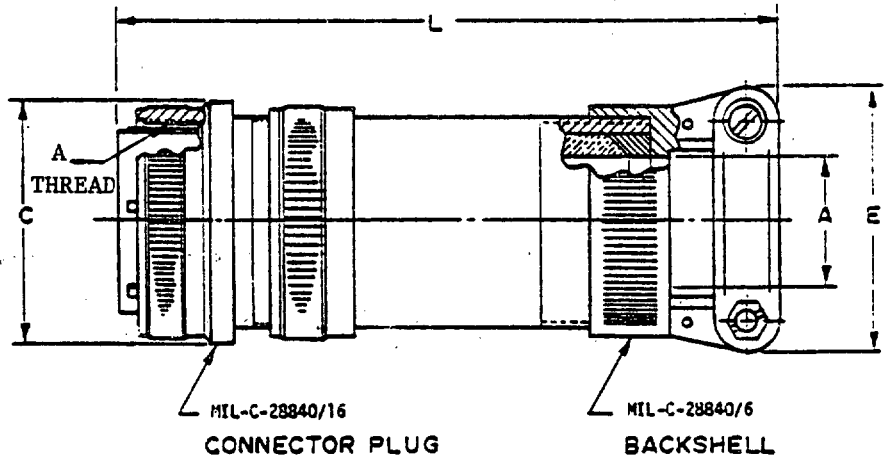


TABLE I. DIMENSIONS AND CONFIGURATION.

DESIG-NATOR #	ASSEMBLY NUMBER $ M28840	CONNECTOR RECEPTACLE $ M28840	BACKSHELL ASSY NO. $ M28840	A CABLE ENTRY MAX	A CABLE ENTRY MIN	A THREAD CLASS 2B -.1P-.2L -D.S.	C DIA MAX	E MAX	L MAX
A (11)	/26XAXAXXX	/16XAXXX	/601XX	.312	.188	.750	1.156	.938	6.500
A (11)	/26XAXBXXX	/16XAXXX	/624XX	.438	.281	.750	1.156	1.125	6.500
A (11)	/26XAXCXXX	/16XAXXX	/625XX	.562	.344	.750	1.281	1.312	6.500
B (13)	/26XBXBXXX	/16XBXXX	/603XX	.438	.281	.875	1.156	1.125	6.500
B (13)	/26XBXCXXX	/16XBXXX	/626XX	.562	.344	.875	1.281	1.312	6.500
B (13)	/26XBXDXXX	/16XBXXX	/627XX	.625	.375	.875	1.406	1.312	7.000
C (15)	/26XCXAXXX	/16XCXXX	/605XX	.438	.281	1.062	1.281	1.125	6.500
C (15)	/26XCXBXXX	/16XCXXX	/606XX	.562	.344	1.062	1.281	1.312	6.500
C (15)	/26XCXCXXX	/16XCXXX	/628XX	.625	.375	1.062	1.406	1.312	7.000
C (15)	/26XCXDXXX	/16XCXXX	/607XX	.750	.438	1.062	1.406	1.593	7.000

Supersedes Page 138.17 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG ASSEMBLY, STRAIGHT CLASSES DJ AND DJS

MIL-C-28840/26

TABLE I. DIMENSIONS AND CONFIGURATIONS.

DESIG-NATOR #	ASSEMBLY NUMBER $ M28840/	CONNECTOR RECPT.$ M28840/	BACKSHELL ASSY NO.$ M28840/	A CABLE ENTRY MAX	A CABLE ENTRY MIN	A THREAD CLASS 2B -.1P-.2L-DS.	C DIA MAX	E MAX	L MAX
D (17)	26XDXAXXX	16XDXXX	608XX	.625	.375	1.125	1.406	1.312	7.000
D (17)	26XDXBXXX	16XDXXX	609XX	.750	.438	1.125	1.406	1.593	7.000
D (17)	26XDXCXXX	16XDXXX	610XX	.938	.625	1.125	1.406	1.593	7.000
E (19)	26XEXAXXX	16XEXXX	611XX	.625	.375	1.312	1.531	1.321	7.000
E (19)	26XEXBXXX	16XEXXX	612XX	.938	.625	1.312	1.531	1.750	7.000
F (23)	26XFXAXXX	16XFXXX	613XX	.750	.438	1.500	1.656	1.593	7.500
F (23)	26XFXBXXX	16XFXXX	614XX	.938	.625	1.500	1.656	1.750	7.625
F (23)	26XFXCXXX	16XFXXX	615XX	1.188	.812	1.500	1.656	2.093	7.812
G (25)	26XGXAXXX	16XAXXX	616XX	.938	.625	1.625	1.781	1.750	7.625
G (25)	26XGXBXXX	16XGXXX	617XX	1.188	.812	1.625	1.781	2.093	8.312
G (25)	26XGXCXXX	16XGXXX	618XX	1.250	.875	1.625	1.781	2.093	8.312
G (25)	26XGXOXXX	16XGXXX	619XX	1.380	1.000	1.625	2.156	2.343	8.312
H (29)	26XHXAXXX	16XHXXX	620XX	1.188	.812	1.812	2.156	2.093	8.312
H (29)	26XHXBXXX	16XHXXX	621XX	1.380	1.000	1.812	2.156	2.343	8.312
J (33)	26XJXAXXX	16XJXXX	622XX	1.380	1.000	2.000	2.281	2.343	8.312
J (33)	26XJXBXXX	16XJXXX	623XX	1.625	1.250	2.000	2.281	2.750	8.625

SHELL SIZES ARE PROVIDED WITHIN PARENTHESES FOR INFORMATION AND ARE NOT A PART OF THE DESIGNATOR.

$ ASSEMBLY SHALL BE MADE UP OF A CONNECTOR AND A BACKSHELL OF THE SAME MATERIAL.


MATES WITH: MIL-C-28840/10, /11, /12, /14, /20 AND /21.

Supersedes Page 138.18 *of* 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ASSEMBLY, 90°, CLASSES DJ AND DJS

MIL-C-28840/28

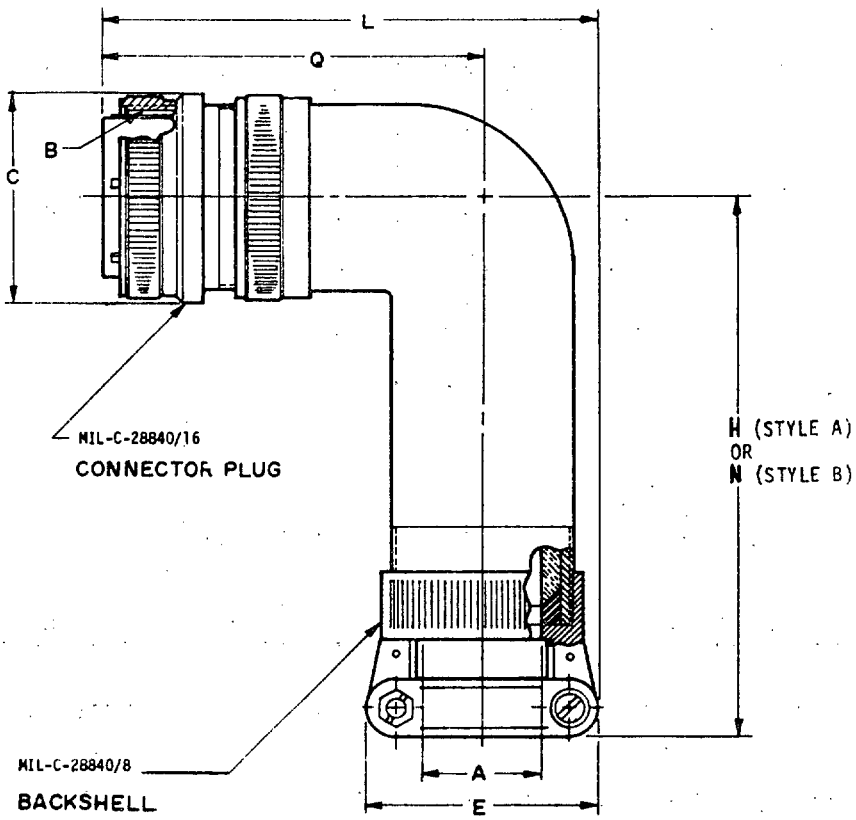

Supersedes Page 138.19 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ASSEMBLY, 90°, CLASSES DJ AND DJS

MIL-C-28840/28

TABLE I. DIMENSIONS AND CONFIGURATION.

DESIGNATOR #	ASSEMBLY NUMBER $ M28840	CONNECTOR RECEPTACLE $ M28840	BACKSHELL ASSY NO. $ M28840	A CABLE ENTRY MAX	A CABLE ENTRY MIN	B THREAD CLASS 2B -.1P-.2L-D.S.	C DIA MAX	E MAX
A (11)	/28XAXAXXX	/16XAXXX	/801XX	.312	.188	.750	1.031	.938
A (11)	/28XAXBXXX	/16XAXXX	/824XX	.438	.281	.750	1.031	1.125
A (11)	/28XAXCXXX	/16XAXXX	/825XX	.562	.344	.750	1.281	1.312
B (13)	/28XBXBXXX	/16XBXXX	/803XX	.438	.281	.875	1.031	1.125
B (13)	/28XBXCXXX	/16XBXXX	/826XX	.562	.344	.875	1.281	1.312
B (13)	/28XBXDXXX	/16XBXXX	/827XX	.625	.375	.875	1.531	1.312
C (15)	/28XCXAXXX	/16XCXXX	/805XX	.438	.281	1.062	1.281	1.125
C (15)	/28XCXBXXX	/16XCXXX	/806XX	.562	.344	1.062	1.281	1.312
C (15)	/28XCXCXXX	/16XCXXX	/828XX	.625	.375	1.062	1.531	1.312
C (15)	/28XCXDXXX	/16XCXXX	/807XX	.750	.438	1.062	1.531	1.593
D (17)	/28XDXAXXX	/16XDXXX	/808XX	.625	.375	1.125	1.531	1.312
D (17)	/28XDXBXXX	/16XDXX	/809XX	.750	.438	1.125	1.531	1.593
D (17)	/28XDXCXXX	/16XDXX	/810XX	.938	.625	1.125	1.531	1.750
E (19)	/28XEXAXXX	/16XEXXX	/811XX	.625	.375	1.312	1.531	1.312
E (19)	/28XEXBXXX	/16XEXXX	/812XX	.938	.625	1.312	1.781	1.750
F (23)	/28XFXAXXX	/16XFXXX	/813XX	.750	.438	1.500	1.781	1.593
F (23)	/28XFXBXXX	/16XFXXX	/814XX	.938	.625	1.500	1.781	1.750
F (23)	/28XFXCXXX	/16XFXXX	/815XX	1.188	.812	1.500	1.781	2.093
G (25)	/28XGXAXXX	/16XGXXX	/816XX	.938	.625	1.625	1.781	1.750
G (25)	/28XGXBXXX	/16XGXXX	/817XX	1.188	.812	1.625	1.781	2.093
G (25)	/28XGXCXXX	/16XGXXX	/818XX	1.250	.875	1.625	2.031	2.093
G (25)	/28XGXDXXX	/16XGXXX	/819XX	1.380	1.000	1.625	2.031	2.343
H (29)	/28XHXAXXX	/16XHXXX	/820XX	1.188	.812	1.812	2.031	2.093
H (29)	/28XHXBXXX	/16XHXXX	/821XX	1.380	1.000	1.812	2.031	2.343
J (33)	/28XJXAXXX	/16XJXXX	/822XX	1.380	1.000	2.000	2.531	2.343
J (33)	/28XJXBXXX	/16XJXXX	/823XX	1.625	1.250	2.000	2.531	2.750

SHELL SIZES ARE PROVIDED WITHIN PARENTHESES FOR INFORMATION AND ARE NOT A PART OF THE DESIGNATOR.

$ ASSEMBLY SHALL BE MADE UP OF A CONNECTOR AND A BACKSHELL OF THE SAME MATERIAL.

Supersedes Page 138.20 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, ASSEMBLY, 90°, CLASSES DJ AND DJS

MIL-C-28840/28

DESIGNATOR #	H MAX STYLE A	N MAX STYLE B	L MAX	Q MAX
A (11)	5.332	2.962	4.139	3.306
A (11)	5.332	2.962	4.139	3.306
A (11)	5.457	3.087	4.389	3.431
B (13)	5.332	2.962	4.139	3.306
B (13)	5.457	3.087	4.389	3.431
B (13)	5.682	3.312	4.639	3.556
C (15)	5.457	3.087	4.389	3.431
C (15)	5.457	3.087	4.389	3.431
C (15)	5.682	3.312	4.639	3.556
C (15)	5.713	3.343	4.639	3.556
D (17)	5.682	3.312	4.639	3.556
D (17)	5.713	3.343	4.639	3.556
D (17)	5.807	3.437	4.639	3.556
E (19)	5.682	3.312	4.639	3.556
E (19)	5.832	3.462	4.889	3.681
F (23)	5.738	3.368	4.889	3.681
F (23)	5.832	3.462	4.889	3.681
F (23)	6.019	3.649	4.889	3.681
G (25)	5.832	3.462	4.889	3.681
G (25)	6.019	3.649	4.889	3.681
G (25)	6.144	3.774	5.139	3.806
G (25)	6.176	3.806	5.139	3.806
H (29)	6.144	3.774	5.139	3.806
H (29)	6.176	3.806	5.139	3.806
J (33)	6.426	4.056	5.639	4.056
J (33)	6.701	4.331	5.639	4.056


MATES WITH MIL-C-28840/10, /11, /12, /14, /20, /21.

Supersedes Page 138.21 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ASSEMBLY, 45°, CLASSES DJ AND DJS

MIL-C-28840/29

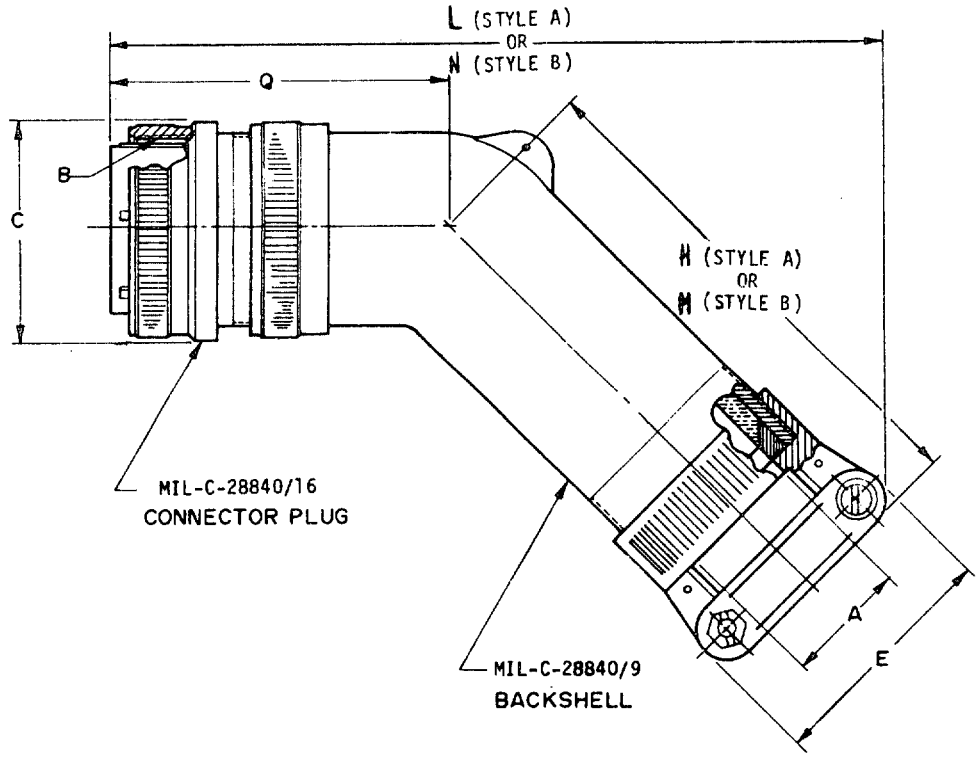

Supersedes Page 138.22 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PLUG, ASSEMBLY, 45°, CLASSES DJ AND DJS

MIL-C-28840/29

TABLE I. DIMENSIONS AND CONFIGURATION.

DESIGNATOR #	ASSEMBLY NUMBER $ M28840	CONNECTOR RECEPTACLE $ M28840	BACKSHELL ASSY NO. $ M28840	A CABLE ENTRY MAX	A CABLE ENTRY MIN	B THREAD CLASS 2B -.1P-.2L-D.S.	C DIA MAX	E MAX
A (11)	/29XAXAXXX	/16XAXXX	/901XX	.312	.188	.750	1.031	.938
A (11)	/29XAXBXXX	/16XAXXX	/924XX	.438	.281	.750	1.031	1.125
A (11)	/29XAXCXXX	/16XAXXX	/925XX	.562	.344	.750	1.281	1.312
B (13)	/29XBXBXXX	/16XBXXX	/903XX	.438	.281	.875	1.031	1.125
B (13)	/29XBXCXXX	/16XBXXX	/926XX	.562	.344	.875	1.281	1.312
B (13)	/29XBXDXXX	/16XBXXX	/927XX	.625	.375	.875	1.531	1.312
C (15)	/29XCXAXXX	/16XCXXX	/905XX	.438	.281	1.062	1.281	1.125
C (15)	/29XCXBXXX	/16XCXXX	/906XX	.562	.344	1.062	1.281	1.312
C (15)	/29XCXCXXX	/16XCXXX	/928XX	.625	.375	1.062	1.531	1.312
C (15)	/29XCXDXXX	/16XCXXX	/907XX	.750	.438	1.062	1.531	1.593
D (17)	/29XDXAXXX	/16XDXXX	/908XX	.625	.375	1.125	1.531	1.312
D (17)	/29XDXBXXX	/16XDXXX	/909XX	.750	.438	1.125	1.531	1.593
D (17)	/29XDXCXXX	/16XDXXX	/910XX	.938	.625	1.125	1.531	1.750
E (19)	/29XEXAXXX	/16XEXXX	/911XX	.625	.375	1.312	1.531	1.312
E (19)	/29XEXBXXX	/16XEXXX	/912XX	.938	.625	1.312	1.781	1.750
F (23)	/29XFXAXXX	/16XFXXX	/913XX	.750	.438	1.500	1.781	1.593
F (23)	/29XFXBXXX	/16XFXXX	/914XX	.938	.625	1.500	1.781	1.750
F (23)	/29XFXCXXX	/16XFXXX	/915XX	1.188	.812	1.500	1.781	2.093
G (25)	/29XGXAXXX	/16XGXXX	/916XX	.938	.625	1.625	1.781	1.750
G (25)	/29XGXBXXX	/16XGXXX	/917XX	1.188	.812	1.625	1.781	2.093
G (25)	/29XGXCXXX	/16XGXXX	/918XX	1.250	.875	1.625	2.031	2.093
G (25)	/29XGXDXXX	/16XGXXX	/919XX	1.380	1.000	1.625	2.031	2.343
H (29)	/29XHXAXXX	/16XHXXX	/920XX	1.188	.812	1.812	2.031	2.093
H (29)	/29XHXBXXX	/16XHXXX	/921XX	1.380	1.000	1.812	2.031	2.343
J (33)	/29XJXAXXX	/16XJXXX	/922XX	1.380	1.000	2.000	2.531	2.343
J (33)	/29XJXBXXX	/16XJXXX	/923XX	1.625	1.250	2.000	2.531	2.750

SHELL SIZES ARE PROVIDED WITHIN PARENTHESES FOR INFORMATION AND ARE NOT A PART OF THE DESIGNATOR.

$ ASSEMBLY SHALL BE MADE UP OF A CONNECTOR AND A BACKSHELL OF THE SAME MATERIAL.

Supersedes Page 138.23 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, ASSEMBLY, 45°, CLASSES DJ AND DJS

MIL-C-28840/29

DESIGNATOR #	H MAX STYLE A	M MAX STYLE B	L MAX STYLE A	N MAX STYLE B	Q MAX
A (11)	5.432	3.062	7.404	5.728	3.306
A (11)	5.432	3.062	7.457	5.781	3.306
A (11)	5.557	3.187	7.727	6.051	3.431
B (13)	5.432	3.062	7.457	5.781	3.306
B (13)	5.557	3.187	7.727	6.051	3.431
B (13)	5.682	3.312	7.938	6.262	3.556
C (15)	5.557	3.187	7.671	5.995	3.431
C (15)	5.557	3.187	7.727	6.051	3.431
C (15)	5.682	3.312	7.938	6.262	3.556
C (15)	5.713	3.343	8.058	6.382	3.556
D (17)	5.682	3.312	7.938	6.262	3.556
D (17)	5.713	3.343	8.058	6.382	3.556
D (17)	5.807	3.437	8.161	6.485	3.556
E (19)	5.682	3.312	7.938	6.282	3.556
E (19)	5.932	3.562	8.371	6.695	3.681
F (23)	5.838	3.468	8.272	6.596	3.681
F (23)	5.932	3.562	8.371	6.695	3.681
F (23)	6.119	3.749	8.628	6.952	3.681
G (25)	5.932	3.562	8.371	6.695	3.681
G (25)	6.119	3.749	8.628	6.952	3.681
G (25)	6.244	3.874	8.841	7.165	3.806
G (25)	6.276	3.906	8.950	7.274	3.806
H (29)	6.244	3.874	8.841	7.165	3.806
H (29)	6.276	3.906	8.950	7.274	3.806
J (33)	6.526	4.156	9.377	7.701	4.056
J (33)	6.801	4.431	9.659	7.983	4.056

MATES WITH MIL-C-28840/10, /11, /12, /14, /20, /21.


Supersedes Page 138.24 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840

CONNECTOR, INSERT ARRANGEMENTS

MIL-STD-1698

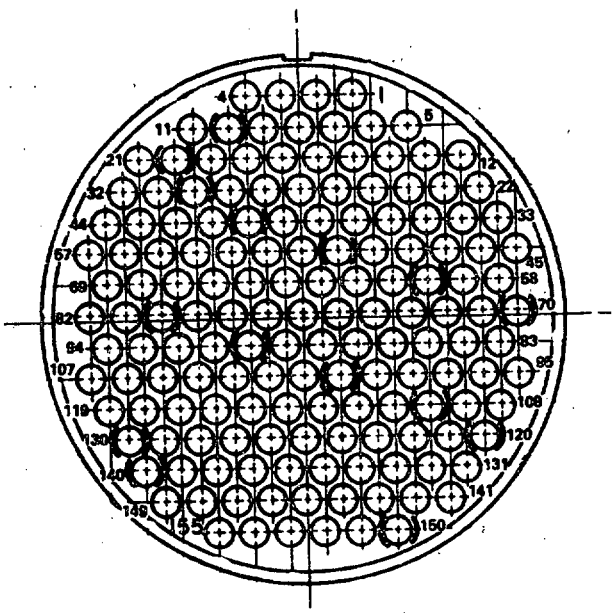

33-1

Supersedes Page 138.29 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

MIL-C-28840

CONNECTORS, ELECTRICAL, CIRCULAR THREADED, HIGH DENSITY, SHIPBOARD

PART NUMBER EXAMPLE: M28840/523WA

M28840/5 __ 23 __ W A

BASIC PART NUMBER
M28840/1, /2, /3, /5, /6, /8, /9
/13, /15, /23, /25, /27, /30

SHELL SIZE DESIGNATOR
A THRU J (M28840/1, /2, /13, /15, /23)
B E F G (M28840/3)

DASH NUMBER *
01 THRU 25 (M28840/5, /25, /27)
01 THRU 28 (M28840/6, /8, /9)
03 04 05 06 08 10 12 16 (M28840/30)
26 27 28 (M28840/6, /8, /9)

CHAIN ATTACHMENT (M28840/13, /15)
A - LINK CHAIN WITH FASTENER
B - LINK CHAIN WITH RING

MATERIAL AND FINISH DESIGNATOR
W (M28840/1, /2, /3, /5, /6, /8, /9,
/13, /15, /23, /25, /27, /30)
D (M28840/1, /5, /6, /23, /30)

STYLE DESIGNATOR
A - EMI/NON-ENVIRONMENTAL (M28840/5, /25, /27, /30)
B - EMI/ENVIRONMENTAL (M28840/5, /25, /27, /30)
A - EMI/ENVIRONMENTAL (M28840/6, /8, /9)
B - ENVIRONMENTAL (M28840/6, /8, /9)

* M28840/25 AND /27 USE NO DIGIT "0" BEFORE DIGITS 1 THRU 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, CLAMPS, STRAIN RELIEF, STRAIGHT

MIL-C-28840/1

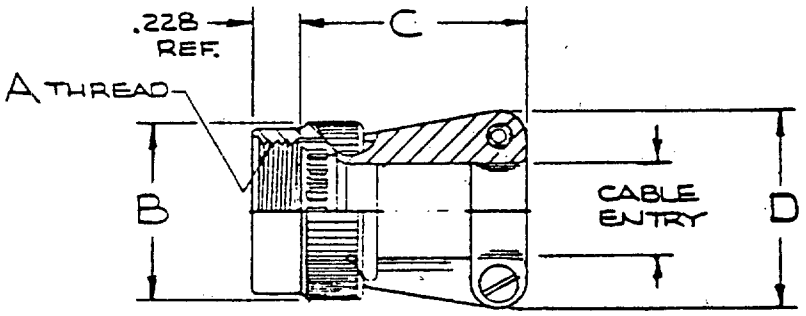


TABLE I. DESIGNATORS AND DIMENSIONS.

DESIGNATOR		A THREAD CLASS 2B	B MAX DIA	C	D	CABLE ENTRY	
						MAX	MIN
A	(11)	.750-20 UNEF	1.028	.945	.832	.286	.177
B	(13)	.875-20 UNEF	1.141	.945	.832	.286	.177
C	(15)	1.000-20 UNEF	1.263	.945	.989	.416	.250
D	(17)	1.125-18 UNEF	1.387	1.195	1.075	.476	.291
E	(19)	1.250-18 UNEF	1.513	1.320	1.319	.626	.348
F	(23)	1.438-18 UNEF	1.703	1.445	1.557	.831	.429
G	(25)	1.562-18 UNEF	1.825	1.570	1.653	.956	.523
H	(29)	1.875-16 UN	2.143	1.721	1.819	1.081	.643
J	(33)	2.062-16 UNS	2.329	1.908	2.020	1.187	.704

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, CLAMPS, STRAIN RELIEF, 90°

MIL-C-28840/2

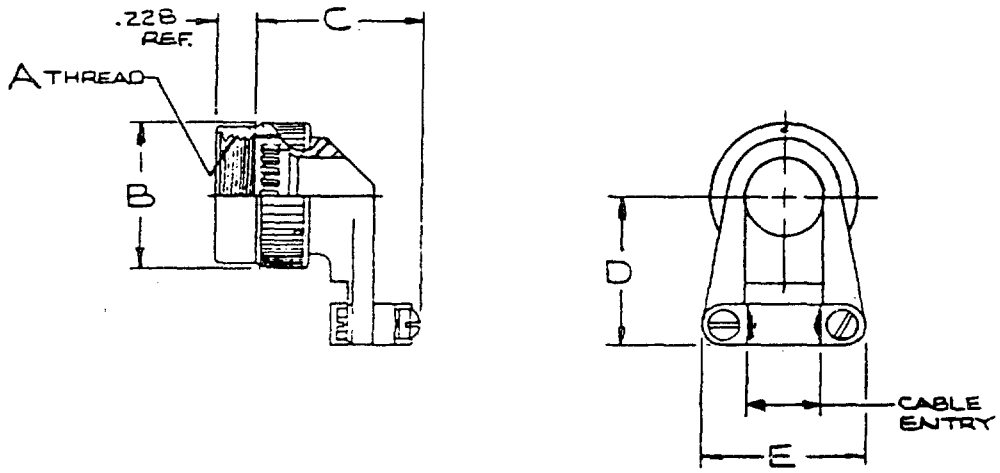


TABLE I. DESIGNATORS AND DIMENSIONS.

DESIGNATOR	A THREAD CLASS 2B	B MAX DIA	C MAX DIA	D	E	CABLE ENTRY	
						MAX	MIN
A (11)	.750-20 UNEF	1.028	1.071	.929	.832	.286	.177
B (13)	.875-20 UNEF	1.141	1.071	.929	.832	.286	.177
C (15)	1.000-20 UNEF	1.263	1.280	1.056	.989	.416	.250
D (17)	1.125-18 UNEF	1.387	1.392	1.233	1.075	.476	.291
E (19)	1.250-18 UNEF	1.513	1.517	1.296	1.319	.626	.348
F (23)	1.438-18 UNEF	1.703	1.642	1.358	1.557	.831	.429
G (25)	1.562-18 UNEF	1.825	1.767	1.420	1.653	.956	.523
H (29)	1.875-16 UN	2.143	1.905	1.634	1.819	1.081	.643
J (33)	2.062-16 UNS	2.329	1.968	1.859	2.020	1.187	.704

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, CLAMPS, STRAIN RELIEF, 45°

MIL-C-28840/3

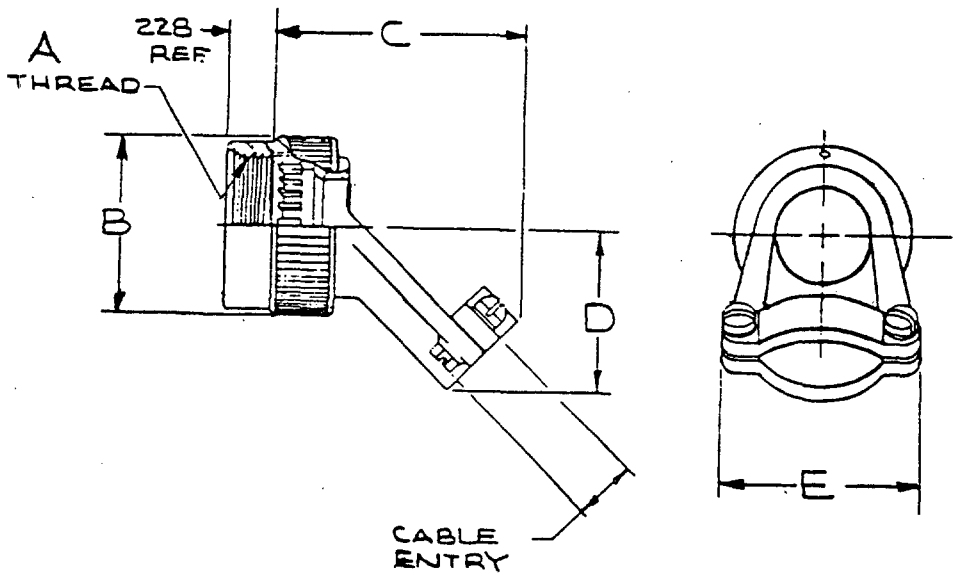



TABLE I. DESIGNATORS AND DIMENSIONS.

DESIGNATOR	A THREAD CLASS 2B	B MAX DIA	C MAX DIA	D	E	CABLE ENTRY	
						MAX	MIN
B (13)	.875-20 UNEF	1.141	1.650	.929	.832	.286	.177
E (19)	1.250-18 UNEF	1.513	1.918	1.172	1.319	.626	.348
F (23)	1.438-18 UNEF	1.703	1.962	1.235	1.557	.831	.429
G (25)	1.562-18 UNEF	1.825	2.006	1.297	1.653	.956	.523


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, BACKSHELL, STRAIGHT, METAL CONDUIT FOR EMI SHIELDING

MIL-C-28840/5

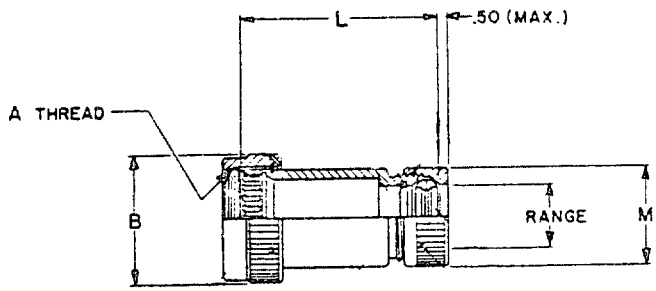

STYLE A (FOR M28840/4-**A PLAIN CONDUIT)

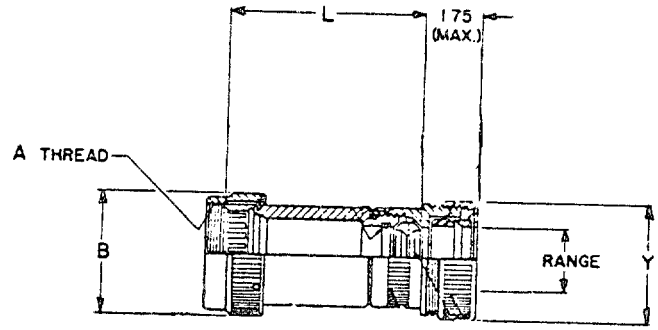

STYLE B (FOR M28840/4-**B JACKET CONDUIT)

TABLE I. DESIGNATORS AND DIMENSIONS.


DASH NO. & DESIGNATOR	A THREAD CLASS 2B	B MAX DIA	SEAL RANGE MAX	SEAL RANGE MIN	CONDUIT SIZE M28840/4-	L	M MAX DIA	Y MAX DIA
01 A(11)	.750-20 UNEF	1.028	.63	.50	03	1.75	1.12	1.19
02 B(13)	.875-20 UNEF	1.141	.63	.50	03	1.75	1.12	1.19
03 B(13)	.875-20 UNEF	1.141	.75	.63	04	1.75	1.25	1.38
04 C(15)	1.000-20 UNEF	1.263	.63	.50	03	1.75	1.12	1.19
05 C(15)	1.000-20 UNEF	1.263	.75	.63	04	1.75	1.25	1.38
06 C(15)	1.000-20 UNEF	1.263	.88	.75	05	1.75	1.43	1.63
07 C(15)	1.000-20 UNEF	1.263	1.00	.88	06	3.00	1.62	1.94
08 D(17)	1.125-18 UNEF	1.387	.88	.75	05	2.25	1.43	1.63
09 D(17)	1.125-18 UNEF	1.387	1.00	.88	06	2.25	1.62	1.94
10 D(17)	1.125-18 UNEF	1.387	1.38	1.19	08	2.25	1.81	2.19
11 E(19)	1.250-18 UNEF	1.513	.88	.75	05	2.25	1.43	1.63
12 E(19)	1.250-18 UNEF	1.513	1.00	.88	06	2.25	1.62	1.94
13 E(19)	1.250-18 UNEF	1.513	1.38	1.19	08	2.25	1.81	2.19
14 F(23)	1.438-18 UNEF	1.703	1.00	.88	06	2.75	1.62	1.94
15 F(23)	1.438-18 UNEF	1.703	1.38	1.19	08	2.75	1.81	2.19
16 F(23)	1.438-18 UNEF	1.703	1.63	1.44	10	3.50	2.18	2.44
17 G(25)	1.562-18 UNEF	1.825	1.00	.88	06	2.75	1.62	1.94
18 G(25)	1.562-18 UNEF	1.825	1.38	1.19	08	2.75	1.81	2.19
19 G(25)	1.562-18 UNEF	1.825	1.63	1.44	10	2.75	2.18	2.44
20 G(25)	1.562-18 UNEF	1.825	1.88	1.63	12	4.00	2.56	2.69
21 H(29)	1.875-16 UN	2.143	1.63	1.44	10	3.25	2.18	2.44
22 H(29)	1.875-16 UN	2.143	1.88	1.63	12	3.25	2.55	2.69
23 J(33)	2.062-16 UNS	2.329	1.88	1.63	12	3.25	2.56	2.69
24 J(33)	2.062-16 UNS	2.329	2.38	2.13	16	3.25	3.06	3.19
25 A(11)	.750-20 UNEF	1.028	.75	.63	04	1.75	1.25	1.38

MATES WITH: M28840/22.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, BACKSHELL, STRAIGHT, CABLE SEALING AND SHIELD TERMINATION

MIL-C-38840/6

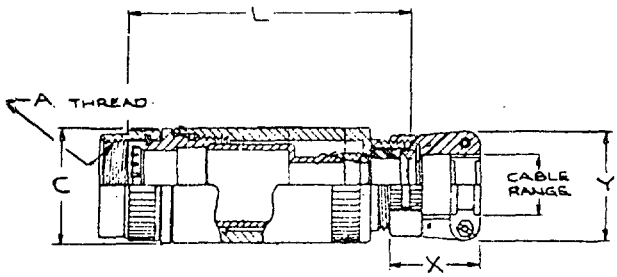

STYLE A

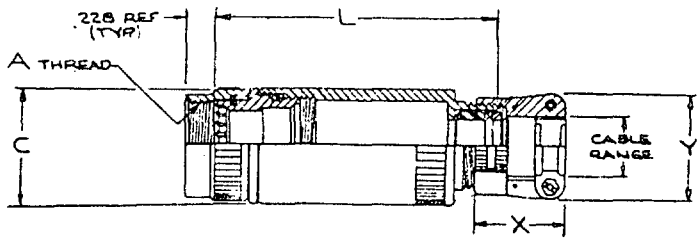

STYLE B

TABLE I. DESIGNATORS AND DIMENSIONS.

DASH NO. & DESIGNATOR	A THREAD CLASS 2B	C MAX DIA	SEAL RANGE MAX	SEAL RANGE MIN	L	X REF	Y REF
01 A(11)	.750-20 UNEF	1.156	.312	.188	3.62	1.281	.938
02 B(13)	.875-20 UNEF	1.156	.312	.188	3.62	1.281	.938
03 B(13)	.875-20 UNEF	1.156	.438	.281	3.62	1.281	1.125
04 C(15)	1.000-20 UNEF	1.281	.312	.188	3.62	1.281	.938
05 C(15)	1.000-20 UNEF	1.281	.438	.281	3.62	1.281	1.125
06 C(15)	1.000-20 UNEF	1.281	.562	.344	3.62	1.281	1.312
07 C(15)	1.000-20 UNEF	1.406	.750	.438	4.12	1.312	1.593
08 D(17)	1.125-18 UNEF	1.406	.625	.375	4.12	1.281	1.312
09 D(17)	1.125-18 UNEF	1.406	.750	.438	4.12	1.312	1.593
10 D(17)	1.125-18 UNEF	1.531	.938	.625	4.12	1.406	1.750
11 E(19)	1.250-18 UNEF	1.531	.625	.375	4.12	1.281	1.312
12 E(19)	1.250-18 UNEF	1.513	.938	.625	4.12	1.406	1.750
13 F(23)	1.438-18 UNEF	1.656	.750	.438	4.62	1.312	1.593
14 F(23)	1.438-18 UNEF	1.656	.938	.625	4.62	1.406	1.750
15 F(23)	1.438-18 UNEF	1.781	1.188	.812	4.62	1.593	2.093
16 G(25)	1.562-18 UNEF	1.781	.938	.625	4.62	1.406	1.750
17 G(25)	1.562-18 UNEF	1.781	1.188	.812	5.12	1.593	2.093
18 G(25)	1.562-18 UNEF	1.781	1.250	.875	5.12	1.593	2.093
19 G(25)	1.562-18 UNEF	2.156	1.380	1.000	5.12	1.625	2.343
20 H(29)	1.875-16 UN	2.156	1.188	.812	5.12	1.593	2.093
21 H(29)	1.875-16 UN	2.156	1.380	1.000	5.12	1.625	2.343
22 J(33)	2.062-16 UNS	2.281	1.380	1.000	5.12	1.625	2.343
23 J(33)	2.062-16 UNS	2.281	1.625	1.250	5.12	1.900	2.750
24 A(11)	.750-20 UNEF	1.156	.438	.281	3.62	1.281	1.125
25 A(11)	.750-20 UNEF	1.281	.562	.344	3.62	1.281	1.312
26 B(13)	.875-20 UNEF	1.281	.562	.344	3.62	1.281	1.312
27 B(13)	.875-20 UNEF	1.406	.625	.375	4.12	1.281	1.312
28 C(15)	1.000-20 UNEF	1.406	.625	.375	4.12	1.281	1.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, DUMMY RECEPTACLE, WALL MOUNTING

MIL-C-28840/7

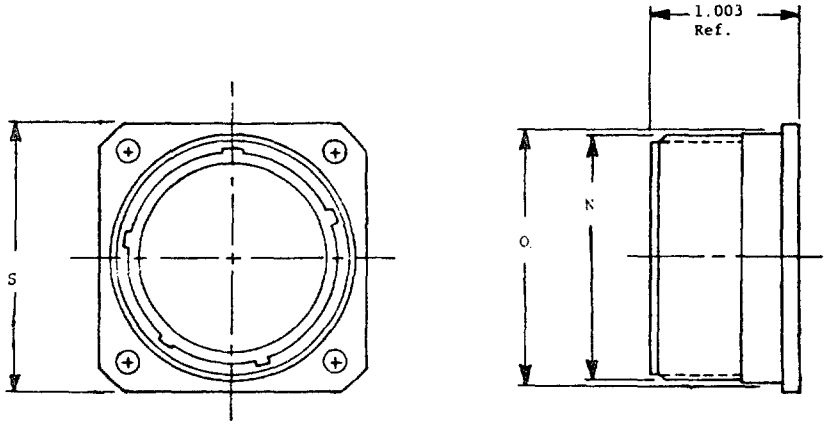


TABLE I. DESIGNATORS AND DIMENSIONS.


DESIGNATOR	N DIA MAX	O REF. MTG. HOLE	S (SQ.) DIA	
A (11)	.750	.812	1.043	1.003
B (13)	.875	.937	1.158	1.118
C (15)	1.062	1.124	1.278	1.238
D (17)	1.125	1.187	1.403	1.363
E (19)	1.312	1.374	1.528	1.488
F (23)	1.500	1.562	1.738	1.698
G (25)	1.625	1.687	1.838	1.798
H (29)	1.812	1.874	2.158	2.118
J (33)	2.000	2.062	2.348	2.308

THESE CONNECTORS MATE WITH M28840/16, /17, /18, /19, /26, /28, AND /29.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, BACKSHELL, 90°, CABLE SEALING AND SHIELD TERMINATION

MIL-C-28840/8

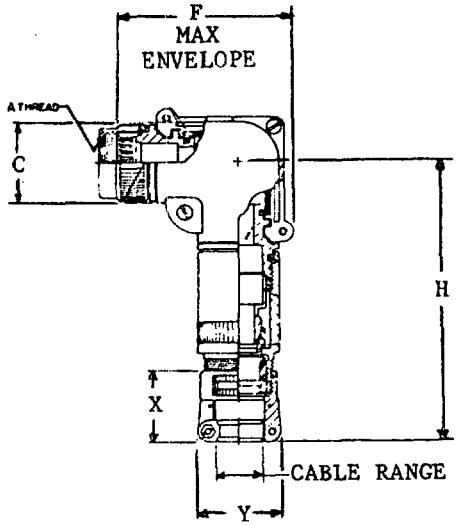

STYLE A

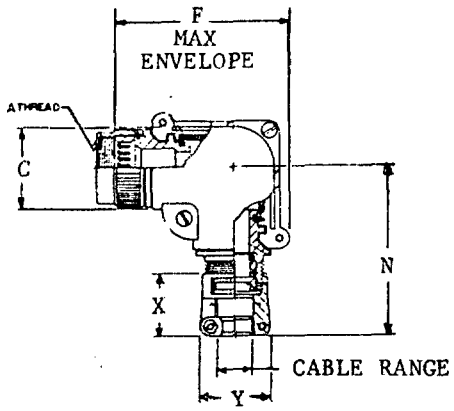

STYLE B

TABLE I. DESIGNATORS AND DIMENSIONS.


BACK-SHELL	DASH NO. & DESIGNATOR	A THREAD CLASS 2B*	C MAX DIA	SEAL RANGE MAX	SEAL RANGE MIN	F	X REF	Y REF	H MAX STYLE A	N MAX STYLE B
A	01 A(11)	.750-20	1.031	.312	.188	2.614	1.281	.938	5.332	2.962
A	02 B(13)	.875-20	1.031	.312	.188	2.614	1.281	.938	5.332	2.962
B	03 B(13)	.875-20	1.031	.438	.281	2.614	1.281	1.125	5.332	2.962
A	04 C(15)	1.000-20	1.281	.312	.188	2.864	1.281	.938	5.457	3.087
B	05 C(15)	1.000-20	1.281	.438	.281	2.864	1.281	1.125	5.457	3.087
C	06 C(15)	1.000-20	1.281	.562	.344	2.864	1.281	1.312	5.457	3.087
D	07 C(15)	1.000-20	1.531	.750	.438	3.114	1.281	1.593	5.682	3.312
A	08 D(17)	1.125-18	1.531	.625	.375	3.114	1.281	1.312	5.682	3.312
B	09 D(17)	1.125-18	1.531	.750	.438	3.114	1.312	1.593	5.713	3.343
C	10 D(17)	1.125-18	1.531	.938	.625	3.114	1.406	1.750	5.807	3.437
A	11 E(19)	1.250-18	1.531	.625	.375	3.114	1.281	1.312	5.682	3.312
B	12 E(19)	1.250-18	1.781	.938	.625	3.364	1.406	1.750	5.832	3.462
A	13 F(23)	1.438-18	1.781	.750	.438	3.364	1.312	1.593	5.738	3.368
B	14 F(23)	1.438-18	1.781	.938	.625	3.364	1.406	1.390	5.832	3.462
C	15 F(23)	1.438-18	1.781	1.188	.812	3.364	1.593	2.093	6.019	3.649
A	16 G(25)	1.562-18	1.781	.938	.625	3.364	1.406	1.750	5.832	3.462
B	17 G(25)	1.562-18	1.781	1.188	.812	3.364	1.593	2.093	6.019	3.649
C	18 G(25)	1.562-18	2.031	1.250	.875	3.614	1.593	2.093	6.144	3.774
D	19 G(25)	1.562-18	2.031	1.380	1.000	3.614	1.625	2.343	6.176	3.806
A	20 H(29)	1.875-16	2.031	1.188	.812	3.614	1.593	2.093	6.144	3.774
B	21 H(29)	1.875-16	2.031	1.380	1.000	3.614	1.625	2.343	6.176	3.806
A	22 J(33)	2.062-16	2.531	1.380	1.000	4.114	1.625	2.343	6.426	4.056
B	23 J(33)	2.062-16	2.531	1.625	1.250	4.114	1.900	2.750	6.701	4.331
B	24 A(11)	.750-20	1.031	.438	.281	2.614	1.281	1.125	5.332	2.962
C	25 A(11)	.750-20	1.281	.562	.344	2.864	1.281	1.312	5.457	3.087
C	26 B(13)	.875-20	1.281	.562	.344	2.864	1.281	1.312	5.457	3.087
D	27 B(13)	.875-20	1.531	.625	.375	3.114	1.281	1.312	5.682	3.312
E	28 C(15)	1.000-20	1.531	.625	.375	3.114	1.281	1.312	5.682	3.312

* UNEF, EXCEPT 1.875-16 UN AND 2.062-16 UNS.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, BACKSHELL, 45°, CABLE SEALING AND SHIELD TERMINATION

MIL-C-28840/9

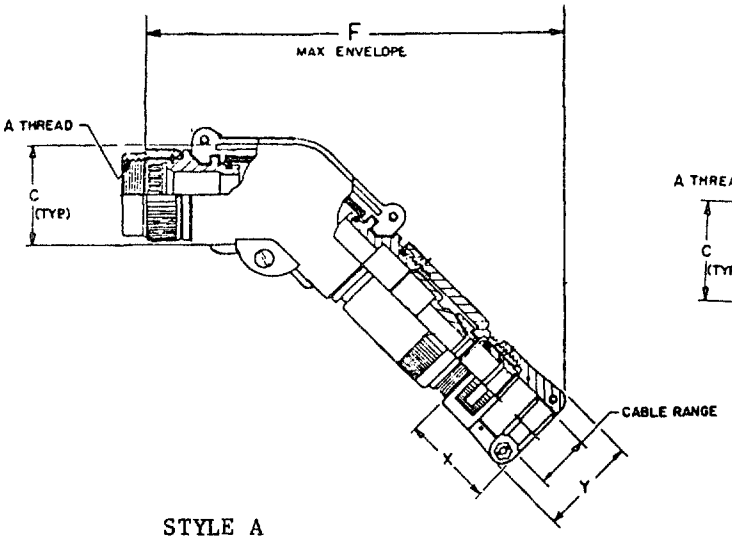

STYLE A

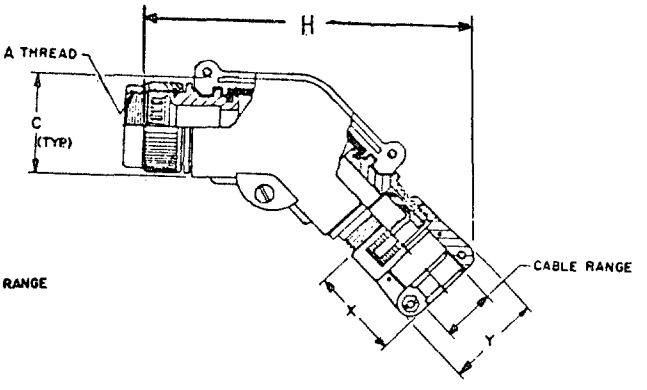

STYLE B

TABLE I. DESIGNATORS AND DIMENSIONS.


BACK-SHELL	DASH NO. & DESIGNATOR	A THREAD CLASS 2B	C MAX DIA	SEAL RANGE MAX	SEAL RANGE MIN	F	H	X REF	Y REF
A	01 A(11)	.750-20 UNEF	1.031	.312	.188	5.879	4.199	1.281	.938
A	02 B(13)	.875-20 UNEF	1.031	.312	.188	5.879	4.199	1.281	.938
B	03 B(13)	.875-20 UNEF	1.031	.438	.281	5.932	4.252	1.281	1.125
A	04 C(15)	1.000-20 UNEF	1.281	.312	.188	6.092	4.412	1.281	.938
B	05 C(15)	1.000-20 UNEF	1.281	.438	.281	6.146	4.466	1.281	1.125
C	06 C(15)	1.000-20 UNEF	1.281	.562	.344	6.202	4.522	1.281	1.312
D	07 C(15)	1.000-20 UNEF	1.513	.750	.438	6.533	4.853	1.312	1.593
A	08 D(17)	1.125-18 UNEF	1.513	.625	.375	6.413	4.733	1.281	1.312
B	09 D(17)	1.125-18 UNEF	1.513	.750	.438	6.533	4.853	1.312	1.395
C	10 D(17)	1.125-18 UNEF	1.513	.938	.625	6.636	4.956	1.406	1.750
A	11 E(19)	1.250-18 UNEF	1.513	.625	.375	6.413	4.733	1.281	1.312
B	12 E(19)	1.250-18 UNEF	1.781	.938	.625	6.846	5.166	1.406	1.750
A	13 F(23)	1.438-18 UNEF	1.781	.750	.438	6.747	5.067	1.312	1.593
B	14 F(23)	1.438-18 UNEF	1.781	.938	.625	6.846	5.166	1.406	1.750
C	15 F(23)	1.438-18 UNEF	1.781	1.388	.812	7.103	5.423	1.593	2.093
A	16 G(25)	1.562-18 UNEF	1.781	.938	.625	6.846	5.156	1.406	1.750
C	17 G(25)	1.562-18 UNEF	1.781	1.188	.812	7.103	5.423	1.593	2.093
C	18 G(25)	1.562-18 UNEF	2.031	1.250	.875	7.316	5.636	1.593	2.093
D	19 G(25)	1.562-18 UNEF	2.031	1.380	1.000	7.425	5.745	1.625	2.343
A	20 H(29)	1.875-16 UN	2.031	1.188	.812	7.316	5.636	1.593	2.093
B	21 H(29)	1.875-16 UN	2.031	1.380	1.000	7.425	5.745	1.625	2.343
A	22 J(33)	2.062-16 UNS	2.531	1.380	1.000	7.852	6.127	1.625	2.343
B	23 J(33)	2.062-16 UNS	2.531	1.625	1.250	8.134	6.454	1.900	2.750
B	24 A(11)	.750-20 UNEF	1.031	.438	.281	5.932	4.252	1.281	1.125
C	25 A(11)	.750-20 UNEF	1.281	.562	.344	6.202	4.522	1.281	1.312
C	26 B(13)	.875-20 UNEF	1.281	.562	.344	6.202	4.522	1.281	1.312
D	27 B(13)	.875-20 UNEF	1.531	.625	.375	6.413	4.733	1.281	1.312
E	28 C(15)	1.000-20 UNEF	1.531	.625	.375	6.413	4.733	1.281	1.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CONNECTORS, BACKSHELL, 90°, METAL CONDUIT FOR EMI SHIELDING

MIL-C-28840/25

STYLE A (FOR M28840/4-**A PLAIN CONDUIT)

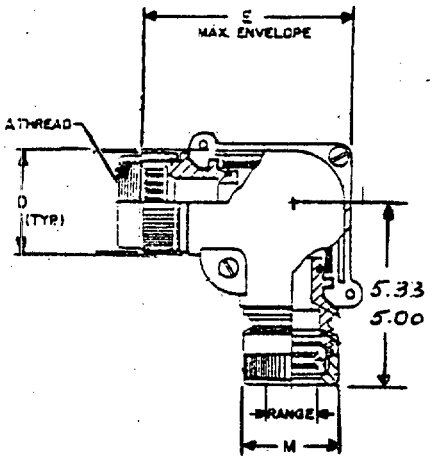


STYLE B (FOR M28840/4-**B JACKET CONDUIT)

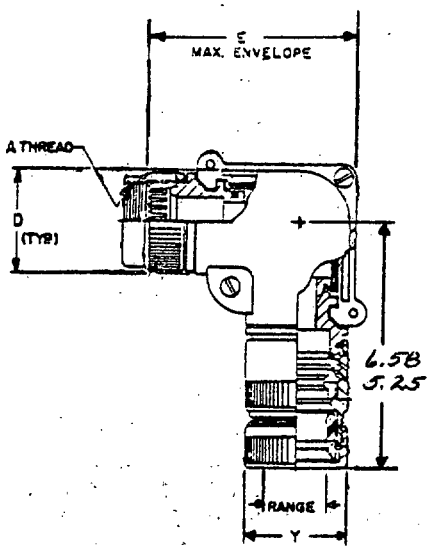


CONNECTORS, BACKSHELL, 45°, METAL CONDUIT FOR EMI SHIELDING

MIL-C-28840/27

STYLE A (FOR M28840/4-**A PLAIN CONDUIT)

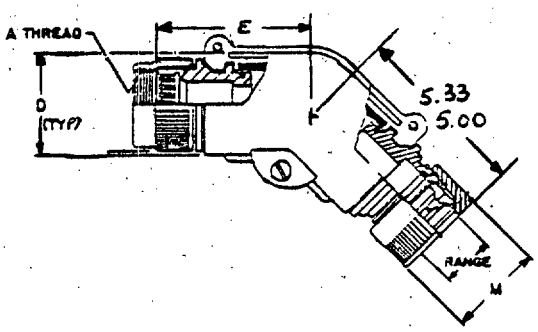

STYLE B (FOR M28840/4-**B JACKET CONDUIT)

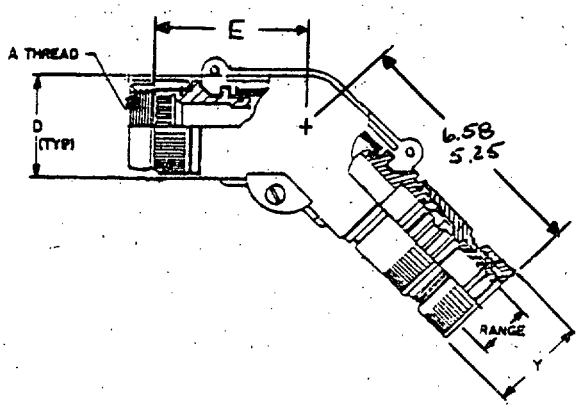

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, BACKSHELL, 90° AND 45°, METAL CONDUIT FOR EMI SHIELDING

MIL-C-28840/25 AND /27

TABLE I. DESIGNATORS AND DIMENSIONS.


DASH NO. & DESIGNATOR	A THREAD CLASS 2B	D MAX DIA	SEAL RANGE MAX	SEAL RANGE MIN	CONDUIT SIZE M28840/4-	E MAX	M MAX DIA	Y MAX DIA
01 A(11)	.750-20 UNEF	1.031	.63	.50	03	2.36	1.12	1.19
02 B(13)	.875-20 UNEF	1.031	.63	.50	03	2.36	1.12	1.19
03 B(13)	.875-20 UNEF	1.031	.75	.63	04	2.36	1.25	1.38
04 C(15)	1.000-20 UNEF	1.281	.63	.50	03	2.56	1.12	1.19
05 C(15)	1.000-20 UNEF	1.281	.75	.63	04	2.56	1.25	1.38
06 C(15)	1.000-20 UNEF	1.281	.88	.75	05	2.56	1.43	1.63
07 C(15)	1.000-20 UNEF	1.531	1.00	.88	06	2.67	1.62	1.94
08 D(17)	1.125-18 UNEF	1.531	.88	.75	05	2.67	1.43	1.63
09 D(17)	1.125-18 UNEF	1.531	1.00	.88	06	2.67	1.62	1.94
10 D(17)	1.125-18 UNEF	1.531	1.38	1.19	08	2.67	1.81	2.19
11 E(19)	1.250-18 UNEF	1.531	.88	.75	05	2.67	1.43	1.63
12 E(19)	1.250-18 UNEF	1.531	1.00	.88	06	2.67	1.62	1.94
13 E(19)	1.250-18 UNEF	1.781	1.38	1.19	08	3.05	1.81	2.19
14 F(23)	1.438-18 UNEF	1.781	1.00	.88	06	3.05	1.62	1.94
15 F(23)	1.438-18 UNEF	1.781	1.38	1.19	08	3.05	1.81	2.19
16 F(23)	1.438-18 UNEF	1.781	1.63	1.44	10	3.05	2.18	2.44
17 G(25)	1.562-18 UNEF	1.781	1.00	.88	06	3.05	1.62	1.94
18 G(25)	1.562-18 UNEF	1.781	1.38	1.19	08	3.05	1.81	2.19
19 G(25)	1.562-18 UNEF	1.781	1.63	1.44	10	3.05	2.18	2.44
20 G(25)	1.562-18 UNEF	2.031	1.88	1.63	12	3.33	2.56	2.69
21 H(29)	1.875-16 UN	2.031	1.63	1.44	10	3.33	2.18	2.44
22 H(29)	1.875-16 UN	2.031	1.88	1.63	12	3.33	2.56	2.69
23 J(33)	2.062-16 UNS	2.531	1.88	1.63	12	3.70	2.56	2.69
24 J(33)	2.062-16 UNS	2.531	2.38	2.13	16	3.70	3.06	3.19
25 A(11)	.750-20 UNEF	1.031	.75	.63	04	2.36	1.25	1.38

MATES WITH: M28840/22.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, METAL CONDUIT FOR EMI SHIELDING

MIL-C-28840/4

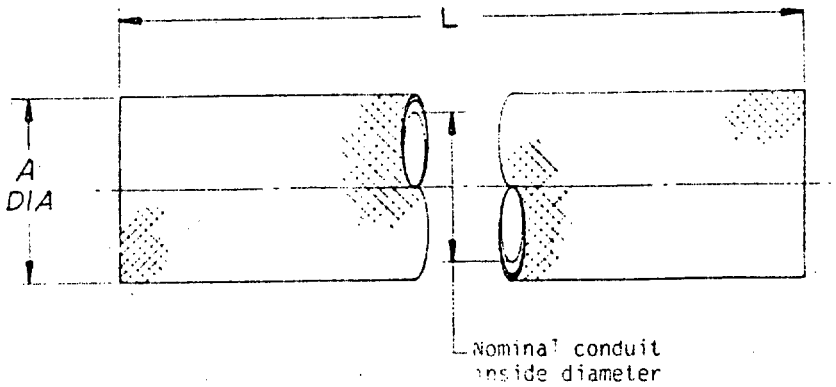

PART NUMBER EXAMPLE: M28840/4 08 AC

M28840/4 — MILITARY STANDARD

08 — SIZE

AC — TYPE DESIGNATOR

- A - PLAIN
- B - INSULATOR JACKET
- C - BRASS CONDUIT
- D - NICKEL-IRON CONDUIT


TABLE I. SIZE AND DIMENSIONS.

SIZE	NOMINAL CONDUIT I.D.	DIMENSIONS	
		A DIA.	L
03	.375	.525	50 FT.
04	.500	.650	MAX
05	.625	.765	
06	.750	.925	
08	1.00	1.210	
10	1.25	1.455	
12	1.500	1.725	
16	2.000	2.200	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, METAL CONDUIT BUSHING

MIL-C-28840/22

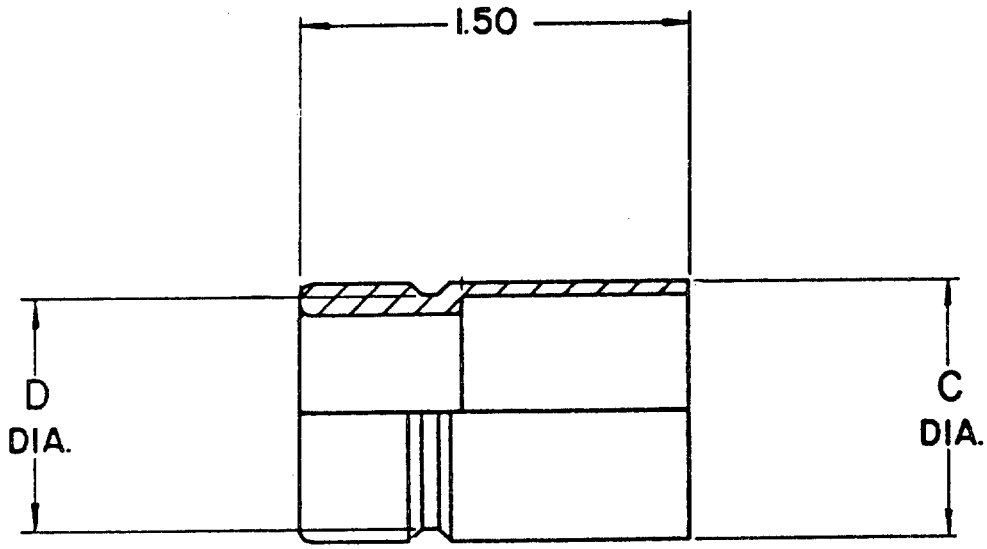

PART NUMBER EXAMPLE: M28840/22-S10

M28840/22- S 10

MILITARY STANDARD

MATERIAL DESIGNATOR
S - CRS

SIZE

TABLE I. SIZE AND DIMENSIONS.

SIZE	CONDUIT SIZE M28840/4-	DIMENSIONS	
		C DIA.	D
03	03	.625	.525
04	04	.750	.650
05	05	.875	.775
06	06	1.00	.900
08	08	1.375	1.275
10	10	1.625	1.525
12	12	1.875	1.775
16	16	2.375	2.275

MATES WITH: M28840/5, /25, /27, AND /30.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, BACKSHELL, GLAND NUT

MIL-C-28840/23

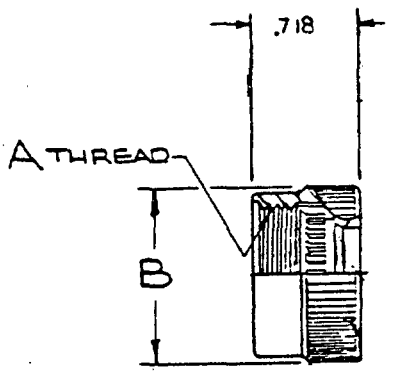


TABLE I. DESIGNATORS AND DIMENSIONS.


DESIGNATOR	A THREAD CLASS 2B	B MAX DIA
A (11)	.750-20 UNEF	1.028
B (13)	.875-20 UNEF	1.141
C (15)	1.000-20 UNEF	1.263
D (17)	1.125-18 UNEF	1.387
E (19)	1.250-18 UNEF	1.513
F (23)	1.438-18 UNEF	1.703
G (25)	1.562-18 UNEF	1.825
H (29)	1.875-16 UN	2.143
J (33)	2.062-16 UNS	2.329


USED WITH M28840/10, /11, /14, AND /16

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, METAL CONDUIT COUPLING

MIL-C-28840/30

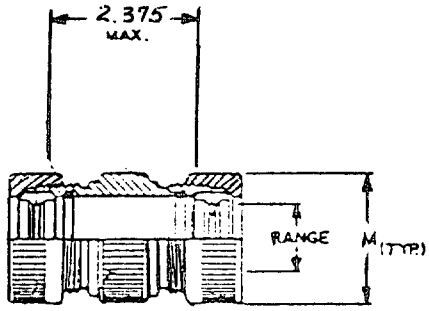

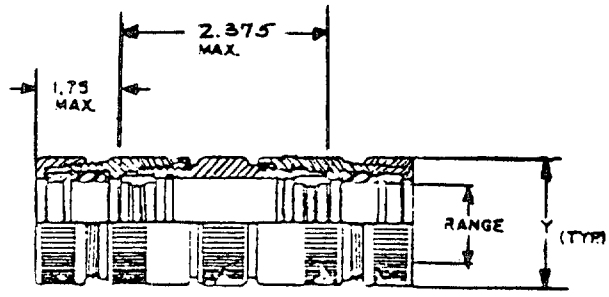

STYLE A (FOR M28840/4-**A PLAIN CONDUIT) STYLE B (FOR M28840/4-**B JACKET CONDUIT)

TABLE I. DESIGNATORS AND DIMENSIONS.


DASH NUMBER	CONDUIT M28840/4-	SEAL RANGE		M MAX DIA	Y MAX DIA
		MAX	MIN		
03	03	.63	.50	1.12	1.19
04	04	.75	.63	1.25	1.38
05	05	.88	.75	1.43	1.63
06	06	1.00	.88	1.62	1.94
08	08	1.38	1.19	1.81	2.19
10	10	1.63	1.44	2.18	2.44
12	12	1.88	1.63	2.56	2.69
16	16	2.38	2.13	3.06	3.19

MATES WITH: M28840/22.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

GASKET FOR FLANGE MOUNTING CONNECTORS

MIL-C-28840/24

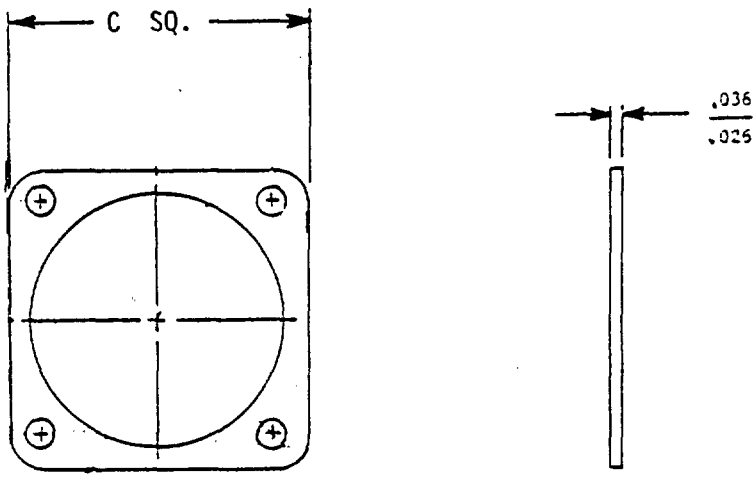

PART NUMBER EXAMPLE: M28840/24-GA

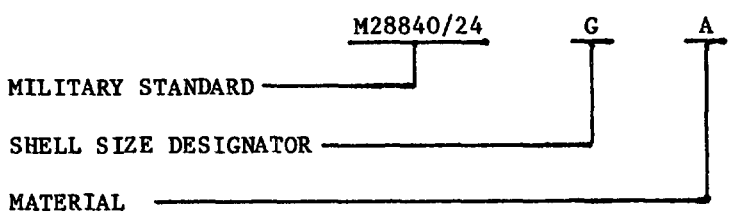

A - FLORINATED SILICONE
B - EMI

TABLE I. SIZE AND DIMENSIONS.

DESIGNATOR	DIMENSION C
A (11)	1.039 1.023
B (13)	1.154 1.138
C (15)	1.274 1.258
D (17)	1.399 1.383
E (19)	1.524 1.508
F (23)	1.734 1.718
G (25)	1.834 1.818
H (29)	2.154 2.138
J (33)	2.344 2.328

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COVER, RECEPTACLE

MIL-C-28840/13

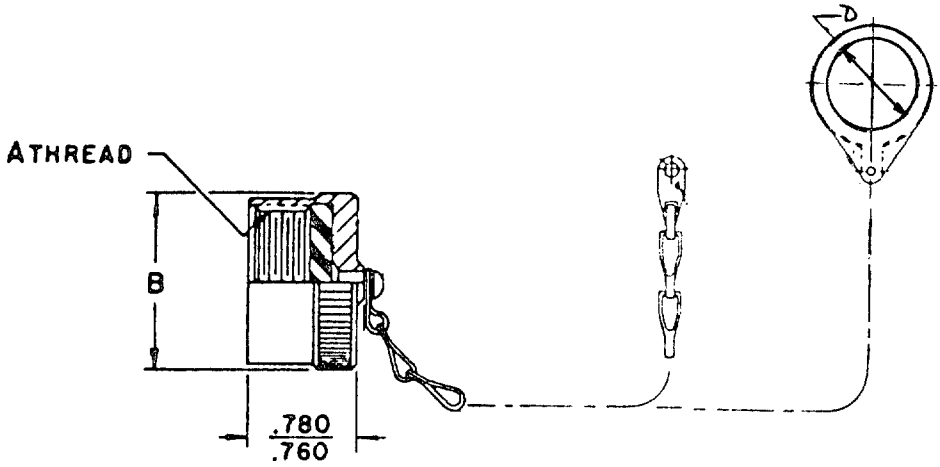


TABLE I. DESIGNATORS AND DIMENSIONS.

DESIGNATOR		A THREAD CLASS 2B -.1P-.2L-DS	B MAX DIA	D
A	(11)	.750	1.028	.890
B	(13)	.875	1.141	1.015
C	(15)	1.062	1.263	1.203
D	(17)	1.125	1.387	1.265
E	(19)	1.312	1.513	1.453
F	(23)	1.500	1.703	1.640
G	(25)	1.625	1.825	1.765
H	(29)	1.812	2.143	1.953
J	(33)	2.000	2.329	2.140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, DUST COVER, PLUG

MIL-C-28840/15

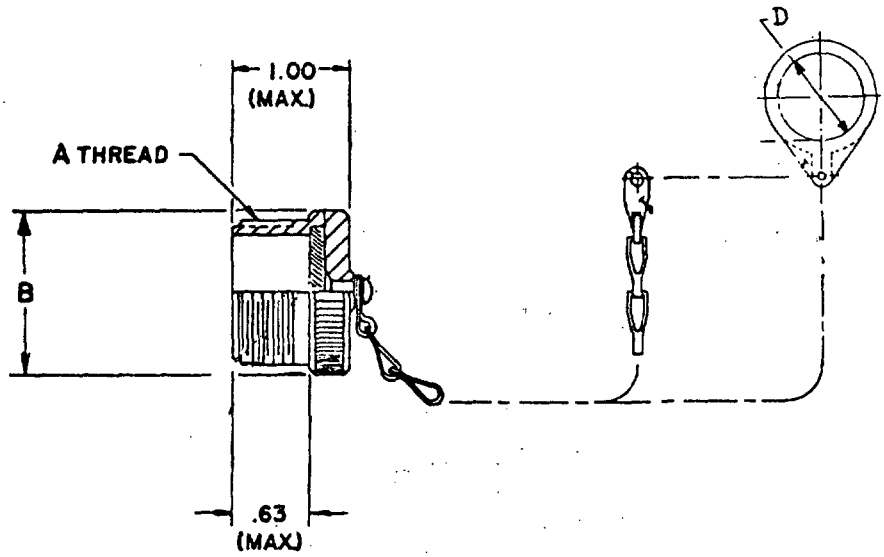


TABLE I. DESIGNATORS AND DIMENSIONS.

DESIGNATOR		A THREAD CLASS 2B -.1P-.2L-DS	B MAX DIA	D
A	(11)	.750	1.028	.765
B	(13)	.875	1.141	.890
C	(15)	1.062	1.263	1.015
D	(17)	1.125	1.387	1.140
E	(19)	1.312	1.513	1.265
F	(23)	1.500	1.703	1.453
G	(25)	1.625	1.825	1.577
H	(29)	1.812	2.143	1.890
J	(33)	2.000	2.329	2.077

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CONNECTOR, ELECTRICAL CIRCULAR, MINIATURE, HIGH DENSITY QUICK DISCONNECT (BAYONET, THREADED AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS

DOD-C-38999

SCOPE: THIS SECTION COVERS SERIES III AND IV OF MINIATURE, HIGH DENSITY BAYONET, THREADED, OR BREECH COUPLING, CIRCULAR, ENVIRONMENT RESISTANT, ELECTRICAL CONNECTORS USING REMOVABLE CRIMP OR FIXED HERMETIC SOLDER CONTACTS, AND ARE CAPABLE OF CONTINUOUS OPERATION WITHIN A TEMPERATURE RANGE OF -65°C TO +150°C. THE INTENDED USE FOR SERIES III AND IV CONNECTORS ARE GENERAL APPLICATIONS WITHIN WEAPONS SYSTEMS AND ARE SUITABLE FOR BLIND MATING AREAS. THESE CONNECTORS PROVIDE HIGH-VIBRATION CHARACTERISTICS AT ELEVATED TEMPERATURES AND ARE SUITABLE FOR SWAMP AREAS WITH THE PROPER CONNECTOR ACCESSORIES.

INSERT ARRANGEMENT: MIL-C-1560 (Page 146.27)

PART NUMBER EXAMPLE: D38999/20FA35PN

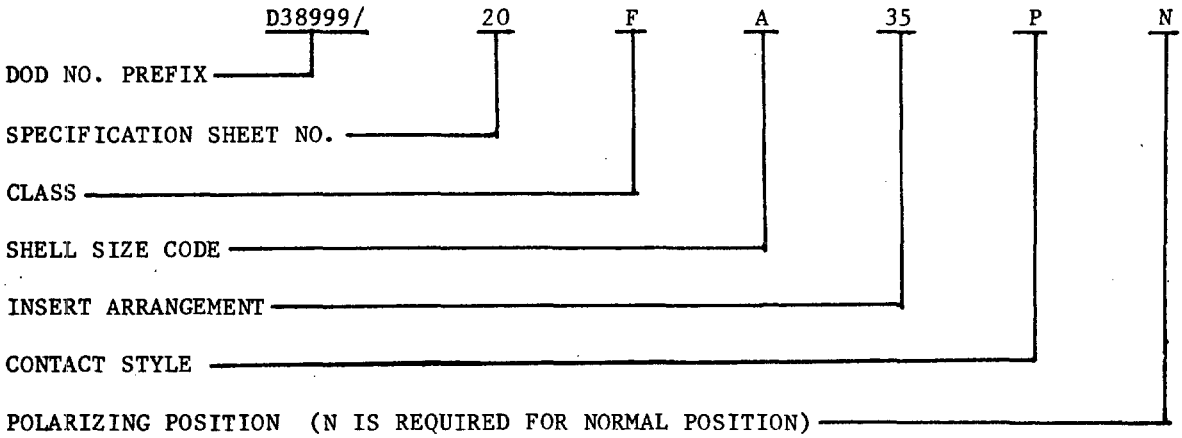

NOTE: NOT FOR SHIP BOARD JACKETED CABLE APPLICATION - FOR HOOK UP WIRE APPLICATION ONLY.


NOTE: DIMENSIONS ARE IN MILLIMETERS FOR ALL DOD-C-38999 CONNECTORS IN THIS SECTION.

Supersedes Page 146.1 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT, (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, WALL MOUNTING FLANGE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

DOD-C-38999/20

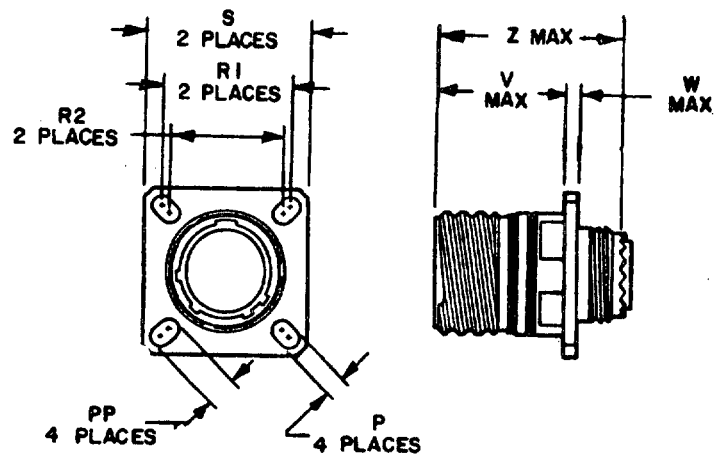

RECEPTACLES, CLASSES K AND W.

TABLE I. SHELL SIZES AND DIMENSIONS.

SHELL SIZE		DIMENSIONS							
	CODE	P DIA	PP	R1 $	R2 #	S	V MAX	W MAX	Z MAX
11	B	3.25	4.93	20.62	18.26	26.2	20.9	2.5	31.5
13	C	3.25	4.93	23.01	20.62	28.6	20.9	2.5	
15	D	3.25	4.39	24.61	23.01	31.0	20.9	2.5	
17	E	3.25	4.93	26.97	24.61	33.3	20.9	2.5	
19	F	3.25	4.93	29.36	26.97	36.5	20.9	2.5	
21	G	3.25	4.93	31.75	29.36	39.7	20.1	3.2	
23	H	3.91	6.15	34.93	31.75	42.9	20.1	3.2	
25	J	3.91	6.15	38.10	34.93	46.0	20.1	3.2	

$ FRONT OR REAR PANEL MOUNTING.
FRONT PANEL MOUNTING ONLY.


NOTE: FINISHES F AND N NOT FOR NAVY USE.

MATES WITH: DOD-C-38999/26

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, HIGH DENSITY, QUICK DISCONNECT BAYONET, (THREADED AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, BOX MOUNTING FLANGE, HERMETIC, TRIPLE START THREADED COUPLING, SERIES III, METRIC

DOD-C-38999/21

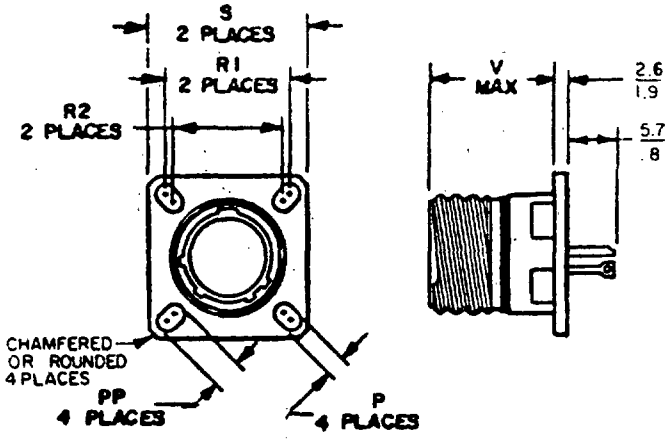

RECEPTACLE, CLASS Y

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL SIZE		DIMENSIONS					
	CODE	P DIA	PP DIA	R1 $	R2 #	S	V MAX
11	B	3.25	4.93	20.62	18.26	26.2	21.4
13	C	3.25	4.93	23.01	20.62	28.6	21.4
15	D	3.25	4.39	24.61	23.01	31.0	21.4
17	E	3.25	4.93	26.97	24.61	33.3	21.4
19	F	3.25	4.93	29.36	26.97	36.5	21.4
21	G	3.25	4.93	31.75	29.36	39.7	21.4
23	H	3.91	6.15	34.93	31.75	42.9	21.4
25	J	3.91	6.15	38.10	34.93	46.0	21.4

$ FRONT OR REAR PANEL MOUNTING.
FRONT PANEL MOUNTING ONLY.


MATES WITH: DOD-C-38999/26

Supersedes Page 146.3 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, JAM-NUT MOUNTING, HERMETIC, TRIPLE START THREADED COUPLING, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

DOD-C-38999/23

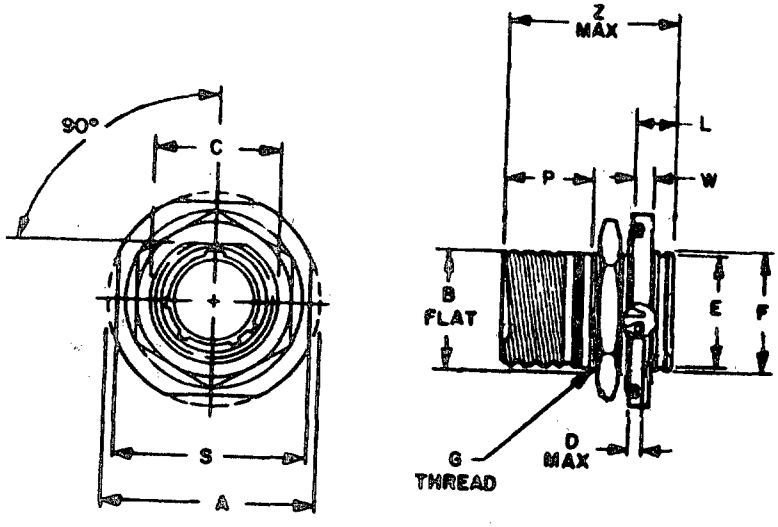

RECEPTACLES, CLASS Y

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL SIZE		DIMENSIONS											
	CODE	A DIA	B FLAT	C DIA	D MAX WITH PIN	D MAX WITH SOCKET	E DIA	F DIA	G THREAD X1-6G 0.100R	L MAX	P	S	Z
11	B	34.9	19.07	20.6	5.3	5.9	18.4	19.4	M20	9.1	14.1	31.8	29.2
13	C	38.1	23.82	25.4	5.1	5.7	21.6	22.7	M25	9.1	14.3	34.9	29.3
15	D	41.3	26.97	28.5	5.1	5.7	24.8	25.9	M28	9.1	14.3	38.1	29.3
17	E	44.5	30.15	----	5.1	5.7	28.0	29.0	M32	9.1	14.3	41.3	29.3
19	F	49.2	33.32	----	5.1	5.7	31.2	32.2	M35	9.7	14.3	46.0	30.1
21	G	52.4	36.50	----	5.1	5.7	34.3	35.4	M38	9.7	14.3	49.2	30.1
23	H	55.6	39.67	41.2	5.1	5.7	37.5	38.6	M41	9.7	14.3	52.4	30.1
25	J	58.7	42.85	44.4	5.1	5.7	40.7	41.7	M44	9.7	14.3	55.6	30.1

MATES WITH: DOD-C-38999/26.


EYELET CONTACT TERMINATION AVAILABLE IN SIZE 16 AND 20 ONLY.

Supersedes Page 146.4 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, JAM-NUT MOUNTING TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC.

DOD-C-38999/24

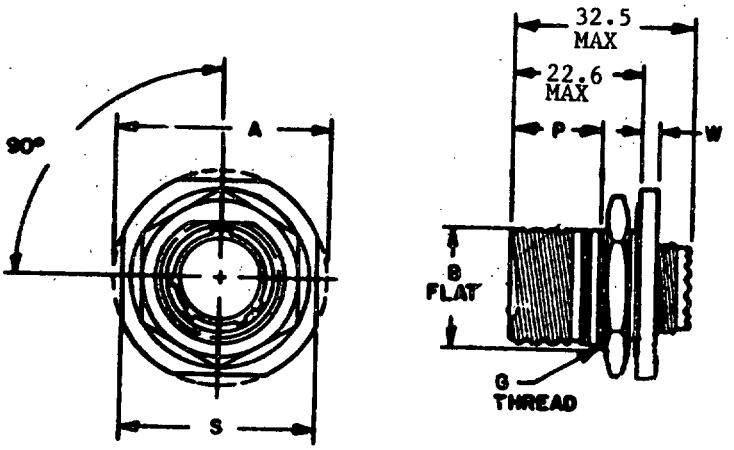

RECEPTACLE, CLASSES K, AND W

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL SIZE		DIMENSIONS					
	CODE	A DIA	B FLAT	G THREAD X1-6G 0.100R	P	S	W
11	B	34.9	19.07	M20	14.1	31.8	2.2
13	C	38.1	23.82	M25	14.3	34.9	2.2
15	D	41.3	26.97	M28	14.3	38.1	2.2
17	E	44.5	30.15	M32	14.3	41.3	2.2
19	F	49.2	33.32	M35	14.3	46.0	3.0
21	G	52.4	36.50	M38	14.3	49.2	3.0
23	H	55.6	39.67	M41	14.3	52.4	3.0
25	J	58.7	42.85	M44	14.3	55.6	3.0


MATES WITH: DOD-C-38999/26

Supersedes Page 146.5 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, SOLDER MOUNTI G, HERMETIC, TRIPLE START THREADED COUPLING, HERMETIC SOLDER CONTACTS, SERIES III, METRIC

DOD-C-38999/25

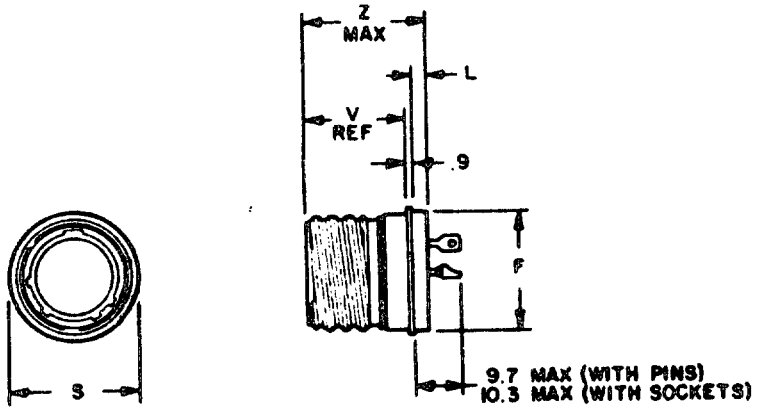

RECEPTACLE, CLASS Y

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL SIZE		DIMENSIONS					
	CODE	F MAX	L MAX	S MAX	V WITH PINS	V WITH SOCKETS	Z MAX
11	B	19.9	5.1	21.8	17.2	19.4	23.8
13	C	23.1	5.1	24.9	17.2	19.4	23.8
15	D	26.2	5.1	28.1	17.2	19.4	23.8
17	E	29.4	5.1	31.3	17.2	19.4	23.8
19	F	31.8	5.1	33.6	17.2	19.4	23.8
21	G	35.0	5.1	36.8	17.2	19.4	23.8
23	H	38.2	5.9	40.0	17.2	19.4	24.6
25	J	41.3	5.9	43.2	17.2	19.4	24.6


MATES WITH: DOD-C-3899/26

Supersedes Page 146.6 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, STRAIGHT, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SERIES III, METRIC

DOD-C-38999/26

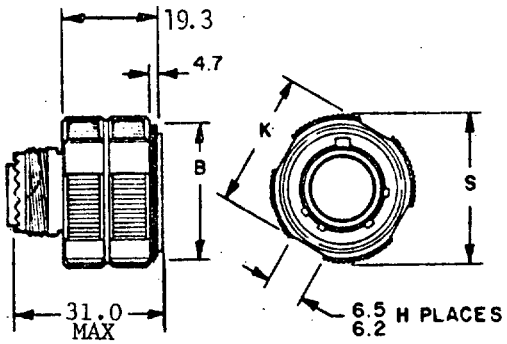

PLUG, CLASS K

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL SIZE CODE	DIMENSIONS B	H NUMBER OF FLATS	K MAX	S DIA MAX
11 B	21.1	4	21.9	25.0
13 C	25.4	4	26.1	29.4
15 D	28.7	4	29.3	32.5
17 E	32.2	4	32.8	35.7
19 F	34.9	8	35.5	38.5
21 G	38.1	8	38.7	41.7
23 H	41.1	8	41.7	44.9
25 J	44.3	8	44.9	48.0


MATES WITH: DOD-C-38999/20, /21, /23, /24, /25 AND /27

Supersedes Page 146.7 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, LANYARD RELEASE, FAIL-SAFE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, PINS, SERIES III METRIC

DOD-C-38999/29

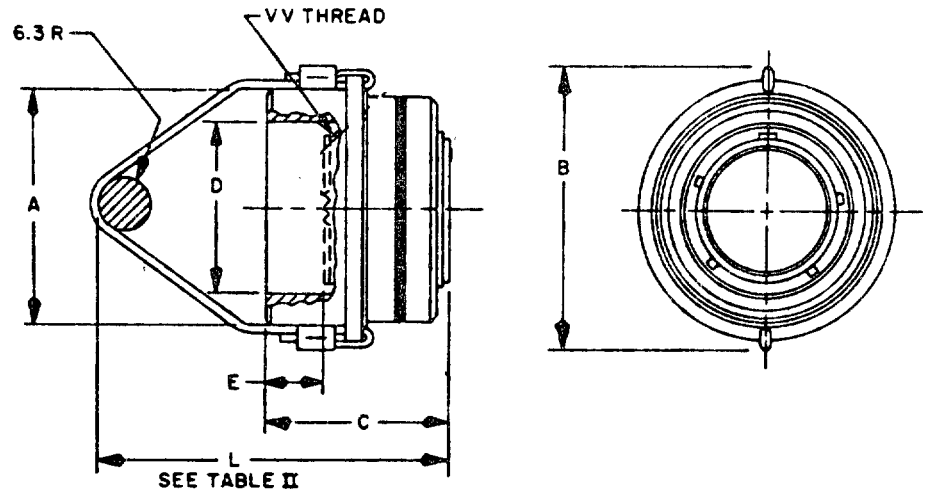

PLUG, CLASS W

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL SIZE	SIZE CODE	DIMENSIONS					
		A MAX OVER KNURL	B MAX	C MAX	D MIN	E MAX	VV THREAD X1.0-6G 0.100R
17	E	46.1	56.0	46.1	29.8	21.0	M25
19	F	49.3	59.2	46.1	33.0	21.0	M28
25	J	58.4	68.7	46.1	42.5	21.0	M37

MATES WITH: DOD-C-38999/20, /21, /23, /24, /25 AND 27

Supersedes Page 146.8 of 16 August 1982.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, LANYARD RELEASE, FAIL-SAFE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, PINS, SERIES III METRIC

DOD-C-38999/29

TABLE II. LANYARD LENGTH CODES.

CODE	L	CODE	L
A	102	N	267
B	115		
C	127	P	280
D	140	R	293
E	153	S	305
F	166	T	318
G	178	U	331
H	191	V	356
I	203	W	381
J	216	X	407
K	229	Y	432
L	242	Z	458
M	254		

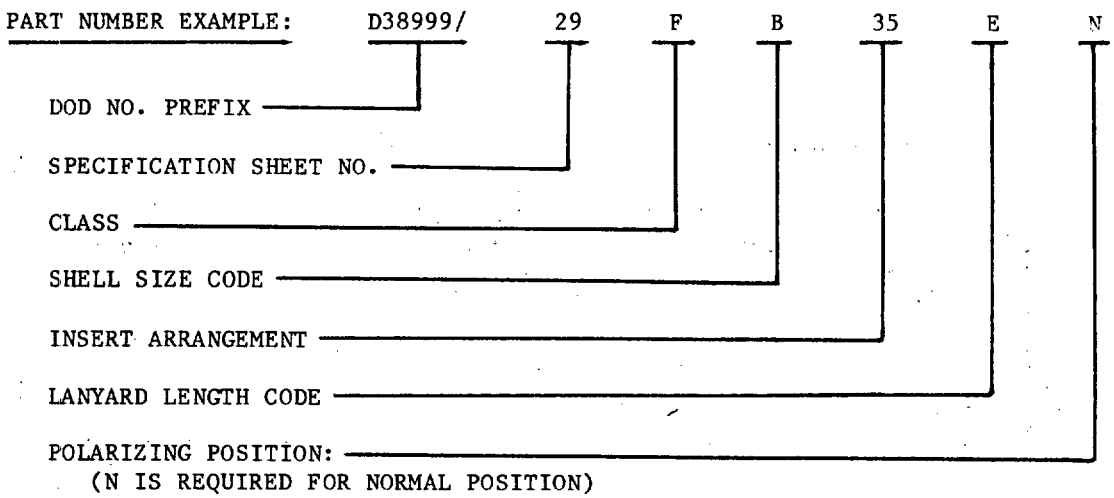


Supersedes Page 146.9 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIAUTRE, HIGH DENSITY, Q UICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, LANYARD RELEASE, FAIL-SAFE, TRIPLE START THREADED COUPLING, REMOVABLE CRIMP CONTACTS, SOCKETS, SERIES III METRIC

DOD-C-38999/30

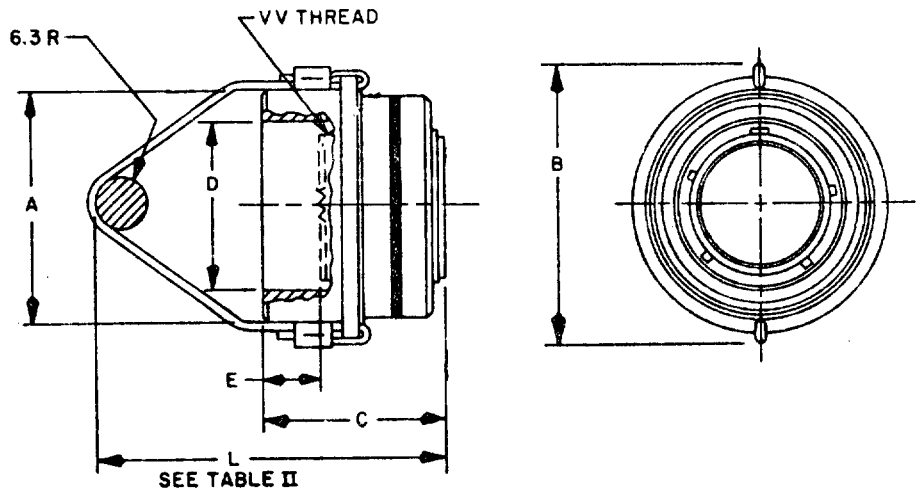

PLUG, CLASSES W

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL	SIZE CODE	DIMENSIONS A MAX OVER KNURL	B MAX	C MAX	D MIN	E MAX	VV THREAD X1.0-6G 0.100R
17	E	46.1	56.0	46.1	29.8	21.0	M25
19	F	49.3	59.2	46.1	33.0	21.0	M28
25	J	58.4	68.7	46.1	42.5	21.0	M37

MATES WITH: DOD-C-38999/20, /21, /23, /24, /25, AND /27

Supersedes Page 146.10 of 16 August 1982.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT, (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, LANYARD RELEASE, FAIL-SAFE, TRIPLE START STREADED COUPLING, REMOVABLE CRIMP CONTACTS, SOCKETS, SERIES III, METRIC

DOD-C-38999/30

TABLE II. LANYARD LENGTH CODES.

CODE	L		CODE	L
A	102		N	267
B	115			
C	127		P	280
D	140		R	293
E	153		S	305
F	166		T	318
G	178		U	331
H	191		V	356
I	203		W	381
J	216		X	407
K	229		Y	432
L	242		Z	458
M	254			

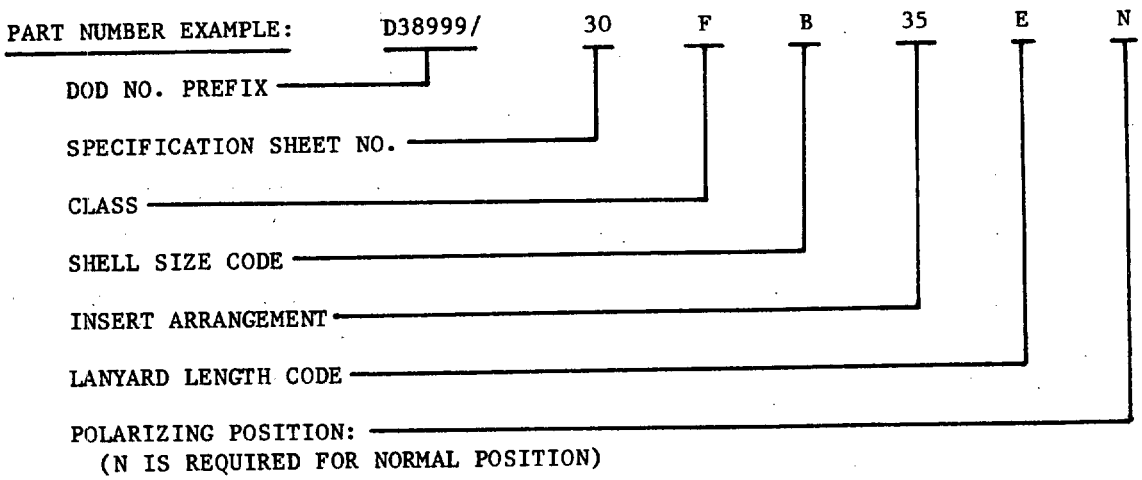


Supersedes Page 146.11 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUIK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, WALL MOUNTING FLANGE, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

DOD-C-38999/40

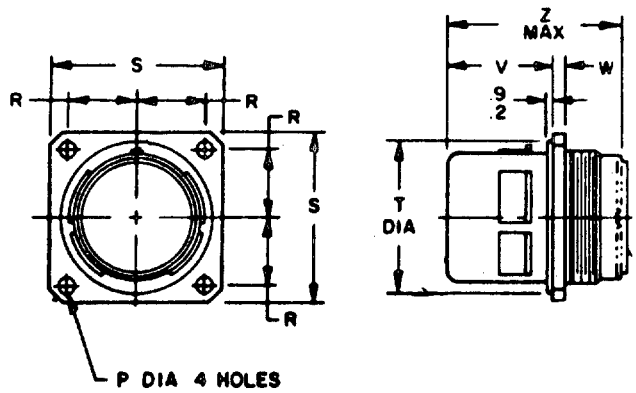

RECEPTACLE, CLASSES C AND W

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL SIZE		DIMENSIONS						
	CODE	P DIA	R BSC	S	T DIA	V	W	Z MAX
11	B	3.5 3.1	10.31	26.7 25.6	20.15 19.76	20.8 19.2	2.6 2.1	32.0
13	C		11.51	29.1 28.0	23.35 22.96			
15	D		12.31	31.5 30.4	26.52 26.13			
17	E		13.49	33.9 32.8	29.72 29.33			
19	F		14.68	37.1 36.0	32.87 32.48			
21	G		15.88	40.2 39.1	36.05 35.66		3.4 2.9	
23	H	4.0 3.6	17.46	43.4 43.3	39.22 38.83			
25	J		19.05	46.6 45.5	42.40 42.01			


MATES WITH: DOD-C-38999/46 AND /47

Supersedes Page 146.12 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, BOX MOUNTING FLANGE, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

DOD-C-38999/42

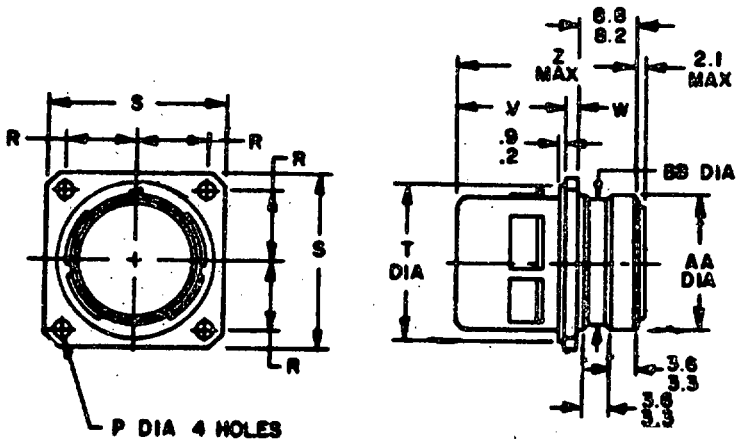

RECEPTACLE, CLASSES C AND W

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL	SIZE CODE	DIMENSIONS								
		AA DIA	BB DIA	P DIA	R BSC	S	T DIA	V	W	Z MAX
11	B	14.7 14.3	13.6 13.2		10.31	26.7 25.6	20.15 19.76			
13	C	17.6 17.2	16.5 16.1		11.51	29.1 28.0	23.35 22.96		2.6	
15	D	20.8 20.4	19.6 19.2	3.5 3.1	12.31	31.5 30.4	26.52 26.13		2.1	
17	E	24.0 23.6	22.8 22.4		13.49	33.9 32.8	29.72 29.33	20.8		
19	F	26.7 26.3	25.5 25.1		14.68	37.1 36.0	32.87 32.48	19.2		32.0
21	G	29.8 29.4	28.7 28.3		15.88	40.2 39.1	36.05 35.66			
23	H	33.0 32.6	31.9 31.5	4.0 3.6	17.46	43.4 43.3	39.22 33.83		3.4 2.9	
25	J	36.2 35.8	35.0 34.6		19.05	46.6 45.5	42.40 42.01			


MATES WITH: DOD-C-38999/46 AND /47

Supersedes Page 146.13 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, JAM-NUT MOUNTING, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

DOD-C-38999/44

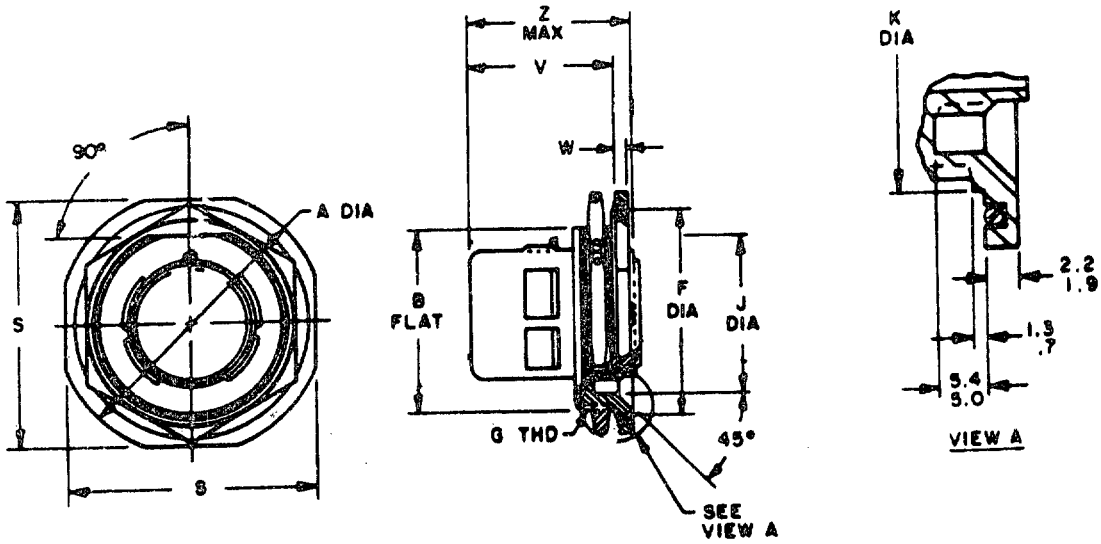

RECEPTACLE, CLASSES C AND W
TABLE I. SHELL SIZE AND DIMENSIONS.


SHELL	SIZE CODE	DIMENSIONS A DIA	B FLAT	F DIA	G THREAD PLATED X1-6G 0.1R	J DIA	K DIA	S	V	W	Z MAX
11	B	38.6 37.6	23.93 23.74	27.84 27.55	M25	20.42 20.17	25.40 20.15	35.4 34.4			
13	C	41.7 40.7	27.08 26.89	31.02 30.73	M28	23.57 23.32	28.58 28.33	38.6 37.6			
15	D	44.9 43.9	30.26 30.07	34.19 33.90	M31	26.56 26.31	31.75 31.50	41.7 40.7			
17	E	49.7 48.7	33.56 33.37	37.67 37.38	M34	30.02 29.77	34.92 34.67	45.7 44.7	28.4 27.5	2.7 2.1	32.0
19	F	51.7 50.7	36.61 36.42	40.85 40.56	M38	32.91 32.66	38.10 37.85	48.5 47.5			
21	G	54.8 53.8	39.78 39.59	44.02 43.73	M41	36.11 35.86	41.28 41.03	51.7 50.7			
23	H	58.0 57.0	42.96 42.77	47.20 46.91	M44	39.26 39.01	44.45 44.20	54.8 53.0			
25	J	61.2 60.2	46.13 45.94	50.37 50.08	M47	42.46 42.21	47.63 47.38	58.0 57.0			

MATES WITH: DOD-C-38999/46 AND /47

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, BREECH COUPLING, EMI GROUNDING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

DOD-C-38999/46

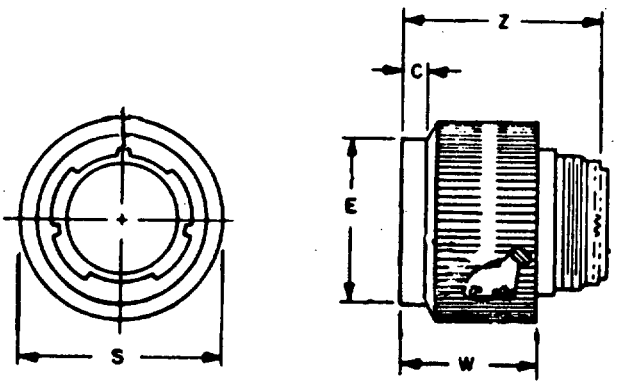

PLUG, CLASS W

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL SIZE	CODE	DIMENSIONS C MIN	E DIA MAX	S DIA MAX	W MAX	Z MAX MATED	Z MAX UNMATED
11	B		19.7	26.6			
13	C		22.9	31.0			
15	D		26.4	34.2			
17	E		29.2	37.4			
19	F	4.8	32.4	40.2	27.0	36.5	38.9
21	G		35.6	43.3			
23	H		38.8	46.5			
25	J		41.9	49.7			


MATES WITH: DOD-C-38999/40, /42 AND /44

Supersedes Page 146.15 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, PLUG, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

DOD-C-38999/47

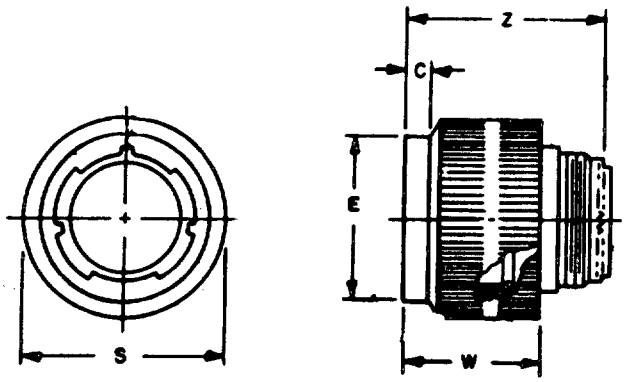

PLUG, CLASS C

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL	SIZE CODE	DIMENSIONS					
		C MIN	E DIA MAX	S DIA MAX	W MAX	Z MAX MATED	Z MAX UNMATED
11	B		19.7	26.6			
13	C		22.9	31.0			
15	D		26.4	34.2			
17	E		29.2	37.4			
19	F	4.8	32.4	40.2	27.0	36.5	38.9
21	G		35.6	43.3			
23	H		38.8	46.5			
25	J		41.9	49.7			


MATES WITH: DOD-C-38999/40, /42 AND /44

Supersedes Page 146.16 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, CIRCULAR, MINIATURE, HIGH DENSITY, QUICK DISCONNECT (BAYONET, THREADED, AND BREECH COUPLING), ENVIRONMENT RESISTANT, REMOVABLE CRIMP AND HERMETIC SOLDER CONTACTS, RECEPTACLE, IN LINE CABLE, BREECH COUPLING, REMOVABLE CRIMP CONTACTS, SERIES IV, METRIC

DOD-C-38999/49

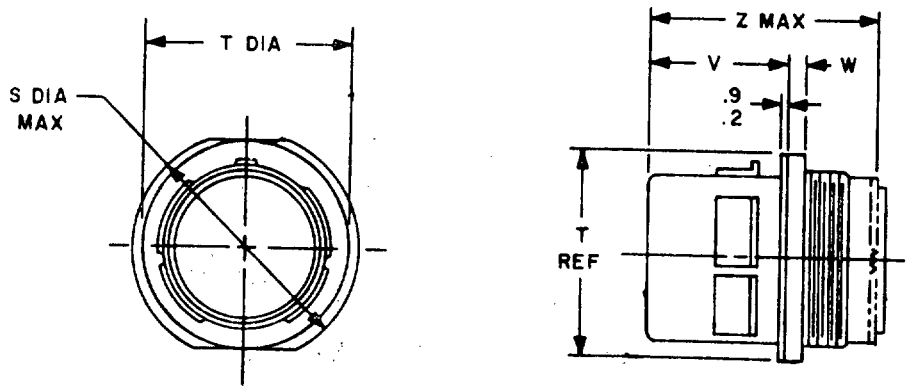

RECEPTACLE, CLASSES C AND W

TABLE I. SHELL SIZE AND DIMENSIONS.

SHELL	SIZE CODE	DIMENSIONS S	T DIA	V	W	Z DIA
11	B	26.78	20.15 19.76	20.8 19.2	2.6 2.1	32.0
13	C	31.15	23.35 22.96			
15	D	34.32	26.52 26.13			
17	E	37.5	29.72 29.33			
19	F	40.29	32.87 32.48			
21	G	43.46	36.05 35.66		3.4 2.9	
23	H	46.64	39.22 38.83			
25	J	49.89	42.40 42.01			

MATES WITH: DOD-C-38999/46 AND /47

Supersedes Page 146.17 of 16 August 1982.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER

W-C-596

SCOPE: THIS SECTION COVERS ELECTRIC PLUGS, RECEPTACLES AND CABLE OUTLETS FOR SERVICE FROM 120 TO 600 VOLTS WITH CURRENT RATINGS UP TO 30 AMPERES AND A FREQUENCY RATING OF 60 AND 400 Hz DC. CONNECTORS ARE TO BE USED WITH COPPER OR COPPERCLAD ALUMINUM WIRE ONLY. THESE CONNECTORS ARE INTENDED FOR USE IN ANY ELECTRICAL CIRCUIT WITHIN THEIR VOLTAGE, CURRENT, FREQUENCY AND PHYSICAL LIMITATIONS. THEY ARE DESIGNED WITH MATING POLARIAZATION FOR SPECIFIC CURRENT RATING, VOLTAGE, FREQUENCY (Hz), PHASE, AND GROUNDING REQUIREMENTS. THIS PREVENTS MATING WITH A CONNECTOR OF INCOMPATIBLE POWER CHARACTERISITCS.

PART NUMBER EXAMPLE: WC596/11-1

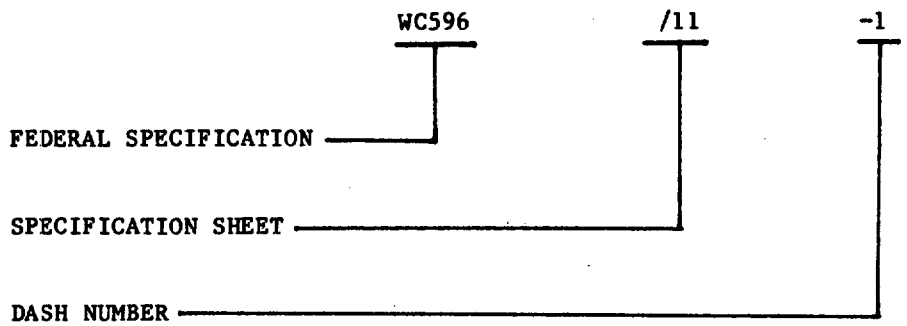

Supersedes Page 164.1 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER

W-C-596

TABLE I. STANDARD CONNECTORS, WC596 TYPE.


RATING		TYPE OF CONNECTOR	WC596 PART NUMBER	CONFIGURATION
AMPERES	VOLTAGE 50/60 Hz			
NONLOCKING 2 POLE, 3 WIRE, GROUNDING, 50/60 Hz				
15	125	RECEPTACLE/SINGLE	WC596/11-1	
15	125	RECEPTACLE/SINGLE	WC596/11-2	
15	125	RECEPTACLE/DUPLEX	WC596/12-1	
15	125	RECEPTACLE/DUPLEX	WC596/12-2	
15	125	RECEPTACLE/DUPLEX	WC596/12-3	
15	125	RECEPTACLE/DUPLEX	WC596/12-4	
15	125	PLUG, STRAIGHT	WC596/13-3	
15	125	PLUG, RIGHT ANGLE	WC596/13-4	
15	125	CABLE OUTLET	WC596/14-2	
15	125	MALE INLET	WC596/140-1	
15	250	RECEPTACLE/SINGLE	WC596/15-1	
15	250	RECEPTACLE/DUPLEX	WC596/16-1	
15	250	PLUG	WC596/17-1	
15	250	CABLE OUTLET	WC596/18-1	
15	250	MALE INLET	WC596/141-1	
15	277	PLUG, STRAIGHT	WC596/73-1	
15	277	CABLE OUTLET	WC596/74-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER

W-C-596

TABLE I. STANDARD CONNECTORS, WC596 TYPE - CONTINUED.


RATING		TYPE OF CONNECTOR	WC596 PART NUMBER	CONFIGURATION
AMPERES	VOLTAGE			
	LOCKING 2 POLE, 3 WIRE, GROUNDING, 50/60 Hz			
20	125	MALE INLET	WC596/97-1	
20	250	MALE INLET	WC596/84-1	
20	277	MALE INLET	WC596/110-1	
30	125	RECEPTACLE, SINGLE	WC596/90-1	
30	250	RECEPTACLE, SINGLE	WC596/77-1	
30	277	RECEPTACLE, SINGLE	WC596/103-1	
	LOCKING 3 POLE, 4 WIRE, GROUNDING, 50/60 Hz			
20	125/250	RECEPTACLE, SINGLE	WC596/120-1	
20	250 3-PH	RECEPTACLE, SINGLE	WC596/124-1	
30	125/250 1-PH	RECEPTACLE, SINGLE	WC596/116-1	
30	250	RECEPTACLE, SINGLE	WC596/128-1	
	LOCKING 4 POLE, 5 WIRE, GROUNDING, 50/60 Hz			
20	120/208	RECEPTACLE, SINGLE	WC596/136-1	
30	120/208	RECEPTACLE, SINGLE	WC596/132-1	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTOR, PLUG, RECEPTACLE AND CABLE OUTLET, ELECTRICAL POWER

W-C-596

TABLE I. STANDARD CONNECTORS, WC596 TYPE - CONTINUED.

RATING		TYPE OF CONNECTOR	WC596 PART NUMBER	CONFIGURATION
AMPERES	VOLTAGE			
LOCKING 2 POLE, 3 WIRE, DC				
30	28	RECEPTACLE, SINGLE	WC596/148-1	
30	28	PLUG	WC596/149-1	
30	28	CABLE OUTLET	WC596/150-1	
LOCKING 2 POLE, 3 WIRE, 400 Hz				
30	120	RECEPTACLE, SINGLE	WC596/151-1	
30	120	PLUG	WC596/152-1	
30	120	CABLE OUTLET	WC596/153-1	
LOCKING 3 POLE, 4 WIRE, 400 Hz				
30	120	RECEPTACLE, SINGLE	WC596/154-1	
30	120	PLUG	WC596/155-1	
30	120	CABLE OUTLET	WC596/156-1	
LOCKING 4 POLE, 5 WIRE, 400 Hz				
30	120/208	RECEPTACLE, SINGLE	WC596/157-1	
30	120/208	PLUG	WC596/158-1	
30	120/208	CABLE OUTLET	WC596/159-1	


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR AND COMPONENT PARTS

MIL-C-28754

SCOPE: THIS SECTION COVERS THE GENERAL REQUIREMENTS FOR RACK AND PANEL CONNECTORS, BASE PLATE CONNECTORS, MODULAR CONNECTORS, CABLE CONNECTORS AND THE COMPONENT PARTS. THESE CONNECTORS ARE INTENDED TO BE USED IN GROUND SUPPORT, AIRBORNE AND SHIPBOARD ELECTRICAL AND ELECTRONIC EQUIPMENT.

EXAMPLE PART NUMBER: M28754 /6 -01

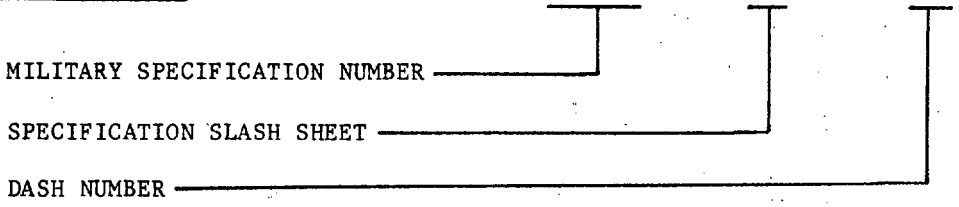

TEMPERATURE RATING: -55°C TO 105°C


VOLTAGE RATING: 300 VOLTS, ac (rms)

Supersedes Page 174.1 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL MODULAR, TYPE IV, 40 PIN, STRAIGHT THROUGH

MIL-C-28754/6

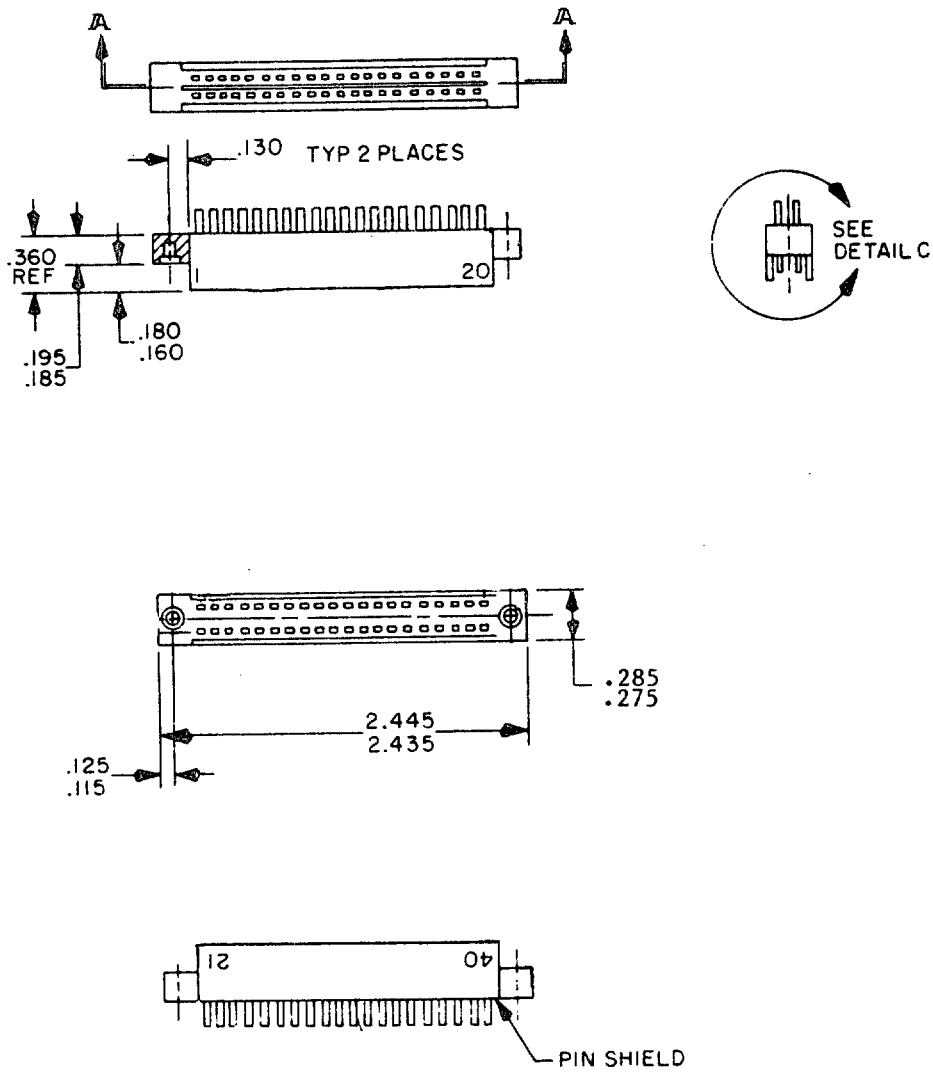


Supersedes Page 174.2 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 PIN, RIGHT ANGLE (FOR SOLID OR DIP FRAME)

MIL-C-28754/11

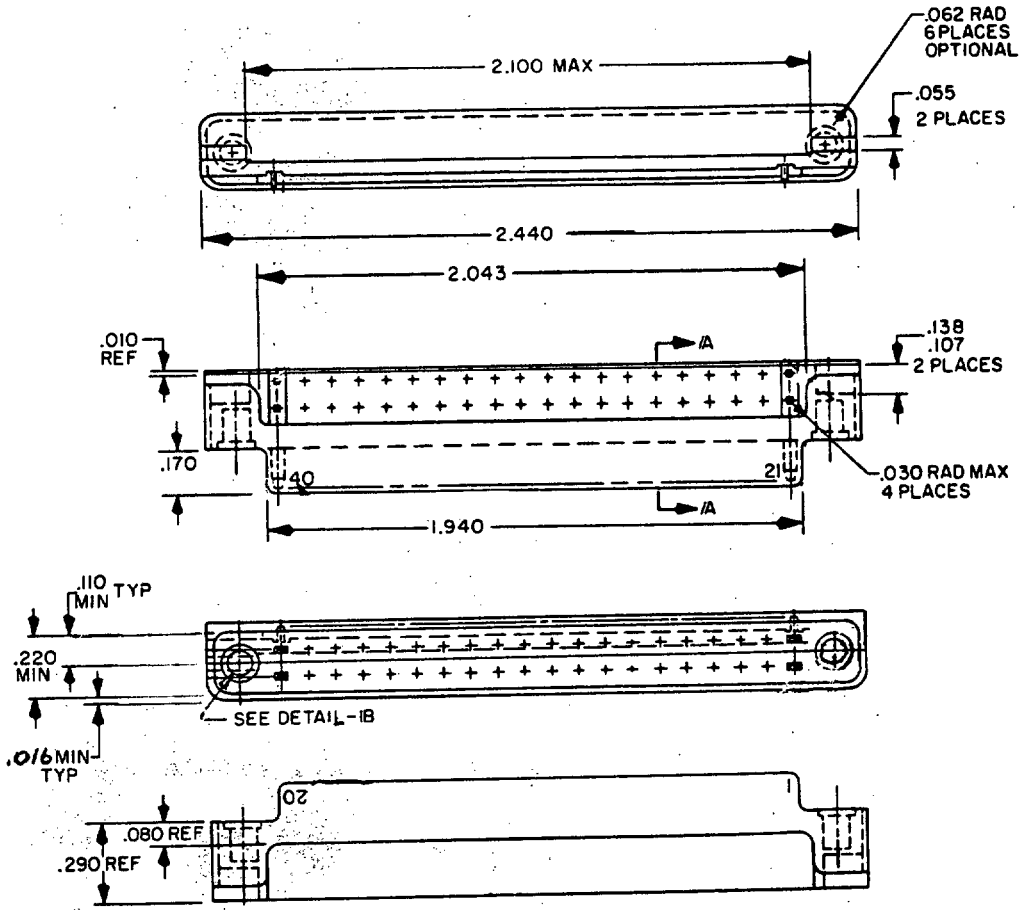

Supersedes Page 174.13 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, 40 PIN, RIGHT ANGLE (FOR SOLID OR DIP FRAME)

MIL-C-28754/11

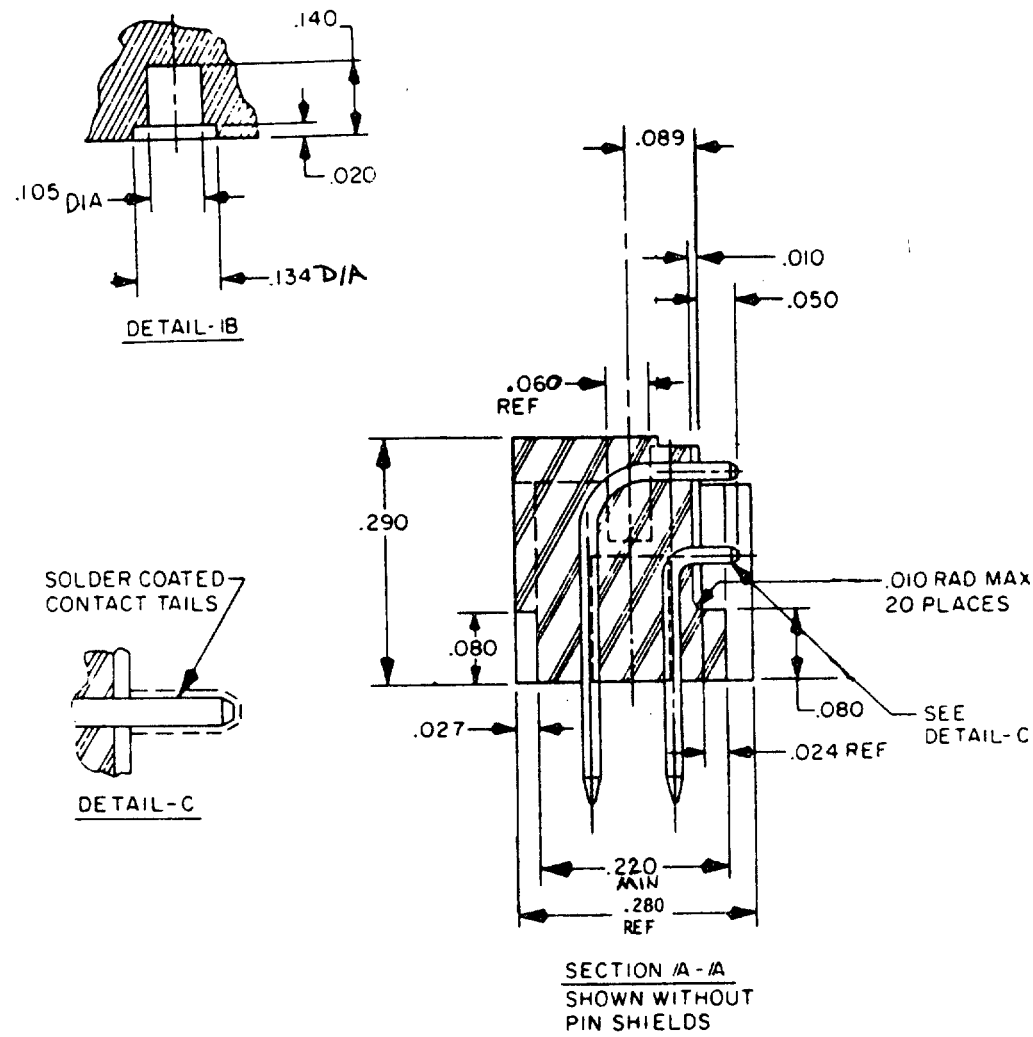


TABLE I. PART NUMBER AND APPLICABLE CONNECTOR ASSEMBLY.

PART NUMBER	APPLICABLE CONNECTOR ASSEMBLY
M28754/11-02	M28754/12-03, M28754/12-04 M28754/12-05 M28754/9-02

Supersedes Page 174.14 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, BLOCK, 40 PIN, TYPE V, STRAIGHT THROUGH

MIL-C-28754/16

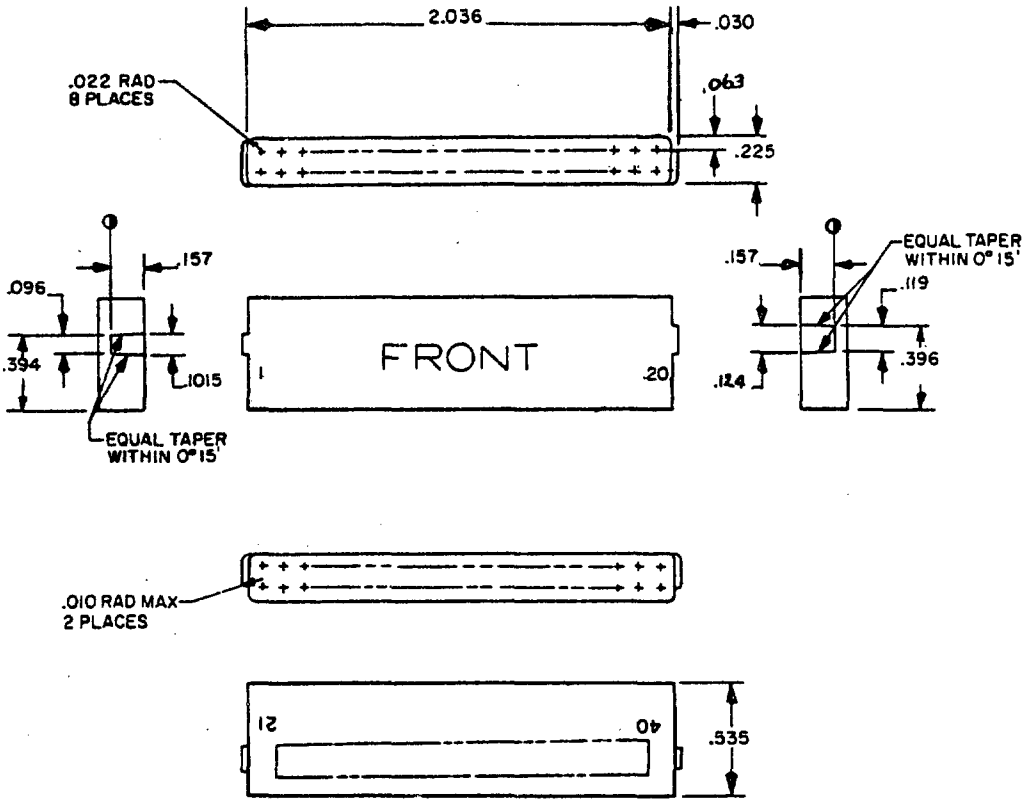


TABLE I. DASH NUMBER AND CHARACTERISTICS.


PART NUMBER	CRIMP CONTACT	B DIA.	APPLICABLE CONTACT
M28754/16-01	26 28 30	.076	M28754/15-01 BLUE COLOR

Supersedes Page 174.21 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, STYLE I,
CONTACT TAILS ON .100 CENTERS

MIL-C-28754/17

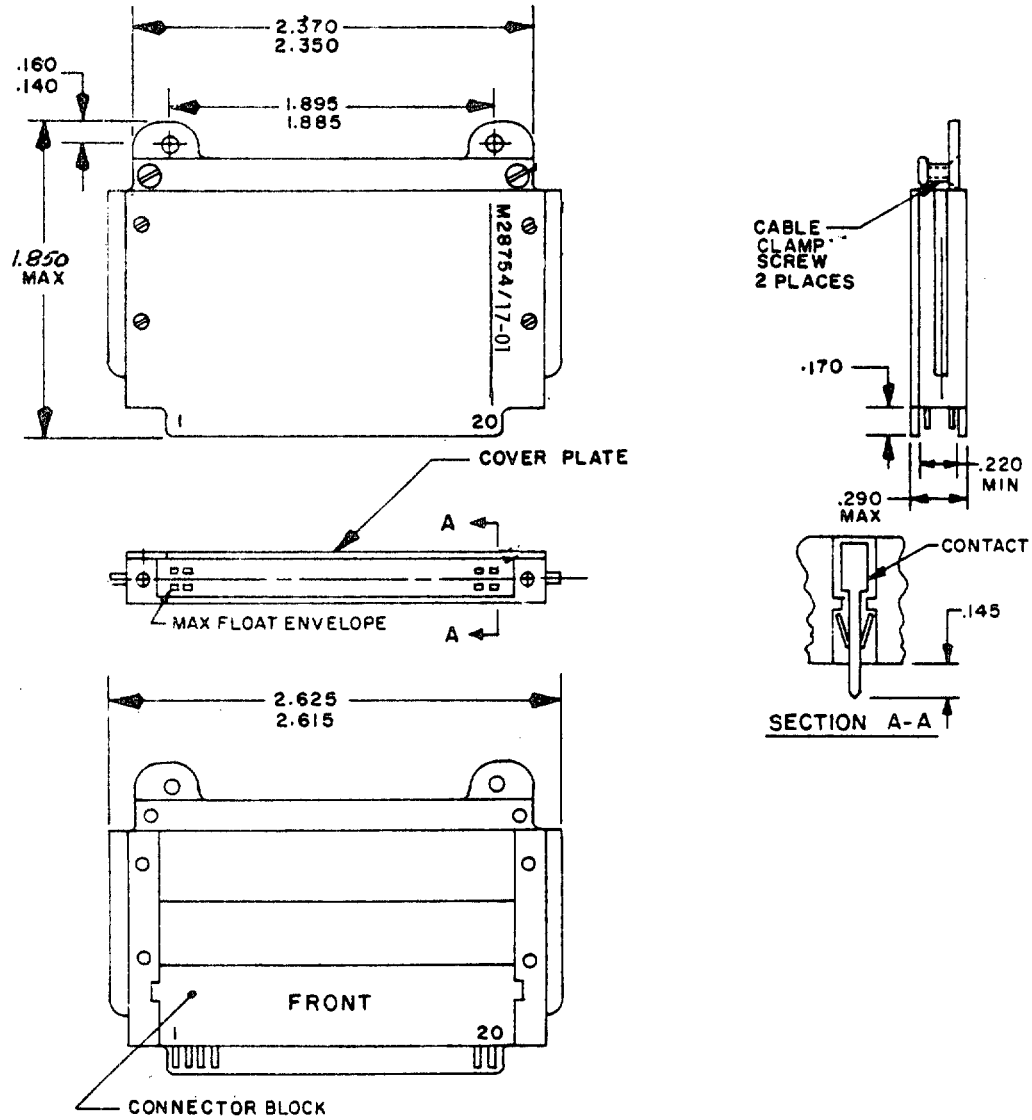

CONNECTOR ASSEMBLY WITH COVER PLATE REMOVED

TABLE I. DASH NUMBER AND CHARACTERISTICS.


PART NUMBER	CONNECTOR	MIL-C-28754/49 HOUSING (TYPE)	MS14061 COVER PLATE (TYPE)
M28754/17-01	M28754/16-01	A	A

Supersedes Page 174.22 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, FRAME, CASTING, TYPE IV, SINGLE SPAN

MIL-C-28754/22

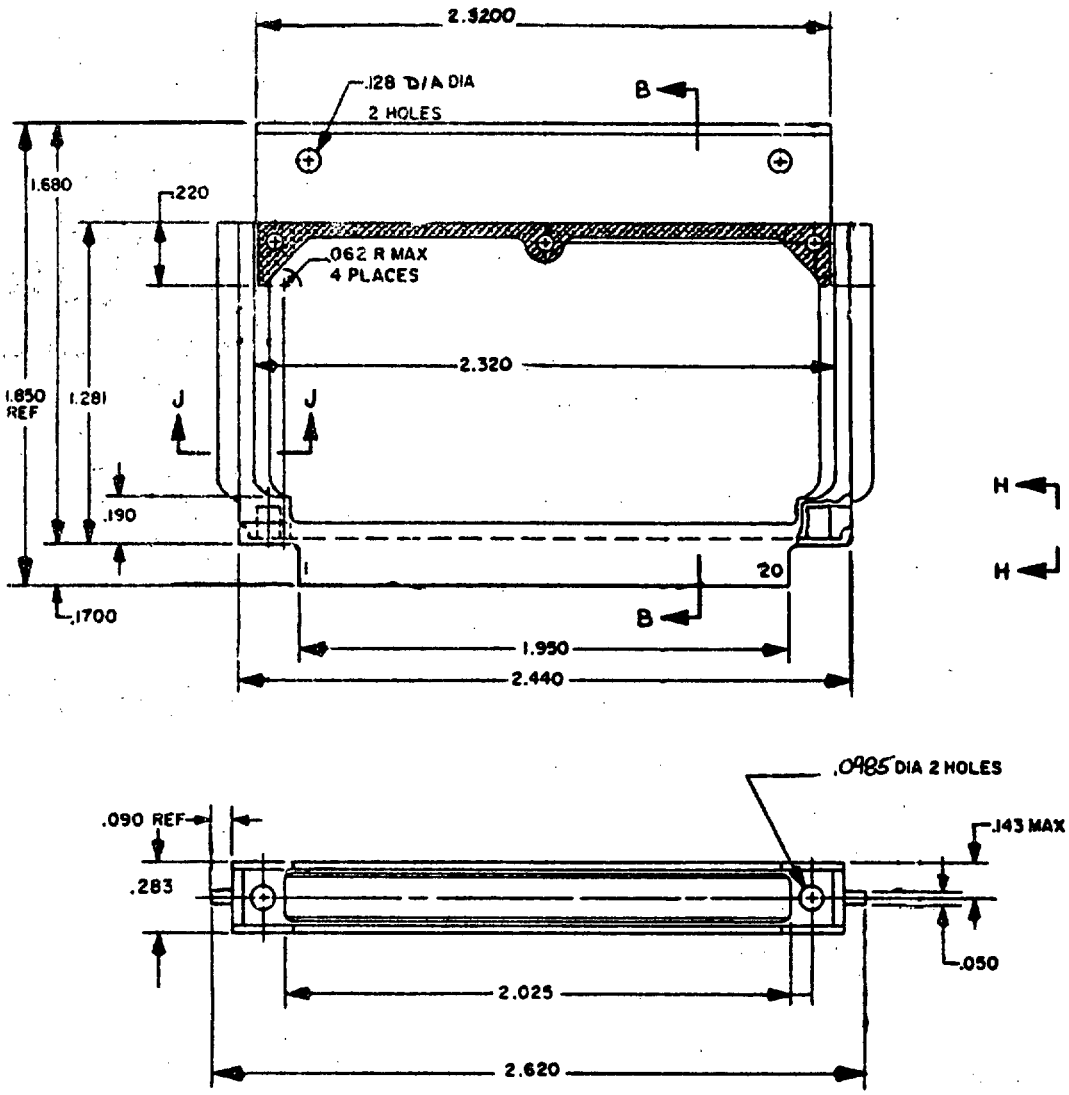

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, FRAME, CASTING, TYPE IV, SINGLE SPAN

MIL-C-28754/22

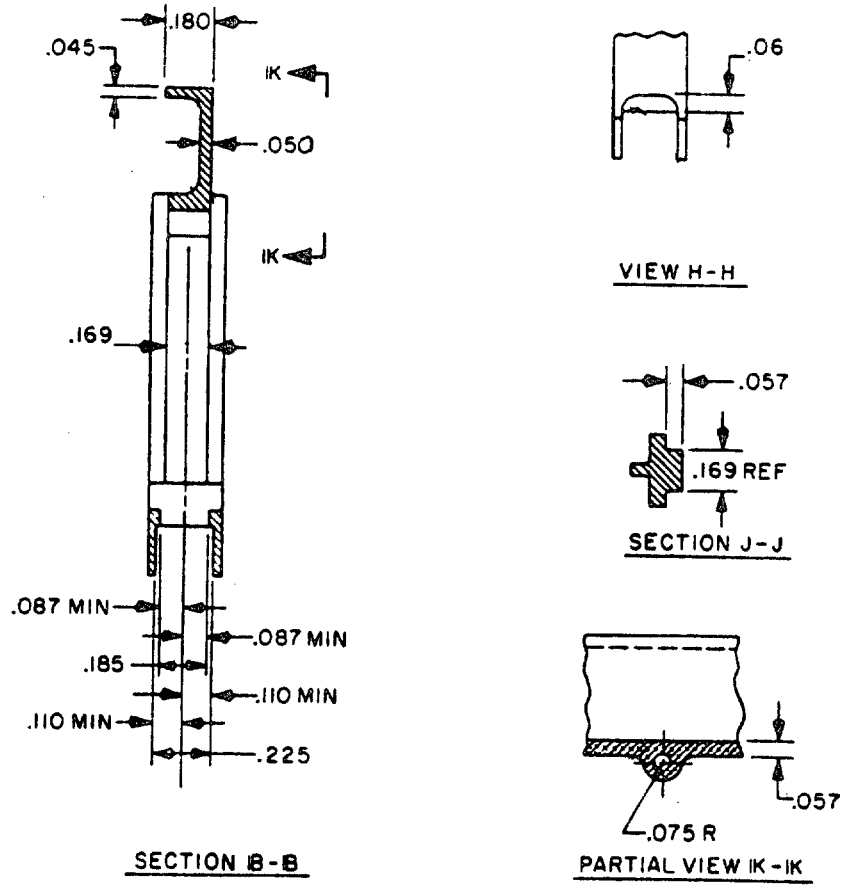



TABLE I. DASH NUMBER AND CHARACTERISTICS.


PART NUMBER	SURFACE TREATMENT
M28754/22-01	WITH ANODIZE AND CHEMICAL FILM
M28754/22-02	WITHOUT ANODIZING, WITHOUT CHEMICAL FILM, WITHOUT ANY MARKINGS
M28754/22-03	WITH ANODIZE, CHEMICAL FILM WITHOUT ANY MARKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN

MIL-C-28754/23

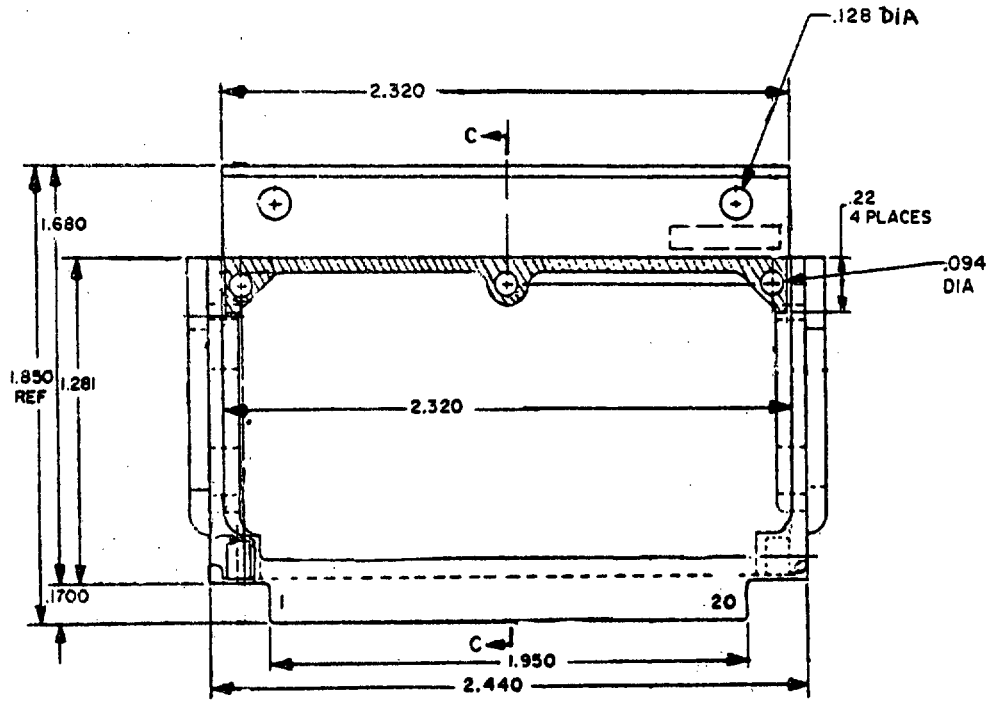

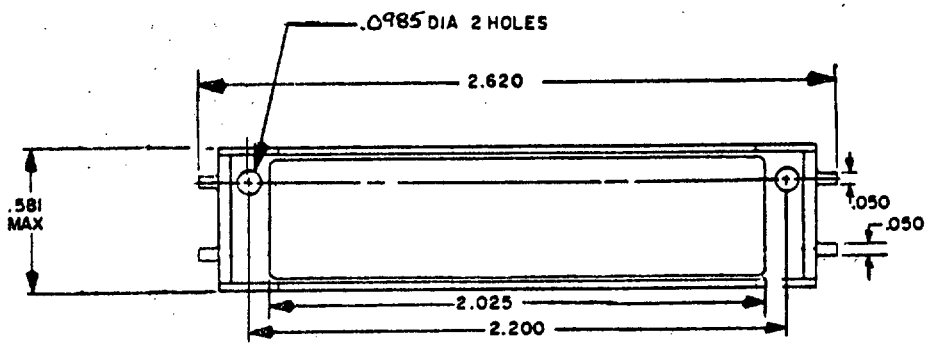

Supersedes Page 174.27 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN

MIL-C-28754/23

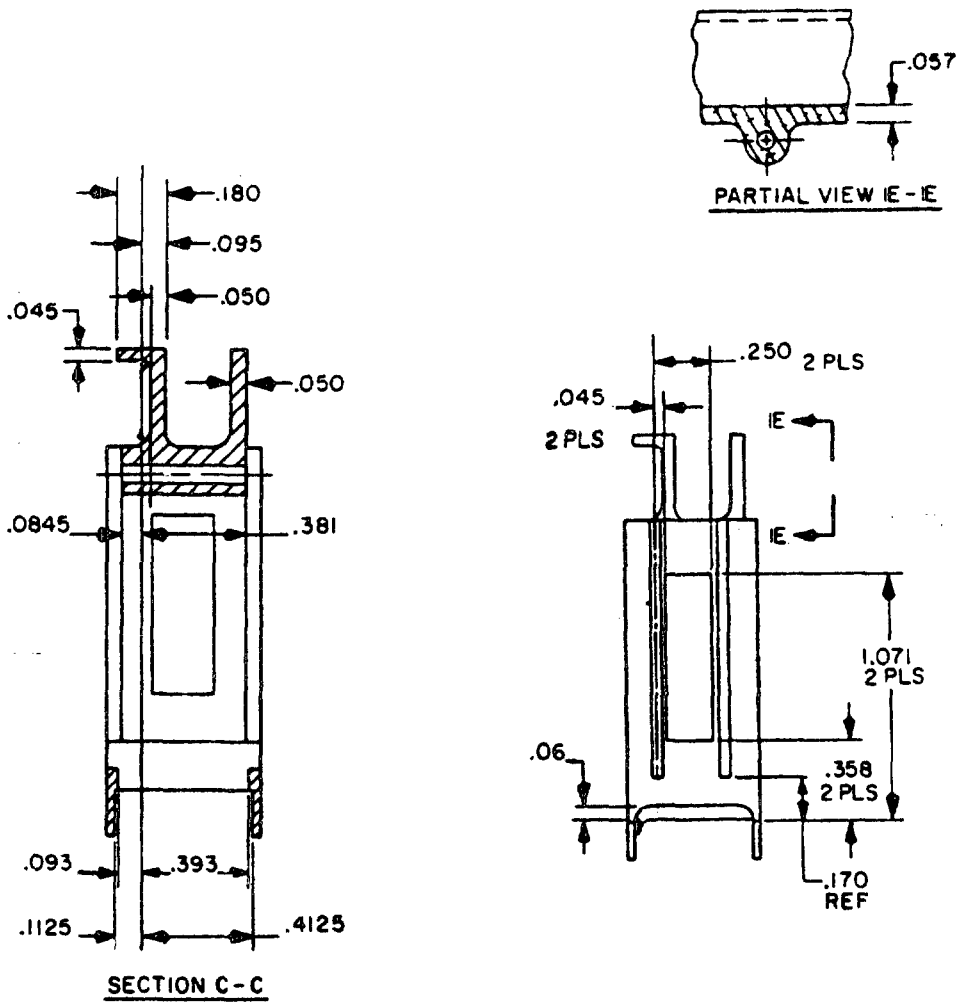


TABLE I. DASH NUMBER AND CHARACTERISTICS.

PART NUMBER	SURFACE TREATMENT
M28754/23-01	WITH ANODIZE AND CHEMICAL FILM
M28754/23-02	WITHOUT ANODIZE AND CHEMICAL FILM
M28754/23-03	WITHOUT ANODIZING, WITH CHEMICAL FILM, WITHOUT ANY MARKING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V,
STYLE II, SLIP LOCK COVER PLATE

MIL-C-28754/33

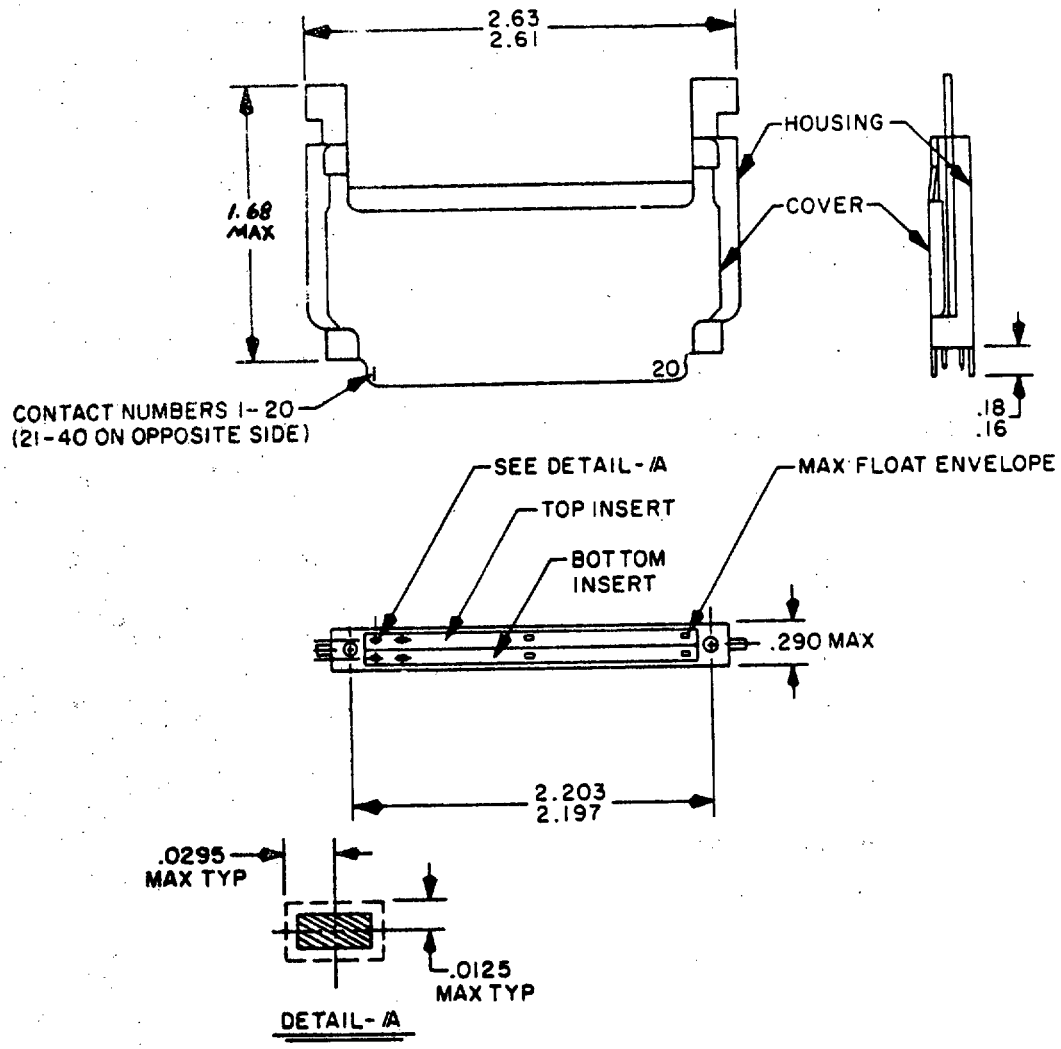


FIG 1

Supersedes Page 174.35 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE V, STYLE II, SLIP LOCK COVER PLATE

MIL-C-28754/33

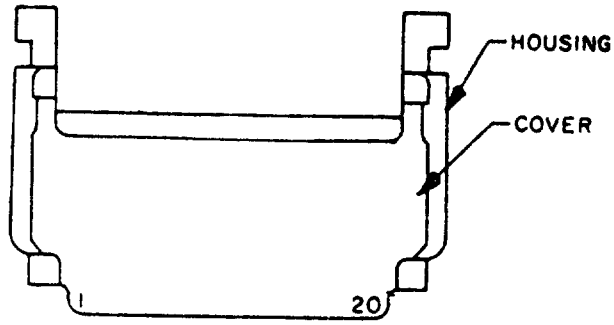


FIG 2

COVER PLATE AND HOUSING: MIL-C-28754/33-01

TABLE I. DASH NUMBER AND APPLICABLE CONNECTORS.


PART NUMBER M28754/33-	FIGURE	CONNECTOR INSERT M28754/31-	HOUSING
01	2	NOT APPLICABLE	M28754/53-01
07	1	01	
08	1	02	
09	1	03	
10	1	04	
11	1	05	
12	1	06	
13	1	07	
14	1	08	
15	1	09	

Supersedes Page 174.36 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND INSULATOR BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/34

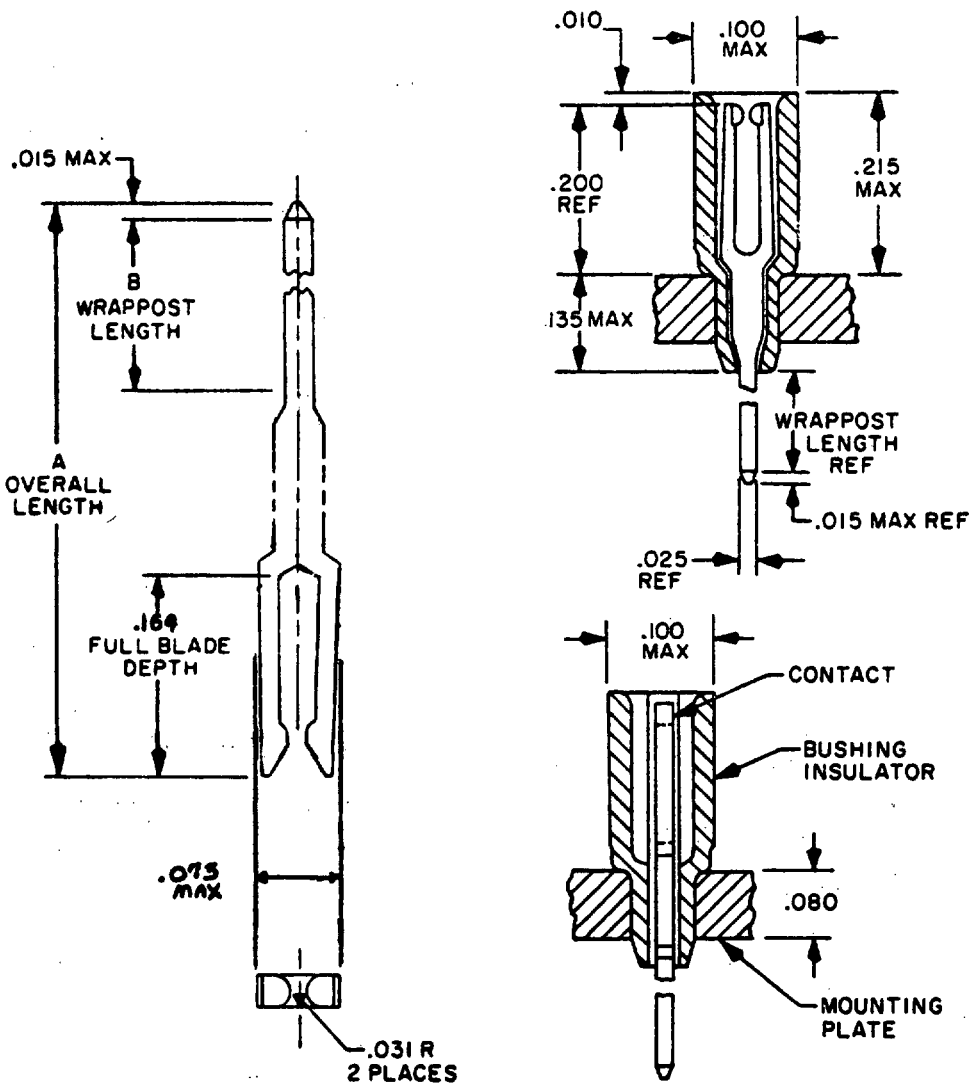

Supersedes Page 174.37 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND INSULATOR BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/34

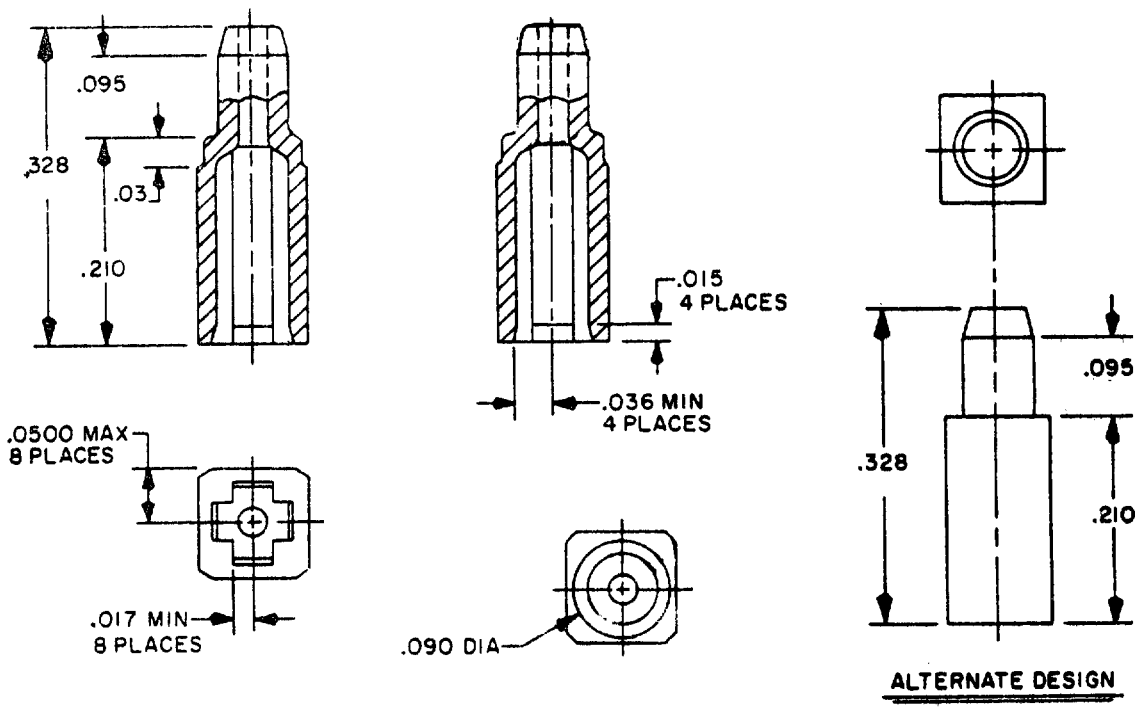



TABLE I. DASH NUMBERS AND DIMENSIONS.

PART NUMBER M28754/34-	OVERALL LENGTH "A"	WRAPPOST LENGTH "B" (REF)
01	0.513	0.175
02	0.588	0.250
03	0.688	0.350
04	0.838	0.500
05	0.963	0.625
06	1.088	0.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND GROUNDING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/36

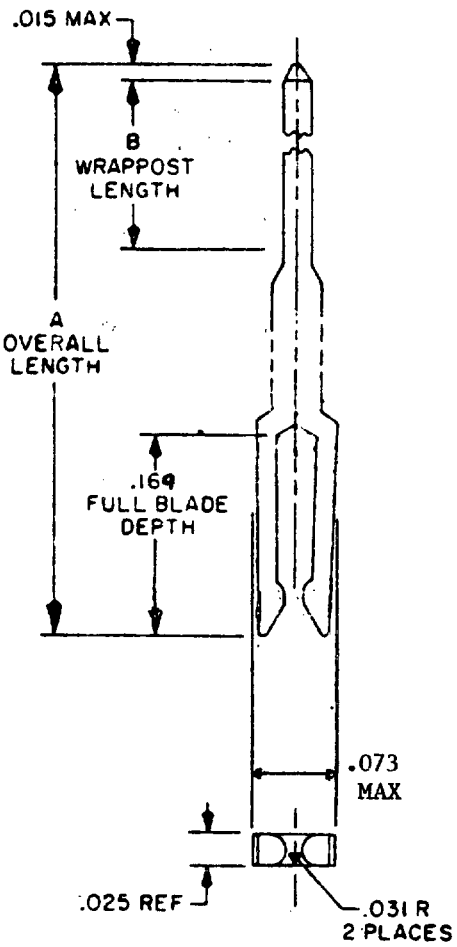

Supersedes Page 174.43 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND GROUNDING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/36

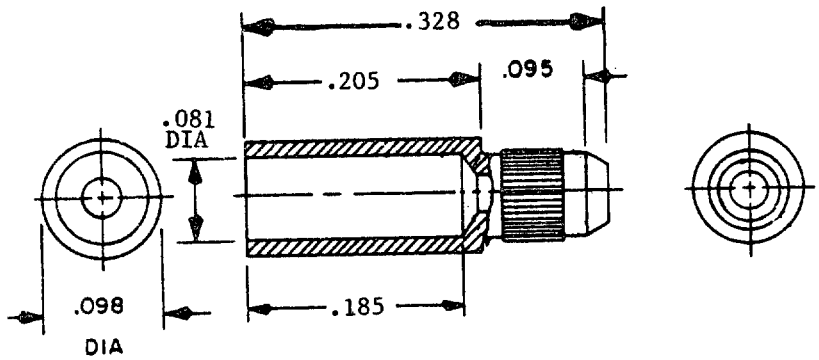


TABLE I. DASH NUMBERS AND DIMENSIONS.

PART NUMBER M28754/36-	OVERALL LENGTH "A"	WRAPPOST LENGTH "B" (REF)
01	0.513	0.175
02	0.588	0.250
03	0.688	0.350
04	0.838	0.500
05	0.963	0.625
06	1.088	0.750

Supersedes Page 174.44 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND POLARIZING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/37

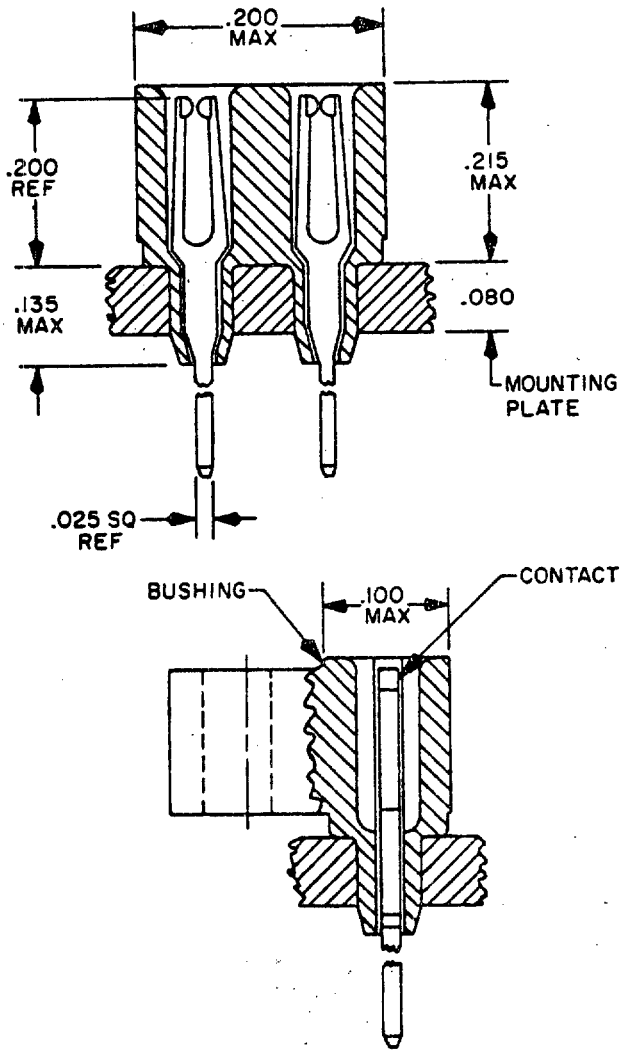


FIG 1


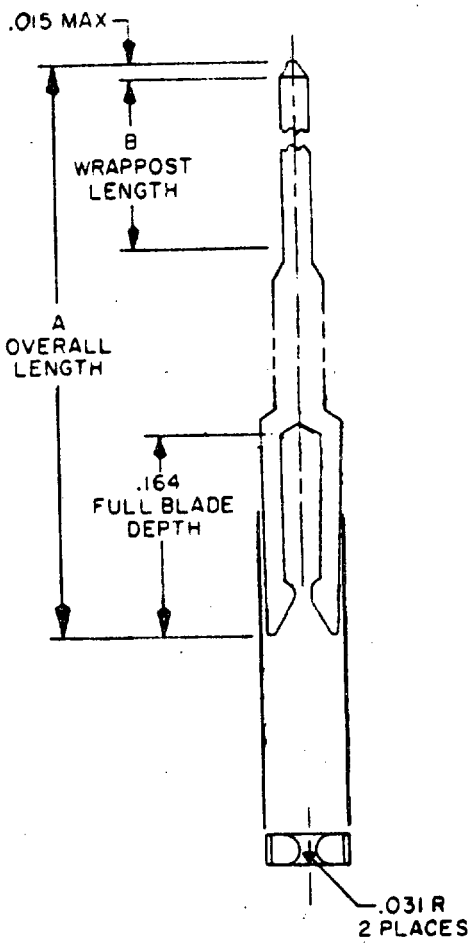


FIG 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT
POLARIZING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C-28754/37

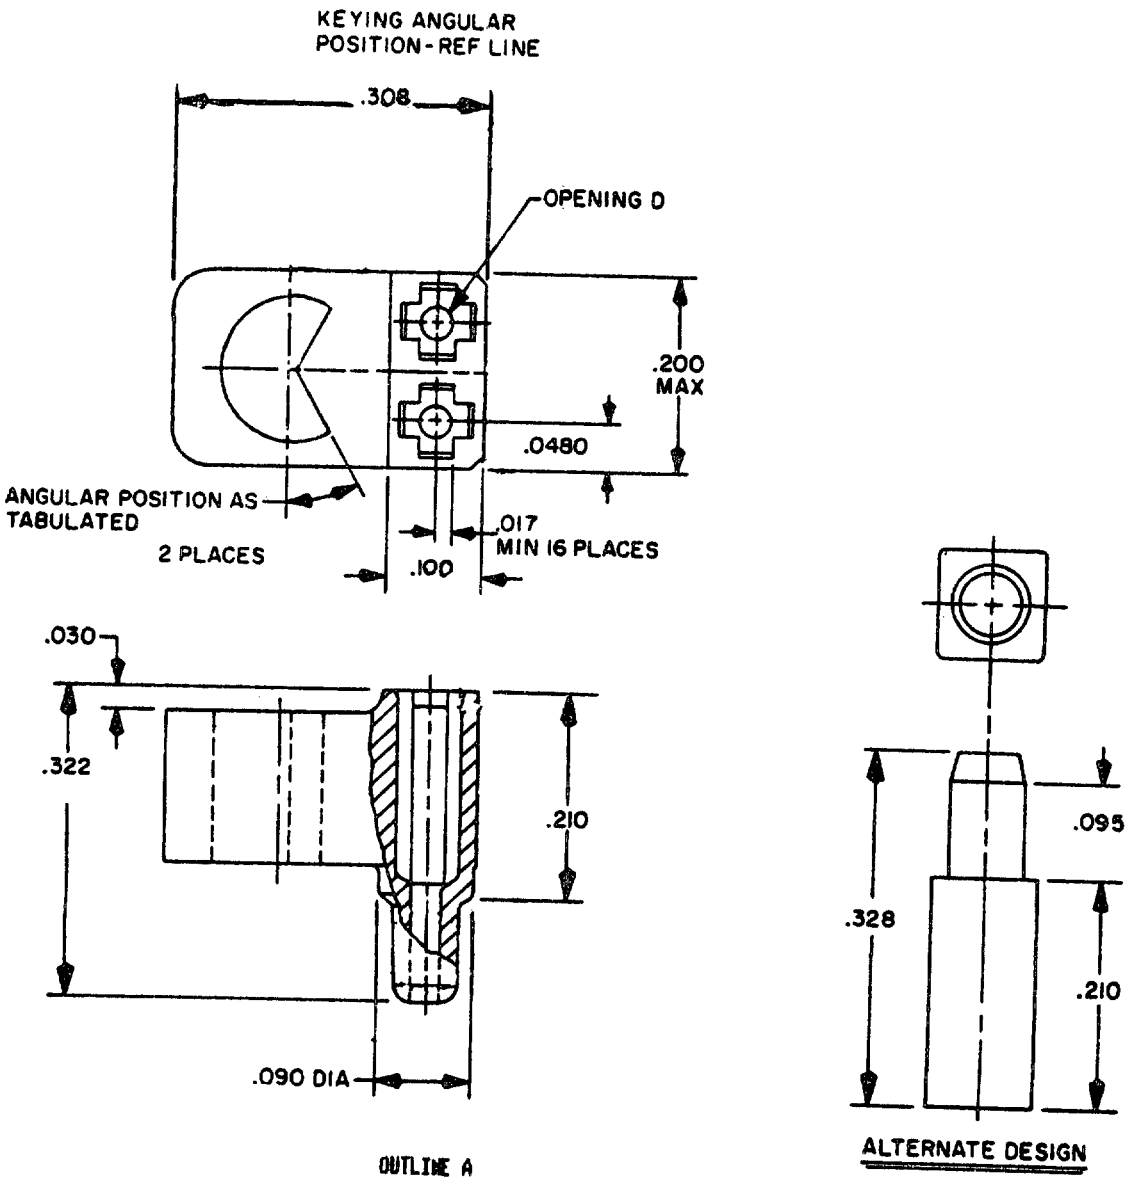

OUTLINE A

ALTERNATE DESIGN

FIG 3A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, WRAPPOST CONTACT AND GROUNDING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

MIL-C28754/38

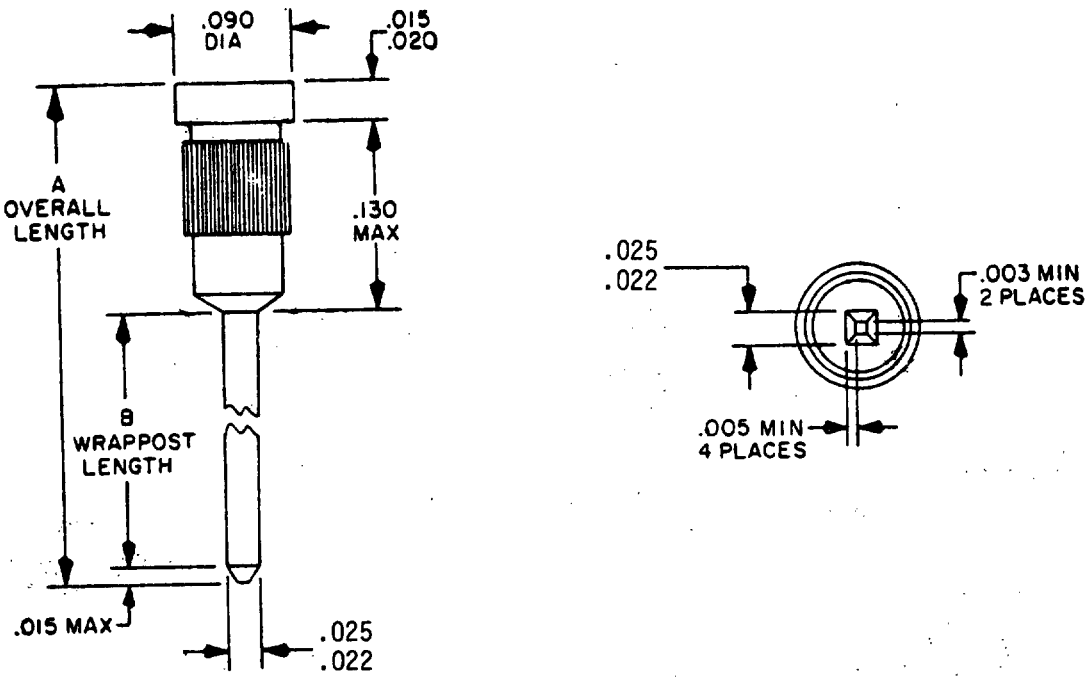


TABLE I. DASH NUMBERS AND DIMENSIONS.

PART NUMBER M28754/38-	OVERALL LENGTH A	WRAPPOST LENGTH B (REF)
01	0.320	0.175
02	0.395	0.250
03	0.495	0.350
04	0.645	0.500
05	0.770	0.625
06	0.895	0.750

Supersedes Page 174.53 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, KEYING PEGS

MIL-C-28754/39

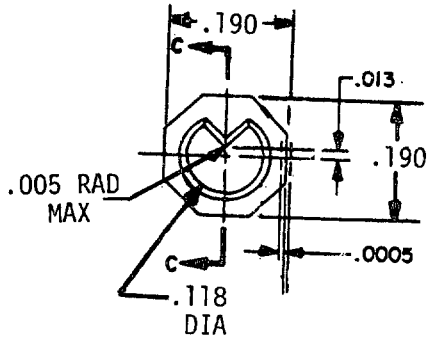


FIGURE 1A




FIGURE 1B
OUTSIDE DIMENSIONS
SAME AS FIGURE 1A






FIGURE 1C
OUTSIDE DIMENSIONS
SAME AS FIGURE 1A

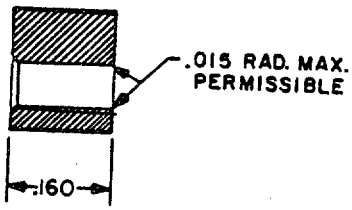

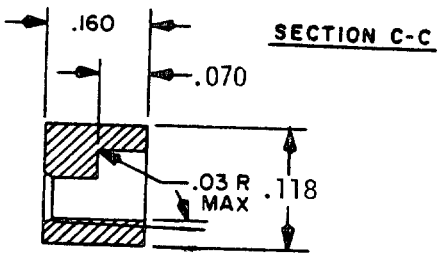

SECTION C-C (OPTIONAL)

TABLE I. DASH NUMBERS AND CHARACTERISTICS.

PART NUMBER M28754/39-	FIGURE NUMBER	MATERIAL	SUPERSEDES NAVORD PART NUMBER	MIL-C-28754/24 MATING KEYING PIN M28754/24-
001	1A	POLYCARBONATE	2300799-1	03
002	1B		2300799-2	01 OR 02
003	1C		2300799-3	NOT APPLICABLE
004	1A	SINTERED METAL	----	03
005	1B		----	01 OR 02
006	1C		----	NOT APPLICABLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SCREW

MIL-C-28754/40

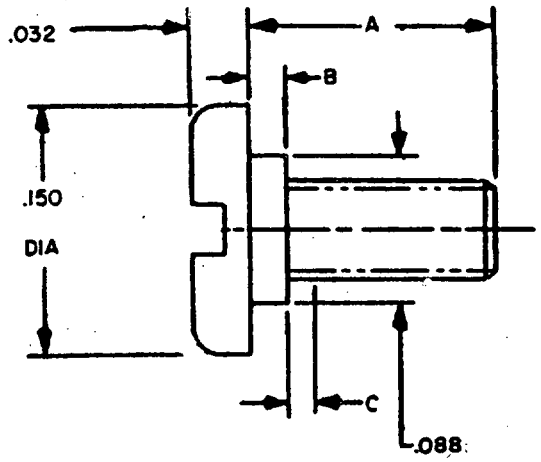


TABLE I. DIMENSIONS AND CHARACTERISTICS.

PART NUMBER M28754/40-	DIMENSIONS			USED WITH MIL-C-28754/
	A	B	C MAX IMPERFECT THREADS	
01	.160	.023	2	21, 22, AND 23
02	.460	.070	2 1/2	23
03	.460	.023	2 1/2	23

Supersedes Page 174.55 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SCREW, INSERT

MIL-C-28754/41

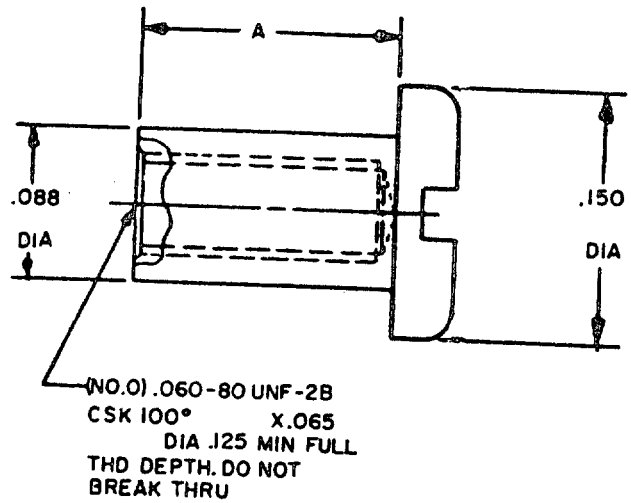


TABLE I. DIMENSIONS AND CHARACTERISTICS.


PART NUMBER M28754/41-	DIMENSION A	USED WITH MIL-C-28754/
01	.155	21, 22, AND 23
02	.437	23
03	1.344	----
04	.485	23

Supersedes Page 174.56 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SINGLE SPAN

MIL-C-28754/48

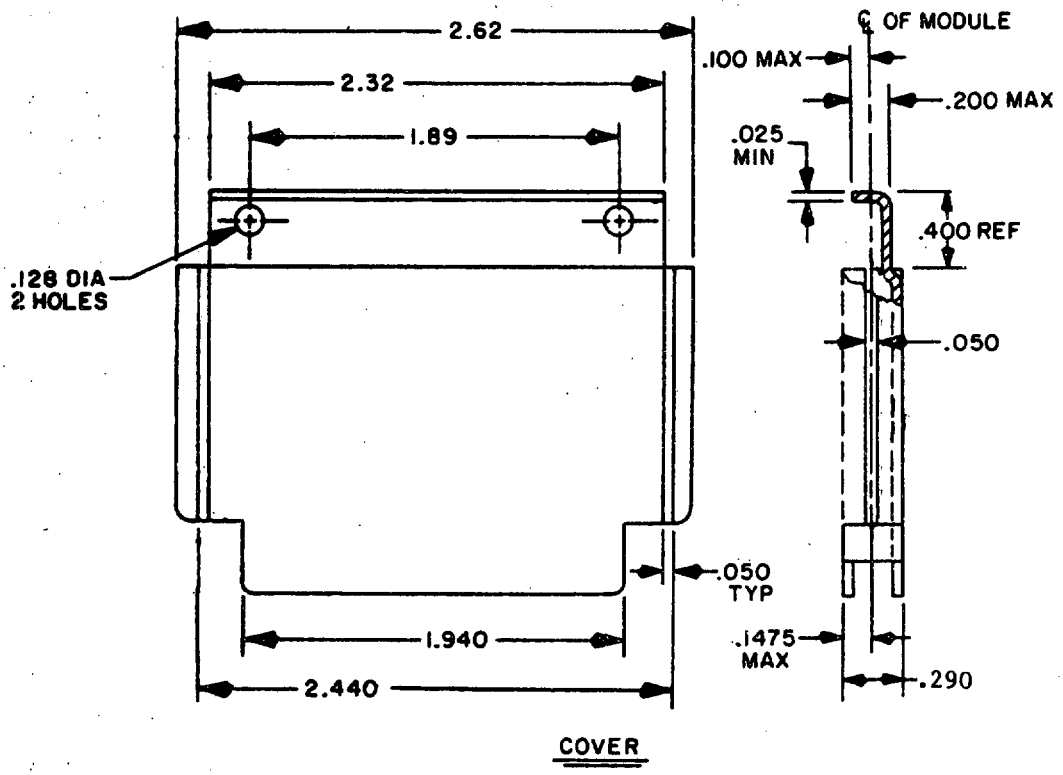

COVER

Supersedes Page 174.59 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, TYPE IV, CONNECTOR ASSEMBLY, SINGLE SPAN

MIL-C-28754/48

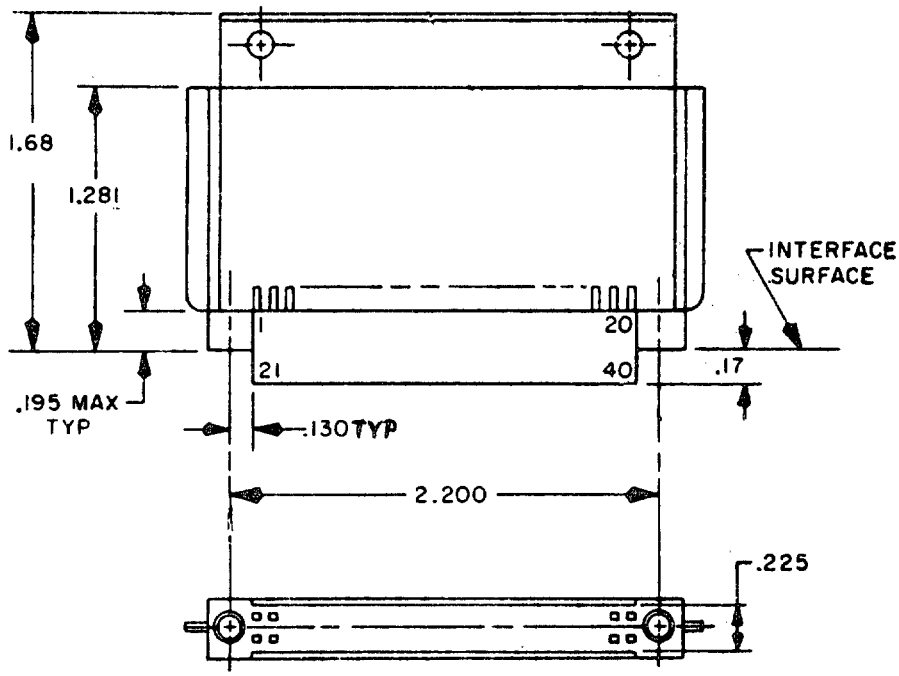


TABLE I. DASH NUMBER AND APPLICABLE CONNECTOR.


PART NUMBER	APPLICABLE CONNECTOR	DESCRIPTION
M28754/48-01	M28754/10-02	UNINSULATED PIN SHIELD

Supersedes Page 174.60 of 16 August 1982.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING

MIL-C-28754/49

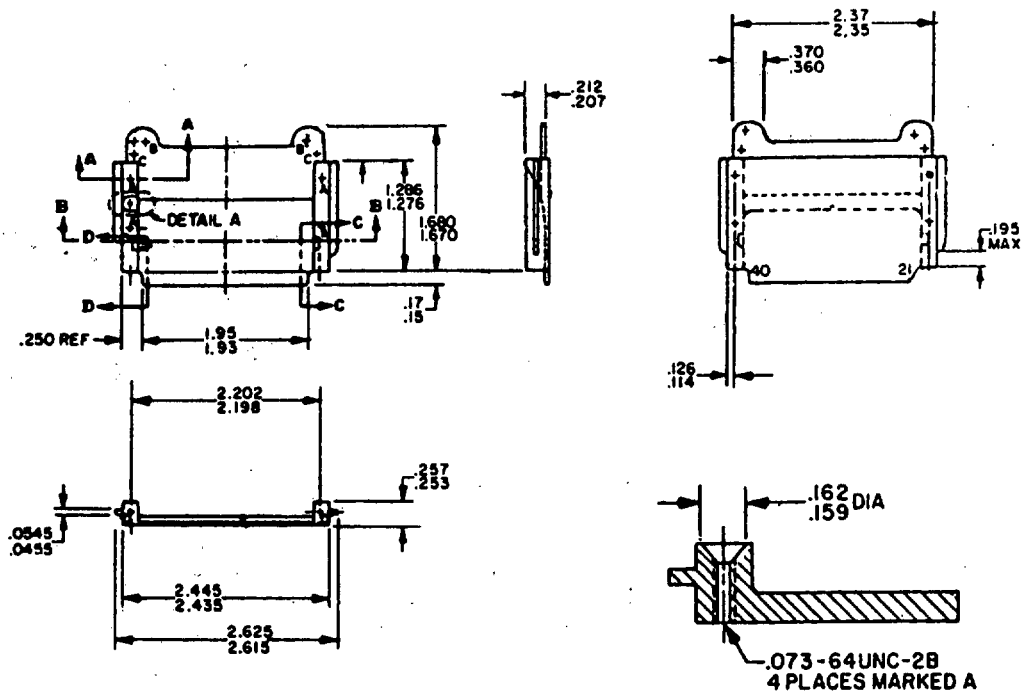

SECTION A-A

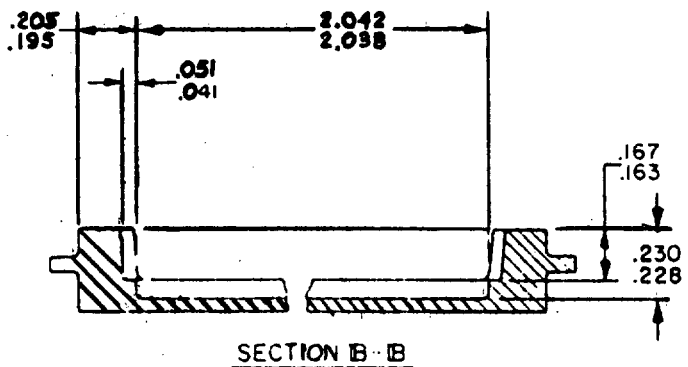


SECTION B-B

Supersedes Page 174.61 of 16 August 1982.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING


MIL-C-28754/49

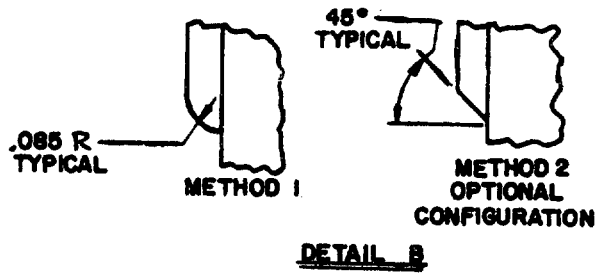


DETAIL B



SECTION C-C

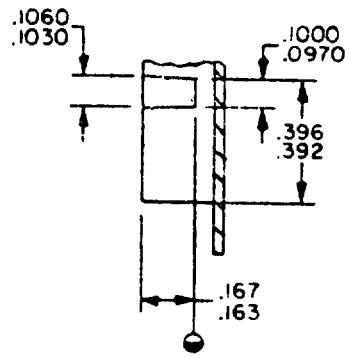

SECTION D-D

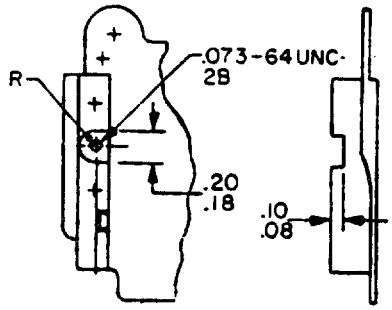

DETAIL A


TABLE I. PART NUMBER AND CHARACTERISTICS.

PART NUMBER M28754/49-	TYPE	FINISH	WITH DETAIL A
01	A	ANODIZE PER MIL-A-8625, TYPE 2, DYED BLACK	NO
02	B	ANODIZE PER MIL-A-8625, TYPE 2, DYED RED. COAT DETAIL A PER MIL-C-5541, CLASS 3, TYPE AND GRADE OPTIONAL.	YES
03	C	ANODIZE PER MIL-A-8625, TYPE 2, DYED BLACK. COAT DETAIL A PER MIL-C-5541 CLASS 3, TYPE AND GRADE OPTIONAL.	YES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, INSERT, TOP

MIL-C-28754/50

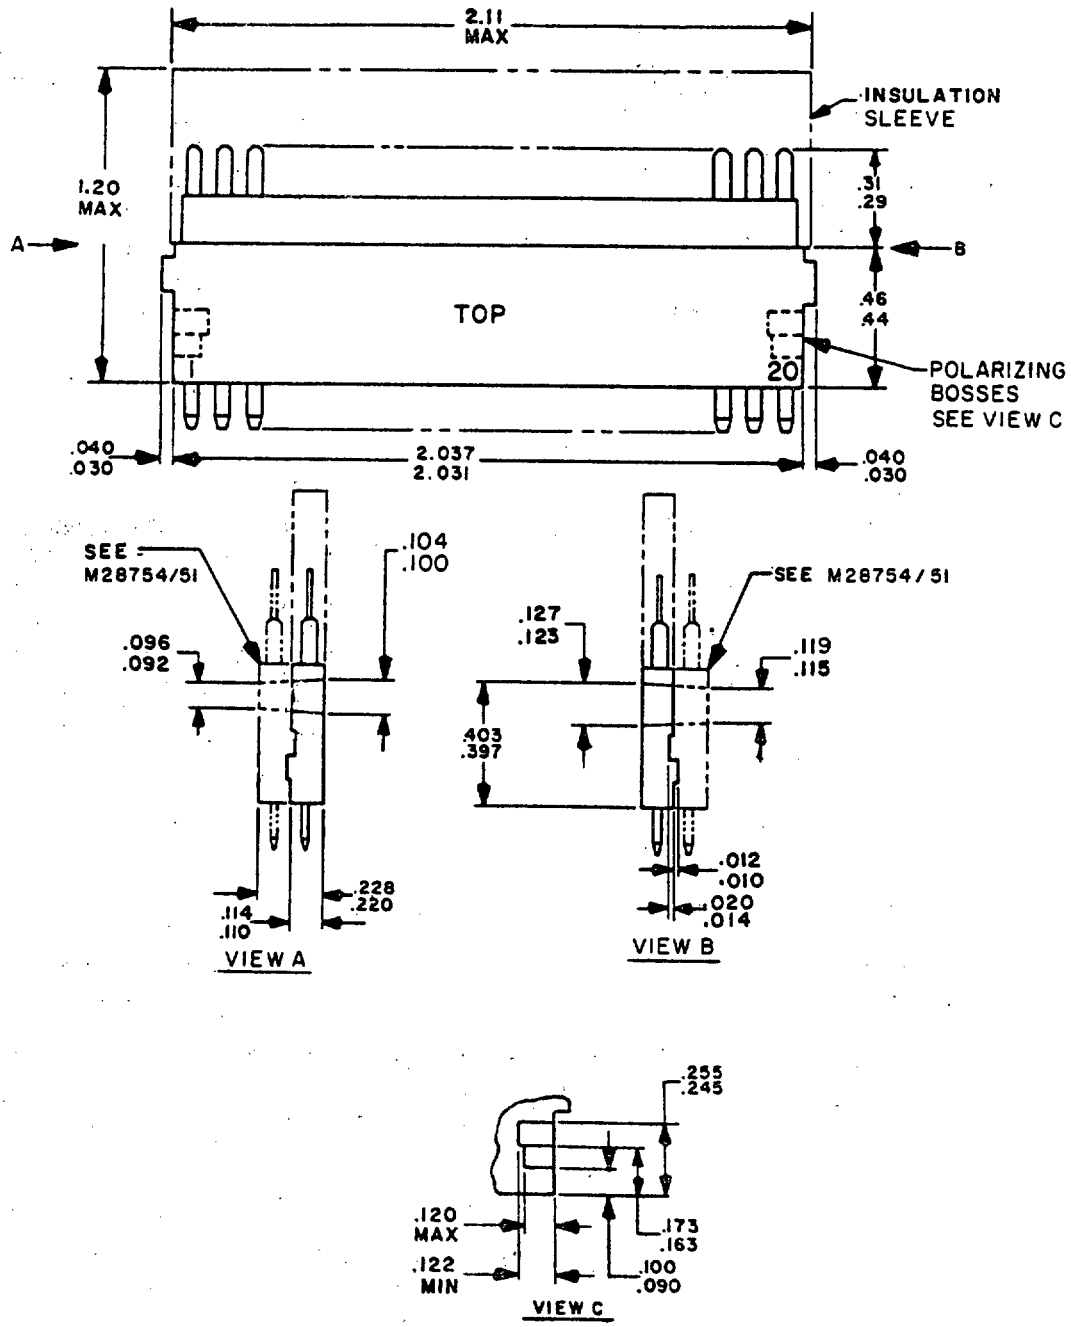


Supersedes Page 174.63 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, INSERT, TOP

MIL-C-28754/50

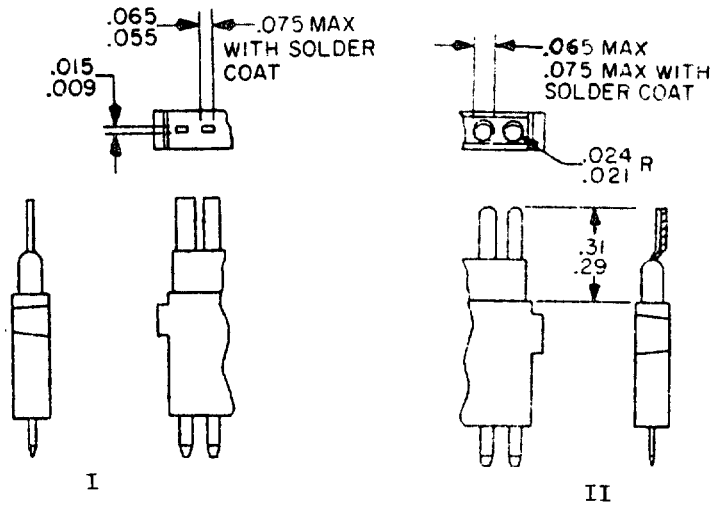

CONTACT STYLES

TABLE I. PART NUMBER AND CHARACTERISTICS.


PART NUMBER	WIRE ACCOMMODATION	CONTACT STYLE	WIRE SIZE
M28754/50-01	FLAT CONDUCTOR CABLE	I	22-24
M28754/50-02	SINGLE ROUND WIRES	II	24-30
M28754/50-03	MULTIPLE ROUND WIRE CABLE	II	20-30

Supersedes Page 174.64 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, INSERT, BOTTOM

MIL-C-28754/51

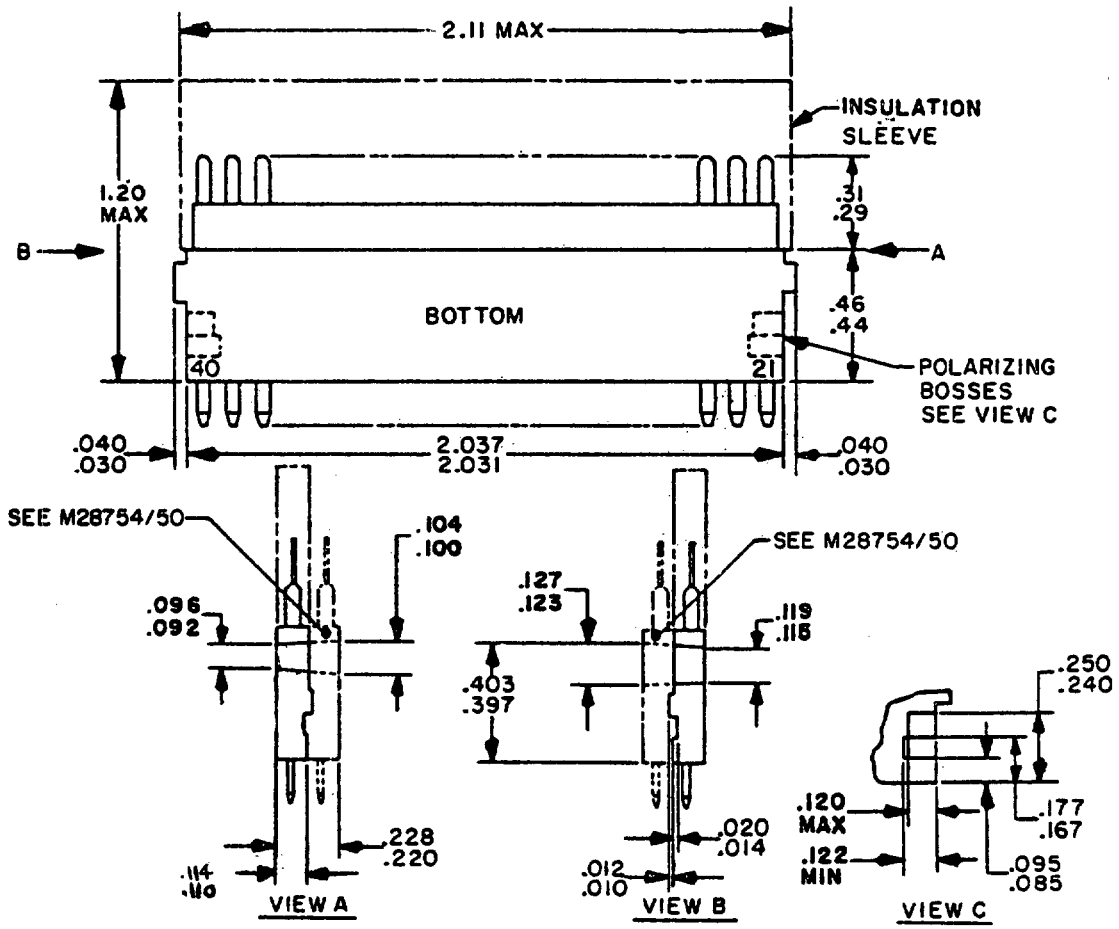


Supersedes Page 174.65 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, INSERT, BOTTOM

MIL-C-28754/51

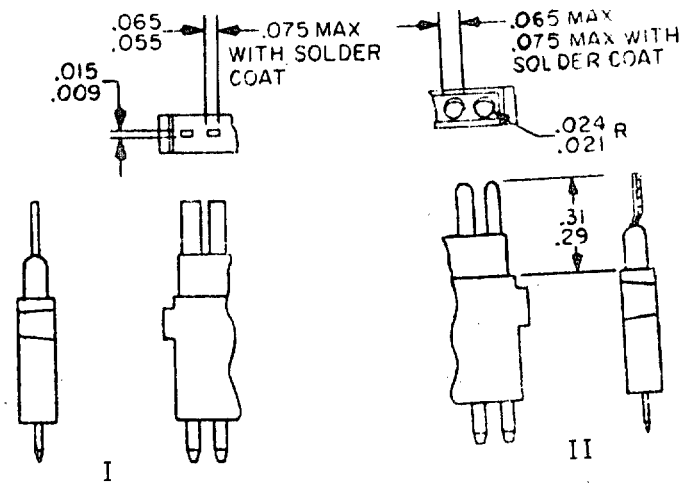

CONTACT STYLES


TABLE I. PART NUMBER AND CHARACTERISTICS.

PART NUMBER	WIRE ACCOMMODATION	CONTACT STYLE	WIRE SIZE
M28754/51-01	FLAT CONDUCTOR CABLE	I	22-24
M28754/51-02	SINGLE ROUND WIRES	II	24-30
M28754/51-03	MULTIPLE ROUND WIRE CABLE	II	20-30

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING, CONNECTOR ASSEMBLY, STYLE II

MIL-C-28754/53

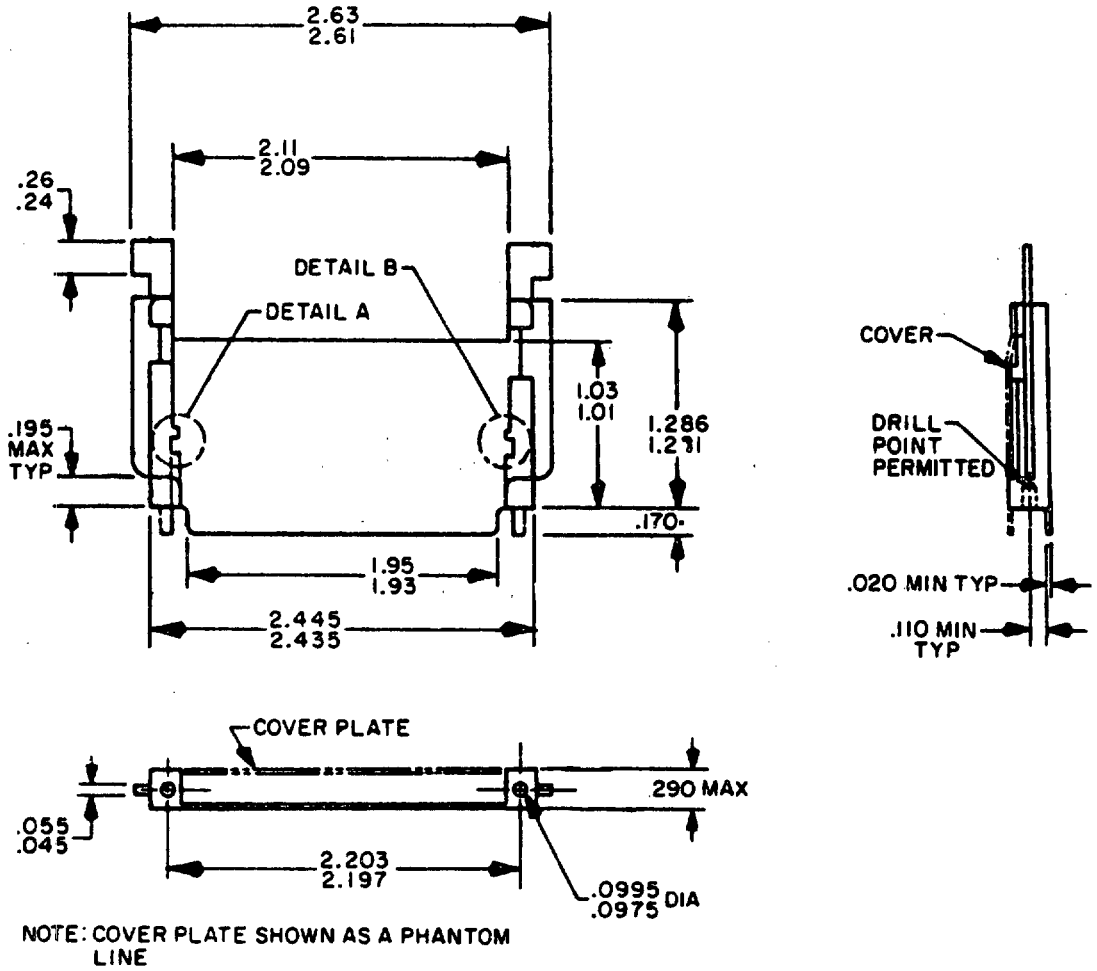

PART NUMBER: M28754/53-01


NOTE: FOR USE WITH M28754/33


Supersedes Page 174.69 of 16 August 1982.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, MODULAR, HOUSING, CONNECTOR ASSEMBLY, STYLE II

MIL-C-28754/53

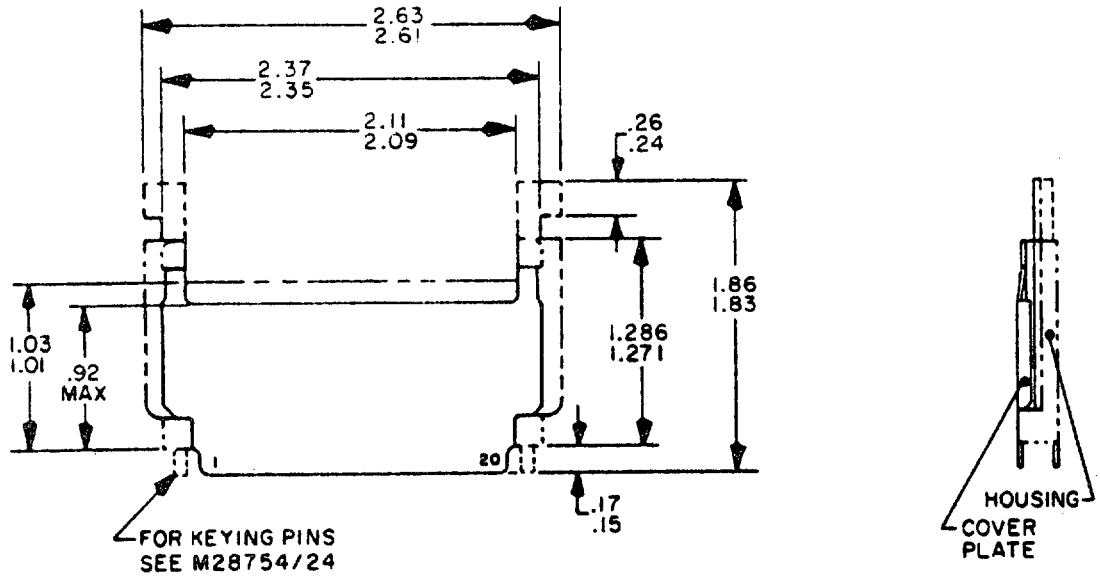

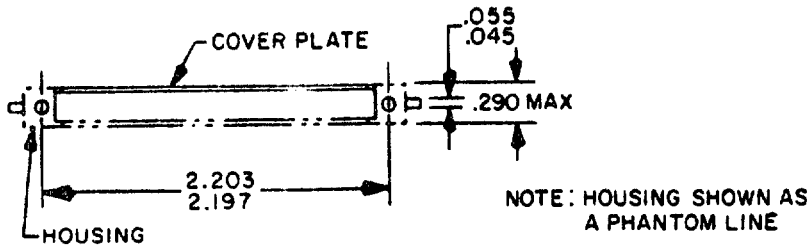

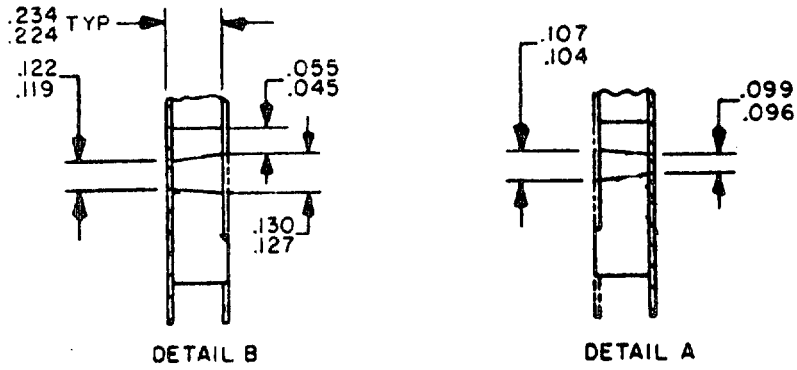


VIEWS OF INSERT
POSITIONING GROOVES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/56

MATES WITH MIL-C-55302/55
CURRENT RATING 5 AMPERES MAX PER CONTACT

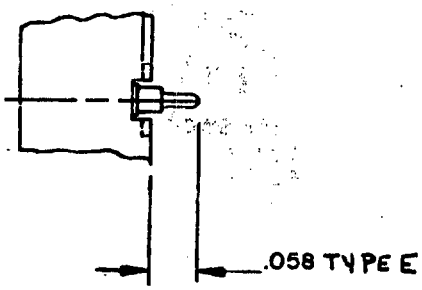

FLEXIBLE CIRCUIT TERMINAL
DETAIL C

TABLE I. DIMENSIONS.

NUMBER OF CONTACTS	DIMENSIONS	
	A	BSC B
10	.850	.650
14	1.050	.850
20	1.350	1.150
24	1.550	1.350
26	1.650	1.450
30	1.850	1.650
36	2.150	1.950
40	2.350	2.150
44	2.550	2.350
50	2.850	2.650
54	3.050	2.850
56	3.150	2.950
60	3.350	3.150
66	3.650	3.450
70	3.850	3.650

EXAMPLE OF PART NUMBER:

M55302/56- A 10

M55302/56- : BASIC NUMBER OF SPECIFICATION SHEET

A : TYPE OF TERMINAL

10 : NUMBER OF CONTACTS


A = SOLDER CUP
B = DIP TERMINAL .140 LONG
C = DIP TERMINAL .172 LONG
D = WIRE WRAP
E = FLEXIBLE CIRCUIT TERMINAL .058

Supersedes Page 176.39 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/57

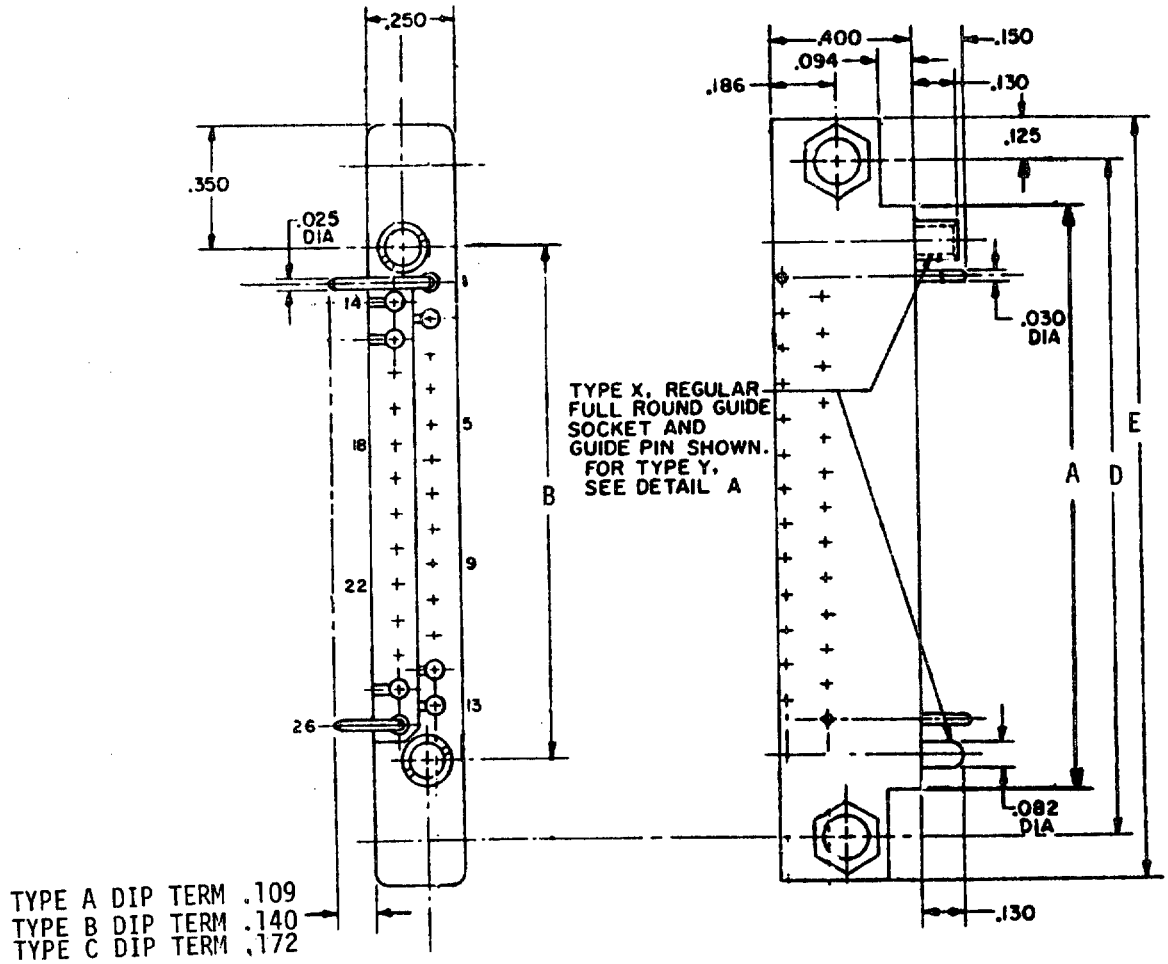


Supersedes Page 176.40 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

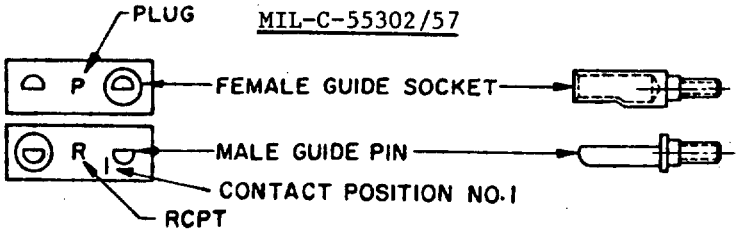


CONNECTOR POLARIZATION WITH D SHAPED GUIDE PINS AND SOCKETS. (TYPE Y)

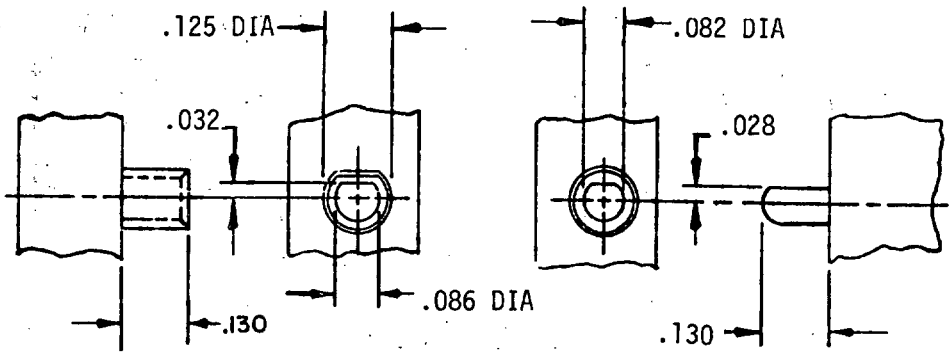

DETAIL A. Polarization pins/socket. (For configuration see Detail B.)

DETAIL B. Polarization configuration chart.

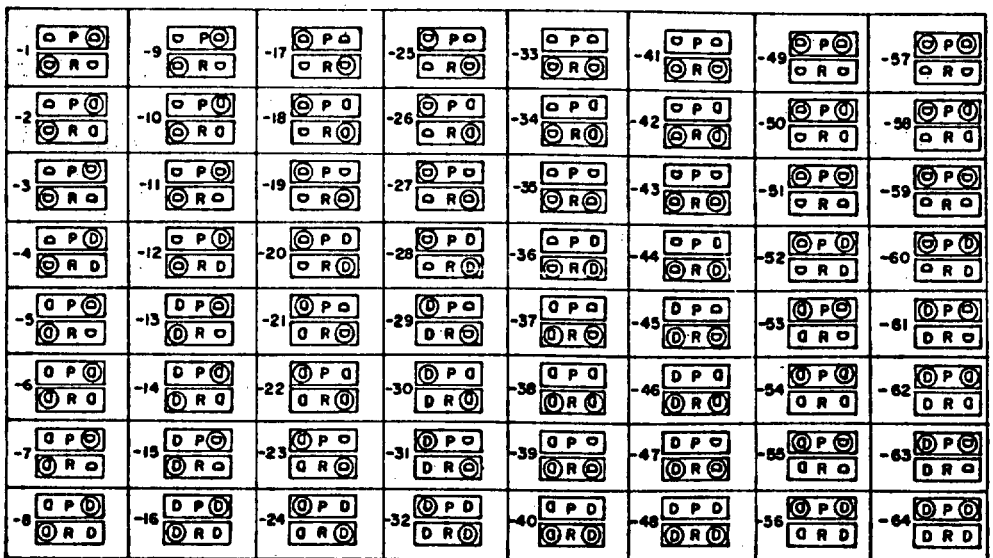

NOTE: Pins/socketsin chart can be easily adjusted to any desired configuration by the spanner wrench.

Supersedes Page 176.41 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/57

MATES WITH MIL-C-55302/58, /62, /64, /65, AND /66
CURRENT RATING 5 AMERES MAX PER CONTACT

TABLE I. DIMENSIONS.

NUMBER OF CONTACTS	A	BSC B	BSC D	E
10	.850	.650	1.100	1.350
14	1.050	.850	1.300	1.550
20	1.350	1.150	1.600	1.850
24	1.550	1.350	1.800	2.050
26	1.650	1.450	1.900	2.150
30	1.850	1.650	2.100	2.350
36	2.150	1.950	2.400	2.650
40	2.350	2.150	2.600	2.850
44	2.550	2.350	2.800	3.050
50	2.850	2.650	3.100	3.350
54	3.050	2.850	3.300	3.550
56	3.150	2.950	3.400	3.650
60	3.350	3.150	3.600	3.850
66	3.650	3.450	3.900	4.150
70	3.850	3.650	4.100	4.350

EXAMPLE OF PART NUMBER:

M55302/57 — BASIC NUMBER OF SPECIFICATION SHEET

A — TYPE OF TERMINAL
- A = DIP TERMINAL .109 LONG
- B = DIP TERMINAL .140 LONG
- C = DIP TERMINAL .172 LONG

10 — NUMBER OF CONTACTS


X — TYPE MOUNTING HARDWARE
- TYPE X = FULL ROUND
- TYPE Y = "D" SHAPED

Supersedes Page 176.42 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/61

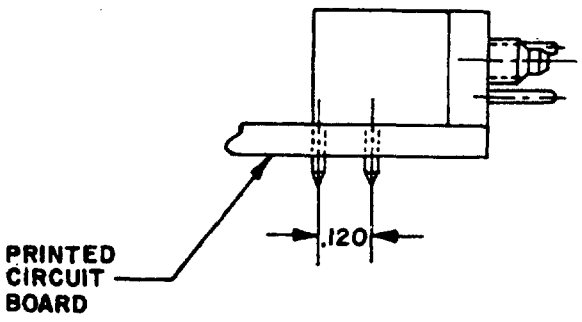

MATES WITH MIL-C-55302/62, /65, /66, AND /58 CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS.

NUMBER OF CONTACTS	DIMENSIONS		
	BSC B	BSC D	E
10	.650	1.100	1.350
14	.850	1.300	1.550
20	1.150	1.600	1.850
24	1.350	1.800	2.050
26	1.450	1.900	2.150
30	1.650	2.100	2.350
36	1.950	2.400	2.650
40	2.150	2.600	2.850
44	2.350	2.800	3.050
50	2.650	3.100	3.350
54	2.850	3.300	3.550
56	2.950	3.400	3.650
60	3.150	3.600	3.850
66	3.450	3.900	4.150
70	3.650	4.100	4.350

EXAMPLE OF PART NUMBER:

M55302/61- A 10

M55302/61- : BASIC NUMBER OF SPECIFICATION SHEET

A : TYPE OF TERMINAL


A = DIP TERMINAL .109 LONG
B = DIP TERMINAL .140 LONG


10 : NUMBER OF CONTACTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLE, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/62

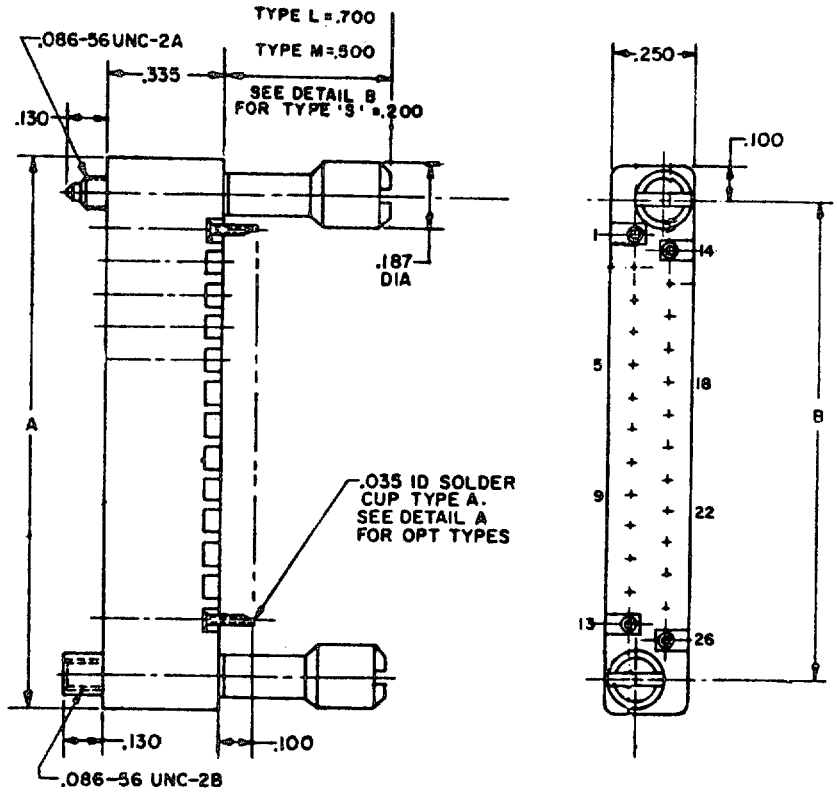

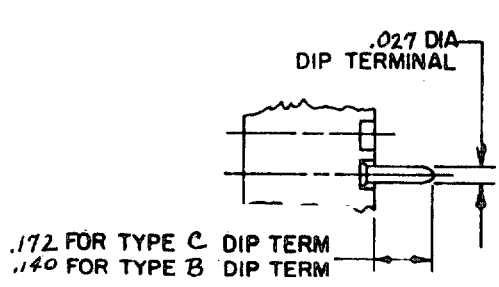

DETAIL A

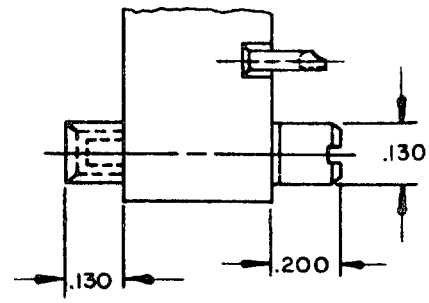

TYPE S SHORT TURNING JACKSCREW

DETAIL B

Supersedes Page 176.52 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, RECEPTACLES, SOCKET CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITTIONS OF 14, 24, 44,54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

MIL-C-55302/62

MATES WITH MIL-C-55302/61, /57, AND /63
CURRENT RATING 5 AMPERES MAX PER CONTACT

TABLE I. DIMENSIONS.

NUMBER OF CONTACTS	DIMENSIONS	
	A	BSC B
10	.850	.650
14	1.050	.850
20	1.350	1.150
24	1.550	1.350
26	1.650	1.450
30	1.850	1.650
36	2.150	1.950
40	2.350	2.150
44	2.550	2.350
50	2.850	2.650
54	3.050	2.850
56	3.150	2.950
60	3.350	3.150
66	3.650	3.450
70	3.850	3.650

EXAMPLE OF PART NUMBER:

M55302/62- A 10 L

M55302/62- : BASIC NUMBER OF SPECIFICATION SHEET

A : TYPE OF TERMINAL
- A = SOLDER CUP
- B = DIP TERMINAL .140 LONG
- C = DIP TERMINAL .172 LONG

10 : NUMBER OF CONTACTS


L : TYPE MOUNTING HARDWARE
- L = .700 SLOTTED TURNING JACKSCREW
- M = .500 SLOTTED TURNING JACKSCREW
- S = .200 SLOTTED TURNING JACKSCREW

Supersedes Page 176.53 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)


MIL-C-55302/63

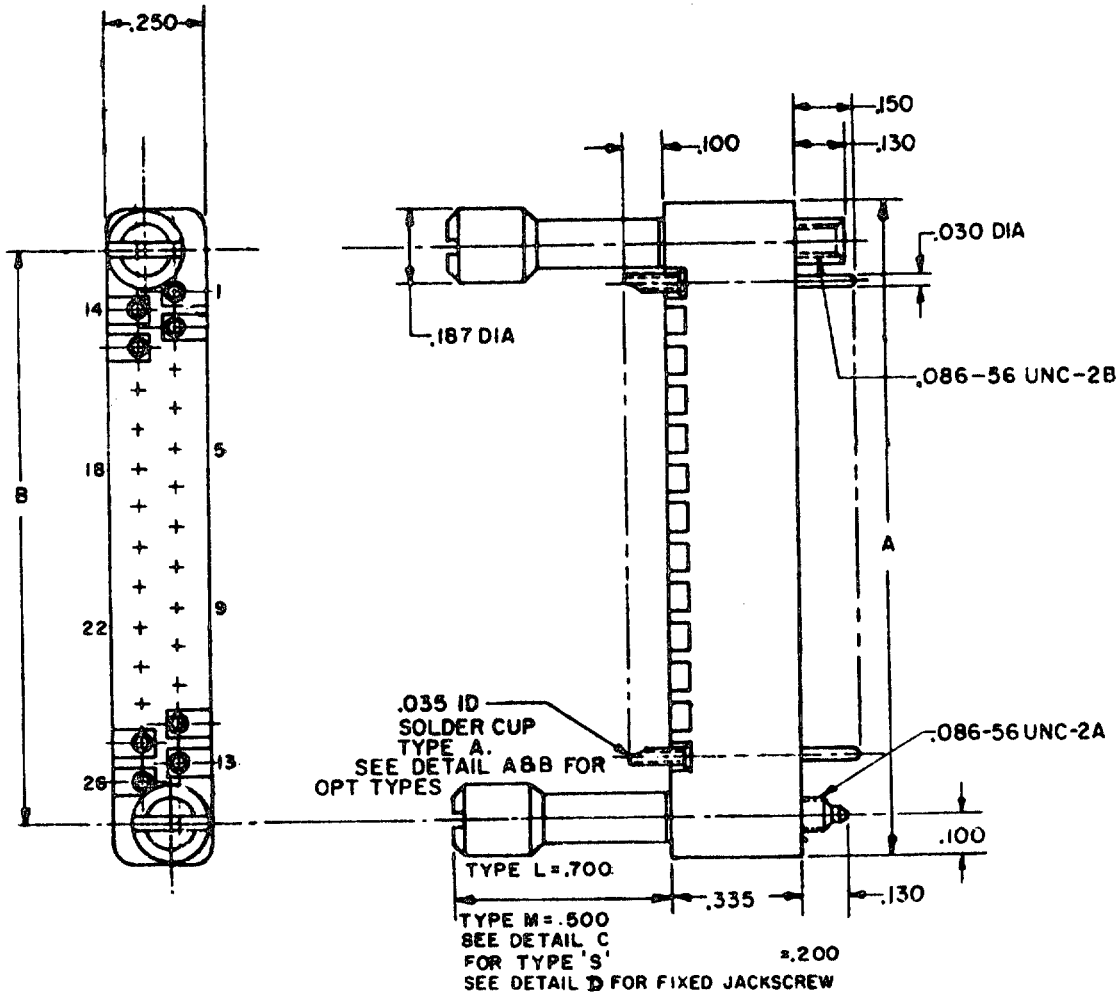

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT ANGLE, 30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/110

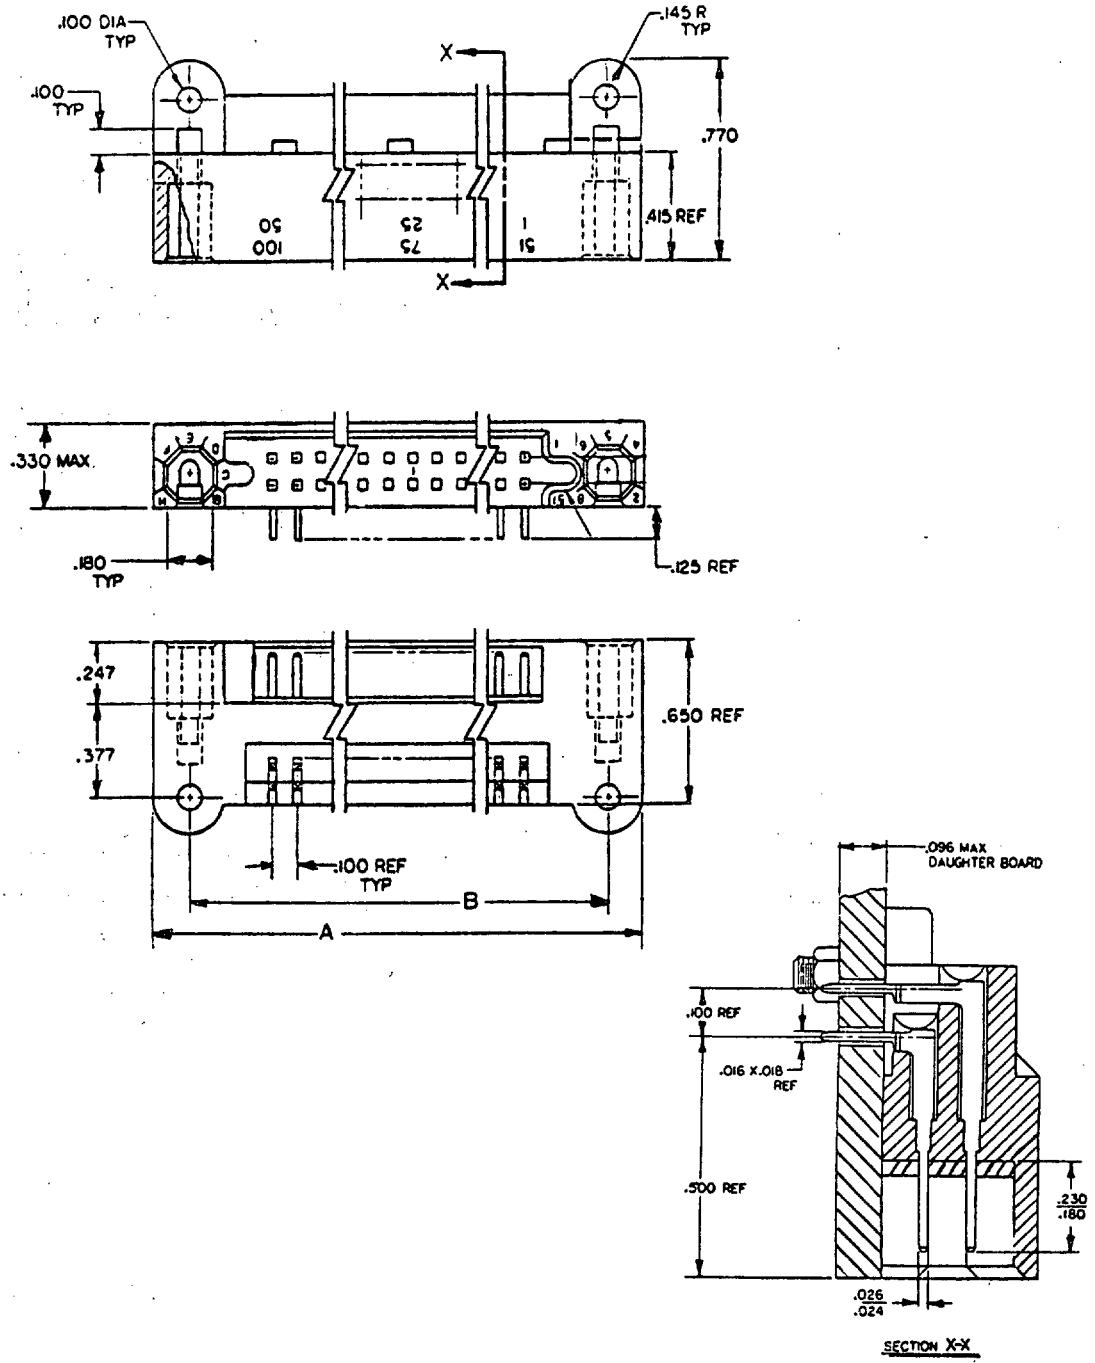

Supersedes Page 176.65 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT ANGLE, 30 THRU 110 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (.100 SQ. GRID)

MIL-C-55302/110

PART NUMBER: M55303/110-*

TABLE I. DIMENSIONS AND CONTACT INFORMATION.

DASH NUMBER*	TYPE NUMBER	NO. OF CONTACTS	DIMENSIONS		CONTACT IDENTIFICATION NUMBERS
			A	B	
10	II	30	2.355	2.065	1, 16
11	II	40	2.855	2.565	1, 21
12	II	50	3.355	3.065	1, 26
13	II	60	3.855	3.565	1, 31
14	II	70	4.355	4.065	1, 36
15	II	80	4.855	4.565	1, 41
16	II	90	5.355	5.065	1, 46
17	II	100	5.855	5.565	1, 51
18	II	110	6.355	6.065	1, 56


MATES WITH MIL-C-553032/27 CONTACT RATING 3 AMPERES MAX PER CONTACT

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
PLUG, RIGHT-ANGLE, 90 THRU 240 CONTACT POSITIONS, FOR PRINTED
WIRING BOARDS (.100 INCH CONTACT SPACING)

MIL-C-55302/129

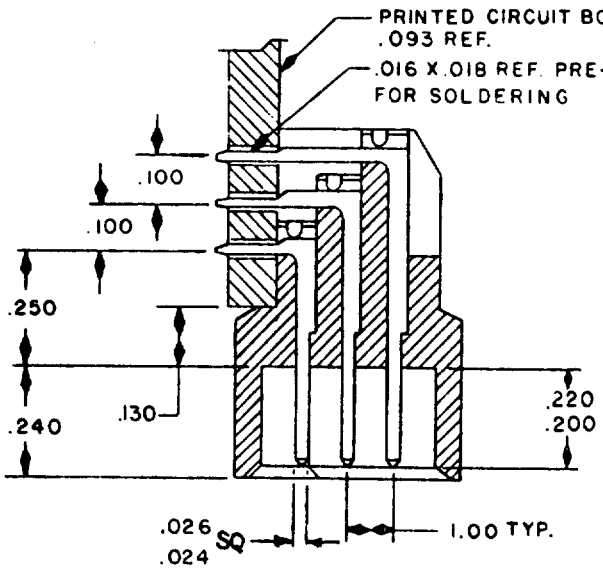

SECTION A-A

PART NUMBER: M55302/129-*

TABLE I. DIMENSIONS AND CONTACT INFORMATION.

DASH NUMBER*	NO. OF CONTACTS	DIMENSIONS		CONTACT IDENTIFICATION NUMBERS
		A	B	
09	90	3.750	3.450	1 - 30
10	105	4.250	3.950	1 - 35
11	120	4.750	4.450	1 - 40
12	135	5.250	4.950	1 - 45
13	150	5.750	5.450	1 - 50
14	165	6.250	5.950	1 - 55
15	180	6.750	6.450	1 - 60
16	195	7.250	6.950	1 - 65
17	210	7.750	7.450	1 - 70
18	240	8.750	8.450	1 - 80

MATES WITH MIL-C-55302/130 CURRENT RATING 3 AMPERES MAX PER CONTACT


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 176.71 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
RECEPTACLES, 90 THRU 240 CONTACT POSITIONS, FOR PRINTED
WIRING BOARDS (.100 INCH CONTACT SPACING)

MIL-C-55302/130

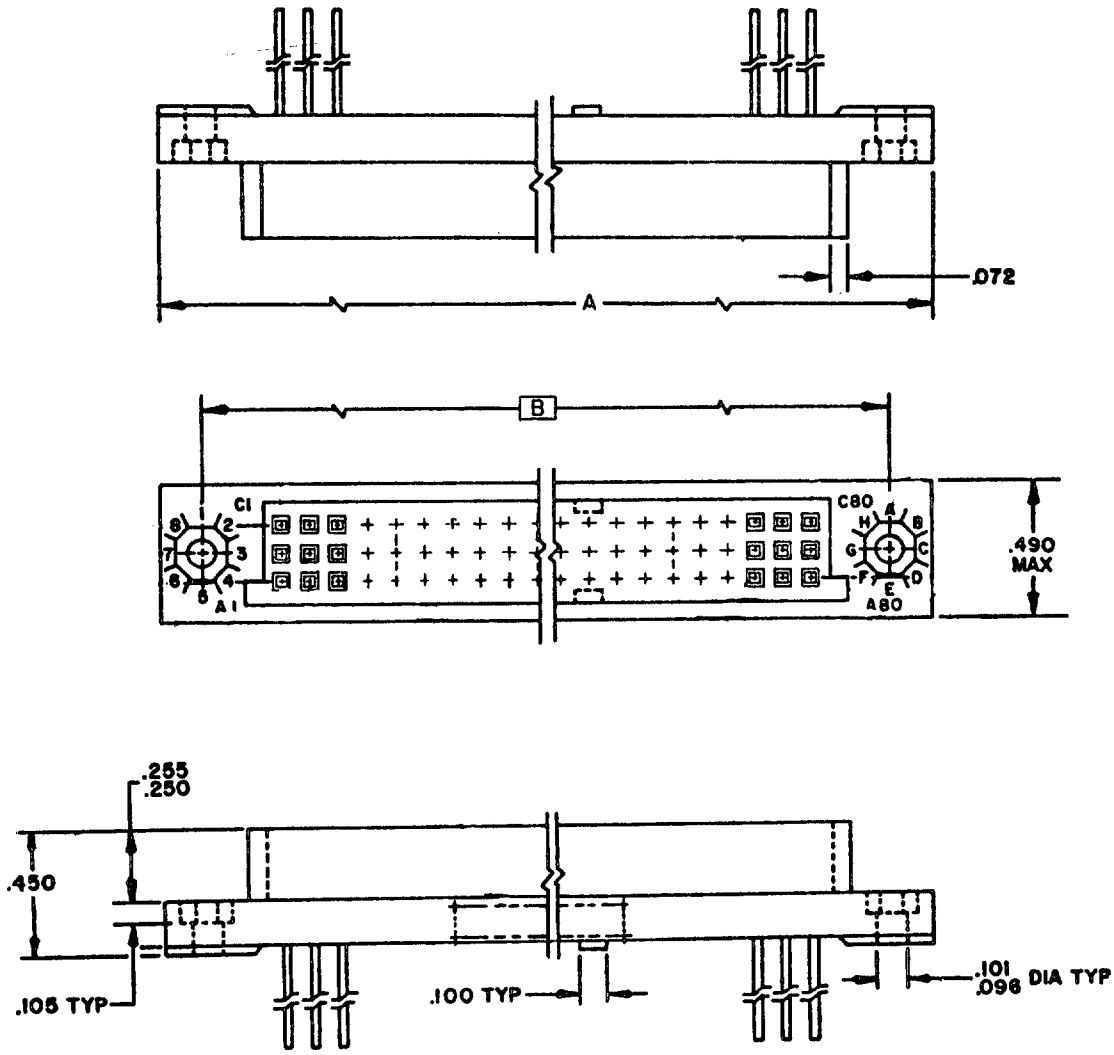

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY

MIL-C-39012


SCOPE: THIS SECTION COVERS RADIO FREQUENCY CONNECTORS USED WITH RADIO FREQUENCY CABLES AND CERTAIN OTHER TYPES OF COAXIAL TRANSMISSION LINES. ALL CONNECTORS LISTED HAVE CAPTIVATED CENTER CONTACTS EXCEPT SLASH NUMBERS (/6-/8, /10-/14, /31-/34, /41, /42, /60-/62, /77, /93, AND /94). THESE CONNECTORS AND FITTINGS COVERED ARE INTENDED FOR USE IN RADIO FREQUENCY APPLICATION UP TO THE FREQUENCY SPECIFIED. PVC JACKETED CABLES ARE NOT FOR AIRBORNE USE.

NOMINAL IMPEDANCE: 50 OHMS

FREQUENCY RANGE:
0 TO 11,000 MHz
0 TO 11,000 MHz (/6, /8, /10, /11, /36, /38, /39, /40, /41, /42)
0 TO 12,400 MHz (/55, /56, /57, /58, /59)
NOT RATED (/60, /61, /62)
0 TO 10 GHz (/73, /74, /75, /76, /77)
.5 TO 18 GHz (/93, /94)

TEMPERATURE RATING:
-65°C TO +165°C
-65°C TO +105°C (/93, /94)

PART NUMBER EXAMPLE: M39012/75-0001

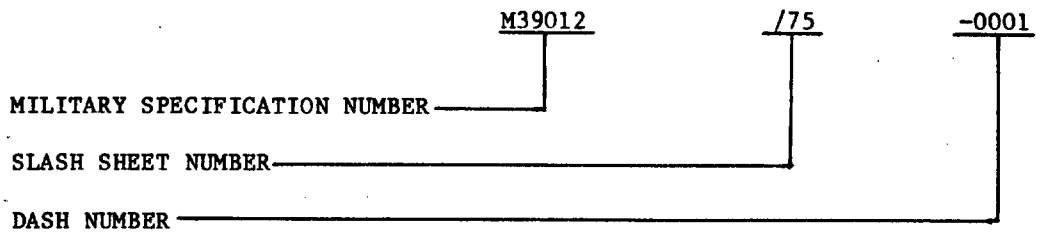



Supersedes Page 182.1 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES N (CABLED), -PLUG, PIN CONTACT, CLASS 2)

MIL-C-39012/1

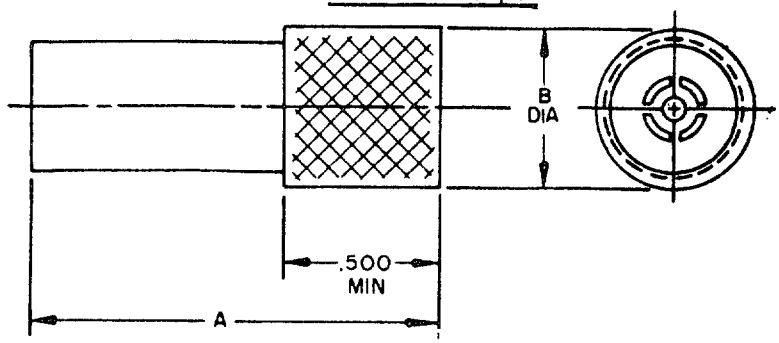



CRIMP FERRULE

PART NUMBER: M39012/01-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE UR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE UR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
0016	RG-212/U	A	2.000													
		B	.827													
0021	RG-165/U	A	2.000													
		B	.827													
0023	RG-11/U															
0024	RG-216/U															
0027	RG-6/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0501	RG-393/U	A	1.593	1-10	.098	.006	1-01	1-13	RED	BLK	1-50	.492	.438	.600	5-01	5-25 CLOS A
		B	.827													
0503	RG-142/U	A	1.516	1-11	.043	.006 x30 +5	1-01	1-13	BLUE		1-52	.250	.220	.500		5-57 CLOS A
		B	.827													


CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.

#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES N (CABLED) - PLUGS AND FLANGE MOUNTED RECEPTACLES, SOCKET CONTACT, CLASS 2)


MIL-C-39012/2

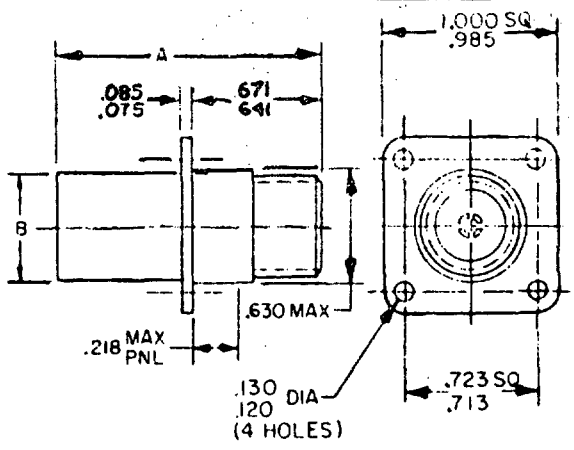

RECEPTACLE

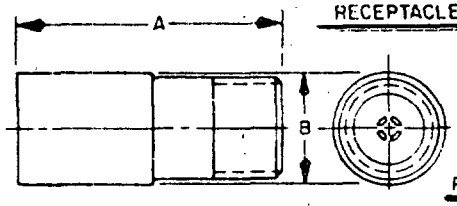

PLUG



CRIMP FERRULE

PART NUMBER: M39012/2-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
0027	RG-212/U	A	1.938													
0030	RG-216/U	B	.750													
0041	RG-165/U															
0042	RG-11/U															
0043	RG-6/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0511	RG-393/U	A	1.656	2-10	.098		1-01	1-13	RED	BRN	2-50	.492	.438	.600	S-01	S-25 CLOS A
		B	.750													
0513	RG-142/U	A	1.593	2-11	.043				BLUE		2-52	.250	.220	.500		S-57
		B	.750													

CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTRUCTION.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 182.3 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES N (CABLED) -RECEPTACLES - JAM NUT MOUNTED, SOCKET CONTACT, CLASS 2)

MIL-C-39012/3

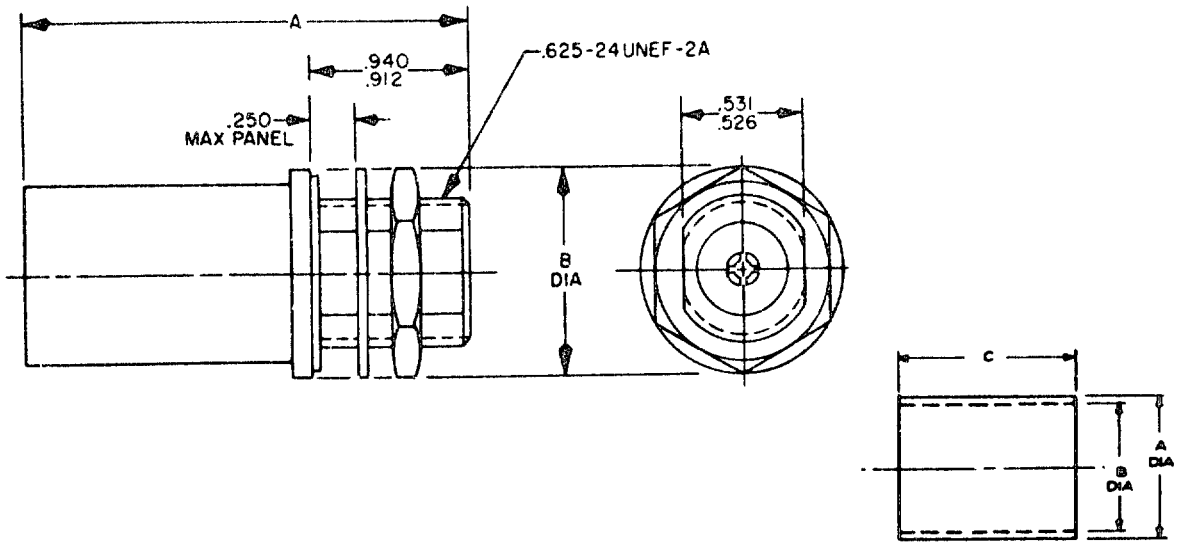

PART NUMBER: M39012/3-#

CRIMP FERRULE

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN MAX $	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
0013	RG-212/U	A	2.031													
0018	RG-165/U	B	.900													
0020	RG-11/U															
0021	RG-216/U															
0023	RG-6/U															
CATEGORY B - FIELD REPLACEABLE - DEFINED PIECE PARTS. #																
0501	RG-393/U	A	1.875	3-10	.098		1-01	1-14	RED	RED	3-50	.492	.438	.600	5-01	5-25 CLOS A
		B	.900													
0503	RG-142/U	A	1.781	3-11	.043		1-01	1-14	BLUE		3-52	.250	.220	.500		5-57 CLOS A
		B	.900													

CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES. COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

$--DIMENSIONS SHOWN ARE MAXIMUM, BUT MINIMUM DIMENSION OF .850 APPLIES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES C (CABLED) - PLUG, MALE, CLASS 2)

MIL-C-39012/6

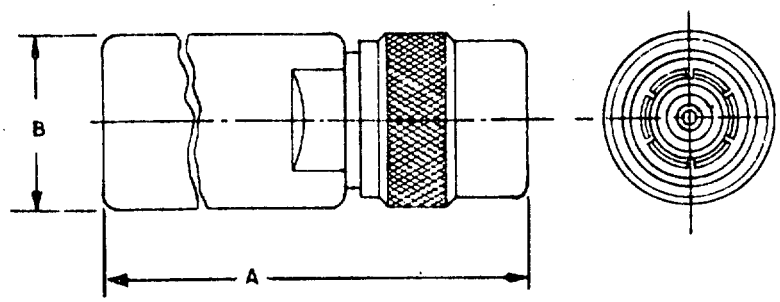

PART NUMBER: M39012/6-*

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.


CATEGORY A - FIELD SERVICEABLE			
* DASH NUMBER	APPLICABLE CABLE NO. M17/	DIM	INCHES MAX
0001	RG-212/U	A	1.609
0002	RG-165/U RG-213/U RG-214/U RG-225/U	A B	1.609 .781
0004	RG-211/U	A B	2.250 1.328

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES C (CABLED) - RECEPTACLE, FEMALE, FLANGE MOUNTED, REAR MOUNTED, CLASS 2)

MIL-C-39012/8

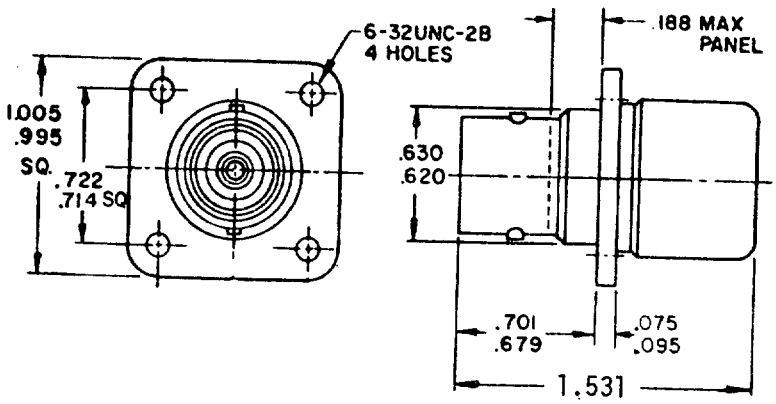

PART NUMBER: M39012/8-*

TABLE I. DASH NUMBERS, CROSS REFERENCE.

CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO. M17/
0001	RG-165/U RG-213/U RG-214/U RG-225/U
0002	RG-212/U


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

Supersedes Page 182.9 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES C (CABLED) - PLUG MALE, RIGHT ANGLE, CLASS 2)

MIL-C-39012/10

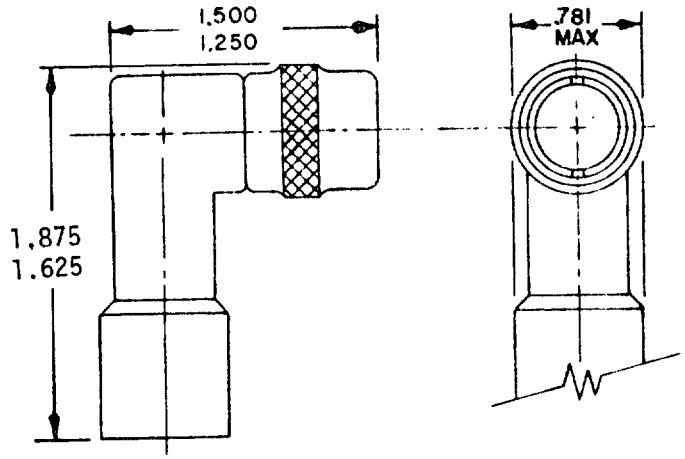

PART NUMBER: M39012/10-*

TABLE I. DASH NUMBERS, CROSS REFERENCE.


CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO. M17/
0001	RG-165/U RG-213/U RG-214/U RG-225/U

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES C (CABLED) - RECEPTACLE, FEMALE, JAM NUT, REAR MOUNTED, PRESSURIZED, CLASS 2)

MIL-C-39012/11

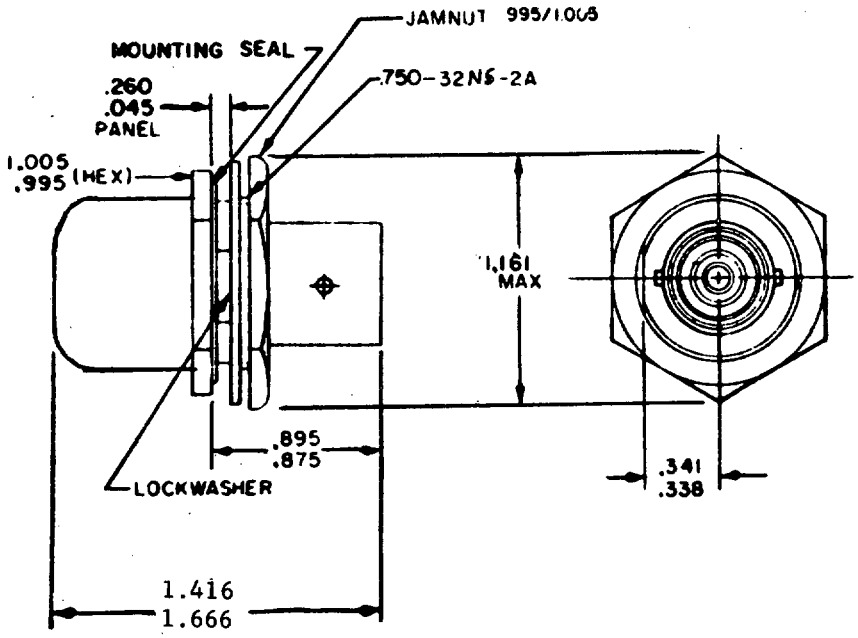

PART NUMBER: M39012/11-*

TABLE I. DASH NUMBERS, CROSS REFERENCE.

CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO. M17/
0001	RG-212/U
0002	RG-165/U RG-213/U RG-214/U RG-225/U


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER

Supersedes Page 182.11 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY, SERIES C (UNCABLED-RECEPTACLE, FEMALE, FLANGE MOUNTED, REAR MOUNTED, CLASS 2)

MIL-C-39012/12

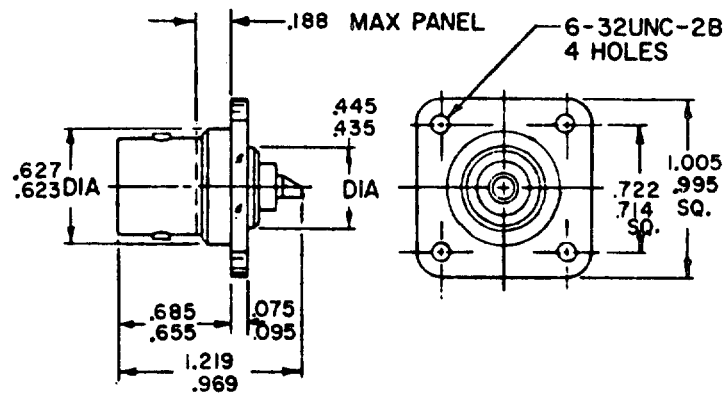


PART NUMBER: M39012/12-0001

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SMA (CABLED) - RECEPTACLE, SOCKET CONTACT, FLANGE MOUNTED, CLASS 2)

MIL-C-39012/58

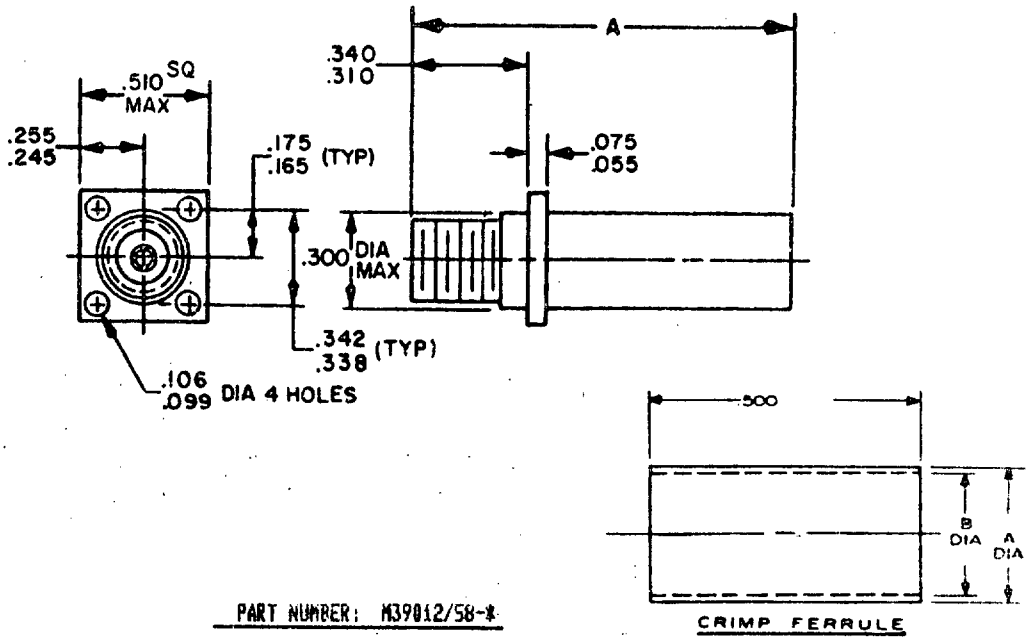

PART NUMBER: M39012/58-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) @																
3025	RG-178/U	A	1.125													
3026	RG-174/U															
3027	RG-122/U															
3029	RG-58/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. # $																
4502	RG-142/U	A	1.125	58-10	.041		1-01	1-15 0K SOLDER	RED	MRN	58-50	.250	.220		5-01	5-57 CLOS A

@ CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES.


$ COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY
(SERIES SMA (CABLED) - RECEPTACLE, SOCKET CONTACT, JAM NUT MOUNTED, CLASS 2)

MIL-C-39012/59

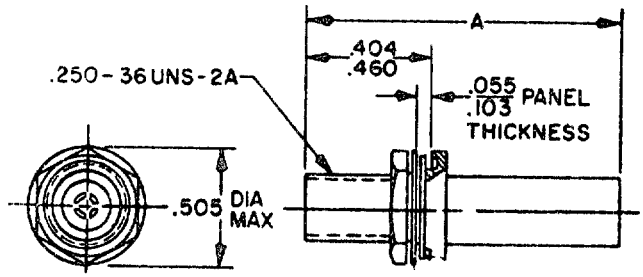

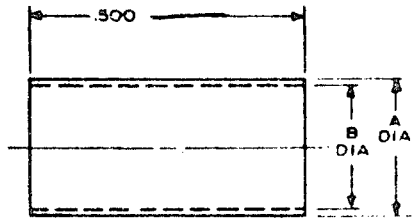

CRIMP FERRULE

PART NUMBER: M39012/59-#

TABLE I. DASH NUMBERS, CROSS REFERENCE AND DIMENSIONS.

DASH NO.#	APPLICABLE CABLE & CONNECTOR DIMENSION			CONTACT							FERRULE					
	CA M17/	DIM	IN-MAX	CONT NO.	A	B	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/	COLOR BAND □	COLOR BAND ○	FER NO.	A	B	C	BSC CRP TOOL M22520/	CRP DIE OR PSNR M22520/
CATEGORY C - FIELD REPLACEABLE (MIL-C-22520 CRIMP TOOL) #																
3025	RG-178/U	A	1.125													
3026	RG-174/U															
3027	RG-122/U															
3029	RG-58/U															
CATEGORY D - FIELD REPLACEABLE - DEFINED PIECE PARTS. # $																
4502	RG-142/U	A	1.125	59-10	.041		1-01	1-15 OR SOLDER	RED	ARN	59-50	.250	.220		5-01	5-57 CLOS A

CONNECTORS ARE ASSEMBLED, USING THE APPLICABLE CRIMP TOOL, TO THE SPECIFIED CABLES.

$ COMPLETE CONNECTOR ASSEMBLY SHALL INCLUDE BODY, CENTER CONTACT, FERRULE, AND ASSY INSTR.


#--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 182.34 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES SMC (CABLED) - PLUG, FEMALE, CLASS 2)

MIL-C-39012/73

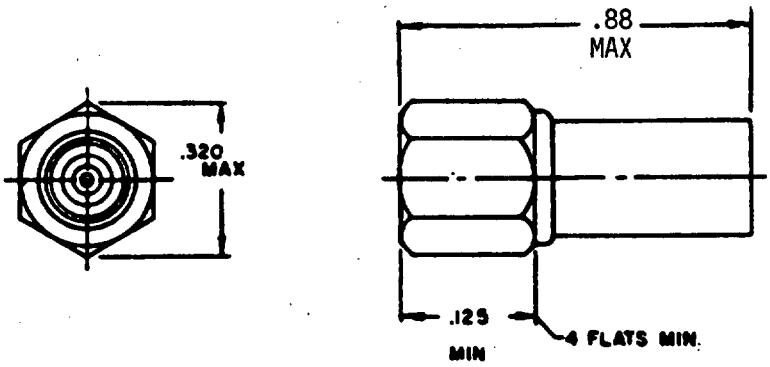

PART NUMBER: M39012/73-*

TABLE I. DASH NUMBERS, CROSS REFERENCE.

CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO. M17/
0001	RG-178/U
0002	RG-174/U RG-316/U RG-179/U
0003	RG-178/U
0004	RG-174/U RG-316/U RG-179/U


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 182.45 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES SMC (CABLED) - PLUG, MALE, CLASS 2)

MIL-C-39012/74

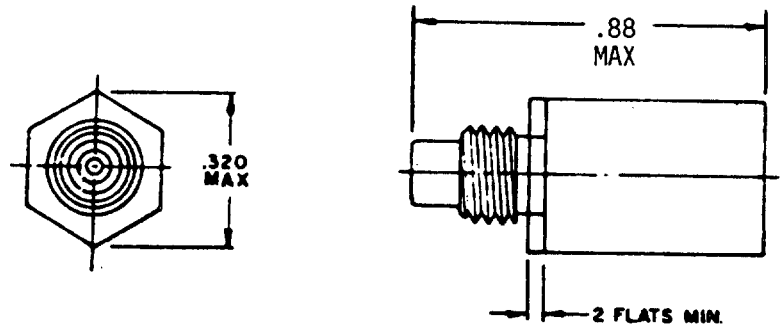

PART NUMBER: M39012/74-*

TABLE I. DASH NUMBERS, CROSS REFERENCE.

CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO. M17/
0001	RG-178/U
0002	RG-174/U RG-316/U RG-179/U
0003	RG-178/U
0004	RG-174/U RG-316/U RG-179/U


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 182.46 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES SMC (CABLED) - PLUG, FEMALE, RIGHT ANGLE, CLASS 2)

MIL-C-39012/75

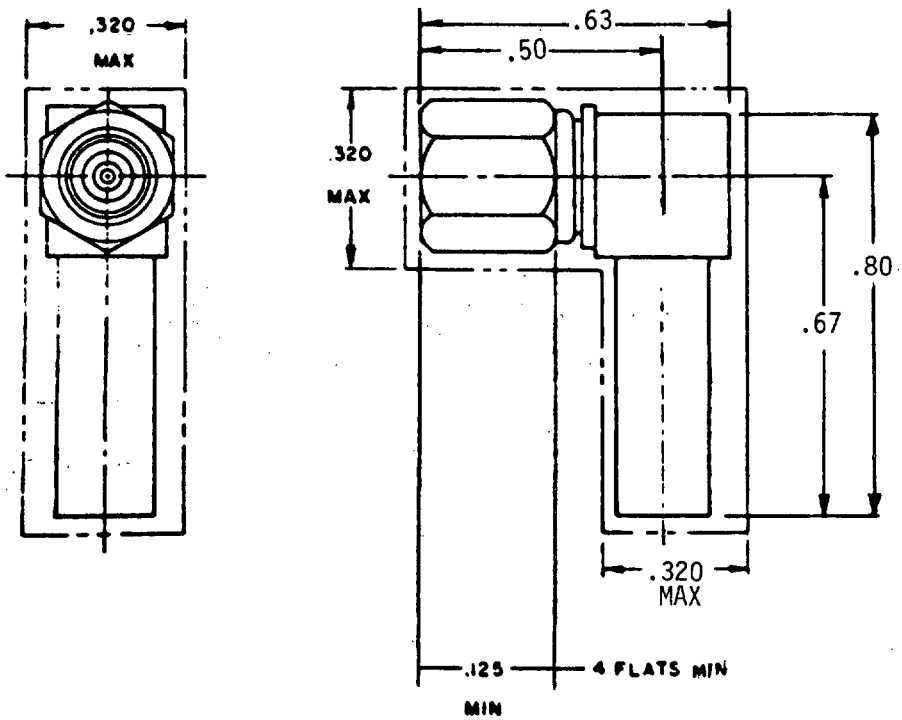

PART NUMBER: M39012/75-*

TABLE I. DASH NUMBERS, CROSS REFERENCE.

CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO. M17/
0001	RG-178/U
0002	RG-174/U RG-316/U RG-179/U
0003	RG-178/U
0004	RG-174/U RG-316/U RG-179/U


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 182.47 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, COAXIAL, RADIO FREQUENCY (SERIES SMC (CABLED) - RECEPTACLE, MALE, JAMNUT MOUNTED, REAR MOUNTED, CLASS 2)

MIL-C-39012/76

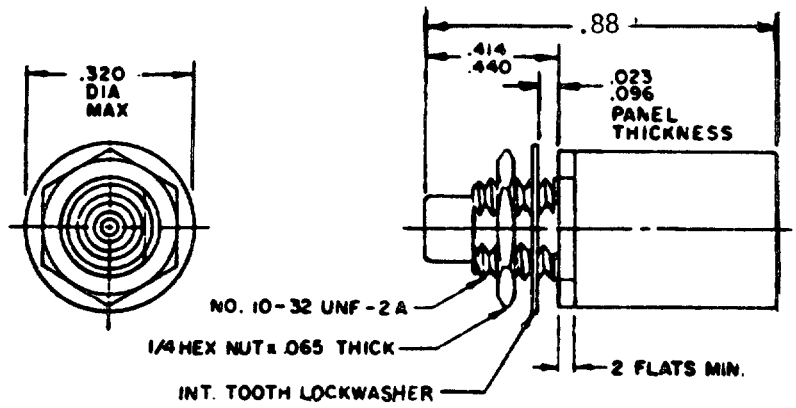

PART NUMBER: M39012/76-*

TABLE I. DASH NUMBERS, CROSS REFERENCE.

CATEGORY A - FIELD SERVICEABLE	
* DASH NUMBER	APPLICABLE CABLE NO. M17/
0001	RG-178/U
0002	RG-174/U RG-316/U RG-179/U
0003	RG-178/U
0004	RG-174/U RG-316/U RG-179/U

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 182.48 of 16 August 1982.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE, SINGLE TEST POINT (THREADED), LOW VOLTAGE

MIL-C-39024

SCOPE: THIS SECTION COVERS GENERAL REQUIREMENT FOR PANEL OR PRINTED WIRING TYPE TEST POINT CONNECTORS FOR USE IN ELECTRICAL AND ELECTRONIC EQUIPMENT. THESE ARE PRIMARILY INTENDED FOR USEAGE IN GROUND SUPPORT AND SHIPBOARD ELECTRICAL AND ELECTRONIC EQUIPMENT.

PART NUMBER: M39024/11-01

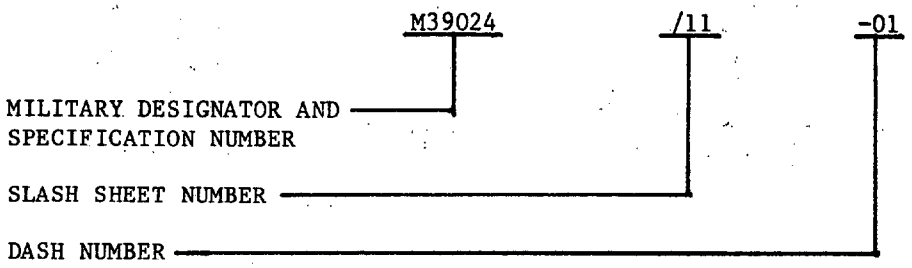


Supersedes Page 210.4 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING, SINGLE TEST POINT (RIGHT ANGLE, 3-LEG MOUNTING), LOW VOLTAGE

MIL-C-39024/4

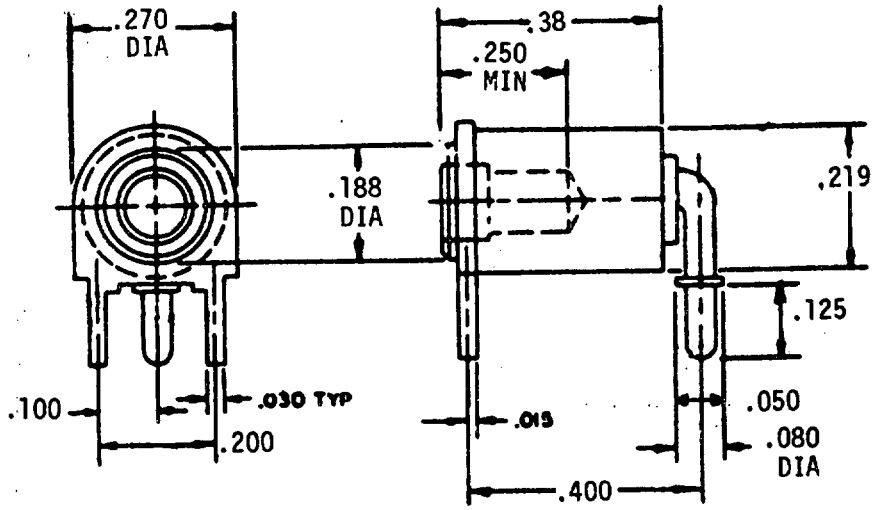

CONTACT CURRENT RATING: 5 AMPERES MAX

PART NUMBER: M39024/4-*

TABLE I. DIMENSIONS AND COLOR CODE.

DASH NUMBER*	COLOR	OPERATING VOLTAGE
01	WHITE	1500 VOLTS rms 60 Hz
02	RED	
03	BLACK	
04	BROWN	
05	GREEN	
06	ORANGE	
07	BLUE	
08	YELLOW	
09	GRAY	
10	PURPLE	


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 210.5 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE
SINGLE TEST POINT (THREADED), LOW VOLTAGE

MIL-C-39024/10C

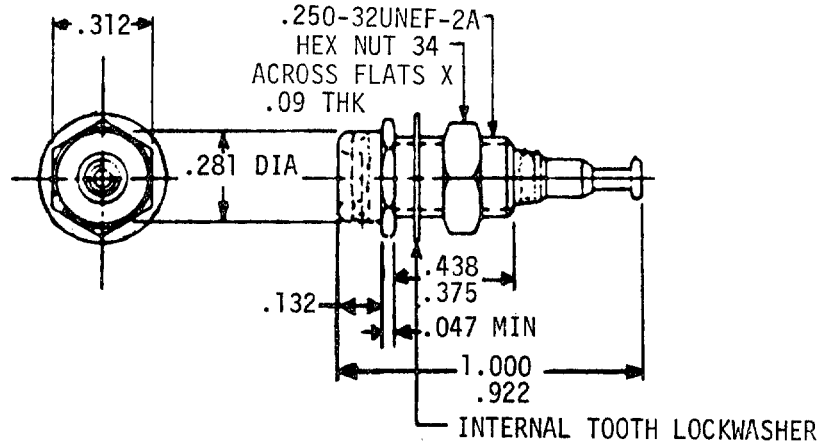

PART NUMBER: M39024/10-* CONTACT CURRENT RATING: 5 AMPERES

TABLE I. DESIGN AND IDENTIFICATION DATA.

DASH NUMBER*	TERMINAL STYLE	INSULATION COLOR	OPERATING VOLTAGE
01	TURRET	WHITE	2000 VOLTS rms
02		RED	60 Hz
03		BLACK	
04		BROWN	
05		GREEN	
06		ORANGE	
07		BLUE	
08		YELLOW	
09		GRAY	
10		PURPLE	
11	EYELET	WHITE	
12		RED	
13		BLACK	
14		BROWN	
15		GREEN	
16		ORANGE	
17		BLUE	
18		YELLOW	
19		GRAY	
20		PURPLE	


*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 210.6 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PRINTED WIRING TYPE
SINGLE TEST POINT (RIGHT ANGLE, 2-LEG MOUNTING), LOW VOLTAGE, .080

MIL-C-39024/11D

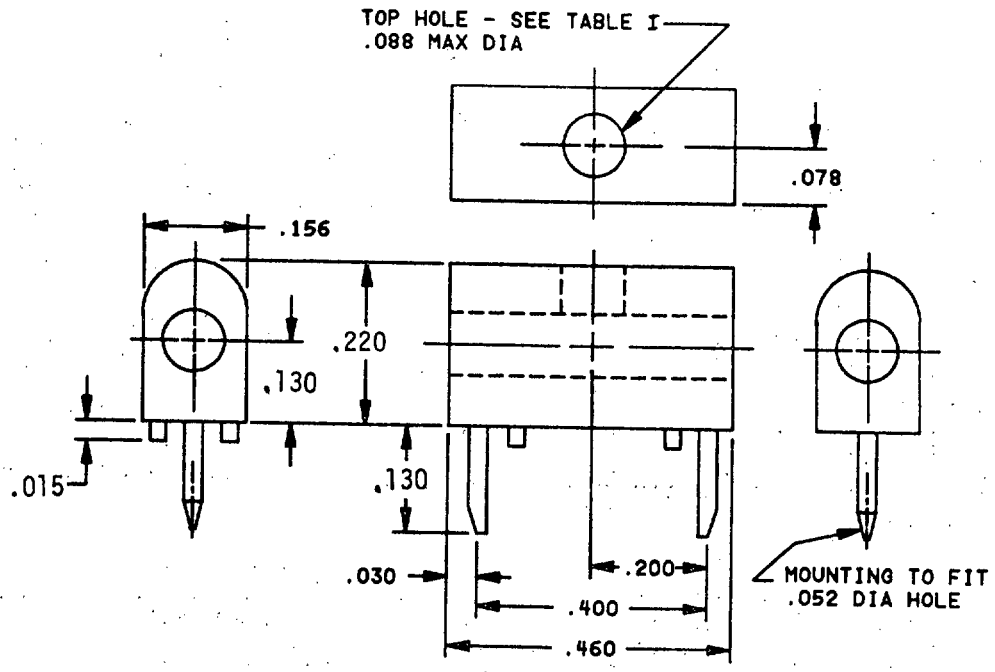

PART NUMBER: M39024/11-*

TABLE I. DESIGN AND IDENTIFICATION DATA.


DASH NUMBER*	INSULATION COLOR	OPERATING VOLTAGE
01, 41	WHITE	2000 VOLTS rms 60 Hz for dash numbers 01 - 10
02, 42	RED	
03, 43	BLACK	
04, 44	BROWN	
05, 45	GREEN	500 VOLTS rms 60 Hz for dash numbers 41 - 50
06, 46	ORANGE	
07, 47	BLUE	
08, 48	YELLOW	
09, 49	GRAY	
10, 50	PURPLE	

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CONNECTORS, ELECTRICAL, TEST POINT TYPE, PANEL TYPE
SINGLE TEST POINT (HOLE MOUNTING, PUSH-FIT), LOW VOLTAGE

MIL-C-39024/12C

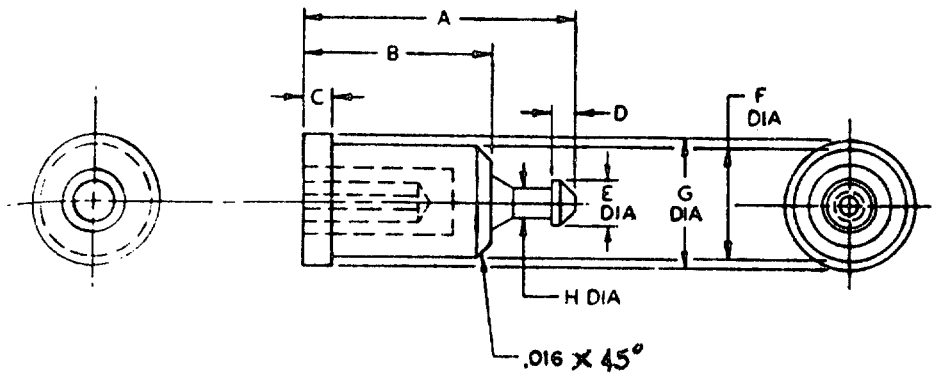

PART NUMBER: M39024/12-* CONTACT CURRENT RATING: 5.5 AMPERES

TABLE I. DESIGN AND IDENTIFICATION DATA.

DASH NUMBER*	DIMENSIONS								INSULATION COLOR	OPERATING VOLTAGE
	A	B	C	D	E DIA	F DIA	G DIA	H DIA		
01	0.453	0.317	0.047	0.037	0.074	0.185	0.219	0.054	WHITE	800 VOLTS rms 60 Hz
02									RED	
03									BLACK	
04									BROWN	
05									GREEN	
06									ORANGE	
07									BLUE	
08									YELLOW	
09									GRAY	
10									PURPLE	
11									NATURAL	
12	0.390	0.265	0.046	0.023	0.068	0.149	0.172	0.040	WHITE	700 VOLTS rms 60 Hz
13									RED	
14									BLACK	
15									BROWN	
16									GREEN	
17									ORANGE	
18									BLUE	
19									YELLOW	
20									GRAY	
21									PURPLE	
22									NATURAL	

*--COMPLETE PART NUMBER SHALL INCLUDE DASH NUMBER.

Supersedes Page 210.8 of 16 August 1982.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.