MIL-STD-242J(NAVY), PART 9
30 OCTOBER 1987
SUPERSEDING
MIL-STD-242H(NAVY), PART 9
15 JULY 1983

MILITARY STANDARD

ELECTRONIC EQUIPMENT PARTS
SELECTED STANDARDS

CIRCUIT BREAKERS, FUSES, LAMPS, AND METERS



FSC 59GP

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF DEFENSE
Washington, D. C. 20363

ELECTRONIC EQUIPMENT PARTS, SELECTED STANDARDS, CIRCUIT BREAKERS, FUSES, LAMPS AND METERS

MIL-STD-242J(NAVY), PART 9

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Recommended corrections, additions, or deletions should be addressed to: Commander, Space and Naval Warfare Systems Command, Attn: SPAWAR 003-1212, Department of the Navy, Washington, D. C. 20363-5100.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FOREWARD

This Military Standard Part provides equipment designers and manufacturers with a list of Circuit Breakers, Fuses, Lamps, and Meters having quality levels most acceptable in the design and construction of military systems and equipments. It will also aid to control and minimize the life cycle cost, improve reliability of equipment and minimize logistic support. The criteria used in selecting parts are as follows:

The criteria used in selecting parts are as follows:

1. Application Need. Parts must satisfy the widest range of design requiring reliable parts.

2. Technological Maturity. The design of the part must be final and must use proven materials and technologies. It must have been in production for a period sufficient to ensure that the design and process parameters have been identified and adequate quality controls have been developed.

3. Availability. The part must be in production by at least one manufacturer whose previous performance indicates ability to qualify to specifications of this standard. There must also be a reasonable expectation that the part will not become obsolete for at least seven years. Microcircuits are excluded from this requirement because of rapid technological changes.

4. Test or usage history. Sufficient test or usage data to predict part reliability must be available.

In the event of conflict between the technical description of standard parts in this standard and the applicable specification, the applicable specification shall govern.

Technical information included in this standard was obtained from military specifications and standards; no warranty is made of data accuracy, or that inclusion of these parts will assure equipment/systems will meet performance requirements of any contracts. The contractor is responsible for conducting necessary tests and inspections of selected parts to ensure that contract requirements are met.

Review activities:
Navy-AS, SH

User activity:
Navy-MC

Preparing activities:
Navy-EC

(Project Number 59GP-N068)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, FUSES, LAMPS, AND METERS

1. SCOPE.

1.1 PURPOSE. THE PURPOSE OF THIS STANDARD IS TO CONTROL AND MINIMIZE THE VARIETY OF CIRCUIT BREAKERS, FUSES, LAMPS, AND METERS IN NAVY EQUIPMENT IN ORDER TO FACILITATE EFFECTIVE LOGISTIC SUPPORT, IMPROVE QUALITY AND REDUCE COST.

1.2 SCOPE. THIS STANDARD ESTABLISHES THE REQUIREMENTS FOR THE SELECTION OF CIRCUIT BREAKERS, FUSES, LAMPS, AND METERS, USED IN THE DESIGN AND MANUFACTURE OF NAVY EQUIPMENT.

2. REFERENCED DOCUMENTS.

2.1 THE ISSUES OF THE FOLLOWING DOCUMENTS IN EFFECT ON THE DATE OF INVITATION FOR BIDS FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

SPECIFICATIONS

MILITARY

MIL-C-17361	CIRCUIT BREAKERS, AIR, ELECTRIC, INSULATED HOUSING GENERAL SPECIFICATION FOR
MIL-C-39019	CIRCUIT BREAKERS, MAGNETIC, LOW-POWER, SEALED, TRIP-FREE GENERAL SPECIFICATION FOR
MIL-C-55629	CIRCUIT BREAKERS, MAGNETIC, UNSEALED OR PANEL SEAL, TRIP-FREE GENERAL SPECIFICATION FOR
MIL-F-15160	FUSES, INSTRUMENT, POWER, AND TELEPHONE GENERAL SPECIFICATION FOR
MIL-F-19207	FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING AND NONINDICATING, GENERAL SPECIFICATION FOR
MIL-F-21346	FUSEHOLDERS, BLOCK AND SHROUD TYPE, AND ASSOCIATED FUSE CLIPS GENERAL SPECIFICATION FOR
MIL-F-23419	FUSES, INSTRUMENT TYPE GENERAL SPECIFICATION FOR
W-L-111	LAMPS, INCANDESCENT, (ELECTRIC, MINIATURE, AND SUBMINIATURE, TUNGSTEN-FILAMENT), GENERAL SPECIFICATION FOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, FUSES, LAMPS, AND METERS

2.1 SPECIFICATIONS (CONT.)

MILITARY

MIL-L-3661	LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS, AND INDICATOR-LIGHT LENSES, GENERAL SPECIFICATION FOR
MIL-L-6363	LAMPS, INCANCESCENT, AVIATION SERVICE GENERAL SPECIFICATION FOR
MIL-L-15098	LAMPS, GLOW GENERAL SPECIFICATION FOR
MIL-M-7793	METERS, TIME TOTALIZING GENERAL SPECIFICATION FOR
MIL-M-10304	METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED GENERAL SPECIFICATION FOR

STANDARDS

MILITARY

MIL-STD-1279	METERS, ELECTRICAL, INDICATING
MIL-STD-1360	FUSE, FUSEHOLDERS, AND ASSOCIATED HARDWARE
MS15571	LAMPS, INCANDESCENT, T-3-1/4, MINIATURE BAYONET, SINGLE CONTACT
MS18235	LAMPS, CARTRIDGE, SHORT CYLINDRICAL, PLUG-IN, INCANDESCENT, PLASTIC (FLAT LENS TYPE)
MS18236	LAMPS, CARTRIDGE, STOVEPIPE, PLUG-IN, NEON, PLASTIC (CURVE LENS TYPE)
MS18237	LAMPS, CARTRIDGE, LONG CYLINDRICAL, PLUG-IN, NEON, PLASTIC (FLAT LENS TYPE)
MS18238	LAMPS, CARTRIDGE, SHORT CYLINDRICAL, PLUG-IN, NEON, GLASS (FLAT LENS TYPE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, FUSES, LAMPS, AND METERS

STANDARDS

MILITARY

MS25237 LAMPS, INCANDESCENT, SINGLE CONTACT, MIDGET FLANGED BASE, (T-3-1/4 BULB)

MS25231 LAMPS, INCANDESCENT, CENTER CONTACT, MINIATURE BAYONET, (T-3-1/4 BULB)

3. DEFINITIONS.

3.1 THE TERMS USED IN THIS STANDARD ARE DEFINED IN REFERENCED DOCUMENTS.

4. GENERAL REQUIREMENTS.

4.1 SELECTION OF DEVICES SHALL BE MADE FROM TYPES LISTED IN THIS STANDARD.

THE VARIETY OF TYPES USED IN ANY NAVY EQUIPMENT SHALL BE THE MINIMUN NECESSARY TO PROVIDE SATISFACTORY PERFORMANCE AND THE CONTRACTOR (HARDWARE DESIGNER BUILDER) SHALL EXERCISE ALL REASONABLE DESIGN CHOICES TO ACHIEVE THIS OBJECTIVE.

4.2 CRITERIA FOR INCLUSION IN THIS STANDARD.

(A). THE DEVICE MUST SATISFY A WIDE RANGE OF DESIGN REQUIREMENTS.

(B). AT LEAST ONE MANUFACTURER IS QUALIFIED TO THE APPLICABLE DETAIL SPECIFICATION.

(C). THERE IS REASONABLE ASSURANCE THAT THE DEVICE WILL BE AVAILABLE FOR AT LEAST SEVEN YEARS.

4.3 CHARACTERISTICS. THE CHARACTERISTICS LISTED HEREIN ARE FOR REFERENCE ONLY AND ARE INTENDED AS AN AID IN SELECTING DEVICES. THE APLLICABLE SHALL BE USED FOR ALL FINAL DESIGN CRITERIA. DETAIL SPECIFICATION SHALL BE USED FOR ALL FINAL DESIGN CRITERIA.

4.4 CONFLICT OF DATA. IN THE EVENT OF CONFLICT BETWEEN THE TECHNICAL DESCRIPTION OF DEVICES IN THIS STANDARD AND THE APPLICABLE DETAIL SPECIFICATION, THE APPLICABLE DETAIL SPECIFICATION SHALL GOVERN.

5. IDENTIFICATION.

5.1 COMPONENT IDENTIFICATION IS THE PART NUMBER OR TYPE DESIGNATOR AS LISTED IN THIS STANDARD.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 KEY WORDS

CIRCUIT BREAKERS
FUSES
FUSEHOLDERS
LAMPS
LAMPS INCANDESCENT
LAMPS CARTRIDGE
METERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPS, FUSES, CIRCUIT BREAKERS, AND METERS

TABLE OF CONTENTS

SUBJECT/SECTION		PAGE NUMBER
100	LAMPS AND LAMPHOLDERS	
	110 W-L-111	110.1 - .4
	130 MIL-L-3661	130.1 - .44
	150 MIL-L-6363	150.1 - .2
	170 MIL-L-15098	170.1 - .3
	175 MS15571	175.1
	MS18235	175.2
	MS18236	175.3
	MS18237	175.4
	MS18238	175.5
200	FUSES AND FUSEHOLDERS	
	210 MIL-F-15160	210.1 - .6
	230 MIL-F-23419	230.1 - .5
	250 MIL-F-19207	250.1 - .23
300	CIRCUIT BREAKERS	
	310 MIL-C-17361	310.1 - .4
	330 MIL-C-39019	330.1 - .14
	350 MIL-C-55629	350.1 - .55
400	METERS	
	410 MIL-M-7793	410.1
	430 MIL-M-10304	430.1 - .14

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


LAMPS, INCANDESCENT, SUB-MINIATURE

W-L-111

SCOPE: THIS SECTION COVERS MINIATURE AND SUBMINIATURE INCANDESCENT TUNGSTEN-FILAMENT ELECTRIC LAMPS. THESE LAMPS ARE GENERALLY RATED AT 28 VOLTS OR LESS AND INTENDED FOR USE IN INDICATOR, AVAIATION, FLASHLIGHT AND SIMILAR APPLICATIONS.

LAMPS, INCANDESCENT, SUB-MINIATURE, T-1 3/4 CLEAR BULB, SINGLE CONTACT MIDGET FLANGED BASE, C-2F FILAMENT

W-L-111/7

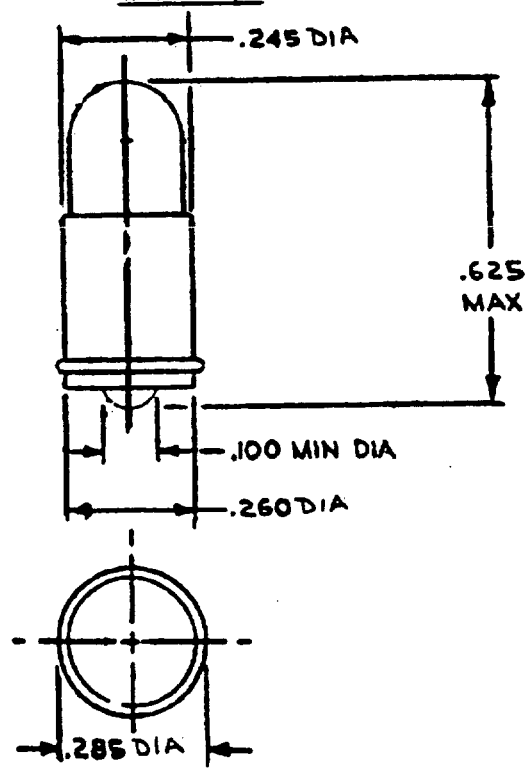

VOLTAGE : 28.0 VOLTS dc


CURRENT : .04 AMPERES

CURRENT TOLERANCE : + 10 %

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPS, INCANDESCENT, MINIATURE, T-3 1/4 CLEAR BULB, MINIATURE BAYONET BASE, C-2B FILAMENT

W-L-111/40

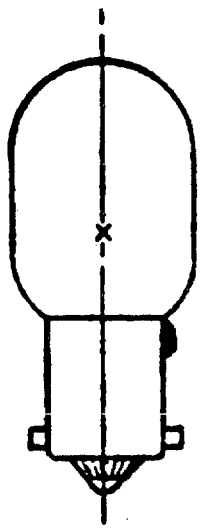

VOLTAGE : 6.3 VOLTS dc


CURRENT : .15 AMPERES

CURRENT TOLERANCE : ± 10 %

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPS, INCANDESCENT, MINIATURE, G-6 CLEAR BULB, DOUBLE CONTACT BAYONET BASE, 2C-2V FILAMENT

W-L-111/50

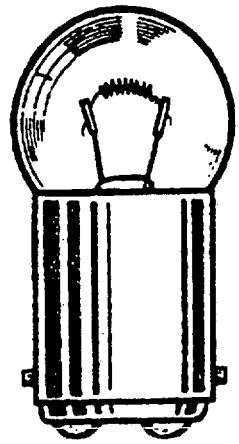


VOLTAGE :	28.0 VOLTS dc
CURRENT :	.23 AMPERES
CURRENT TOLERANCE :	± 10 %

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPS, INCANDESCENT, MINIATURE, T-3 1/4 CLEAR BULB, MINIATURE BAYONET BASE

W-L-111/59

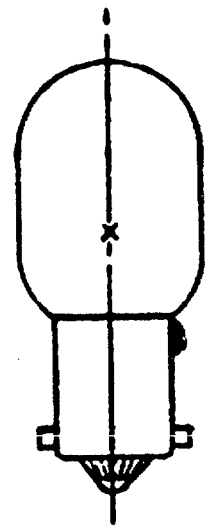


VOLTAGE :	28.0 VOLTS dc
CURRENT :	.04 AMPERES
CURRENT TOLERANCE :	± 10 %

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS, AND INDICATOR-LIGHT LENSES

MIL-L-3661


SCOPE: THIS SECTION COVERS GENERAL REQUIREMENTS FOR LAMPHOLDERS, INDICATOR LIGHTS INDICATOR-LIGHT HOUSINGS, AND INDICATOR-LIGHT LENSES, INCLUDING DISPLAY AND INTERGRAL LAMP DRIVER NETWORK TYPES AND ASSOCIATED HARDWARE THE LAMPHOLDERS INDICATOR-LIGHTS, INDICATOR-LIGHT HOUSINGS AND LENSES ARE FOR USE AS PANEL DISPLAY AND INDICATING FUNCTIONS ON ELECTRICAL, ELECTRONIC AND COMMUNICATING EQUIPMENT.

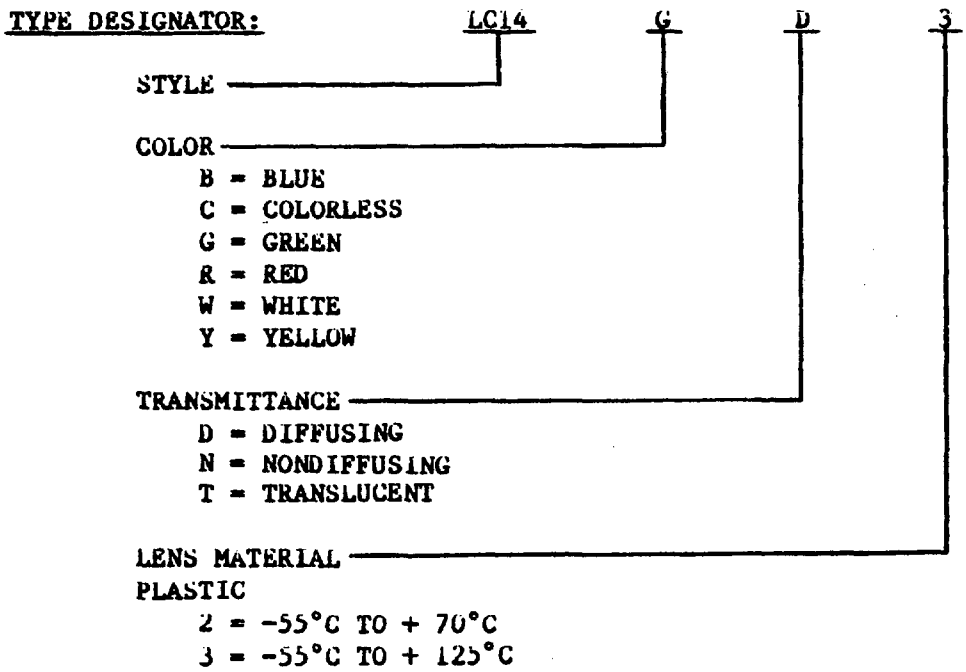

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES, (FLAT, ROTATABLE), DUSTTIGHT, LENS, STYLE LC11

MIL-L-3661/11

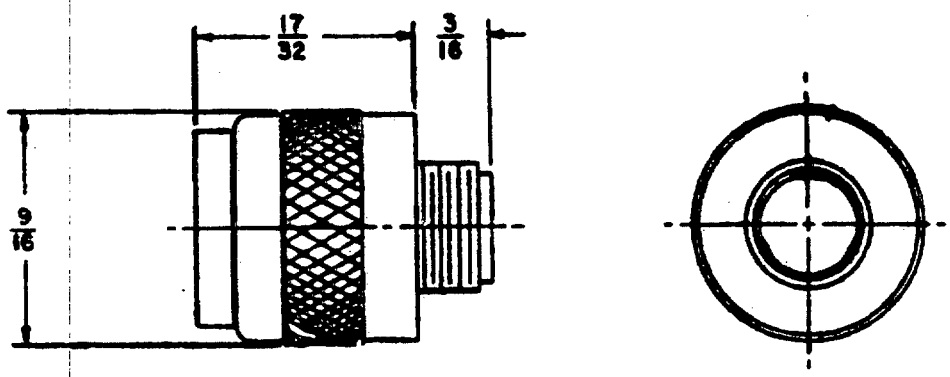


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC11RN2	LH73/1	PLASTIC	NONDIFFUSING	RED
LC11GN2				GREEN
LC11YN2				YELLOW
LC11BN2				BLUE
LC11CN2				COLORLESS
LC11RT2			TRANSLUCENT	RED
LC11GT2				GREEN
LC11YT2				YELLOW
LC11BT2				BLUE
LC11WT2				WHITE
LC11RB2				RED
LC11GB2				GREEN
LC11YB2				YELLOW
LC11BB2				BLUE
LC11WB2				WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, STYLE LC12

MIL-L-3661/12

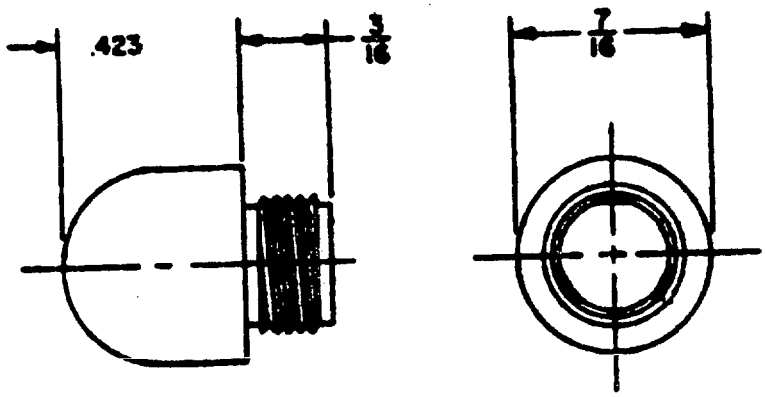


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC12RN2	LH73/1	PLASTIC	NONDIFFUSING	RED
LC12GN2	↓	↓	↓	GREEN
LC12YN2	↓	↓	↓	YELLOW
LC12BN2	↓	↓	↓	BLUE
LC12CN2	↓	↓	↓	COLORLESS
LC12RT2	↓	↓	TRANSLUCENT	RED
LC12GT2	↓	↓	↓	GREEN
LC12YT2	↓	↓	↓	YELLOW
LC12BT2	↓	↓	↓	BLUE
LC12WT2	↓	↓	↓	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, STYLE LC13

MIL-L-3661/13

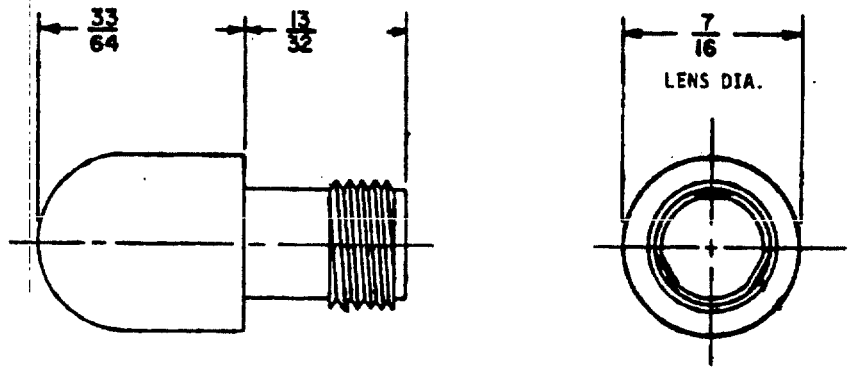


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC13RN2	LH74/1	PLASTIC	NONDIFFUSING	RED
LC13YN2	AND	↓	↓	YELLOW
LC13CN2	LH74/2			COLORLESS
LC13WT2			TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC14

MIL-L-3661/14

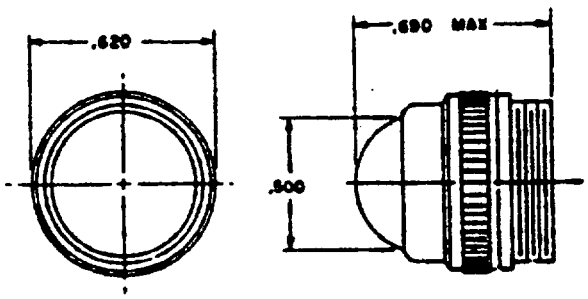


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC14RN3	LH50, LH76/1,/2,/3	PLASTIC	NONDIFFUSING	RED
LC14GN3	LH50, LH76/3			GREEN
LC14YN3	LH50, LH76/1,/2,/3			YELLOW
LC14BN3	LH50, LH76/3			BLUE
LC14CN3	LH50, LH76/1,/2,/3			COLORLESS
LC14RD3	LH50, LH76/1,/2,/3		DIFFUSING	RED
LC14GD3	LH50, LH76/3			GREEN
LC14YD3	LH50, LH76/1,/2,/3			YELLOW
LC14BD3	LH50, LH76/3			BLUE
LC14CD3	LH50, LH76/1,/2,/3			COLORLESS
LC14WT3	LH50, LH76/3		TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC15

MIL-L-3661/15

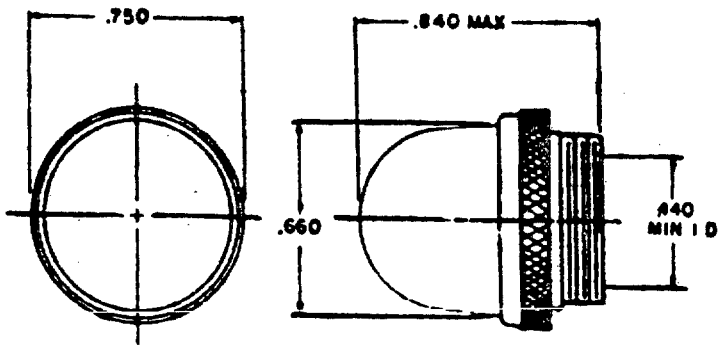


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC15RN3	LH50, LH76/3	PLASTIC	NONDIFFUSING	RED
LC15GN3	↓	↓	↓	GREEN
LC15YN3				YELLOW
LC15BN3				BLUE
LC15CN3				COLORLESS
LC15RD3			DIFFUSING	RED
LC15GD3			↓	GREEN
LC15BD3				BLUE
LC15WT3	↓	↓	TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC16

MIL-L-3661/16

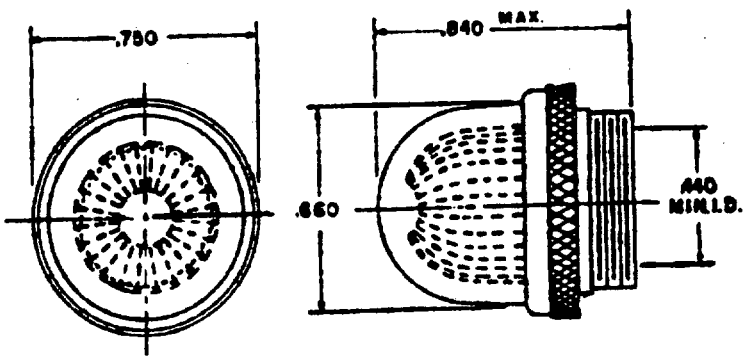


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC16RN3	LH50, LH76/1,2	PLASTIC	NONDIFFUSING	RED
LC16GN3				GREEN
LC16YN3				YELLOW
LC16BN3				BLUE
LC16CN3				COLORLESS
LC16WT3			TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC17, CONVEX, COMPLETE-BLACKOUT, MECHANICAL DIMMER

MIL-L-3661/17

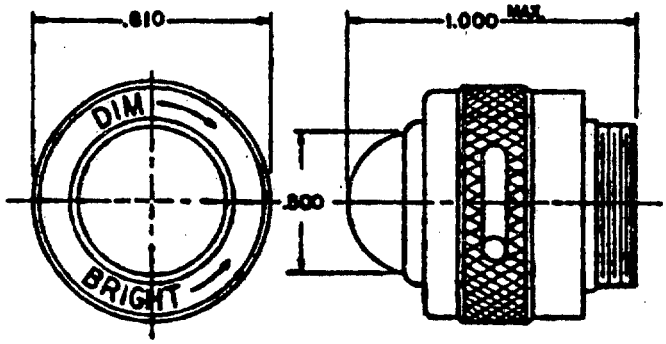


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC17RN3	LH50, LH76/1,/2,/3	PLASTIC	NONDIFFUSING	RED
LC17GN3	LH50, LH76/3	↓	↓	GREEN
LC17YN3	LH50, LH76/1,/2,/3	↓	↓	YELLOW
LC17BN3	LH50, LH76/3	↓	↓	BLUE
LC17CN3	LH50, LH76/1,/2,/3	↓	↓	COLORLESS
LC17RD3	LH50, LH76/1,/2,/3	↓	DIFFUSING	RED
LC17GD3	LH50, LH76/3	↓	↓	GREEN
LC17YD3	LH50, LH76/1,/2,/3	↓	↓	YELLOW
LC17BD3	LH50, LH76/3	↓	↓	BLUE
LC17CD3	LH50, LH76/1,/2,/3	↓	↓	COLORLESS
LC17WT3	LH50, LH76/3	↓	TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC18, CONVEX, SEMI-BLACKOUT, MECHANICAL DIMMER

MIL-L-3661/18

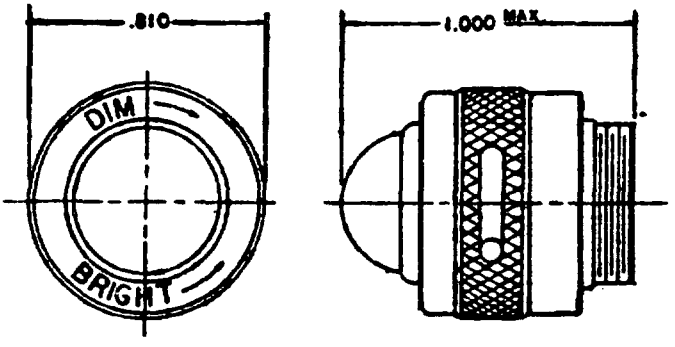


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC18RN3	LH50, LH76/1,/2,/3	PLASTIC	NONDIFFUSING	RED
LC18GN3	LH50, LH76/3	↓	↓	GREEN
LC18YN3	LH50, LH76/1,/2,/3	↓	↓	YELLOW
LC18BN3	LH50, LH76/3	↓	↓	BLUE
LC18CN3	LH50, LH76/1,/2,/3	↓	↓	COLORLESS
LC18RD3	LH50, LH76/1,/2,/3	↓	DIFFUSING	RED
LC18GD3	LH50, LH76/3	↓	↓	GREEN
LC18YD3	LH50, LH76/1,/2,/3	↓	↓	YELLOW
LC18BD3	LH50, LH76/3	↓	↓	BLUE
LC18CD3	LH50, LH76/1,/2,/3	↓	↓	COLORLESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC19

MIL-L-3661/19

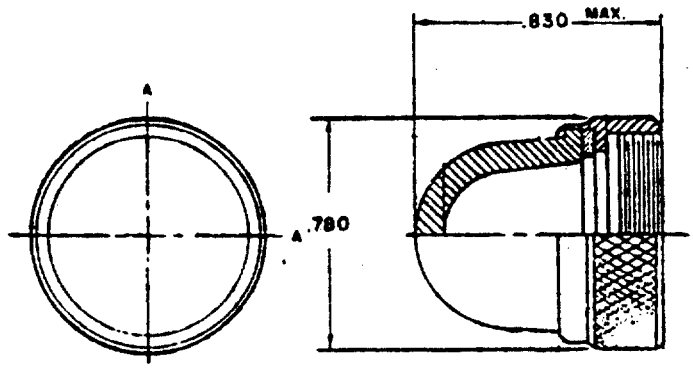


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC19RN3	LH77/1,/2,/3	PLASTIC	NONDIFFUSING	RED
LC19GN3	LH77/3	↓	↓	GREEN
LC19YN3	LH77/1,/2,/3	↓	↓	YELLOW
LC19BN3	LH77/3	↓	↓	BLUE
LC19CN3	LH77/1,/2,/3	↓	↓	COLORLESS
LC19RD3	LH77/1,/2,/3	↓	DIFFUSING	RED
LC19GD3	LH77/3	↓	↓	GREEN
LC19YD3	LH77/1,/2,/3	↓	↓	YELLOW
LC19BD3	LH77/3	↓	↓	BLUE
LC19CD3	LH77/1,/2,/3	↓	↓	COLORLESS
LC19WT3	LH77/3	↓	TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC20

MIL-L-3661/20

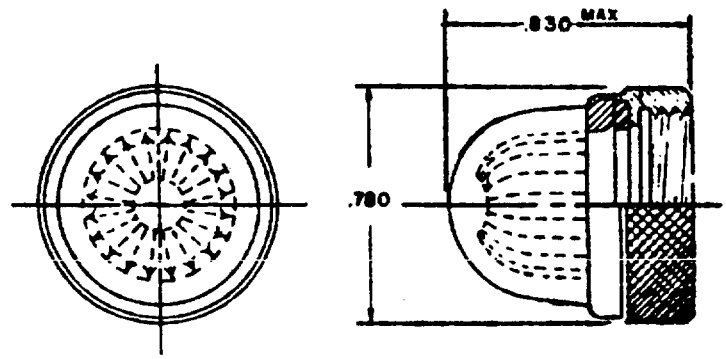


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC20RN3	LH77/1,/2,/3	PLASTIC	NONDIFFUSING	RED
LC20GN3	LH77/3	↓	↓	GREEN
LC20YN3	LH77/1,/2,/3			YELLOW
LC20BN3	LH77/3			BLUE
LC20CN3	LH77/1,/2,/3			COLORLESS
LC20WT3	LH77/3	↓	TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC21

MIL-L-3661/21

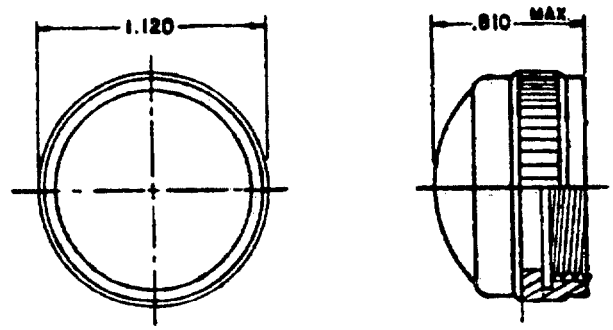


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC21RN3	LH79, LH80	PLASTIC	NONDIFFUSING	RED
LC21GN3	↓	↓	↓	GREEN
LC21YN3				YELLOW
LC21BN3				BLUE
LC21CN3				COLORLESS
LC21RD3			DIFFUSING	RED
LC21GD3			↓	GREEN
LC21YD3				YELLOW
LC21BD3				BLUE
LC21CD3				COLORLESS
LC21WT3	↓	↓	TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC22

MIL-L-3661/22

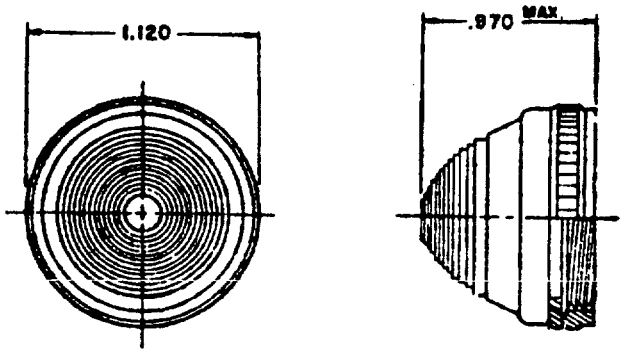


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC22RN3	LH79, LH80	PLASTIC	NONDIFFUSING	RED
LC22GN3	↓	↓	↓	GREEN
LC22YN3	↓	↓	↓	YELLOW
LC22BN3	↓	↓	↓	BLUE
LC22CN3	↓	↓	↓	COLORLESS
LC22RD3	↓	↓	DIFFUSING	RED
LC22GD3	↓	↓	↓	GREEN
LC22YD3	↓	↓	↓	YELLOW
LC22BD3	↓	↓	↓	BLUE
LC22CD3	↓	↓	↓	COLORLESS
LC22WT3	↓	↓	TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC23,
CONVEX, COMPLETE-BLACKOUT, MECHANICAL DIMMER

MIL-L-3661/23

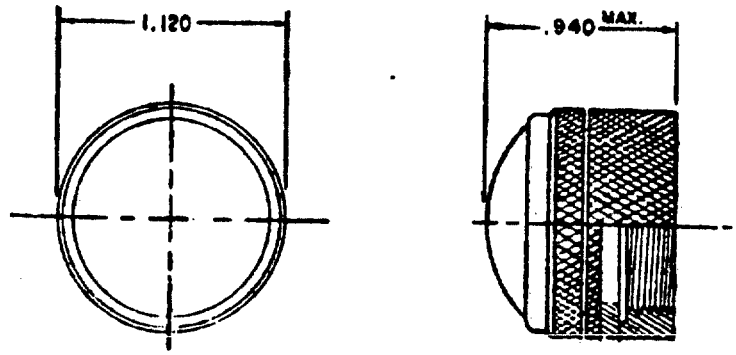


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC23RN3	LH79, LH80	PLASTIC	NONDIFFUSING	RED
LC23GN3				GREEN
LC23YN3				YELLOW
LC23BN3				BLUE
LC23CN3				COLORLESS
LC23RD3			DIFFUSING	RED
LC23GD3				GREEN
LC23YD3				YELLOW
LC23BD3				BLUE
LC23CD3				COLORLESS
LC23WT3			TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC24,
CONVEX, SEMI-BLACKOUT, MECHANICAL DIMMER

MIL-L-3661/24

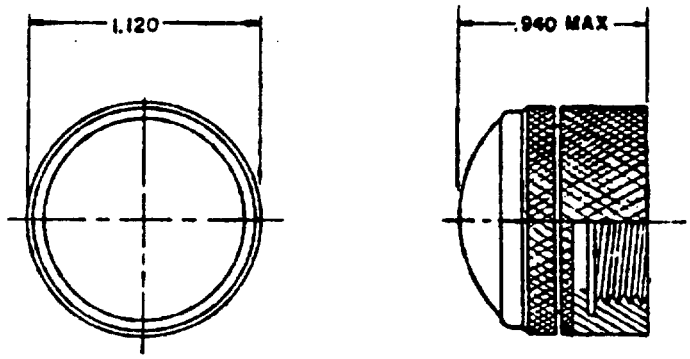


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC24RN3	LH79, LH80	PLASTIC	NONDIFFUSING	RED
LC24GN3	↓	↓	↓	GREEN
LC24YN3				YELLOW
LC24BN3				BLUE
LC24CN3				COLORLESS
LC24RD3			DIFFUSING	RED
LC24GD3			↓	GREEN
LC24YD3				YELLOW
LC24BD3				BLUE
LC24CD3				COLORLESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES, (FLAT, ELECTROMAGNETIC INTERFERENCE TYPE), DUSTTIGHT, LENS, STYLE LC25

MIL-L-3661/25

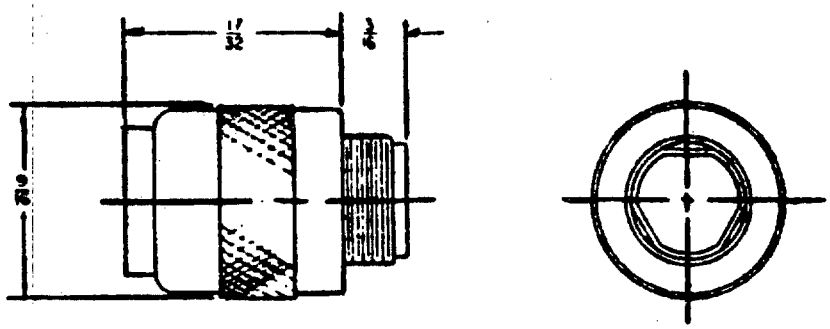


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC25RN2	LH73/2	PLASTIC	NONDIFFUSING	RED
LC25GN2	↓	↓	↓	GREEN
LC25YN2	↓	↓	↓	YELLOW
LC25BN2	↓	↓	↓	BLUE
LC25CN2	↓	↓	↓	COLORLESS
LC25RT2	↓	↓	TRANSLUCENT	RED
LC25GT2	↓	↓	↓	GREEN
LC25YT2	↓	↓	↓	YELLOW
LC25BT2	↓	↓	↓	BLUE
LC25WT2	↓	↓	↓	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES, (ELECTROMAGNETIC INTERFERENCE TYPE), DUSTTIGHT, LENS, STYLE LC26

MIL-L-3661/26

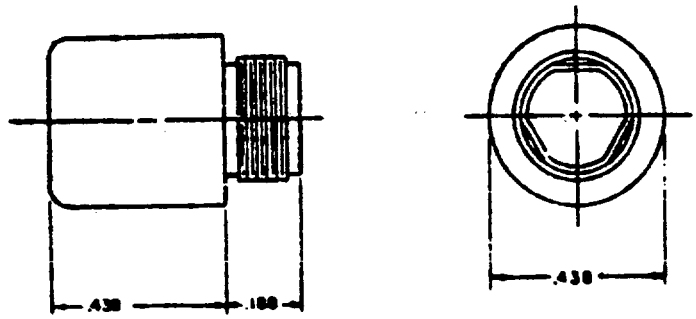


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC26RN2	LH73/2	PLASTIC	NONDIFFUSING	RED
LC26GN2	↓	↓	↓	GREEN
LC26YN2				YELLOW
LC26CN2				COLORLESS
LC26RT2			TRANSLUCENT	RED
LC26GT2			↓	GREEN
LC26YT2				YELLOW
LC26WT2	↓	↓	↓	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES, (ELECTROMAGNETIC INTERFERENCE TYPE), DUSTTIGHT, LENS, STYLE LC27

MIL-L-3661/27

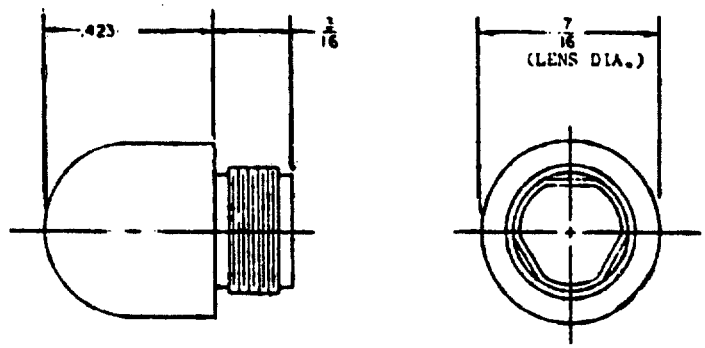


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC27RN2	LH73/2	PLASTIC	NONDIFFUSING	RED
LC27GN2	↓	↓	↓	GREEN
LC27YN2				YELLOW
LC27BN2				BLUE
LC27CN2			↓	COLORLESS
LC27RT2			TRANSLUCENT	RED
LC27GT2			↓	GREEN
LC27YT2				YELLOW
LC27BT2				BLUE
LC27WT2	↓	↓	↓	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES, (ELECTROMAGNETIC INTERFERENCE TYPE), DUSTTIGHT, LENS, STYLE LC28

MIL-L-3661/28

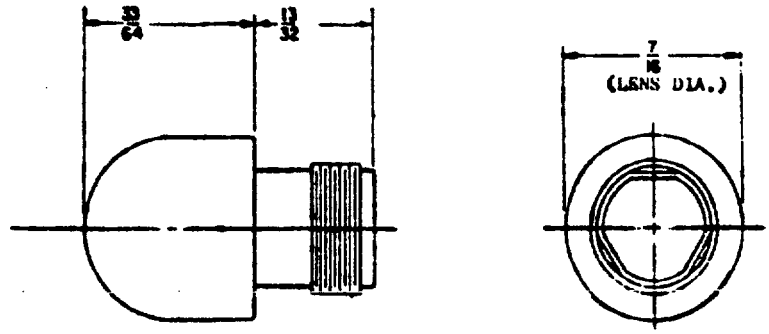


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC28RN2	LH74/3, /4	PLASTIC	NONDIFFUSING	RED
LC28YN2	↓	↓	↓	YELLOW
LC28CN2				COLORLESS
LC28WT2			TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES, DUSTTIGHT, LENS, STYLE LC29

MIL-L-3661/29

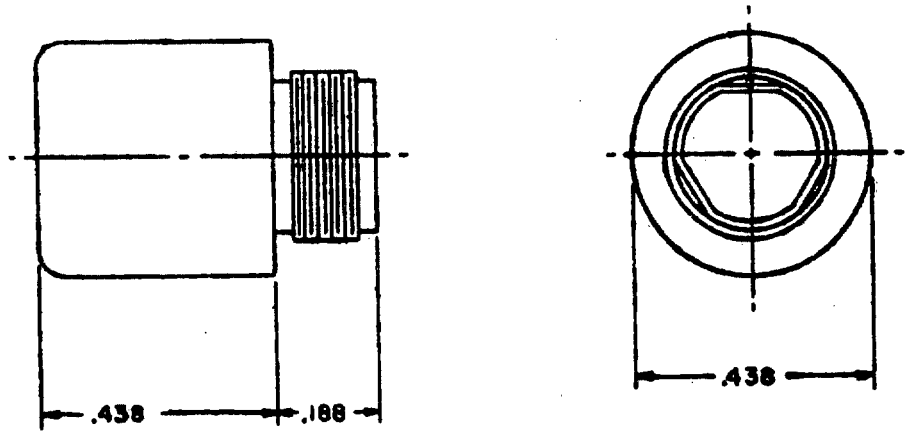


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC29RN2	LH73/1	PLASTIC	NONDIFFUSING	RED
LC29GN2	↓	↓	↓	GREEN
LC29YN2				YELLOW
LC29BN2				BLUE
LC29CN2				COLORLESS
LC29RT2			TRANSLUCENT	RED
LC29GT2			↓	GREEN
LC29YT2				YELLOW
LC29BT2				BLUE
LC29WT2	↓	↓	↓	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, STYLE LC30

MIL-L-3661/30

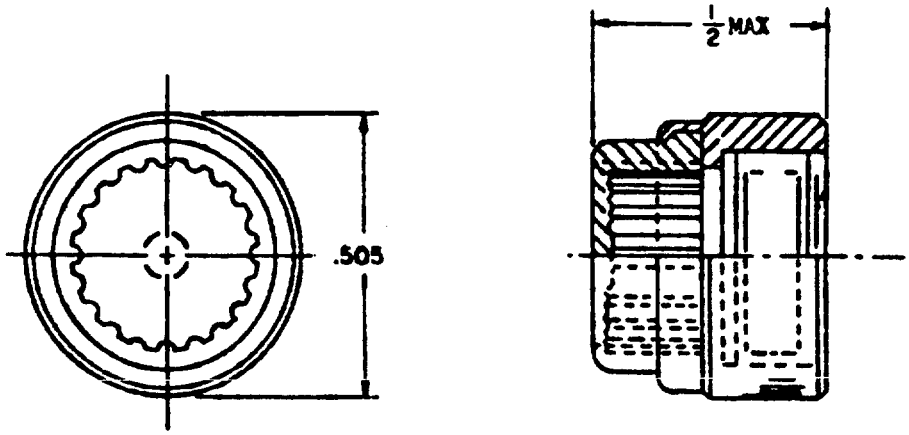


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC30RN3	LH90/2, /3	PLASTIC	NONDIFFUSING	RED
LC30GN3	↓	↓	↓	GREEN
LC30YN3				YELLOW
LC30DN3				BLUE
LC30WT3				WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, STYLE LC31

MIL-L-3661/31

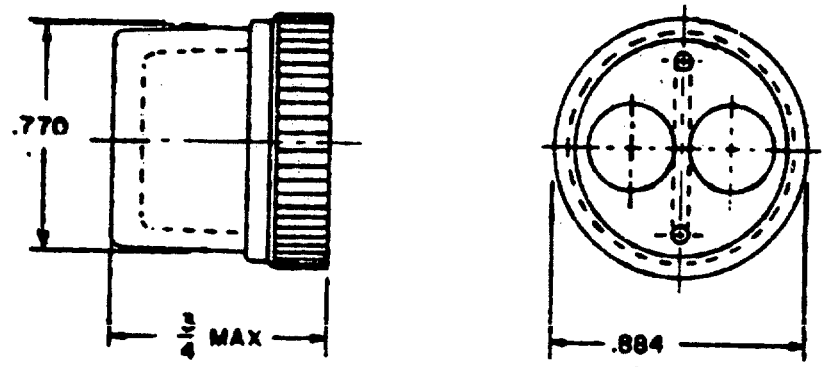


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC31CN2 LC31WT2	LH87	PLASTIC	NONDIFFUSING TRANSLUCENT	COLORLESS WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, (ROTATABLE), STYLE LC32

MIL-L-3661/32

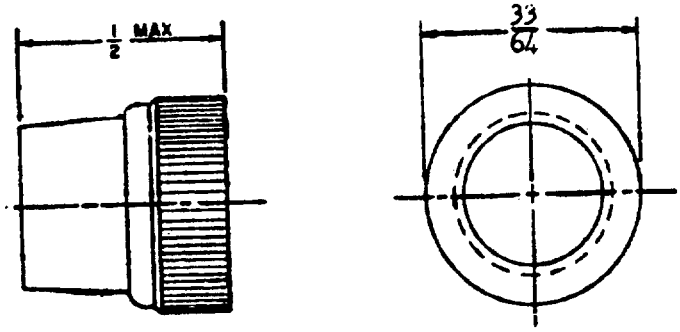


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC32RT2 LC32GT2 LC32YT2 LC32BT2 LC32WT2	LH90/2	PLASTIC	TRANSLUCENT	RED GREEN YELLOW BLUE WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, WATERTIGHT, STYLE LC33

MIL-L-3661/33

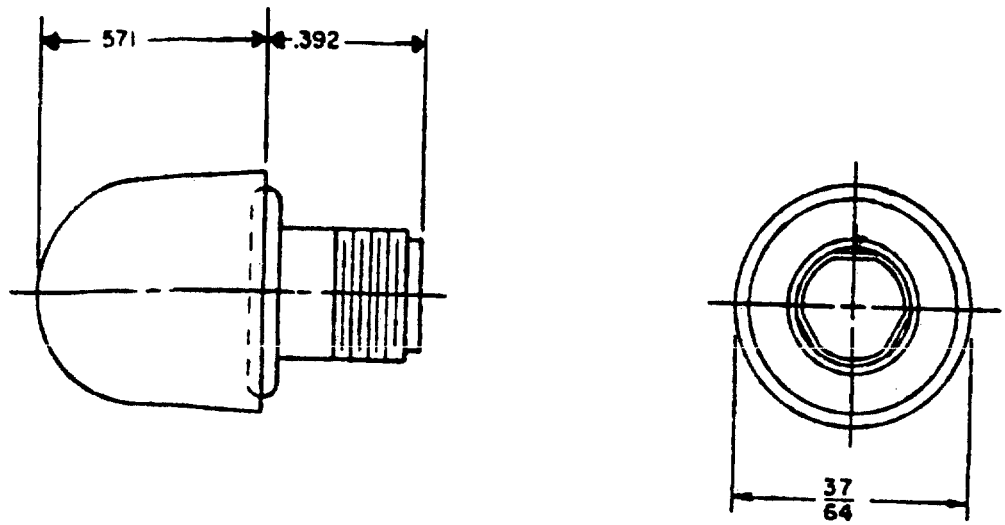


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC33RN2	LH88/1, /2	PLASTIC	NONDIFFUSING	RED
LC33YN2				YELLOW
LC33CN2				COLORLESS
LC33WT2			TRANSLUCENT	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES, (PLASTIC PLATE LIGHTING PANEL), DUSTTIGHT, LENS, STYLE LC34

MIL-L-3661/34




TYPE DESIGNATION	MATING HOLDER	CAP AND FILTER	FILTER COLOR TRANSMITTANCE	CAP ASSEMBLY TOP COLOR	LIGHT SEAL WASHER COLOR
LC34EN2/DO2	LH92	PLASTIC	RED-NONDIFFUSING	BLACK-OPAQUE	BLACK OPAQUE
LC34CN2/DO2	↓	↓	COLORLESS-NONDIF	BLACK-OPAQUE	↓
LC34CN2/EN2			COLORLESS-NONDIF	RED-NONDIF	
LC34EN2/EN2			RED-NONDIFFUSING	RED-NONDIF	
LC34EN2/SO2			RED-NONDIFFUSING	GRAY-OPAQUE	GRAY OPAQUE
LC34CN2/SO2			COLORLESS-NONDIF	GRAY-OPAQUE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, WATERTIGHT, STYLE LC35

MIL-L-3661/35

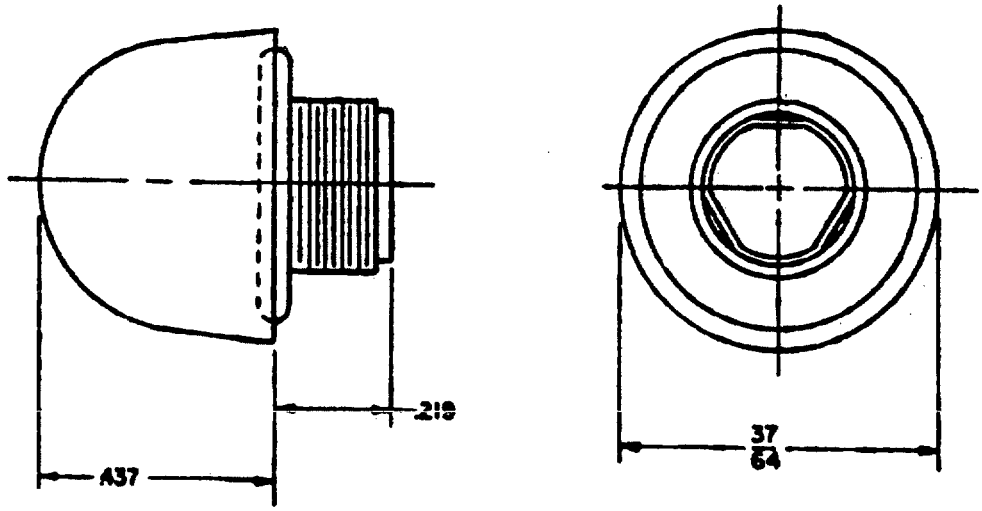


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC35RN2	LH89	PLASTIC	NONDIFFUSING	RED
LC35GN2	↓	↓	↓	GREEN
LC35YN2				YELLOW
LC35BN2				BLUE
LC35CN2				COLORLESS
LC35RT2			TRANSLUCENT	RED
LC35GT2			↓	GREEN
LC35YT2				YELLOW
LC35BT2				BLUE
LC35WT2	↓	↓	↓	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, WATERTIGHT, STYLE LC36,
COMPLETE-BLACKOUT, MECHANICAL DIMMER

MIL-L-3661/36

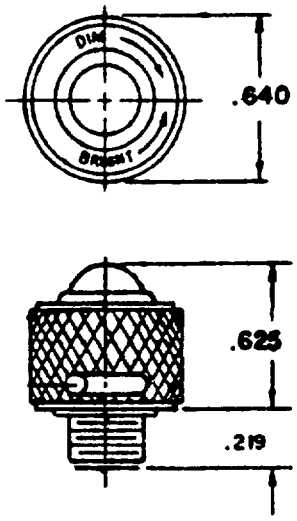


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC36RD2	LH89	PLASTIC	DIFFUSING	RED
LC36GD2	↓	↓	↓	GREEN
LC36YD2	↓	↓	↓	YELLOW
LC36BD2	↓	↓	↓	BLUE
LC36CD2	↓	↓	↓	COLORLESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LENSES, INDICATOR-LIGHT, WATERTIGHT, STYLE LC37,
SEMI-BLACKOUT, MECHANICAL DIMMER

MIL-L-3661/37

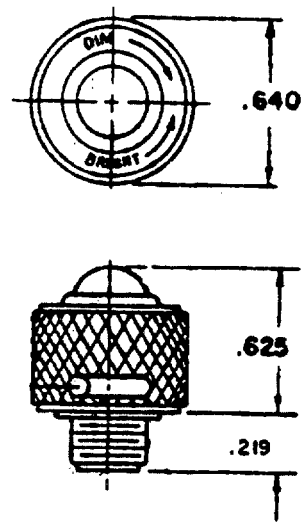


TYPE DESIGNATION	MATING HOLDER	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LC37RD2	LH89	PLASTIC	DIFFUSING	RED
LC37GD2	↓	↓	↓	GREEN
LC37YD2				YELLOW
LC37BD2				BLUE
LC37CD2				COLORLESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES HOUSINGS, DRIPPROOF, STYLE LH50

MIL-L-3661/2

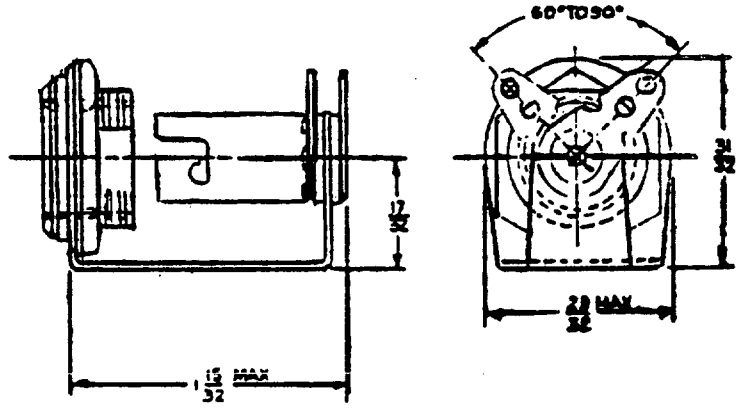


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH50/1	LC14, LC15, LC17, LC18	T-3-1/4 INCANDESCENT LAMP MINIATURE BAYONET BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES
HOUSINGS, DRIPPROOF, STYLE LH73

MIL-L-3661/5

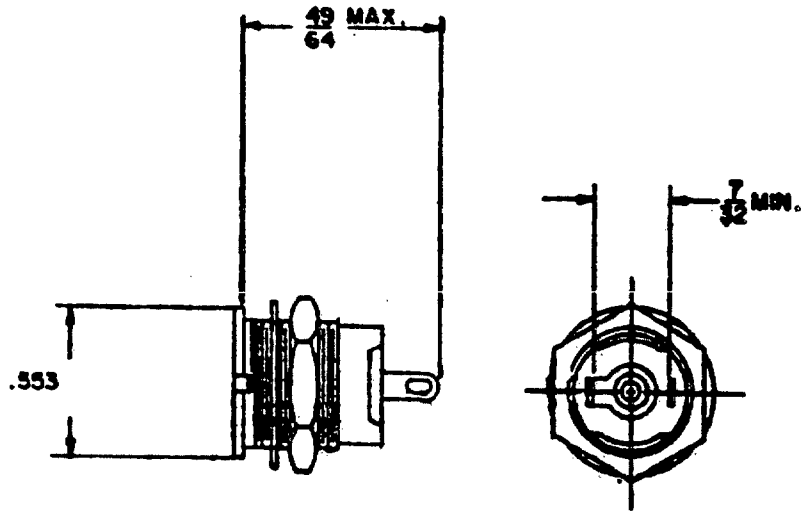


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH73/1	LC11, LC12, LC29	T-1-3/4 MIDGET FLANGE BASE
LH73/2	LC25, LC26, LC27	INCANDESCENT LAMP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES HOUSINGS, DRIPPROOF, STYLE LH74

MIL-L-3661/6

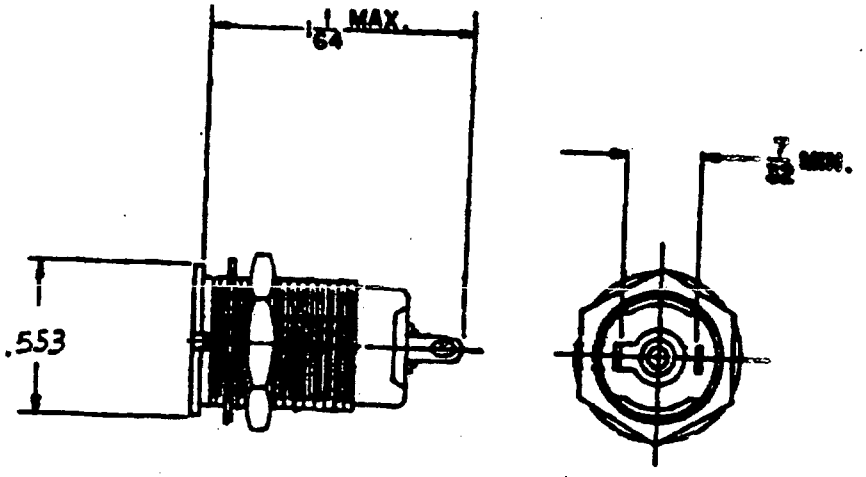


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH74/1	LC13	NEON C7A (MS25252-2D)
LH74/2	LC13	NEON C9A (MS25252-2J)
LH74/3	LC28	NEON C7A (MS25252-2D)
LH74/4	LC28	NEON C9A (MS25252-2J)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

HOUSINGS, INDICATOR-LIGHT, STYLE LH76

MIL-L-3661/8

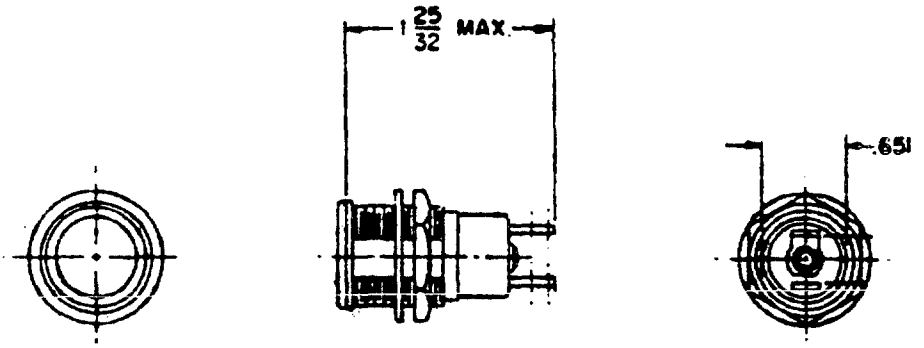


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH76/1	LC14, LC16, LC17, LC18	T-3-1/4 MINIATURE BAYONET BASE, SC LAMP, NE51
LH76/2	LC14, LC16, LC17, LC18	BASE, SC LAMP, NE51H
LH76/3	LC14, LC15, LC17, LC18	BASE, INCANDESCENT LAMP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

HOUSINGS, INDICATOR-LIGHT, STYLE LH77

MIL-L-3661/9

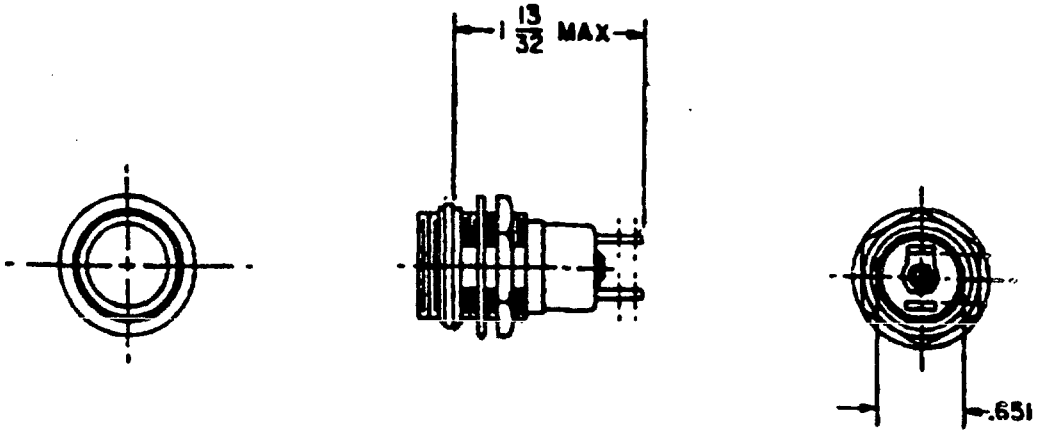


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH77/1	LC19, LC20	NEON NE51
LH77/2		NEON NE51H
LH77/3		T-3-1/4 INCANDESCENT, BAYONET BASE, SINGLE CONTACT LAMP

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

HOUSINGS, INDICATOR-LIGHT, STYLE LH79

MIL-L-3661/10

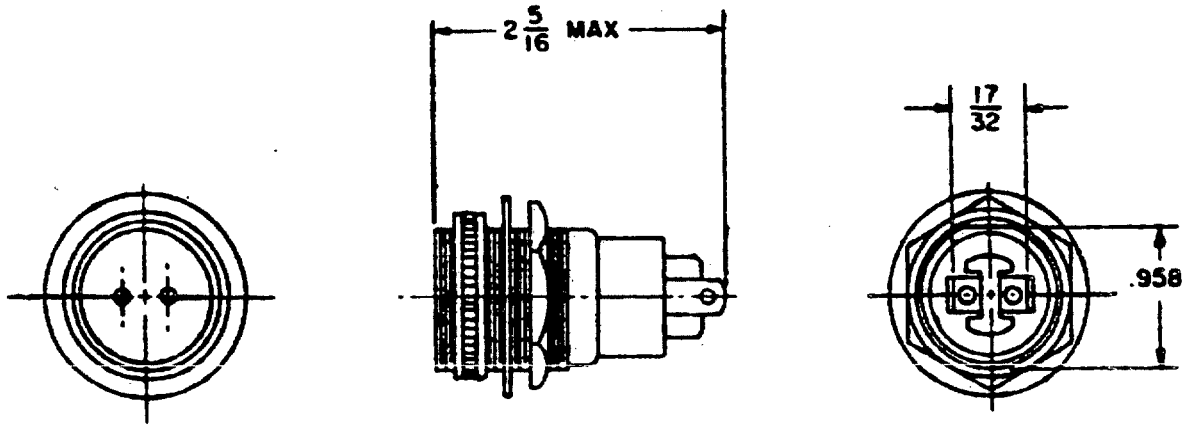


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH79/1	LC21, LC22, LC23, LC24	DOUBLE CONTACT CANDELABRA, BAYONET BASE G-6 LAMPS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

HOUSINGS, INDICATOR-LIGHT, STYLE LH80

MIL-L-3661/38

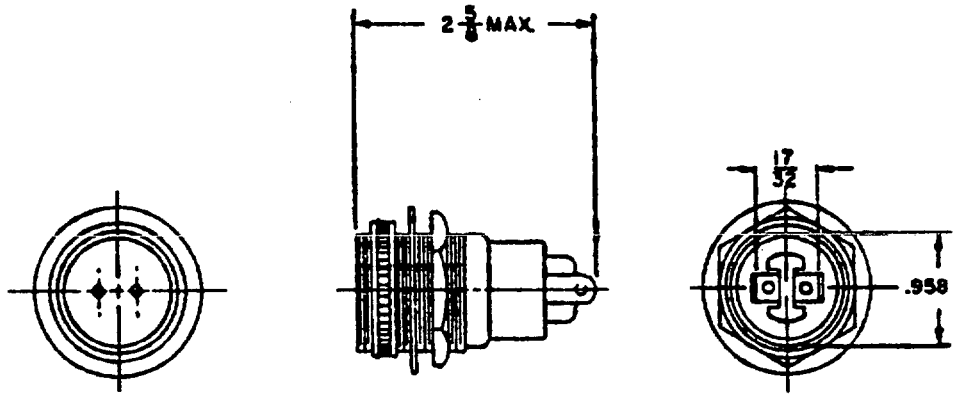


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH80/1	LC21, LC22, LC23, LC24	DOUBLE CONTACT CANDELABRA, BAYONET BASE S-6 LAMPS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

HOUSINGS, INDICATOR-LIGHT, 2-LAMP, STYLE LH87

MIL-L-3661/45

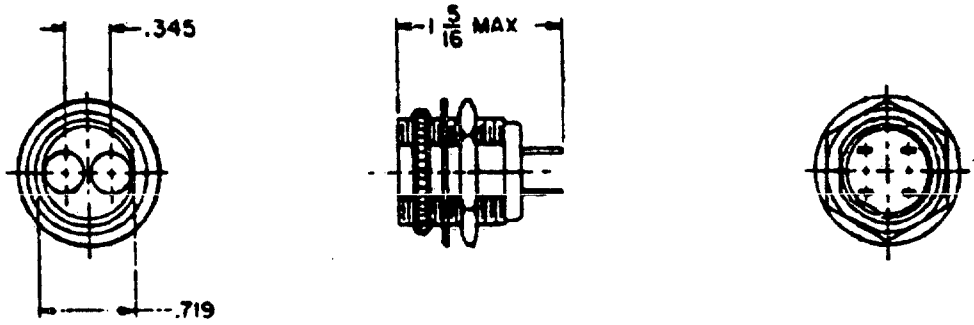


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH87/1	LC31	NEON AND INCANDESCENT CYLINDRICAL PLUG IN LAMP CARTRIDGE MS18235, MS18236, AND MS18237.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

HOUSINGS, INDICATOR-LIGHT, WATERTIGHT, STYLE LH88

MIL-L-3661/46

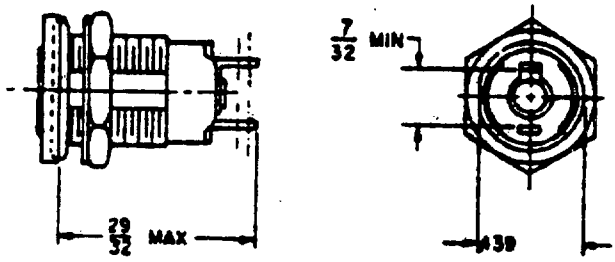


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH88/1	LC33	NEON C7A MS25252-2D
LH88/2		NEON C9A MS25252-2J

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

HOUSINGS, INDICATOR-LIGHT, WATERTIGHT, STYLE LH89

MIL-L-3661/47

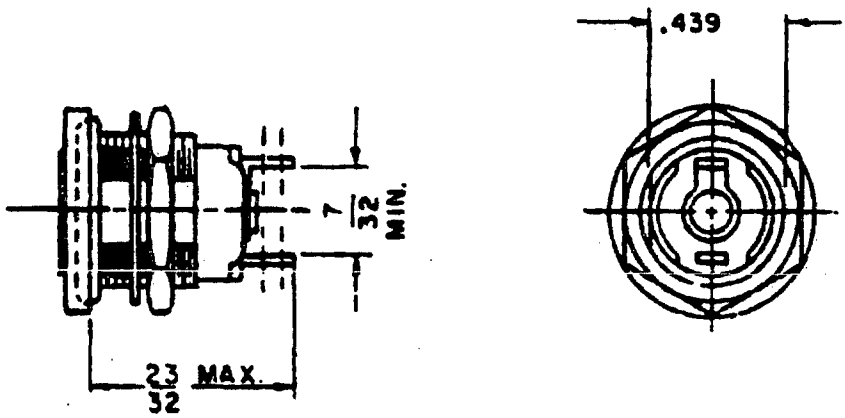


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH89/1	LC35, LC36, LC37	T-1-3/4 INCANDESCENT LAMP MIDGET FLANGE BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

HOUSINGS, INDICATOR-LIGHT, STYLE LH90

MIL-L-3661/48

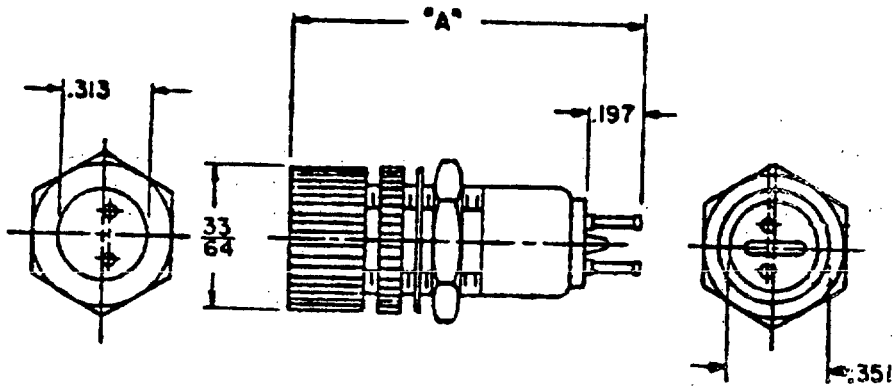


DIMENSION A MAX 1-9/32 FOR LH90/1, /2
DIMENSION A MAX 1-15/32 FOR LH90/3

TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION CYLINDRICAL PLUG IN LAMP CARTRIDGE
LH90/1	N/A	MS18235, MS18236, MS18237
LH90/2	LC30, LC32	MS18235
LH90/3	LC30	MS18238

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES
HOUSINGS, DUSTTIGHT, STYLE LH92

MIL-L-3661/51

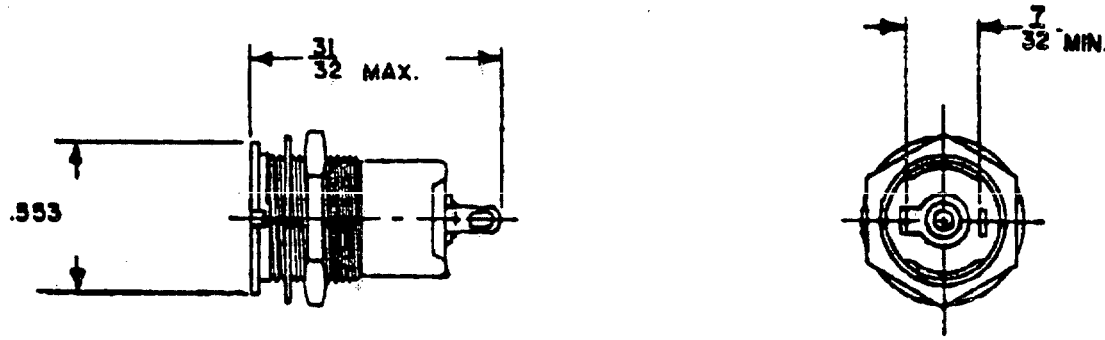


TYPE DESIGNATION	MATING LENS	LAMP ACCOMMODATION
LH92/1	LC34	T-1-3/4 INCANDESCENT LAMP MIDGET FLANGE BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES
INDICATOR LIGHTS, 2 LAMP, DISPLAY TYPE, STYLE LHC81

MIL-L-3661/39

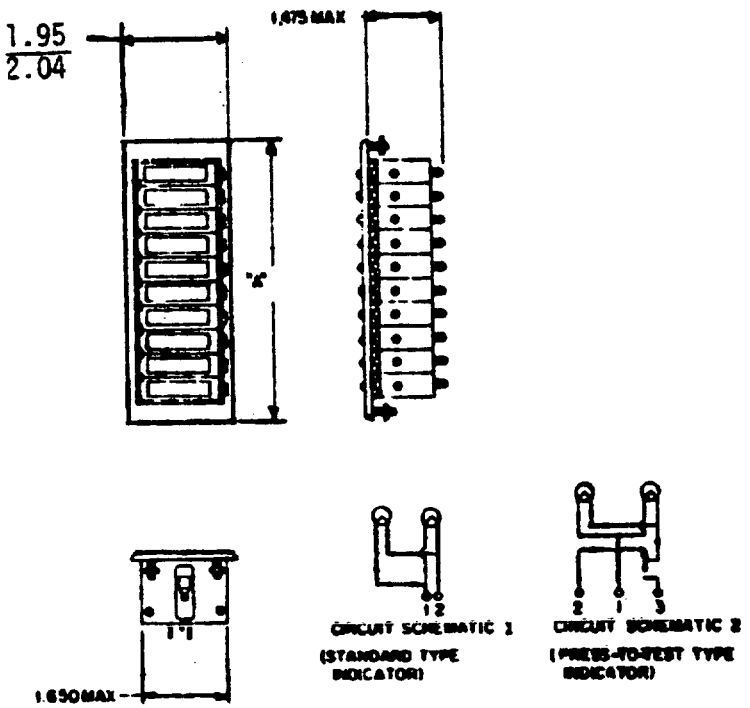


TYPE DESIGNATION	CIRCUIT TYPE (SEE SCHEMATIC ABOVE)	NUMBER OF STATIONS	DIMENSION A
LHC81/1	1 = STANDARD	1	1.063
LHC81/2		2	1.504
LHC81/3		3	1.944
LHC81/4		4	2.384
LHC81/5		5	2.824
LHC81/6		6	3.264
LHC81/7		7	3.704
LHC81/8		8	4.144
LHC81/9		9	4.584
LHC81/10		10	5.024
LHC81/11	2 = PRESS-TO-TEST	1	1.063
LHC81/12		2	1.504
LHC81/13		3	1.944
LHC81/14		4	2.384
LHC81/15		5	2.824
LHC81/16		6	3.264
LHC81/17		7	3.704
LHC81/18		8	4.144
LHC81/19		9	4.584
LHC81/20		10	5.024

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES
INDICATOR LIGHT (NON-REMOVABLE), STYLE LHC82
(ELECTROMAGNETIC INTERFERENCE AND NON-ELECTROMAGNETIC TYPES)

MIL-L-3661/40

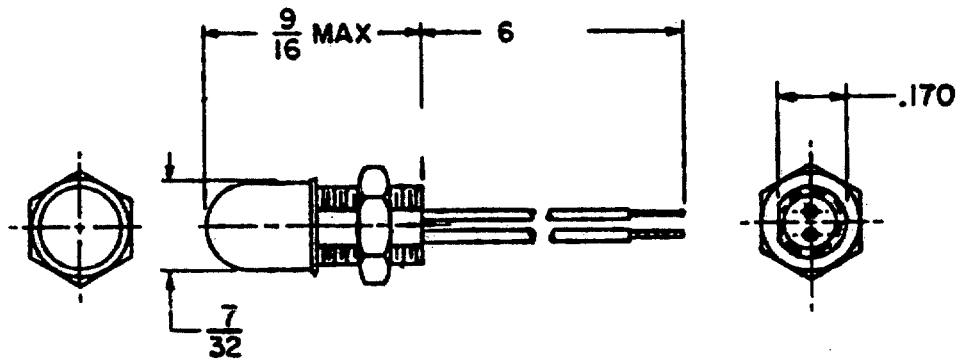


TYPE DESIGNATION	ELECTROMAGNETIC INTERFERENCE (CASE GROUNDED)	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LHC82/1RT2	NO	PLASTIC	TRANSLUCENT	RED
LHC82/1GT2	↓	↓	↓	GREEN
LHC82/1YT2	↓	↓	↓	YELLOW
LHC82/1BT2	↓	↓	↓	BLUE
LHC82/1WT2	↓	↓	↓	WHITE
LHC82/1CN2	↓	↓	NONDIFFUSING	COLORLESS
LHC82/2RT2	YES	↓	TRANSLUCENT	RED
LHC82/2GT2	↓	↓	↓	GREEN
LHC82/2YT2	↓	↓	↓	YELLOW
LHC82/2BT2	↓	↓	↓	BLUE
LHC82/2WT2	↓	↓	↓	WHITE
LHC82/2CN2	↓	↓	NONDIFFUSING	COLORLESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES
INDICATOR LIGHT (NON-REMOVABLE), STYLE LHC83
(ELECTROMAGNETIC INTERFERENCE AND NON-ELECTROMAGNETIC TYPES)

MIL-L-3661/41

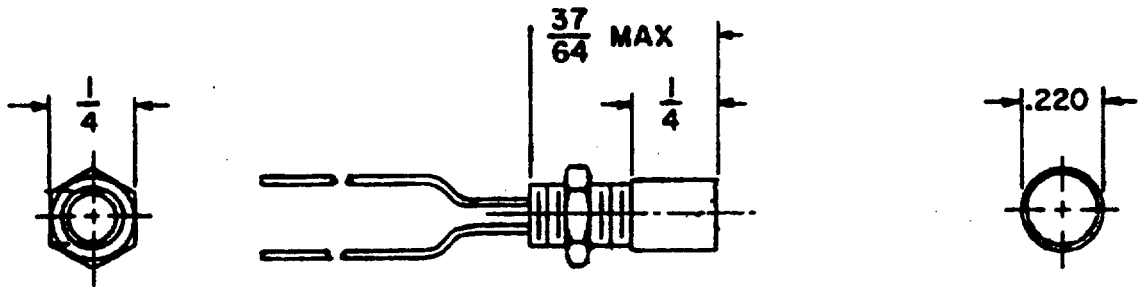


TYPE DESIGNATION	ELECTROMAGNETIC INTERFERENCE (CASE GROUNDED)	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LHC83/1RT2	NO	PLASTIC	TRANSLUCENT	RED
LHC83/1GT2	↓	↓	↓	GREEN
LHC83/1YT2	↓	↓	↓	YELLOW
LHC83/1BT2	↓	↓	↓	BLUE
LHC83/1WT2	↓	↓	↓	WHITE
LHC83/2RT2	YES	↓	TRANSLUCENT	RED
LHC83/2GT2	↓	↓	↓	GREEN
LHC83/2YT2	↓	↓	↓	YELLOW
LHC83/2BT2	↓	↓	↓	BLUE
LHC83/2WT2	↓	↓	↓	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES
INDICATOR LIGHT (NON-REMOVABLE), STYLE LHC84
(ELECTROMAGNETIC INTERFERENCE AND NON-ELECTROMAGNETIC TYPES)

MIL-L-3661/42

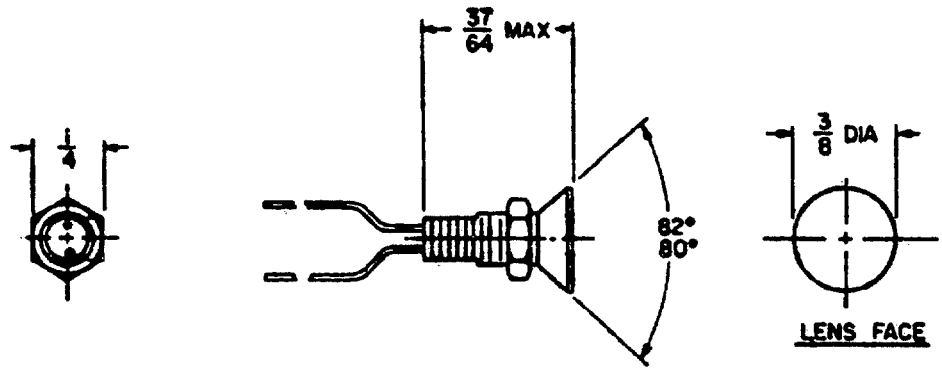

TYPE DESIGNATION	ELECTROMAGNETIC INTERFERENCE (CASE GROUNDED)	LENS MATERIAL	TRANSMITTANCE	LENS COLOR
LHC84/1RT2	NO	PLASTIC	TRANSLUCENT	RED
LHC84/1GT2	↓	↓	↓	GREEN
LHC84/1YT2	↓	↓	↓	YELLOW
LHC84/1BT2	↓	↓	↓	BLUE
LHC84/1WT2	↓	↓	↓	WHITE
LHC84/2RT2	YES	↓	TRANSLUCENT	RED
LHC84/2GT2	↓	↓	↓	GREEN
LHC84/2YT2	↓	↓	↓	YELLOW
LHC84/2BT2	↓	↓	↓	BLUE
LHC84/2WT2	↓	↓	↓	WHITE


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMP, INCANDESCENT, AVIATION SERVICE

MIL-L-6363

LAMP, INCANDESCENT, CENTER CONTACT, MINIATURE BAYONET BASE (T-3-1/4 BULB)

MS25231

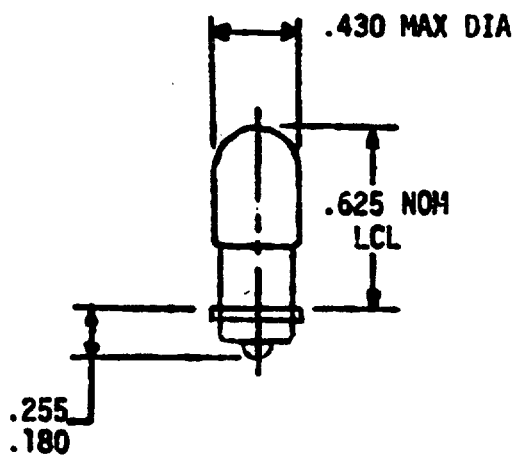


PART NO. MS25231-	DESIGN VOLTS	DESIGN AMPERES	COLOR OF BULB	SPHERICAL CANDLE POWER
313	28	.17	CLEAR	3.34 ±35%
313R			RED	.04 APPROX
1819		.04	CLEAR	.34 ±35%
1819R			RED	.04 APPROX

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMP, INCANDESCENT, SINGLE CONTACT, MIDGET FLANGED BASE

MIL-L-6363

MS25237

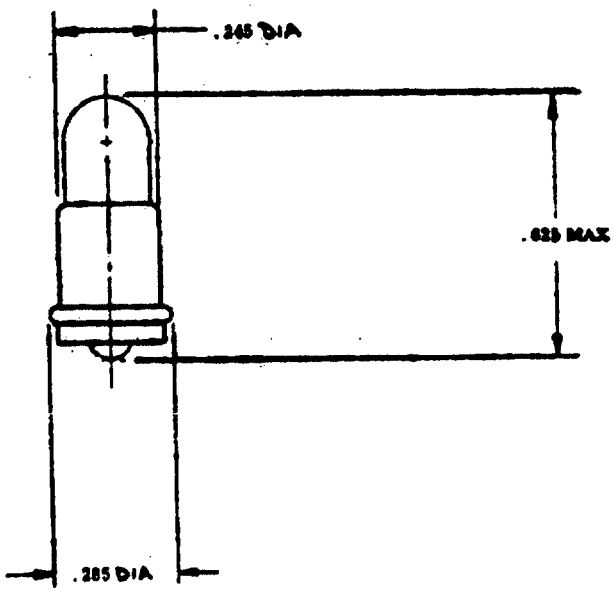

PART NO. MS25237-	DESIGN VOLTS	DESIGN AMPERES	COLOR OF BULB	SPHERICAL CANDLE POWER
328	6	.20	CLEAR	.34 ±25%
328R			RED	.03 ±50%
328AS10			CLEAR	.34 ±25%
338	2.7	.06		.04 APPROX
368	2.5	.20		.20 ±25%
387	28	.04		.30 ±25%
387R			RED	.03 ±50%

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


LAMPS

MIL-L-15098

SCOPE: THIS SECTION COVERS HERMETICALLY SEALED GLOW LAMPS CONTAINING GASES OR VAPORS IN WHICH LUMINOSITY IS PRODUCED BY IONIZATION OF THESE GASES FOR INDICATING AND CIRCUIT CONTROL FUNCTIONS.

LAMPS, GLOW, CIRCUIT CONTROL, TYPES 5AC, 5AG-A, 5AH, RT2-32-1A, AND 5AJ

MIL-L-15098/2



VOLTAGE(NOM) : 120 VOLTS
CHARACTERISTIC GAS : NEON
GLOW COLOR : RED
BASE : UNBASED WIRE LEADS
ELECTRODE SHAPE : PARALLEL POSTS


TABLE I. PART NUMBER AND CHARACTERISTICS.


PART NUMBER M15098/2-	BULB DIA	BULB LENGTH MAX	ELECTRODE LENGTH	SERIES RESISTOR OHMS
001	.244	1.000	7.0	200,000
002	.244	1.000	7.0	150,000
003	.244	0.938	11.5	5,600
004	.244	1.000	11.5	5,000
005	.244	0.938	11.5	47,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPS, GLOW, INDICATOR, TYPES B1A AND B2A

MIL-L-15098/10



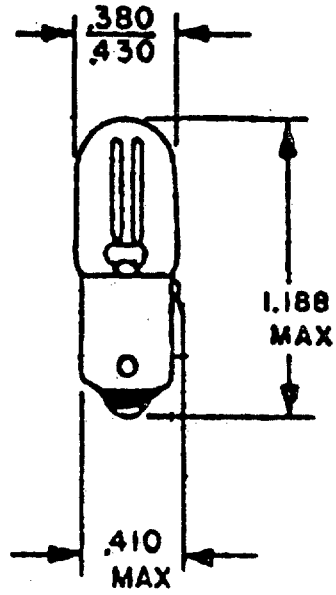

VOLTAGE(NOM) : 120 VOLTS ac; 150 VOLTS MIN dc
CHARACTERISTIC GAS : NEON
GLOW COLOR : RED
BASE : SINGLE CONTACT MIN BAYONET
ELECTRODE SHAPE : PARALLEL POSTS


TABLE I. PART NUMBER AND CHARACTERISTICS.

PART NUMBER M15098/10-	BULB SHAPE AND SIZE	BULB LENGTH MAX	ELECTRODE LENGTH	SERIES RESISTOR OHMS
001	T 3-1/4	1.188	9.0	220,000
002	T 3-1/4	1.188	9.0	47,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMPS, GLOW, INDICATOR, TYPES C7A, C9A, A1G, AND A1H

MIL-L-15098/11

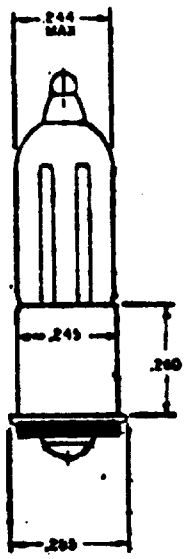

VOLTAGE(NOM) : 120 VOLTS
CHARACTERISTIC GAS : NEON
GLOW COLOR : RED
BASE : SINGLE CONTACT MIDGET FLANGE
ELECTRODE SHAPE : PARALLEL POSTS


TABLE I. PART NUMBER AND CHARACTERISTICS.

PART NUMBER M15098/11-	BULB SHAPE AND SIZE	BULB LENGTH MAX	ELECTRODE LENGTH	SERIES RESISTOR OHMS
001	T2	0.938	7.0	100,000
002	T2	0.938	7.0	30,000
003	T2	0.755	5.0	220,000
004	T2	0.755	5.0	47,000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMP, INCANDESCENT, T-3-1/4, MINATURE BAYONET, SINGLE CONTACT

MS15571




PART NO. MS15571-	DESIGN VOLTS	DESIGN CURRENT AMPERES	FINISH
1	6.3	.25	CLEAR
2	6.3	.15	CLEAR
8	14.0	.20	CLEAR
11	3.2	.35	CLEAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMP, CARTRIDGE, SHORT CYLINDRICAL, PLUG-IN, INCANDESCENT, PLASTIC (FLAT LENS TYPE)

MS18235

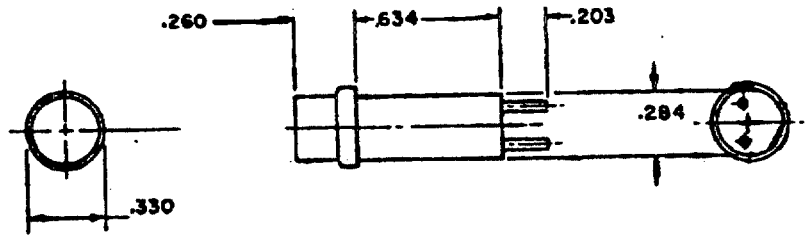


PART NO. MS18235-	DESIGN VOLTS	DESIGN AMPERES	LENS COLOR	CANDLE POWER	LENS TRANSMITTANCE
1RT	6.3	.20	RED	.40	TRANSLUCENT
1GT			GREEN		
1YT			YELLOW		
1BT			BLUE		
1WT			WHITE		
1CN			COLORLESS		NONDIFFUSING
2RT	14	.08	RED	.30	TRANSLUCENT
2GT			GREEN		
2YT			YELLOW		
2BT			BLUE		
2WT			WHITE		
2CN			COLORLESS		NONDIFFUSING
3RT	28	.04	RED	.30 +25%	TRANSLUCENT
3GT			GREEN		
3YT			YELLOW		
3BT			BLUE		
3WT			WHITE		
3CN			COLORLESS		NONDIFFUSING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMP, CARTRIDGE, STOVEPIPE, PLUG-IN, NEON, PLASTIC (CURVED LENS TYPE)

MS18236

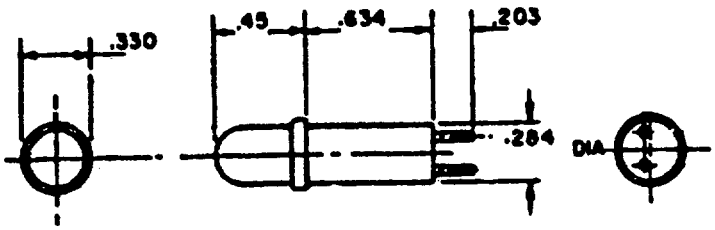


PART NO. MS18236-	CIRCUIT VOLTS	RESISTOR OHMS	CURRENT MILLIAMPERES	LENS COLOR	LENS TRANSMITTANCE
1RN	110-125 AC	33K	1.9	RED	NONDIFFUSING
1YN				YELLOW	↓
1WT				WHITE	TRANSLUCENT
1CN				COLORLESS	NONDIFFUSING
2RN	105-125	100K	0.6(AC)	RED	NONDIFFUSING
2YN				YELLOW	↓
2WT				WHITE	TRANSLUCENT
2CN				COLORLESS	NONDIFFUSING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMP, CARTRIDGE, LONG CYLINDRICAL, PLUG-IN, NEON, PLASTIC (FLAT LENS TYPE)

MS18237

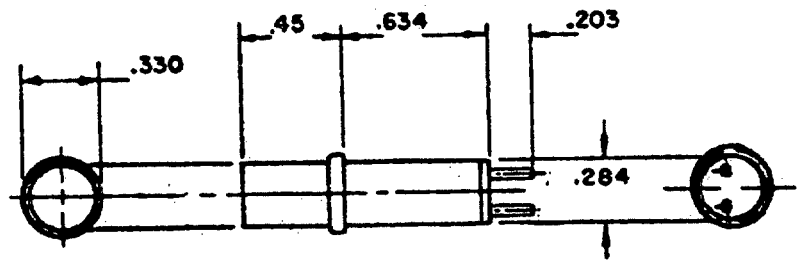


PART NO. MS18237-	CIRCUIT VOLTS	RESISTOR OHMS	CURRENT MILLIAMPERES	LENS COLOR	LENS TRANSMITTANCE
1RN	110-125 AC	33K	1.9	RED	NONDIFFUSING
1YN				YELLOW	↓
1WT				WHITE	TRANSLUCENT
1CN				COLORLESS	NONDIFFUSING
2RN	105-125 AC/DC	100K	0.6(AC)	RED	NONDIFFUSING
2YN				YELLOW	↓
2WT				WHITE	TRANSLUCENT
2CN				COLORLESS	NONDIFFUSING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

LAMP, CARTRIDGE, SHORT CYLINDRICAL, PLUG-IN, INCANDESCENT, GLASS(FLAT TYPE)

MS18238

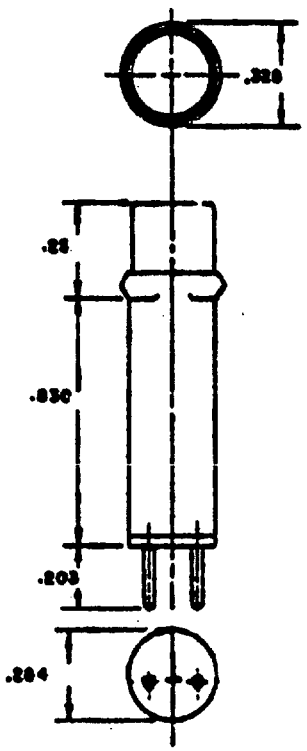


PART NO. MS18238-	DESIGN VOLTS	DESIGN CURRENT AMPERES	END FOOT CANDLEPOWER
1	48	.053	1500
2	60	.050	2600

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, INSTRUMENT, POWER, AND TELEPHONE

MIL-F-15160

SCOPE: THIS SECTION COVERS NONRENEWABLE INSTRUMENT, POWER AND TELEPHONE FUSES DESIGNED FOR THE PROTECTION OF ELECTRICAL AND ELECTRIC EQUIPMENT. THESE ARE INTENDED FOR GENERAL CIRCUIT PROTECTION CONTAINING MOTORS AND OTHER CIRCUITS WHERE PROVISION MUST BE MADE FOR MOMENTARY SURGES AND FREQUENCIES NOT HIGHER THAN 400 Hz.

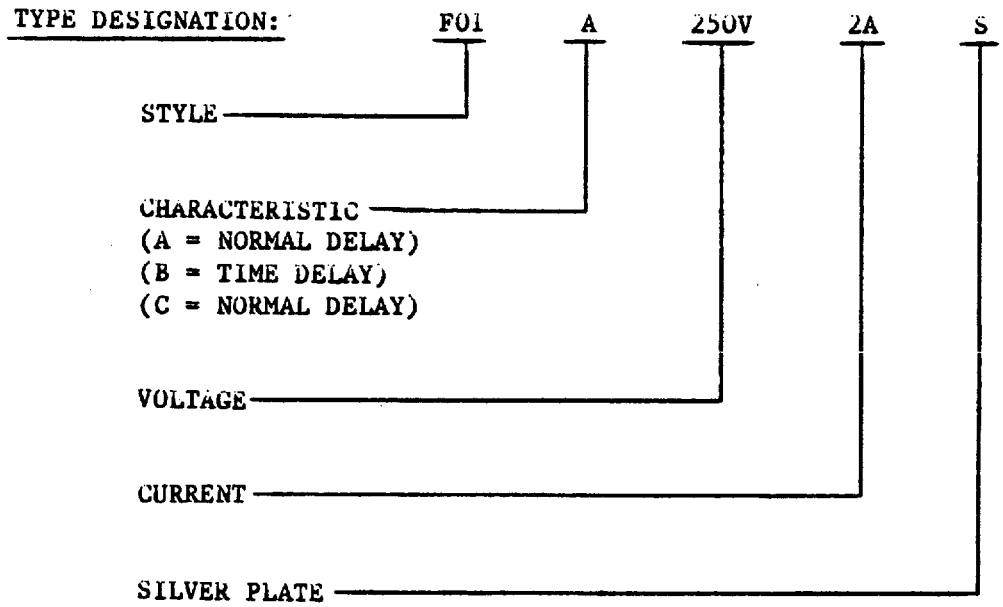

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING) STYLE F01

MIL-F-15160/1

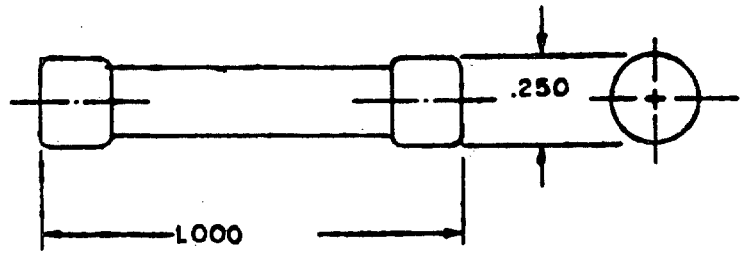


TABLE I. TYPE DESIGNATIONS AND ELECTRICAL RATINGS

TYPE DESIGNATION			CURRENT RATING	MAX RESISTANCE	32 VOLTS	AC SHORT CIRCUIT INTERRUPT	
STYLE	CHARAC-TERISTIC	MAX VOLTAGE				125 VOLTS	250 VOLTS
01	A	250 V	1/500A	6,500	10,000A	100A	35A
			1/200	1,000			
			1/100A	600			
			1/32A	70			
			1/16A	10			
			1/8A	9.5			
			1/4A	8.2			
			3/8A	6.2			
			1/2A	3.7			
		125 V	3/4A	1.7			NOT RATED
			1A	1.3			
			1-1/2A	0.21			
			2A	0.12			

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING) STYLE F09

MIL-F-15160/9

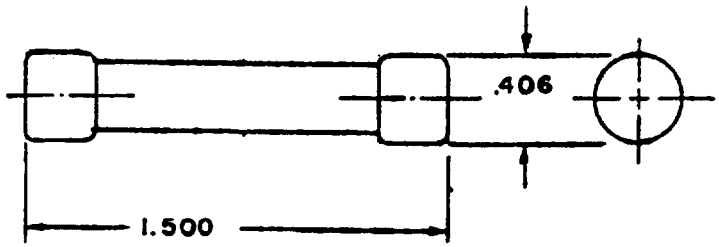


TABLE I. TYPE DESIGNATIONS AND ELECTRICAL RATINGS

TYPE DESIGNATION			CURRENT RATING	AC SHORT CIRCUIT INTERRUPT		
STYLE	CHARAC-TERISTIC	MAX VOLTAGE		32 VOLTS	125 VOLTS	250 VOLTS
F09	A	250 V	1A	10,000A	100A	35A
			2A			
			3A			
			3-1/2A			
			5A			100A
			6A			
			6-1/4A			
			7A			
			8A			
			10A			
			15A			200A
			20A			200A
			25A			750A
			30A			750A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING) STYLE F09

MIL-F-15160/9

TABLE I. TYPE DESIGNATIONS AND ELECTRICAL RATINGS (CONT.)

TYPE DESIGNATION			CURRENT RATING	AC SHORT CIRCUIT INTERRUPT		
STYLE	CHARAC-TERISTIC	MAX VOLTAGE		32 VOLTS	125 VOLTS	250 VOLTS
F09	B	250 V	1/10A 15/100A 2/10A 3/10A 4/10A 1/2A 6/10A 8/10A 1A 1-1/4A 1-6/10A 2A 2-1/2A 3-2/10A 4A 5A 6-1/4A 8A 10A	10,000A	100 A	35
						100A
		125 V 32 V	15A 20A 25A 30A		NOT RATED	NOT RATED

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, INSTRUMENT, POWER, AND TELEPHONE, STYLE F16

MIL-F-15160/16

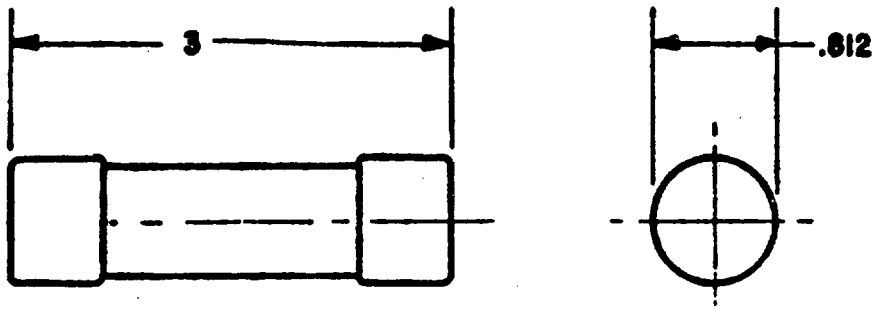


TABLE I. TYPE DESIGNATIONS AND ELECTRICAL RATINGS

TYPE DESIGNATION				OVERLOAD BLOWING TIME % NOMINAL RATING		SHORT CIRCUIT INTERRUPT	
STYLE	CHARAC-TERISTIC	MAX VOLTAGE	CURRENT RATING	135	500	250 VDC	450V RMS SP
F16	A	250V	35A 40A 45A 50A 60A	0-1 HR	0-1 HR	10,000A	3,000A
	B		35A 40A 45A 50A 60A	0-1 HR	10-25 SEC.	10,000A	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, INSTRUMENT, POWER, AND TELEPHONE (NONINDICATING) STYLE F60

MIL-F-15160/60

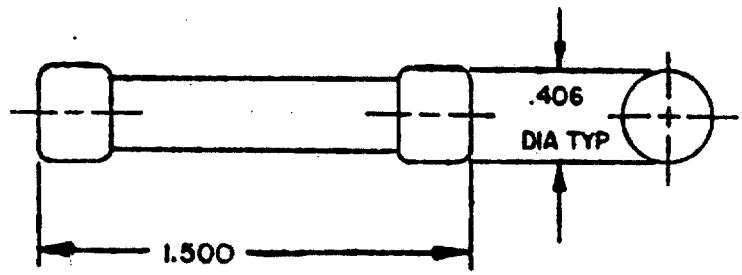


TABLE I. TYPE DESIGNATIONS AND ELECTRICAL RATINGS


TYPE DESIGNATION				OVERLOAD INTERRUPT TIME			
STYLE	CHARAC-TERISTIC	MAX VOLTAGE	CURRENT RATING	135% RATE	200% RATE	SHORT CIRCUIT INTERRUPT 500 VAC	SHORT CIRCUIT INTERRUPT 500 VDC
F60	C	500V	1/8A 1/4A 3/8A 1/2A 3/4A 1A 3A 5A 6A 8A 10A 15A 20A 25A 30A	1 HOUR	2 MINUTES	200,000A	150,000A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, INSTRUMENT TYPE

MIL-F-23419


SCOPE: THIS SECTION COVERS INSTRUMENT TYPE FUSES DESIGNED FOR THE PROTECTION OF ELECTRICAL, ELECTRONIC, AND COMMUNICATION EQUIPMENT ON DIRECT CURRENT (DC) AND ALTRNATING CURRENT (AC) UP TO 400 Hz, CIRCUITS. THESE FUSES ARE INTENDED FOR USE IN ELECTRONIC AND LOW POWER ELECTRICAL EQUIPMENT WHERE RELATIVE LOW VALUES OF SHORT CIRCUIT CURENTS ARE ENCOUNTERED AND PROVIDES PROTECTION AND ISOLATION FOR EQUIPMENT ITSELF.

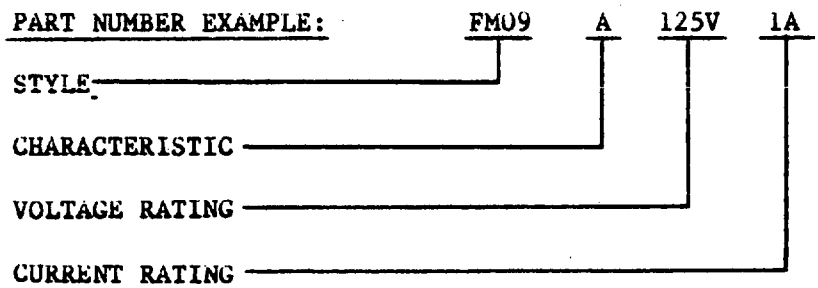

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, INDICATING, INSTRUMENT TYPE, STYLE FM01

MIL-F-23419/1

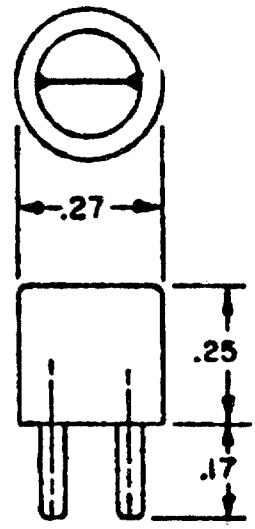


TERMINAL FINISH: TIN PLATE
CHARACTERISTIC: A
MAX VOLTAGE: 125 V

TYPE DESIGNATION		SHORT CIRCUIT INTERRUPT RATING (AMPERES) CIRCUIT VOLTAGE				OVERLOAD INTERRUPT TIME (SECONDS) % NOM RATING	
STYLE	CURRENT RATING (AMPS)	28 V		125 V		200	300
		60HzAC	DC	60HzAC	DC		
FM01	1/200A	3000	3000	60	450	.003-.0004	.0005-.0001
	1/100A					.005-.0008	.0005-.0001
	1/64A					.001-.0005	.0005-.0001
	1/32A					.006-.001	.001-.0003
	1/16A					.050-.010	.010-.003
	1/10A					.040-.010	.010-.004
	1/8A	1500	1500			.050-.010	.012-.004
	2/10A					.055-.014	.012-.005
	1/4A					.040-.014	.012-.005
	3/10A					.037-.013	.012-.005
	4/10A					.042-.015	.014-.005
	1/2A					.035-.015	.015-.005
	6/10A			60	250	.090-.020	.018-.008
	3/4A					.090-.020	.018-.008
	1A					.050-.018	.018-.008
	1-1/2A					.050-.020	.020-.008
	2A					.060-.020	.020-.010
	3A					.110-.025	.023-.010
	4A					.300-.040	.033-.015
	5A					.300-.040	.033-.015

Source: https://assist.dla.mil Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, INDICATING, INSTRUMENT TYPE, STYLE FM02

MIL-F-23419/2

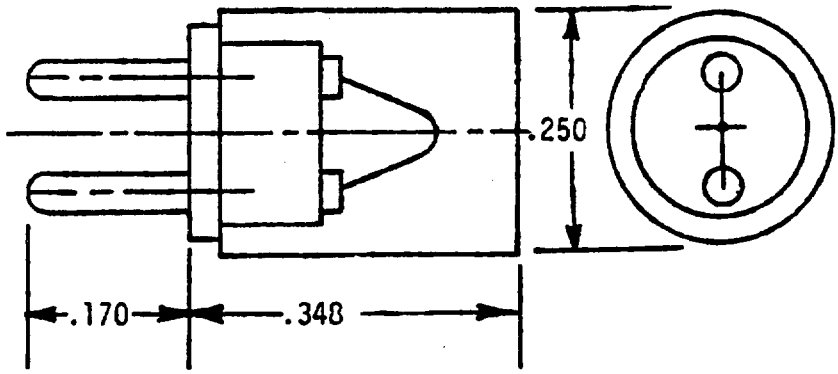

TERMINAL FINISH: BRIGHT ALLOY OR TIN PLATE CHARACTERISTIC: A
MAX VOLTAGE: 125 V

TYPE DESIGNATION		SHORT CIRCUIT INTERRUPT RATING (AMPERES) CIRCUIT VOLTAGE AC OR DC	OVERLOAD INTERRUPT TIME (SECONDS) % NOM RATING	
STYLE	CURRENT RATING (AMPS)		200	300
FM02	1/500A 1/200A 1/100A 1/64A 1/32A 1/16A 1/10A 1/8A 2/10A 1/4A 3/10A 4/10A 5/10A 6/10A 3/4A 1A 1-1/2A 2A	10,000	0 - 10	0 - 0.1
	3A 4A 5A	300		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, NONINDICATING, INSTRUMENT TYPE, STYLE FM09

MIL-F-23419/9

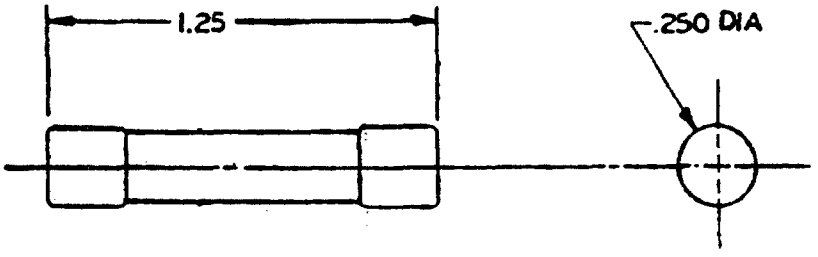


TABLE I. TYPE DESIGNATIONS AND ELECTRICAL RATINGS

TYPE DESIGNATION				OVERLOAD INTERRUPT TIME (SEC) 135% OF RATING - MAX 1 HOUR		AC SHORT CIRCUIT INTERRUPT (AMP)	
STYLE	CHARAC-TERISTIC	MAX VOLTAGE	CURRENT RATING	200% OF RATING	300% OF RATING	125V	250V
FM09	A	250V	1/100A	.0001 - 1.0	.0001 - .003	10,000	35
			1/32A	.0008 - 1.0	.0002 - .003		
			1/16A	.009 - 2.0	.001 - .050		
			1/8A	.01 - 2.0	.01 - .20		
			1/4A	.02 - 2.0	.01 - .20		
			3/8A	.02 - 3.0	.01 - .30		
			1/2A	.03 - 3.0	.01 - .30		
			3/4A	.03 - 3.0	.015 - .50		
			1A	.05 - 3.0	.015 - .50		
			1-1/4A	.05 - 3.0	.02 - .50		
			1-1/2A	.05 - 3.0	.02 - .50		
			2A	.08 - 3.0	.04 - .50		
			3A	.08 - 3.0	.04 - .70		
			4A	.10 - 5.0	.05 - 1.00		
			5A	.20 - 60.0	.05 - 6.00		100
			6A	.20 - 60.0	.05 - 6.00		
			8A	.30 - 60.0	.05 - 6.00		
			10A	.30 - 60.0	.05 - 6.00		
			12A	.30 - 60.0	.05 - 6.00		200
			15A	.5 - 60.0	.05 - 6.00		
		125V	20A	.5 - 60.0	.05 - 6.00		NOT RATED
			25A	.5 - 60.0	.05 - 6.00		
			30A	.5 - 60.0	.05 - 6.00		

TERMINAL FINISH: BRASS, COPPER, OR COPPER ALLOY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSES, NONINDICATING, INSTRUMENT TYPE, STYLE FM09

MIL-F-23419/9

TABLE I. TYPE DESIGNATIONS AND ELECTRICAL RATINGS (CONT.)


TYPE DESIGNATION				OVERLOAD INTERRUPT TIME (SEC) 135% OF RATING - MAX 1 HOUR		AC SHORT CIRCUIT INTERRUPT (AMP)	
STYLE	CHARAC-TERISTIC	MAX VOLTAGE	CURRENT RATING	200% OF RATING	300% OF RATING	125V	250V
FM09	B	250V	1/100A 1/32A 1/16A 1/10A 1/8A 15/100A 3/16A 1/4A 3/10A 3/8A 1/2A 6/10A 3/4A 8/10A 1A 1-1/4A 1-1/2A 1-6/10A 2A	4.0 - 250.0 4.0 - 80.0	2.0 - 40.0 2.0 - 25.0	10,000	35
			2-1/2A 2-8/10A 3A	10.0 - 250.0			
		125V	3-2/10A 4A 5A 6-1/4A 7A 8A 10A 12A 15A 20A 25A 30A		.05 - 10.0		NOT RATED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING AND NONINDICATING

MIL-F-19207


SCOPE: THIS SECTION COVERS ENCLOSED, PANEL MOUNTED, EXTRACTOR POST TYPE ELECTRICAL FUSEHOLDERS, BOTH BLOWN FUSE INDICATING AND NONINDICATING. THE EXTRACTOR POST TYPE FUSEHOLDERS ARE USED TO FULLY ENCLOSE ELECTRICAL FUSES AND ARE DESIGNED FOR PANEL MOUNTING.

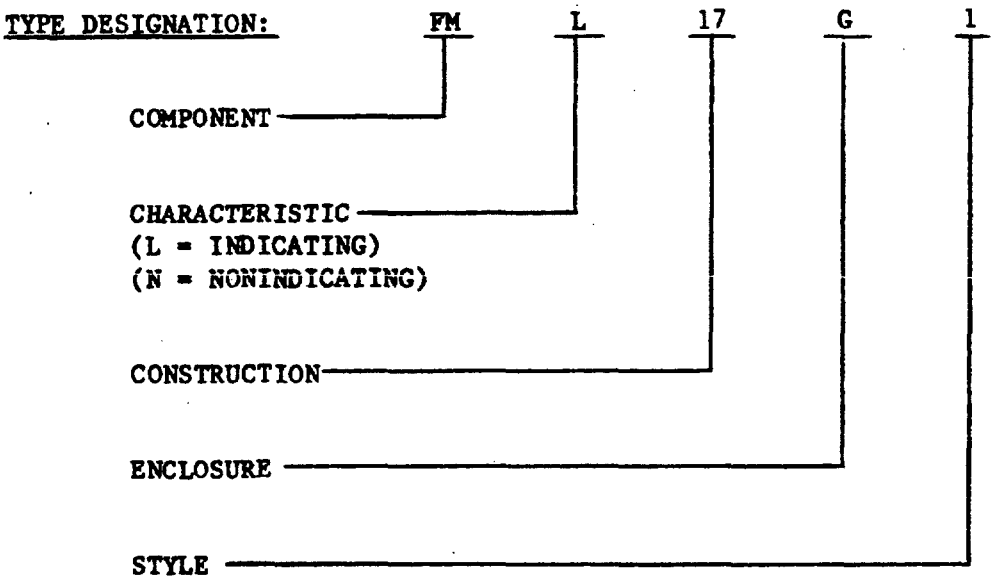

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL10U

MIL-F-19207/1

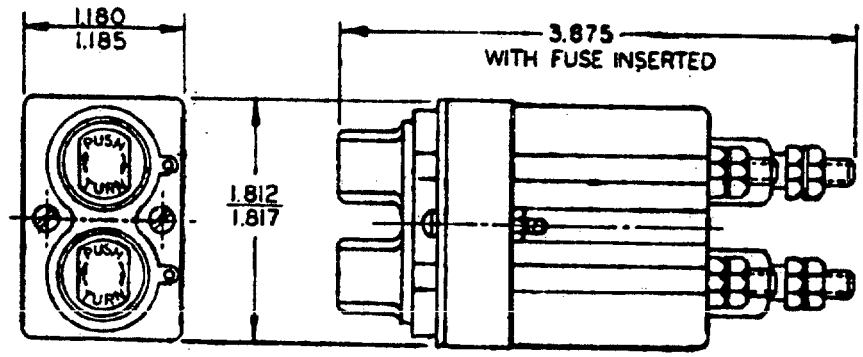


FUSE ACCOMMODATION:

FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09.
POLES:	TWO
RATING:	30 AMPERES, 90 - 250 VOLTS
INDICATING:	NEON LAMP WITH CLEAR CAP
LAMP SERIES RESISTOR:	120,000 OHMS
TERMINALS:	STUD TYPE, NO. 8 - 32 UNC-2A THREAD
ENCLOSURE:	UNSEALED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL11U

MIL-F-19207/2

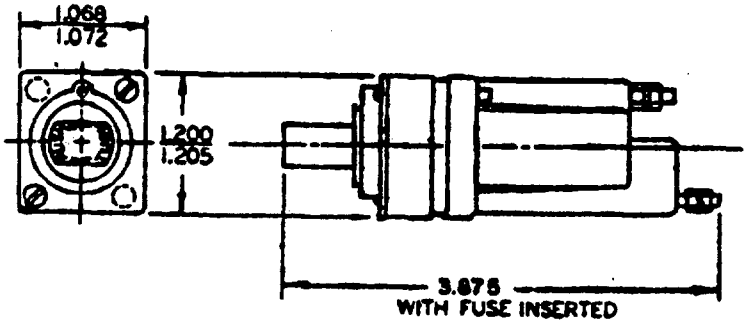


FUSE ACCOMMODATION:

FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09.
POLES:	ONE
RATING:	30 AMPERES, 90 - 250 VOLTS
INDICATING:	NEON LAMP WITH CLEAR CAP
LAMP SERIES RESISTOR:	120,000 OHMS
TERMINALS:	STUD TYPE, NO. 8 - 32 UNC-2A THREAD
ENCLOSURE:	UNSEALED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL12U

MIL-F-19207/3

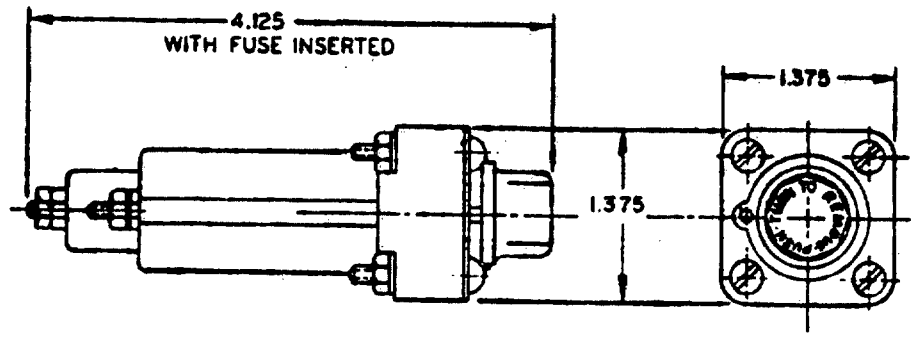


FUSE ACCOMMODATION:

FERRULE TYPE:	
SIZE:	0.406 INCH DIA, 1.500 INCH LENGTH
STYLE:	MIL-F-15160 F60, F09.
POLES:	ONE
RATING:	30 AMPERES, 90 - 500 VOLTS
INDICATING:	NEON LAMP WITH CLEAR CAP
LAMP SERIES RESISTOR:	330,000 OHMS
TERMINALS:	STUD TYPE, NO. 8 - 32 UNC-2A THREAD
ENCLOSURE:	UNSEALED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL14G

MIL-F-19207/5

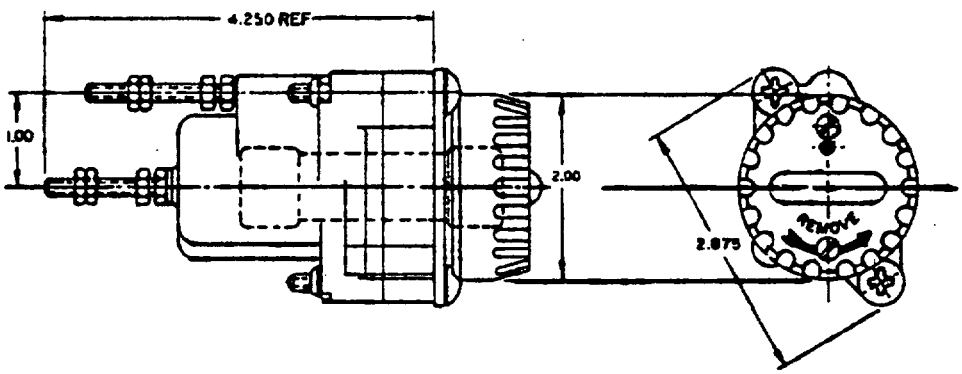


FUSE ACCOMMODATION:

FERRULE TYPE:	
SIZE:	0.813 INCH DIA, 3 INCHES LENGTH
STYLE:	MIL-F-15160 F16, F62.
POLES:	ONE
RATING:	31 - 60 AMPERES, 90 - 500 VOLTS
INDICATING:	NEON LAMP WITH CLEAR CAP
LAMP SERIES RESISTOR:	MIL-R-39017/2, 2 RESISTORS, 160,000 OHMS 0.5 WATT, I IN EA LAMP LEAD
TERMINALS:	STUD TYPE, .250 - 20, UNC-2A THREAD
ENCLOSURE:	DRIPPROOF


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL17G1 AND FHL17G2

MIL-F-19207/8

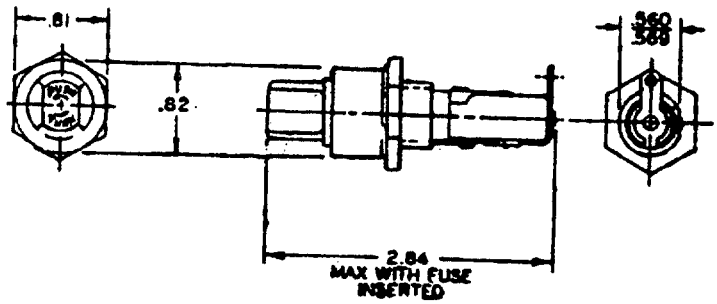

TYPE FHL17G1

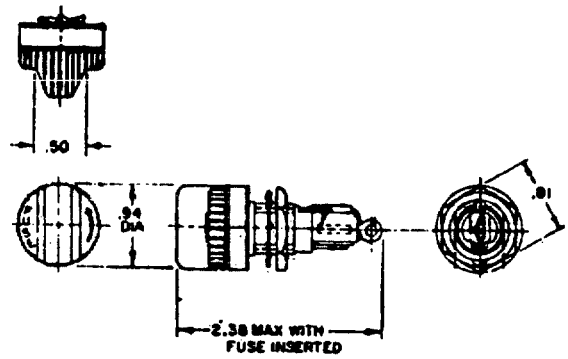


TYPE FHL17G2

FUSE ACCOMMODATION:	
FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09.
POLES:	ONE
RATING:	20 AMPERES, 90 - 250 VOLTS
INDICATING:	NEON LAMP WITH CLEAR CAP
LAMP SERIES RESISTOR:	120,000 OHMS
TERMINALS:	SOLDER LUG TYPE
ENCLOSURE:	DRIPPROOF


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL18G1 AND FHL18G2

MIL-F-19207/9

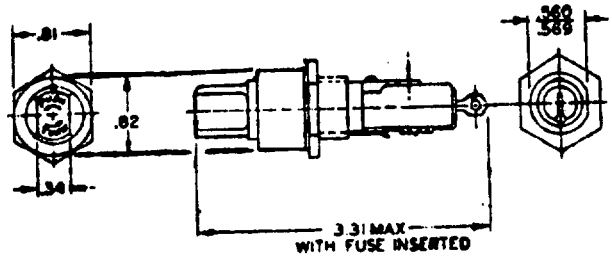

TYPE FHL18G1

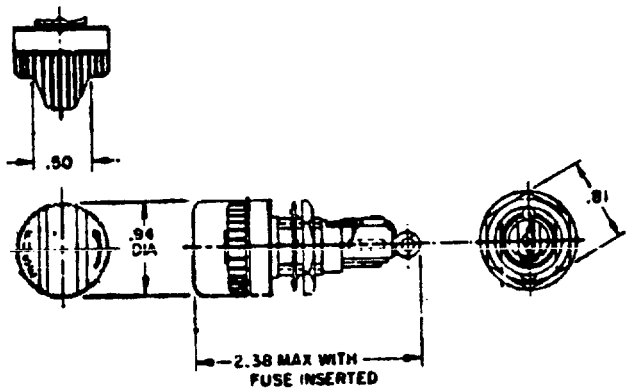

TYPE FHL18G2

FUSE ACCOMMODATION:

FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09.
POLES:	ONE
RATING:	20 AMPERES, SEE BELOW
INDICATING:	INCANDESCENT LAMP WITH AMBER COLOR CAP.
LAMP SERIES RESISTOR:	SEE BELOW
TERMINALS:	SOLDER LUG TYPE
ENCLOSURE:	DRIPPROOF

DASH NO.	VOLTAGE RATING	RESISTANDE OHMS	RESISTOR TYPE
-01	12-22	SHORTING WIRE	---
-02	23-33	330	RCR-20
-03	34-45	681	RWR-80
-04	46-60	1210	RWR-80
-05	61-80	1870	RWR-89
-06	81-90	2050	RWR-89
-07	2.5-4	SHORTING WIRE	---
-08	5-7	22.1	RWR-80
-09	8-12	39.2	RWR-80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE NONINDICATING, TYPE FHN26G1, FHN26G2, AND FHN26W

MIL-F-19207/16

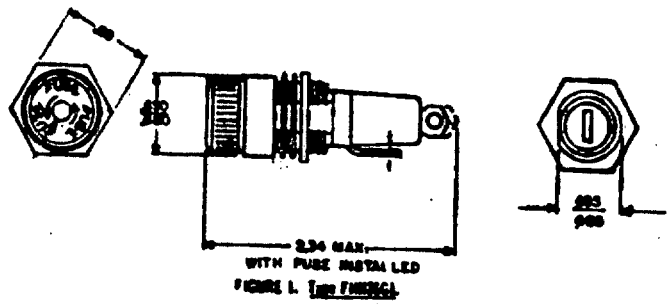


FIGURE 1. Type FHN26G1.


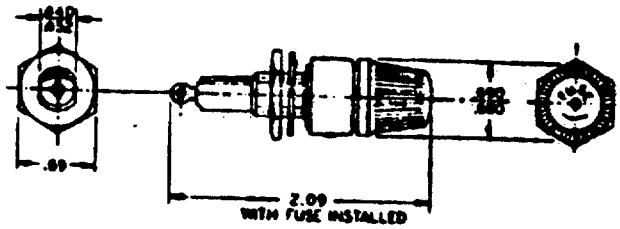


FIGURE 2. Type FHN26G2.

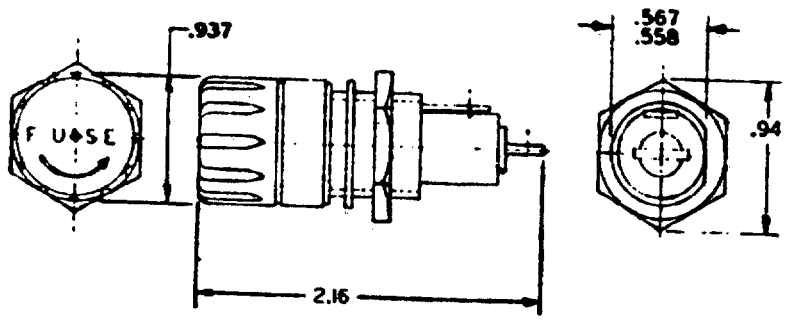


FUSE ACCOMMODATION:

FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENG
STYLE:	MIL-F-23419 FM09.
POLES:	ONE
RATING:	30 AMPERES, 250 VOLTS MAX
NONINDICATING:	
LAMP SERIES RESISTOR:	NONE
TERMINALS:	SOLDER LUG TYPE
ENCLOSURE:	FHN26G1 AND FHN26G2 - DRIPPROOF FHN26W - WATERTIGHT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE NONINDICATING, TYPE FHN28WB

MIL-F-19207/17

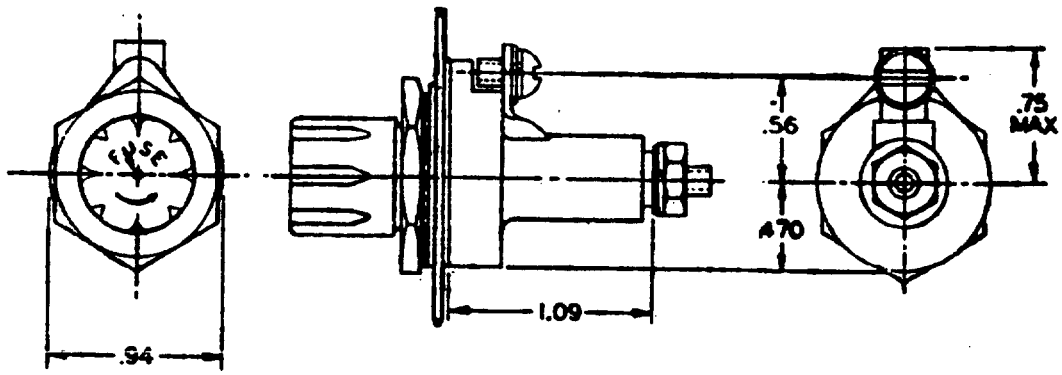


FUSE ACCOMMODATION:	
FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09.
POLES:	ONE
RATING:	30 AMPERES, 250 MAX VOLTS
NONINDICATING:	
LAMP SERIES RESISTOR:	NONE
TERMINALS:	STUD AND SCREW TYPE
ENCLOSURE:	WATERTIGHT AND BODY SEALED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL29G

MIL-F-19207/18

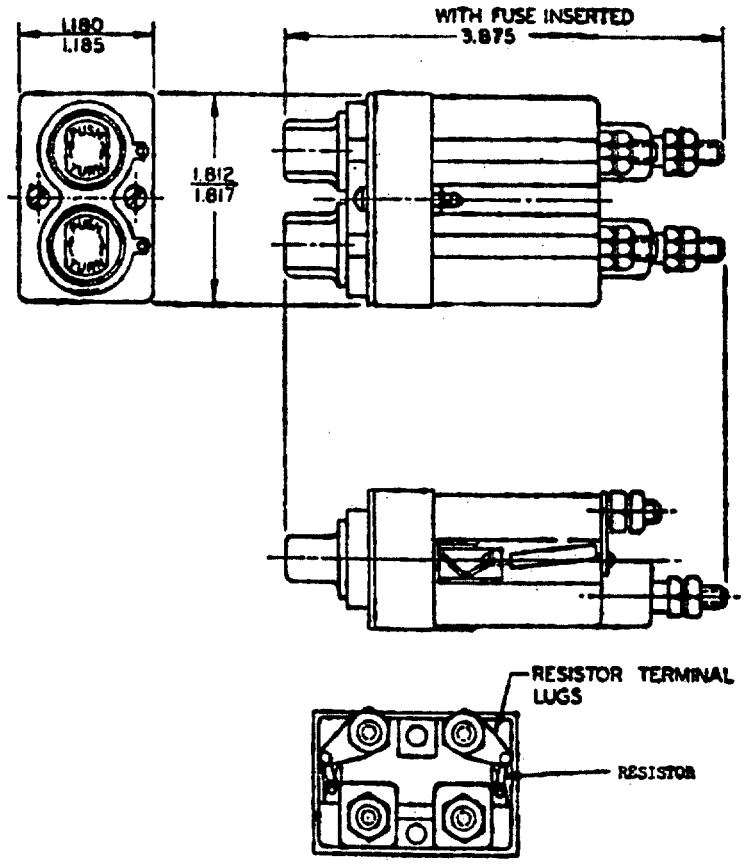

FUSE ACCOMMODATION:


FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09.
POLES:	TWO
RATING:	30 AMPERES, SEE BELOW
INDICATING:	INCANDESCENT LAMP NO. 1764 WITH AMBER COLOR CAP
LAMP SERIES RESISTOR:	SEE BELOW
TERMINALS:	STUD TYPE, NO. 8 - 32 UNC-2A THREAD
ENCLOSURE:	DRIPPROOF

DASH NUMBER	VOLTAGE	RESISTANCE OHMS SHORTING WIRE IN PLACE OF RESISTOR
1	12-22	
2	23-33	330
3	34-45	681
4	46-60	1210
5	61-80	1870
6	81-90	2050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL30G

MIL-F-19207/19

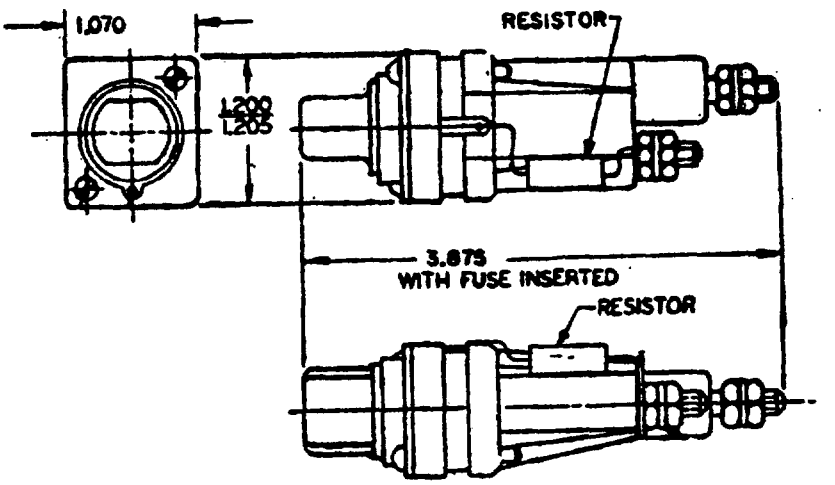

FUSE ACCOMMODATION:


FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09.
POLES:	ONE
RATING:	30 AMPERES, SEE BELOW
INDICATING:	INCANDESCENT LAMP NO. 1764 WITH AMBER COLOR CAP
LAMP SERIES RESISTOR:	SEE BELOW
TERMINALS:	STUD TYPE, NO. 8 - 32 UNC-2A THREAD
ENCLOSURE:	DRIPPROOF

DASH NUMBER	VOLTAGE	RESISTANCE OHMS
1	12-22	SHORTING WIRE IN PLACE OF RESISTOR
2	23-33	330
3	34-45	681
4	46-60	1210
5	61-80	1870
6	81-90	2050

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL32W

MIL-F-19207/21

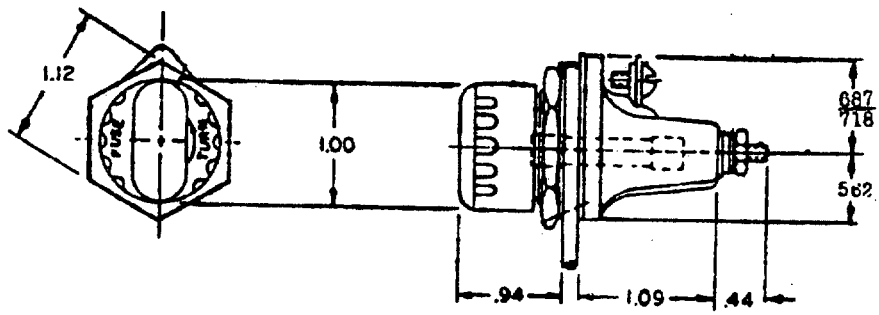


FUSE ACCOMMODATION:

FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09.
POLES:	ONE
RATING:	30 AMPERES, 90 - 250 VOLTS
INDICATING:	NEON LAMP WITH CLEAR CAP
LAMP SERIES RESISTOR:	MIL-R-39008/2 OR MIL-R-39017/2, 120,000 OHMS, 0.5 WATT
TERMINALS:	THREADED STUD AND SCREW TYPE
ENCLOSURE:	WATERTIGHT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL33W

MIL-F-19207/22

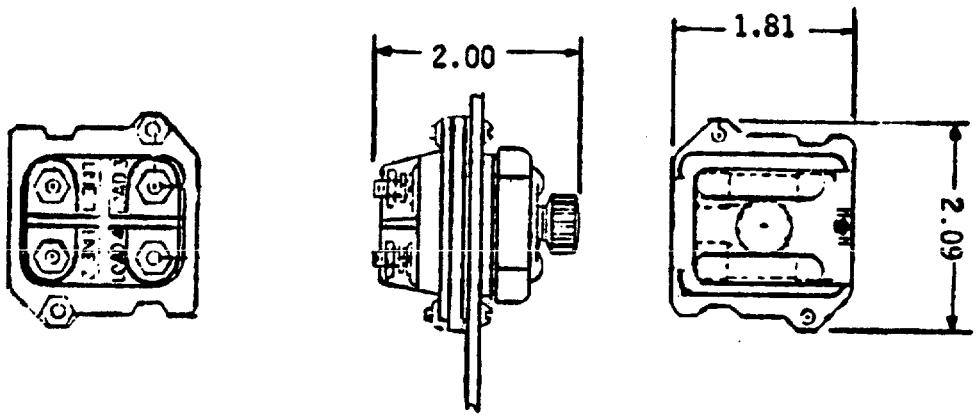



FUSE ACCOMMODATION:	
FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09.
POLES:	TWO
RATING:	30 AMPERES, 90 - 250 VOLTS
INDICATING:	NEON LAMP (EACH POLE) WITH CLEAR CAP
LAMP SERIES RESISTOR:	MIL-R-39008/2 OR MIL-R-39017/2, 120,000 OHMS, 0.5 WATT EACH LAMP
TERMINALS:	THREADED STUD TYPE
ENCLOSURE:	WATERTIGHT


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL34W

MIL-F-19207/23



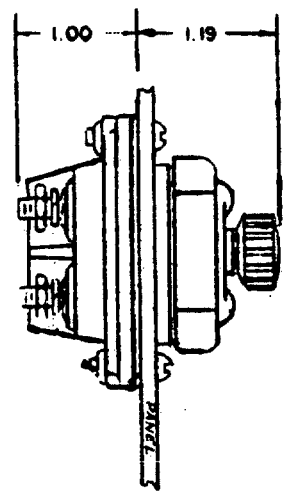

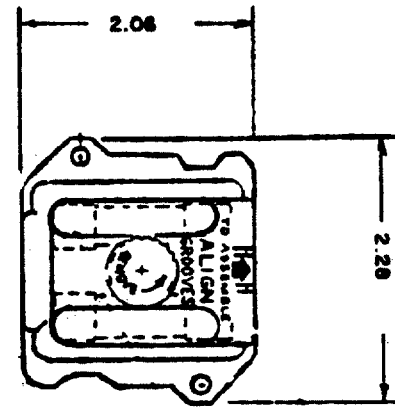


FUSE ACCOMMODATION:	
FERRULE TYPE:	
SIZE:	0.406 INCH DIA, 1.500 INCH LENGTH
STYLE:	MIL-F-15160 F60, F09.
POLES:	TWO
RATING:	30 AMPERES, 90 - 500 VOLTS
INDICATING:	NEON LAMP EACH POLE WITH CLEAR CAP
LAMP SERIES RESISTOR:	MIL-R-39017/2, 330,000 OHMS, 0.5 WATT EACH LAMP
TERMINALS:	THREADED STUD TYPE
ENCLOSURE:	WATERTIGHT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL35W

MIL-F-19207/24

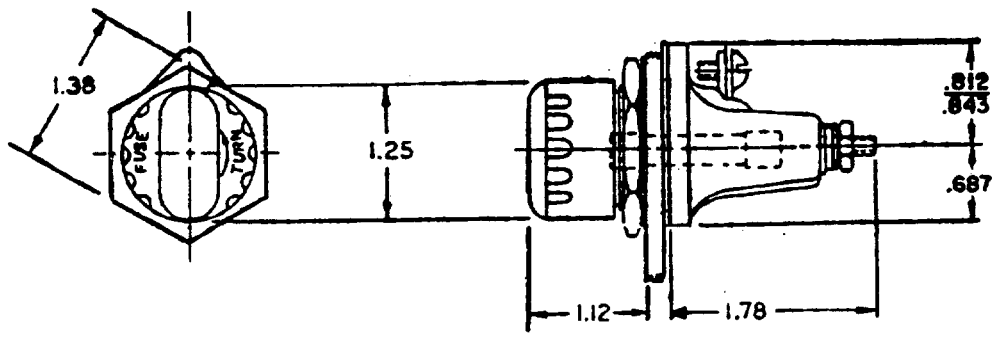


FUSE ACCOMMODATION:

FERRULE TYPE:	
SIZE:	0.406 INCH DIA, 1.500 INCH LENGTH
STYLE:	MIL-F-15160 F60, F09.
POLES:	ONE
RATING:	30 AMPERES, 90 - 500 VOLTS
INDICATING:	NEON LAMP WITH CLEAR CAP
LAMP SERIES RESISTOR:	MIL-R-39017/2, 330,000 OHMS, 0.5 WATT
TERMINALS:	THREADED STUD AND SCREW TYPE
ENCLOSURE:	WATERTIGHT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE NONINDICATING, TYPE FHN41WB

MIL-F-19207/25

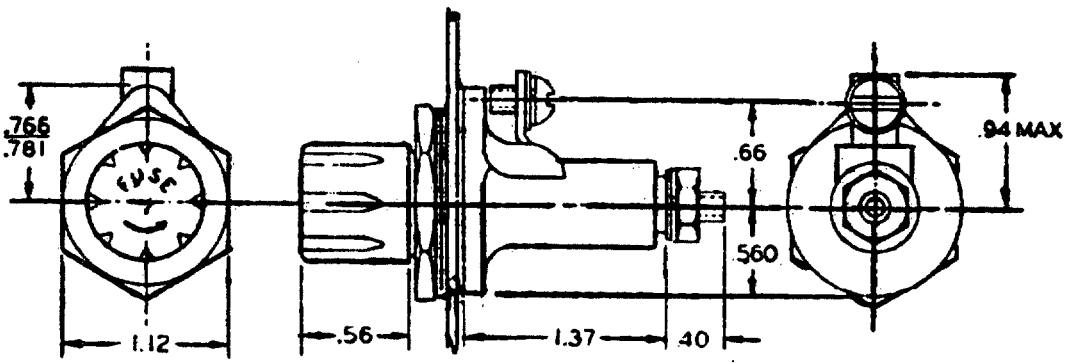


FUSE ACCOMMODATION:	
FERRULE TYPE:	
SIZE:	0.406 INCH DIA, 1.500 INCH LENGTH
STYLE:	MIL-F-15160 F60, F09.
POLES:	ONE
RATING:	30 AMPERES, 500 VOLTS MAX
NONINDICATING:	
LAMP SERIES RESISTOR:	NONE
TERMINALS:	THREADED STUD AND SCREW TYPE
ENCLOSURE:	WATERTIGHT AND BODY SEALED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, NONINDICATING TYPE FHN42W

MIL-F-19207/26

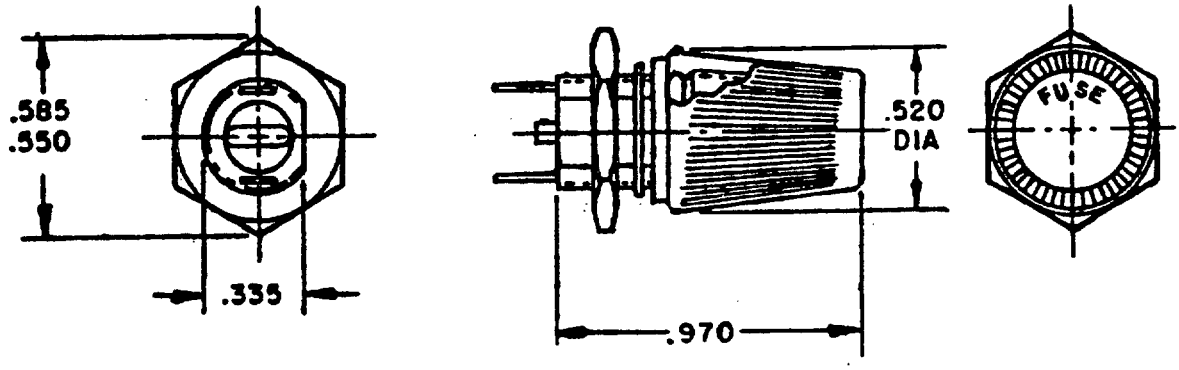


FUSE ACCOMMODATION


MINIATURE PLUG TYPE:	MIL-F-23419 FM01 AND FM02. FUSE IS NOT CAPTIVE IN CAP AT REMOVAL.
POLES:	ONE
RATING:	5 AMPERES, 125 VOLTS MAX.
NONINDICATING:	
TERMINALS:	SOLDER LUG TYPE
ENCLOSURE:	WATERTIGHT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL44G

MIL-F-19207/28

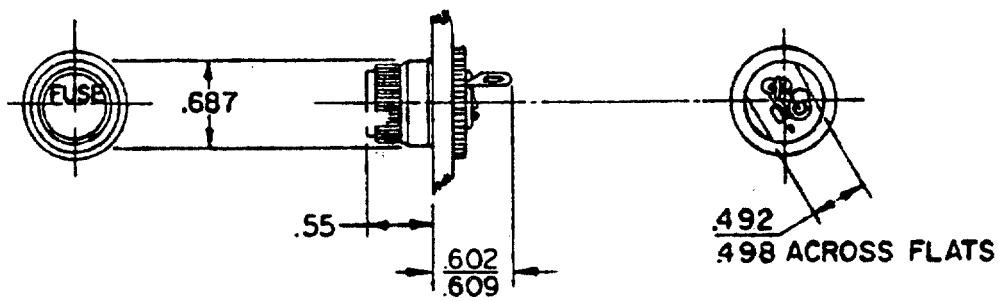



VIEW WITH CAP REMOVED

FUSE ACCOMMODATION:


FERRULE TYPE:	
SIZE:	
MINIATURE PLUG TYPE:	MIL-F-23419 FM02. FUSE IS NOT CAPTIVE IN CAP AT REMOVAL.
POLES:	ONE
RATING:	5 AMPERES, SEE BELOW
INDICATING:	INCANDESCENT LAMP NO. 1762 OR 1764 WITH AMBER COLOR CAP
LAMP SERIES RESISTOR:	SEE BELOW
TERMINALS:	SOLDER LUG TYPE
ENCLOSURE:	DRIPPROOF


DASH NUMBER	VOLTAGE	RESISTANCE OHMS
1	12-22	SHORTING WIRE IN PLACE OF RESISTOR
2	23-33	330
3	34-45	680
4	46-60	1200
5	61-80	1800
6	81-90	2000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL45G

MIL-F-19207/29

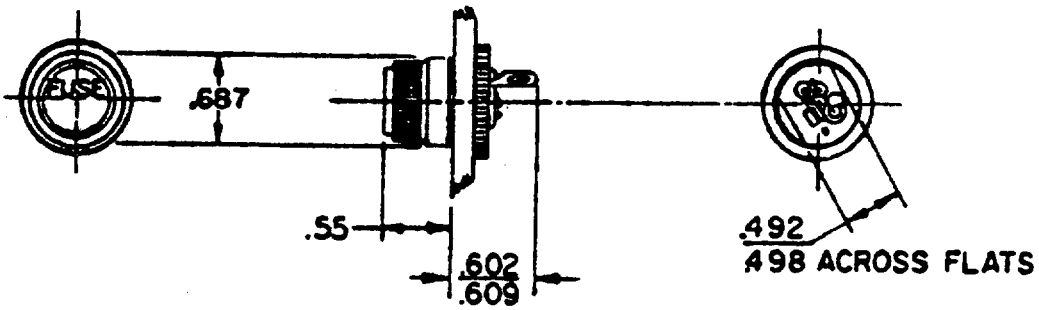




VIEW WITH CAP REMOVED

FUSE ACCOMMODATION:	
FERRULE TYPE:	
SIZE:	
MINIATURE PLUG TYPE:	MIL-F-23419 FM02. FUSE IS NOT CAPTIVE IN CAP AT REMOVAL.
POLES:	ONE
RATING:	5 AMPERES, 90 - 125 VOLTS
INDICATING:	NEON LAMP WITH CLEAR CAP
LAMP SERIES RESISTOR:	120,000 OHMS
TERMINALS:	SOLDER LUG TYPE
ENCLOSURE:	DRIPPROOF

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE NONINDICATING, TYPE FHN47WB

MIL-F-19207/31

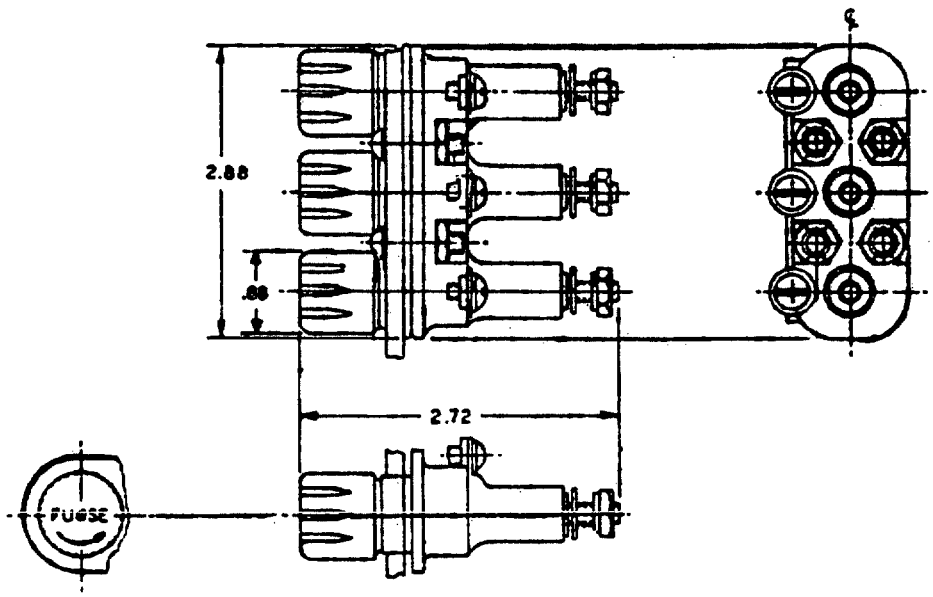



FUSE ACCOMMODATION:	
FERRULE TYPE:	
SIZE:	0.406 INCH DIA, 1.500 INCH LENGTH
STYLE:	MIL-F-15160 F60, F09.
POLES:	THREE
RATING:	30 AMPERES, 500 VOLTS MAX
NONINDICATING:	
LAMP SERIES RESISTOR:	NONE
TERMINALS:	THREADED STUD AND SCREW TYPE
ENCLOSURE:	WATERTIGHT AND BODY SEALED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL48U

MIL-F-19207/32

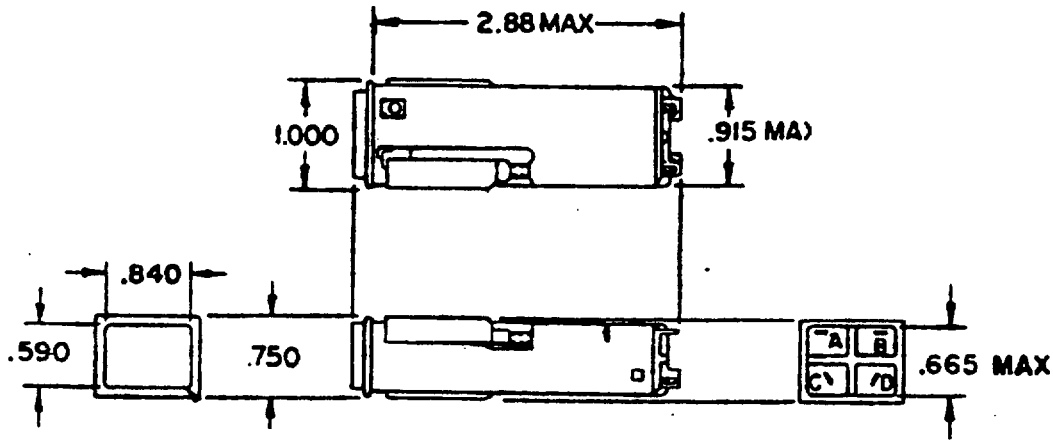

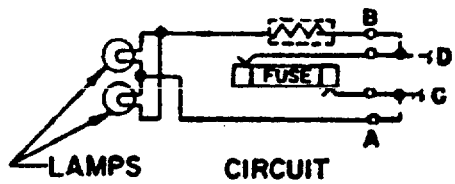

FUSE ACCOMMODATION:


FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09 (ONE)
POLES:	---
RATING:	30 AMPERES, SEE BELOW
INDICATING:	LAMP NO. MS25237-387.
LAMP SERIES RESISTOR:	SEE BELOW
TERMINALS:	SOLDER
ENCLOSURE:	UNSEALED


DASH NUMBER	VOLTAGE	RESISTANCE OHMS
-01	12-22	SHORTING WIRE IN PLACE OF RESISTOR
-02	23-33	160, 1 WATT
-03	34-45	330, 2 WATT
-04	46-60	680, 3 WATT
-05	61-80	820, 4 WATT
-06	81-90	1000, 5 WATT

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, BLOWN FUSE INDICATING, TYPE FHL49U

MIL-F-19207/33

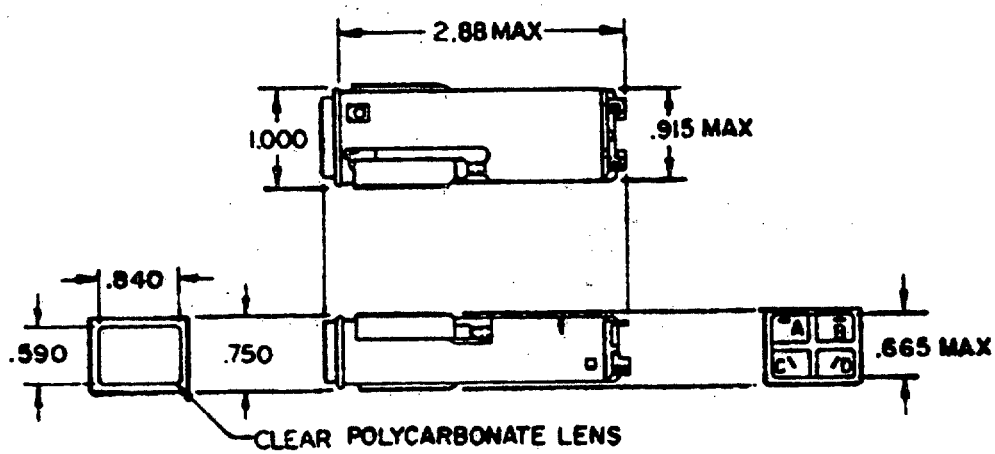

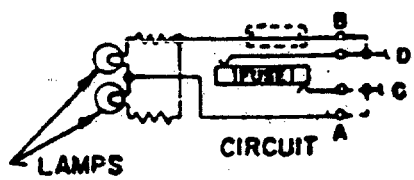


FUSE ACCOMMODATION:

FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09 (ONE)
POLES:	---
RATING:	30 AMPERES, 90 - 125 VOLTS
INDICATING:	NEON AND SHALL BE ENCAPSULATED IN FUSE CARRIER.
LAMP SERIES RESISTOR:	60,000 OHMS
TERMINALS:	SOLDER
ENCLOSURE:	UNSEALED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

FUSEHOLDERS, EXTRACTOR POST TYPE, R. F. SHIELDED, NONINDICATING, TYPE FHN55W

MIL-F-19207/36

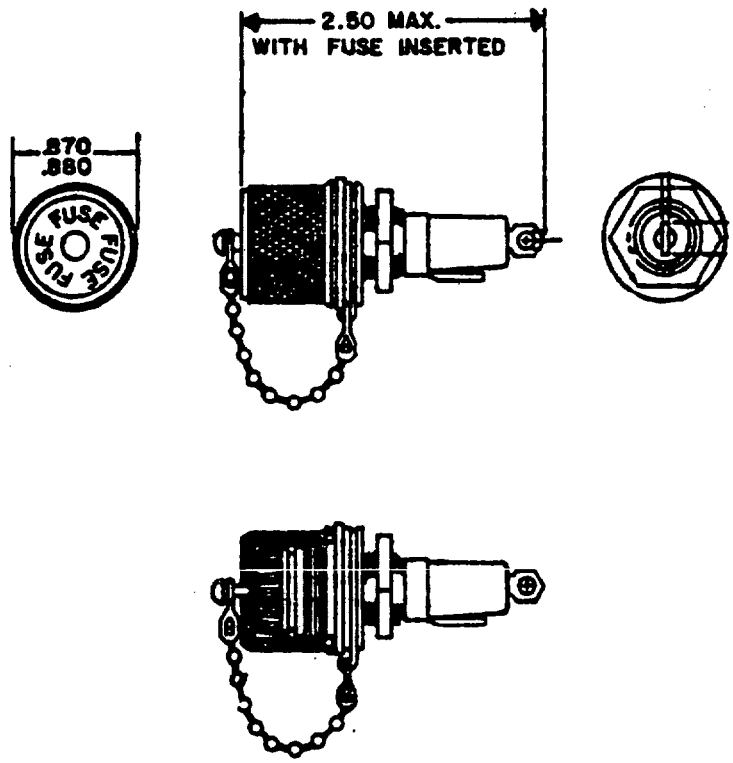

FUSE ACCOMMODATION:	
FERRULE TYPE:	
SIZE:	0.250 INCH DIA, 1.250 INCH LENGTH
STYLE:	MIL-F-23419 FM09
POLES:	ONE
RATING:	30 AMPERES, 250 VOLTS MAX
NONINDICATING:	
LAMP SERIES RESISTOR:	NONE
TERMINALS:	SOLDER LUG TYPE
ENCLOSURE:	WATERTIGHT, WITH SHIELD CAP SECURED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, AIR, ELECTRIC, INSULATED HOUSING

MIL-C-17361

SCOPE: THIS SECTION COVERS CIRCUIT BREAKERS WITH HOUSING OF INSULATING MATERIAL.

DESCRIPTION		GENERAL RATINGS		
CIRCUIT BREAKER TYPE: AQB		A50	A101	A250
VOLTAGE RATING AND FREQUENCY	AC 60 HZ	500	500	500
	AC 400 HZ	---	500	500
	DC	250	250	250
INTERRUPTING RATING (AMP)	AC 60 HZ	5000	15000	20000
	AC 400 HZ	---	10000	10000
	DC	2500	10000	15000


TYPE DESIGNATION	TRIP ELEMENT RATING (AMP)	VOLTAGE		
		60 HZ AC 500 VAC	250 VDC	400 HZ AC 500 VAC
AQB-A50	10,15,20	X	X	
	25,30	X	X	
	35,50	X	X	
AQB-A101	15	X	X	
	15H			X
	25	X		
	25H			X
AQB-A101 WITH FUSE UNIT ATTACH-MENT	50	X	X	
	50H			X
	75	X	X	
	75H			X
	100	X	X	
	100H			X
	100G	X	X	
	100GH			X
AQB-A250	225NM	X		
	225NH			X
	250N	X		
	250NM	X		
	250NH			X


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CIRCUIT BREAKERS, AIR, ELECTRIC, INSULATED HOUSING


MIL-C-17361

AQB-A50

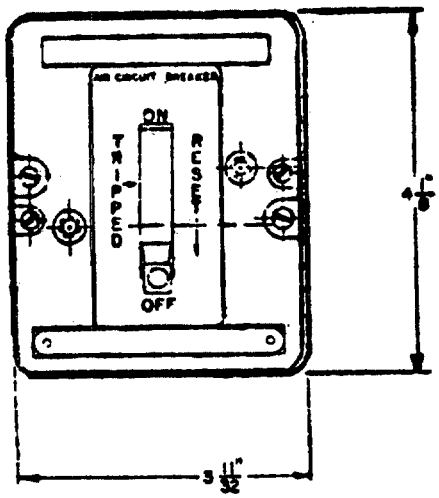

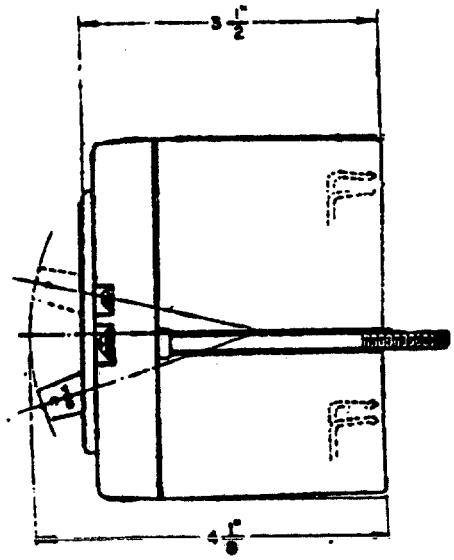

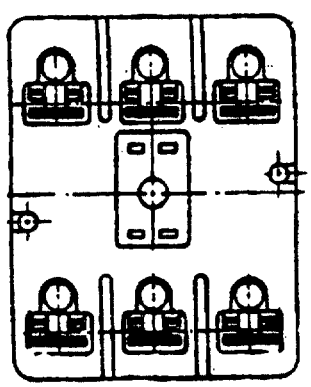





TYPE AQB-A50


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


CIRCUIT BREAKERS, AIR, ELECTRIC, INSULATED HOUSING

MIL-C-17361

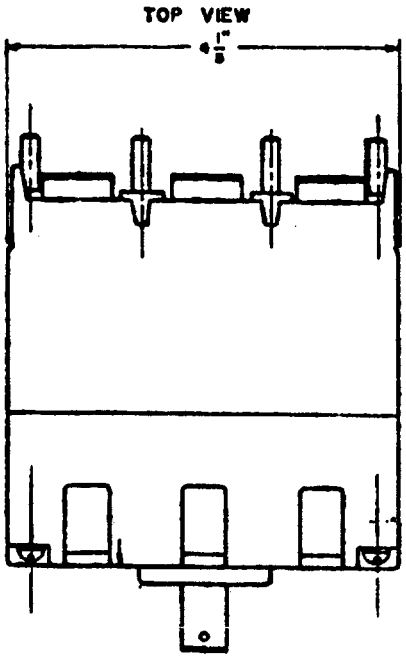



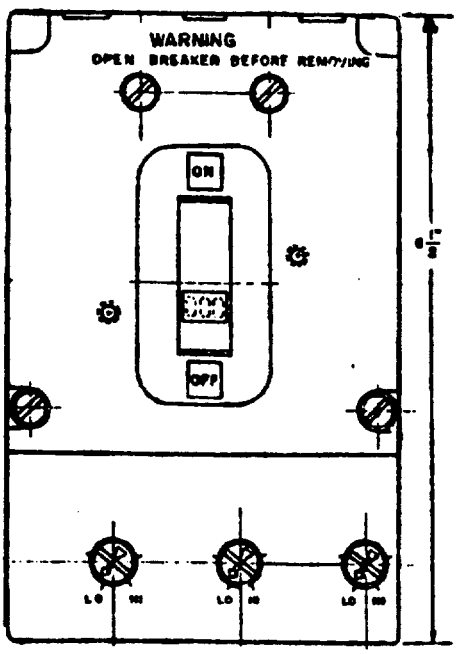

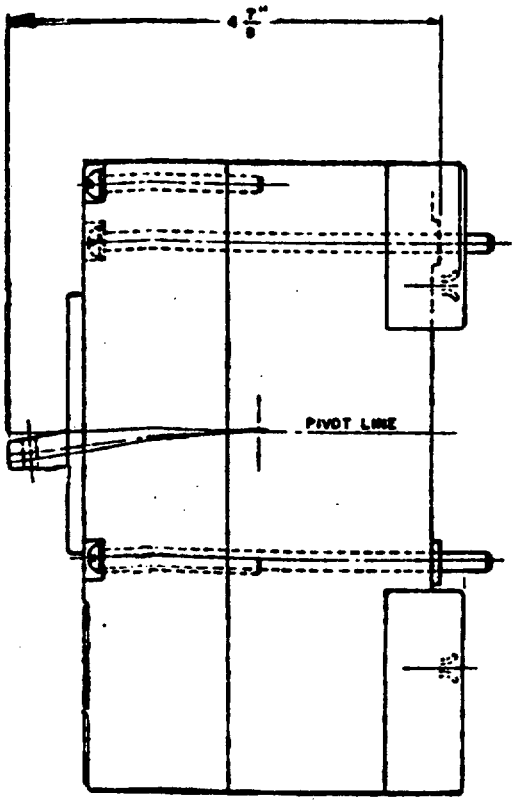



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, AIR, ELECTRIC, INSULATED HOUSING

MIL-C-17361

AQB-A250

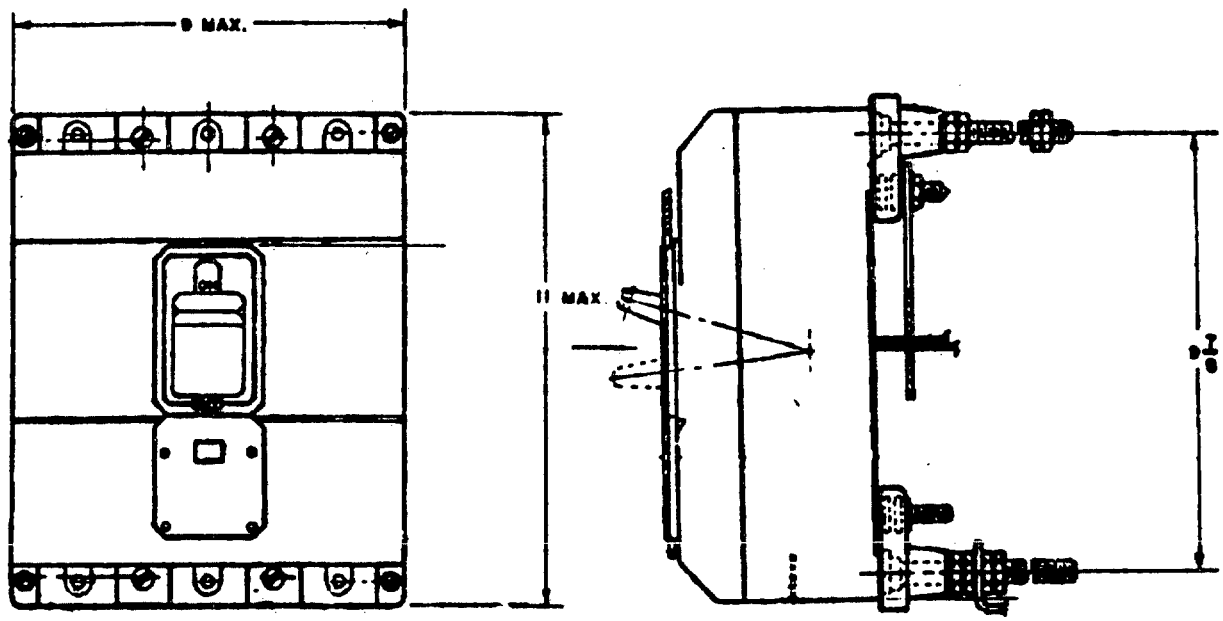

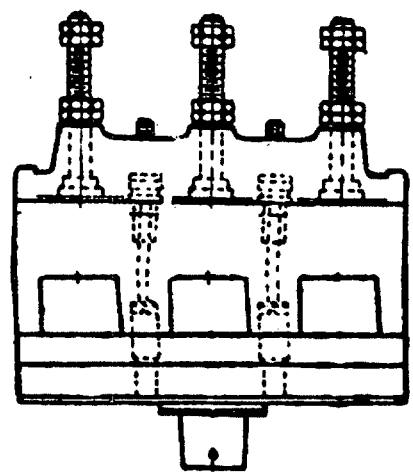




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE

MIL-C-39019

SCOPE: THIS SECTION COVERS SINGLE AND MULTIPLE, TRIP-FREE, SEALED, LOW POWER, MAGNETIC CIRCUIT BREAKERS WITH CURRENT RATINGS OF 0.050 TO 20.0 AMPERES INCLUSIVE UP TO AND INCLUDING 240 VOLTS, 60 AND 400 Hz ALTERNATING CURRENT AND 50 VOLTS DIRECT CURRENT. THESE CIRCUIT BREAKERS MAY ALSO INCLUDE AUXILIARY CONTACTS AND TERMINALS FOR MONITORING CIRCUITS. THESE CIRCUIT BREAKERS ARE INTENDED FOR USE IN THE PROTECTION OF ELECTRONIC CIRCUITS, AND SHOULD BE USED WHERE STARTING INRUSHES OF TRANSIENT OVERLOADS ARE NEITHER HEAVY NOR PROLONGED AND THE EQUIPMENT MUST HAVE RELATIVELY FAST PROTECTION. THESE CIRCUIT BREAKERS SHOULD NOT BE USED IN CIRCUITS WHOSE SHORT CIRCUIT CURRENT POTENTIAL IS GREATER THAN THE INTERRUPTING CAPACITY OF THE BREAKER UNLESS THE CIRCUIT IS PROPERLY PROTECTED BY OTHER MEANS.

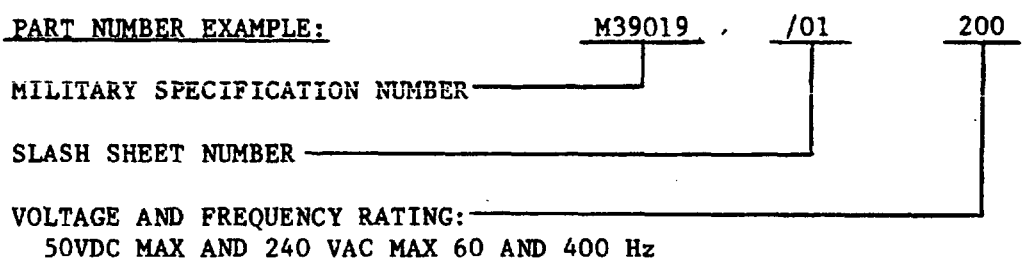

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE

MIL-C-39019

TABLE I. TRIPPING-TIME HIGH AND LOW DELAY.

% RATED CURRENT	TIME DELAY					
	A (FAST)		B (SLOW)		C (NONDELAY)	
	-40 C	+100 C	-40 C	+100 C	-40 C	+100 C
	MAX	MIN	MAX	MIN	MAX	MIN
100	**	**	**	**	**	**
135	400.0	0.10	500.0	0.4	0.10	INST
150	800.0	---	1000.0	---	0.20	---
200	5.0	0.015	25.0	0.04	0.05	INST
400	0.7	INST	10.0	INST	---	---
600	0.5	INST	2.0	INST	---	---
800	0.06	INST	0.1	INST	---	---
800 AT 60Hz & DC	***	***	***	***	N/A	N/A
1400 AT 400 Hz	***	***	***	***	N/A	N/A

** NO TRIP ONE HOUR


*** NO TRIP, TEST APPLICABLE ONLY TO HIGH INRUSH DESIGN BREAKERS.

INSTANTANEOUS (INST) IS DEFINED AS LESS THAN 0.015 SECONDS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, ONE POLE

MIL-C-39019/1

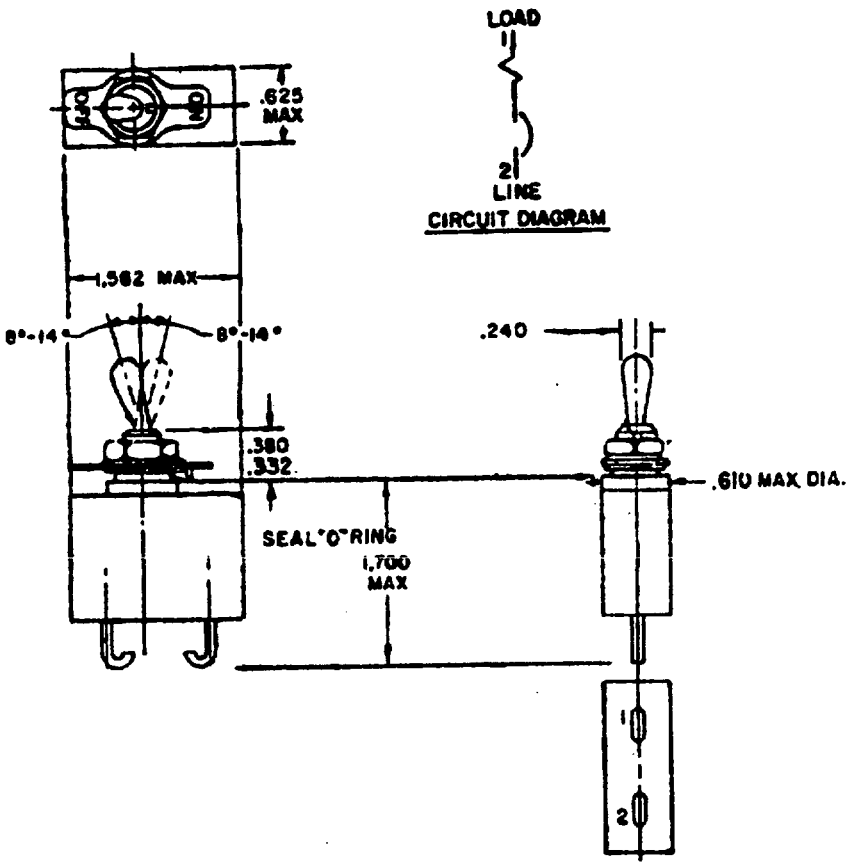

PART NUMBER: M39019/01-*

* SEE TABLE II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, ONE POLE

MIL-C-39019/1

TABLE II. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS.

DASH NUMBER		CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX		
STD. DELAY	HIGH INRUSH			DC	60 Hz	400 Hz
200	300	0.05	A	680.0	690.0	710.0
201	301	0.05	B	680.0	690.0	710.0
202	---	0.05	C	680.0	690.0	710.0
203	302	0.1	A	150.0	170.0	180.0
204	303	0.1	B	150.0	170.0	180.0
205	---	0.1	C	150.0	170.0	180.0
206	304	0.25	A	20.0	26.0	27.0
207	305	0.25	B	20.0	26.0	27.0
208	---	0.25	C	20.0	26.0	27.0
209	306	0.5	A	5.4	6.0	6.6
210	307	0.5	B	5.4	6.0	6.6
211	---	0.5	C	5.4	6.0	6.6
212	308	0.75	A	2.5	2.7	2.8
213	309	0.75	B	2.5	2.7	2.8
214	---	0.75	C	2.5	2.7	2.8
215	310	1.0	A	1.35	1.5	1.61
216	311	1.0	B	1.35	1.5	1.61
217	---	1.0	C	1.35	1.5	1.61
260	340	1.25	A	0.9	1.0	1.1
261	341	1.25	B	0.9	1.0	1.1
262	---	1.25	C	0.9	1.0	1.1
263	342	1.5	A	0.65	0.70	0.75
264	343	1.5	B	0.65	0.70	0.75
265	---	1.5	C	0.65	0.70	0.75
218	312	2.0	A	0.40	0.40	0.50
219	313	2.0	B	0.40	0.40	0.50
220	---	2.0	C	0.40	0.40	0.50
221	314	2.5	A	0.25	0.25	0.27
222	315	2.5	B	0.25	0.25	0.27
223	---	2.5	C	0.25	0.25	0.27
224	316	3.0	A	0.15	0.15	0.17
225	317	3.0	B	0.15	0.15	0.17
226	---	3.0	C	0.15	0.15	0.17
227	318	4.0	A	0.10	0.10	0.12
228	319	4.0	B	0.10	0.10	0.12
229	---	4.0	C	0.10	0.10	0.12

* SEE TABLE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, ONE POLE

MIL-C-39019/1

TABLE II. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS. (CONT.)


DASH NUMBER		CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX		
STD. DELAY	HIGH INRUSH			DC	60 Hz	400 Hz
230	320	5.0	A	0.061	0.063	0.072
231	321	5.0	B	0.061	0.063	0.072
232	---	5.0	C	0.061	0.063	0.072
233	322	6.0	A	0.042	0.043	0.050
234	323	6.0	B	0.042	0.043	0.050
235	---	6.0	C	0.042	0.043	0.050
236	324	7.0	A	0.036	0.036	0.040
237	325	7.0	B	0.036	0.036	0.040
238	---	7.0	C	0.036	0.036	0.040
239	326	7.5	A	0.031	0.031	0.038
240	327	7.5	B	0.031	0.031	0.038
241	---	7.5	C	0.031	0.031	0.038
242	328	8.0	A	0.027	0.028	0.035
243	329	8.0	B	0.027	0.028	0.035
244	---	8.0	C	0.027	0.028	0.035
245	330	9.0	A	0.022	0.022	0.028
246	331	9.0	B	0.022	0.022	0.028
247	---	9.0	C	0.022	0.022	0.028
248	332	10.0	A	0.018	0.021	0.024
249	333	10.0	B	0.018	0.021	0.024
250	---	10.0	C	0.018	0.0	0.024
251	334	12.5	A	0.012	0.013	0.015
252	335	12.5	B	0.012	0.013	0.015
253	---	12.5	C	0.012	0.013	0.015
254	336	15.0	A	0.009	0.009	0.010
255	337	15.0	B	0.009	0.009	0.010
256	---	15.0	C	0.009	0.009	0.010
257	338	20.0	A	0.006	0.006	0.007
258	339	20.0	B	0.006	0.006	0.007
259	---	20.0	C	0.006	0.006	0.007

* SEE TABLE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, ONE POLE, AUXILIARY CONTACTS

MIL-C-39019/2

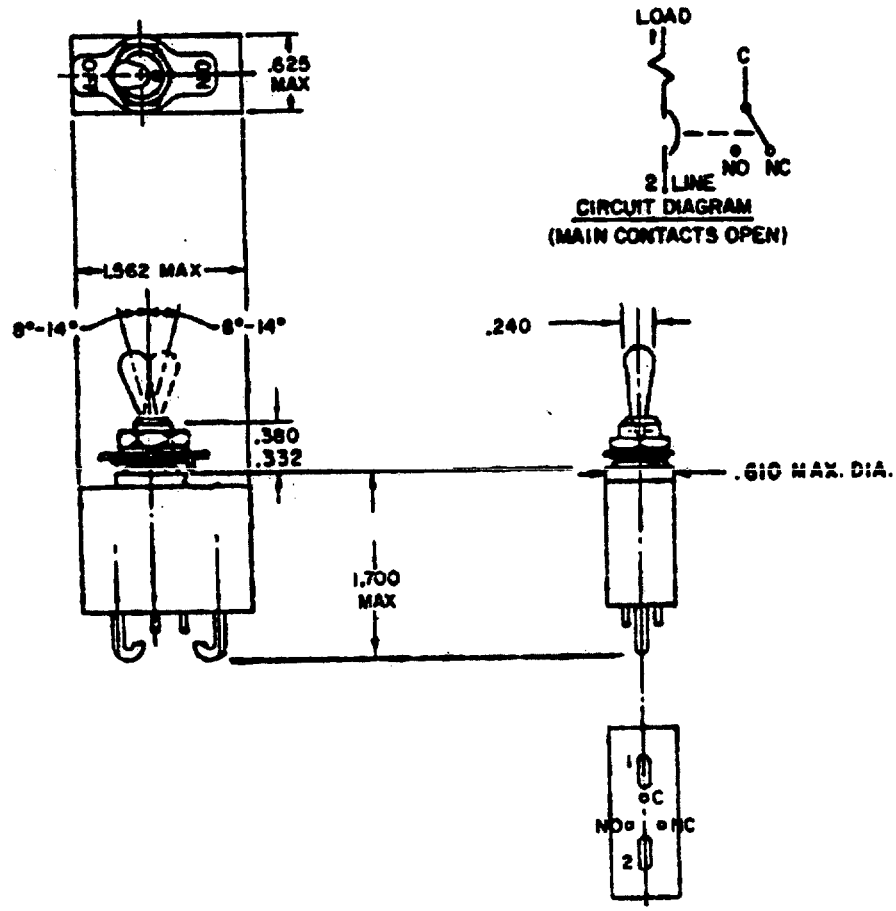

PART NUMBER: M39019/02-*

* SEE TABLE II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, ONE POLE, AUXILIARY CONTACTS

MIL-C-39019/2

TABLE II. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS.

DASH NUMBER		CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX		
STD. DELAY	HIGH INRUSH			DC	60 Hz	400 Hz
200	300	0.05	A	680.0	690.0	710.0
201	301	0.05	B	680.0	690.0	710.0
202	---	0.05	C	680.0	690.0	710.0
203	302	0.1	A	150.0	170.0	180.0
204	303	0.1	B	150.0	170.0	180.0
205	---	0.1	C	150.0	170.0	180.0
206	304	0.25	A	20.0	26.0	27.0
207	305	0.25	B	20.0	26.0	27.0
208	---	0.25	C	20.0	26.0	27.0
209	306	0.55	A	5.4	6.0	6.6
210	307	0.55	B	5.4	6.0	6.6
211	---	0.55	C	5.4	6.0	6.6
212	308	0.75	A	2.5	2.7	2.8
213	309	0.75	B	2.5	2.7	2.8
214	---	0.75	C	2.5	2.7	2.8
215	310	1.0	A	1.35	1.5	1.61
216	311	1.0	B	1.35	1.5	1.61
217	---	1.0	C	1.35	1.5	1.61
218	312	2.0	A	0.40	0.40	0.50
219	313	2.0	B	0.40	0.40	0.50
220	---	2.0	C	0.40	0.40	0.50
221	314	2.5	A	0.25	0.25	0.27
222	315	2.5	B	0.25	0.25	0.27
223	---	2.5	C	0.25	0.25	0.27
224	316	3.0	A	0.15	0.15	0.17
225	317	3.0	B	0.15	0.15	0.17
226	---	3.0	C	0.15	0.15	0.17
227	318	4.0	A	0.10	0.10	0.12
228	319	4.0	B	0.10	0.10	0.12
229	---	4.0	C	0.10	0.10	0.12
230	320	5.0	A	0.061	0.063	0.072
231	321	5.0	B	0.061	0.063	0.072
232	---	5.0	C	0.061	0.063	0.072
233	322	6.0	A	0.042	0.043	0.050
234	323	6.0	B	0.042	0.043	0.050
235	---	6.0	C	0.042	0.043	0.050

* SEE TABLE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, ONE POLE, AUXILIARY CONTACTS

MIL-C-39019/2

TABLE II. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS. (CONT.)


DASH NUMBER		CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX		
STD. DELAY	HIGH INRUSH			DC	60 Hz	400 Hz
236	324	7.0	A	0.036	0.036	0.040
237	325	7.0	B	0.036	0.036	0.040
238	---	7.0	C	0.036	0.036	0.040
239	326	7.5	A	0.031	0.031	0.038
240	327	7.5	B	0.031	0.031	0.038
241	---	7.5	C	0.031	0.031	0.038
242	328	8.0	A	0.027	0.028	0.035
243	329	8.0	B	0.027	0.028	0.035
244	---	8.0	C	0.027	0.028	0.035
245	330	9.0	A	0.022	0.022	0.028
246	331	9.0	B	0.022	0.022	0.028
247	---	9.0	C	0.022	0.022	0.028
248	332	10.0	A	0.018	0.021	0.024
249	333	10.0	B	0.018	0.021	0.024
250	---	10.0	C	0.018	0.021	0.024
251	334	12.5	A	0.012	0.013	0.015
252	335	12.5	B	0.012	0.013	0.015
253	---	12.5	C	0.012	0.013	0.015
254	336	15.0	A	0.009	0.009	0.010
255	337	15.0	B	0.009	0.009	0.010
256	---	15.0	C	0.009	0.009	0.010
257	338	20.0	A	0.006	0.006	0.007
258	339	20.0	B	0.006	0.006	0.007
259	---	20.0	C	0.006	0.006	0.007
260	340	1.25	A	0.9	1.0	1.1
261	341	1.25	B	0.9	1.0	1.1
262	---	1.25	C	0.9	1.0	1.1
263	342	1.50	A	0.65	0.70	0.75
264	343	1.50	B	0.65	0.70	0.75
265	---	1.50	C	0.65	0.70	0.75

* SEE TABLE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, THREE POLE

MIL-C-39019/5

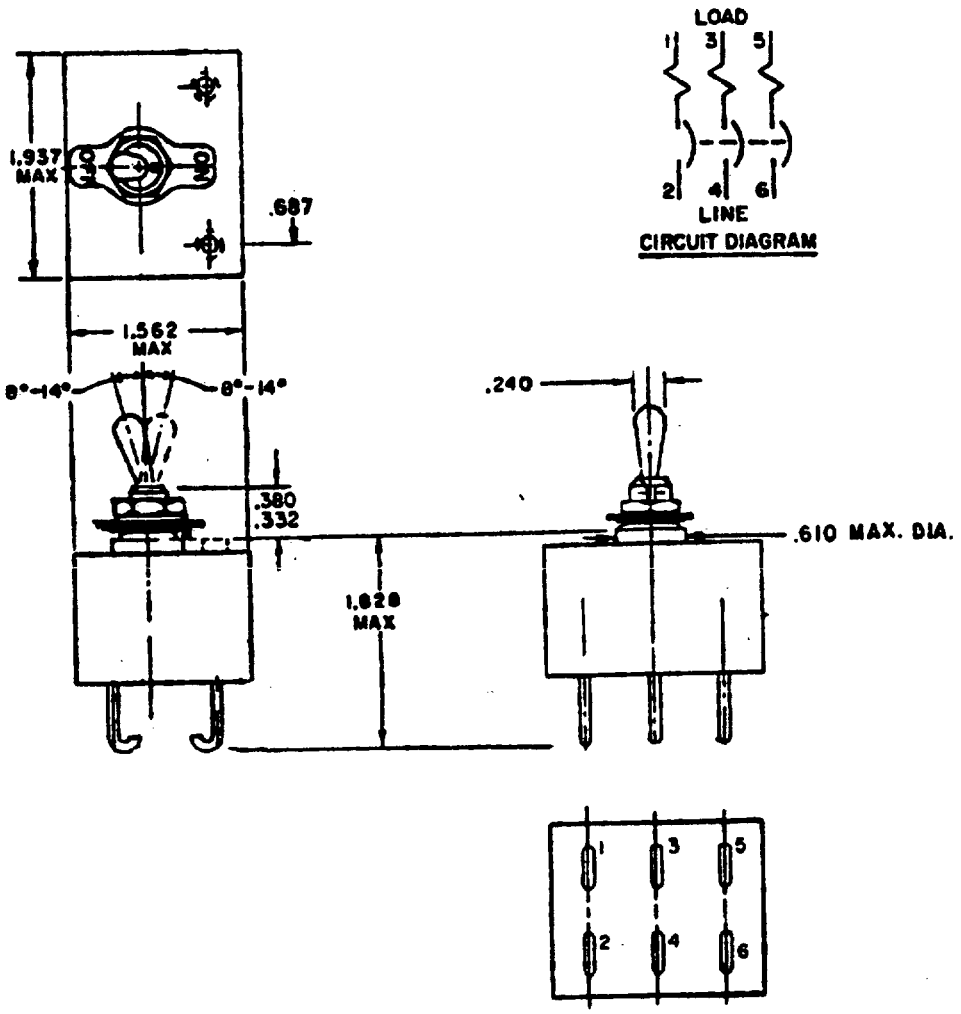

PART NUMBER: M39019/05-*

* SEE TABLE II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, THREE POLE

MIL-C-39019/5

TABLE II. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS.

DASH NUMBER		CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX		
STD. DELAY	HIGH INRUSH			DC	60 Hz	400 Hz
200	300	0.05	A	680.0	690.0	710.0
201	301	0.05	B	680.0	690.0	710.0
202	---	0.05	C	680.0	690.0	710.0
203	302	0.1	A	150.0	170.0	180.0
204	303	0.1	B	150.0	170.0	180.0
205	---	0.1	C	150.0	170.0	180.0
206	304	0.25	A	20.0	26.0	27.0
207	305	0.25	B	20.0	26.0	27.0
208	---	0.25	C	20.0	26.0	27.0
209	306	0.55	A	5.4	6.0	6.6
210	307	0.55	B	5.4	6.0	6.6
211	---	0.55	C	5.4	6.0	6.6
212	308	0.75	A	2.5	2.7	2.8
213	309	0.75	B	2.5	2.7	2.8
214	---	0.75	C	2.5	2.7	2.8
215	310	1.0	A	1.35	1.5	1.61
216	311	1.0	B	1.35	1.5	1.61
217	---	1.0	C	1.35	1.5	1.61
218	312	2.0	A	0.40	0.40	0.50
219	313	2.0	B	0.40	0.40	0.50
220	---	2.0	C	0.40	0.40	0.50
221	314	2.5	A	0.25	0.25	0.27
222	315	2.5	B	0.25	0.25	0.27
223	---	2.5	C	0.25	0.25	0.27
224	316	3.0	A	0.15	0.15	0.17
225	317	3.0	B	0.15	0.15	0.17
226	---	3.0	C	0.15	0.15	0.17
227	318	4.0	A	0.10	0.10	0.12
228	319	4.0	B	0.10	0.10	0.12
229	---	4.0	C	0.10	0.10	0.12
230	320	5.0	A	0.061	0.063	0.072
231	321	5.0	B	0.061	0.063	0.072
232	---	5.0	C	0.061	0.063	0.072
233	322	6.0	A	0.042	0.043	0.050
234	323	6.0	B	0.042	0.043	0.050
235	---	6.0	C	0.042	0.043	0.050

* SEE TABLE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, THREE POLE

MIL-C-39019/5

TABLE II. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS. (CONT.)


DASH NUMBER		CURRENT	TIME	RESISTANCE OR IMPEDANCE OHMS - MAX		
STD. DELAY	HIGH INRUSH	RATING AMPS	DELAY	DC	60 Hz	400 Hz
236	324	7.0	A	0.036	0.036	0.040
237	325	7.0	B	0.036	0.036	0.040
238	---	7.0	C	0.036	0.036	0.040
239	326	7.5	A	0.031	0.031	0.038
240	327	7.5	B	0.031	0.031	0.038
241	---	7.5	C	0.031	0.031	0.038
242	328	8.0	A	0.027	0.028	0.035
243	329	8.0	B	0.027	0.028	0.035
244	---	8.0	C	0.027	0.028	0.035
245	330	9.0	A	0.022	0.022	0.028
246	331	9.0	B	0.022	0.022	0.028
247	---	9.0	C	0.022	0.022	0.028
248	332	10.0	A	0.018	0.021	0.024
249	333	10.0	B	0.018	0.021	0.024
250	---	10.0	C	0.018	0.021	0.024
251	334	12.5	A	0.012	0.013	0.015
252	335	12.5	B	0.012	0.013	0.015
253	---	12.5	C	0.012	0.013	0.015
254	336	15.0	A	0.009	0.009	0.010
255	337	15.0	B	0.009	0.009	0.010
256	---	15.0	C	0.009	0.009	0.010
257	338	20.0	A	0.006	0.006	0.007
258	339	20.0	B	0.006	0.006	0.007
259	---	20.0	C	0.006	0.006	0.007
260	340	1.25	A	0.9	1.0	1.1
261	341	1.25	B	0.9	1.0	1.1
262	---	1.25	C	0.9	1.0	1.1
263	342	1.50	A	0.65	0.7	0.75
264	343	1.50	B	0.65	0.7	0.75
265	---	1.5	C	0.65	0.70	0.75

* SEE TABLE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, THREE POLE, AUXILIARY CONTACTS

MIL-C-39019/6

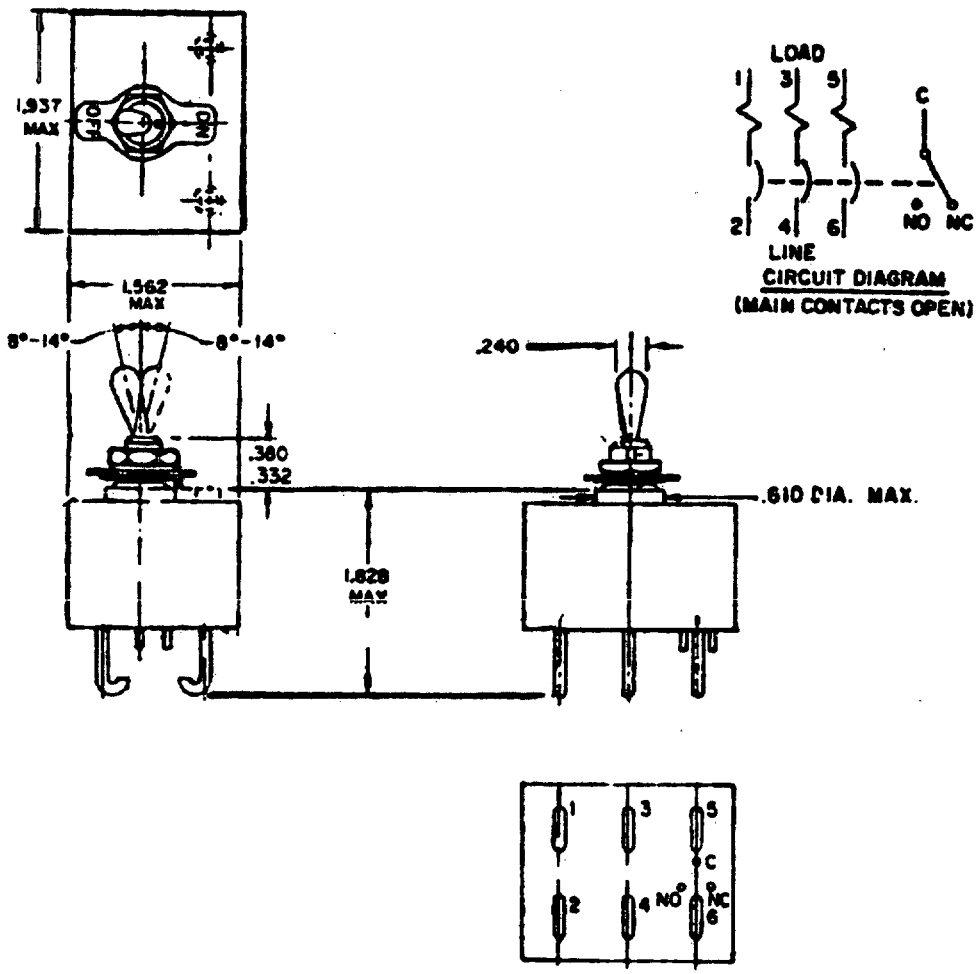

PART NUMBER: M39019/06-*

* SEE TABLE II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, THREE POLE, AUXILIARY CONTACTS

MIL-C-39019/6

TABLE II. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS.

DASH NUMBER		CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX		
STD. DELAY	HIGH INRUSH			DC	60 Hz	400 Hz
200	300	0.05	A	680.0	690.0	710.0
201	301	0.05	B	680.0	690.0	710.0
202	---	0.05	C	680.0	690.0	710.0
203	302	0.1	A	150.0	170.0	180.0
204	303	0.1	B	150.0	170.0	180.0
205	---	0.1	C	150.0	170.0	180.0
206	304	0.25	A	20.0	26.0	27.0
207	305	0.25	B	20.0	26.0	27.0
208	---	0.25	C	20.0	26.0	27.0
209	306	0.5	A	5.4	6.0	6.6
210	307	0.5	B	5.4	6.0	6.6
211	---	0.5	C	5.4	6.0	6.6
212	308	0.75	A	2.5	2.7	2.8
213	309	0.75	B	2.5	2.7	2.8
214	---	0.75	C	2.5	2.7	2.8
215	310	1.0	A	1.35	1.5	1.61
216	311	1.0	B	1.35	1.5	1.61
217	---	1.0	C	1.35	1.5	1.61
218	312	2.0	A	0.40	0.40	0.50
219	313	2.0	B	0.40	0.40	0.50
220	---	2.0	C	0.40	0.40	0.50
221	314	2.5	A	0.25	0.25	0.27
222	315	2.5	B	0.25	0.25	0.27
223	---	2.5	C	0.25	0.25	0.27
224	316	3.0	A	0.15	0.15	0.17
225	317	3.0	B	0.15	0.15	0.17
226	---	3.0	C	0.15	0.15	0.17
227	318	4.0	A	0.10	0.10	0.12
228	319	4.0	B	0.10	0.10	0.12
229	---	4.0	C	0.10	0.10	0.12
230	320	5.0	A	0.061	0.063	0.072
231	321	5.0	B	0.061	0.063	0.072
232	---	5.0	C	0.061	0.063	0.072
233	322	6.0	A	0.042	0.043	0.050
234	323	6.0	B	0.042	0.043	0.050
235	---	6.0	C	0.042	0.043	0.050

* SEE TABLE I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, LOW POWER, SEALED, TRIP-FREE, THREE POLE, AUXILIARY CONTACTS

MIL-C-39019/6

TABLE II. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS. (CONT.)

DASH NUMBER		CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX		
STD. DELAY	HIGH INRUSH			DC	60 Hz	400 Hz
236	324	7.0	A	0.036	0.036	0.040
237	325	7.0	B	0.036	0.036	0.040
238	---	7.0	C	0.036	0.036	0.040
239	326	7.5	A	0.031	0.031	0.038
240	327	7.5	B	0.031	0.031	0.038
241	---	7.5	C	0.031	0.031	0.038
242	328	8.0	A	0.027	0.028	0.035
243	329	8.0	B	0.027	0.028	0.035
244	---	8.0	C	0.027	0.028	0.035
245	330	9.0	A	0.022	0.022	0.028
246	331	9.0	B	0.022	0.022	0.028
247	---	9.0	C	0.022	0.022	0.028
248	332	10.0	A	0.018	0.021	0.024
249	333	10.0	B	0.018	0.021	0.024
250	---	10.0	C	0.018	0.021	0.024
251	334	12.5	A	0.012	0.013	0.015
252	335	12.5	B	0.012	0.013	0.015
253	---	12.5	C	0.012	0.013	0.015
254	336	15.0	A	0.009	0.009	0.010
255	337	15.0	B	0.009	0.009	0.010
256	---	15.0	C	0.009	0.009	0.010
257	338	20.0	A	0.006	0.006	0.007
258	339	20.0	B	0.006	0.006	0.007
259	---	20.0	C	0.006	0.006	0.007
260	340	1.25	A	.9	1.0	1.1
261	341	1.25	B	.9	1.0	1.1
262	---	1.25	C	.9	1.0	1.1
263	342	1.5	A	.65	.70	.75
264	343	1.5	B	.65	.70	.75
265	---	1.5	C	.65	.70	.75


* SEE TABLE I.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED
GENERAL SPECIFICATION FOR

MIL-C-55629

SCOPE: THIS SECTION COVERS SINGLE AND MULTIPOLE, TRIPFREE, UNSEALED, MAGNETIC CIRCUIT BREAKERS WITH CURRENT RATINGS OF 0.2 TO 100 AMPERES INCLUSIVE, UP TO AND INCLUDING 240 VOLTS, 400 HERTZ, 400 VOLTS, 60 HERTZ ALTERNATING CURRENT (AC) AND 125 DIRECT CURRENT (DC). PANEL SEAL MOUNTS ARE AVAILABLE IN 0.2 THROUGH

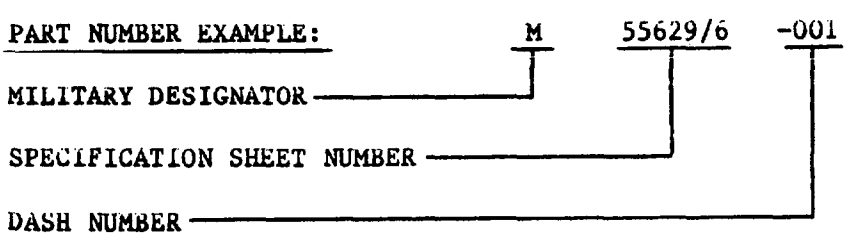

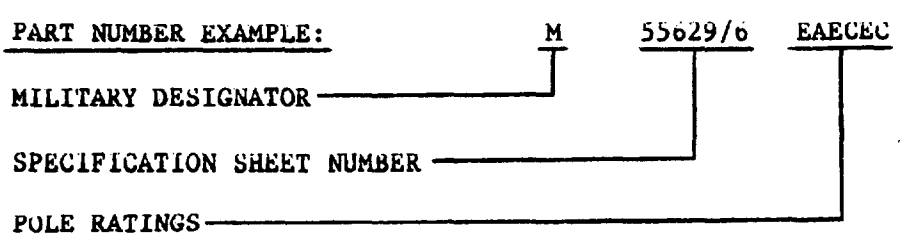

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED OR PANEL SEAL, TRIP FREE

MIL-C-55629

TABLE I. TRIPPING TIME STANDARD DELAY FOR MIL-C-55629/1, /3, /4, /5 AND /6

TRIPPING TIME DELAY 25°C +2°C (TRIPPING TIME IN SECONDS)								
TIME DELAY % RATED CURRENT	50 V DC				240 V 60 Hz			
	A		B		C		D	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
100	NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR	
125	70	7	7	.5	120	10	17	.7
150	---	---	---	---	---	---	---	
200	8	0.6	1.4	.13	20	2.2	1.6	.13
400	1.5	.15	.25	.031	2.3	0.3	.25	.03
600	0.5	INST	.12	INST	.75	INST	.13	INS
800	.051	INST	.051	INST	.16	INST	.07	INST
1000	.026	INST	.026	INST	.04	INST	.04	INST

TABLE I. TRIPPING TIME STANDARD DELAY FOR MIL-C-55629/1, /3, /4, /5 AND /6 (CONT.)

TRIPPING TIME DELAY 25°C +2°C (TRIPPING TIME IN SECONDS)						
TIME DELAY % RATED CURRENT	240 V 400 Hz					
	E		F		G	
	MAX	MIN	MAX	MIN	MAX	MIN
100	NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR	
125	---	---	---	---	---	---
150	60	5	5.8	.50	400	40
200	20	2.1	1.9	.15	150	9.5
400	3.2	.4	.19	.02	19	1.9
600	.19	INST	.08	INST	1.6	INST
800	.06	INST	.05	INST	.4	INST
1000	.045	INST	.036	INST	.043	INST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED OR PANEL SEAL, TRIP FREE

MIL-C-55629

TABLE II. TRIPPING TIME STANDARD DELAY FOR MIL-C-55629/2

TRIPPING TIME DELAY 25°C +2°C (TRIPPING TIME IN SECONDS)								
TIME DELAY % RATED CURRENT	50 V DC				240 V 60 Hz			
	A		B		C		D	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
100	NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR	
125	70	7	7	.5	120	10	17	.7
150	---	---	---	---	---	---	---	---
200	8	.6	1.4	.13	20	2.2	1.6	.13
400	1.5	.15	.25	.031	2.3	.3	.25	.03
600	.5	INST	.12	INST	.75	INST	.13	INST
800	.051	INST	.051	INST	.16	INST	.07	INST
1000	.026	INST	.026	INST	.04	INST	.04	INST

TABLE II. TRIPPING TIME STANDARD DELAY FOR MIL-C-55629/2 (CONT.)

TRIPPING TIME DELAY 25°C +2°C (TRIPPING TIME IN SECONDS)						
TIME DELAY % RATED CURRENT	240 V 400 Hz					
	E		F		G	
	MAX	MIN	MAX	MIN	MAX	MIN
100	NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR	
125	---	---	---	---	---	---
150	60	5	5.8	.50	400	4
200	20	2.1	1.9	.15	150	9.5
400	3.4	.4	.19	.02	19	1.9
600	.19	INST	.08	INST	1.6	INST
800	.06	INST	.05	INST	0.4	INST
1000	.045	INST	.036	INST	.043	INST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE III. TRIPPING-TIME AT HIGH-LOW TEMPERATURE, HIGH-INRUSH AND STANDARD DELAY FOR MIL-C-55629/1 AND /2

TRIPPING-TIME DELAY AT 25° +2°C (TRIPPING TIME IN SECONDS)								
TIME DELAY % RATED CURRENT	50 V DC				240 V 60 Hz			
	K		L		M		N	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
100	NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR	
125	100	10	12	.5	120	10	18	1
150	---	---	---	---	---	---	---	---
200	20	2.5	1.5	.13	20	3	1.6	.16
400	2	.36	.29	.031	2.3	.3	.3	.04
600	1	.13	.15	INST	1	.13	.17	INST
800	.6	INST	.06	INST	.6	INST	.09	INST
1000	.29	INST	.05	INST	.29	INST	.043	INST
1800	NO TRIP		NO TRIP		NO TRIP		NO TRIP	

TABLE III. TRIPPING-TIME AT HIGH-LOW TEMPERATURE, HIGH-INRUSH AND STANDARD DELAY (CONT.) FOR MIL-C-55629/1 AND /2

TRIPPING-TIME DELAY AT 25° +2°C (TRIPPING TIME IN SECONDS)								
TIME DELAY % RATED CURRENT	240 V 60 Hz		240 V 400 Hz					
	T		P		R		S	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
100	NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR	
125	700	50	---	---	---	---	---	---
150	350	32	60	6	5.8	0.6	500	60
200	70	10	20	2.1	2	.2	160	20
400	15	1.5	4	.4	.35	.035	19	2
600	7	.7	.6	INST	.125	INST	3.5	.250
800	3	.1	.06	INST	.05	INST	.5	.025
1000	2	.01	.045	INST	.036	INST	.043	INST
1800	NO TRIP		NO TRIP		NO TRIP		NO TRIP	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE IV. TRIPPING-TIME AT HIGH-LOW TEMPERATURE, HIGH-INRUSH AND STANDARD DELAY FOR MIL-C-55629/3, /4, /5 AND /6

TRIPPING TIME DELAY 25°C +2°C (TRIPPING TIME IN SECONDS)								
TIME DELAY	50 V DC				240 V 60 Hz			
% RATED CURRENT	K		L		M		N	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
100	NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR	
125	100	10	12	.5	120	10	18	1
150	---	---	---	---	---	---	---	---
200	20	2.5	1.5	.13	20	3	1.6	.16
400	2	.36	.29	.031	2.3	.3	.3	.04
600	1	.13	.15	INST	1	.13	.17	INST
800	.6	INST	.06	INST	.6	INST	.09	INST
1000	.29	INST	.05	INST	.29	INST	.043	INST
1800	NO TRIP		NO TRIP		NO TRIP		NO TRIP	

TABLE IV. TRIPPING-TIME AT HIGH-LOW TEMPERATURE, HIGH-INRUSH AND STANDARD DELAY (CONT.) MIL-C-55629/3, /4, /5 AND /6

TRIPPING TIME DELAY 25°C +2°C (TRIPPING TIME IN SECONDS)								
TIME DELAY	240 V 60 HZ		240 V 400 Hz					
% RATED CURRENT	T		P		R		S	
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
100	NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR	
125	100	150	---	---	---	---	---	---
150	350	32	60	6	5.8	.6	500	6
200	70	10	20	2.1	2	.2	160	20
400	15	1.5	4	.4	.35	.035	19	2
600	7	.7	.6	INST	.125	INST	3.5	INST
800	3	.1	.06	INST	.05	INST	.5	.025
1000	2	.01	.045	INST	.036	INST	.043	INST
1800	NO TRIP		NO TRIP		NO TRIP		NO TRIP	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

TABLE V. TRIPPING-TIME STANDARD DELAY FOR MIL-C-55629/1, /2, /3, /4, /5 AND /6

TRIPPING TIME DELAY 25°C +2°C (TRIPPING TIME IN SECONDS)								
TIME DELAY % RATED CURRENT	50 V DC				240 V 60 Hz			
	A & K		B & L		C & M		D & N	
	-40° MAX	+85° MIN	-40° MAX	+85° MIN	-40° MAX	+85° MIN	-40° MAX	+85° MIN
100	NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR		NO TRIP 1 HOUR	
125	500	5	100	.1	500	1	100	.1
150	---	---	---	---	---	---	---	---
200	100	.1	10	.05	100	.05	10	.05
400	20	INST	3	INST	20	INST	3	INST
600	5	INST	1	INST	5	INST	1	INST
800	2	INST	.5	INST	.5	INST	.5	INST
1000	---	---	---	---	---	---	---	---

TABLE V. TRIPPING-TIME STANDARD DELAY FOR MIL-C-55629/1, /2 /3, /4, /5 AND /6 (CONT.)

TRIPPING TIME DELAY 25°C +2°C (TRIPPING TIME IN SECONDS)								
TIME DELAY % RATED CURRENT	240 V 60 Hz		240 V 400 Hz					
	T		E & P		F & R		G & S	
	-40° MAX	+85° MIN	-40° MAX	+85° MIN	-40° MAX	+85° MIN	-40° MAX	+85° MIN
100			NO TRIP 1 HOUR		NO TRIP 1 HOUR			
125	8000	25	---	---	---	---	---	---
150	900	12	500	.5	100	.1	1500	5
200	500	5	100	.1	10	.5	500	.5
400	100	.8	20	INST	3	INST	100	INST
600	40	.1	6	INST	1	INST	5	INST
800	10	.05	.5	INST	.5	INST	.5	INST
1000	3	.01	---	---	---	---	---	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.


TABLE VI. TRIPPING TIME DELAY -40°C +2°, +25°C +2°, AND +85°C +2°C FOR MIL-C-55629/1, /2, /3, /4, /5 AND /6

(TRIPPING TIME IN SECONDS)						
TIME DELAY % RATED	50 V DC		240 V 60 Hz		240 V 400Hz	
	H (NONDELAY)		I (NONDELAY)		J (NONDELAY)	
	MAX	MIN	MAX	MIN	MAX	MIN
	NO TRIP		NO TRIP		NO TRIP	
100	1 HOUR		1 HOUR		1 HOUR	
125	0.15	INST	0.15	INST	----	---
150	----	----	----	----	0.15	INST
200	0.07	INST	0.05	INST	0.070	INST
400	0.032	INST	0.02	INST	0.032	INST
600	0.02	INST	0.017	INST	0.020	INST
800	0.02	INST	0.017	INST	0.020	INST

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP-FREE, SINGLE POLE (0.2 TO 100 AMPERES)

MIL-C-55629/1

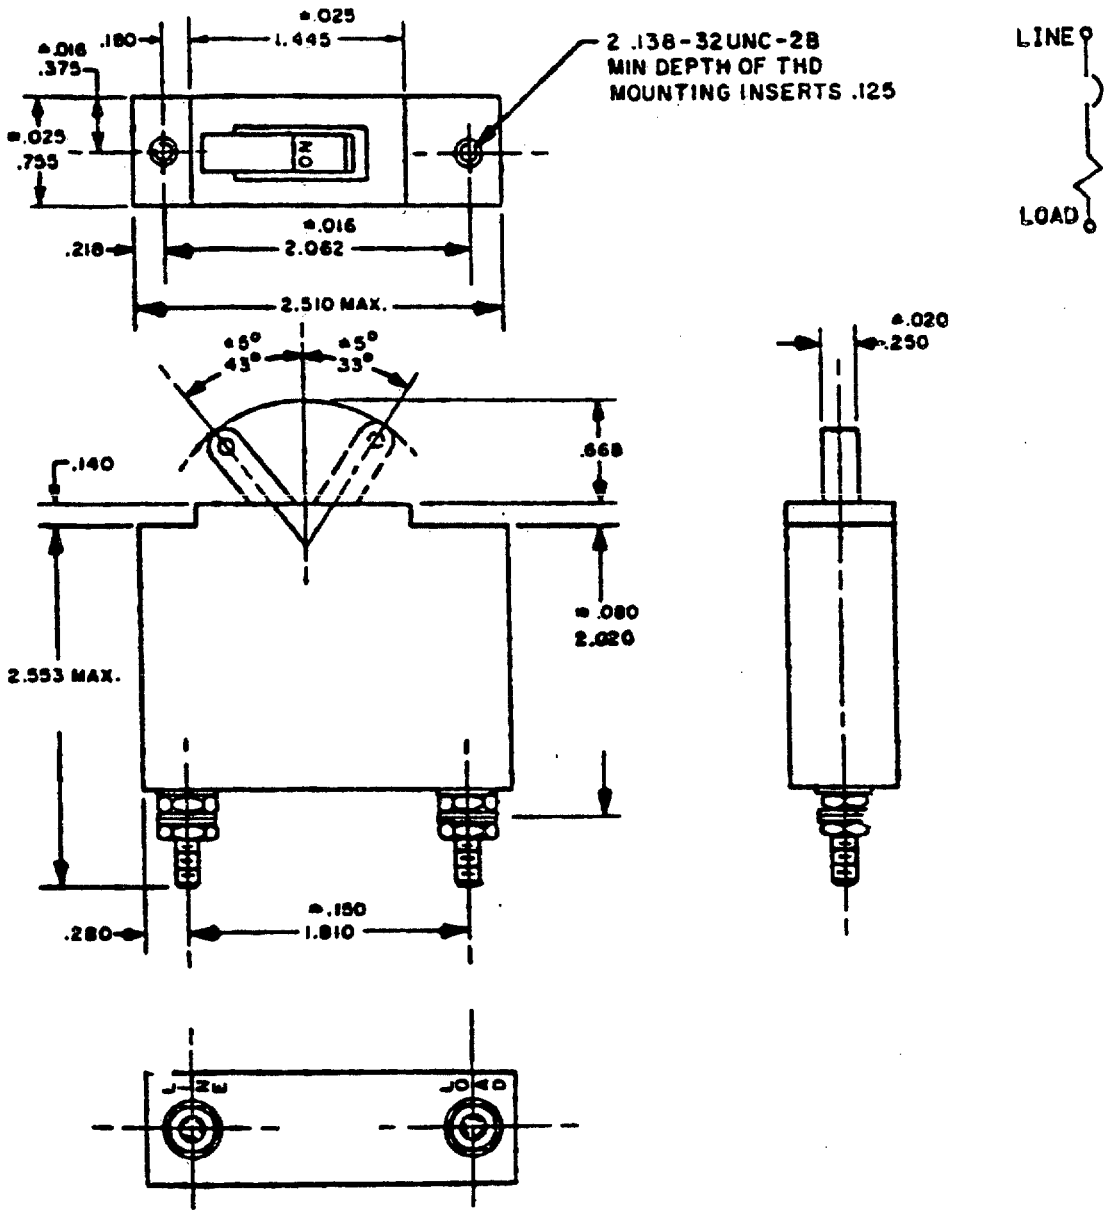

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE (0.2 TO 100 AMPERES)

MIL-C-55629/1

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS.

DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX
001	0.2	A	32	435	0.25	T	23
002	0.2	B	32	008	0.5	A	6
003	0.2	C	34	009	0.5	B	6
004	0.2	D	34	010	0.5	C	6
005	0.2	E	72	011	0.5	D	12
006	0.2	F	72	012	0.5	E	12
007	0.2	G	72	013	0.5	F	12
136	0.2	H	32	014	0.5	G	6
137	0.2	I	34	149	0.5	H	6
138	0.2	J	72	150	0.5	I	12
253	0.2	K	32	151	0.5	J	6
254	0.2	L	32	267	0.5	K	6
255	0.2	M	34	268	0.5	L	6
256	0.2	N	34	269	0.5	M	6
257	0.2	P	72	270	0.5	N	6
258	0.2	R	72	271	0.5	P	12
259	0.2	S	72	272	0.5	R	12
434	0.2	T	34	273	0.5	S	12
139	0.25	A	21	436	0.5	T	6
140	0.25	B	21	152	0.75	A	3
142	0.25	C	23	153	0.75	B	3
143	0.25	D	23	155	0.75	C	3
145	0.25	E	43	156	0.75	D	3
146	0.25	F	43	158	0.75	E	7
147	0.25	G	43	159	0.75	F	7
141	0.25	H	21	160	0.75	G	7
144	0.25	I	23	154	0.75	H	3
148	0.25	J	43	157	0.75	I	3
260	0.25	K	21	161	0.75	J	7
261	0.25	L	21	274	0.75	K	3
262	0.25	M	23	275	0.75	L	3
263	0.25	N	23	276	0.75	M	3
264	0.25	P	43	277	0.75	N	3
265	0.25	R	43	278	0.75	P	7
266	0.25	S	43	279	0.75	R	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE (0.2 TO 100 AMPERES)

MIL-C-55629/1

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX
280	0.75	S	7	293	1.5	R	2.0
437	0.75	T	3	294	1.5	S	2.0
015	1.0	A	2	439	1.5	T	0.9
016	1.0	B	2	022	2.0	A	0.5
017	1.0	C	2	023	2.0	B	0.5
018	1.0	D	2	024	2.0	C	0.5
019	1.0	E	4	025	2.0	D	0.5
020	1.0	F	4	026	2.0	E	0.8
021	1.0	G	4	027	2.0	F	0.8
162	1.0	H	2	028	2.0	G	0.8
163	1.0	I	4	175	2.0	H	0.5
164	1.0	J	2	176	2.0	I	0.5
281	1.0	K	2	177	2.0	J	0.8
282	1.0	L	2	295	2.0	K	0.5
283	1.0	M	2	296	2.0	L	0.5
284	1.0	N	2	297	2.0	M	0.5
285	1.0	P	4	298	2.0	N	0.5
286	1.0	R	4	299	2.0	P	0.8
287	1.0	S	4	300	2.0	R	0.8
438	1.0	T	2	301	2.0	S	0.8
165	1.5	A	0.9	440	2.0	T	0.5
166	1.5	B	0.9	178	2.5	A	0.35
168	1.5	C	0.9	179	2.5	B	0.35
169	1.5	D	0.9	181	2.5	C	0.35
171	1.5	E	2	182	2.5	D	0.35
172	1.5	F	2	184	2.5	E	0.6
173	1.5	G	2	185	2.5	F	0.6
167	1.5	H	0.9	186	2.5	G	0.6
170	1.5	I	0.9	180	2.5	H	0.35
174	1.5	J	2	183	2.5	I	0.35
288	1.5	K	0.9	187	2.5	J	0.6
289	1.5	L	0.9	302	2.5	K	0.35
290	1.5	M	0.9	303	2.5	L	0.35
291	1.5	N	0.9	304	2.5	M	0.35
292	1.5	P	2	305	2.5	N	0.35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE (0.2 TO 100 AMPERES)

MIL-C-55629/1

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX
306	2.5	P	0.6	319	3.5	N	0.15
307	2.5	R	0.6	320	3.5	P	0.35
308	2.5	S	0.6	321	3.5	R	0.35
441	2.5	T	0.3	322	3.5	S	0.35
029	3.0	A	0.3	443	3.5	T	0.15
030	3.0	B	0.3	036	4.0	A	0.1
031	3.0	C	0.3	037	4.0	B	0.1
032	3.0	D	0.3	038	4.0	C	0.1
033	3.0	E	0.5	039	4.0	D	0.1
034	3.0	F	0.5	040	4.0	E	0.3
035	3.0	G	0.5	041	4.0	F	0.3
188	3.0	H	0.3	042	4.0	G	0.3
189	3.0	I	0.3	201	4.0	H	0.1
190	3.0	J	0.5	202	4.0	I	0.1
309	3.0	K	0.3	203	4.0	J	0.3
310	3.0	L	0.3	323	4.0	K	0.1
311	3.0	M	0.3	324	4.0	L	0.1
312	3.0	N	0.3	325	4.0	M	0.1
313	3.0	P	0.5	326	4.0	N	0.1
314	3.0	R	0.5	327	4.0	P	0.3
315	3.0	S	0.5	328	4.0	R	0.3
442	3.0	T	0.3	329	4.0	S	0.3
191	3.5	A	0.15	444	4.0	T	0.1
192	3.5	B	0.15	043	5.0	A	0.08
194	3.5	C	0.15	044	5.0	B	0.08
195	3.5	D	0.15	045	5.0	C	0.08
197	3.5	E	0.35	046	5.0	D	0.08
198	3.5	F	0.35	047	5.0	E	0.15
199	3.5	G	0.35	048	5.0	F	0.15
193	3.5	H	0.15	049	5.0	G	0.15
196	3.5	I	0.15	204	5.0	H	0.08
200	3.5	J	0.35	205	5.0	I	0.08
316	3.5	K	0.15	206	5.0	J	0.15
317	3.5	L	0.15	330	5.0	K	0.08
318	3.5	M	0.15	331	5.0	L	0.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE (0.2 TO 100 AMPERES)

MIL-C-55629/1

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX
332	5.0	M	0.08	345	7.0	L	0.04
333	5.0	N	0.08	346	7.0	M	0.04
334	5.0	P	0.15	347	7.0	N	0.04
335	5.0	R	0.15	348	7.0	P	0.07
336	5.0	S	0.15	349	7.0	R	0.07
445	5.0	T	0.08	350	7.0	S	0.07
050	6.0	A	0.06	447	7.0	T	0.04
051	6.0	B	0.06	064	8.0	A	0.03
052	6.0	C	0.06	065	8.0	B	0.03
053	6.0	D	0.06	066	8.0	C	0.03
054	6.0	E	0.08	067	8.0	D	0.03
055	6.0	F	0.08	068	8.0	E	0.06
056	6.0	G	0.08	069	8.0	F	0.06
207	6.0	H	0.06	070	8.0	G	0.06
208	6.0	I	0.06	213	8.0	H	0.03
209	6.0	J	0.08	214	8.0	I	0.03
337	6.0	K	0.06	215	8.0	J	0.06
338	6.0	L	0.06	351	8.0	K	0.03
339	6.0	M	0.06	352	8.0	L	0.03
340	6.0	N	0.06	353	8.0	M	0.03
341	6.0	P	0.08	354	8.0	N	0.03
342	6.0	R	0.08	355	8.0	P	0.06
343	6.0	S	0.08	356	8.0	R	0.06
446	6.0	T	0.06	447	8.0	S	0.06
057	7.0	A	0.04	448	8.0	T	0.03
058	7.0	B	0.04	071	9.0	A	0.018
059	7.0	C	0.04	072	9.0	B	0.018
060	7.0	D	0.04	073	9.0	C	0.02
061	7.0	E	0.07	074	9.0	D	0.02
062	7.0	F	0.07	075	9.0	E	0.05
063	7.0	G	0.07	076	9.0	F	0.05
210	7.0	H	0.04	077	9.0	G	0.05
211	7.0	I	0.04	216	9.0	H	0.02
212	7.0	J	0.07	217	9.0	I	0.02
344	7.0	K	0.04	218	9.0	J	0.05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE (0.2 TO 100 AMPERES)

MIL-C-55629/1

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX
358	9.0	K	0.018	224	12.5	J	0.03
359	9.0	L	0.018	372	12.5	K	0.013
360	9.0	M	0.02	373	12.5	L	0.013
361	9.0	N	0.02	374	12.5	M	0.015
362	9.0	P	0.05	375	12.5	N	0.015
363	9.0	R	0.05	376	12.5	P	0.03
364	9.0	S	0.05	377	12.5	R	0.03
449	9.0	T	0.02	378	12.5	S	0.03
078	10.0	A	0.02	451	12.5	T	0.015
079	10.0	B	0.02	092	15.0	A	0.01
080	10.0	C	0.02	093	15.0	B	0.01
081	10.0	D	0.02	094	15.0	C	0.011
082	10.0	E	0.04	095	15.0	D	0.011
083	10.0	F	0.04	096	15.0	E	0.02
084	10.0	G	0.04	097	15.0	F	0.02
219	10.0	H	0.02	098	15.0	G	0.02
220	10.0	I	0.02	225	15.0	H	0.013
221	10.0	J	0.04	226	15.0	I	0.015
365	10.0	K	0.02	227	15.0	J	0.03
366	10.0	L	0.02	379	15.0	K	0.01
367	10.0	M	0.02	380	15.0	L	0.01
368	10.0	N	0.02	381	15.0	M	0.011
369	10.0	P	0.04	382	15.0	N	0.011
370	10.0	R	0.04	383	15.0	P	0.02
371	10.0	S	0.04	384	15.0	R	0.02
450	10.0	T	0.02	385	15.0	S	0.02
085	12.5	A	0.013	452	15.0	T	0.011
086	12.5	B	0.013	099	20.0	A	0.007
087	12.5	C	0.015	100	20.0	B	0.007
088	12.5	D	0.015	101	20.0	C	0.007
089	12.5	E	0.03	102	20.0	D	0.007
090	12.5	F	0.03	103	20.0	E	0.01
091	12.5	G	0.03	104	20.0	F	0.01
222	12.5	H	0.013	105	20.0	G	0.01
223	12.5	I	0.013	228	20.0	H	0.007

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE (0.2 TO 100 AMPERES)

MIL-C-55629/1

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX
229	20.0	I	0.007	234	30.0	H	0.005
230	20.0	J	0.01	235	30.0	I	0.005
386	20.0	K	0.007	236	30.0	J	0.006
387	20.0	L	0.007	400	30.0	K	0.005
388	20.0	M	0.007	401	30.0	L	0.005
389	20.0	N	0.007	402	30.0	M	0.005
390	20.0	P	0.01	403	30.0	N	0.005
391	20.0	R	0.01	404	30.0	P	0.006
392	20.0	S	0.01	405	30.0	R	0.006
453	20.0	T	0.007	406	30.0	S	0.006
106	25.0	A	0.006	455	30.0	T	0.005
107	25.0	B	0.006	120	35.0	A	0.004
108	25.0	C	0.006	121	35.0	B	0.004
109	25.0	D	0.006	122	35.0	C	0.004
110	25.0	E	0.007	123	35.0	D	0.004
111	25.0	F	0.007	124	35.0	E	0.005
112	25.0	G	0.007	125	35.0	F	0.005
231	25.0	H	0.006	126	35.0	G	0.005
232	25.0	I	0.006	237	35.0	H	0.004
233	25.0	J	0.007	238	35.0	I	0.004
393	25.0	K	0.006	239	35.0	J	0.005
394	25.0	L	0.006	407	35.0	K	0.004
395	25.0	M	0.006	408	35.0	L	0.004
396	25.0	N	0.006	409	35.0	M	0.004
397	25.0	P	0.007	410	35.0	N	0.004
398	25.0	R	0.007	411	35.0	P	0.005
399	25.0	S	0.007	412	35.0	R	0.005
454	25.0	T	0.006	413	35.0	S	0.005
113	30.0	A	0.005	456	35.0	T	0.004
114	30.0	B	0.005	240	40.0	A	0.0038
115	30.0	C	0.005	241	40.0	B	0.0038
116	30.0	D	0.005	243	40.0	C	0.0038
117	30.0	E	0.006	244	40.0	D	0.0038
118	30.0	F	0.006	246	40.0	E	0.0052
119	30.0	G	0.006	247	40.0	F	0.0052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE (0.2 TO 100 AMPERES)

MIL-C-55629/1


TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE OR IMPEDANCE OHMS - MAX
248	40.0	G	0.0052	250	50.0	H	0.003
242	40.0	H	0.0038	251	50.0	I	0.003
245	40.0	I	0.0038	252	50.0	J	0.004
249	40.0	J	0.0052	421	50.0	K	0.003
414	40.0	K	0.0038	422	50.0	L	0.003
415	40.0	L	0.0038	423	50.0	M	0.003
416	40.0	M	0.0038	424	50.0	N	0.003
417	40.0	N	0.0038	425	50.0	P	0.004
418	40.0	P	0.0052	466	50.0	R	0.004
419	40.0	R	0.0052	427	50.0	S	0.004
420	40.0	S	0.0052	458	50.0	T	0.003
457	40.0	T	0.0038	428	65.0	A	0.003
127	50.0	A	0.003	429	65.0	B	0.003
128	50.0	B	0.003	430	75.0	A	0.0025
129	50.0	C	0.003	431	75.0	B	0.0025
130	50.0	D	0.003	432	85.0	C	0.0025
131	50.0	E	0.004	433	85.0	B	0.0025
132	50.0	F	0.004	134	100.0	A	0.002
133	50.0	G	0.004	135	100.0	B	0.002

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP-FREE, SINGLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/2

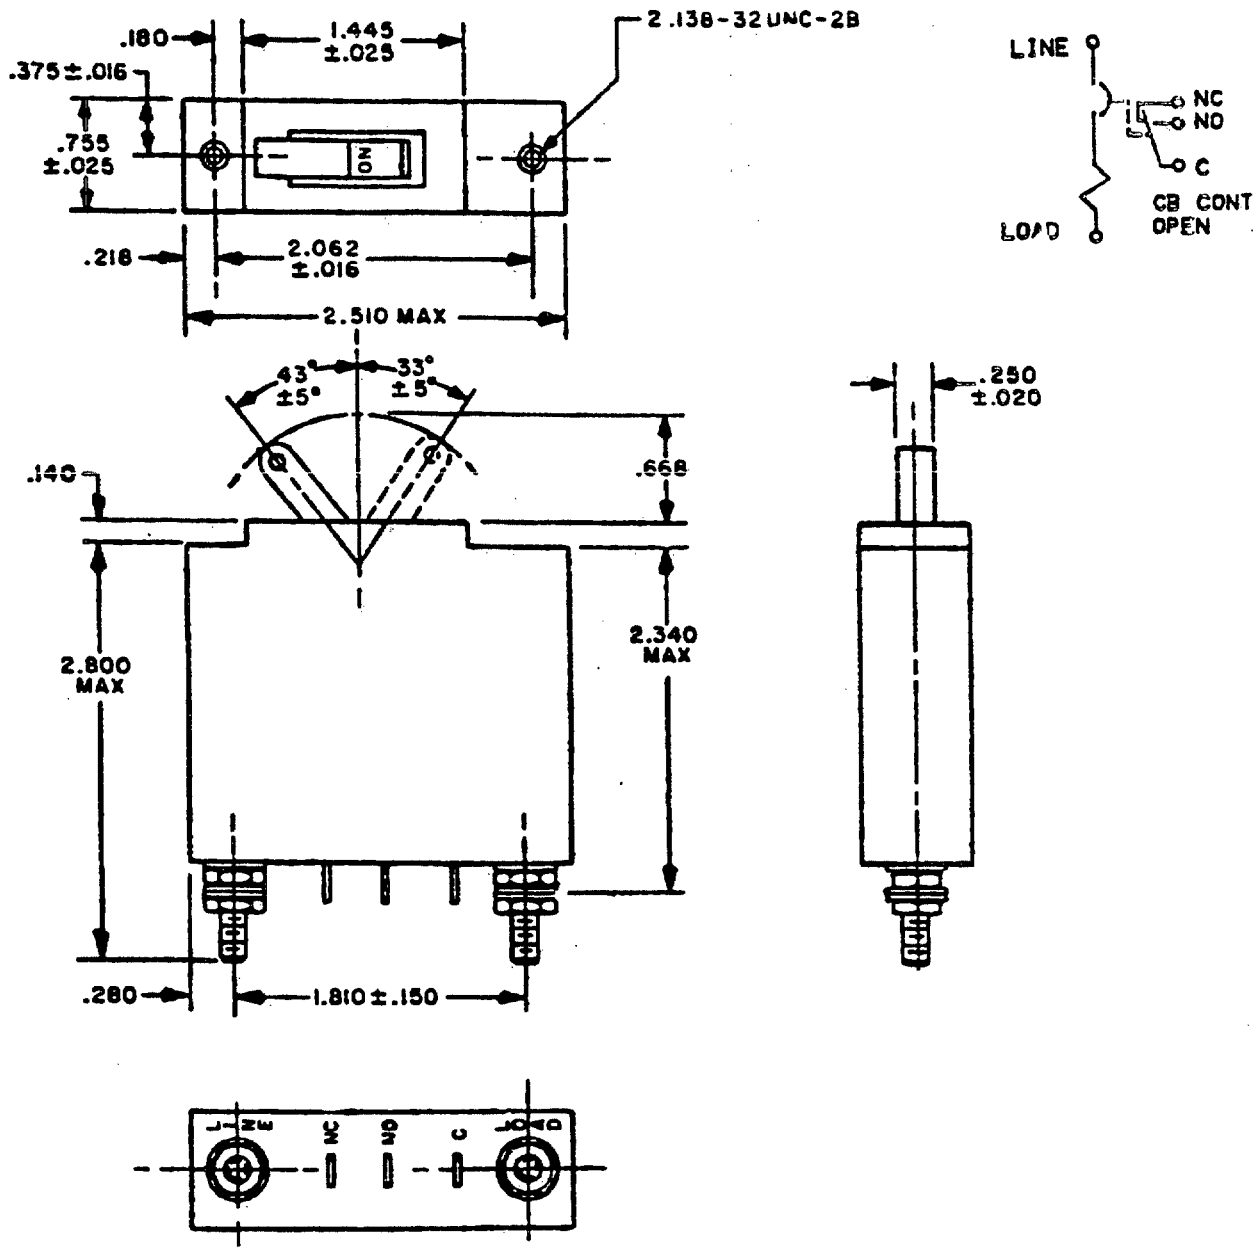

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/2

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS.

DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX
001	0.2	A	32	427	0.25	T	23
002	0.2	B	32	008	0.5	A	6
003	0.2	C	34	009	0.5	B	6
004	0.2	D	34	010	0.5	C	6
005	0.2	E	72	011	0.5	D	6
006	0.2	F	72	012	0.5	E	12
007	0.2	G	72	013	0.5	F	12
134	0.2	H	32	014	0.5	G	12
135	0.2	I	34	147	0.5	H	6
136	0.2	J	72	148	0.5	I	6
251	0.2	K	32	149	0.5	J	12
252	0.2	L	32	265	0.5	K	6
253	0.2	M	34	266	0.5	L	6
254	0.2	N	34	267	0.5	M	6
255	0.2	P	72	268	0.5	N	6
256	0.2	R	72	269	0.5	P	12
257	0.2	S	72	270	0.5	R	12
426	0.2	T	34	271	0.5	S	12
137	0.25	A	21	428	0.5	T	6
138	0.25	B	21	150	0.75	A	3
140	0.25	C	23	151	0.75	B	3
141	0.25	D	23	153	0.75	C	3
143	0.25	E	43	154	0.75	D	3
144	0.25	F	43	156	0.75	E	7
145	0.25	G	43	157	0.75	F	7
139	0.25	H	21	158	0.75	G	7
142	0.25	I	23	152	0.75	H	3
146	0.25	J	43	155	0.75	I	3
258	0.25	K	21	159	0.75	J	7
259	0.25	L	21	272	0.75	K	3
260	0.25	M	23	273	0.75	L	3
261	0.25	N	23	274	0.75	M	3
262	0.25	P	43	275	0.75	N	3
263	0.25	R	43	276	0.75	P	7
264	0.25	S	43	277	0.75	R	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/2

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX
278	0.75	S	7	291	1.5	R	2.0
429	0.75	T	3	292	1.5	S	2.0
015	1.0	A	2	431	1.5	T	0.9
016	1.0	B	2	022	2.0	A	0.5
017	1.0	C	2	023	2.0	B	0.5
018	1.0	D	2	024	2.0	C	0.5
019	1.0	E	4	025	2.0	D	0.5
020	1.0	F	4	026	2.0	E	0.8
021	1.0	G	4	027	2.0	F	0.8
160	1.0	H	2	028	2.0	G	0.8
161	1.0	I	2	173	2.0	H	0.5
162	1.0	J	4	174	2.0	I	0.5
279	1.0	K	2	175	2.0	J	0.8
280	1.0	L	2	293	2.0	K	0.5
281	1.0	M	2	294	2.0	L	0.5
282	1.0	N	2	295	2.0	M	0.5
283	1.0	P	4	296	2.0	N	0.5
284	1.0	R	4	297	2.0	P	0.8
285	1.0	S	4	298	2.0	R	0.8
430	1.0	T	2	299	2.0	S	0.8
163	1.5	A	0.9	432	2.0	T	0.5
164	1.5	B	0.9	176	2.5	A	0.35
166	1.5	C	0.9	177	2.5	B	0.35
167	1.5	D	0.9	179	2.5	C	0.35
169	1.5	E	2	180	2.5	D	0.35
170	1.5	F	2	182	2.5	E	0.6
171	1.5	G	2	183	2.5	F	0.6
165	1.5	H	0.9	184	2.5	G	0.6
168	1.5	I	0.9	178	2.5	H	0.35
172	1.5	J	2	181	2.5	I	0.35
286	1.5	K	0.9	185	2.5	J	0.6
287	1.5	L	0.9	300	2.5	K	0.35
288	1.5	M	0.9	301	2.5	L	0.35
289	1.5	N	0.9	302	2.5	M	0.35
290	1.5	P	2	303	2.5	N	0.35

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/2

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX
304	2.5	P	0.6	317	3.5	N	0.15
305	2.5	R	0.6	318	3.5	P	0.35
306	2.5	S	0.6	319	3.5	R	0.35
433	2.5	T	0.35	320	3.5	S	0.35
029	3.0	A	0.3	435	3.5	T	0.15
030	3.0	B	0.3	036	4.0	A	0.1
031	3.0	C	0.3	037	4.0	B	0.1
032	3.0	D	0.3	038	4.0	C	0.1
033	3.0	E	0.5	039	4.0	D	0.1
034	3.0	F	0.5	040	4.0	E	0.3
035	3.0	G	0.5	041	4.0	F	0.3
186	3.0	H	0.3	042	4.0	G	0.3
187	3.0	I	0.3	199	4.0	H	0.1
188	3.0	J	0.5	200	4.0	I	0.1
307	3.0	K	0.3	201	4.0	J	0.3
308	3.0	L	0.3	321	4.0	K	0.1
309	3.0	M	0.3	322	4.0	L	0.1
310	3.0	N	0.3	323	4.0	M	0.1
311	3.0	P	0.5	324	4.0	N	0.1
312	3.0	R	0.5	325	4.0	P	0.3
313	3.0	S	0.5	326	4.0	R	0.3
434	3.0	T	0.3	327	4.0	S	0.3
189	3.5	A	0.15	436	4.0	T	0.1
190	3.5	B	0.15	043	5.0	A	0.08
192	3.5	C	0.15	044	5.0	B	0.08
193	3.5	D	0.15	045	5.0	C	0.08
195	3.5	E	0.35	046	5.0	D	0.08
196	3.5	F	0.35	047	5.0	E	0.15
197	3.5	G	0.35	048	5.0	F	0.15
191	3.5	H	0.15	049	5.0	G	0.15
194	3.5	I	0.15	202	5.0	H	0.08
198	3.5	J	0.35	203	5.0	I	0.08
314	3.5	K	0.15	204	5.0	J	0.15
315	3.5	L	0.15	328	5.0	K	0.08
316	3.5	M	0.15	329	5.0	L	0.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/2

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX
330	5.0	M	0.08	343	7.0	L	0.04
331	5.0	N	0.08	344	7.0	M	0.04
332	5.0	P	0.15	345	7.0	N	0.04
333	5.0	R	0.15	346	7.0	P	0.07
334	5.0	S	0.15	347	7.0	R	0.07
437	5.0	T	0.08	348	7.0	S	0.07
050	6.0	A	0.06	439	7.0	T	0.04
051	6.0	B	0.06	064	8.0	A	0.03
052	6.0	C	0.06	065	8.0	B	0.03
053	6.0	D	0.06	066	8.0	C	0.03
054	6.0	E	0.08	067	8.0	D	0.03
055	6.0	F	0.08	068	8.0	E	0.06
056	6.0	G	0.08	069	8.0	F	0.06
205	6.0	H	0.06	070	8.0	G	0.06
206	6.0	I	0.06	211	8.0	H	0.03
207	6.0	J	0.08	212	8.0	I	0.03
335	6.0	K	0.06	213	8.0	J	0.06
336	6.0	L	0.06	349	8.0	K	0.03
337	6.0	M	0.06	350	8.0	L	0.03
338	6.0	N	0.06	351	8.0	M	0.03
339	6.0	P	0.08	352	8.0	N	0.03
340	6.0	R	0.08	353	8.0	P	0.06
341	6.0	S	0.08	354	8.0	R	0.06
438	6.0	T	0.06	355	8.0	S	0.06
057	7.0	A	0.04	440	8.0	T	0.03
058	7.0	B	0.04	071	9.0	A	0.018
059	7.0	C	0.04	072	9.0	B	0.018
060	7.0	D	0.04	073	9.0	C	0.02
061	7.0	E	0.07	074	9.0	D	0.02
062	7.0	F	0.07	075	9.0	E	0.05
063	7.0	G	0.07	076	9.0	F	0.05
208	7.0	H	0.04	077	9.0	G	0.05
209	7.0	I	0.04	214	9.0	H	0.02
210	7.0	J	0.07	215	9.0	I	0.02
342	7.0	K	0.04	216	9.0	J	0.05

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/2

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX
356	9.0	K	0.018	222	12.5	J	0.03
357	9.0	L	0.018	370	12.5	K	0.013
358	9.0	M	0.02	371	12.5	L	0.013
359	9.0	N	0.02	372	12.5	M	0.015
360	9.0	P	0.05	373	12.5	N	0.015
361	9.0	R	0.05	374	12.5	P	0.03
362	9.0	S	0.05	375	12.5	R	0.03
441	9.0	T	0.02	376	12.5	S	0.03
078	10.0	A	0.02	443	12.5	T	0.015
079	10.0	B	0.02	092	15.0	A	0.01
080	10.0	C	0.02	093	15.0	B	0.01
081	10.0	D	0.02	094	15.0	C	0.011
082	10.0	E	0.04	095	15.0	D	0.011
083	10.0	F	0.04	096	15.0	E	0.02
084	10.0	G	0.04	097	15.0	F	0.02
217	10.0	H	0.02	098	15.0	G	0.02
218	10.0	I	0.02	223	15.0	H	0.013
219	10.0	J	0.04	224	15.0	I	0.015
363	10.0	K	0.02	225	15.0	J	0.03
364	10.0	L	0.02	377	15.0	K	0.01
365	10.0	M	0.02	378	15.0	L	0.01
366	10.0	N	0.02	379	15.0	M	0.011
367	10.0	P	0.04	380	15.0	N	0.011
368	10.0	R	0.04	381	15.0	P	0.02
369	10.0	S	0.04	382	15.0	R	0.02
442	10.0	T	0.02	383	15.0	S	0.02
085	12.5	A	0.013	444	15.0	T	0.011
086	12.5	B	0.013	099	20.0	A	0.007
087	12.5	C	0.015	100	20.0	B	0.007
088	12.5	D	0.015	101	20.0	C	0.007
089	12.5	E	0.03	102	20.0	D	0.007
090	12.5	F	0.03	103	20.0	E	0.01
091	12.5	G	0.03	104	20.0	F	0.01
220	12.5	H	0.013	105	20.0	G	0.01
221	12.5	I	0.013	226	20.0	H	0.007

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/2

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX
227	20.0	I	0.007	232	30.0	H	0.005
228	20.0	J	0.01	233	30.0	I	0.005
384	20.0	K	0.007	234	30.0	J	0.006
385	20.0	L	0.007	398	30.0	K	0.005
386	20.0	M	0.007	399	30.0	L	0.005
387	20.0	N	0.007	400	30.0	M	0.005
388	20.0	P	0.01	401	30.0	N	0.005
389	20.0	R	0.01	402	30.0	P	0.006
390	20.0	S	0.01	403	30.0	R	0.006
445	20.0	T	0.007	404	30.0	S	0.006
106	25.0	A	0.006	447	30.0	T	0.005
107	25.0	B	0.006	120	35.0	A	0.004
108	25.0	C	0.006	121	35.0	B	0.004
109	25.0	D	0.006	122	35.0	C	0.004
110	25.0	E	0.007	123	35.0	D	0.004
111	25.0	F	0.007	124	35.0	E	0.005
112	25.0	G	0.007	125	35.0	F	0.005
229	25.0	H	0.006	126	35.0	G	0.005
230	25.0	I	0.006	235	35.0	H	0.004
231	25.0	J	0.007	236	35.0	I	0.004
391	25.0	K	0.006	237	35.0	J	0.005
392	25.0	L	0.006	405	35.0	K	0.004
393	25.0	M	0.006	406	35.0	L	0.004
394	25.0	N	0.006	407	35.0	M	0.004
395	25.0	P	0.007	408	35.0	N	0.004
396	25.0	R	0.007	409	35.0	P	0.005
397	25.0	S	0.007	410	35.0	R	0.005
446	25.0	T	0.006	411	35.0	S	0.005
113	30.0	A	0.005	448	35.0	T	0.004
114	30.0	B	0.005	238	40.0	A	0.0038
115	30.0	C	0.005	239	40.0	B	0.0038
116	30.0	D	0.005	241	40.0	C	0.0038
117	30.0	E	0.006	242	40.0	D	0.0038
118	30.0	F	0.006	244	40.0	E	0.0052
119	30.0	G	0.006	245	40.0	F	0.0052

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, SINGLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/2


TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING AMPS	TIME DELAY	RESISTANCE OR IMPEDANCE OHMS - MAX
246	40.0	G	0.0052	130	50.0	D	0.003
240	40.0	H	0.0038	131	50.0	E	0.004
243	40.0	I	0.0038	132	50.0	F	0.004
247	40.0	J	0.0052	133	50.0	G	0.004
412	40.0	K	0.0038	248	50.0	H	0.003
413	40.0	L	0.0038	249	50.0	I	0.003
414	40.0	M	0.0038	250	50.0	J	0.004
415	40.0	N	0.0038	419	50.0	K	0.003
416	40.0	P	0.0052	420	50.0	L	0.003
417	40.0	R	0.0052	421	50.0	M	0.003
418	40.0	S	0.0052	422	50.0	N	0.003
447	40.0	T	0.0038	423	50.0	P	0.004
127	50.0	A	0.003	424	50.0	R	0.004
128	50.0	B	0.003	425	50.0	S	0.004
129	50.0	C	0.003	450	50.0	T	0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP-FREE, DOUBLE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/3

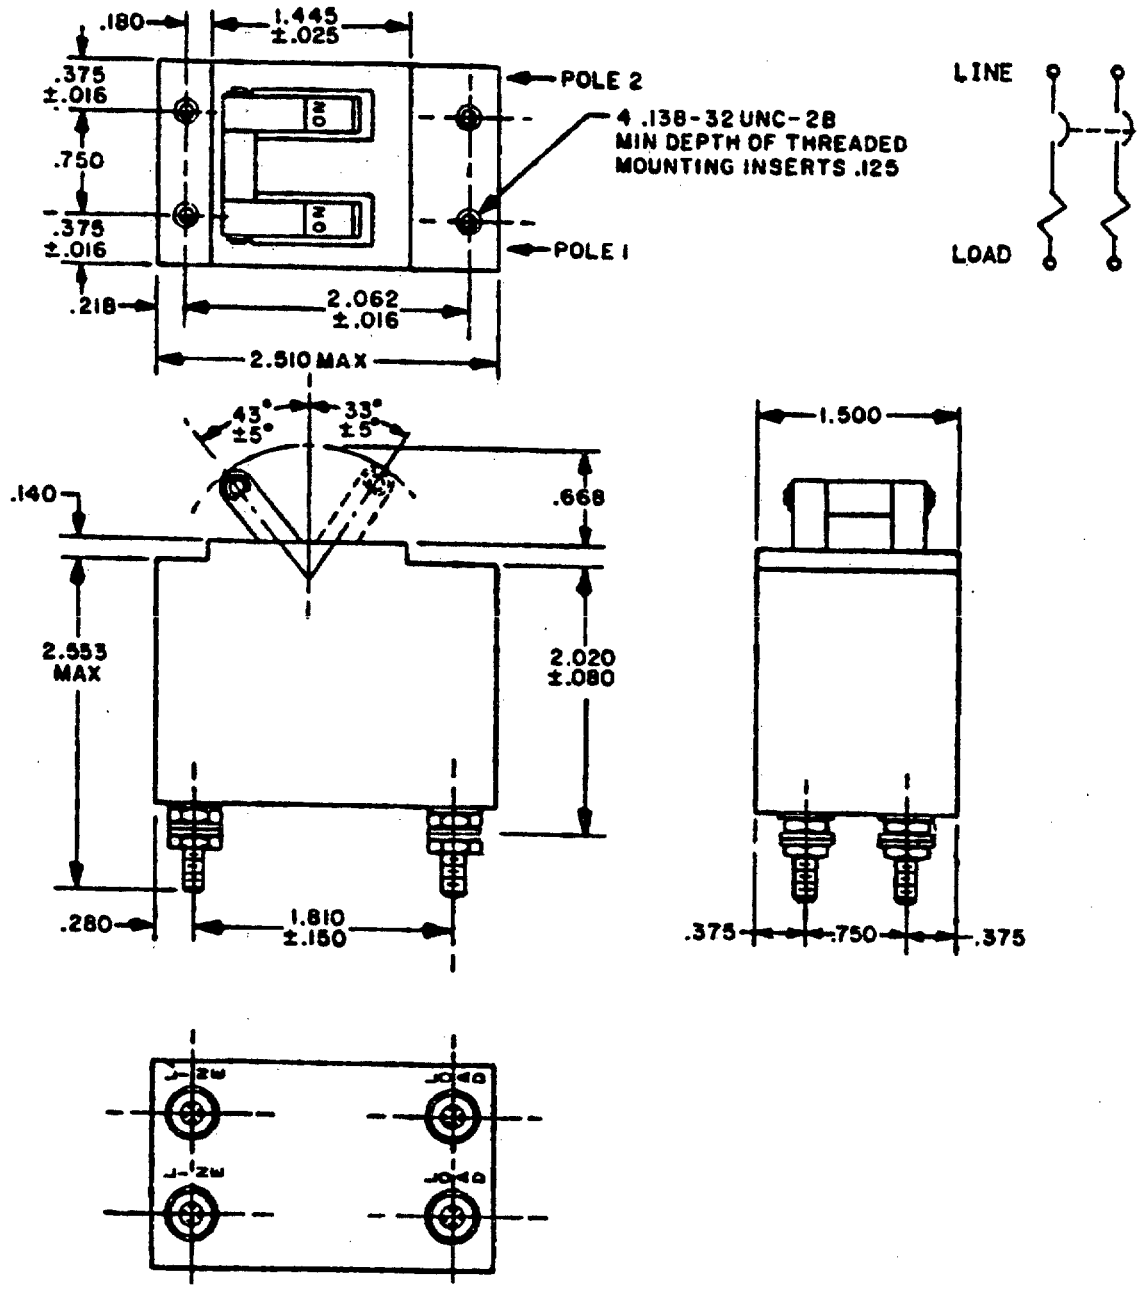

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/3

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS.

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
001	0.2	A	A	32	009	0.5	C	B	6
002	0.2	A	B	32	010	0.5	C	C	6
003	0.2	A	C	34	011	0.5	C	D	6
004	0.2	A	D	34	012	0.5	C	E	12
005	0.2	A	E	72	013	0.5	C	F	12
006	0.2	A	F	72	014	0.5	C	G	12
007	0.2	A	G	72	147	0.5	C	H	6
134	0.2	A	H	32	148	0.5	C	I	6
135	0.2	A	I	34	149	0.5	C	J	12
136	0.2	A	J	72	265	0.5	C	K	6
251	0.2	A	K	32	266	0.5	C	L	6
252	0.2	A	L	32	267	0.5	C	M	6
253	0.2	A	M	34	268	0.5	C	N	6
254	0.2	A	N	34	269	0.5	C	P	12
255	0.2	A	P	72	270	0.5	C	R	12
256	0.2	A	R	72	271	0.5	C	S	12
257	0.2	A	S	72	428	0.5	C	T	6
426	0.2	A	T	34	150	0.75	D	A	3
137	0.25	B	A	21	151	0.75	D	B	3
138	0.25	B	B	21	153	0.75	D	C	3
140	0.25	B	C	23	154	0.75	D	D	3
141	0.25	B	D	23	156	0.75	D	E	7
143	0.25	B	E	43	157	0.75	D	F	7
144	0.25	B	F	43	158	0.75	D	G	7
145	0.25	B	G	43	152	0.75	D	H	3
139	0.25	B	H	21	155	0.75	D	I	3
142	0.25	B	I	23	159	0.75	D	J	7
146	0.25	B	J	43	272	0.75	D	K	3
258	0.25	B	K	21	273	0.75	D	L	3
259	0.25	B	L	21	274	0.75	D	M	3
260	0.25	B	M	23	275	0.75	D	N	3
261	0.25	B	N	23	276	0.75	D	P	7
262	0.25	B	P	43	277	0.75	D	R	7
263	0.25	B	R	43	278	0.75	D	S	7
264	0.25	B	S	43	429	0.75	D	T	3
427	0.25	B	T	23	015	1.0	E	A	2
008	0.5	C	A	6	016	1.0	E	B	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/3

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
017	1.0	E	C	2	025	2.0	G	D	0.5
018	1.0	E	D	2	026	2.0	G	E	0.8
019	1.0	E	E	4	027	2.0	G	F	0.8
020	1.0	E	F	4	028	2.0	G	G	0.8
021	1.0	E	G	4	173	2.0	G	H	0.5
160	1.0	E	H	2	174	2.0	G	I	0.5
161	1.0	E	I	2	175	2.0	G	J	0.8
162	1.0	E	J	4	293	2.0	G	K	0.5
279	1.0	E	K	2	294	2.0	G	L	0.5
280	1.0	E	L	2	295	2.0	G	M	0.5
281	1.0	E	M	2	296	2.0	G	N	0.5
282	1.0	E	N	2	297	2.0	G	P	0.8
283	1.0	E	P	4	298	2.0	G	R	0.8
284	1.0	E	R	4	299	2.0	G	S	0.8
285	1.0	E	S	4	432	2.0	G	T	0.5
430	1.0	E	T	2	176	2.5	H	A	0.35
163	1.5	F	A	0.9	177	2.5	H	B	0.35
164	1.5	F	B	0.9	179	2.5	H	C	0.35
166	1.5	F	C	0.9	180	2.5	H	D	0.35
167	1.5	F	D	0.9	182	2.5	H	E	0.6
169	1.5	F	E	2	183	2.5	H	F	0.6
170	1.5	F	F	2	184	2.5	H	G	0.6
171	1.5	F	G	2	178	2.5	H	H	0.35
165	1.5	F	H	0.9	181	2.5	H	I	0.35
168	1.5	F	I	0.9	185	2.5	H	J	0.6
172	1.5	F	J	2	300	2.5	H	K	0.35
286	1.5	F	K	0.9	301	2.5	H	L	0.35
287	1.5	F	L	0.9	302	2.5	H	M	0.35
288	1.5	F	M	0.9	302	2.5	H	N	0.35
289	1.5	F	N	0.9	304	2.5	H	P	0.6
290	1.5	F	P	2	305	2.5	H	R	0.6
291	1.5	F	R	2	306	2.5	H	S	0.6
292	1.5	F	S	2	433	2.5	H	T	0.35
431	1.5	F	T	0.9	029	3.0	I	A	0.3
022	2.0	G	A	0.5	030	3.0	I	B	0.3
023	2.0	G	B	0.5	031	3.0	I	C	0.3
024	2.0	G	C	0.5	032	3.0	I	D	0.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/3

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
033	3.0	I	E	0.5	041	4.0	K	F	0.3
034	3.0	I	F	0.5	042	4.0	K	G	0.3
035	3.0	I	G	0.5	199	4.0	K	H	0.1
186	3.0	I	H	0.3	200	4.0	K	I	0.1
187	3.0	I	I	0.3	201	4.0	K	J	0.3
188	3.0	I	J	0.5	321	4.0	K	K	0.1
307	3.0	I	K	0.3	322	4.0	K	L	0.1
308	3.0	I	L	0.3	323	4.0	K	M	0.1
309	3.0	I	M	0.3	324	4.0	K	N	0.1
310	3.0	I	N	0.3	325	4.0	K	P	0.3
311	3.0	I	P	0.5	326	4.0	K	R	0.3
312	3.0	I	R	0.5	327	4.0	K	S	0.3
313	3.0	I	S	0.5	436	4.0	K	T	0.1
434	3.0	I	T	0.3	043	5.0	L	A	0.08
189	3.5	J	A	0.15	044	5.0	L	B	0.08
190	3.5	J	B	0.15	045	5.0	L	C	0.08
192	3.5	J	C	0.15	046	5.0	L	D	0.08
193	3.5	J	D	0.15	047	5.0	L	E	0.15
195	3.5	J	E	0.35	048	5.0	L	F	0.15
196	3.5	J	F	0.35	049	5.0	L	G	0.15
197	3.5	J	G	0.35	202	5.0	L	H	0.08
191	3.5	J	H	0.15	203	5.0	L	I	0.08
194	3.5	J	I	0.15	204	5.0	L	J	0.15
198	3.5	J	J	0.35	328	5.0	L	K	0.08
314	3.5	J	K	0.15	329	5.0	L	L	0.08
315	3.5	J	L	0.15	330	5.0	L	M	0.08
316	3.5	J	M	0.15	331	5.0	L	N	0.08
317	3.5	J	N	0.15	332	5.0	L	P	0.15
318	3.5	J	P	0.35	333	5.0	L	R	0.15
319	3.5	J	R	0.35	334	5.0	L	S	0.15
320	3.5	J	S	0.35	437	5.0	L	T	0.08
435	3.5	J	T	0.15	050	6.0	M	A	0.06
036	4.0	K	A	0.1	051	6.0	M	B	0.06
037	4.0	K	B	0.1	052	6.0	M	C	0.06
038	4.0	K	C	0.1	053	6.0	M	D	0.06
039	4.0	K	D	0.1	054	6.0	M	E	0.08
040	4.0	K	E	0.3	055	6.0	M	F	0.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/3

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
056	6.0	M	G	0.08	211	8.0	P	H	0.03
205	6.0	M	H	0.06	212	8.0	P	I	0.03
206	6.0	M	I	0.06	213	8.0	P	J	0.06
207	6.0	M	J	0.08	349	8.0	P	K	0.03
335	6.0	M	K	0.06	350	8.0	P	L	0.03
336	6.0	M	L	0.06	351	8.0	P	M	0.03
337	6.0	M	M	0.06	352	8.0	P	N	0.03
338	6.0	M	N	0.06	353	8.0	P	P	0.06
339	6.0	M	P	0.08	354	8.0	P	R	0.06
340	6.0	M	R	0.08	355	8.0	P	P	0.06
341	6.0	M	S	0.08	440	8.0	P	T	0.03
438	6.0	M	T	0.06	071	9.0	Q	A	0.018
057	7.0	N	A	0.04	072	9.0	Q	B	0.018
058	7.0	N	B	0.04	073	9.0	Q	C	0.02
059	7.0	N	C	0.04	074	9.0	Q	D	0.02
060	7.0	N	D	0.04	075	9.0	Q	E	0.05
061	7.0	N	E	0.07	076	9.0	Q	F	0.05
062	7.0	N	F	0.07	077	9.0	Q	G	0.05
063	7.0	N	G	0.07	214	9.0	Q	H	0.02
208	7.0	N	H	0.04	215	9.0	Q	I	0.02
209	7.0	N	I	0.04	216	9.0	Q	J	0.05
210	7.0	N	J	0.07	356	9.0	Q	K	0.018
342	7.0	N	K	0.04	357	9.0	Q	L	0.018
343	7.0	N	L	0.04	358	9.0	Q	M	0.02
344	7.0	N	M	0.04	359	9.0	Q	N	0.02
345	7.0	N	N	0.04	360	9.0	Q	P	0.05
346	7.0	N	P	0.07	361	9.0	Q	R	0.05
347	7.0	N	R	0.07	362	9.0	Q	S	0.05
348	7.0	N	S	0.07	441	9.0	Q	T	0.02
439	7.0	N	T	0.04	078	10.0	R	A	0.02
064	8.0	P	A	0.03	079	10.0	R	B	0.02
065	8.0	P	B	0.03	080	10.0	R	C	0.02
066	8.0	P	C	0.03	081	10.0	R	D	0.02
067	8.0	P	D	0.03	082	10.0	R	E	0.04
068	8.0	P	E	0.06	083	10.0	R	F	0.04
069	8.0	P	F	0.06	084	10.0	R	G	0.04
070	8.0	P	G	0.06	217	10.0	R	H	0.02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/3

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
218	10.0	R	I	0.02	225	15.0	T	J	0.03
219	10.0	R	J	0.04	377	15.0	T	K	0.01
363	10.0	R	K	0.02	378	15.0	T	L	0.01
364	10.0	R	L	0.02	379	15.0	T	M	0.011
365	10.0	R	M	0.02	380	15.0	T	N	0.011
366	10.0	R	N	0.02	381	15.0	T	P	0.02
367	10.0	R	P	0.04	382	15.0	T	R	0.02
368	10.0	R	R	0.04	383	15.0	T	S	0.02
369	10.0	R	S	0.04	444	15.0	T	T	0.011
442	10.0	R	T	0.02	099	20.0	U	A	0.007
085	12.5	S	A	0.013	100	20.0	U	B	0.007
086	12.5	S	B	0.013	101	20.0	U	C	0.007
087	12.5	S	C	0.015	102	20.0	U	D	0.007
088	12.5	S	D	0.015	103	20.0	U	E	0.01
089	12.5	S	E	0.03	104	20.0	U	F	0.01
090	12.5	S	F	0.03	105	20.0	U	G	0.01
091	12.5	S	G	0.03	226	20.0	U	H	0.007
220	12.5	S	H	0.013	227	20.0	U	I	0.007
221	12.5	S	I	0.013	228	20.0	U	J	0.01
222	12.5	S	J	0.03	384	20.0	U	K	0.007
370	12.5	S	K	0.013	385	20.0	U	L	0.007
371	12.5	S	L	0.013	386	20.0	U	M	0.007
372	12.5	S	M	0.015	387	20.0	U	N	0.007
373	12.5	S	N	0.015	388	20.0	U	M	0.01
374	12.5	S	P	0.03	389	20.0	U	R	0.01
375	12.5	S	R	0.03	390	20.0	U	S	0.01
376	12.5	S	S	0.03	445	20.0	U	T	0.07
443	12.5	S	T	0.013	106	25.0	V	A	0.006
092	15.0	T	A	0.01	107	25.0	V	B	0.006
093	15.0	T	B	0.01	108	25.0	V	C	0.006
094	15.0	T	C	0.011	109	25.0	V	D	0.006
095	15.0	T	D	0.011	110	25.0	V	E	0.007
096	15.0	T	E	0.02	111	25.0	V	F	0.007
097	15.0	T	F	0.02	112	25.0	V	G	0.007
098	15.0	T	G	0.02	229	25.0	V	H	0.006
223	15.0	T	H	0.013	230	25.0	V	I	0.006
224	15.0	T	I	0.015	231	25.0	V	J	0.007

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/3

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
391	25.0	V	K	0.006	406	35.0	X	L	0.004
392	25.0	V	L	0.006	407	35.0	X	M	0.004
393	25.0	V	M	0.006	408	35.0	X	N	0.004
394	25.0	V	N	0.006	409	35.0	X	P	0.005
395	25.0	V	P	0.007	410	35.0	X	R	0.005
396	25.0	V	R	0.007	411	35.0	X	S	0.005
397	25.0	V	S	0.007	448	35.0	X	T	0.004
446	25.0	V	T	0.006	238	40.0	Y	A	0.0038
113	30.0	W	A	0.005	239	40.0	Y	B	0.0038
114	30.0	W	B	0.005	241	40.0	Y	C	0.0038
115	30.0	W	C	0.005	242	40.0	Y	D	0.0038
116	30.0	W	D	0.005	244	40.0	Y	E	0.0052
117	30.0	W	E	0.006	245	40.0	Y	F	0.0052
118	30.0	W	F	0.006	246	40.0	Y	G	0.0052
119	30.0	W	G	0.006	240	40.0	Y	H	0.0038
232	30.0	W	H	0.005	243	40.0	Y	I	0.0038
233	30.0	W	I	0.005	247	40.0	Y	J	0.0052
234	30.0	W	J	0.006	412	40.0	Y	K	0.0038
398	30.0	W	K	0.005	413	40.0	Y	L	0.0038
399	30.0	W	L	0.005	414	40.0	Y	M	0.0038
400	30.0	W	M	0.005	415	40.0	Y	N	0.0038
401	30.0	W	N	0.005	416	40.0	Y	P	0.0052
402	30.0	W	P	0.006	417	40.0	Y	R	0.0052
403	30.0	W	R	0.006	418	40.0	Y	S	0.0052
404	30.0	W	S	0.006	449	40.0	Y	T	0.0038
447	30.0	W	T	0.005	127	50.0	Z	A	0.003
120	35.0	X	A	0.004	128	50.0	Z	B	0.003
121	35.0	X	B	0.004	129	50.0	Z	C	0.003
122	35.0	X	C	0.004	130	50.0	Z	D	0.003
123	35.0	X	D	0.004	131	50.0	Z	E	0.004
124	35.0	X	E	0.005	132	50.0	Z	F	0.004
125	35.0	X	F	0.005	133	50.0	Z	G	0.004
126	35.0	X	G	0.005	248	50.0	Z	H	0.003
235	35.0	X	H	0.004	249	50.0	Z	I	0.003
236	35.0	X	I	0.004	250	50.0	Z	J	0.004
237	35.0	X	J	0.005	419	50.0	Z	K	0.003
405	35.0	X	K	0.004	420	50.0	Z	L	0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/3


TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
421	50.0	Z	M	0.003	424	50.0	Z	R	0.004
422	50.0	Z	N	0.003	425	50.0	Z	S	0.004
423	50.0	Z	P	0.004	450	50.0	Z	T	0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP-FREE, DOUBLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/4

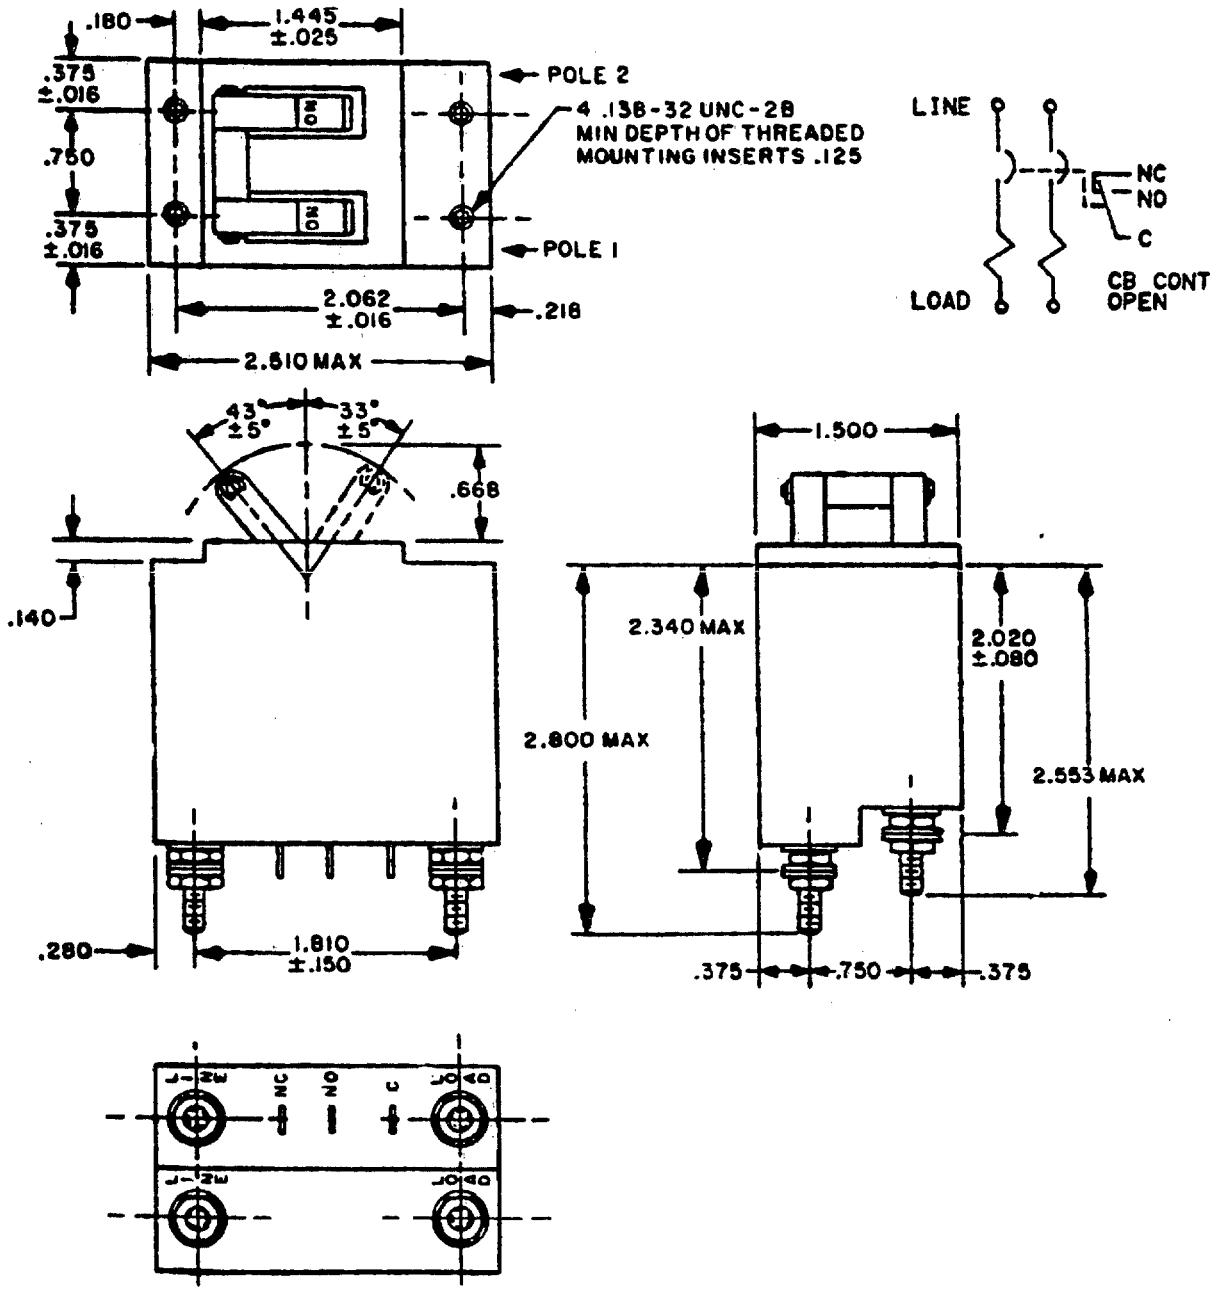

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/4

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS.

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
001	0.2	A	A	32	009	0.5	C	B	6
002	0.2	A	B	32	010	0.5	C	C	6
003	0.2	A	C	34	011	0.5	C	D	6
004	0.2	A	D	34	012	0.5	C	E	12
005	0.2	A	E	72	013	0.5	C	F	12
006	0.2	A	F	72	014	0.5	C	G	12
007	0.2	A	G	72	147	0.5	C	H	6
134	0.2	A	H	32	148	0.5	C	I	6
135	0.2	A	I	34	149	0.5	C	J	12
136	0.2	A	J	72	265	0.5	C	K	6
251	0.2	A	K	32	266	0.5	C	L	6
252	0.2	A	L	32	267	0.5	C	M	6
253	0.2	A	M	34	268	0.5	C	N	6
254	0.2	A	N	34	269	0.5	C	P	12
255	0.2	A	P	72	270	0.5	C	R	12
256	0.2	A	R	72	271	0.5	C	S	12
257	0.2	A	S	72	428	0.5	C	T	6
426	0.2	A	T	34	150	0.75	D	A	3
137	0.25	B	A	21	151	0.75	D	B	3
138	0.25	B	B	21	153	0.75	D	C	3
140	0.25	B	C	23	154	0.75	D	D	3
141	0.25	B	D	23	156	0.75	D	E	7
143	0.25	B	E	43	157	0.75	D	F	7
144	0.25	B	F	43	158	0.75	D	G	7
145	0.25	B	G	43	152	0.75	D	H	3
139	0.25	B	H	21	155	0.75	D	I	3
142	0.25	B	I	23	159	0.75	D	J	7
146	0.25	B	J	43	272	0.75	D	K	3
258	0.25	B	K	21	273	0.75	D	L	3
259	0.25	B	L	21	274	0.75	D	M	3
260	0.25	B	M	23	275	0.75	D	N	3
261	0.25	B	N	23	276	0.75	D	P	7
262	0.25	B	P	43	277	0.75	D	R	7
263	0.25	B	R	43	278	0.75	D	S	7
264	0.25	B	S	43	429	0.75	D	T	3
427	0.25	B	T	23	015	1.0	E	A	2
008	0.5	C	A	6	016	1.0	E	B	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/4

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
017	1.0	E	C	2	025	2.0	G	D	0.5
018	1.0	E	D	2	026	2.0	G	E	0.8
019	1.0	E	E	4	027	2.0	G	F	0.8
020	1.0	E	F	4	028	2.0	G	G	0.8
021	1.0	E	G	4	173	2.0	G	H	0.5
160	1.0	E	H	2	174	2.0	G	I	0.5
161	1.0	E	I	2	175	2.0	G	J	0.8
162	1.0	E	J	4	293	2.0	G	K	0.5
279	1.0	E	K	2	294	2.0	G	L	0.5
280	1.0	E	L	2	295	2.0	G	M	0.5
281	1.0	E	M	2	296	2.0	G	N	0.5
282	1.0	E	N	2	297	2.0	G	P	0.8
283	1.0	E	P	4	298	2.0	G	R	0.8
284	1.0	E	R	4	299	2.0	G	S	0.8
285	1.0	E	S	4	432	2.0	G	T	0.5
430	1.0	E	T	2	176	2.5	H	A	0.35
163	1.5	F	A	0.9	177	2.5	H	B	0.35
164	1.5	F	B	0.9	179	2.5	H	C	0.35
166	1.5	F	C	0.9	180	2.5	H	D	0.35
167	1.5	F	D	0.9	182	2.5	H	E	0.6
169	1.5	F	E	2	183	2.5	H	F	0.6
170	1.5	F	F	2	184	2.5	H	G	0.6
171	1.5	F	G	2	178	2.5	H	H	0.35
165	1.5	F	H	0.9	181	2.5	H	I	0.35
168	1.5	F	I	0.9	185	2.5	H	J	0.6
172	1.5	F	J	2	300	2.5	H	K	0.35
286	1.5	F	K	0.9	301	2.5	H	L	0.35
287	1.5	F	L	0.9	302	2.5	H	M	0.35
288	1.5	F	M	0.9	302	2.5	H	N	0.35
289	1.5	F	N	0.9	304	2.5	H	P	0.6
290	1.5	F	P	2	305	2.5	H	R	0.6
291	1.5	F	R	2	306	2.5	H	S	0.6
292	1.5	F	S	2	433	2.5	H	T	0.35
431	1.5	F	T	0.9	029	3.0	I	A	0.3
022	2.0	G	A	0.5	030	3.0	I	B	0.3
023	2.0	G	B	0.5	031	3.0	I	C	0.3
024	2.0	G	C	0.5	032	3.0	I	D	0.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/4

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
033	3.0	I	E	0.5	041	4.0	K	F	0.3
034	3.0	I	F	0.5	042	4.0	K	G	0.3
035	3.0	I	G	0.5	199	4.0	K	H	0.1
186	3.0	I	H	0.3	200	4.0	K	I	0.1
187	3.0	I	I	0.3	201	4.0	K	J	0.3
188	3.0	I	J	0.5	321	4.0	K	K	0.1
307	3.0	I	K	0.3	322	4.0	K	L	0.1
308	3.0	I	L	0.3	323	4.0	K	M	0.1
309	3.0	I	M	0.3	324	4.0	K	N	0.1
310	3.0	I	N	0.3	325	4.0	K	P	0.3
311	3.0	I	P	0.5	326	4.0	K	R	0.3
312	3.0	I	R	0.5	327	4.0	K	S	0.3
313	3.0	I	S	0.5	436	4.0	K	T	0.1
434	3.0	I	T	0.3	043	5.0	L	A	0.08
189	3.5	J	A	0.15	044	5.0	L	B	0.08
190	3.5	J	B	0.15	045	5.0	L	C	0.08
192	3.5	J	C	0.15	046	5.0	L	D	0.08
193	3.5	J	D	0.15	047	5.0	L	E	0.15
195	3.5	J	E	0.35	048	5.0	L	F	0.15
196	3.5	J	F	0.35	049	5.0	L	G	0.15
197	3.5	J	G	0.35	202	5.0	L	H	0.08
191	3.5	J	H	0.15	203	5.0	L	I	0.08
194	3.5	J	I	0.15	204	5.0	L	J	0.15
198	3.5	J	J	0.35	328	5.0	L	K	0.08
314	3.5	J	K	0.15	329	5.0	L	L	0.08
315	3.5	J	L	0.15	330	5.0	L	M	0.08
316	3.5	J	M	0.15	331	5.0	L	N	0.08
317	3.5	J	N	0.15	332	5.0	L	P	0.15
318	3.5	J	P	0.35	333	5.0	L	R	0.15
319	3.5	J	R	0.35	334	5.0	L	S	0.15
320	3.5	J	S	0.35	437	5.0	L	T	0.08
435	3.5	J	T	0.15	050	6.0	M	A	0.06
036	4.0	K	A	0.1	051	6.0	M	B	0.06
037	4.0	K	B	0.1	052	6.0	M	C	0.06
038	4.0	K	C	0.1	053	6.0	M	D	0.06
039	4.0	K	D	0.1	054	6.0	M	E	0.08
040	4.0	K	E	0.3	055	6.0	M	F	0.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/4

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
056	6.0	M	G	0.08	211	8.0	P	H	0.03
205	6.0	M	H	0.06	212	8.0	P	I	0.03
206	6.0	M	I	0.06	213	8.0	P	J	0.06
207	6.0	M	J	0.08	349	8.0	P	K	0.03
335	6.0	M	K	0.06	350	8.0	P	L	0.03
336	6.0	M	L	0.06	351	8.0	P	M	0.03
337	6.0	M	M	0.06	352	8.0	P	N	0.03
338	6.0	M	N	0.06	353	8.0	P	P	0.06
339	6.0	M	P	0.08	354	8.0	P	R	0.06
340	6.0	M	R	0.08	355	8.0	P	P	0.06
341	6.0	M	S	0.08	440	8.0	P	T	0.03
438	6.0	M	T	0.06	071	9.0	Q	A	0.018
057	7.0	N	A	0.04	072	9.0	Q	B	0.018
058	7.0	N	B	0.04	073	9.0	Q	C	0.02
059	7.0	N	C	0.04	074	9.0	Q	D	0.02
060	7.0	N	D	0.04	075	9.0	Q	E	0.05
061	7.0	N	E	0.07	076	9.0	Q	F	0.05
062	7.0	N	F	0.07	077	9.0	Q	G	0.05
063	7.0	N	G	0.07	214	9.0	Q	H	0.02
208	7.0	N	H	0.04	215	9.0	Q	I	0.02
209	7.0	N	I	0.04	216	9.0	Q	J	0.05
210	7.0	N	J	0.07	356	9.0	Q	K	0.018
342	7.0	N	K	0.04	357	9.0	Q	L	0.018
343	7.0	N	L	0.04	358	9.0	Q	M	0.02
344	7.0	N	M	0.04	359	9.0	Q	N	0.02
345	7.0	N	N	0.04	360	9.0	Q	P	0.05
346	7.0	N	P	0.07	361	9.0	Q	R	0.05
347	7.0	N	R	0.07	362	9.0	Q	S	0.05
348	7.0	N	S	0.07	441	9.0	Q	T	0.02
439	7.0	N	T	0.04	078	10.0	R	A	0.02
064	8.0	P	A	0.03	079	10.0	R	B	0.02
065	8.0	P	B	0.03	080	10.0	R	C	0.02
0[illegible]	8.0	P	C	0.03	081	10.0	R	D	0.02
[illegible]	8.0	P	D	0.03	082	10.0	R	E	0.04
[illegible]	8.0	P	E	0.06	083	10.0	R	F	0.04
[illegible]	8.0	P	F	0.06	084	10.0	R	G	0.04
[illegible]	8.0	P	G	0.06	217	10.0	R	H	0.02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/4

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
218	10.0	R	I	0.02	225	15.0	T	J	0.03
219	10.0	R	J	0.04	377	15.0	T	K	0.01
363	10.0	R	K	0.02	378	15.0	T	L	0.01
364	10.0	R	L	0.02	379	15.0	T	M	0.011
365	10.0	R	M	0.02	380	15.0	T	N	0.011
366	10.0	R	N	0.02	381	15.0	T	P	0.02
367	10.0	R	P	0.04	382	15.0	T	R	0.02
368	10.0	R	R	0.04	383	15.0	T	S	0.02
369	10.0	R	S	0.04	444	15.0	T	T	0.011
442	10.0	R	T	0.02	099	20.0	U	A	0.007
085	12.5	S	A	0.013	100	20.0	U	B	0.007
086	12.5	S	B	0.013	101	20.0	U	C	0.007
087	12.5	S	C	0.015	102	20.0	U	D	0.007
088	12.5	S	D	0.015	103	20.0	U	E	0.01
089	12.5	S	E	0.03	104	20.0	U	F	0.01
090	12.5	S	F	0.03	105	20.0	U	G	0.01
091	12.5	S	G	0.03	226	20.0	U	H	0.007
220	12.5	S	H	0.013	227	20.0	U	I	0.007
221	12.5	S	I	0.013	228	20.0	U	J	0.01
222	12.5	S	J	0.03	384	20.0	U	K	0.007
370	12.5	S	K	0.013	385	20.0	U	L	0.007
371	12.5	S	L	0.013	386	20.0	U	M	0.007
372	12.5	S	M	0.015	387	20.0	U	N	0.007
373	12.5	S	N	0.015	388	20.0	U	M	0.01
374	12.5	S	P	0.03	389	20.0	U	R	0.01
375	12.5	S	R	0.03	390	20.0	U	S	0.01
376	12.5	S	S	0.03	445	20.0	U	T	0.07
443	12.5	S	T	0.02	106	25.0	V	A	0.006
092	15.0	T	A	0.01	107	25.0	V	B	0.006
093	15.0	T	B	0.01	108	25.0	V	C	0.006
094	15.0	T	C	0.011	109	25.0	V	D	0.006
095	15.0	T	D	0.011	110	25.0	V	E	0.007
096	15.0	T	E	0.02	111	25.0	V	F	0.007
097	15.0	T	F	0.02	112	25.0	V	G	0.007
098	15.0	T	G	0.02	229	25.0	V	H	0.006
223	15.0	T	H	0.013	230	25.0	V	I	0.006
224	15.0	T	I	0.015	231	25.0	V	J	0.007

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/4

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
391	25.0	V	K	0.006	406	35.0	X	L	0.004
392	25.0	V	L	0.006	407	35.0	X	M	0.004
393	25.0	V	M	0.006	408	35.0	X	N	0.004
394	25.0	V	N	0.006	409	35.0	X	P	0.005
395	25.0	V	P	0.007	410	35.0	X	R	0.005
396	25.0	V	R	0.007	411	35.0	X	S	0.005
397	25.0	V	S	0.007	448	35.0	X	T	0.004
446	25.0	V	T	0.006	238	40.0	Y	A	0.0038
113	30.0	W	A	0.005	239	40.0	Y	B	0.0038
114	30.0	W	B	0.005	241	40.0	Y	C	0.0038
115	30.0	W	C	0.005	242	40.0	Y	D	0.0038
116	30.0	W	D	0.005	244	40.0	Y	E	0.0052
117	30.0	W	E	0.006	245	40.0	Y	F	0.0052
118	30.0	W	F	0.006	246	40.0	Y	G	0.0052
119	30.0	W	G	0.006	240	40.0	Y	H	0.0038
232	30.0	W	H	0.005	243	40.0	Y	I	0.0038
233	30.0	W	I	0.005	247	40.0	Y	J	0.0052
234	30.0	W	J	0.006	412	40.0	Y	K	0.0038
398	30.0	W	K	0.005	413	40.0	Y	L	0.0038
399	30.0	W	L	0.005	414	40.0	Y	M	0.0038
400	30.0	W	M	0.005	415	40.0	Y	N	0.0038
401	30.0	W	N	0.005	416	40.0	Y	P	0.0052
402	30.0	W	P	0.006	417	40.0	Y	R	0.0052
403	30.0	W	R	0.006	418	40.0	Y	S	0.0052
404	30.0	W	S	0.006	449	40.0	Y	T	0.0038
447	30.0	W	T	0.005	127	50.0	Z	A	0.003
120	35.0	X	A	0.004	128	50.0	Z	B	0.003
121	35.0	X	B	0.004	129	50.0	Z	C	0.003
122	35.0	X	C	0.004	130	50.0	Z	D	0.003
123	35.0	X	D	0.004	131	50.0	Z	E	0.004
124	35.0	X	E	0.005	132	50.0	Z	F	0.004
125	35.0	X	F	0.005	133	50.0	Z	G	0.004
126	35.0	X	G	0.005	248	50.0	Z	H	0.003
	35.0	X	H	0.004	249	50.0	Z	I	0.003
	35.0	X	I	0.004	250	50.0	Z	J	0.004
	35.0	X	J	0.005	419	50.0	Z	K	0.003
	35.0	X	K	0.004	420	50.0	Z	L	0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/4


TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
421	50.0	Z	M	0.003	424	50.0	Z	R	0.004
422	50.0	Z	N	0.003	425	50.0	Z	S	0.004
423	50.0	Z	P	0.004	450	50.0	Z	T	0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP-FREE, THREE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/5

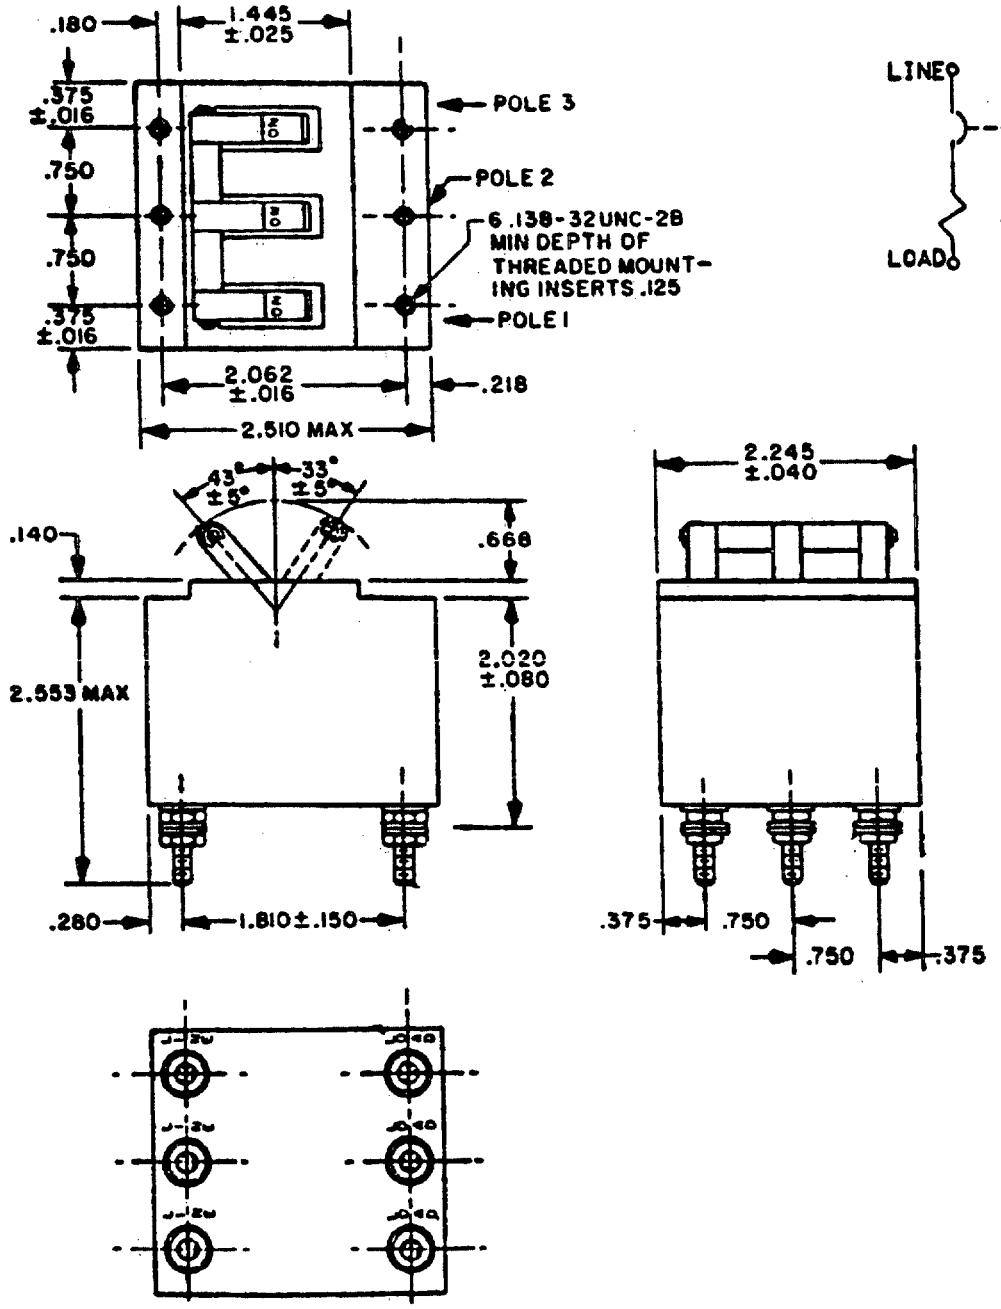

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, THREE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/5

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS.

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
001	0.2	A	A	32	009	0.5	C	B	6
002	0.2	A	B	32	010	0.5	C	C	6
003	0.2	A	C	34	011	0.5	C	D	6
004	0.2	A	D	34	012	0.5	C	E	12
005	0.2	A	E	72	013	0.5	C	F	12
006	0.2	A	F	72	014	0.5	C	G	12
007	0.2	A	G	72	147	0.5	C	H	6
134	0.2	A	H	32	148	0.5	C	I	6
135	0.2	A	I	34	149	0.5	C	J	12
136	0.2	A	J	72	265	0.5	C	K	6
251	0.2	A	K	32	266	0.5	C	L	6
252	0.2	A	L	32	267	0.5	C	M	6
253	0.2	A	M	34	268	0.5	C	N	6
254	0.2	A	N	34	269	0.5	C	P	12
255	0.2	A	P	72	270	0.5	C	R	12
256	0.2	A	R	72	271	0.5	C	S	12
257	0.2	A	S	72	428	0.5	C	T	6
426	0.2	A	T	34	150	0.75	D	A	3
137	0.25	B	A	21	151	0.75	D	B	3
138	0.25	B	B	21	153	0.75	D	C	3
140	0.25	B	C	23	154	0.75	D	D	3
141	0.25	B	D	23	156	0.75	D	E	7
143	0.25	B	E	43	157	0.75	D	F	7
144	0.25	B	F	43	158	0.75	D	G	7
145	0.25	B	G	43	152	0.75	D	H	3
139	0.25	B	H	21	155	0.75	D	I	3
142	0.25	B	I	23	159	0.75	D	J	7
146	0.25	B	J	43	272	0.75	D	K	3
258	0.25	B	K	21	273	0.75	D	L	3
259	0.25	B	L	21	274	0.75	D	M	3
260	0.25	B	M	23	275	0.75	D	N	3
261	0.25	B	N	23	276	0.75	D	P	7
262	0.25	B	P	43	277	0.75	D	R	7
263	0.25	B	R	43	278	0.75	D	S	7
264	0.25	B	S	43	429	0.75	D	T	3
427	0.25	B	T	23	015	1.0	E	A	2
008	0.5	C	A	6	016	1.0	E	B	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, THREE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/5

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
017	1.0	E	C	2	025	2.0	G	D	0.5
018	1.0	E	D	2	026	2.0	G	E	0.8
019	1.0	E	E	4	027	2.0	G	F	0.8
020	1.0	E	F	4	028	2.0	G	G	0.8
021	1.0	E	G	4	173	2.0	G	H	0.5
160	1.0	E	H	2	174	2.0	G	I	0.5
161	1.0	E	I	2	175	2.0	G	J	0.8
162	1.0	E	J	4	293	2.0	G	K	0.5
279	1.0	E	K	2	294	2.0	G	L	0.5
280	1.0	E	L	2	295	2.0	G	M	0.5
281	1.0	E	M	2	296	2.0	G	N	0.5
282	1.0	E	N	2	297	2.0	G	P	0.8
283	1.0	E	P	4	298	2.0	G	R	0.8
284	1.0	E	R	4	299	2.0	G	S	0.8
285	1.0	E	S	4	432	2.0	G	T	0.5
430	1.0	E	T	2	176	2.5	H	A	0.35
163	1.5	F	A	0.9	177	2.5	H	B	0.35
164	1.5	F	B	0.9	179	2.5	H	C	0.35
166	1.5	F	C	0.9	180	2.5	H	D	0.35
167	1.5	F	D	0.9	182	2.5	H	E	0.6
169	1.5	F	E	2	183	2.5	H	F	0.6
170	1.5	F	F	2	184	2.5	H	G	0.6
171	1.5	F	G	2	178	2.5	H	H	0.35
165	1.5	F	H	0.9	181	2.5	H	I	0.35
168	1.5	F	I	0.9	185	2.5	H	J	0.6
172	1.5	F	J	2	300	2.5	H	K	0.35
286	1.5	F	K	0.9	301	2.5	H	L	0.35
287	1.5	F	L	0.9	302	2.5	H	M	0.35
288	1.5	F	M	0.9	302	2.5	H	N	0.35
289	1.5	F	N	0.9	304	2.5	H	P	0.6
290	1.5	F	P	2	305	2.5	H	R	0.6
291	1.5	F	R	2	306	2.5	H	S	0.6
292	1.5	F	S	2	433	2.5	H	T	0.35
431	1.5	F	T	0.9	029	3.0	I	A	0.3
022	2.0	G	A	0.5	030	3.0	I	B	0.3
023	2.0	G	B	0.5	031	3.0	I	C	0.3
024	2.0	G	C	0.5	032	3.0	I	D	0.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, THREE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/5

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
033	3.0	I	E	0.5	041	4.0	K	F	0.3
034	3.0	I	F	0.5	042	4.0	K	G	0.3
035	3.0	I	G	0.5	199	4.0	K	H	0.1
186	3.0	I	H	0.3	200	4.0	K	I	0.1
187	3.0	I	I	0.3	201	4.0	K	J	0.3
188	3.0	I	J	0.5	321	4.0	K	K	0.1
307	3.0	I	K	0.3	322	4.0	K	L	0.1
308	3.0	I	L	0.3	323	4.0	K	M	0.1
309	3.0	I	M	0.3	324	4.0	K	N	0.1
310	3.0	I	N	0.3	325	4.0	K	P	0.3
311	3.0	I	P	0.5	326	4.0	K	R	0.3
312	3.0	I	R	0.5	327	4.0	K	S	0.3
313	3.0	I	S	0.5	436	4.0	K	T	0.1
434	3.0	I	T	0.3	043	5.0	L	A	0.08
189	3.5	J	A	0.15	044	5.0	L	B	0.08
190	3.5	J	B	0.15	045	5.0	L	C	0.08
192	3.5	J	C	0.15	046	5.0	L	D	0.08
193	3.5	J	D	0.15	047	5.0	L	E	0.15
195	3.5	J	E	0.35	048	5.0	L	F	0.15
196	3.5	J	F	0.35	049	5.0	L	G	0.15
197	3.5	J	G	0.35	202	5.0	L	H	0.08
191	3.5	J	H	0.15	203	5.0	L	I	0.08
194	3.5	J	I	0.15	204	5.0	L	J	0.15
198	3.5	J	J	0.35	328	5.0	L	K	0.08
314	3.5	J	K	0.15	329	5.0	L	L	0.08
315	3.5	J	L	0.15	330	5.0	L	M	0.08
316	3.5	J	M	0.15	331	5.0	L	N	0.08
317	3.5	J	N	0.15	332	5.0	L	P	0.15
318	3.5	J	P	0.35	333	5.0	L	R	0.15
319	3.5	J	R	0.35	334	5.0	L	S	0.15
320	3.5	J	S	0.35	437	5.0	L	T	0.08
435	3.5	J	T	0.15	050	6.0	M	A	0.06
036	4.0	K	A	0.1	051	6.0	M	B	0.06
037	4.0	K	B	0.1	052	6.0	M	C	0.06
038	4.0	K	C	0.1	053	6.0	M	D	0.06
039	4.0	K	D	0.1	054	6.0	M	E	0.08
040	4.0	K	E	0.3	055	6.0	M	F	0.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, THREE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/5

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
056	6.0	M	G	0.08	211	8.0	P	H	0.03
205	6.0	M	H	0.06	212	8.0	P	I	0.03
206	6.0	M	I	0.06	213	8.0	P	J	0.06
207	6.0	M	J	0.08	349	8.0	P	K	0.03
335	6.0	M	K	0.06	350	8.0	P	L	0.03
336	6.0	M	L	0.06	351	8.0	P	M	0.03
337	6.0	M	M	0.06	352	8.0	P	N	0.03
338	6.0	M	N	0.06	353	8.0	P	P	0.06
339	6.0	M	P	0.08	354	8.0	P	R	0.06
340	6.0	M	R	0.08	355	8.0	P	P	0.06
341	6.0	M	S	0.08	440	8.0	P	T	0.03
438	6.0	M	T	0.06	071	9.0	Q	A	0.018
057	7.0	N	A	0.04	072	9.0	Q	B	0.018
058	7.0	N	B	0.04	073	9.0	Q	C	0.02
059	7.0	N	C	0.04	074	9.0	Q	D	0.02
060	7.0	N	D	0.04	075	9.0	Q	E	0.05
061	7.0	N	E	0.07	076	9.0	Q	F	0.05
062	7.0	N	F	0.07	077	9.0	Q	G	0.05
063	7.0	N	G	0.07	214	9.0	Q	H	0.02
208	7.0	N	H	0.04	215	9.0	Q	I	0.02
209	7.0	N	I	0.04	216	9.0	Q	J	0.05
210	7.0	N	J	0.07	356	9.0	Q	K	0.018
342	7.0	N	K	0.04	357	9.0	Q	L	0.018
343	7.0	N	L	0.04	358	9.0	Q	M	0.02
344	7.0	N	M	0.04	359	9.0	Q	N	0.02
345	7.0	N	N	0.04	360	9.0	Q	P	0.05
346	7.0	N	P	0.07	361	9.0	Q	R	0.05
347	7.0	N	R	0.07	362	9.0	Q	S	0.05
348	7.0	N	S	0.07	441	9.0	Q	T	0.02
439	7.0	N	T	0.04	078	10.0	R	A	0.02
064	8.0	P	A	0.03	079	10.0	R	B	0.02
065	8.0	P	B	0.03	080	10.0	R	C	0.02
066	8.0	P	C	0.03	081	10.0	R	D	0.02
067	8.0	P	D	0.03	082	10.0	R	E	0.04
068	8.0	P	E	0.06	083	10.0	R	F	0.04
069	8.0	P	F	0.06	084	10.0	R	G	0.04
070	8.0	P	G	0.06	217	10.0	R	H	0.02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, THREE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/5

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
218	10.0	R	I	0.02	225	15.0	T	J	0.03
219	10.0	R	J	0.04	377	15.0	T	K	0.01
363	10.0	R	K	0.02	378	15.0	T	L	0.01
364	10.0	R	L	0.02	379	15.0	T	M	0.011
365	10.0	R	M	0.02	380	15.0	T	N	0.011
366	10.0	R	N	0.02	381	15.0	T	P	0.02
367	10.0	R	P	0.04	382	15.0	T	R	0.02
368	10.0	R	R	0.04	383	15.0	T	S	0.02
369	10.0	R	S	0.04	444	15.0	T	T	0.011
442	10.0	R	T	0.02	099	20.0	U	A	0.007
085	12.5	S	A	0.013	100	20.0	U	B	0.007
086	12.5	S	B	0.013	101	20.0	U	C	0.007
087	12.5	S	C	0.015	102	20.0	U	D	0.007
088	12.5	S	D	0.015	103	20.0	U	E	0.01
089	12.5	S	E	0.03	104	20.0	U	F	0.01
090	12.5	S	F	0.03	105	20.0	U	G	0.01
091	12.5	S	G	0.03	226	20.0	U	H	0.007
220	12.5	S	H	0.013	227	20.0	U	I	0.007
221	12.5	S	I	0.013	228	20.0	U	J	0.01
222	12.5	S	J	0.03	384	20.0	U	K	0.007
370	12.5	S	K	0.013	385	20.0	U	L	0.007
371	12.5	S	L	0.013	386	20.0	U	M	0.007
372	12.5	S	M	0.015	387	20.0	U	N	0.007
373	12.5	S	N	0.015	388	20.0	U	M	0.01
374	12.5	S	P	0.03	389	20.0	U	R	0.01
375	12.5	S	R	0.03	390	20.0	U	S	0.01
376	12.5	S	S	0.03	445	20.0	U	T	0.07
443	12.5	S	T	0.015	106	25.0	V	A	0.006
092	15.0	T	A	0.01	107	25.0	V	B	0.006
093	15.0	T	B	0.01	108	25.0	V	C	0.006
094	15.0	T	C	0.011	109	25.0	V	D	0.006
095	15.0	T	D	0.011	110	25.0	V	E	0.007
096	15.0	T	E	0.02	111	25.0	V	F	0.007
097	15.0	T	F	0.02	112	25.0	V	G	0.007
098	15.0	T	G	0.02	229	25.0	V	H	0.006
223	15.0	T	H	0.013	230	25.0	V	I	0.006
224	15.0	T	I	0.015	231	25.0	V	J	0.007

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, THREE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/5

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
391	25.0	V	K	0.006	406	35.0	X	L	0.004
392	25.0	V	L	0.006	407	35.0	X	M	0.004
393	25.0	V	M	0.006	408	35.0	X	N	0.004
394	25.0	V	N	0.006	409	35.0	X	P	0.005
395	25.0	V	P	0.007	410	35.0	X	R	0.005
396	25.0	V	R	0.007	411	35.0	X	S	0.005
397	25.0	V	S	0.007	448	35.0	X	T	0.004
446	25.0	V	T	0.006	238	40.0	Y	A	0.0038
113	30.0	W	A	0.005	239	40.0	Y	B	0.0038
114	30.0	W	B	0.005	241	40.0	Y	C	0.0038
115	30.0	W	C	0.005	242	40.0	Y	D	0.0038
116	30.0	W	D	0.005	244	40.0	Y	E	0.0052
117	30.0	W	E	0.006	245	40.0	Y	F	0.0052
118	30.0	W	F	0.006	246	40.0	Y	G	0.0052
119	30.0	W	G	0.006	240	40.0	Y	H	0.0038
232	30.0	W	H	0.005	243	40.0	Y	I	0.0038
233	30.0	W	I	0.005	247	40.0	Y	J	0.0052
234	30.0	W	J	0.006	412	40.0	Y	K	0.0038
398	30.0	W	K	0.005	413	40.0	Y	L	0.0038
399	30.0	W	L	0.005	414	40.0	Y	M	0.0038
400	30.0	W	M	0.005	415	40.0	Y	N	0.0038
401	30.0	W	N	0.005	416	40.0	Y	P	0.0052
402	30.0	W	P	0.006	417	40.0	Y	R	0.0052
403	30.0	W	R	0.006	418	40.0	Y	S	0.0052
404	30.0	W	S	0.006	449	40.0	Y	T	0.0038
447	30.0	W	T	0.005	127	50.0	Z	A	0.003
120	35.0	X	A	0.004	128	50.0	Z	B	0.003
121	35.0	X	B	0.004	129	50.0	Z	C	0.003
122	35.0	X	C	0.004	130	50.0	Z	D	0.003
123	35.0	X	D	0.004	131	50.0	Z	E	0.004
124	35.0	X	E	0.005	132	50.0	Z	F	0.004
125	35.0	X	F	0.005	133	50.0	Z	G	0.004
126	35.0	X	G	0.005	248	50.0	Z	H	0.003
235	35.0	X	H	0.004	249	50.0	Z	I	0.003
236	35.0	X	I	0.004	250	50.0	Z	J	0.003
237	35.0	X	J	0.005	419	50.0	Z	K	0.004
405	35.0	X	K	0.004	420	50.0	Z	L	0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, THREE POLE (0.2 TO 50 AMPERES)

MIL-C-55629/5


TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
421	50.0	Z	M	0.003	424	50.0	Z	R	0.004
422	50.0	Z	N	0.003	425	50.0	Z	S	0.004
423	50.0	Z	P	0.004	450	50.0	Z	T	0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP-FREE, DOUBLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/6

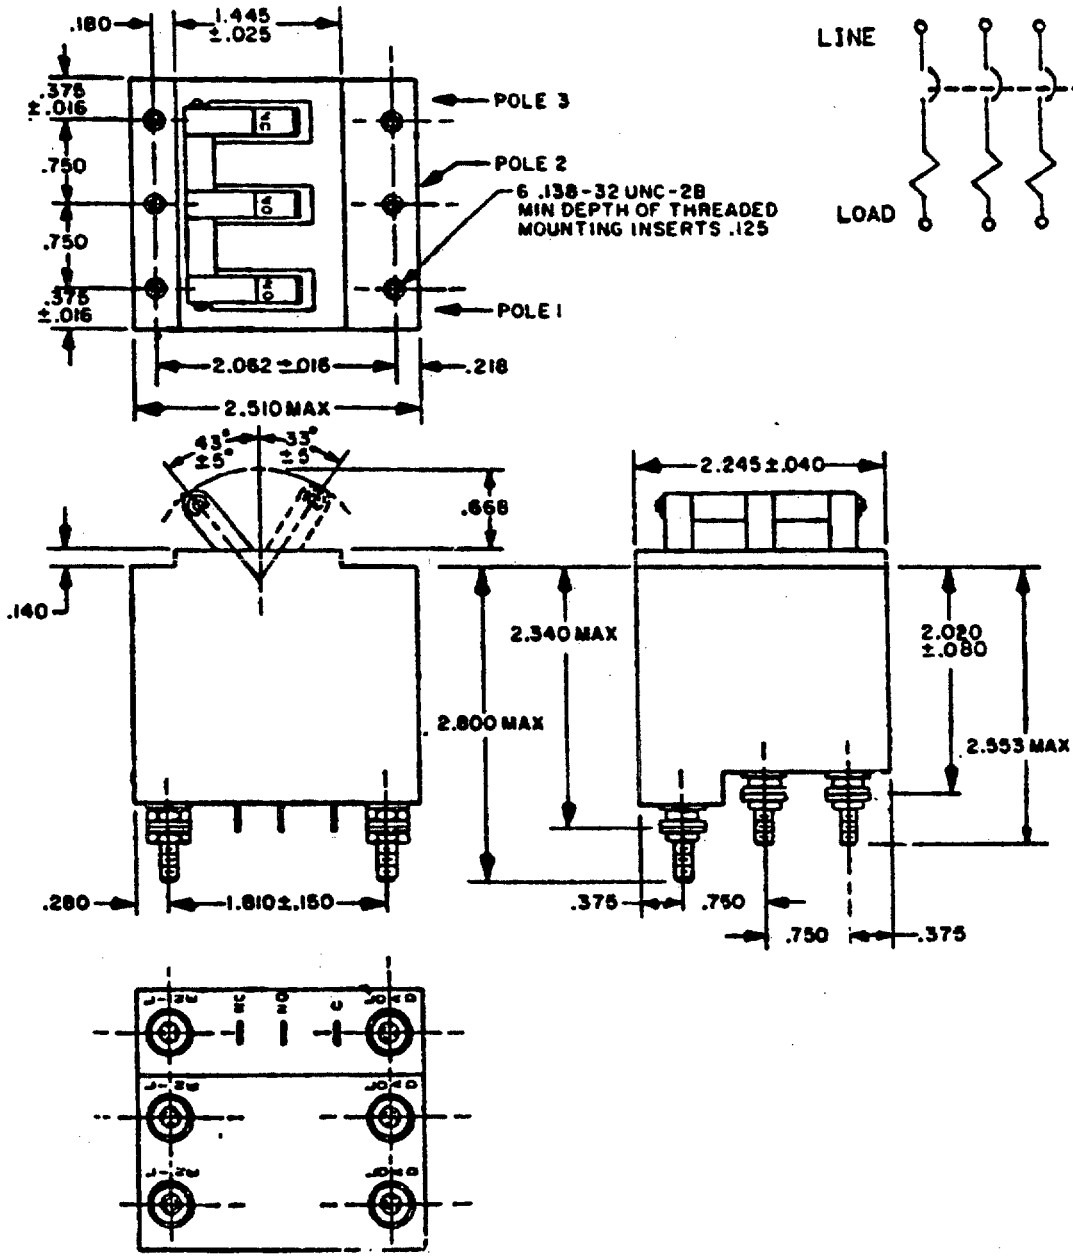

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE, AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/6

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
001	0.2	A	A	32	009	0.5	C	B	6
002	0.2	A	B	32	010	0.5	C	C	6
003	0.2	A	C	34	011	0.5	C	D	6
004	0.2	A	D	34	012	0.5	C	E	12
005	0.2	A	E	72	013	0.5	C	F	12
006	0.2	A	F	72	014	0.5	C	G	12
007	0.2	A	G	72	147	0.5	C	H	6
134	0.2	A	H	32	148	0.5	C	I	6
135	0.2	A	I	34	149	0.5	C	J	12
136	0.2	A	J	72	265	0.5	C	K	6
251	0.2	A	K	32	266	0.5	C	L	6
252	0.2	A	L	32	267	0.5	C	M	6
253	0.2	A	M	34	268	0.5	C	N	6
254	0.2	A	N	34	269	0.5	C	P	12
255	0.2	A	P	72	270	0.5	C	R	12
256	0.2	A	R	72	271	0.5	C	S	12
257	0.2	A	S	72	428	0.5	C	T	6
426	0.2	A	T	34	150	0.75	D	A	3
137	0.25	B	A	21	151	0.75	D	B	3
138	0.25	B	B	21	153	0.75	D	C	3
140	0.25	B	C	23	154	0.75	D	D	3
141	0.25	B	D	23	156	0.75	D	E	7
143	0.25	B	E	43	157	0.75	D	F	7
144	0.25	B	F	43	158	0.75	D	G	7
145	0.25	B	G	43	152	0.75	D	H	3
139	0.25	B	H	21	155	0.75	D	I	3
142	0.25	B	I	23	159	0.75	D	J	7
146	0.25	B	J	43	272	0.75	D	K	3
258	0.25	B	K	21	273	0.75	D	L	3
259	0.25	B	L	21	274	0.75	D	M	3
260	0.25	B	M	23	275	0.75	D	N	3
261	0.25	B	N	23	276	0.75	D	P	7
262	0.25	B	P	43	277	0.75	D	R	7
263	0.25	B	R	43	278	0.75	D	S	7
264	0.25	B	S	43	429	0.75	D	T	3
427	0.25	B	T	23	015	1.0	E	A	2
008	0.5	C	A	6	016	1.0	E	B	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/6

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
017	1.0	E	C	2	025	2.0	G	D	0.5
018	1.0	E	D	2	026	2.0	G	E	0.8
019	1.0	E	E	4	027	2.0	G	F	0.8
020	1.0	E	F	4	028	2.0	G	G	0.8
021	1.0	E	G	4	173	2.0	G	H	0.5
160	1.0	E	H	2	174	2.0	G	I	0.5
161	1.0	E	I	2	175	2.0	G	J	0.8
162	1.0	E	J	4	293	2.0	G	K	0.5
279	1.0	E	K	2	294	2.0	G	L	0.5
280	1.0	E	L	2	295	2.0	G	M	0.5
281	1.0	E	M	2	296	2.0	G	N	0.5
282	1.0	E	N	2	297	2.0	G	P	0.8
283	1.0	E	P	4	298	2.0	G	R	0.8
284	1.0	E	R	4	299	2.0	G	S	0.8
285	1.0	E	S	4	432	2.0	G	T	0.5
430	1.0	E	T	2	176	2.5	H	A	0.35
163	1.5	F	A	0.9	177	2.5	H	B	0.35
164	1.5	F	B	0.9	179	2.5	H	C	0.35
166	1.5	F	C	0.9	180	2.5	H	D	0.35
167	1.5	F	D	0.9	182	2.5	H	E	0.6
169	1.5	F	E	2	183	2.5	H	F	0.6
170	1.5	F	F	2	184	2.5	H	G	0.6
171	1.5	F	G	2	178	2.5	H	H	0.35
165	1.5	F	H	0.9	181	2.5	H	I	0.35
168	1.5	F	I	0.9	185	2.5	H	J	0.6
172	1.5	F	J	2	300	2.5	H	K	0.35
286	1.5	F	K	0.9	301	2.5	H	L	0.35
287	1.5	F	L	0.9	302	2.5	H	M	0.35
288	1.5	F	M	0.9	302	2.5	H	N	0.35
289	1.5	F	N	0.9	304	2.5	H	P	0.6
290	1.5	F	P	2	305	2.5	H	R	0.6
291	1.5	F	R	2	306	2.5	H	S	0.6
292	1.5	F	S	2	433	2.5	H	T	0.35
431	1.5	F	T	0.9	029	3.0	I	A	0.3
022	2.0	G	A	0.5	030	3.0	I	B	0.3
023	2.0	G	B	0.5	031	3.0	I	C	0.3
024	2.0	G	C	0.5	032	3.0	I	D	0.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/6

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
033	3.0	I	E	0.5	041	4.0	K	F	0.3
034	3.0	I	F	0.5	042	4.0	K	G	0.3
035	3.0	I	G	0.5	199	4.0	K	H	0.1
186	3.0	I	H	0.3	200	4.0	K	I	0.1
187	3.0	I	I	0.3	201	4.0	K	J	0.3
188	3.0	I	J	0.5	321	4.0	K	K	0.1
307	3.0	I	K	0.3	322	4.0	K	L	0.1
308	3.0	I	L	0.3	323	4.0	K	M	0.1
309	3.0	I	M	0.3	324	4.0	K	N	0.1
310	3.0	I	N	0.3	325	4.0	K	P	0.3
311	3.0	I	P	0.5	326	4.0	K	R	0.3
312	3.0	I	R	0.5	327	4.0	K	S	0.3
313	3.0	I	S	0.5	436	4.0	K	T	0.1
434	3.0	I	T	0.3	043	5.0	L	A	0.08
189	3.5	J	A	0.15	044	5.0	L	B	0.08
190	3.5	J	B	0.15	045	5.0	L	C	0.08
192	3.5	J	C	0.15	046	5.0	L	D	0.08
193	3.5	J	D	0.15	047	5.0	L	E	0.15
195	3.5	J	E	0.35	048	5.0	L	F	0.15
196	3.5	J	F	0.35	049	5.0	L	G	0.15
197	3.5	J	G	0.35	202	5.0	L	H	0.08
191	3.5	J	H	0.15	203	5.0	L	I	0.08
194	3.5	J	I	0.15	204	5.0	L	J	0.15
198	3.5	J	J	0.35	328	5.0	L	K	0.08
314	3.5	J	K	0.15	329	5.0	L	L	0.08
315	3.5	J	L	0.15	330	5.0	L	M	0.08
316	3.5	J	M	0.15	331	5.0	L	N	0.08
317	3.5	J	N	0.15	332	5.0	L	P	0.15
318	3.5	J	P	0.35	333	5.0	L	R	0.15
319	3.5	J	R	0.35	334	5.0	L	S	0.15
320	3.5	J	S	0.35	437	5.0	L	T	0.08
435	3.5	J	T	0.15	050	6.0	M	A	0.06
036	4.0	K	A	0.1	051	6.0	M	B	0.06
037	4.0	K	B	0.1	052	6.0	M	C	0.06
039	4.0	K	C	0.1	053	6.0	M	D	0.06
039	4.0	K	D	0.1	054	6.0	M	E	0.08
040	4.0	K	E	0.3	055	6.0	M	F	0.08

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/6

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
056	6.0	M	G	0.08	211	8.0	P	H	0.03
205	6.0	M	H	0.06	212	8.0	P	I	0.03
206	6.0	M	I	0.06	213	8.0	P	J	0.06
207	6.0	M	J	0.08	349	8.0	P	K	0.03
335	6.0	M	K	0.06	350	8.0	P	L	0.03
336	6.0	M	L	0.06	351	8.0	P	M	0.03
337	6.0	M	M	0.06	352	8.0	P	N	0.03
338	6.0	M	N	0.06	353	8.0	P	P	0.06
339	6.0	M	P	0.08	354	8.0	P	R	0.06
340	6.0	M	R	0.08	355	8.0	P	P	0.06
341	6.0	M	S	0.08	440	8.0	P	T	0.03
438	6.0	M	T	0.06	071	9.0	Q	A	0.018
057	7.0	N	A	0.04	072	9.0	Q	B	0.018
058	7.0	N	B	0.04	073	9.0	Q	C	0.02
059	7.0	N	C	0.04	074	9.0	Q	D	0.02
060	7.0	N	D	0.04	075	9.0	Q	E	0.05
061	7.0	N	E	0.07	076	9.0	Q	F	0.05
062	7.0	N	F	0.07	077	9.0	Q	G	0.05
063	7.0	N	G	0.07	214	9.0	Q	H	0.02
208	7.0	N	H	0.04	215	9.0	Q	I	0.02
209	7.0	N	I	0.04	216	9.0	Q	J	0.05
210	7.0	N	J	0.07	356	9.0	Q	K	0.018
342	7.0	N	K	0.04	357	9.0	Q	L	0.018
343	7.0	N	L	0.04	358	9.0	Q	M	0.02
344	7.0	N	M	0.04	359	9.0	Q	N	0.02
345	7.0	N	N	0.04	360	9.0	Q	P	0.05
346	7.0	N	P	0.07	361	9.0	Q	R	0.05
347	7.0	N	R	0.07	362	9.0	Q	S	0.05
348	7.0	N	S	0.07	441	9.0	Q	T	0.02
439	7.0	N	T	0.04	078	10.0	R	A	0.02
064	8.0	P	A	0.03	079	10.0	R	B	0.02
065	8.0	P	B	0.03	080	10.0	R	C	0.02
066	8.0	P	C	0.03	081	10.0	R	D	0.02
067	8.0	P	D	0.03	082	10.0	R	E	0.04
068	8.0	P	E	0.06	083	10.0	R	F	0.04
069	8.0	P	F	0.06	084	10.0	R	G	0.04
070	8.0	P	G	0.06	217	10.0	R	H	0.02

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/6

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
218	10.0	R	I	0.02	225	15.0	T	J	0.03
219	10.0	R	J	0.04	377	15.0	T	K	0.01
363	10.0	R	K	0.02	378	15.0	T	L	0.01
364	10.0	R	L	0.02	379	15.0	T	M	0.011
365	10.0	R	M	0.02	380	15.0	T	N	0.011
366	10.0	R	N	0.02	381	15.0	T	P	0.02
367	10.0	R	P	0.04	382	15.0	T	R	0.02
368	10.0	R	R	0.04	383	15.0	T	S	0.02
369	10.0	R	S	0.04	444	15.0	T	T	0.011
442	10.0	R	T	0.02	099	20.0	U	A	0.007
085	12.5	S	A	0.013	100	20.0	U	B	0.007
086	12.5	S	B	0.013	101	20.0	U	C	0.007
087	12.5	S	C	0.015	102	20.0	U	D	0.007
088	12.5	S	D	0.015	103	20.0	U	E	0.01
089	12.5	S	E	0.03	104	20.0	U	F	0.01
090	12.5	S	F	0.03	105	20.0	U	G	0.01
091	12.5	S	G	0.03	226	20.0	U	H	0.007
220	12.5	S	H	0.013	227	20.0	U	I	0.007
221	12.5	S	I	0.013	228	20.0	U	J	0.01
222	12.5	S	J	0.03	384	20.0	U	K	0.007
370	12.5	S	K	0.013	385	20.0	U	L	0.007
371	12.5	S	L	0.013	386	20.0	U	M	0.007
372	12.5	S	M	0.015	387	20.0	U	N	0.007
373	12.5	S	N	0.015	388	20.0	U	M	0.01
374	12.5	S	P	0.03	389	20.0	U	R	0.01
375	12.5	S	R	0.03	390	20.0	U	S	0.01
376	12.5	S	S	0.03	445	20.0	U	T	0.07
443	12.5	S	T	0.015	106	25.0	V	A	0.006
092	15.0	T	A	0.01	107	25.0	V	B	0.006
093	15.0	T	B	0.01	108	25.0	V	C	0.006
094	15.0	T	C	0.011	109	25.0	V	D	0.006
095	15.0	T	D	0.011	110	25.0	V	E	0.007
096	15.0	T	E	0.02	111	25.0	V	F	0.007
097	15.0	T	F	0.02	112	25.0	V	G	0.007
098	15.0	T	G	0.02	229	25.0	V	H	0.006
223	15.0	T	H	0.013	230	25.0	V	I	0.006
224	15.0	T	I	0.015	231	25.0	V	J	0.007

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/6

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
391	25.0	V	K	0.006	406	35.0	X	L	0.004
392	25.0	V	L	0.006	407	35.0	X	M	0.004
393	25.0	V	M	0.006	408	35.0	X	N	0.004
394	25.0	V	N	0.006	409	35.0	X	P	0.005
395	25.0	V	P	0.007	410	35.0	X	R	0.005
396	25.0	V	R	0.007	411	35.0	X	S	0.005
397	25.0	V	S	0.007	448	35.0	X	T	0.004
446	25.0	V	T	0.006	238	40.0	Y	A	0.0038
113	30.0	W	A	0.005	239	40.0	Y	B	0.0038
114	30.0	W	B	0.005	241	40.0	Y	C	0.0038
115	30.0	W	C	0.005	242	40.0	Y	D	0.0038
116	30.0	W	D	0.005	244	40.0	Y	E	0.0052
117	30.0	W	E	0.006	245	40.0	Y	F	0.0052
118	30.0	W	F	0.006	246	40.0	Y	G	0.0052
119	30.0	W	G	0.006	240	40.0	Y	H	0.0038
232	30.0	W	H	0.005	243	40.0	Y	I	0.0038
233	30.0	W	I	0.005	247	40.0	Y	J	0.0052
234	30.0	W	J	0.006	412	40.0	Y	K	0.0038
398	30.0	W	K	0.005	413	40.0	Y	L	0.0038
399	30.0	W	L	0.005	414	40.0	Y	M	0.0038
400	30.0	W	M	0.005	415	40.0	Y	N	0.0038
401	30.0	W	N	0.005	416	40.0	Y	P	0.0052
402	30.0	W	P	0.006	417	40.0	Y	R	0.0052
403	30.0	W	R	0.006	418	40.0	Y	S	0.0052
404	30.0	W	S	0.006	449	40.0	Y	T	0.0038
447	30.0	W	T	0.005	127	50.0	Z	A	0.003
120	35.0	X	A	0.004	128	50.0	Z	B	0.003
121	35.0	X	B	0.004	129	50.0	Z	C	0.003
122	35.0	X	C	0.004	130	50.0	Z	D	0.003
123	35.0	X	D	0.004	131	50.0	Z	E	0.004
124	35.0	X	E	0.005	132	50.0	Z	F	0.004
125	35.0	X	F	0.005	133	50.0	Z	G	0.004
126	35.0	X	G	0.005	248	50.0	Z	H	0.003
235	35.0	X	H	0.004	249	50.0	Z	I	0.003
236	35.0	X	I	0.004	250	50.0	Z	J	0.003
237	35.0	X	J	0.005	419	50.0	Z	K	0.004
405	35.0	X	K	0.004	420	50.0	Z	L	0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

CIRCUIT BREAKERS, MAGNETIC, UNSEALED, TRIP FREE, DOUBLE POLE AUXILIARY CONTACTS
(0.2 TO 50 AMPERES)

MIL-C-55629/6

TABLE VII. CIRCUIT BREAKER DASH NUMBERS AND APPLICABLE CHARACTERISTICS (CONT.)

DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX	DASH NUMBER	CURRENT RATING		VOLTAGE FREQ AND TIME DELAY CODE	RESISTANCE/ IMPEDANCE OHMS - MAX
	AMPS	CODE				AMPS	CODE		
421	50.0	Z	M	0.003	424	50.0	Z	R	0.004
422	50.0	Z	N	0.003	425	50.0	Z	S	0.004
423	50.0	Z	P	0.004	450	50.0	Z	T	0.003

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METER, TIME TOTALIZING

MIL-M-7793

SCOPE: THIS SECTION COVERS HERMETICALLY SEALED METERS, TIME TOTALIZING. THESE ARE INTENDED TO BE USED IN EQUIPMENT WHERE THERE IS A REQUIREMENT FOR ACCURATELY RECORDING THE NUMBER OF HOURS WHICH THE EQUIPMENT HAS OPERATED.

PART NUMBER EXAMPLE: M7793/ 8 -001


MILITARY STANDARD

SPECIFICATION SLASH SHEET

DASH NUMBER

METER, TIME TOTALIZING, DIGITAL 115 VOLT, 60 OR 400 Hz

MIL-M-7793/8

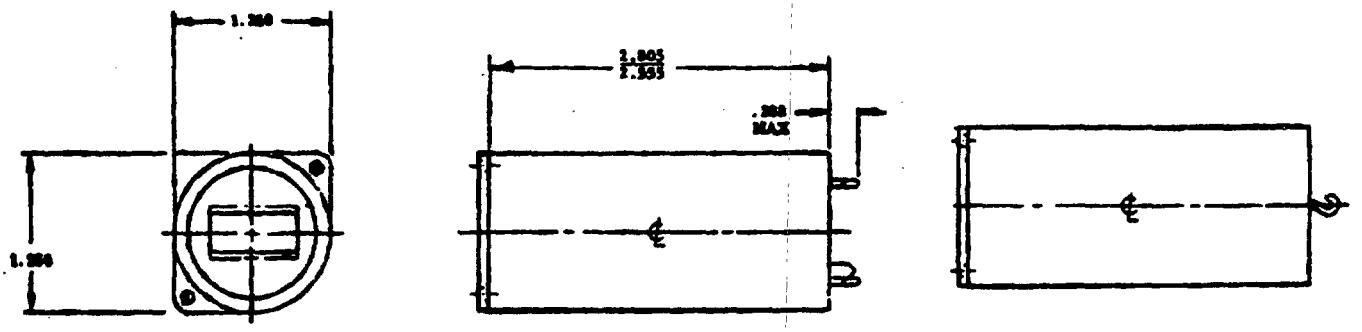

DASH NO.	TYPE
-1	WITH FLANGE 400 Hz
-2	WITH FLANGE 60 Hz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED

MIL-M-10304

SCOPE: THIS SECTION COVERS WATERTIGHT, RUGGEDIZED 1- AND 1-1/2 INCH SQUARE FLANGE, 1-, 2-1/2, 3-1/2 AND 4-1/2 INCH ROUND FLANGE (FLUSH MOUNTING), AND 4-1/2 AND 5-1/2 INCH RECTANGULAR FLANGE, PANEL TYPE, INDICATING METER S.

TYPE DESIGNATION:

MR26	P	002	DC	VV	R

STYLE

FIRST DIGIT
- 1 = 1-1/2
- 2 = 2-1/2
- 3 = 3-1/2
- 4 = 4-1/2

SECOND DIGIT
- 3 = SQUARE FLANGE, WATERTIGHT
- 4 = ROUND FLANGE, WATERTIGHT, LONG SCALE
- 6 = ROUND FLANGE, WATERTIGHT

COLOR SCHEME: A, B, F, M, P, W, Y

FULL-SCALE VALUE
- D = TENTHS
- H = HUNDREDS
- T = TENS
- U = UNITS

OR THREE DIGITS (LEFT JUSTIFIED, R = DECIMAL POINT)

KIND OF CURRENT: AC, AE, AF, AR, DC
- AC = ALTERNATING CURRENT 60Hz, NOMINAL FREQUENCY 25 TO 125 Hz, OPERATING FREQUENCY
- AE = ALTERNATING CURRENT 800Hz, NOMINAL FREQUENCY
- AF = ALTERNATING CURRENT 400Hz, NOMINAL FREQUENCY
- AR = ALTERNATING CURRENT SINE WAVE 60 TO 1000Hz, NOMINAL FREQUENCY
- DC = DIRECT CURRENT

ELECTRICAL UNITS: AA, KA, KV, MA, MV, UA, VV
- AA = AMPERES
- KA = KILOAMPERES
- KV = KILOVOLTS
- MA = MILLIAMPERES
- MV = MILLIVOLTS
- UA = MICROAMPERES
- VV = VOLTS

RUGGEDIZED CONSTRUCTION = R

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
VOLTMETER, DC (SQUARE FLANGE, 1-1/2 INCH) STYLE 13

MIL-M-10304/21

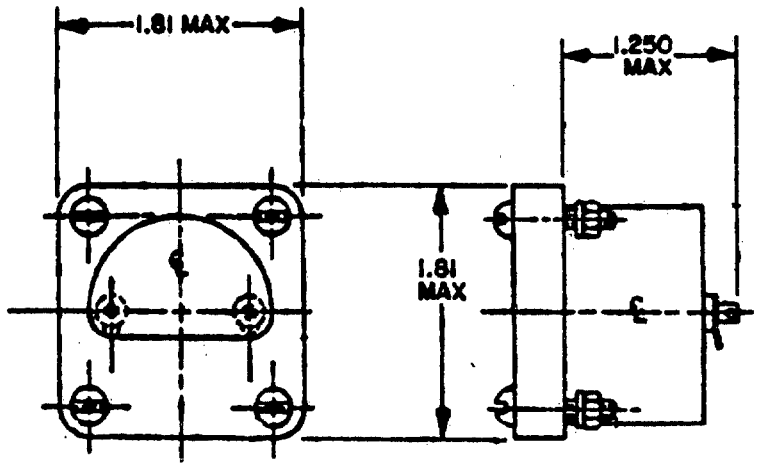


TABLE I. FULL SCALE RANGES.

VOLTS (VV) ZERO LEFT
2
10
20
30
50
100
200

PART NUMBERS:	VOLTS: SEE TABLE I.
MR13*---DCVVR	2 THRU 200 VV

* A, B, F, M, P, W, Y

Source: https://assist.dla.mil - Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
AMMETER, DC (SQUARE FLANGE, 1-1/2 INCH) STYLE 13

MIL-M-10304/24

SEE DRAWING PAGE 430.2

TABLE I. FULL SCALE RANGES.

MICROAMPERES (UA)		MILLIAMPERES (MA)	
ZERO LEFT	ZERO CENTER	ZERO LEFT	ZERO CENTER
10	10-0-10	1	1-0-1
30	30-0-30	5	5-0-5
50	50-0-50	10	10-0-10
100	100-0-100	50	100-0-100
200	200-0-200	100	500-0-500
300	300-0-300	200	
500	500-0-500	500	

PART NUMBERS:	VOLTS: SEE TABLE I.
MR13*---DCUAR	50 TO LESS THAN 100 UA
MR13*---DCUAR	100 TO LESS THAN 500 UA
MR13*500DCUAR	
MR13*---DCMAR	10 MA THRU 1 AA
MR13*---DCMAR	10 THRU 500 MA
MR13*---DCMAR	500 UA TO LESS THAN 10MA
MR13*---DCVVR	THRU 200 VV
MR13*001DCMAR MR13*5H5DCUAR MR13$5T5DCUAR MR13$1H1DCUAR MR13*1U1DCMAR MR13*5U5DCMAR MR13$1T1DCMAR MR13*1H1DCMAR	

* A, B, F, M, P, W, Y
$ A, B, F, P, W

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
VOLTMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 2-1/2 INCH) STYLE 26

MIL-M-10304/4

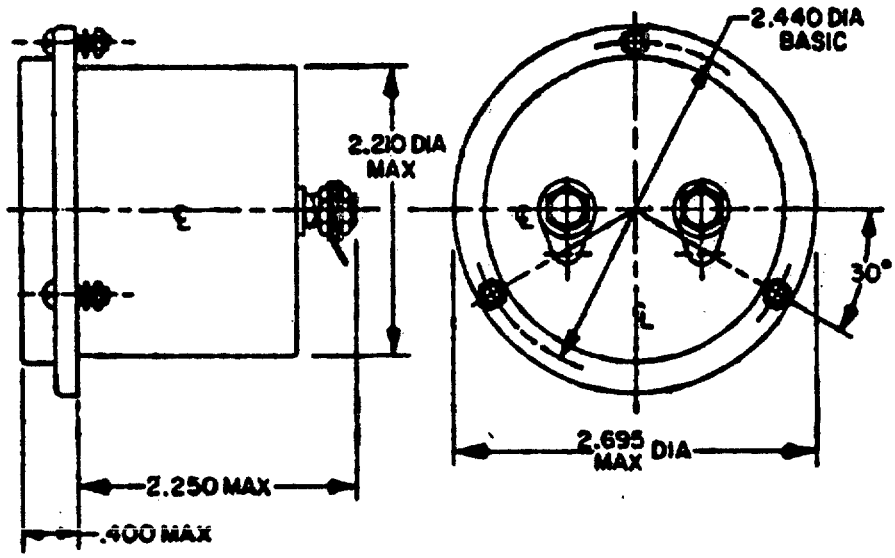


TABLE I. FULL SCALE RANGES.

VOLTS (VV)			KILOVOLTS (KV) #	
ZERO LEFT		ZERO CENTER		
2	100	50-0-50	1	10
5	150	100-0-100	2	20
10	200	200-0-200	5	30
20	300			
30	500#			
50				

USED WITH EXTERNAL RESISTOR.

PART NUMBERS:	VOLTS: SEE TABLE I.
MR26*---DCVVR	2 THRU 300 VV
MR26*---DCVVR	500 VV
MR26*---DCKVR	1 THRU 30 KV
MR26*1H1DCVVR MR26*2H2DCVVR MR26*5T5DCVVR	

* A, B, F, P, M, W, Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
AMMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 2-1/2 INCH) STYLE 26

MIL-M-10304/5

TABLE I. FULL SCALE RANGES.

AMPERES (AA)		MICROAMPERES (UA)		MILLIAMPERES (MA)		KILOAMPERES (KA)
ZERO LEFT	ZERO CENTER	ZERO LEFT	ZERO CENTER	ZERO LEFT	ZERO CENTER	
1	1-0-1	10	30-0-30	1	1-0-1	1.0@
2	5-0-5	20	50-0-50	5	5-0-5	1.2@
5	10-0-10	30	100-0-100	10	10-0-10	
10	10-0-30@	50	300-0-300	50	50-0-50	
20	20-0-20@	100	500-0-500	100	100-0-100	
30	30-0-30@	200		200	500-0-500	
50@		300		300		
100@		500		500		
200@						
300@						
500@						

PART NUMBERS:	VOLTS: SEE TABLE I.
MR26*---DCAAR	50 THRU 500 AA @
MR26*---DCAAR	1 THRU 30 AA
MR26*---DCKAR	1 THRU 1.2 KA @
MR26*---DCMAR	1 THRU 5 MA
MR26$---DCMAR	1 THRU 500 MA
MR26*---DCMAR	10 THRU 500 MA
MR26*---DCMAR	OVER 500 UA UP TO BUT NOT INCLUDING 10 MA
MR26$---DCUAR	20 THRU 500 UA
MR26*---DCUAR	50 THRU 500 UA
MR26*---DCUAR	50 UP TO BUT NOT INCLUDING 100 MA
MR26*---DCUAR	100 THRU 500 UA
MR26*1T1DCAAR	
MR26*1U1DCAAR	
MR26*1T3DCAAR@	
MR26*2T2DCAAR@	
MR26*3T3DCAAR@	
MR26*5U5DCAAR	
MR26*1H1DCMAR	
MR26*1T1DCMAR	
MR26*1U1DCMAR	
MR26*5H5DCMAR	
MR26*5T5DCMAR	
MR26*5U5DCMAR	
MR26*1H1DCUAR	
MR26*3H3DCUAR	
MR26*3T3DCUAR	
MR26*5H5DCUAR	
MR26*5T5DCUAR	
MR26$5T5DCVVR	

* A, B, F, M, P, W, Y $ A, B, F, P, W

SEE DRAWING PAGE 430.4

@ USED WITH EXTERNAL SHUNT

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
VOLTMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 2-1/2 INCH) STYLE 26

MIL-M-10304/6

SEE DRAWING PAGE 430.4

TABLE I. FULL SCALE RANGES.

VOLTS (VV OF AC, AF)			
2	8	30	300
3	10	80	500@
5	15	100	800@
		150	

@ USED WITH EXTERNAL RESISTOR.

PART NUMBERS:	VOLTS: SEE TABLE I.
MR26*---ACVVR, AFVVR	2 THRU 300 VV 500 THRU 800 VV @

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
AMMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 2-1/2 INCH) STYLE 26

MIL-M-10304/7

SEE DRAWING PAGE 430.4

TABLE II. FULL SCALE RANGES.

MILLIAMPERES (MA OF AC, AE, AF)		AMPERES (AA OF AC, AE, AF)		
5	100	1	10	50$
10	200	2	15	100$
20	300	5	20	200$
30	500		30	300$
50	100			500$

$ USED WITH EXTERNAL TRANSFORMER.

PART NUMBERS:	VOLTS: SEE TABLE II.
MR26*---ACMAR, AFMAR	5 THRU 500 MA
MR26#---ACMAR, AFMAR	10 THRU 500 MA
MR26*---AEMAR	10 THRU 500 MA
MR26*---ACMAR, AFMAR, AND AEMAR	1 THRU 30 AA 50 THRU 500 AA $

* A, B, F, P, M, W, Y
\# A, B, F, P, W,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
RECTIFIER-TYPE VOLTMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 2-1/2 INCH) STYLE 26

MIL-M-10304/25

SEE DRAWING PAGE 430.4

TABLE I. FULL SCALE RANGES.

VOLTS (VV)		KILOVOLTS (KV)	
2	100	1	10
5	200	2	20
10	300	5	30
20	500@		
30			
50			

@ USED WITH EXTERNAL RESISTOR.

PART NUMBERS:	VOLTS: SEE TABLE I.
MR26*---ARVVR	2 THRU 500 VV 1 THRU 30 KV @

* A, B, F, P, W

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE RUGGEDIZED,
VOLTMETER & AMMETER, DC, LONG SCALE, (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH) STYLE 34

MIL-M-10304/22

SEE DRAWING PAGE 430.9

TABLE I. FULL SCALE RANGES.

VOLTMETERS VOLTS (VV) ZERO LEFT	AMMETERS		KILOVOLTS (KV)@ ZERO LEFT	
	MICROAMPERES (UA) ZERO LEFT	MILLIAMPERES (MA) ZERO LEFT		
1	50	1	1	10
2	100	5	2	20
10	200	10	5	30
20	500	30		
30		50		
50				
100				
200				
300				
500				

@ USE WITH EXTERNAL RESISOR.

PART NUMBERS:	VOLTS: SEE TABLE I.
MR34*---DCMAR	1 THRU 10 MA
MR34*---DCVVR	1.5 THRU 500 VV
MR34*---DCKVR@	1 THRU 30 KV
MR34*---DCUAR	200 THRU 500 UA

* A, B, F, P, M, W, Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
VOLTMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH) STYLE 36

MIL-M-10304/11

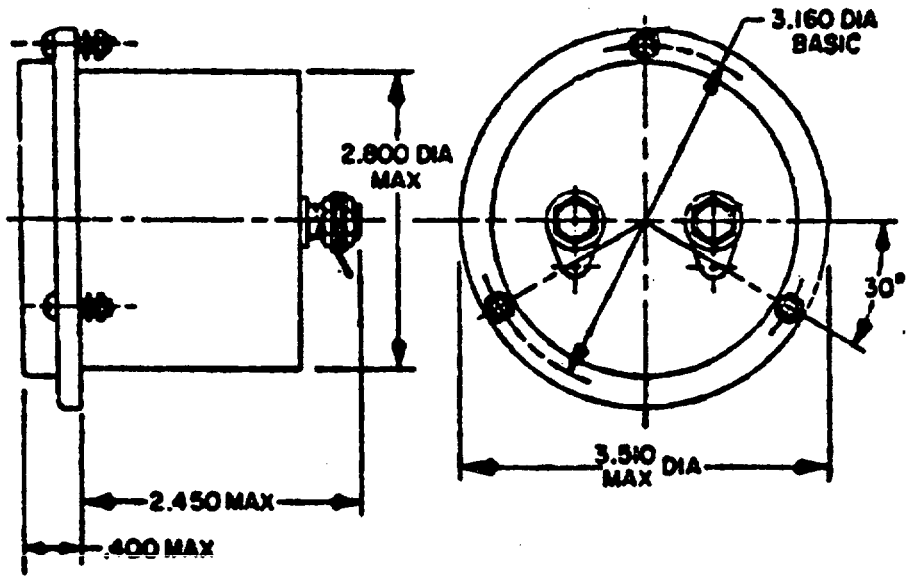


TABLE I. FULL SCALE RANGES.

VOLTS (VV)				KILOVOLTS (KV) @	
ZERO LEFT			ZERO CENTER		
2	20	150	30-0-30	1	10
10	30	200	50-0-50	2	20
	50	300	100-0-100	5	30
	100	500	200-0-200		
		800			

@ USED WITH EXTERNAL RESISTOR.

PART NUMBERS:	VOLTS: SEE TABLE I.
MR36*---DCVVR	2 THRU 800 VV
MR36*---DCKVR	1 THRU 30 KV@
MR36*1H1DCVVR MR36*2H2DCVVR MR36*3T3DCVVR MR36*5T5DCVVR	

* A, B, F, P, M, W, Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
AMMETER, DC (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH) STYLE 36
MIL-M-10304/12

TABLE I. FULL SCALE RANGES.

AMPERES (AA)		MICROAMPERES (UA)		MILLIAMPERES (MA)		KILOAMPERES (KA)
ZERO LEFT	ZERO CENTER	ZERO LEFT	ZERO CENTER	ZERO LEFT	ZERO CENTER	
1	5-0-5	20	30-0-30	1	1-0-1	1.0@
2	10-0-10	50	50-0-50	5	5-0-5	1.2@
5	10-0-30@	100	100-0-100	10	10-0-10	
10	20-0-20@	200	200-0-200	30	30-0-30	
20	30-0-30@	500	300-0-300	50	50-0-50	
30	50-0-50@			100	100-0-100	
50@				200	200-0-200	
100@ 200@				300	300-0-300	
300@ 500@				500	500-0-500	

PART NUMBERS:	VOLTS: SEE TABLE I.
MR36*---DCAAR	1 THRU 30 AA
MR36*---DCAAR	50 THRU 500 AA @
MR36*---DCKAR	1 THRU 1.2 KA @
MR36$---DCMAR	1 THRU 5 MA
MR36*---DCMAR	10 THRU 500 MA
MR36*---DCMAR	10 THRU 999 MA
MR36*---DCMAR	OVER 500 UA UP TO BUT NOT INCLUDING 10 MA
MR36$---DCUAR	20 THRU 300 UA
MR36*---DCUAR	20 UP TO LESS THAN 100 UA
MR36$---DCUAR	50 UA
MR36*---DCUAR	50 THRU 300 UA
MR36*---DCUAR	50 THRU 800 UA
MR36$---DCUAR	50 THRU 500 UA
MR36*---DCUAR	50 UP TO BUT NOT INCLUDING 100 UA
MR36*---DCUAR	100 THRU 500 UA
MR36*1T1DCAAR	
MR36*1T3DCAAR@	
MR36*2T2DCAAR@	
MR36*3T3DCAAR@	
MR36*5T5DCAAR@	
MR36*5U5DCAAR@	
MR36*1H1DCMAR	
MR36*1T1DCMAR	
MR36*1U1DCMAR	
MR36*2H2DCMAR	
MR36*3H3DCMAR	
MR36*3T3DCMAR	
MR36*5H5DCMAR	
MR36*5T5DCMAR	
MR36*5U5DCMAR	
MR36*1H1DCUAR	
MR36*2H2DCUAR	
MR36*3H3DCUAR	
MR36*3T3DCUAR	
MR36*5H5DCUAR	
MR36*5T5DCUAR	

* A, B, F, M, P, W, Y EXTERNAL SHUNT. $ A, B, F, P, W SEE DRAWING PAGE 430.9 @ USED WITH

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
VOLTMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH) STYLE 36

MIL-M-10304/13

SEE DRAWING PAGE 430.9

TABLE I. FULL SCALE RANGES.

VOLTS (VV OF AC, AE, AF)			
1.5	15	80	300
3	30	150	500@
8	50		800@
10			1000@

@ USED WITH EXTERNAL RESISTOR.

PART NUMBERS:	VOLTS: SEE TABLE I.
MR36*---ACVVR, AFVVR, AEVVR	1.5 THRU 300 VV 800 VV @
MR36*---ACVVR, AFVVR	1 THRU 300 VV 500THRU 1000 VV @

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
AMMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH) STYLE 36

MIL-M-10304/14

SEE DRAWING PAGE 430.9

TABLE II. FULL SCALE RANGES.

MILLIAMPERES (MA OF AC, AE, AF)		AMPERES (AA OF AC, AE, AF)		
10	100	1	10	100$
20	200	2	20	200$
30	300	5	30	300$
50	500		50	500$

$ USED WITH EXTERNAL TRANSFORMER.

PART NUMBERS:	VOLTS: SEE TABLE II.
MR36*---ACMAR, AFMAR, AEMAR	10 THRU 500 MA
MR36*---ACAAR, AFAAR, AEAAR	1 THRU 50 AA
	100 THRU 500 AA $

* A, B, F, P, M, W, Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
RECTIFIER-TYPE VOLTMETER, AC (FLUSH MOUNTING, ROUND FLANGE, 3-1/2 INCH) STYLE 36

MIL-M-10304/26

SEE DRAWING PAGE 430.9

TABLE I. FULL SCALE RANGES.

VOLTS (VV)		KILOVOLTS (KV) @	
2	100	1	10
5	200	2	20
10	300	5	30
20	500@		
30			
50			

@ USED WITH EXTERNAL RESISTOR.

PART NUMBERS:	VOLTS: SEE TABLE I.
MR36*---ARVVR	2 THRU 300 VV
	500 VV @
MR36*---ARKVR	1 THRU 30 KV @

* A, B, F, M, P, W, Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
VOLTMETER, DC, LONG SCALE, (FLUSH MOUNTING, ROUND FLANGE, 4-1/2 INCH) STYLE 44

MIL-M-10304/23

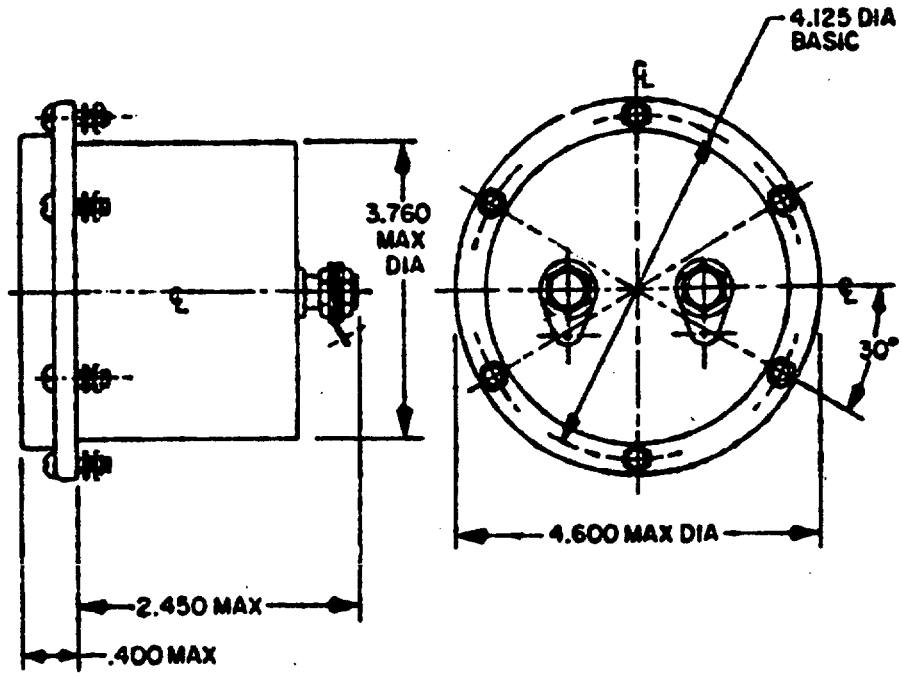


TABLE I. FULL SCALE RANGES.

	VOLTMETERS VOLTS (VV)
ZERO LEFT	ZERO CENTER
1	1-0-1
2	10-0-10
10	30-0-30
20	50-0-50
30	100-0-100
50	
100	
200	
300	
500	

PART NUMBERS:	VOLTS: SEE TABLE I.
MR44*---DCVVR MR44*001DCMAR	1 THRU 500 VV

* A, B, F, M, P, W, Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

METERS, ELECTRICAL INDICATING, PANEL TYPE, RUGGEDIZED,
AMMETER, DC, (FLUSH MOUNTING, ROUND FLANGE, 4-1/2 INCH) STYLE 46

MIL-M-10304/17

SEE DRAWING PAGE 430.13

TABLE I. FULL SCALE RANGES.

AMMETERS MILLIVOLTS (MV) ZERO LEFT
1 MA 100 MV 50 UA 125 MV

PART NUMBERS:	VOLTS: SEE TABLE I.
MR46W001DCMAR	100 MV
MR46W050DCUAR	125 MV

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-STD-242J(NAVY),Part9	Electronic Equipment Parts, Selected Standards, Circuit Breakers, Fuses, Lamps, and Meters

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Including Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:29Z
Check the source to verify that this is the current version before use.