
MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 8 (ONE-HOLE MOUNTING, SUBMINIATURE, THROUGH)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the boot described herein shall consist of this specification and the latest issue of MIL-B-5423.

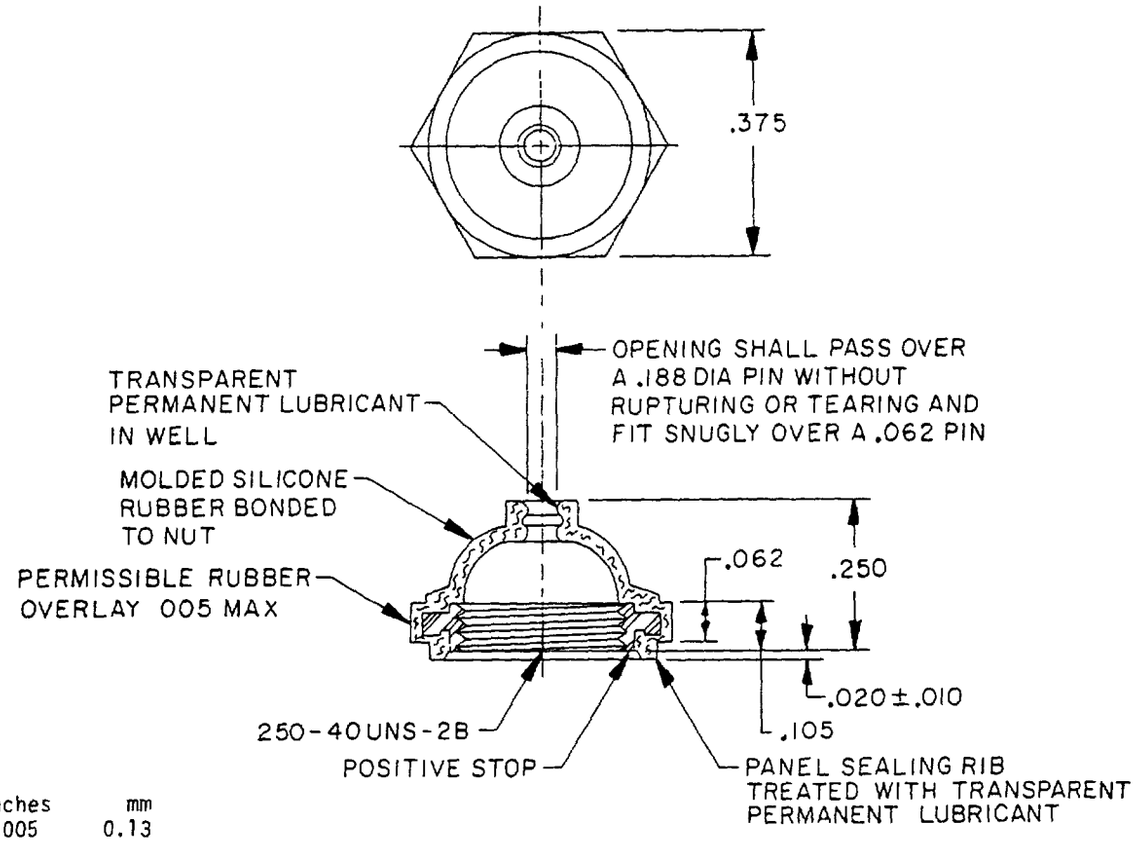

Inches	mm
.005	0.13
010	0.25
.015	0.38
.020	0.51
062	1 57
078	1 98
105	2 67
.250	6.35
375	9.53

NOTES
1. Dimensions are in inches
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerances are ± 015 (0.38 mm)

FIGURE 1 Boot type A, style 8

Ⓒ denotes changes.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Document https://assist.dla.mil - Downloaded: 2026-04-17 04:43:37
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration. See figure 1.

Silicone rubber Grade 40 (shall meet the requirements of grade 50 except for a durometer of 40).

Restoring force: .875 inch-ounce.

Ⓒ Watertightness: 10 psig.

Endurance: Test chamber temperature shall be 125°C ±5°C instead of 85°C ±5°C.

Part number: M5423/11-01.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review activities:
Army - AR, MI
Navy - EC
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - CG, MC, OS

Preparing activity:
Army - ER

Agent
DLA - ES

(Project 5930-1308)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.