MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE A (FOR TOGGLE SWITCHES), STYLE 9 (FIVE-HOLE MOUNTING, THROUGH)

(B) INACTIVE FOR NEW DESIGN AFTER DATE OF THIS SPECIFICATION USE MIL-B-5423/1 OR MIL-B-5423/2.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the boot described herein shall consist of this specification and the latest issue of Specification MIL-B-5423

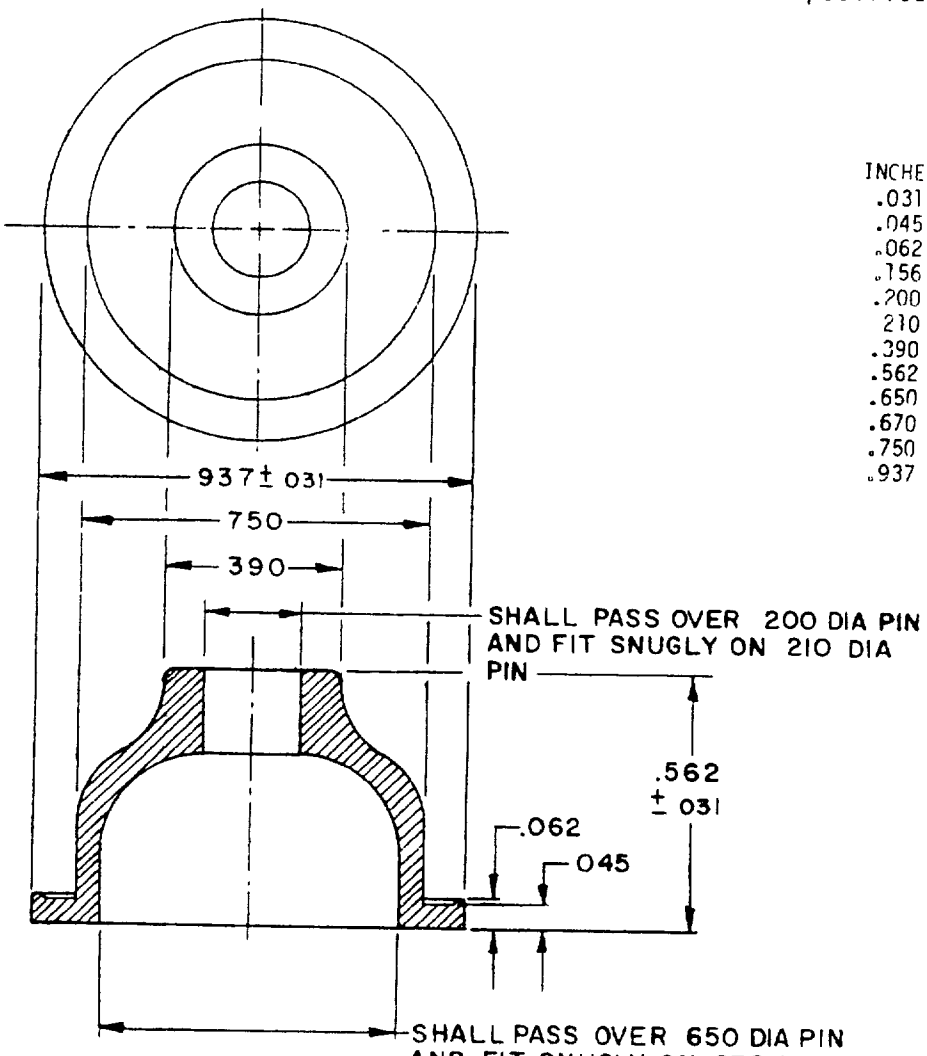

INCHES	MM
.031	.79
.045	1 14
.062	1.57
.156	3.96
.200	5.08
210	5.33
.390	9.91
.562	14.27
.650	16.51
.670	17.02
.750	19.05
.937	23.80

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm
3 Unless otherwise specified, tolerance is ±.015 (.38 mm).

FIGURE 1. Boot type A, style 9.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See figure 1

Silicone rubber Grade 50

Watertightness 5 pounds-force per square inch gage.

Intended use MS25106

Part number M5423/12-A9.

Custodians
Army - ER
Navy - AS
Air Force - 85

Review activities
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AR
Navy - MC

Agent
DLA - ES

Preparing activity.
Army - ER

(Project 5930-1174-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.