INCH-POUND

MIL-DTL-5423/13B
24 May 2002
SUPERSEDING
MIL-B-5423/13A
3 February 1972

DETAIL SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE D (FOR LEVER OPERATED CIRCUIT BREAKERS), STYLE 1 (PANEL MOUNTED WITHOUT MOUNTING FRAME)

This specification forms a part of MIL-DTL-5423, dated 5 April 2002, and is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-5423.


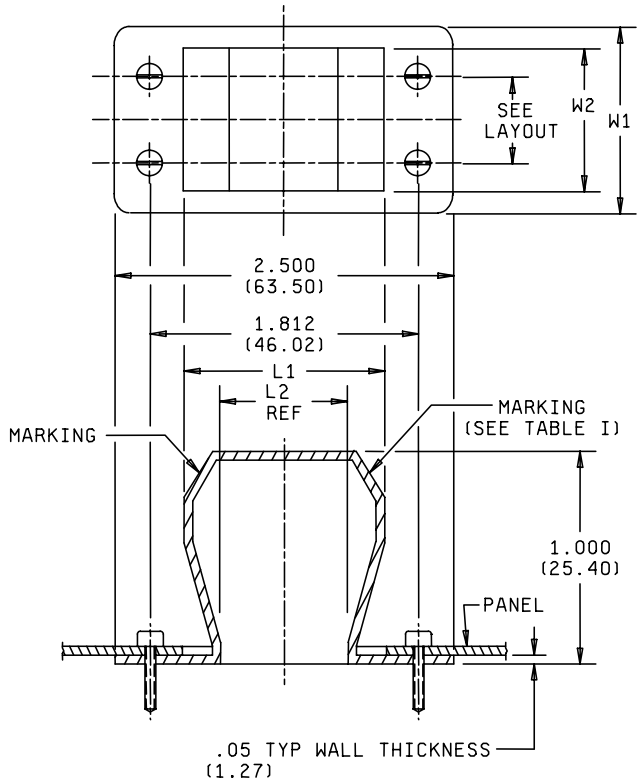



FIGURE 1. Dimensions and configuration boots type D, style 1.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.

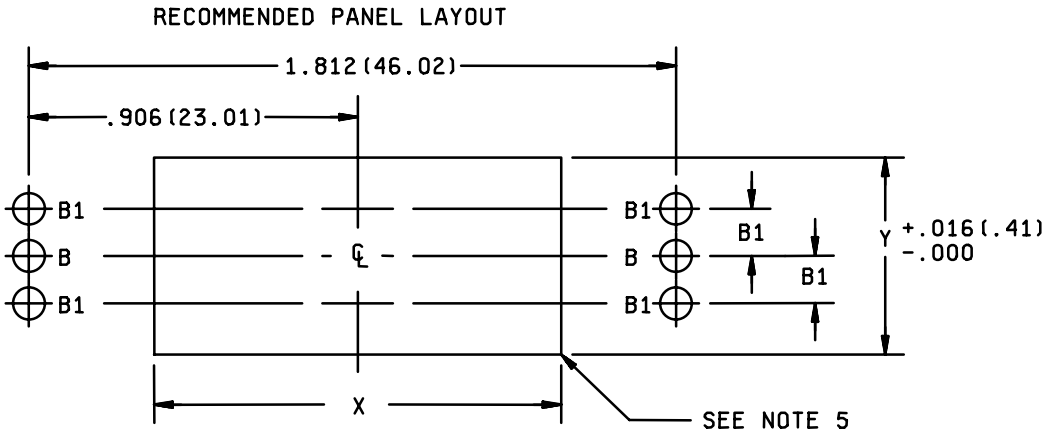

(For number of screws and location see table II.)

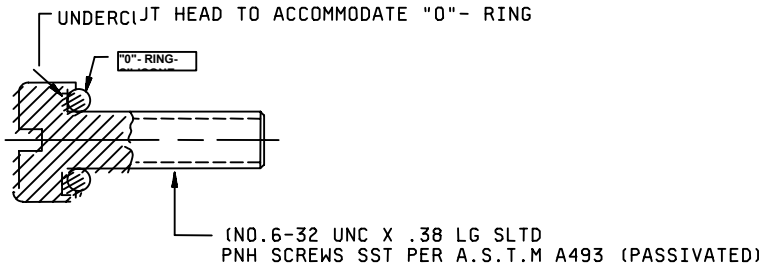

Inches	mm
0.016	.41
0.5	1.27
0.906	23.01
1.000	25.40
1.812	46.02
2.500	63.50

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (.51mm) for two place decimals and ±.031 (.79 mm) for three place decimals.
4. The number of mounting screws shall be supplied as indicated.
5. Edges shall be smooth and free from burrs.

FIGURE 1. Dimensions and configuration boots type D, style 1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50, class III, transparent.

Splashproof: In accordance with MIL-STD-108, table I.

Endurance (with MS25304): 10,000 operations. Minute cracks after life test, which do not permit leakage, shall not be cause for rejection.

Part or Identifying Number (PIN): See tables I and II.

Table I. Dimensions.

PIN M5423/13-	Dimensions ±.031 (.79)			
	L1	W1	W2	L2
01	1.250 (31.75)	.750 (19.05)	.531 (13.49)	.60 (15.24)
02	1.312 (33.32)	1.500 (38.10)	1.250 (31.75)	.60 (15.24)
03	1.281 (32.54)	2.250 (57.15)	2.000 (50.80)	.60 (15.24)

Table II. Mounting holes, markings, and panel cutout.

PIN M5423/13-	Mounting holes			Markings	Panel cutout	
	Number of screws	Location				
		B	B1		X	Y
01	2	Yes	None	None	1.250 (31.75)	.531 (13.49)
02	4	None	.375 (9.53)	On-off	1.312 (33.32)	1.250 (31.75)
03	6	Yes	.750 (19.05)	None	1.281 (32.54)	2.000 (50.80)

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-1735-10)

Review activities:
Army - AT, AV, CR4, MI
Navy - CG, EC, MC
Air Force - 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.