INCH-POUND
MIL-DTL-5423/13C
4 February 2008
SUPERSEDING
MIL-DTL-5423/13B
24 May 2002

DETAIL SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE D (FOR LEVER OPERATED CIRCUIT BREAKERS), STYLE 1 (PANEL MOUNTED WITHOUT MOUNTING FRAME)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5423.

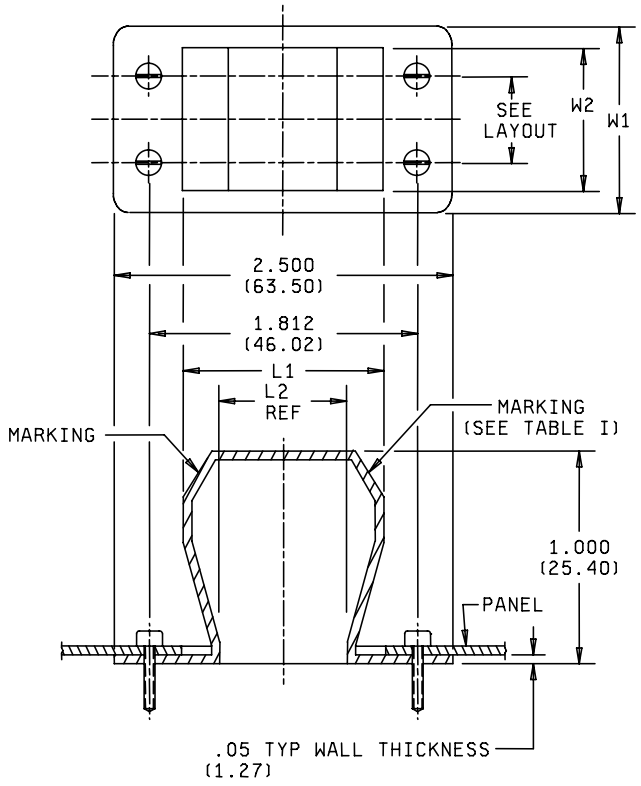

FIGURE 1. Dimensions and configuration boots type D, style 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.

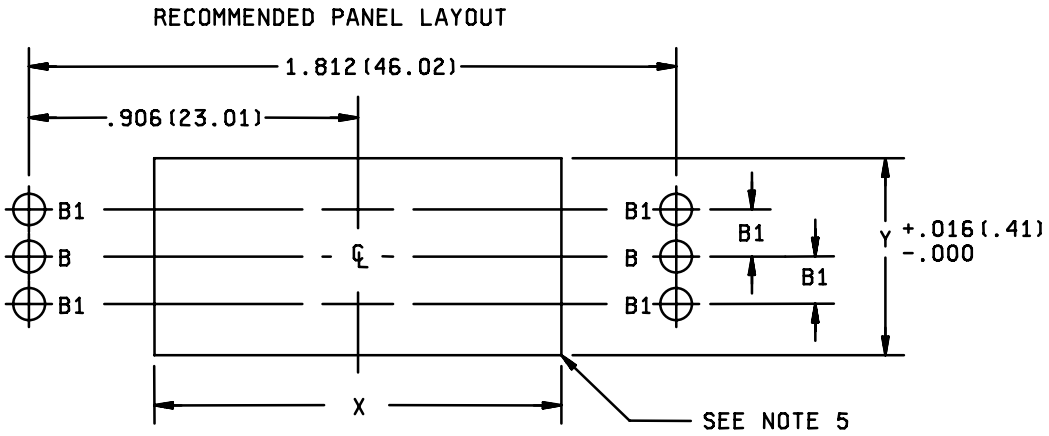

(For number of screws and location see table II.)

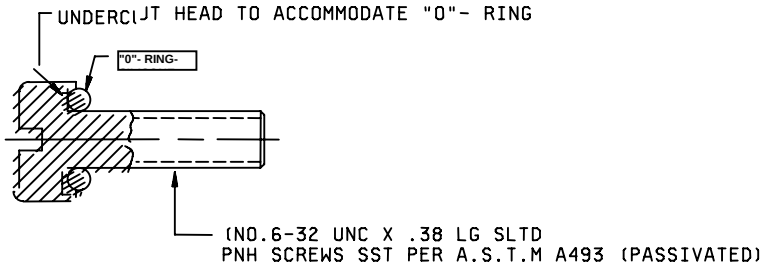

Inches	mm
0.016	.41
0.5	1.27
0.906	23.01
1.000	25.40
1.812	46.02
2.500	63.50

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.02 (.51mm) for two place decimals and ±.031 (.79 mm) for three place decimals.
4. The number of mounting screws shall be supplied as indicated.
5. Edges shall be smooth and free from burrs.

FIGURE 1. Dimensions and configuration boots type D, style 1 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50, class III, transparent.

Splashproof: In accordance with MIL-STD-108, table I.

Endurance: 10,000 operations. Minute cracks after life test, which do not permit leakage, shall not be cause for rejection.

Part or Identifying Number (PIN): See tables I and II.

Table I. Dimensions.

PIN M5423/13-	Dimensions ±.031 (.79)			
	L1	W1	W2	L2
01	1.250 (31.75)	.750 (19.05)	.531 (13.49)	.60 (15.24)
02	1.312 (33.32)	1.500 (38.10)	1.250 (31.75)	.60 (15.24)
03	1.281 (32.54)	2.250 (57.15)	2.000 (50.80)	.60 (15.24)

Table II. Mounting holes, markings, and panel cutout.

PIN M5423/13-	Mounting holes			Markings	Panel cutout	
	Number of screws	Location				
		B	B1		X	Y
01	2	Yes	None	None	1.250 (31.75)	.531 (13.49)
02	4	None	.375 (9.53)	On-off	1.312 (33.32)	1.250 (31.75)
03	6	Yes	.750 (19.05)	None	1.281 (32.54)	2.000 (50.80)

Qualification: Not Applicable.

First Article Testing: In accordance with MIL-DTL-5423 Table II.

Conformance Inspection: Group A and B In accordance with MIL-DTL-5423 (Table IV and VI) per sampling plan as prescribed in Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.

The margins of this specification are marked with vertical lines to indicate where modifications were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents:
MIL-DTL-5423
MIL-STD-108
ASTM-A493

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Review activities:
Army - AT, AV, CR4, MI
Navy - CG, EC, MC
Air Force – 99

Preparing activity:
DLA - CC

(Project 5930-2008-033)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:43Z
Check the source to verify that this is the current version before use.