
MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE D (FOR LEVER OPERATED CIRCUIT BREAKERS), STYLE 2 (PANEL MOUNTED COMPLETE WITH MOUNTING FRAME)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the boot described herein shall consist of this specification and the latest issue of Specification MIL-B-5423.

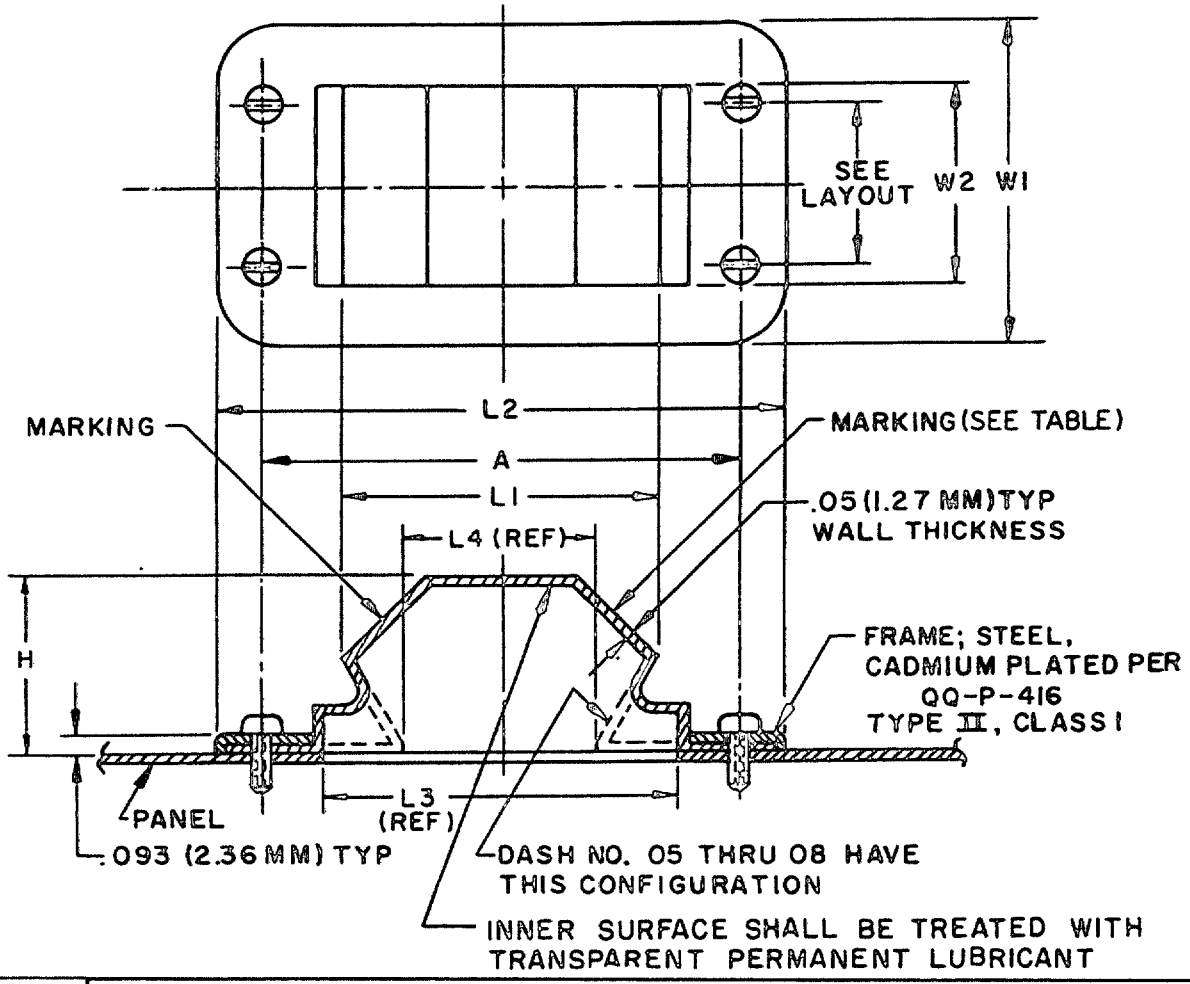

	Part Number M5423/14-	Dimensions ±.031 (.79 mm)							
		A	L1	L2	W1	W2	H	L3	L4
	01	2.750 (69.85)	2.125 (53.98)	3.937 (100.00)	1.500 (38.10)	1.093 (27.76)	1.109 (28.17)	2.25(57.15)	None
	02	3.062 (77.77)	2.000 (50.80)	3.625 (92.08)	2.062 (52.37)	1.343 (34.11)	1.125 (28.58)	2.31 (58.67)	None
(B)	03	2.750 (69.85)	2.000 (50.80)	3.718 (94.44)	3.656 (92.86)	3.156 (80.16)	.921 (23.39)	2.25(57.15)	None
	04	3.062 (77.77)	2.000 (50.80)	3.500 (88.90)	4.812 (122.22)	4.312 (109.52)	1.000 (25.40)	2.31 (58.67)	None
	05	2.062 (52.37)	1.875 (47.63)	2.625 (66.68)	1.375 (34.93)	.843 (21.41)	.875 (22.23)	None	1.44 (36.58)
	06	2.062 (52.37)	1.875 (47.63)	2.656 (67.46)	2.218 (56.34)	1.593 (40.46)	.875 (22.23)	None	1.44 (36.58)
(B)	07	2.062 (52.37)	1.875 (47.63)	2.656 (67.46)	2.906 (73.81)	2.343 (59.51)	.875 (22.23)	None	1.44 (36.58)
	08	2.062 (52.37)	1.781 (45.24)	2.656 (67.46)	3.718 (94.44)	3.093 (78.56)	.875 (22.23)	None	1.44 (36.58)


FIGURE 1. Boot type D, style 2.

(B) denotes changes.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

FSC 5930


RECOMMENDED PANEL LAYOUTS

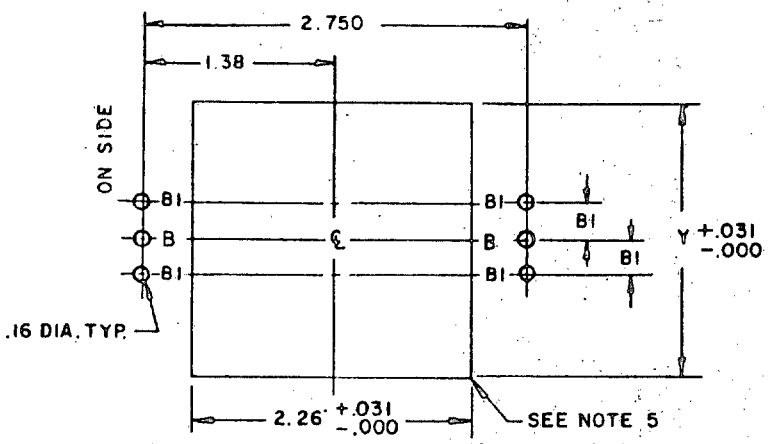

MIL-S-5423/14 -01 & -03

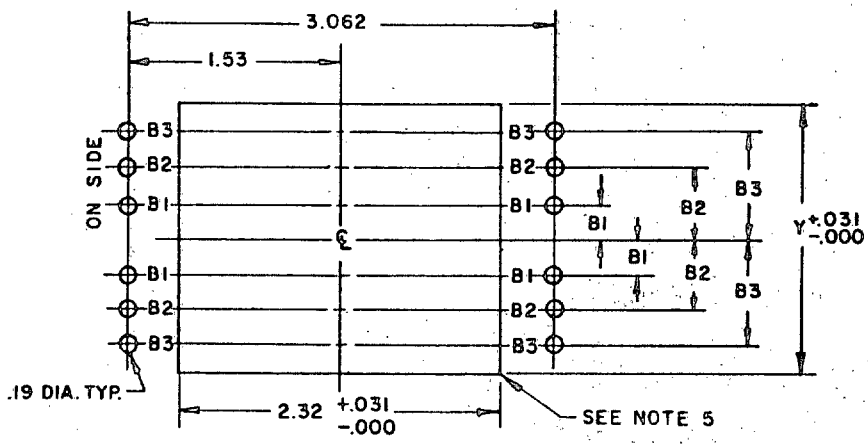

MIL-S-5423/14 -02 & -04

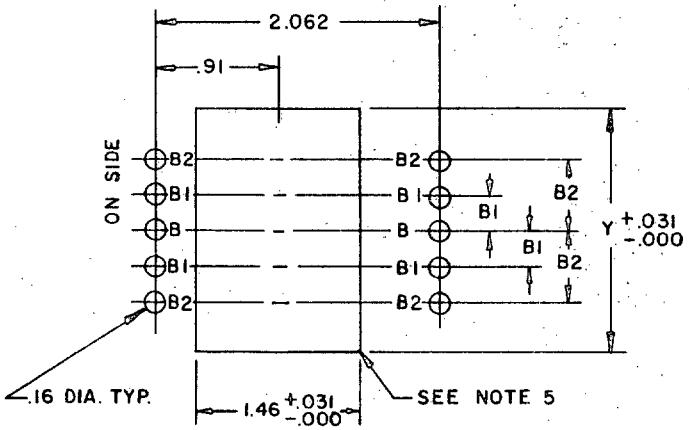


MIL-S-5423/14 -05, -06, -07, & -08

FIGURE 1. Boot type D, style 2 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

Mounting holes							Panel cutout
Dash No.	No. of screws	Location				Markings	Y
		B	B1	B2	B3		
01	2	yes	none	none	none	on	1.00 (25.40)
02	4 1/	none	.500 (12.70)	none	none	none	1.25 (31.75)
03	6	yes	1.031 (26.19)	none	none	on	3.06 (77.72)
04	12	none	.500 (12.70)	1.000 (25.40)	2.000 (50.80)	on	4.25(107.95)
05	2	yes	none	none	none	on	.76 (19.30)
06	4	none	.375 (9.53)	none	none	on	1.53 (38.86)
07	6	yes	.750 (19.05)	none	none	on	2.28 (59.91)
08	8	none	.375 (9.53)	1.125 (28.56)	none	on off	3.06 (77.72)

1/ Screws shall be No. 8-32 UNC X .38 long, slotted pan head.

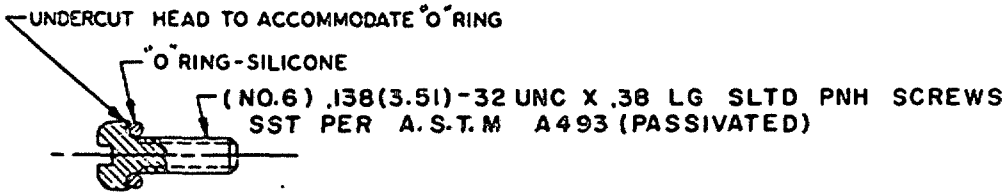

MOUNTING SCREW

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Millimeters are in parentheses.
4. Unless otherwise specified, tolerances are ±.02 (.51 mm) and ±.031 (.79 mm).
5. Edges shall be smooth and free form burrs.
6. The number of mounting screws shall be supplied as indicated.

FIGURE 1. Boot type D, style 2 - Continued.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicone rubber: Grade 50, transparent.

Endurance (with applicable circuit breaker): 10,000 operations, see MIL-B-5423. Minute cracks after life test, which do not permit leakage, shall not be cause for rejection.

Splashproof: MIL-STD-108, table I.

Part number: See figure 1.

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review activities:
Army -
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - CG, MC

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5930-1174-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.