INCH-POUND

MIL-B-5423/14D
26 June 1995
SUPERSEDING
MIL-B-5423/14C
11 July 1994

MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE D (FOR LEVER OPERATED CIRCUIT BREAKERS), STYLE 2 (PANEL MOUNTED COMPLETE WITH MOUNTING FRAME)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-5423.

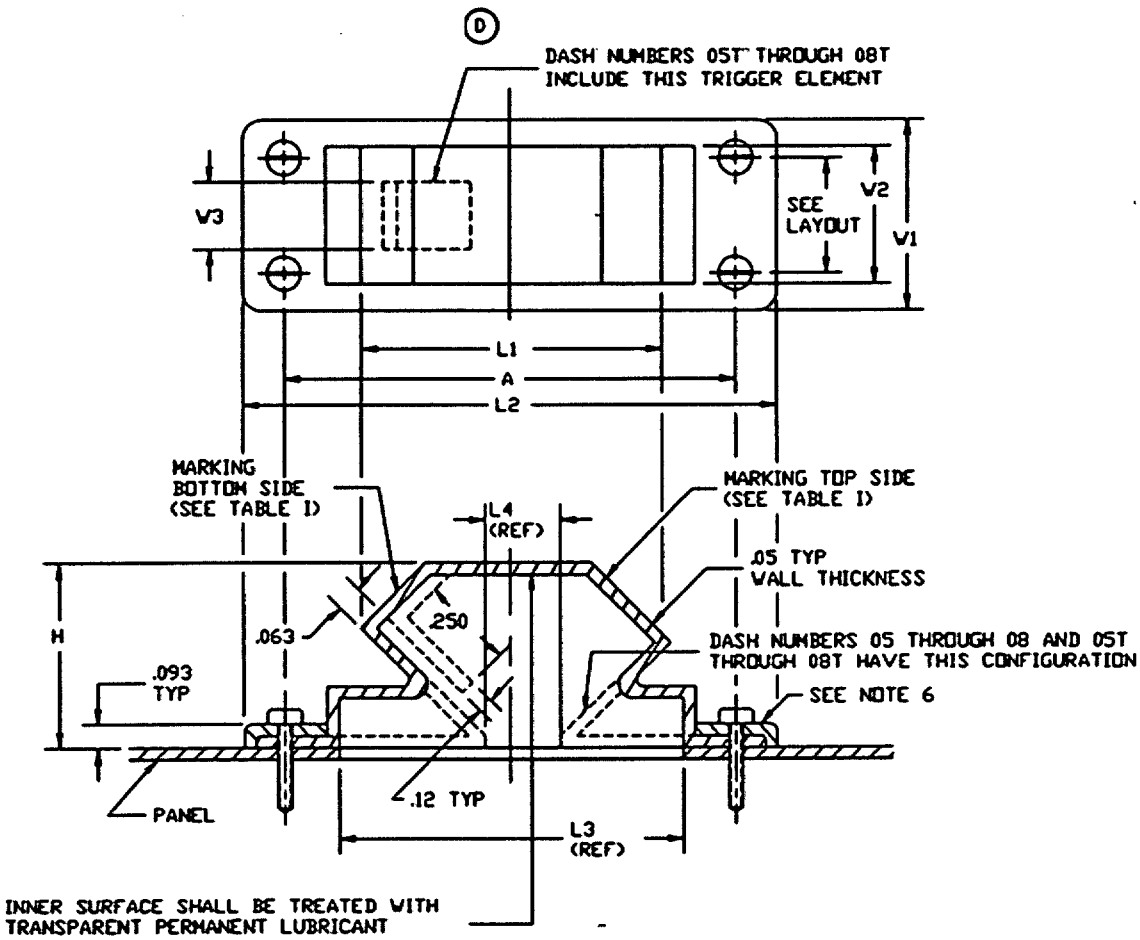


FIGURE 1. Boot type D, style 2.

D denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

Recommended panel cutouts

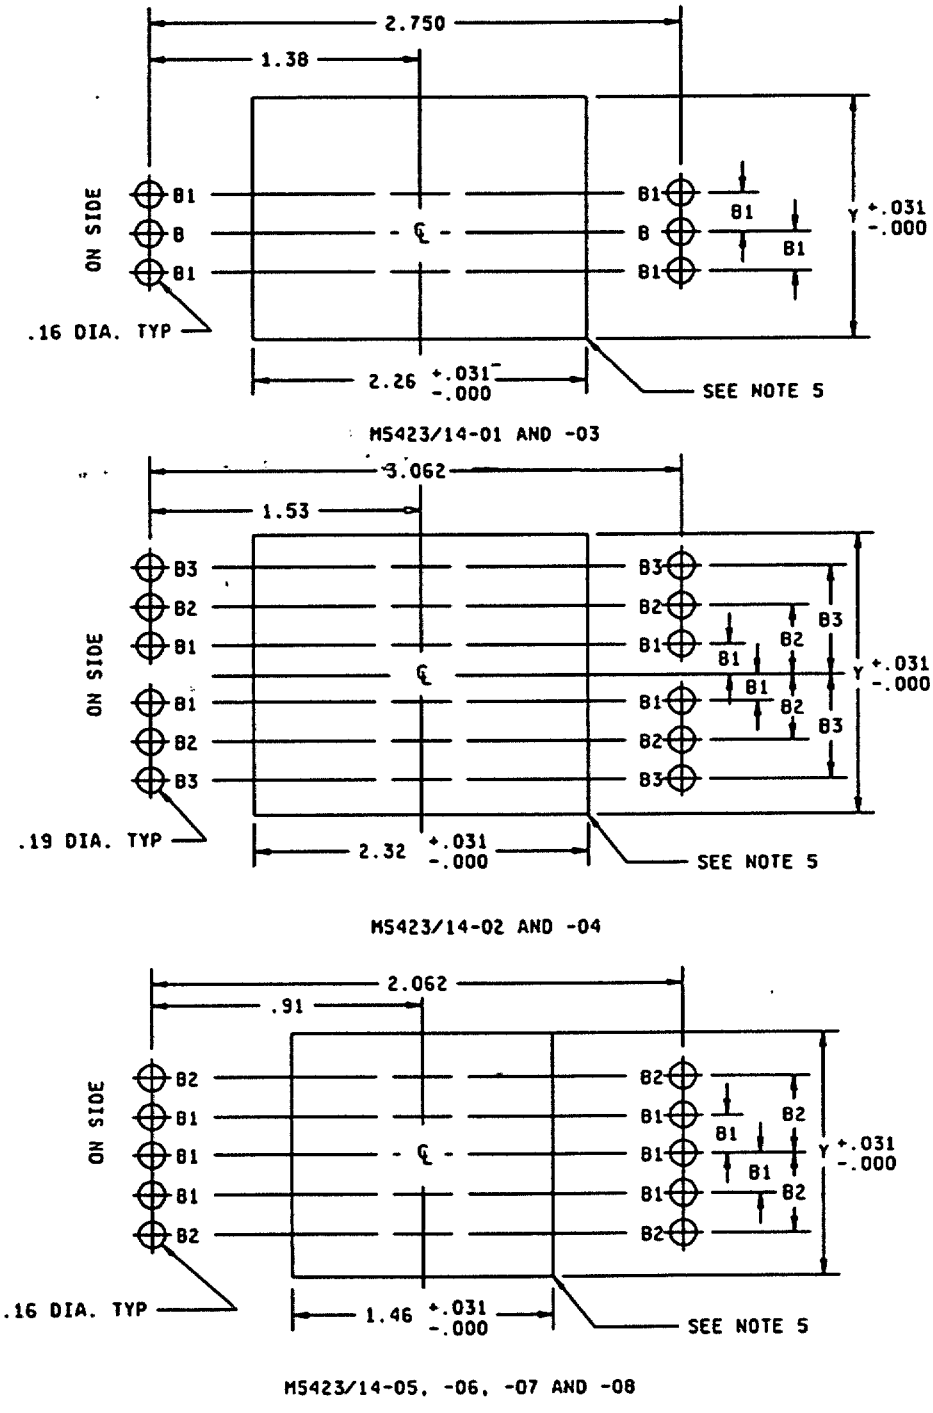


FIGURE 1. Boot type D, style 2 - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

(D)

Part or 1/ Identifying Number (PIN)		Dimensions ±.031								
M5423/14-		A	L1	L2	W1	W2	H	L3	L4	W3
01		2.750	2.125	3.937	1.500	1.093	1.109	2.25	None	None
02		3.062	2.000	3.625	2.062	1.343	1.125	2.31	None	None
03		2.750	2.000	3.718	3.656	3.156	.921	2.25	None	None
04		3.062	2.000	3.500	4.812	4.312	1.000	2.31	None	None
05	05T	2.062	1.875	2.625	1.375	.843	.875	None	1.44	.375
06	06T	2.062	1.875	2.656	2.218	1.593	.875	None	1.44	1.00
07	07T	2.062	1.875	2.656	2.906	2.343	.875	None	1.44	1.00
08	08T	2.062	1.781	2.656	3.718	3.093	.875	None	1.44	1.00

1/ Dash 05T through 08T include a trigger element.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.031	0.79	.921	23.39	1.593	40.46	2.625	66.68
.05	1.3	1.000	25.40	1.781	45.24	2.656	67.46
.063	1.60	1.093	27.76	1.875	47.63	2.750	69.85
.093	2.36	1.109	28.17	2.000	50.80	2.906	73.81
.12	3.0	1.125	28.58	2.062	52.37	3.062	77.77
.16	4.1	1.343	34.11	2.125	53.98	3.093	78.56
.19	4.8	1.375	34.93	2.218	56.34	3.156	80.16
.250	6.35	1.38	35.1	2.25	57.2	3.500	88.90
.375	9.53	1.44	36.6	2.26	57.4	3.625	92.08
.843	21.41	1.46	37.1	2.31	58.7	3.656	92.86
.875	22.23	1.500	38.10	2.32	58.9	3.718	94.45
.91	23.1	1.53	38.9	2.343	59.51	3.937	100.11
						4.312	109.53
						4.812	122.22

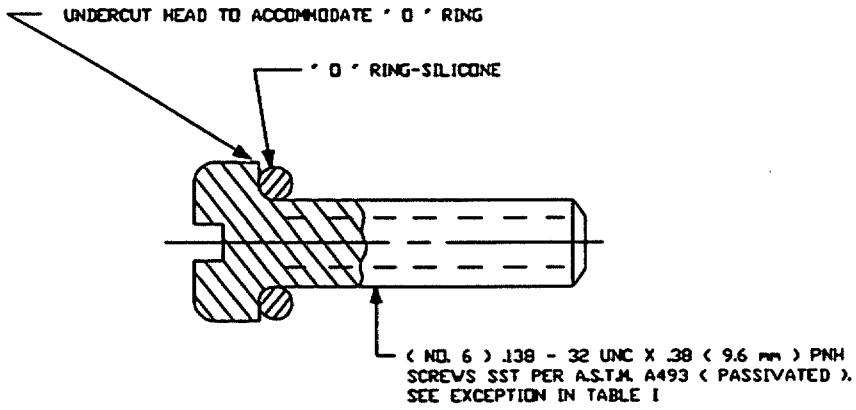

MOUNTING SCREW

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.02 (0.5 mm) and ±.031 (0.79 mm).
4. The number of mounting screws shall be supplied as indicated.
5. Edges shall be smooth and free from burrs.
(D) 6. Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for frame materials.

(D) FIGURE 1. Boot type D, style 2 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Silicone rubber: Grade 50, transparent.

Endurance (with applicable circuit breaker): 10,000 operations, see MIL-B-5423. Minute cracks after life test, which do not permit leakage, shall not be cause for rejection.

Splashproof: MIL-STD-108, table I.

(D) PIN: See figure 1 and table I.

(D) TABLE I. Mounting and hardware information.

Mounting holes 1/									Panel cutout
PIN's 2/		No. of screws	Location				Markings		
			B	B1	B2	B3	Top Side	Bottom Side	Y
-01		2	yes	none	none	none	ON	none	1.00 (25.4)
-02		4 3/	none	.500 (12.70)	none	none	none		1.25 (31.8)
-03		6	yes	1.031 (26.19)	none	none	ON	none	3.06 (77.7)
-04		12 1/	none	.500 (12.70)	1.000 (25.40)	2.000 (50.80)	ON	none	4.25 (108.0)
-05	-05T	2	yes	none	none	none	ON	none	.76 (19.3)
-06	-06T	4	none	.375 (9.53)	none	none	ON	none	1.53 (38.9)
-07	-07T	6	yes	.750 (19.05)	none	none	ON	none	2.28 (57.9)
-08	-08T	8	none	.375 (9.53)	1.125 (28.58)	none	ON	OFF	3.06 (77.7)

1/ Millimeters are in parentheses.
2/ Dash 05T through 08T include a trigger element.
3/ Screws shall be No. 8-32 UNC X .38 long (9.6 mm), slotted pan head.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review activities:
Army - AT, AV, ME
Navy - CG, MC, SH
Air Force - 99
DLA - ES

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5930-1611)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.