
MILITARY SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE B (FOR TOGGLE AND PUSHBUTTON SWITCHES, CIRCUIT BREAKERS, AND ROTARY-ACTUATED PARTS) (FOR HANDSET SWITCHES), STYLE 5

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the boot described herein shall consist of this specification and the latest issue of MIL-B-5423.

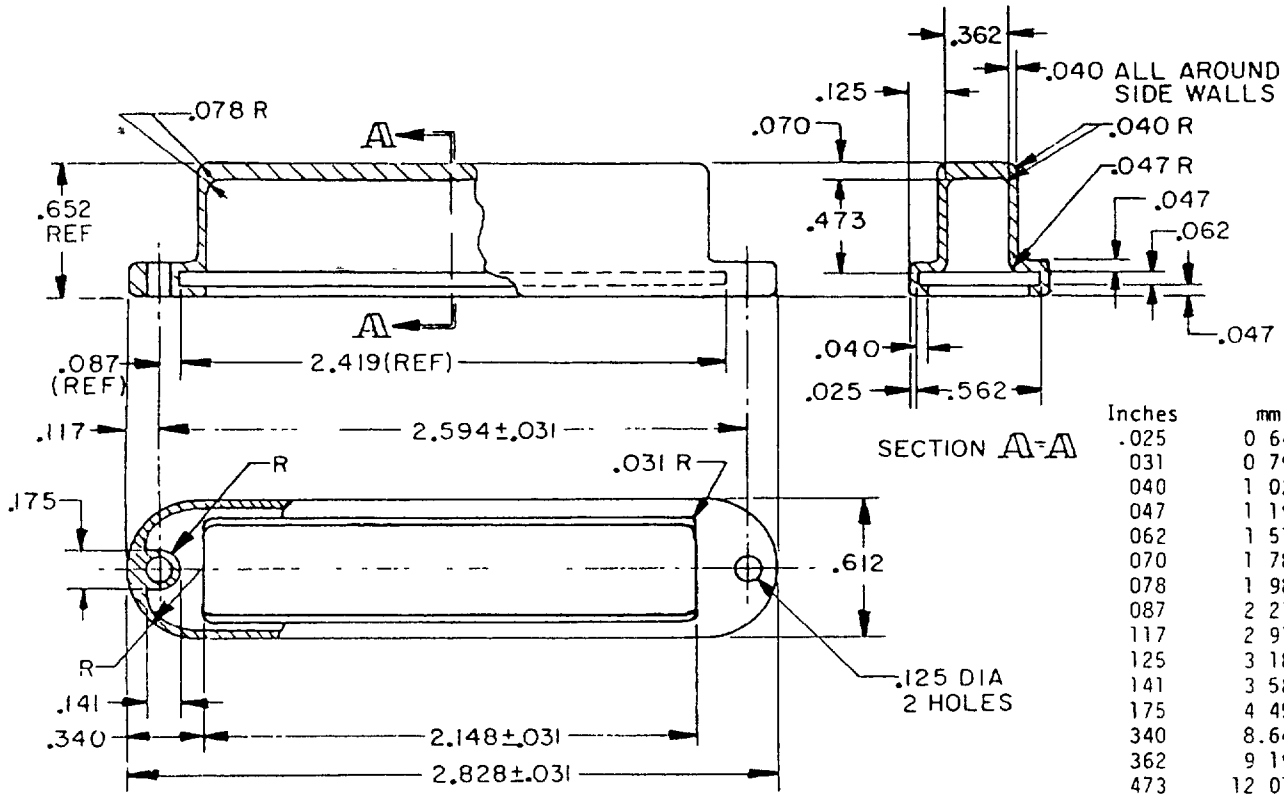


Inches	mm
.025	0 64
031	0 79
040	1 02
047	1 19
062	1 57
070	1 78
078	1 98
087	2 21
117	2 97
125	3 18
141	3 58
175	4 45
340	8.64
362	9 19
473	12 01
562	14 27
612	15 54
652	16 56
2 148	54 56
2 419	61 44
2 594	65 89
2 828	71 83

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 015 (0 38 mm)
4. All corner and fillet radii to be 016 (0 41 mm) unless otherwise specified
5. Flash at parting line must not extend out more than 005 (0 13 mm) or exceed 020 (0 51 mm) in thickness

FIGURE 1 Dimensions and configuration

(E) denotes changes.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:45Z
Check the source to verify that this is the current version before use.

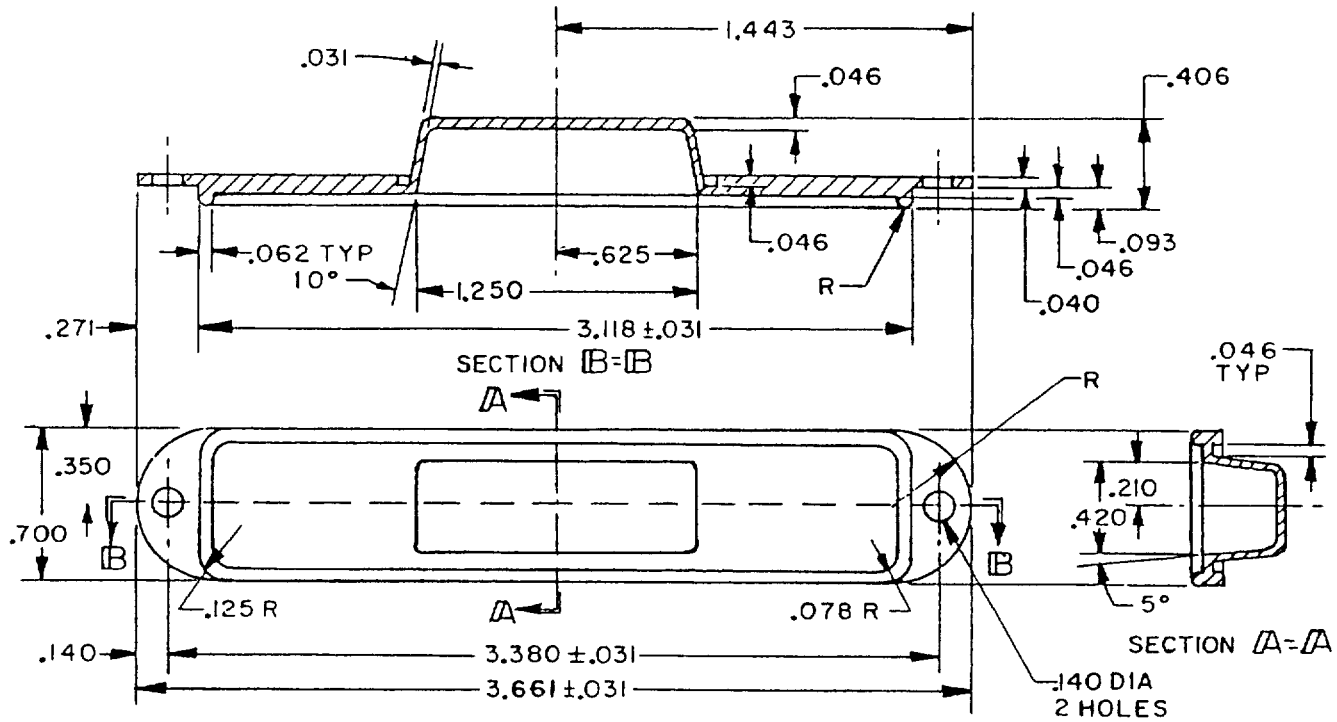


PART NO M5423/15-02

Inches	mm	Inches	mm
031	0 79	.350	8 89
040	1 02	406	10 31
046	1 17	.420	10.67
062	1 57	625	15 88
078	1 98	700	17 78
.093	2 36	1.250	31 75
125	3 18	1 443	36 65
140	3 56	3 118	79 20
210	5.33	3 380	85 85
271	6.88	3 661	92 99

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerances are ± 015 (0 38 mm)
4 All corner and fillet radii to be 016 (0 41 mm) unless otherwise specified

FIGURE 1 Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:45Z
Check the source to verify that this is the current version before use.

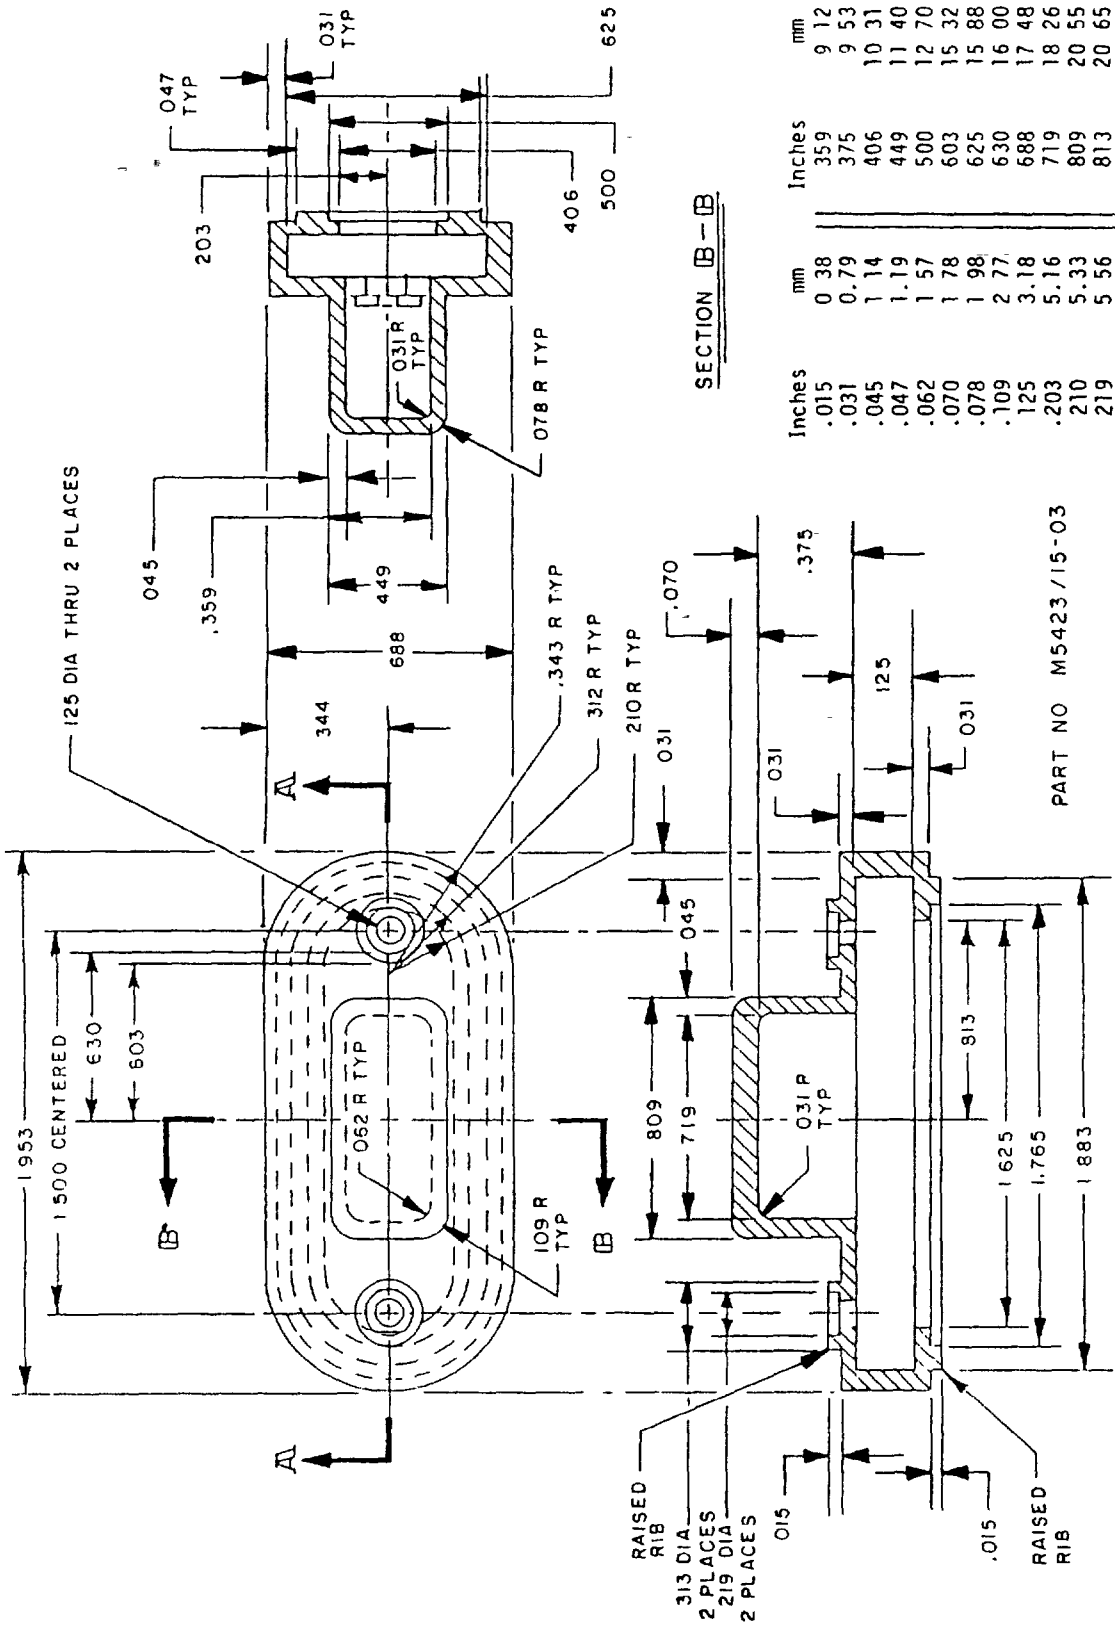


Inches	mm	Inches	mm
.015	0 38	359	9 12
.031	0.79	375	9 53
.045	1 14	406	10 31
.047	1.19	449	11 40
.062	1 57	500	12 70
.070	1 78	603	15 32
.078	1 98	625	15 88
.109	2 77	630	16 00
125	3.18	688	17 48
.203	5.16	719	18 26
210	5.33	809	20 55
219	5 56	813	20 65
312	7 92	1 500	38 10
313	7 95	1 625	41 28
343	8 71	1 765	44 83
344	8 74	1 883	47 83
		1 953	49 61

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ± 015 (0 38 mm)
4. All corner and fillet radii to be .016 (0 41 mm) unless otherwise specified
5. Flash at parting line must not extend out more than .005 (0 13 mm) or exceed .020 (0 51 mm) in thickness.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:45Z
Check the source to verify that this is the current version before use.

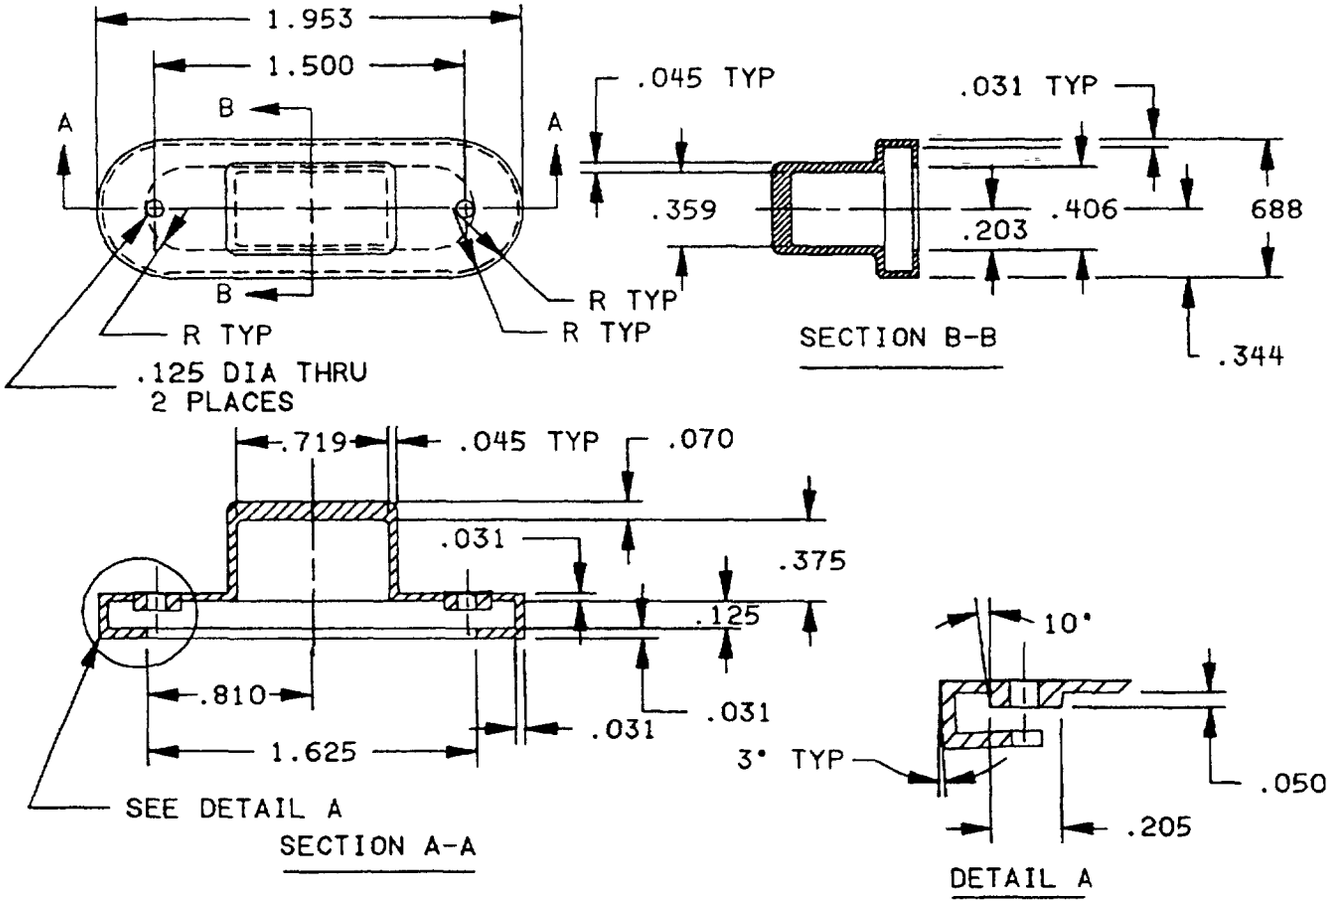

PART NO M5423/15-03
ALTERNATE CONFIGURATION

Inches	mm	Inches	mm
.031	0 79	359	9 12
045	1 14	375	9.53
050	1.27	.406	10.31
.070	1 78	688	17.48
125	3 18	719	18.26
203	5 16	1 500	38.10
.205	5 21	1 625	41.28
344	8 74	1 953	49 61

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerances are ± 015 (0 38 mm)
4 All corner and fillet radii to be 016 (0 41 mm) unless otherwise specified
5 Flash at parting line must not extend out more than 005 (0 13 mm) or exceed 020 (0 51 mm) in thickness

FIGURE 1 Dimensions and configuration - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations See figure 1.

Silicon rubber Grade 50 per ZZ-R-765, class III.

Watertightness MIL-STD-108, table I.

Endurance 500,000 operations, see MIL-B-5423 Minute cracks after life test, which do not permit leakage, shall not be cause for rejection.

Color: See table I.

Part number See figure 1 and table I.

TABLE I. Colors.

Part number	Color	Former part number identification
M5423/15-01	Gray	SM-C-96099 SC-C-105369
M5423/15-02	Black	SM-C-544237
M5423/15-03	Black	SM-B-627674

Custodians:
Army - ER
Navy - AS
Air Force - 85

Review activities.
Army - AR
Navy - EC
DLA - ES

User activities
Army - AT, AV, ME, MI
Navy - CG, MC, OS

Preparing activity.
Army - ER

Agent
DLA -ES

(Project 5930-1318)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:45Z
Check the source to verify that this is the current version before use.