INCH-POUND
MIL-DTL-5423/15G
4 February 2008
SUPERSEDING
MIL-DTL-5423/15F
12 May 2004

DETAIL SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, TYPE B (FOR TOGGLE AND PUSHBUTTON SWITCHES, CIRCUIT BREAKERS, AND ROTARY-ACTUATED PARTS) (FOR HANDSET SWITCHES), STYLE 5

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5423.

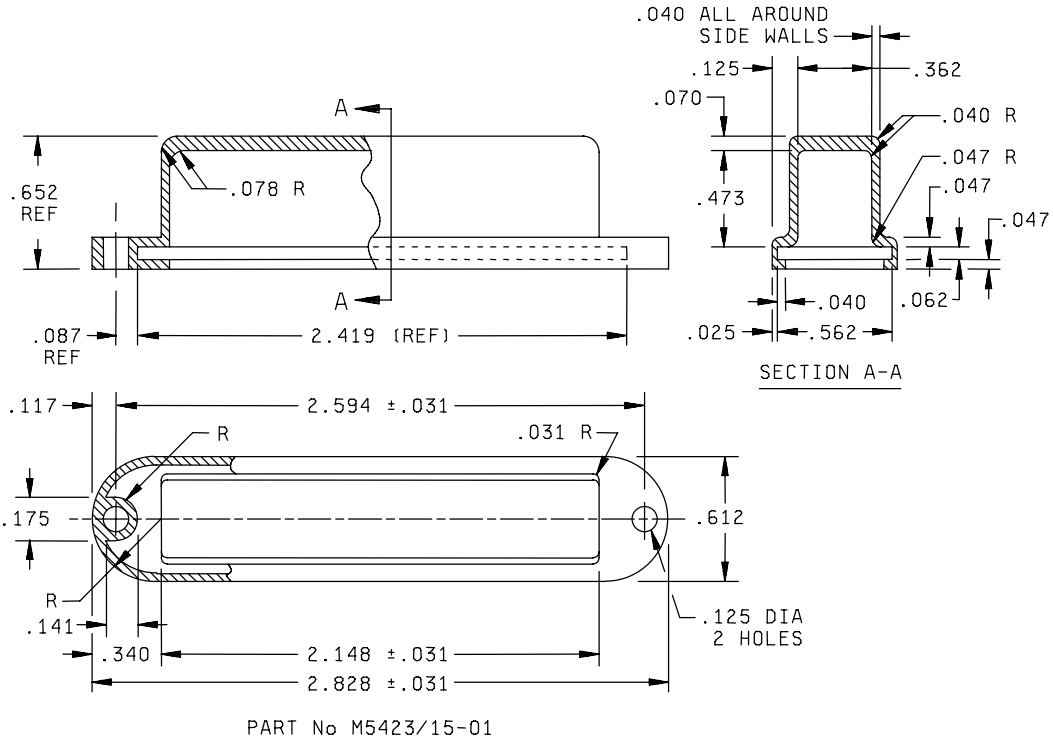


FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

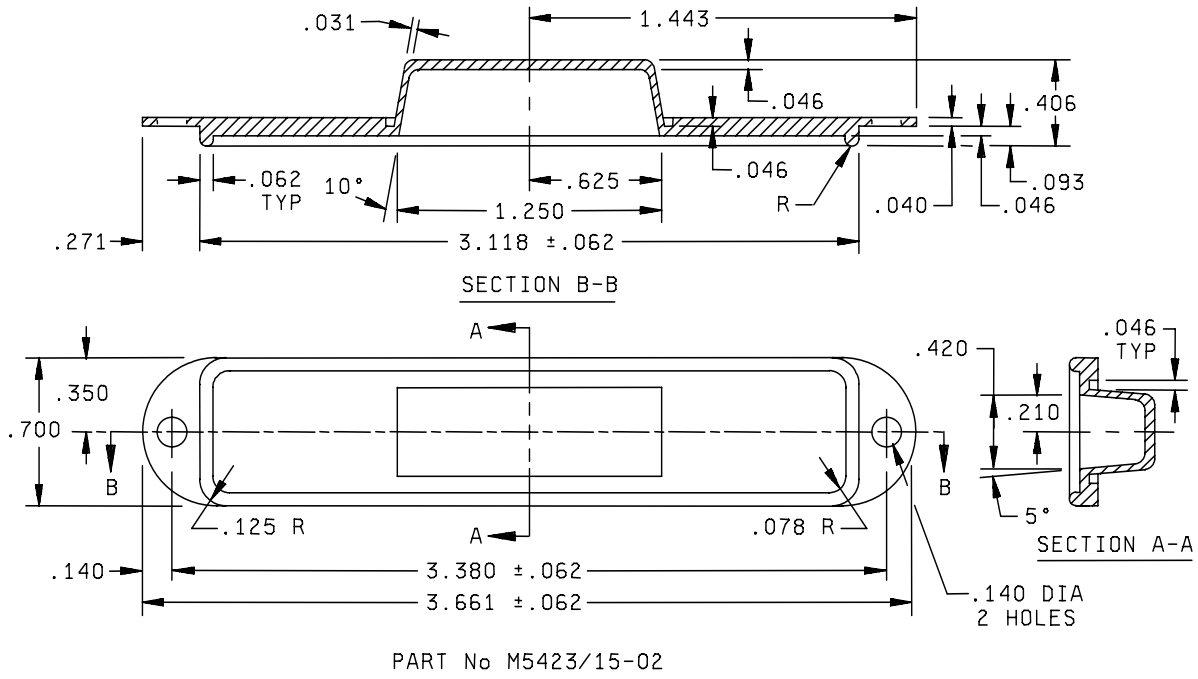


FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.


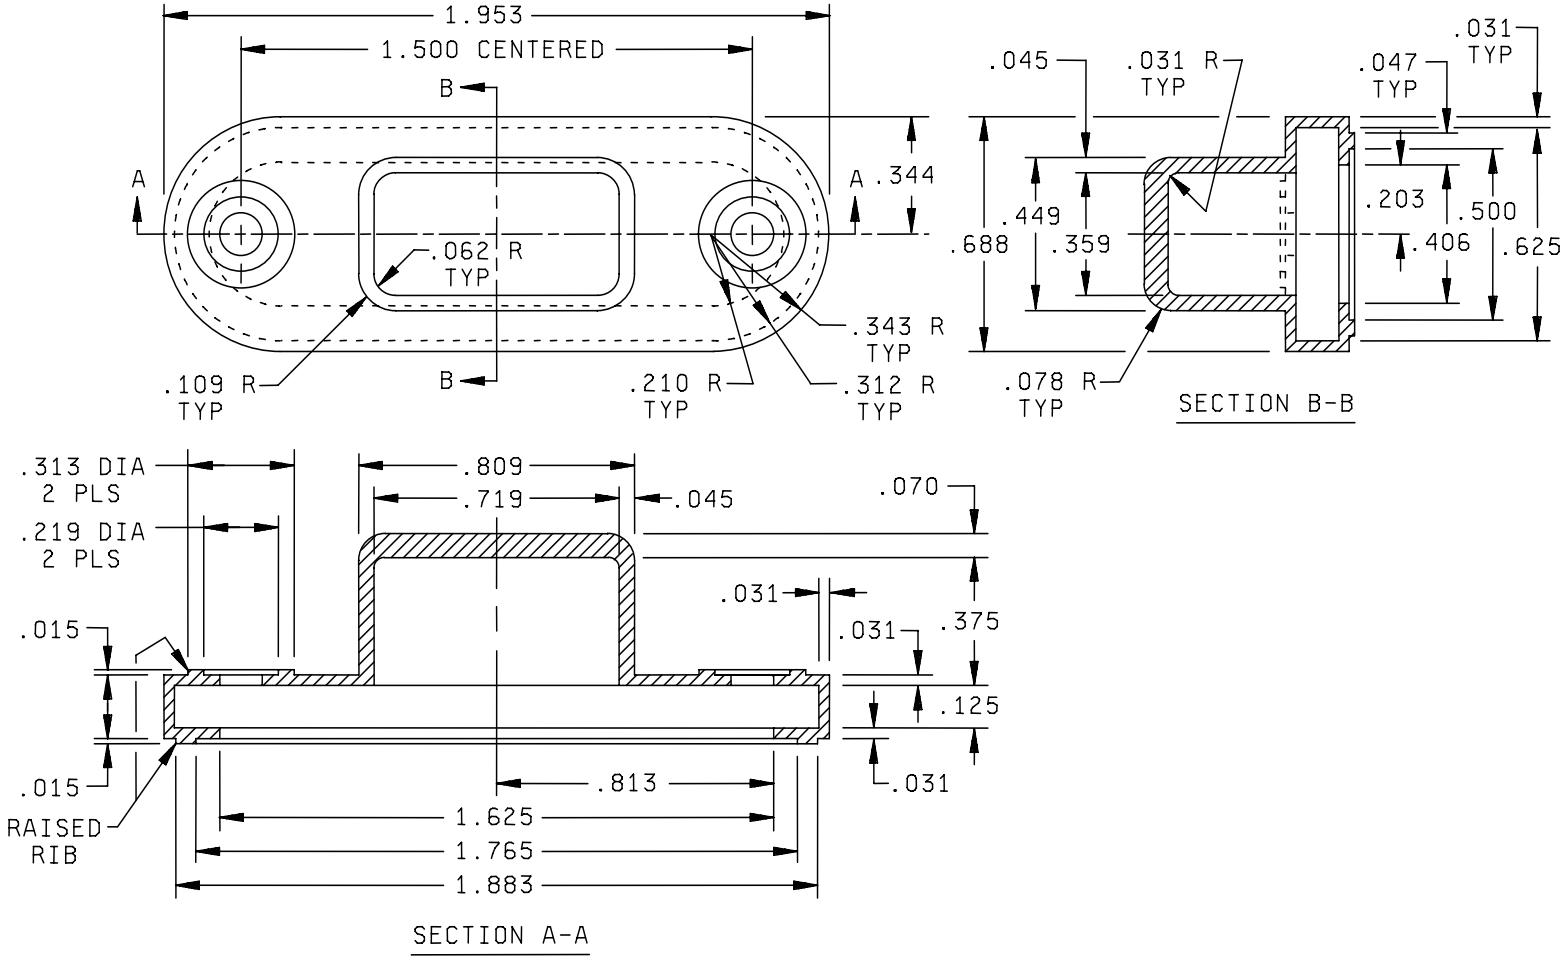


FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

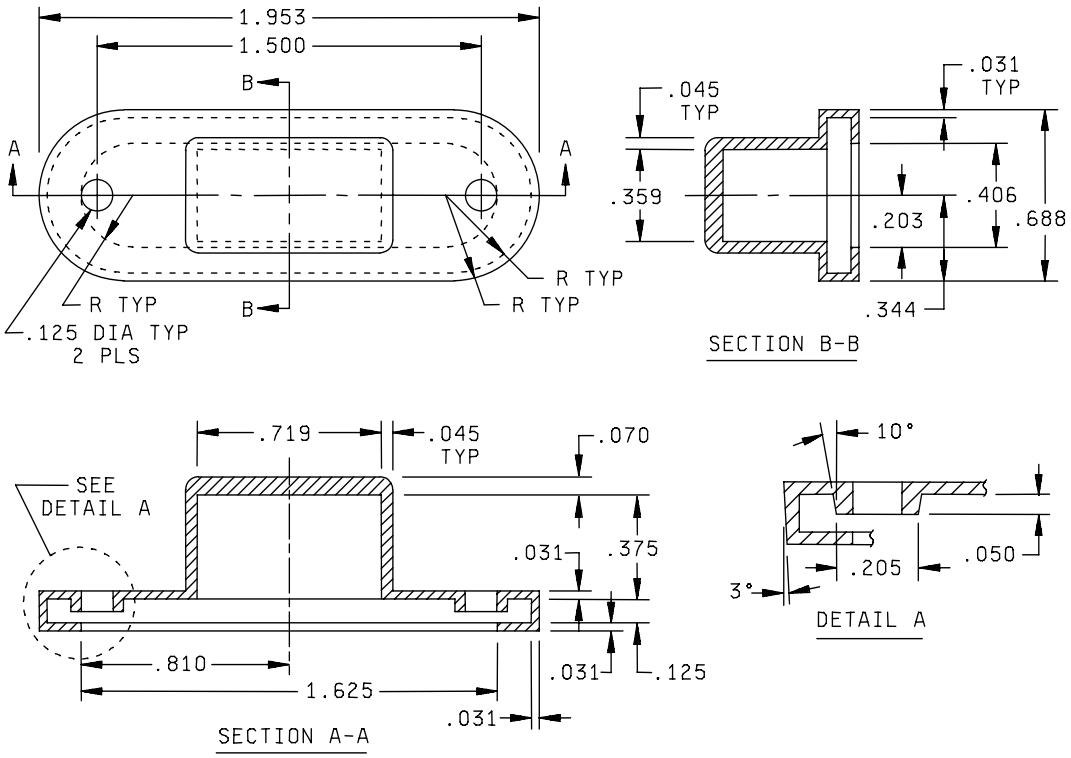

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.015	0.38	.087	2.21	.210	5.33	.362	9.19	.652	16.56	1.625	41.28
.025	0.64	.093	2.36	.219	5.56	.375	9.53	.688	17.48	1.765	44.83
.031	0.79	.109	2.77	.271	6.88	.406	10.31	.700	17.78	1.833	46.56
.040	1.02	.117	2.97	.312	7.92	.420	10.67	.719	18.26	1.953	49.61
.045	1.14	.125	3.18	.313	7.95	.449	11.40	.809	20.55	2.148	54.56
.046	1.17	.140	3.56	.340	8.64	.473	12.01	.810	20.57	2.419	61.44
.047	1.19	.141	3.58	.343	8.71	.500	12.70	.813	20.65	2.594	65.89
.050	1.27	.175	4.45	.344	8.74	.562	14.27	1.250	31.75	2.828	71.83
.062	1.57	.203	5.16	.350	8.89	.612	15.54	1.443	36.65	3.118	79.20
.070	1.78	.205	5.21	.359	9.12	.625	15.88	1.500	38.10	3.380	85.85
.078	1.98									3.661	92.99

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ± .015 (0.38 mm).
3. All corner and fillet radii to be .016 (0.41 mm) unless otherwise specified.
4. Flash at parting line must not extend out more than .005 (0.13 mm) or exceed .020 (0.51 mm) in thickness

FIGURE 1. Dimensions and configuration – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50 per A-A-59588.

Watertightness: MIL-STD-108, table I.

Endurance: 500,000 operations, see MIL-DTL-5423. Minute cracks after life test, which do not permit leakage, shall not be cause for rejection.

Color: See table I.

Part or Identifying Number (PIN): See figure 1 or table I.

TABLE I. Colors.

Part Number	Color	Former part number identification
M5423/15-01	Gray	SM-C-96099 SM-C-105369
M5423/15-02	Black	SM-C-544237
M5423/15-03	Black	SM-C-627674

Qualification: Not Applicable.

First Article Testing: In accordance with MIL-DTL-5423 Table II.

Conformance Inspection: Group A and B In accordance with MIL-DTL-5423 (Table IV and VI) per sampling plan as prescribed in Table V.

The margins of this specification are marked with vertical lines to indicate where modifications were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference Documents:
A-A-59588
MIL-DTL-5423
MIL-STD-108

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5930-2008-035)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.