INCH-POUND
MIL-DTL-5423/15H
17 February 2009
SUPERSEDING
MIL-DTL-5423/15G
4 February 2008

DETAIL SPECIFICATION SHEET

# BOOT, DUST AND WATER SEAL, TYPE B (FOR TOGGLE AND PUSHBUTTON SWITCHES, CIRCUIT BREAKERS, AND ROTARY-ACTUATED PARTS) (FOR HANDSET SWITCHES), STYLE 5

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5423.

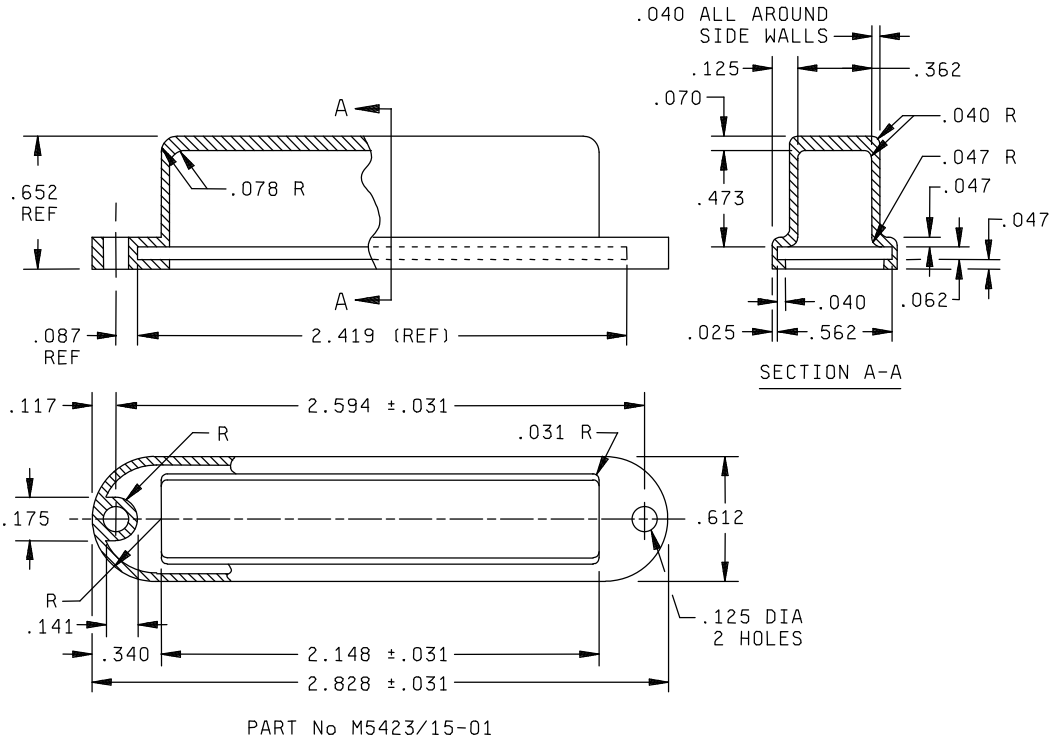



FIGURE 1. Dimensions and configuration.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

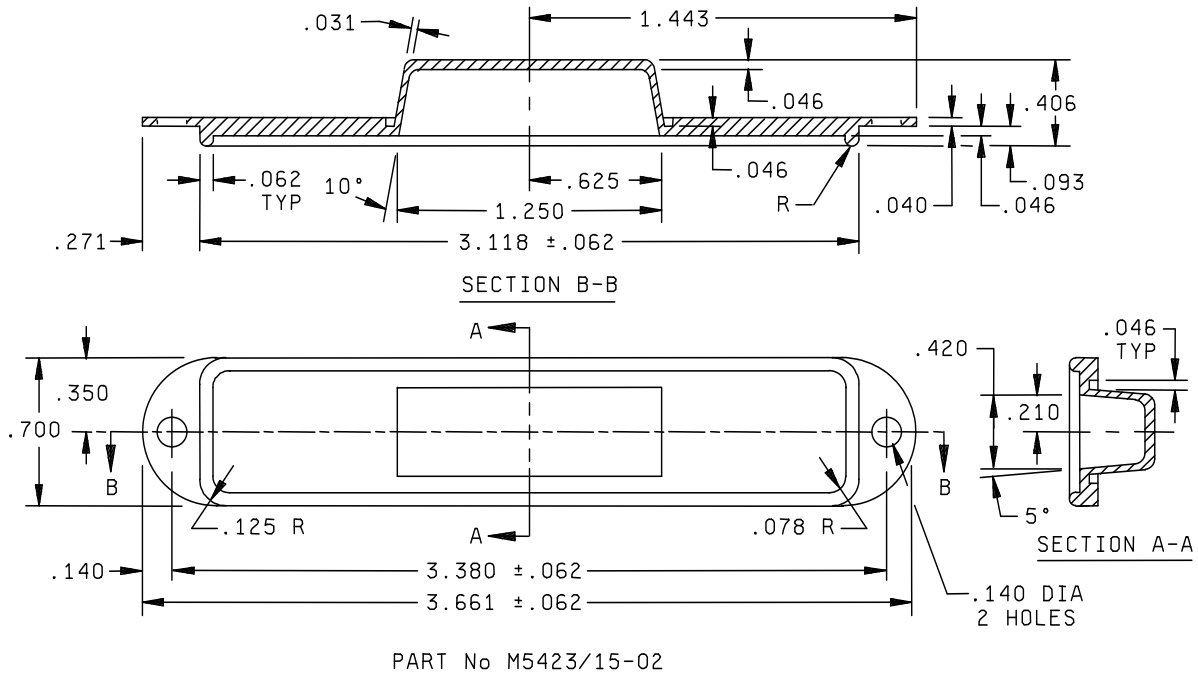



FIGURE 1. Dimensions and configuration – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.


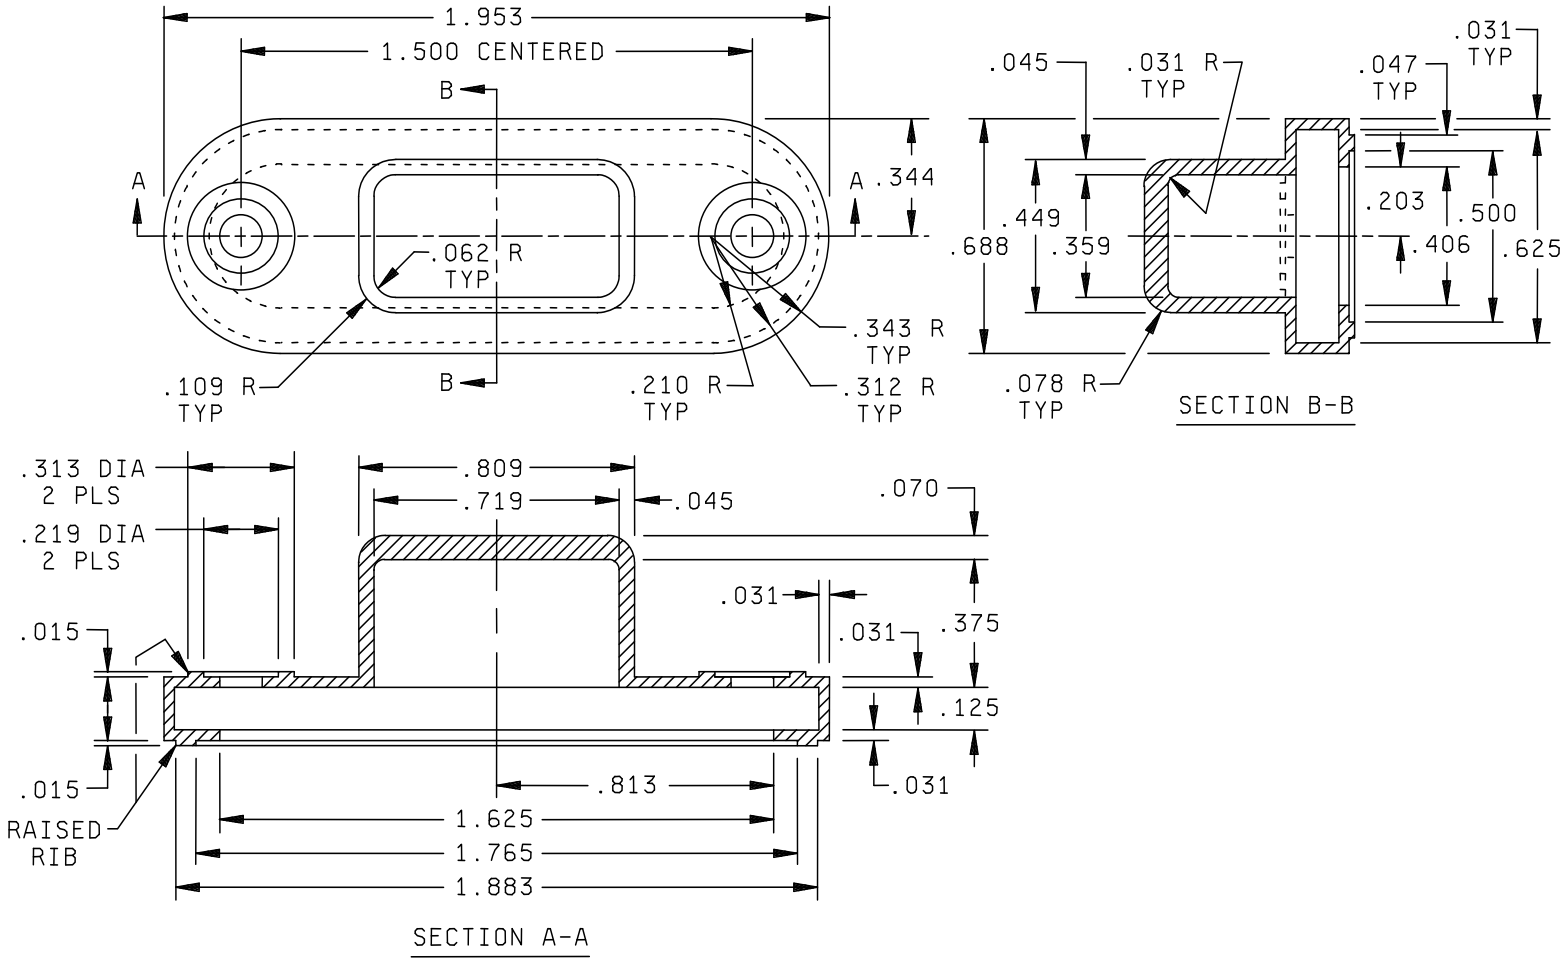



FIGURE 1. Dimensions and configuration – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

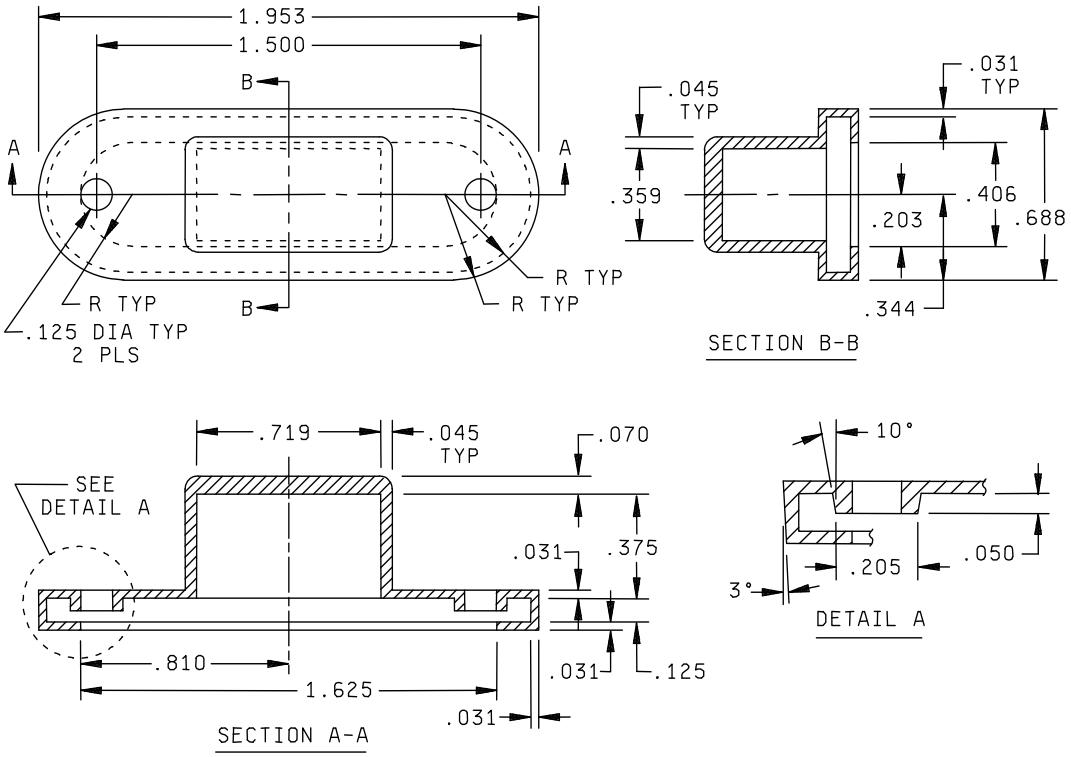


| Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|---|---|---|---|---|---|
| .015 | 0.38 | .087 | 2.21 | .210 | 5.33 | .362 | 9.19 | .652 | 16.56 | 1.625 | 41.28 |
| .025 | 0.64 | .093 | 2.36 | .219 | 5.56 | .375 | 9.53 | .688 | 17.48 | 1.765 | 44.83 |
| .031 | 0.79 | .109 | 2.77 | .271 | 6.88 | .406 | 10.31 | .700 | 17.78 | 1.833 | 46.56 |
| .040 | 1.02 | .117 | 2.97 | .312 | 7.92 | .420 | 10.67 | .719 | 18.26 | 1.953 | 49.61 |
| .045 | 1.14 | .125 | 3.18 | .313 | 7.95 | .449 | 11.40 | .809 | 20.55 | 2.148 | 54.56 |
| .046 | 1.17 | .140 | 3.56 | .340 | 8.64 | .473 | 12.01 | .810 | 20.57 | 2.419 | 61.44 |
| .047 | 1.19 | .141 | 3.58 | .343 | 8.71 | .500 | 12.70 | .813 | 20.65 | 2.594 | 65.89 |
| .050 | 1.27 | .175 | 4.45 | .344 | 8.74 | .562 | 14.27 | 1.250 | 31.75 | 2.828 | 71.83 |
| .062 | 1.57 | .203 | 5.16 | .350 | 8.89 | .612 | 15.54 | 1.443 | 36.65 | 3.118 | 79.20 |
| .070 | 1.78 | .205 | 5.21 | .359 | 9.12 | .625 | 15.88 | 1.500 | 38.10 | 3.380 | 85.85 |
| .078 | 1.98 | | | | | | | | | 3.661 | 92.99 |

NOTES:
1. Dimensions are in inches. Metric equivalents are given for general information only.
2. Unless otherwise specified, tolerances are ± .015 (0.38 mm).
3. All corner and fillet radii to be .016 (0.41 mm) unless otherwise specified.
4. Flash at parting line must not extend out more than .005 (0.13 mm) or exceed .020 (0.51 mm) in thickness

FIGURE 1. Dimensions and configuration – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50 per A-A-59588.

Watertightness: MIL-STD-108, table I.

Endurance: 500,000 operations, see MIL-DTL-5423. Minute cracks after life test, which do not permit leakage, shall not be cause for rejection.

Color: See table I.

Part or Identifying Number (PIN): See figure 1 or table I.

TABLE I. Colors.

| Part Number | Color | Former part number identification |
|---|---|---|
| M5423/15-01 | Gray | SM-C-96099<br>SM-C-105369 |
| M5423/15-02 | Black | SM-C-544237 |
| M5423/15-03 | Black | SM-C-627674 |

Qualification: First Article Testing in accordance with MIL-DTL-5423.

The margins of this specification are marked with vertical lines to indicate where modifications were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference Documents:
MIL-DTL-5423
MIL-STD-108
A-A-59588

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5930-2008-071)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:44Z
Check the source to verify that this is the current version before use.