INCH-POUND
MIL-DTL-5423/16G
18 July 2022
SUPERSEDING
MIL-DTL-5423/16F
9 August 2019

DETAIL SPECIFICATION SHEET

BOOT, DUST AND WATER SEAL, BUSHING SEAL, TYPE A (FOR TOGGLE SWITCH 0.469 DIAMETER) STYLE 10 (PANEL BUSHING SEAL ONLY)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5423.


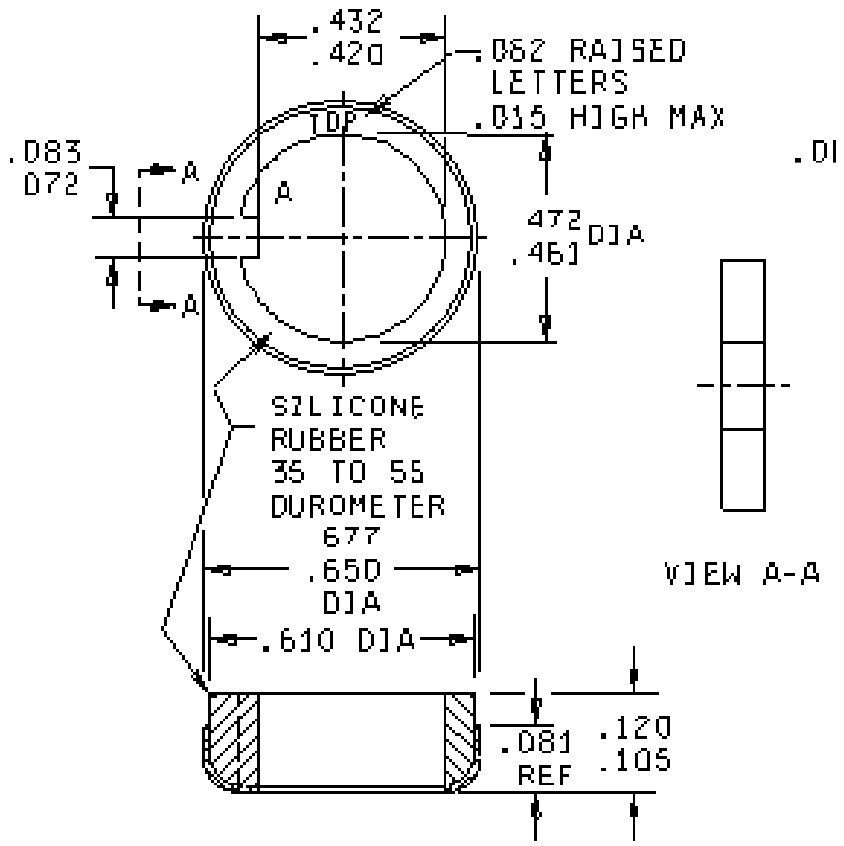


FIGURE 1. Dimensions and configuration boots type A, style 10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:45Z
Check the source to verify that this is the current version before use.

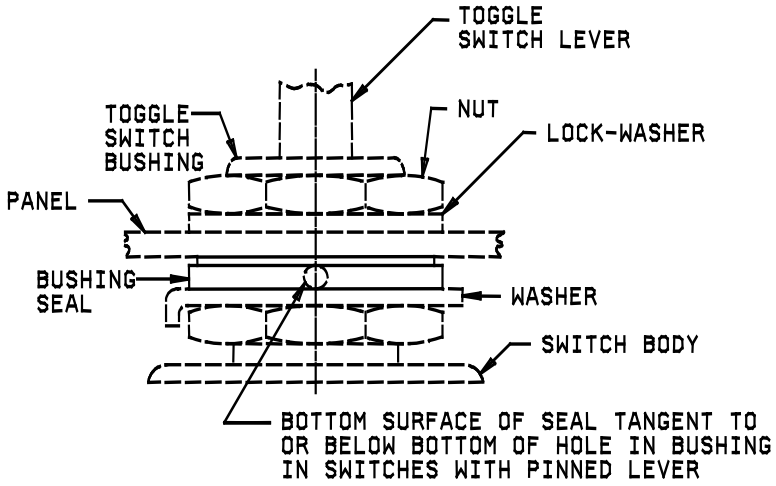

DETAIL OF BUSHING SEAL ASSEMBLY

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.015 for three place decimals.
3. This seal is intended for use with toggle switches per MIL-DTL-3950, MIL-DTL-8834, and MIL-DTL-83731.
4. Bushing seal to be assembled so that surface marked “Top” is up, or “Bottom” is down.

FIGURE 1. Dimensions and configuration boots type A, style 10 – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Silicon rubber: Grade 50.

Watertightness: The boot (bushing seal) shall be assembled to the test enclosure using a solid bushing of dimensions equivalent to a bushing of an applicable switch (including the non-turn notch). The solid bushing and bushing seal shall be assembled per figure I. The test shall be conducted in accordance with the "Final" watertightness test of MIL-DTL-5423, except that the pressure shall be limited to 6 pounds-force per square inch gauge, external pressure only, and no operations are required. At the conclusion of this procedure, the test enclosure shall be examined in the bushing area for evidence of water leakage.

The following tests are not required: Restoring force, durability, sand and dust, vibration, salt spray, endurance and lubricant.

Part or Identifying Number (PIN): M5423/16-01

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Reference Documents:
MIL-DTL-5423 MIL-DTL-3950 MIL-DTL-8834 MIL-DTL-83731

Custodians:
Army - CR
Navy - AS
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2022-061)

Review activities:
Army – AT, AV, CR4, MI
Navy – CG, EC, MC, OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T04:45Z
Check the source to verify that this is the current version before use.