MILITARY SPECIFICATION

CAP, OPERATING, SURGICAL, Man's, Hood Type, Universal Size, Disposable

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a disposable, hood style cap of universal size. The cap is suitable for one-time use by surgical team members.

1.2 Classification. The cap covered by this specification shall be of two styles and one size.

Style A - Elastic neck closure.

Style B - Tie tape neck closure.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, or request for proposals, form a part of the specification to the extent specified herein:

SPECIFICATIONS

Federal

UU-P-268	Paper, Kraft, Untreated, Wrapping
PPP-B-636	Box, Fiberboard

STANDARDS

Federal

FED-TEST METHOD STD No. 191	Textile Test Methods

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:47Z
Check the source to verify that this is the currentversion before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise, indicated, the issue in effect on date of invitation for bids or request for proposals shall apply.

TECHNICAL MANUAL of the American Association
of Textile Chemists and Colorists - Volume 48, 1972.

(Application for copies should be addressed to the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, N.C. 27709.)

1972 ANNUAL BOOK OF ASTM
STANDARDS - Part 24

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

3. REQUIREMENTS

3.1 Base Material. The nonwoven fabric shall consist of 100 + 0 - 5 percent viscose rayon fibers bonded with a resin adhesive. This fabric shall be an all-textile product made from a carded or randomized web structure. The fabric shall be fire retardant treated. The finished fabric shall be non-pilling, lint free, noiseless, free of objectionable odor when wet or dry, non-toxic and non-irritating. The finished fabric shall conform to the requirements in table I.

Table I - Requirements

Characteristic	Style A - Cap	Style B - Cap
Tensile strength - lbs., min.		
Machine direction	4.5	25 1/
Cross direction	0.5	2 2/
Bursting strength - lbs., min.	16	-
Flame resistance - sec., min.	3.0	3.0
Surface resistivity, 50% R.H. - ohms/ Unit square, max.	1×10^{11}	1×10^{11}
Weight- grams/sq. yd., min.	20	31

1/ Sum of 3 - 1 inch wide, single ply samples.
2/ Average of 3 - 1 inch wide, 3 ply samples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

3.2 Color. The color shall be green, blue or blue-green.

3.3 Thread. The thread for overedge stitching shall be cotton, white or the same color as the base material, and of a suitable size, at the manufacturer's option, for the purpose intended.

3.4 Elastic. The elastic for the style A cap shall be cotton covered natural or synthetic rubber, suitable for the purpose intended.

3.5 Design. The cap shall be universal size, hood design in two styles as shown in figures 1 and 2.

3.6 Figure. Figures 1 and 2 are furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall control.

3.7 Construction. The style A cap shall be hood style, cut in one piece and closed by overedge (500 class) stitching, seam type SSa-1, with a minimum of 6 stitches per inch. The neck opening shall have elastic stitched around the circumference using stitching type EFd-1 or comparable, with a minimum of 6 stitches per inch. The machine direction of the fabric shall run in the vertical direction of the hood. The style B cap shall be hood style consisting of 2 side pieces with tapered tie extensions, and a tear-drop shaped crown. Sewing assembly shall use overedge (500 class) stitching, seam type SSa-1, with a minimum 6 stitches per inch. The face opening shall be overedge stitched with a minimum of 6 stitches per inch. The tie-tape extensions shall be graduated to a one inch width, with the machine direction of the fabric parallel to the tie extension direction.

3.8 Measurements. The finished measurements shall conform to the requirements of table II.

TABLE II. Finished measurements (inches)

	Fig 1-Style A		Fig 2-Style B		Tolerance
Height	A	13	A	11	± 1
Face opening	B	4-1/2	B	7-1/2	± 1/2
Chin height	C	5	-	--	± 1/2
Neck opening-diameter	D	6	D	9	± 1/2
Width	E	11	E	8-1/2	± 1/2
Extension-tie tapes	-	--	F	16	± 1
Width-tie tape	-	-	C	1	± 1/4
Crown width	-	-	G	6-1/2	± 1/2
Crown length	-	-	H	10	± 1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished cap shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities sutitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of conformance. Where certificates of conformance are submitted, the Government reserves the right to check test such item to determine the validity of the certification.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except when otherwise indicated herein.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced specifications, and standards unless otherwise excluded, amended, modified or qualified in the specification or applicable purchase document.

4.2.1.1 Testing of components. The components listed in table III shall be tested for the characteristics shown therein. The method of testing specified in FED. STD. NO. 191, whenever applicable, and as specified herein shall be followed. All test reports shall contain the individual values utilized in expressing the final result. The sample unit shall be 2 yards normal width of the finished material. The lot size shall be expressed in units of one yard. The lot shall be unacceptable if one or more of the sample units fail to meet any requirement specified. The inspection level shall be S-1 of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:47Z
Check the source to verify that this is the currentversion before use.

TABLE III. Test Method

Characteristic	Test Method
Tensile strength	5100 or ASTM D-1117-69
Bursting strength	5122 or 5120
Flame resistance	5908 1/
Surface resistivity	76-1972-AATCC 2/
Weight	5041

1/ Burning rate - 45 degree angle.
2/ 50 percent relative humidity.

4.2.2 Examination of the end item. The defects found during this examination shall be classified in accordance with defects listed in 4.2.2.1 and 4.2.2.2. The sample unit shall be one cap.

4.2.2.1 Classification of defects. All visual defects shall be classfied as indicated in table IV. The inspection level shall be level S-3 of MIL-STD-105. The acceptable quality levels shall be 2.5 for major defects and 4.0 for minor defects, expressed in defects per hundred units (DHU).

TABLE IV. Classification of defects

Major		
	101	Any cuts, holes, tears, mends or patches.
	102	Elastic omitted - style A only.
	103	Spots, stains - clearly visible at 3 feet distance.
	104	Incorrect design.
Minor		
	201	Color not as specified.
	202	Incorrect stitch class or seam type.
	203	Stitches per inch less than minimum.

4.2.2.2 Examination for dimensional defects. During this examination any measurement smaller or greater than the dimensions (including tolerances) specified shall be classified as a defect. The sample size shall be selected in accordance with inspection level S-3 of MIL-STD-105. The acceptable quality level shall be 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

4.2.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed shall be examined on shipping container fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling. Bulged or distorted container.
Content	Number of caps per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A or C as specified (see 6.2).

5.1.1 Unit of issue. One package, containing 500 caps, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in table V shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table V. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	2 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit package. Caps shall be packaged flat in a box of appropriate size and design constructed in accordance with PPP-B-636, type CF, class domestic. Closure shall be adequate to prevent accidental opening under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be waterproof in special requirements as specified in PPP-B-636.

5.2.1.2 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Fiberboard box shall be waterproof in accordance with paragraph 30.4 of PPP-B-636.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be closed by mehtod II of PPP-B-636. Fiberboard boxes shall conform to the special requirements as specified in PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:47Z
Check the source to verify that this is the currentversion before use.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit packages. Each unit package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable box is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The disposable cap covered by this specification is suitable for one-time use by surgical team members.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification is intended to cover the following item appearing in the Federal Supply Catalog:

National Stock No.	Item Identification
6532-00-083-6545	CAP, OPERATING, SURGICAL, Man's, Hood Type, Universal Size, Disposable, 500s: Blue-green; nonwoven fabric.

6.4 This specification does not include all types, classes, grades or sizes of the commodity indicated by the title of this specification, or which are commercially available, but is intended to cover the types which are normally procured to meet military requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

Custodians:
Army - MD
Navy - MS
Air Force - 03


Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1070

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

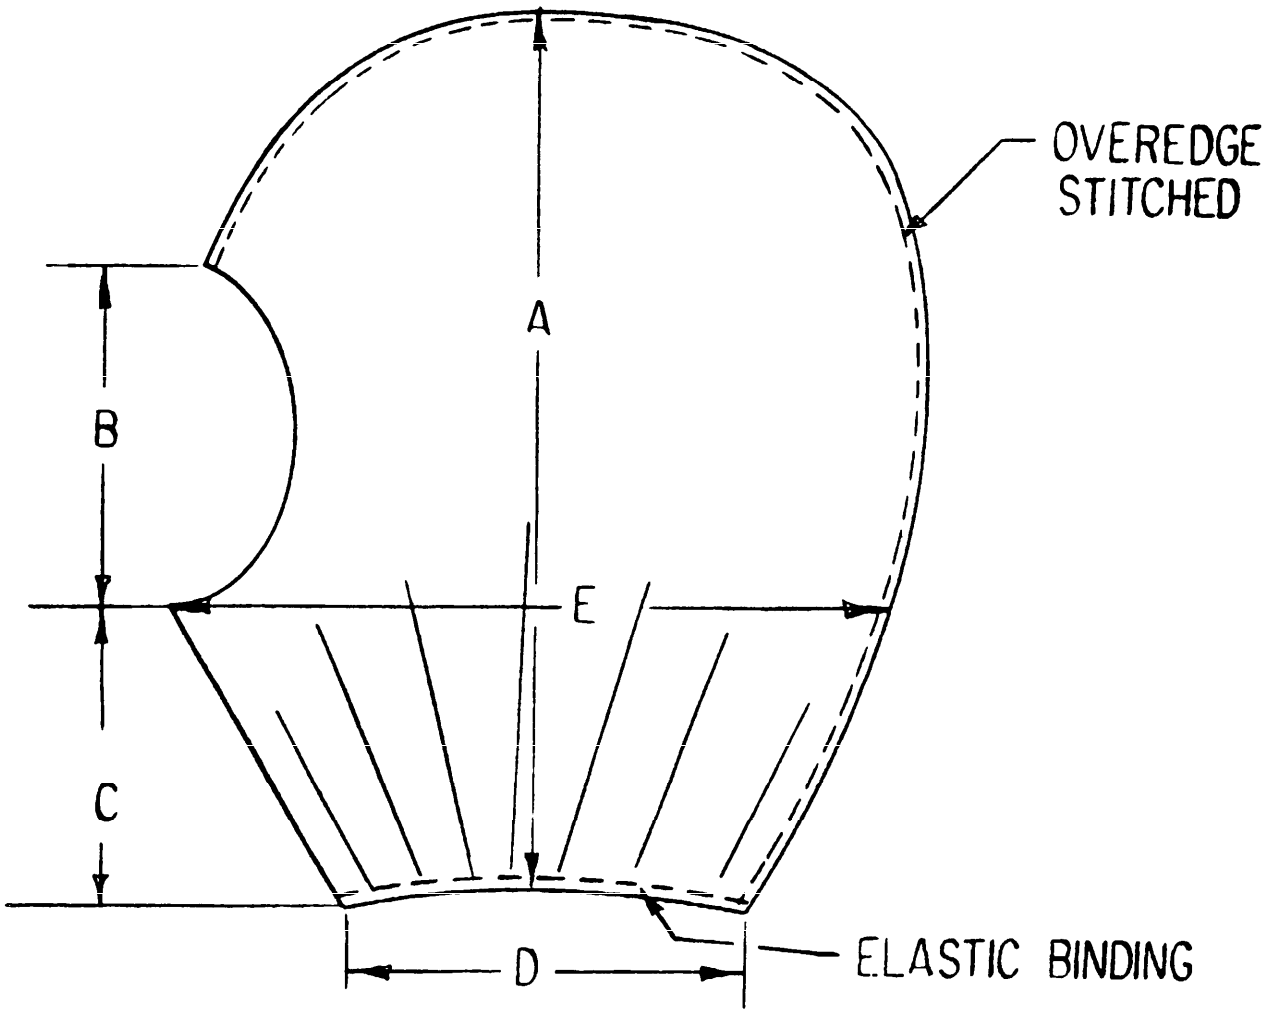



STYLE A

FIGURE 1

CAP, OPERATING, SURGICAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

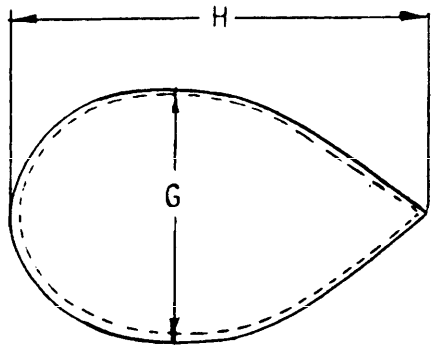

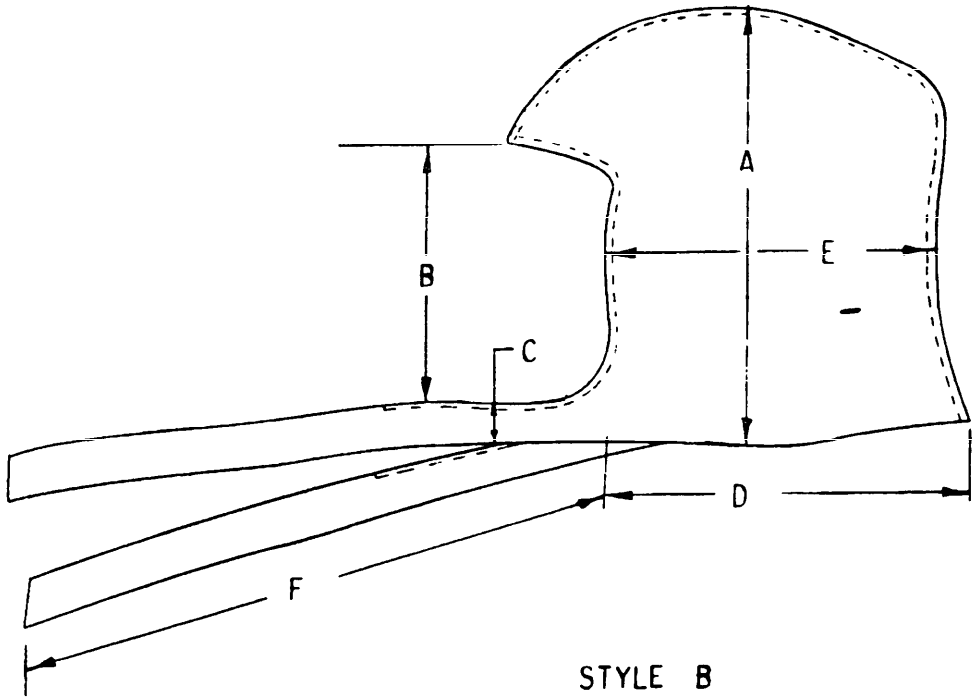

STYLE B

FIGURE 2

DWG 23299
16 JULY 73

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-37015

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:47Z
Check the source to verify that this is the current version before use.