MILITARY SPECIFICATION

# FORCEPS, NASAL SEPTUM CUTTING, CUPPED BLADES, McCoy, 6-1/2 INCH

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 This specification covers one type of nasal septum cutting forceps of the McCoy design, suitable for use during nasal operative procedures.

## 2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

| | |
|---|---|
| GG-I-526 | Instruments, Dental and Surgical; General Specifications. |
| PPP-B-566 | Boxes, Folding, Paperboard. |
| PPP-B-585 | Boxes, Wood, Wirebound. |
| PPP-B-601 | Boxes, Wood, Cleated-Plywood. |
| PPP-B-621 | Boxes, Wood, Nailed and Lock-Corner. |
| PPP-B-636 | Box, Fiberboard. |
| PPP-B-676 | Box, Setup. |

Military

| | |
|---|---|
| MIL-P-116 | Preservation, Methods of. |
| MIL-L-10547 | Liners, Case, and Sheet Overwrap; Water-Vaporproof or Waterproof, Flexible. |

STANDARDS

Military

| | |
|---|---|
| MIL-STD-105 | Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-129 | Marking for Shipment and Storage. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards, required by suppliers in connection with specific procurement functions should be obtained from the preparing activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General Requirements. The forceps shall be in accordance with the applicable requirements of GG-I-526 and the following option exercises under that specification.

3.2 Material. The forceps shall be fabricated from Class 4, Type 420, except shall have a minimum carbon content of 0.30 percent. As an alternate, the spring shall be fabricated from Class 3, Type 301, 302, 303, 304 or 316.

3.3 Hardness. After proper stress relieving, the handles and jaws shall have a Rockwell hardness of C50 to C55, with the exception of the screws or pins and spring.

3.4 Style, design and dimensions. Shall be a straight nasal septum cutting forceps of the McCoy design. Shall have a pair of rounded grip handles separated by a fine spring and a pair of rongeur style, sharp cutting blades. Shall be in accordance with Figure 1.

3.5 Locks. Shall be of the screw type.

3.6 Finish. Finish shall be mirror or mirror and stain. Locks shall be smooth and shall be polished but need not be buffed to a mirror finish.


3.7 Identification marking. In addition to GG-I-526 requirements, forceps of foreign manufacture shall also be marked "stainless".

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

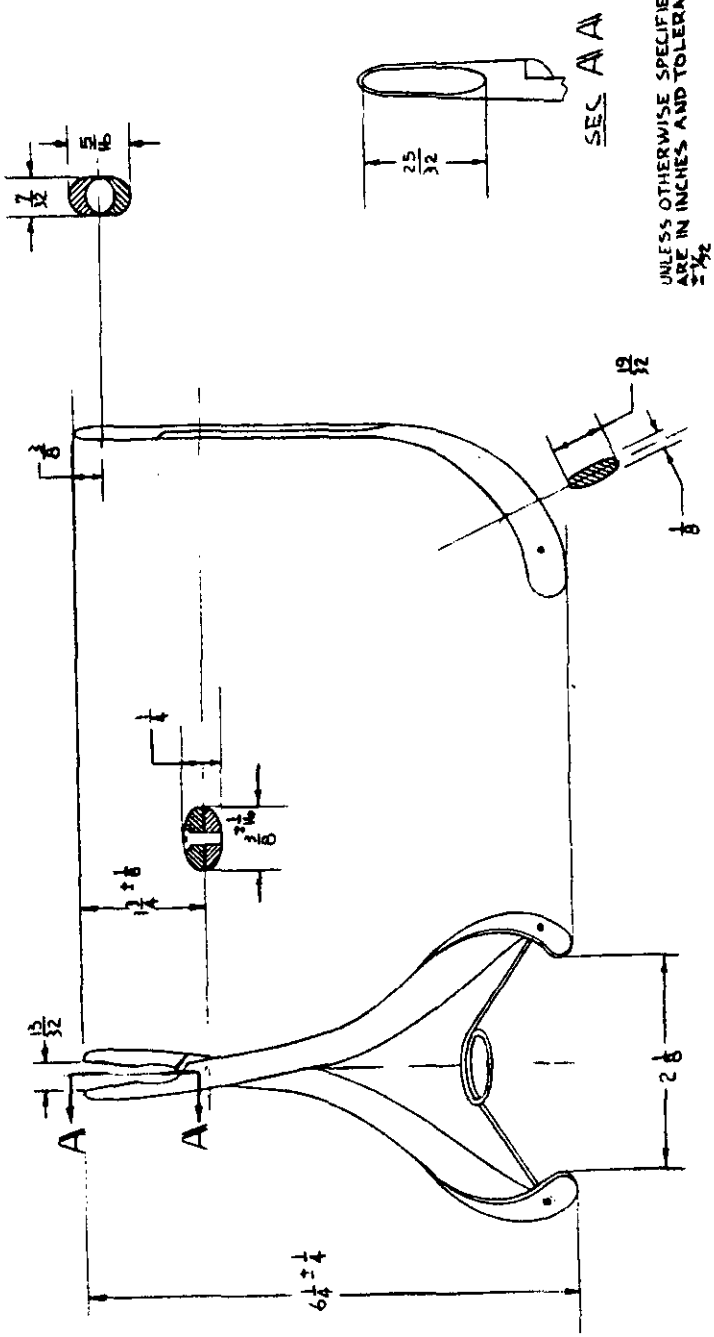


FORCEP, NASAL SEPTUM CUTTING

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

4.1.1 Inspection. Inspection shall be in accordance with GG-I-526.

4.1.2 Records. Records of examination and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.3 Certificates of quality. Certificates of quality supplied by the manufacturer of the corrosion resisting steel, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificates shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the Item Identification, the name of the material, the lot number, the lot size, the sample size, the date of testing, the test method, the individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105 and as indicated in Table I. The unit of product for examination purposes shall be one forceps.

Table I. Sampling Criteria for Examination

| Type of defect | Inspection level | AQL (Percent defective) |
|---|---|---|
| Major | II | 1.0 |
| Minor | II | 2.5 |

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105, and as indicated in Table II. Unit of product for test purposes shall be one forceps.

Table II. Sampling Criteria for Tests

| Component | Characteristic | Requirement | Test procedure | Inspection level | AQL |
|---|---|---|---|---|---|
| | Composition analysis | 3.2 and GG-I-526 | GG-I-526 | ** | * |
| 1-Forceps | Hardness | 3.3 and GG-I-526 | GG-I-526 | S-2 | 1.0 |
| | Dimensions | 3.4 | ------- | S-2 | 4.0 |
| | Boil test | GG-I-526 | GG-I-526 | S-2 | 1.0 |
| | Copper sulfate | GG-I-526 | GG-I-526 | S-2 | 1.0 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

* Acceptance number shall be zero for all sample sizes.
** Four ounces of sufficient amount from each lot of metal used in the construction of the forceps shall be selected for chemical analysis. Wherever feasible, the same sample unit shall be used for the determination of two or more test characteristics.

4.3 Examination. The forceps shall be examined to determine compliance with all requirements contained in this specification. Examination shall be conducted as specified in Table I and III. Examination however, shall not be restricted to defects listed in Table III. Any forceps in the sample containing one or more defects shall be rejected, and if the number of defective items in any sample exceeds the acceptance number for test sample, the lot represented by the sample shall be rejected.

*Table III. Classification of Defects*

| Categories | Defects |
|---|---|
| Critical | None defined. |
| Major | |
| 101 | Style and design not as specified. |
| 102 | Forceps not free from cracks, pits, dents, nicks, sharp edges and burrs. |
| 103 | Tips not properly aligned. |
| 104 | Opposing blades not sharp. |
| Minor | |
| 201 | Finish not as specified. |
| 202 | Identification marking not present, correct complete or legible. |

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One forceps, as specified, constitutes one unit of issue.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV shall be packaged in each unit and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging Quantities

| Unit package | Intermediate package | Exterior container |
|---|---|---|
| 1 unit | 6 units | 144 units |

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Cleaning and drying. Each unit shall be thoroughly cleaned and dried in accordance with the applicable method as outlined in MIL-P-116.

5.1.3.2 Preservative. Preservative shall not be utilized.

5.1.3.3 Intimate wrap. Each unit shall be wrapped in neutral tissue or other suitable anticorrosive material.

5.1.3.4 Unit package. Each unit shall be packaged in accordance with MIL-P-116, method IC-2.

5.1.3.5 Intermediate package. Intermediate package shall be a box of appropriate size and design constructed in accordance with PPP-B-566 or PPP-B-676, except that commercial colors will be acceptable; or PPP-B-636, type CF, class domestic. Closure shall be adequate to prevent accidental opening under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant. Closure and strapping shall be as specified in the appendix of the applicable box specification. Fiberboard boxes shall conform to the special requirements as specified in PPP-B-636.

5.2.1.2 Case liner. Each level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes. Each fiberboard box shall be waterproofed in accordance with 30.4 of PPP-B-636.

NOTE: Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be closed by method II of PPP-B-636. In addition, fiberboard boxes shall conform to the special requirements specified in PPP-B-636.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The nasal septum cutting forceps are to be used in cutting cartilaginous septum during nasal operative procedures.

6.2 Ordering data. Purchasers shoudl exercise any desired options offered herein, and the procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 National Stock Number (NSN) coverage. This specification covers the following item listed in the Federal Supply Catalog:

| National Stock Number | Item Identification |
|---|---|
| 6515-00-336-3800 | FORCEPS, NASAL SEPTUM CUTTING, Cupped Blades, McCoy, 6-1/2 inch |

It does not include all types or sizes as indicated by the title nor all types which are commercially available.

6.4 Supersession data. This specification includes the requirements of Purchase Description No. 2, dated 3 March 1955 for NSN 6515-00-336-3800 Forceps, Nasal Septum Cutting, Cupped Blades, McCoy, 6-1/2 inch.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DP

Project No. 6515-1784

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-F-37019

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

**DD FORM 1 JAN 72 1426** REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 304

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE MMT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:47Z
Check the source to verify that this is the current version before use.