MILITARY SPECIFICATION

FORCEPS, LARYNGEAL, JACKSON

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers laryngeal forceps of the Jackson design.

1.2 Classification. Forceps shall be furnished in the following types as indicated below (See 6.1):

Type I - Cup type
Type II - Grasping type
Type III - Foreign body removal type

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

GG-I-526	Instruments, Dental and Surgical, General Specifications.
PPP-B-585	Box, Wood, Wirebound.
PPP-B-601	Box, Wood, Cleated-plywood.
PPP-B-621	Box, Wood, Nailed and Lock-corner.
PPP-B-636	Box, Fiberboard.

Military

MIL-P-116	Preservation, Methods of.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications and standards, required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General Requirements. The forceps shall be in accordance with the applicable requirements of GG-I-526, and as specified herein.

3.2 Material. Type I forceps shall be fabricated from Class 4, type 420 material, except that the carbon content shall be 0.30 percent, minimum. Type II and type III forceps shall be fabricated from Class 4, type 420 material.

3.3 Hardness. After proper stress relieving, the Rockwell hardness of Type I forceps shall be C-50 to C-55 and after proper stress relieving, the Rockwell hardness of the Type II and Type III forceps shall be C-40 minimum.

3.4 Style, design, and dimensions. Shall be in accordance with Figure 1.


3.5 Finish. Shall be mirror or mirror and satin.

3.6 Identification marking. In addition to GG-I-526 requirements, forceps of foreign manufacture shall also be marked "stainless."

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

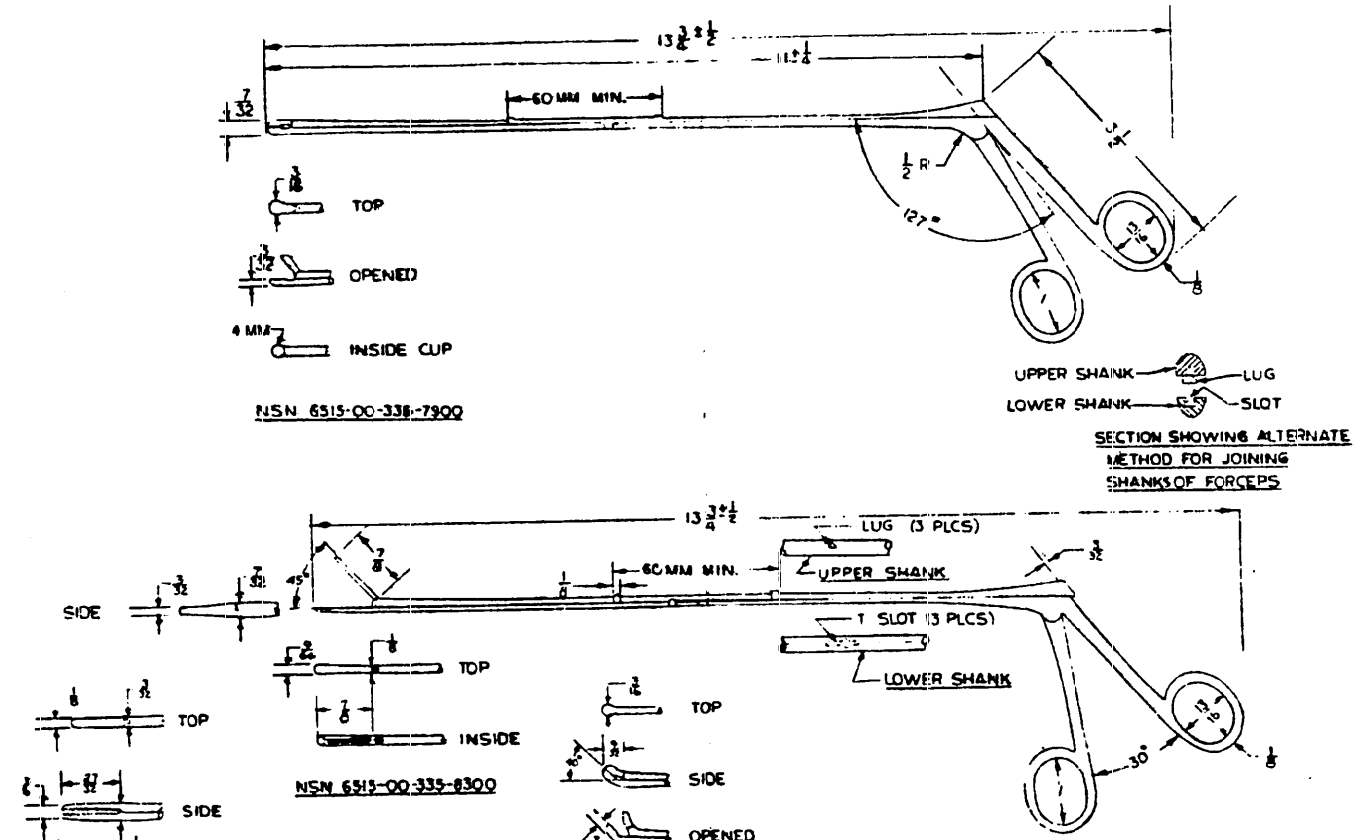

TOLERANCES:

UNLESS OTHERWISE SPECIFIED TOLERANCES SHALL BE AS FOLLOWS:

METRIC DIMENSIONS
- UP TO 6 MM INCLUSIVE — ± .4MM
- OVER 6MM TO 10 MM INCL — ± .8MM

FRACTIONAL DIMENSIONS
- UP TO 1/4 INCH INCL. — ± 1/64
- OVER 1/4 INCH THRU 7/8 INCH ± 1/32
- ALL ANGLES — ± 2°

GENERAL NOTES

1. SHANKS AND FINGER RINGS SHALL BE THE SAME FOR EACH INSTRUMENT SHOWN.
2. REMOVABLE CLIP MAY BE MOUNTED ON EITHER SIDE OF SHANKS
3. TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY, SYMMETRY AND FIRST QUALITY WORKMANSHIP

MIL-F-37048

FORCEPS, LARYNGEAL

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T09:51Z
Check the source to verify that this is the current version before use.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or proceudres) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.2 Certificates of quality. Certificates of quality, supplied by the manufacturer of the stainless steel, may be furnished in lieu of acutal performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

4.2 Sampling.

4.2.1 Sampling for examination. Sampling for examination shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptable quality levels shall be as indicated in Table I. The unit of product for examination purposes shall be one forceps.

Table I. Sampling for Examination

Type of defect	Inspection level	AQL (percent defective)
Major	II	1.0
Minor	II	2.5

4.2.2 Sampling for tests. Sampling for tests shall be conducted in accordance with MIL-STD-105 and as indicated in Table II. Where feasible, the same sample shall be used for the determination of two or more test characteristics.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:51Z
Check the source to verify that this is the current version before use.

Table II. Sampling for Tests

Component	Characteristics	Req.	Test procedure	Insp. level	AQL
Entire forceps	Composition analysis	3.2 and GG-I-526	GG-I-526	**	*
Entire forceps	Hardness	3.3 and GG-I-526	GG-I-526	S-2	*
Entire forceps	Dimensions	3.4	-	S-2	2.5
Entire forceps	Copper sulfate	GG-I-526	GG-I-526	S-2	*
Entire forceps	Boil test	GG-I-526	GG-I-526	S-2	*

*Acceptance number shall be zero for all sample sizes.
**Sufficient amount from each lot of each metal used in the construction of the forceps shall be selected for composition analysis.

4.3 Examination. The forceps shall be examined to determine compliance with specification requirements. Examination shall be conducted in accordance with MIL-STD-105 and the following classification of defects. Examination shall include, but not be limited to, the defects listed in Table III.

Table III. Classification of Defects

Categories	Defects
Critical	None defined.
Major	
101	Style and design not as specified.
102	Instrument not constructed as specified.
103	Instrument not free from sharp edges.
Minor	
201	Finish not as specified.
202	Instrument not permanently and legibly marked with either the name or trademark of the contractor.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2)

5.1.1 Unit of issue. One forceps, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	48 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Cleaning and drying. Each unit shall be thoroughly cleaned and dried in accordance with the applicable method as outlined in MIL-P-116.

5.1.3.2 Preservative. Preservative shall not be applied.

5.1.3.3 Intimate wrap. Each unit shall be wrapped in neutral tissue or other suitable anticorrosive material.

5.1.3.4 Unit package. Each unit shall be packaged in accordance with MIL-P-116, method IC-2.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing. Packing shall be Level A, B or C as specified (see 6.2).

5.2.1 Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3c. Closure and strapping shall be as specified in the appendix of the applicable box specification. Special requirements of applicable table shall apply for PPP-B-636 box.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3; PPP-B-601, domestic type; PPP-B-621, class 1; or PPP-B-636, class domestic. Closure shall be as specified in the appendix of the applicable box specification. Fiberboard box shall be closed by method II of PPP-B-636. Special requirements of applicable table shall apply for PPP-B-636 box.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delviery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The forceps are intended for removing abnormal growths and foreign objects from the larynx, trachea, and bronchi.

6.2 Ordering data. Purchasers should exercise any desired options offered herein, and the procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

6.3 This specification is intended to cover the following items appearing in the Federal Supply Catalog:

National Stock No.	Item Identification
6515-00-335-7600	FORCEPS, LARYNGEAL, Cup, Angular Jaw, Medium, Jackson, 28 cm.
6515-00-335-7900	FORCEPS, LARYNGEAL, Cup, Straight Jaw, Medium, Jackson, 28 cm.
6515-00-335-8300	FORCEPS, LARYNGEAL, Grasping, Jackson, 28 cm.
6515-00-335-8500	FORCEPS, LARYNGEAL, Foreign Body Removal, Jackson, 28 cm.

It does not include all types or sizes as indicated by the title nor all types which are commercially available.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6515-1815

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:51Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, PA 19101

POSTAGE AND FEES PAID
DOD - 304

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.