MILITARY SPECIFICATION

SUPPORT, LEG CALF, ELASTIC, SEAMLESS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for pressure control elastic stockings used to reduce the risk of pulmonary embolism.

1.2 Classification. Support stockings covered by this specification shall be of one type in the following sizes, as specified (see 6.2):

Size

Small - regular length	Large - regular length
Small - extra length	Large - extra length
Medium - regular length	X Large - regular length
Medium - extra length	X Large - extra length

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

PPP-B-566	BOX, Folding, Paperboard.
PPP-B-636	BOX, Fiberboard.
PPP-B-676	BOX, Setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-Test Method-STD-191	Textile Test Methods.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), before production is commenced, 12 finished pairs of socks shall be submitted or made ready for the contracting officer or his authorized representative for inspection as specified in 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production item.

3.2 Knitting yarns.

3.2.1 Top.- The yarn shall be a stretch type nylon yarn processed from two ends of 30 ± 5 denier, 10 filament nylon.

3.2.2 Leg and foot.- The yarn shall be a stretch type nylon yarn processed from a single end of 70 ± 5 denier, 17 filament nylon.

3.2.3 Heel and toe.- The yarn shall be a stretch type nylon yarn processed from 2 ends of 40 ± 5 denier, 13 filament nylon.

3.2.4 Elastic yarn.- The yarn shall be 280 ± 5 denier extruded spandex elastometer. The elastic yarn shall have 16,400 ± 200 yards per pound, and a minimum of 500 percent elongation. The yarn shall be single wrapped with multi-filament nylon.

3.2.5 Color code size indicator. In addition to the size marking specified in 3.3, colored nylon stretch yarn shall be used as a size indicator in the under toe turn-over area. The size color code shall be : small-yellow, medium-natural, large-blue, x large-green.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the current version before use.

3.3 Label. Each stocking shall have a size marking applied and centered on the knitted top. The size marking shall conform to type III, class 9 of DDD-L-20. The color of the marking medium shall be blue or green. The size marking shall be clearly legible and show good fastness to laundering transference (wool method). The minimum height of the characters for each size stocking shall be 1/4 inch.

3.4 Color. The color of the finished stockings, except for the open toe, color code size indicator, shall be white.

3.5 Design. The support stockings shall be seamless, contour circular knit, proportioned pressure control.

3.6 Construction.

3.6.1 Knitting. The stockings shall be contour knit seamless in one integral unit, on a 401 needle circular machine having a cylinder diameter of 3-3/4 inches.

3.6.1.1 Top. The top shall be knit with a plain or jersey stitch using the yarn specified in 3.2.1. The top shall be turned over (double) and shall finish 1-1/2 ± 1/4 inches in length.

3.6.1.2 Leg and foot. The leg and foot shall be knit with a plain or jersey stitch using the yarn specified in 3.2.2. The elastic yarn specified in 3.2.4 shall be laid-in on alternate knitting rounds.

3.6.1.3 Heel and toe. The heel and toe shall be knit with a plain or jersey stitch using the yarn specified in 3.2.3. The heel shall have 44 gore needles on each side. The toe shall have 55 gore needles on the left side and 56 gore needles on the right side.

3.6.1.4 Under toe area. A welt of doubled stretchable elastic fabric using the yarns specified in 3.2.4 and 3.2.5 shall be knit defining the opening normally in that portion of the stocking underlying the base of the toes. The welt shall permit stretching the opening from its normal position and over the ends of the toes for medical inspection purposes. The welt shall finish 1/8 ± 1/16 inches.

3.6.2 Length of loose ends. All ends of yarn on the inside of the finished stocking shall be trimmed to not less than 1/4 inch nor more than 1 inch.

3.6.3 Finishing. The stockings shall be boarded on drying forms to their minimum size and length.

3.6.4 Pairing. The stockings shall be matched and paired, so that there will be no greater difference in foot length than 1/4 inch, and in leg length, 1/2 inch. The use of thread, twine or staple to secure a pair of stockings will not be permitted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

3.6.5 Instruction label. An instruction label shall be legibly printed on a separate sheet of white paper and inserted with each pair of stockings into the immediate polyethylene envelope or container. The instruction label shall state substantially as follows:

SUPPORT, LEG, CALF

ELASTIC STOCKINGS

For Controlled Compression

FITTING CHART

Size	Calf Circumference	Length	Color Code
Small	to 12"	to 16"	Yellow
Small X-Length		over 16"	Yellow
Medium	12"-15"	to 17"	Natural
Medium X-Length		over 17"	Natural
Large	15"-17-1/2"	to 18"	Blue
Large X-Length		over 18"	Blue
Extra Large	over 17-1/2"	to 18"	Green
Extra Large X-Length		over 18"	Green

HOW TO PUT ON

1. Insert hand into top of stocking.
2. Grasp heel pocket and turn stocking inside out to the pocket.
3. Stretch stocking open at the heel and fit foot and heel pocket.
4. Grasp top of stocking and pull over foot and ankle - begin pulling up and fitting around ankle and calf, working up to full length.
5. Make sure heel and toe fit snugly. Smooth excess material with palms of hands. If necessary, pull toe section forward to eliminate wrinkles across instep. Slipover inspection toe allows inspection of area after stocking has been donned.

CAUTION: DO NOT COVER ANY PORTION OF KNEE - DO NOT TURN DOWN TOP OF STOCKING.

WASHING INSTRUCTIONS:

1. May be hand washed or washed in regular washing machine with other "white items." Do not use excessive bleach.
2. Machine dryable. (CAUTION) Do not allow stocking to remain in machine after they are dry. Prolonged subjection to high temperatures can reduce the wear life of the stocking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

As soon as practicable after award of the contract or purchase order, the contractor shall furnish to the Contracting Officer, via the cognizant Government inspector, two preliminary copies of his proposed Instructions, for review and comment by the Directorate of Medical Materiel, Defense Personnel Support Center. The preliminary text shall be submitted sufficiently early to permit adequate review by the Directorate of Medical Materiel, Defense Personnel Support Center (based on a maximum of 30 days for such review) and to allow incorporation by the contractor of any required revisions and corrections in the final text without delaying delivery under the contract or purchase order. Should the supplier have furnished acceptable Instructions for use for the identical item within two years preceding the date of contract and proposes to furnish Instructions identical with those previously accepted, then the requirement for review of the draft may be waived upon request to the Contracting Officer.

3.7 Physical requirements.

3.7.1 Measurements and weights. The measurements and weights of the stockings shall conform to table I. All measurements in table I shall be made with the stocking laid out flat under no tension. Testing shall be as specified in 4.3.3.

Table I - Measurements and weights

	Fig. 1	SIZE Small RL	Small XL	Medium RL	Medium XL	Large RL	Large XL	X Large RL	X Large XL	Tolerance
Top: Length of turn-over-inches	A	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	1-1/2	±1/4
Leg: Length-inches	B	10-1/2	12-1/4	11-1/4	13-1/4	12	13-1/4	13-1/2	13-3/4	±1
Foot: Length-inches	C	4	4-1/4	4-1/4	4-1/2	4-3/4	5	5-1/2	5-3/4	±1/4
Under toe opening: Length of turn-over-inches	D	1/8	1/8	1/8	1/8	1/8	1/8	1/8	1/8	±1/16
Conditioned weight: per doz./ pr./oz.		13.0	14.6	13.6	14.7	14.6	15.3	17.0	18.4	Min.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

3.7.2 Stretch. The finished stocking shall conform to the stretch requirements listed in table II when tested as specified in table VI.

Table II - Stretch requirements for finished stockings (inches)

Size	Length	Ankle Width	Calf Width
Small - RL	21-1/2	10-1/4	11-1/2
Small - XL	23-1/2	10-1/4	11-1/2
Medium - RL	22-1/2	10-1/2	12-1/2
Medium - XL	24-1/2	10-1/2	12-1/2
Large - RL	23-1/2	10-1/2	13-1/2
Large - XL	25-1/2	10-1/2	13-1/2
X Large - RL	28-1/2	11	15
X Large - XL	30-1/2	11	15
Tolerance	±1	±3/8	±1/2

3.8 Pressure patterns. The pressure level shall be 14 ± 4 mmhg. The pressure may be uniform or graduated, exhibiting decreasing levels from ankle to calf.

3.9 Workmanship. The stockings shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the currentversion before use.

4.2 First article inspection. When required, the first article sample submitted in accordance with 3.1, shall be inspected as specified in 4.3.2.1 and 4.3.2.2 for compliance with design, construction, workmanship and dimensional requirements.

4.3 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.3.1.1 Testing of components. In addition to the quality assurance provisions of the referenced specifications, testing shall be performed on the components listed in table IV. The methods of testing specified in FED-Test Method STD-191 wherever applicable and as specified herein, shall be followed. The lot size shall be expressed in units of one spool, cone or tube and the sample unit shall be one spool, cone or tube. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with table III and the lot shall be unacceptable if one or more units fail to meet any requirement specified.

Table III. Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Table IV. Component tests

Component	Characteristic	Requirement reference	Test method	No. of determinations per sample unit	Results reported as
Nylon yarn	Material identification	3.2.1 & 3.2.2 & 3.2.3	1/	-	-
	Denier and filament	3.2.1 & 3.2.2 & 3.2.3	1/	-	-
Elastic yarn	Denier	3.2.4	1/	-	-
	yards per pound	3.2.4	4010 1/	-	-
	Elongation	3.2.4	4.4.1 1/	5	Average of 5 determinations to nearest percent

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

4.3.2 Examination of the end item. Defects found during this examination shall be classified in accordance with the lists shown in 4.3.2.1 and 4.3.2.2. The sample unit for these examinations shall be one individual stocking. The lot size shall be expressed in units of one individual stocking. The inspection levels and acceptable quality levels for these examinations shall be in accordance with 4.3.2.3.

4.3.2.1 Visual examination. The finished stockings shall be visually examined for defects listed in table V.

Table V. Classification of defects

Defect	Classification Major	Minor
Any holes, runs or dropped stitches.	X	
Thin areas, mends.	X	
Top omitted, cut, frayed, raveled.	X	
Toe turn-over omitted, cut, frayed, raveled.		X
Poor fashioning of heel gore resulting in tight tension, lumps and dog-ears that will not level out.	X	
Loose or floated ends:		
Not trimmed as specified.		X
Ends floating more than 1 inch inside of sock.		X
Any floated ends on outside of sock.	X	
Pattern of knit:		
Not as specified throughout entire sock.	X	
Sock not knitted as an integral unit.	X	
Elastic yarn omitted.	X	
End out for more than one course - body.	X	
Nonuniform in overall appearance, not well shaped.		X
Slubby yarn more than three times normal diameter.		X
Streaks, stains, or spots, clearly noticeable. 1/		X
Rancid or bad odor.	X	
Loosely knit - slack or sleazy.	X	
Label missing, incorrect, illegible.	X	

1/ At normal inspection distance (approximately 3 feet).

4.3.2.2 Examination for dimensions. Examination for dimensions shall be in accordance with the classification of defects listed below. The sample size shall be drawn in pairs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

Defects	
Leg length Foot length Top length Toe turn-over length	More or less than specified tolerance.
Pairing	Mismated by more than 1/4 inch in foot length or 1/2 inch in leg length (tallied only for one sock in any pair).

4.3.2.3 Inspection levels and acceptable quality levels (AQL's). The inspection levels and AQL's expressed in defects per 100 units shall be as follows:

Examination	Inspection level	AQL Major	AQL Total (Major and Minor)
4.3.2.1 Visual	I	1.5	4.0
4.3.2.2 Measurements	S-3	- (1 class)	4.0

4.3.3 Testing of the end item. The test methods listed in table VI shall be in accordance with FED Test Method-STD-191 except as otherwise noted, and as described herein. The physical and chemical values specified in section 3 apply to the average of the number of test specimens selected for a sample unit for test purposes as specified in the applicable test methods. When the data in the "Number of determinations per sample unit" and "Results reported as" columns are not specified in table VI they shall be as required by the referenced test method. The lot size shall be expressed in units of one stocking each. Except as indicated below for weight and stretch determinations, the sample size shall be in accordance with table III and the lot shall be unacceptable if one or more units fail to meet any requirement specified. The sample unit for test purposes shall be as follows:

Weight determination:	Twelve pairs of stockings from each size represented. The sample size shall be one unit regardless of lot size.
Stretch determination:	Five individual stockings from each size in the lot. The sample size shall be one unit regardless of lot size.
All other test determinations:	Five individual stockings representing each size in the lot proportionately.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the current version before use.

Table VI. End item tests

Characteristic	Requirement reference	Test method	Number of determinations per sample unit	Results reported as:
Type of knit	3.6.1.1 3.6.1.2 3.6.1.3	1/	-	-
Weight per dozen pairs (conditioned)	Table I	Scale	1	To nearest 0.25 ounce
Stretch (crosswise): Calf and ankle	Table II	4.4.2	5 each calf and ankle	Average of 5 determinations to nearest 1/4 inch
Stretch length	Table II	4.4.3	5	Average of 5 determinations to nearest 1/4 inch

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

4.3.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table VII. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Table VII. Classification of Preparation for Delivery Defects

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application. Size shown on stockings not the same as on the containers. 1/
Materials	Any component missing. Any component damaged, affecting serviceability
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:49Z
Check the source to verify that this is the currentversion before use.

Table VII. Classification of Preparation for Delivery Defects (cont'd)

Examine	Defect
	strapping, inadequate stapling. Bulged or distorted container.
Content	Number of bundles per container is more or less than specified. Number per bundle is more or less than required. 1/

1/ For this defect, one bundle shall be examined from each shipping container in the sample.

4.4 Test.

4.4.1 Elastic yarn elongation. A specimen of yarn at least 6 inches in length shall be measured while under no tension and then stretched to its extreme, without breaking, and again measured with a suitably graduated scale. A scale reading directly in percent elongation may be used. Five specimens, randomly selected, shall be tested from each sample unit. The elongation shall be the average of specimens tested and shall be calculated as follows:

$$\text{Elongation, percent} = \frac{S - R}{R} \times 100$$

Where: S = extreme stretch measurement
R = relaxed (original) measurement

4.4.2 Crosswise (width) stretch. The crosswise (width) stretch shall be measured by placing the stocking over the arms of a stretch machine at each test site - ankle and calf, and allowing the fabric to stretch to its limit when a 14 pound pull is exerted.

4.4.3 Length stretch. The length stretch shall be measured by using a vertical plastic board, a volume length form, with separate toe pieces for foot size. The stocking shall be positioned with the heel squared and held, then pull stocking fabric down to maximum extension. The maximum length is read from the board which is marked or graduated in inches to 1/4 inches.

4.4.4 Determination of pressure patterns (See 3.8). Test method and equipment shall be as specified in the Instron Fabric Tension, Kendall "T" - Pin Test for Surgicals and Support Hosiery (see 6.4).

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:49Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One pair of leg supports of the size specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of issue indicated in Table VIII shall be packaged in each unit, intermediate, and exterior container as applicable, for the required level of protection specified in the procurement document.

Table VIII. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	12 units	72 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Unit of issue. One pair of stockings shall be neatly folded and packaged in a suitable envelope of appropriate size. Closure of the envelope shall be adequate to prevent spilling of contents under normal handling and to prevent the entry of dust. In addition, each envelope shall have a laundry instruction sheet enclosed.

5.1.3.2 Intermediate package. Intermediate package shall be a box of appropriate size and constructed in accordance with PPP-B-566 or PPP-B-676 except that commercial colors are acceptable. Closure shall be adequate to prevent spilling of contents under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-636, class weather-resistant. Each fiberboard box shall conform to the special requirements specified in Table II of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

5.2.1.3 Closure. Closure of each fiberboard box shall be as specified in the appendix, and waterproofing shall conform with 30.4.2 of PPP-B-636.

5.2.1.4 Strapping. Strapping, when required shall be in accordance with appendix of the box specification.

NOTE: Strapping shall not be required for shipments forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-636, class domestic. Closure of fiberboard boxes shall conform to method II as specified in PPP-B-636. In addition, each fiberboard box shall conform to the special requirements specified in Table I of PPP-B-636.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package. In addition to any commercial markings, each unit package shall be marked with the national stock number. (Strip labeling is acceptable).

5.3.2 Intermediate packages. Each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable box is fabricated of water-resistant material. Contract or purchase order number, and name of contractor shall be shown.

5.3.3 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The support, leg calf is intended for use by Department of Defense personnel to reduce the risk of pulmonary embolism.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. National stock number (NSN).
c. Specify size support required (see 1.2).
d. Whether first article sample is required.
e. Selection of applicable levels of packaging and packing (See 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:49Z
Check the source to verify that this is the currentversion before use.

6.3 Instron Fabric Tension, Kendall "T" - Pin Test for Surgical and Support Hosiery may be obtained from Kendall, 309 West Jackson Boulevard, Chicago, Illinois 60606. (see 4.4.4).

6.4 The support, leg calf covered by this specification is listed in the Federal Supply Catalog under the following stock numbers:

National Stock Number	Item Identification
6515-00-118-1929	SUPPORT, LEG CALF, Elastic, Seamless, Extra Large, Regular Length
6515-00-118-1933	SUPPORT, LEG CALF, Elastic, Seamless, Extra Large, Extra Length
6515-00-431-6151	SUPPORT, LEG CALF, Elastic, Seamless, Small, Extra Length
6515-00-451-2603	SUPPORT, LEG CALF, Elastic, Seamless, Large, Regular Length
6515-00-451-2604	SUPPORT, LEG CALF, Elastic, Seamless, Small, Regular Length
6515-00-451-2605	SUPPORT, LEG CALF, Elastic, Seamless, Medium, Extra Length
6515-00-451-2606	SUPPORT, LEG CALF, Elastic, Seamless, Medium, Regular Length
6515-00-451-2607	SUPPORT, LEG CALF, Elastic, Seamless, Large, Extra Length

6.5 This specification does not include all types, classes, grades, or sizes of the commodity indicated by the title of this specification or those which are commercially available, but is intended to cover the types and sizes which are normally procured to meet military requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03


Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No.: 6515-1800

Review information is current as of the date of this document. For future coordination changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the current version before use.

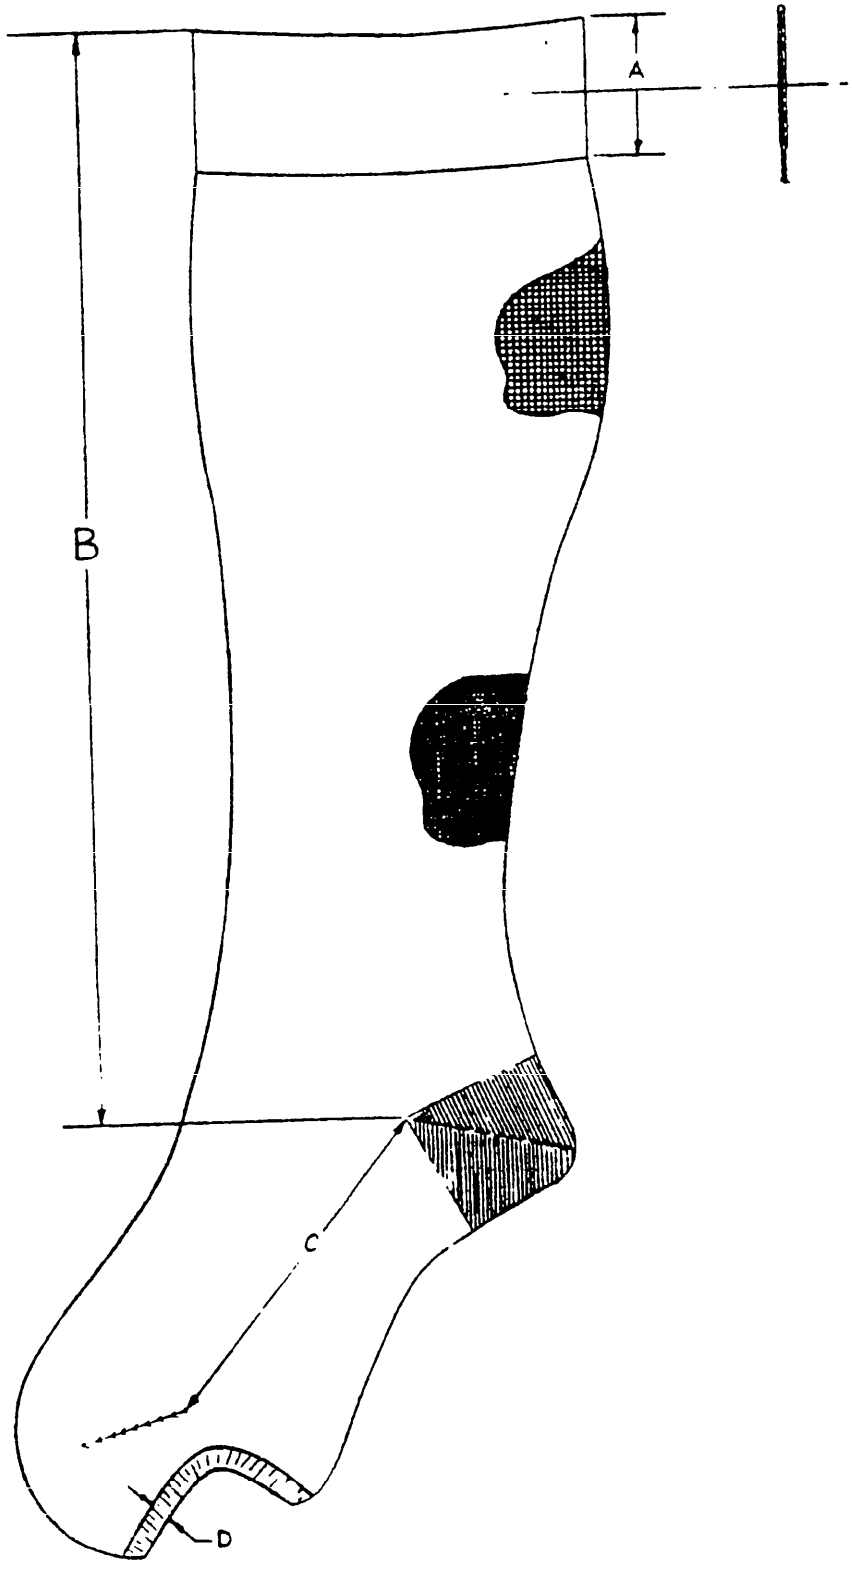

SUPPORT LEG CALF

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS. The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-S-37033 and P.D. #1

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD - 384

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA. 19101

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the current version before use.