MILITARY SPECIFICATION

TROUSERS, OPERATING, SURGICAL MEN'S, COTTON-POLYESTER, STATIC RESISTANT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers static-resistant operating room trousers used by male surgical team members.

1.2 Classification. The trousers shall be of four sizes as specified (see 6.2).

Sizes.	Small
	Medium
	Large
	Extra Large

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

DDD-L-20	Label; For Clothing, Equipage, and Tentage. (General Use).
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Boxes, Shipping, Fiberboard.
PPP-B-676	Box, Setup.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the current version before use.

Military

MIL-L-10547	Liners, Case, and Sheet, Overwrap, Water-vaporproof or Waterproof, Flexible.
MIL-T-43548	Thread, Polyester, Cotton-covered
MIL-T-43624	Thread, Polyester, Spun.

STANDARDS

Federal

FED-STD-751	Stitches, Seams, and Stitchings.
FED-Test Method Std No. 191	Textile Test Methods.

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL FIRE CODES - Volume 2 1972

(Application for copies should be addressed to National Fire Protection Association, International (NFPA), 470 Atlantic Avenue, Boston, Massachusetts 02210.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Materials.

3.1.1 Basic fabric. The base fabric shall be a nominal 65 percent polyester, 35 percent combed cotton, 1 percent austenitic type, corrosion-resistant, stainless steel fibers having a nominal diameter of 8 microns. The fabric shall conform to the following requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

TABLE I - BASIC FABRIC PROPERTIES

Characteristic	Requirement
Weave	plain
Yarn ply - warp and filling	single
Weight - oz./sq. yd., min.	4.8
Nonfibrous materials - percent, max.	2.0
pH	5.0 to 9.0
Yarns/inch, min.	
Warp	70
Filling	50
Breaking strength - lbs., min.	
Warp	90
Filling	90
Shrinkage percent, max.:	
Warp	3.0
Filling	3.0
Antistatic properties.	
Surface resistivity - ohms per unit square max.	1×10^{11}
or	
Static Decay - sec max	0.5

3.2 Color. The color of the base fabric (3.1.1) shall be Grayish Green conforming to the standard shade sample (see 6.3). The use of dyes or substances containing elementary sulfur or compounds capable of oxidation to sulfuric acid is prohibited. The dyed and finished fabric shall show not more than a slight trace of sulfur

3.2.1 Matching. The color of the fabric (3.1.1) shall be a good approximation to the standard sample under natural (north sky) daylight or artificial daylight having a color temperature of 7500° kelvin.

3.2.2 Colorfastness. The dyed and finished fabric shall show fastness to light, laundering, perspiration and dry crocking equal to or better than the standard sample.

3.3 Thread. The thread for seaming and stitching shall be cotton covered polyester thread, ticket Nos. 70, 2-ply and 50, 3-ply conforming to MIL-T-43548 or shall be spun polyester thread, ticket Nos. 70, 2 or 3-ply or 40, 3-ply and 50, 3-ply conforming to Class 1 or 2 of MIL-T-43624. Where spun polyester thread is used the 40, 3-ply and 50, 3-ply may be used in lieu of 50, 2-ply specified in Table II and the 70, 2 or 3-ply may be used in lieu of 70, 2-ply specified in Table II.

3.3.1 Color of thread. The color of all thread shall be a good match to the basic fabric color.

Source: https://assist.dla.mil -- Downloaded: 20260-21T09:49Z
Check the source to verify that this is the current version before use.

3.4 Label.- Each trouser shall have a combination size and identification label conforming to type I, classes 1 and 2 of DDD-L-20. As an alternate, a combination size and identification label constructed of cotton coutil cloth or poplin having a greige weight of 2.11 yards per pound based on 45 inch width may be used. The label shall be sew-on type.

3.4.1 Printing.- The label shall be printed in accordance with type I, classes 1 and 2 of DDD-L-20.

3.4.2 Instruction label. The laundry instruction label shall conform to type I, Class 3 of DDD-L-20, except the content of instruction shall be as follows:

1. For machine washing, use wash and wear cycle or durable press cycle. Wash with moderately hot water (140°F), using soap or mild detergent.

2. For hand washing, wash in moderately hot water as described above. DO NOT WRING OR TWIST.

3. Dry in tumble dryer at medium setting. Remove immediately at end of drying. Shape and hang.

4. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touching up is required, iron at a moderate heat setting.

DO NOT REMOVE THIS LABEL

3.4.3 Laundering instructions. The following laundering instructions shall be legibly printed on a suitable paper insert that shall be placed in a visible position within the unit package containing the finished trousers (see 5.1). Lettering shall be a minimum 1/8 inch. Size of insert shall be at the option of the supplier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

Laundering Instructions

OPERATION	LEVEL (INCHES)	TEMPERATURE °F	TIME MINUTES	SUPPLIES/100 LBS. CLEAN GARMENTS
1. Flush	12	Cold	3	none
2. Suds	6	140	10	sodium metasilicate 1.5 lbs. sodium tripolyphosphate (STPP) 0.5 lbs. nonionic detergent 1.0 lbs. (1 pint) brightener (whites only) 1.0 oz.
After 10 min. at 140°F raise to 160°F for 10 min.				
3. Rinse	10	150	3	
4. Bleach (white only)	10	150	5	1% sodium hypochlorite 2.0 qts. (rinse colors instead)
5. Rinse	10	135	3	
6. Rinse	10	120	3	
7. Rinse	10	105	3	
8 Sour	6	Cold	5	ammonium silicofluoride 1 oz.

Notes. A. Wash Polyester/Cotton only with Polyester/Cotton.
B. Wash whites separately, be sure wheel is clean.
C. Load wheel only to 2/3 its rated capacity

3.5 Design. The trousers shall be pajama style with a crossed drawstring waist, no front opening, hip pockets attached to back hip - on inside and outside - arranged to be on the right hip when on the outside

3.6 Construction. The construction of the trousers shall conform to the specified design (3.5), Figure 1, par 3.8, 3.8.1, 3.8.2, 3.9 and table II specified herein. The dimensions shown in Figure 1 are based on size medium, and except where specified in tables II and III, are reference dimensions. The contractor is permitted to make adjustments in the reference dimensions necessary to grade patterns for the various size trousers. The finished patterns shall be graded to provide a proportional and balanced trouser. The finished trousers shall conform to the measurements specified in table III

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the current version before use.

3.7 Patterns. The patterns shall be prepared and furnished by the Government.

3.8 Stitches, seams and stitching.- Stitch, seam and stitching types specified in table II shall conform to Fed. Std. No. 751. When two or more seam or stitching types are given for the same operation, any one of them may be used. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the garment. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or oper seams shall result. The gage of stitching shall be 1/4 to 5/16 inch for all double-lapped, double-stitched seams with the outer row of stitching 1/16 inch from edge on outside of garment.

3.8.1 Stitches per inch.- The minimum and maximum number of stitches per inch shall be as specified in table II.

3.8.2 Thread breaks and ends of seams - Ends of all seams or stitching produced with 301 stitch type, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. Thread breaks, all stitch types, shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 seaming, may be repaired by using 301 stitch type.

3.9 Marking. The parts of the trousers shall be marked to insure correct size and a uniform shade throughout. Any method of marking may be used except:

(a) Metal fastening devices.
(b) Sew-on type markings.
(c) Adhesive type markings which leave an impression or traces of paper or adhesive on the material upon removal of the marking.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the currentversion before use.

TABLE II

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Cutting.-					
	a. Cut all major component parts in the warp direction. Minor component parts may be cut in either the warp or filling direction					
2.	Replacement of damaged parts.-					
	a. Replace at time of cutting any part containing damages such as holes or seriously weakening defects such as smashes and multiple floats.					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into a hole, cut, tear, burns or large exposed drill holes.					
3.	Marking (see 3.9).-					
	a. Mark or ticket all parts to insure a uniform shade and proper assembly throughout the garment.					
4.	Hem rip pockets					
	a. Turn top of pockets with raw edge turned in, stitch 1/16 to 1/8 inch from edge. Finished hem shall measure 1/2 ± 1/8 inch in width.	301	EFb-1	10-14	50-2	50-2
5.	Sew or rip pockets.					
	Finished appearance - The pockets of the trousers - 1 on the outside and 1 on the inside- shall finish 6-1 ± 1/4 inches deep and 5 ± 1/4 inches wide					
	a. Turn in side and bottom edges of pockets and stitch to the inside and outside right rip, 1 16 to 1/8 inch from pocket edge	301 or 401	SSa-2 SSa-2	10-14 10-14	50-2 50-2	50-2 70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

TABLE II

NO	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM & STITCHING TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
6.	Join fronts.-					
	a. Join foreparts at front with a double-lapped, double-stitched seam. The right front shall be over the left front.	301 or 401	LSc-2	10-14	50-2	50-2
			LSc-2	10-14	70-2	70-2
7.	Join backs.-					
	a. Join back parts at back with a double-lapped double-stitched seam. The right back shall be over the left back.	301 or 401	LSc-2	10-14	50-2	50-2
			LSc-2	10-14	50-2	70-2
8.	Join outseams and inseams.-					
	a. Join forepart to back part at the outseams and inseams with a double-lapped, double-stitched seam. Inseams at crotch, may be staggered not more than 1/4 inch.	301 or 401	LSc-2	10-14	50-2	50-2
			LSc-2	10-14	50-2	70-2
9.	Hem bottom of legs -					
	a. Turn in bottom of trouser leg in accordance with notches on pattern, turn in raw edge and stitch 1/16 to 1/8 from edge, with finished hem measuring 7/8 ± 1/8 inches in width.	301	EFb-1	10-14	50-2	50-2
10.	Make buttonholes.-					
	a. Two vertical buttonholes, of a type suitable for drawcord outlets, shall be positioned at the top of trousers, one on each forepart to finish 1/2 to 1 inch from center front and centered across waistband and width.					
	b. Make a 5/8 to 3/4 inch vertical buttonhole on each forepart at top of trousers.	Buttonhole		44 to 64 per buttonhole	50-2	50-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

11.	Make waistband -					
	Finished appearance.- Waistband shall finish smooth and flat.	301	EFb01	10-14	50-2	50-2
	a. Waistband shall be formed by turning over top of trouser with raw edge turned in, and stitch 1/16 to 1/8 from edge. Waistband shall finish 1 ± 1/8 inches in width.					
12	Make and insert drawcord.					
	a. Make a drawcord from base fabric of sufficient length to encircle the trouser circumference, with a minimum of [illegible] inches surplus on each side to permit easy tying.					
	b. Raw edges of drawcord fabric shall be turned in and stitched down the center to finish 1/2 to 5/8 inches in width. The drawcord ends shall be either turned under and stitched down or finished with bartack 1/4 to 1/2 inch from raw edge.	301	EFb-1	10-14	50-2	50-2
		301	EFa-1	10-14	50-2	50-2
		Bartack		28 per bartack	50-2	50-2
	c. Insert drawcord into tunnel formed by waistband, with ends through the buttonholes at top of trousers (operation 10)					
13	Sew on labels					
	a. Position combination label at back of trousers, to the right (when worn) of seat seam, not more than 1/2 inch away from seat seam and not more than 1/4 inches below waistband stitching, and stitch all four sides	301	LSb-1	10-14	50-2	50-2
	NOTE: Top of label may be caught in waistband stitching.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	SECTION I.D.	STCH & STITCHING TYPE	STITCHES PER INCH	THREAD	
	b. Position instruction label immediately below combination label and seam all four sides. NOTE: Top of instruction label may be caught in bottom seam of combination label, with remaining three sides stitched.	301	LSbj-1	10-14	50-2	50-2
14.	Clean.- Trim all thread ends and remove all loose threads.					
15.	Fold.- Fold trousers neatly.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

3.10 Measurements.- The finished trousers shall conform to the measurements shown in table III. All measurements and tolerances are expressed in inches.

Table III.

Measurement	Small	Medium	Large	Extra Large	Tolerance
Waist 1/	38	42	46	50	±2
Seat 2/	46	50	54	58	±2
Inseam 3/	27-1/2	28-1/2	29-1/2	31	±1
Overall length 4/	45	46-1/2	48	49-1/2	±1
Back rise 5/	19	19-1/2	20	20-1/2	±1/2

1/ Circumference of trouser waist.

2/ Measured on a line 11-1/2 inches from trouser top-circumference.

3/ Measured from crotch to bottom of trouser leg.

4/ Measured from trouser top to bottom of trouser leg - outseam.

5/ Measured from crotch to trouser top-back of trouser.

3.11 Workmanship - The finished trouser shall conform to the quality established by this specification. The occurrence of defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificates of compliance Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification

Source: https://assist.dla.mil -- Downloaded: 2026-01-21T09:49Z
Check the source to verify that this is the current version before use.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.2.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, testing shall be in accordance with table IV. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The sample unit for testing each component shall be as follows:

Component	Lot expressed as	Sample unit for testing
Base fabric (3.1.1)	Yards	2 yards (full width)
Label (3.4)	Yards	1 yard (full width)

4.2.1.2 Test methods. The methods of testing specified in FED-TEST-METHOD-STD-191, and as listed in table IV shall be followed. All test reports shall contain the individual values as well as the average result.

Table IV - Test Methods

Component	Characteristic	Requirement Paragraph	Test Method
Base fabric (3.1.1)	Polyester identification	3.1.1	1600 1/
	Cotton identification	3.1.1	1200 1/
	Stainless steel fiber	3.1.1	1/
	Fiber content:		
	Polyester-percent	3.1.1	1/
	Cotton-percent	3.1.1	1/
	Stainless steel-percent	3.1.1	1/
	Weave	3.1.1	Visual 1/
	Weight	3.1.1	5041
	Nonfibrous materials	3.1.1	2611
	pH	3.1.1	2811
	Yarns-ply:	3.1.1	Visual 1
	Warp		
	Filling		
	Breaking strength:	3.1.1	5100
	Warp		
	Filling		
	Shrinkage:	3.1.1	5552
	Warp		
	Filling		

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:49Z
Check the source to verify that this is the currentversion before use.

Table IV - Test Methods (cont'd)

Component	Characteristic	Requirement Paragraph	Test Method
	Yarns per inch:	3.1.1	5050
	Warp		
	Filling		
	Stainless steel fiber diameter	3.1.1	1/
	Antistatic properties.		
	Surface resistivity	3.1.1	NFPA No. 56A
	Static Decay	3.1.1	NFPA No. 56A
	Color	3.2	Visual
	Colorfastness to:		
	Light	3.2.2	5660
	Laundering (3 cycles)	3.2.2	5610 2/
	Perspiration	3.2.2	5680
	Dry crocking	3.2.2	5651
	Labile sulfur	3.2	2020
Label	Cotton identification	3.4	1200 1/
	Weight (45 inch basis)	3.4	5041 1/

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirement, see 4.1.1.

2/ Only the stain or the cotton fiber of the color transfer cloth shall be evaluated. Test specimens shall be dried after each laundering.

4.2.1.3 Lot and sample size. The lot and sample size shall be as listed in table V.

Table V - Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

4.2.2 Examination of the end item.- The classification of defects found during the examination shall be in accordance with defects listed in 4.2.2.2 through 4.2.2.4. The applicable inspection levels and acceptable quality levels (AQL's) shall be as indicated in 4.2.3. The sample unit shall be one trouser.

4.2.2.1 Classification of defects - All visual defects shall be classified as indicated below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

4.2.2.2 General defects.-

Defect	Classification Major	Minor
Material defects and damages		
a. Hole, needle chew, scissor or knife cut, tear or mend.	X	
b. Any weakening defect such as smash, multiple float or loose slub.	X	
Shaded parts		
a. Any outside part shaded.		X
Cleanness		
a. Spot or stain on outside.	X	
b. Thread ends not trimmed or loose thread not removed.		X
c. Two or more shade or size markings not removed.		X
Component and assembly		
a. Any component part or operation omitted (unless otherwise classified herein).	X	
Cutting		
a. Any component part not cut in conformance with directional lines on pattern.		X
b. Any component part not as specified.	X	
Seams and stitching		
a. General.		
1. Any part of trouser caught in an unrelated operation.	X	
2. Seams twisted, puckered or pleated (unless otherwise classified herein).		X
3. Ends of all stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch.		X
4. Thread breaks (all stitch types) stitched less than 1/2 inch beyond each end of break.		X
5. Continuous line of stitching overlapped less than 1/2 inch.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

Defect (cont'd)	Classification Major	Minor
b. Gage of stitching:		
1. Unevenly gaged or various stitching not uniform.		X
2. Beyond width specified or varies more than 1/6 inch when no range is specified.		X
c. Open seams:		
- up to 1/4 inch inclusive.		X
- over 1/4 inch.	X	
NOTE: One or more broken or two or more continuous skipped or runoff stitches are considered an open seam. Double-stitched seams are considered open when either one or both sides of seams are open.		
d. Raw edges:		
1. On outside:		
- more than 1/4 inch, but not more than 3/4 inch		X
- more than 3/4 inch.	X	
2. On inside:		
- 3/4 inch to 1 inch inclusive		X
- more than 1 inch.	X	
NOTE: Raw edges not securely caught in stitching shall be classified as open seams.		
e. Run-offs (see classification of open seams).		
f. Seam and stitch types:		
1. Not specified seam or stitch type.	X	
2. Looper thread (when stitch type 401 is used) or outside.		X
g. Stitch tension		
1. Loose tension or edge or raised stitching, resulting in exposure of bobbin or top thread.		X
2. Loose tension, resulting in a loose seam.	X	
3. Tight tension (stitches break when normal strain is applied to seam or stitching).	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the currentversion before use.

Defect (cont'd)	Classification Major	Minor
NOTE: Puckering is evidence of tight tension. When puckering is evident, seam, shall be tested by exerting normal pull in lengthwise direction of seam.		
b. Stitches per inch:		
1. Less than minimum specified by:		
- one or two stitches		X
- three or more stitches.	X	
2. More than maximum specified.		X

4.2.2.3 Detailed defects applicable to specific parts.-

Defect	Classification Major	Minor
Waistband		
1. Twisted, excessive puckers.		X
2. Buttonholes improperly positioned.		X
3. Buttonholes too small, not permitting free function of drawcord.		X
4. Drawcord omitted.	X	
5. Drawcord exposed ends uneven in length by 2 inches or more.		X
Inseams		
1. Staggered at crotch, i.e., ends of front and seat seams more than 1/4 inch apart (measured from center of seam)		X
Bottom hems		
1. Less than 3/4 inch or more than 1 inch wide.		X
2. Omitted	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

Defect (cont'd)	Classification Major	Minor
Pockets		
1. Improperly positioned		X
2. Omitted	X	
3. Pocket dimensions less than 1/4 inch or more than 1/4 inch outside tolerance.		X
Label		
a. Label:		
1. Missing, incorrect, or illegible.	X	
2. Not stitched on all four sides (when applicable.		X
3. Not securely attached.		X
4. Incorrectly positioned.		X

4.2.2.4 Size measurements (see 3.10).- Any measurement deviating from dimensions and tolerances specified in table III shall be scored as a size measurement defect.

4.2.3 Inspection levels and acceptable quality levels.- Inspection levels and acceptable quality levels (AQL) expressed in defects per 100 units (DHU) shall be as follows

	AQL	Inspection level
Major (4.2.2.2 and 4.2.2.3)	2.5	S-4
Total (4.2.2.2 and 4.2.2.3 major and minor combined)	10.0	
Size measurements (4.2.2.4)	4.0	S-2

4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking comply with requirements of section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The sampling shall be in accordance with MIL-STD-105. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, or improper size, location, sequence or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components such as: incomplete closure of container flaps, loose strapping, improper taping, inadequate stapling. Bulged or distorted container.
Content	Number of packages per shipping container is more or less than required. Number of gowns per package is more or less than required. Size shown or one or more gowns not as specified on package.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue One package containing twelve trousers, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in table VI shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table VI. Packaging quantities

Unit package	Intermediate package	Exterior container
1 unit	Not required	4 units

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Individual package Each pair of trousers shall be neatly folded to an approximate dimension of 15 by 12 inches and inserted into a snug fitting, clear, heat sealed, polyethylene bag having a minimum thickness of 0.00125 inch. A 1/4 inch diameter hole shall be made at one corner of the bag to allow excess air to escape. As an alternate, the final closure of the bag may be accomplished by means of a tuck or reverse flap.

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:49Z
Check the source to verify that this is the current version before use.

5.1.3.2 Unit package. Twelve individually packaged trousers shall be packaged in a snug fitting box constructed in accordance with PPP-B-676 or PPP-B-636, type CF, class domestic. Commercial colors are acceptable on unit packages and the closure shall be secured to prevent spilling of contents under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3, style 3; PPP-B-601, overseas type, PPP-B-621, class 2; or PPP-B-636, class weather-resistant. Fiberboard boxes shall conform to the special requirements specified in Table II of PPP-B-636.

5.2.1.2 Case liner. Each wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraph of appendix thereto.

5.2.1.3 Closure. Closure of each wood box shall be in accordance with appendix of applicable box specification. Closure of each fiberboard box shall be as specified in the appendix and waterproofed in accordance with paragraph 30.4 of PPP-B-636.

5.2.1.4 Strapping. Strapping, when required, shall be in accordance with appendix of applicable box specification.

NOTE: Strapping shall not be required for shipment forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 1, style 3, PPP-B-601, domestic type, PPP-B-621, class 1; or PPP-B-636, class domestic. Fiberboard boxes shall conform to the special requirements specified in Table I of PPP-B-636. Closure of wood boxes shall be as specified in the appendix of the applicable box specification. Closure of fiberboard boxes shall conform to method II as specified in PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

5.2.3 Level C. The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Unit package. Each unit shall be marked in accordance with MIL-STD-129. Contract or purchase order number, size, and name of contractor shall be shown. When the contractor is not the manufacturer, the name of the manufacturer shall also be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

NOTE: The National Stock Number shall be shown in lieu of the Federal Stock Number wherever specified in MIL-STD-129.

5.3.3 Labels, mixed sizes.- Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The trouser, is intended for wear by male surgical personnel of the Medical Services.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Standard shade sample. For access to standard shade sample, address procuring office issuing the invitation for bids.

6.4 This specification is intended to cover the following items appearing in the Federal Supply Catalog:

NATIONAL STOCK NO	ITEM IDENTIFICATION
6532-00-149-0327	TROUSERS, OPERATING, SURGICAL Men's, Cotton-Polyester, Static Resistant Small, 12s.
6532-00-149-0328	TROUSERS, OPERATING, SURGICAL, Men's, Cotton-Polyester, Static Resistant Medium, 12s.

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:49Z
Check the source to verify that this is the current version before use.

NATIONAL STOCK NO.	ITEM IDENTIFICATION
6532-00-149-0329	TROUSERS, OPERATING, SURGICAL, Men's, Cotton-Polyester, Static Resistant Large, 12s.
6532-00-149-0330	TROUSERS, OPERATING, SURGICAL, Men's, Cotton-Polyester, Static Resistant Extra Large, 12s.

6.5 This specification does not include all types, classes, styles or sizes of the commodity indicated by the title of this specification, or which are commercially availalbe, but is intended to cover the items, which are normally procured to meet military requirements.

Custodians:
Army - MD
Navy - MS
Air Force - 03


Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6532-1072

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

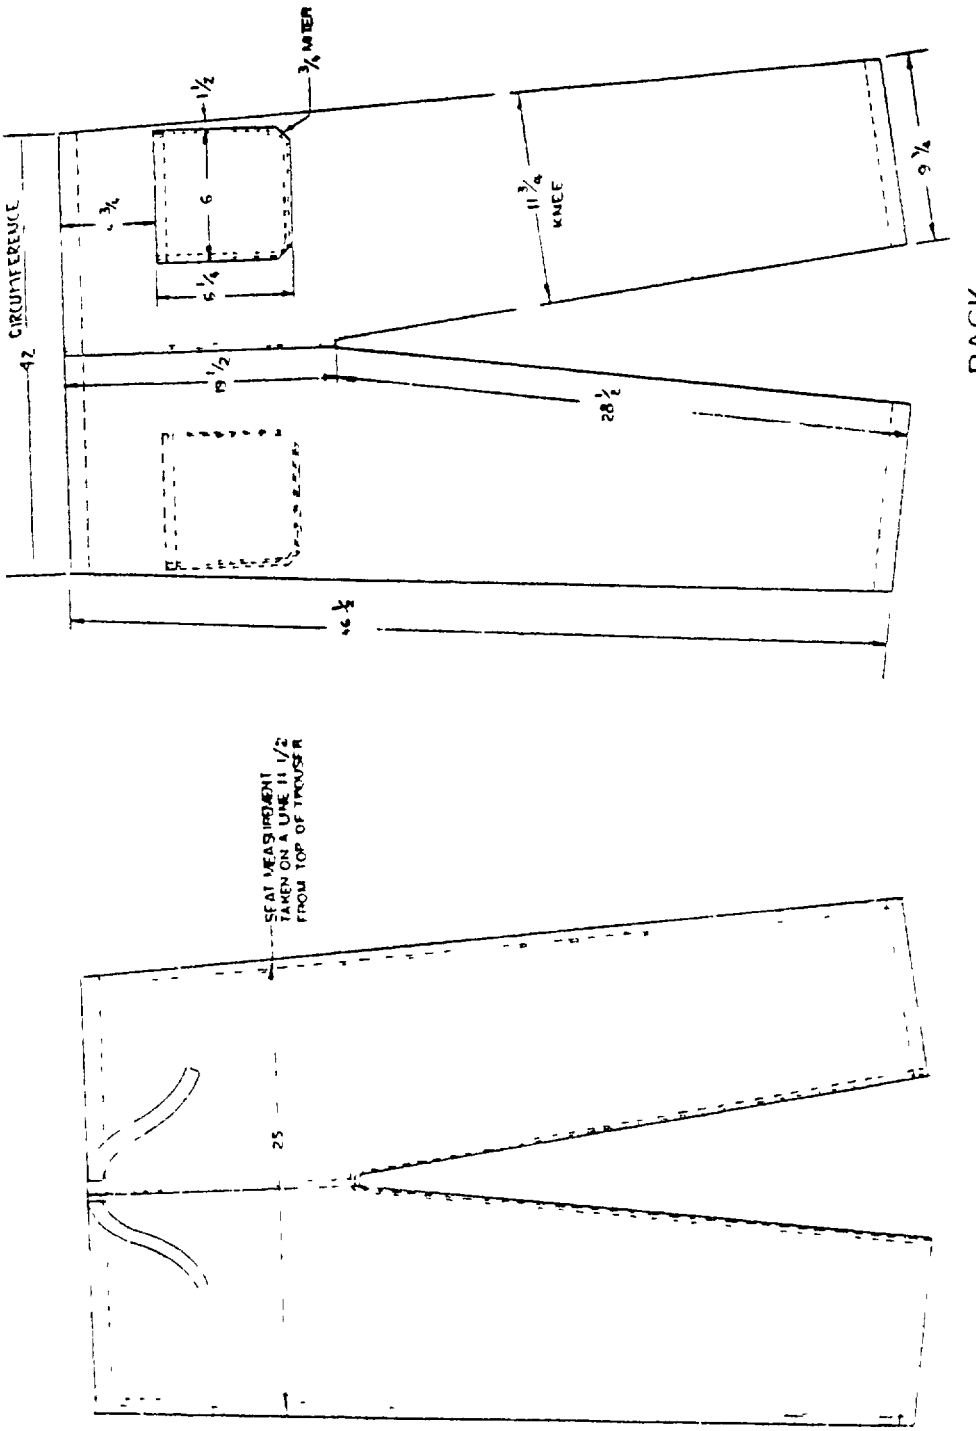

DIMENSIONS ARE IN INCHES

FIGURE 1

TROUSERS OPERATING SURGICAL

Source: https://assist.dla.mil -- Downloaded: 202640-21T09:49Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE
MIL-T-37030

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
☐ YES ☐ NO *(If "Yes" in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE PERSONNEL SUPPORT CENTER
2800 South 20th Street
Philadelphia, Pa. 19101

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY
DoD 304

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101.

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:49Z
Check the source to verify that this is the current version before use.