MILITARY SPECIFICATION

TROUSERS, OPERATING, SURGICAL, WOMEN'S,
COTTON-POLYESTER, STATIC RESISTANT

This amendment forms a part of Military Specification MIL-T-37046, dated 13 June 1974, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 1

1.2 Classification: Add the following sizes to the list of sizes: "42-44" and "46-48."

Page 2

2.2 Other publications, line 5: Delete "Volume 2 1972-73."

Page 3

3.5 Label, line 2: After "DDD-L-20" add the following: "The size of the label shall be adequate to contain the following information and if desired the laundry instruction information contained in 3.5.2.

TROUSERS, OPERATING, SURGICAL, WOMEN'S,
COTTON-POLYESTER, STATIC RESISTANT
MIL-T-37046
SIZE
CONTRACT OR ORDER NUMBER
NSN
WOOL OR FIBER PRODUCT ACT INFORMATION"

Page 5

3.7 Design, at end of paragraph add: "The trousers shall conform in appearance to Figure 1."

3.8 Construction, lines 3 through 6: Delete entirely.

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

3.9 Patterns: Delete entirely and substitute the following:

"3.9 Patterns. The trousers shall be cut in strict accordance with the patterns furnished by the Government (see 6.6) which provide for seam allowance, directional lines for cutting, and notches for the proper assembling of all the parts. The Government patterns shall not be altered in any manner and shall be used for making the working patterns. The working patterns shall be identical to the Government furnished patterns. The component parts of the trousers shall be cut from the same ply of the lay."

3.10 Stitches, seams and stitching: Delete the last sentence and substitute the following. The bight of all the overedge stitching shall be 3/16 to 7/16 inch from the edge of the cloth. The stockinet anklets shall be attached with a 3/8 ± 1/8 inch seam allowance. The seam allowances shall be maintained so that no runoff or open seam shall occur. All seams shall start and finish uniformly. No seam or component shall be twisted, puckered, or pleated and no part of the trousers shall be caught in an unrelated operation or seam. All the thread ends shall be trimmed to a maximum length of 1/4 inch. No cut or raw edge shall be visible on the interior or exterior of the trousers."

3.10.2 Thread breaks and ends of seams: Delete entirely and substitute the following:

"3.10.2 Sewing. Each row of stitching shall be straight and parallel to the seam edge. The straightness of the stitching, in any row, shall be maintained within a tolerance of plus or minus 1/32 inch. The ends of Stitch Type 301 stitching that are not caught in other seams or stitching shall be backstitched, by overlapping on themselves, a minimum of 1/4 inch. Each thread break, skip, and run-off shall be overstitched not less than 1/2 inch. Skipped stitches or thread breaks on Stitch Type 401 stitching may be repaired using Stitch Type 301. The thread tension shall be maintained so that there shall not be any loose or tight stitching and the lock shall be embedded in the materials sewn together."

Page 7

Table II, Operation 1b, at end of paragraph: Add "The anklets shall be cut with the wales in the length direction."

Page 8

Table II (Cont'd)

a. Operation 7a, line 1: Delete "stickinet" and substitute "stockinet."

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:51Z
Check the source to verify that this is the current version before use.

b. Operation 8a, at end of paragraph: Add "The elastic webbing shall be cut in such manner that when in a relaxed position shall comply with the dimension specified in Table III for the applicable size of trousers."

Page 9

Table II (Cont'd), top of page "b", line "3" Delete "seam" and substitute "stitch".

Page 10

Table III, DIMENSIONS. Delete entirely and substitute the following:

"Table III DIMENSIONS

Measurement	SIZE						Tolerance
	26-28	30-32	34-36	38-40	42-44	46-48	
Waist (elastic relaxed) 1/	19	25	27	31	35	39	± 1
Waist (elastic full extended) 1/	32-1/2	36-1/2	40-1/2	44-1/2	48-1/2	52-1/2	± 1
Hips 2/	34-1/2	38-1/2	42-1/2	46-1/2	50-1/2	54-1/2	± 1
Inseam 3/	29-3/4	29-3/4	29-3/4	29-3/4	29-3/4	29-3/4	± 1/2
Outseam 4/	41-1/4	41-1/4	41-3/4	42-1/4	42-3/4	43-1/4	± 1

1/ Measure along the top edge of the waistband from folded edge to folded edge times 2

2/ Measure on a line 10 inches from the top of the waistband.

3/ Measure along the inseam from the crotch seam to the bottom edge of the anklet

4/ Measure along the outseam from the top edge of the waistband to the bottom edge of the anklet."

3.13 Workmanship, line 3 Delete "applicable" and substitute "acceptable."

Page 13

4.2.2.2 General defects, under "Material defects and damages", defect "b", line 1 After "multiple float" add "unsightly slub, broken yarn, missing yarn."

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T09:51Z
Check the source to verify that this is the current version before use.

Page 16

4.2.4 Examination of preparation for delivery requirements:

a. Delete the fifth sentence.

b. Line 14 in the "Defects" column: Delete "gowns" and substitute "trousers."

Page 19

Add the following new paragraph:

"6.6 Patterns. The patterns for the trousers will be furnished by the contracting officer to the contractor for use in cutting working patterns (see 3.9). The pattern parts shall consist of the following:

NOMENCLATURE	CUT PARTS
Front	Two
Back	Two"

Page 20

Add Figure 1, Trousers, Operating, Surgical, Women's at end of specification.

Custodians:
Army - MD
Navy - MS
Air Force - 03

Preparing activity
Defense Supply Agency-DM

Project No. 6532-1101
is

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:51Z
Check the source to verify that this is the current version before use.

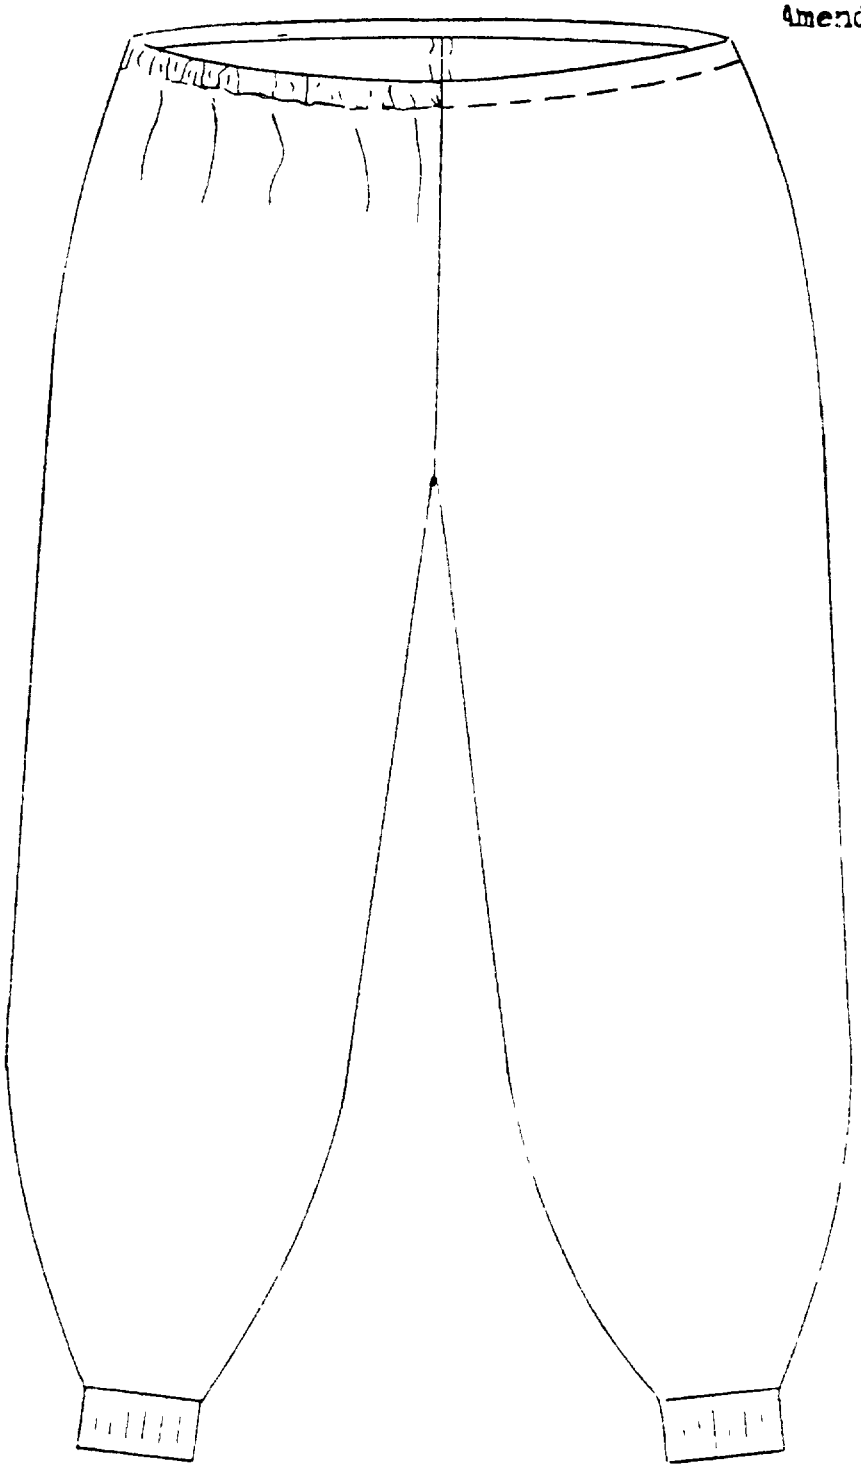


FIGURE 1

TROUSERS, OPERATING, SURGICAL, WOMEN'S

Source: https://assist.dla.mil -- Downloaded: 202610-21T09:51Z
Check the source to verify that this is the current version before use.