The documentation and process conversion measures necessary to comply with this revision shall be completed by 6 November 1999.

INCH-POUND

MIL-PRF-19500/476A
6 August 1999
SUPERSEDING
MIL-S-19500/476(USAF)
20 November 1972

PERFORMANCE SPECIFICATION SHEET

SEMICONDUCTOR DEVICE, FIELD EFFECT TRANSISTORS, P-CHANNEL, SILICON
TYPES 2N5114 THROUGH 2N5116, JAN, JANTX, AND JANTXV

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for P-channel, junction, silicon field-effect transistors. Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similarTO-18).

1.3 Maximum ratings. T_A = +25°C, unless otherwise specified.

P_T 1/ T_A = +25°C	V_{GS} 2/	V_{DS}	V_{DG} 2/	I_G	T_{STG}
W	V dc	V dc	V dc	mA dc	°C
0.500	30	30	30	50	-65 to +200

1/ Derate linearly 3.0 mW/°C for T_A > +25°C.
2/ Symmetrical geometry allows operation of those units with source/drain leads interchanged.

1.4 Primary electrical characteristics.

Limits	I_{DSS} 1/			$V_{DS(on)}$		
	V_{DS} = -18 V dc V_{GS} = 0	V_{DS} = -15 V dc V_{GS} = 0	V_{DS} = -15 V dc V_{GS} = 0	I_D = -15 mA dc V_{GS} = 0	I_D = -7.0 mA dc V_{GS} = 0	I_D = -3 mA dc V_{GS} = 0
	2N5114	2N5115	2N5116	2N5114	2N5115	2N5116
	mA dc	mA dc	mA dc	V dc	V dc	V dc
Min	-30	-15	-5.0	---	---	---
Max	-90	-60	-25	-1.3	-0.8	-0.6

1/ For T_A > +25°C, derate linearly 1.67 mW/°C one section, 2.67 mW/°C both sections.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAC, 3990 East Broad St., Columbus, OH 43216-5000, by using the addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics - Continued.

Limits	$V_{GS(off)}$			$r_{ds(on)2}$		
	V_{DS} = -15 V dc I_D = -1.0 nA dc		V_{DS} = -15 V dc I_D = 1.0 µA dc	V_{GS} = 0 I_D = 0 f = 1 kHz		
	2N5114	2N5115	2N5116	2N5114	2N5115	2N5116
	V dc	V dc	V dc	Ω	Ω	Ω
Min	5	3	1	---	---	---
Max	10	6	4	75	100	175

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY


MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Defense Automated Printing Service, Building 4D (NPM-DODSSP), 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

Symbol	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
CD	.178	.195	4.52	4.95	
CH	.170	.210	4.32	5.33	
HD	.209	.230	5.31	5.84	
LC	.100 TP		2.54 TP		6
LD	.016	.021	0.41	0.53	7,8
LL	.500	.750	12.70	19.05	7,8
LU	.016	.019	0.41	0.48	7,8
L1	---	.050	---	1.27	7,8
L2	.250	---	6.35	---	7,8
Q	---	.030	---	0.76	5
TL	.028	.048	0.71	1.22	3,4
TW	.036	.046	0.91	1.17	
r	---	.010	---	0.25	10
α	45° TP		45° TP		6

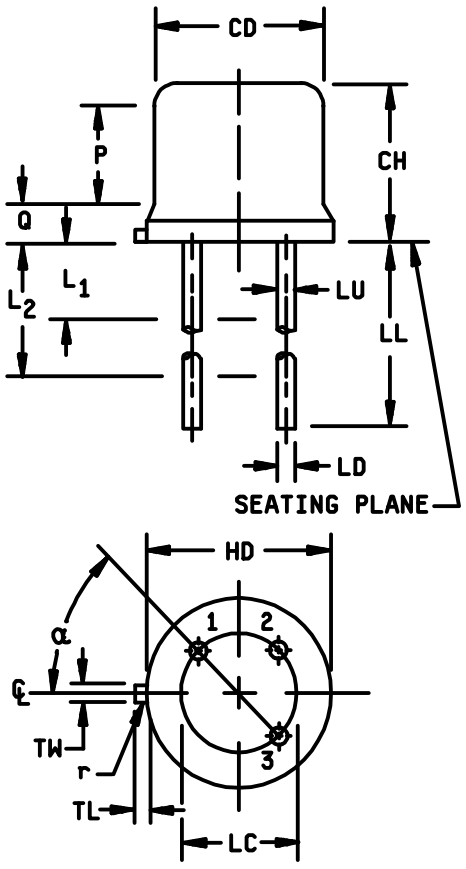

NOTES:
1. Dimension are in inches.
2. Metric equivalents are given for general information only.
3. Beyond r (radius) maximum, TL shall be held for a minimum length of .011 (0.28 mm).
4. Dimension TL measured from maximum HD.
5. Body contour optional within zone defined by HD, CD, and Q.
6. Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC. The device may be measured by direct methods or by the gauge and gauging procedure shown in figure 2.
7. Dimension LU applies between L_1 and L_2. Dimension LD applies between L_2 and LL minimum. Diameter is uncontrolled in L_1 and beyond LL minimum.
8. All three leads.
9. The gate shall be electrically connected to the case.
10. Dimension r (radius) applies to both inside corners of tab.
11. In accordance with ANSI Y14.5M, diameters are equivalent to ϕx symbology.
12. Lead 1 = source, lead 2 = gate, lead 3 = drain.

FIGURE 1. Physical dimensions (similar to TO-18).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Associated specification. The individual item requirements shall be in accordance with MIL-PRF-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Interface requirements and physical dimensions. The Interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and herein.

3.3.1 Lead finish. Lead finish shall be solderable in accordance with MIL-PRF-19500. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.5 Electrostatic discharge protection. The devices covered by this specification require electrostatic protection.

3.5.1 Handling. MOS devices must be handled with certain precautions to avoid damage due to the accumulation of electrostatic charge. The following handling practices shall be followed:

a. Devices shall be handled on benches with conductive handling devices.

b. Ground test equipment, tools, and personnel handling devices.

c. Do not handle devices by the leads.

d. Store devices in conductive foam or carriers.

e. Avoid use of plastic, rubber, or silk in MOS areas.

f. Maintain relative humidity above 50 percent, if practical.

g. Care shall be exercised, during test and troubleshooting, to apply not more than maximum rated voltage to any lead.

h. Gate must be terminated to source, R ≤ 100 k, whenever bias voltage is to be applied drain to source.

3.6 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I.

3.7 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table I.

3.8 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.4).

4 VERIFICATION

4.1 Classification of Inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANTX and JANTXV levels only). Screening shall be in accordance with table IV of MIL-PRF-19500), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see table IV of MIL-PRF-19500	Measurement
	JANTX and JANTXV levels
3a	Temperature cycling
10	Not applicable
11	$I_{D(off)1}$, $r_{ds(on)1}$
12	See 4.3.1
13	Subgroup 2 of table I herein; $\Delta I_{D(off)1}$ = .5 nA dc or ±10 percent of initial value, whichever is greater. Δr_{ds1} = ±20 percent of initial value.

4.3.1 Power burn-in. Power burn-in conditions are in accordance with MIL-STD-750, method 1039, condition A and as follows:

T_A = +150°C; V_{GS} = 24 V dc; V_{DS} = 0.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500, and as specified herein.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500 and paragraph 4.4.2.1 herein. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein.

4.4.2.1 Group B inspection, table VIb (JAN, JANTX, and JANTXV of MIL-PRF-19500).

Subgroup	Method	Condition
B3	1027	V_{GS} = 24 V dc; T_A = +125°C; V_{DS} = 0
B6	1032	T_A = +175°C

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in table VII of MIL-PRF-19500, and as follows. Electrical measurements (end-points) shall be in accordance with table I, group A, subgroup 2 herein.

Subgroup	Method	Condition
C2	1056	Thermal shock: Test condition C-1, time at temperature extremes = 15 minutes minimum.
C2	2036	Lead fatigue: Test condition E
C6	1026	V_{GS} = 24 V dc; T_A = +125°C; V_{DS} = 0

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Gate to source breakdown voltage	3401	Bias condition C; I_G = 1.0 µA dc; V_{DS} = 0	$V_{(BR)GSS}$	30	---	V dc
Gate reverse current	3411	Bias condition C; V_{GS} = 20 V dc; V_{DS} = 0	I_{GSS}	---	500	pA dc
Drain cutoff current	3413	Bias condition A	$I_{D(off)1}$			
2N5114		V_{DS} = -15 V dc; V_{GS} = 12 V dc		---	-500	pA dc
2N5115		V_{DS} = -15 V dc; V_{GS} = 7.0 V dc		---	-500	pA dc
2N5116		V_{DS} = -15 V dc; V_{GS} = 5.0 V dc		---	-500	pA dc
Zero-gate-voltage drain current	3413	Bias condition C; V_{DS} to be pulsed (See 4.5.1)	I_{DSS}			
2N5114		V_{DS} = -18 V dc; V_{GS} =0		-30	-90	mA dc
2N5115		V_{DS} = -15 V dc; V_{GS} = 0		-15	-60	mA dc
2N5116		V_{DS} = -15 V dc; V_{GS} = 0		-5.0	-25	mA dc
Drain to source "on" voltage	3405		$V_{DS(on)}$			
2N5114		I_D = -15 mA dc; V_{GS} = 0		---	1.3	V dc
2N5115		I_D = -7.0 mA dc; V_{GS} = 0		---	0.8	V dc
2N5116		I_D = -3.0 mA dc; V_{GS} = 0		---	0.6	V dc
Gate to source cutoff voltage	3403		$V_{GS(off)}$			
2N5114		V_{DS} = -15 V dc; I_D = 1.0 nA dc		5.0	10	V dc
2N5115		V_{DS} = -15 V dc; I_D = 1.0 nA dc		3.0	6.0	V dc
2N5116		V_{DS} = -15 V dc; I_D = 1.0 nA dc		1.0	4.0	V dc
Small-signal drain to source "on" resistance	3423	V_{GS} = 0; I_D = -1 mA dc	$r_{ds(on)1}$			
2N5114				---	75	Ohms
2N5115				---	100	Ohms
2N5116				---	175	Ohms
Small-signal drain to source "on" resistance	3423	V_{GS} = 0; I_D = 0; f = 1 kHz	$r_{ds(on)2}$			
2N5114				---	75	Ohms
2N5115				---	100	Ohms
2N5116				---	175	Ohms

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3						
High temperature operation:						
Gate reverse current	3411	Bias condition C; T_A = 150°C; V_{GS} = 20 V dc; V_{DS} = 0	I_{GSS}	---	1.0	µA dc
Drain cutoff current	3413	Bias condition A; T_A = 150°C	$I_{D(off)2}$			
2N5114		V_{GS} = 12 V dc; V_{DS} = -15 V dc		---	-1.0	µA dc
2N5115		V_{GS} = 7.0 V dc; V_{DS} = -15 V dc		---	-1.0	µA dc
2N5116		V_{GS} = 5.0 V dc; V_{DS} = -15 V dc		---	-1.0	µA dc
Subgroup 4						
Small-signal common-source short-circuit input capacitance	3431	V_{DS} = -15 V dc; V_{GS} = 0 f = 1 MHz	C_{iss}			
2N5114, 2N5115				---	25	pF
2N5116				---	27	pF
Small-signal common-source short-circuit reverse transfer capacitance	3433		C_{rss}			
2N5114		V_{DS} = 0; V_{GS} = 12 V dc				
2N5115		V_{DS} = 0; V_{GS} = 7.0 V dc		---	7.0	pF
2N5116		V_{DS} = 0; V_{GS} = 5.0 V dc		---	7.0	pF
				---	7.0	pF
Turn-on delay time	3459	See figure 2	$t_{d(on)}$			
2N5114				---	6	ns
2N5115				---	10	ns
2N5116				---	25	ns
Rise time	3459	See figure 2	t_r			
2N5114				---	10	ns
2N5115				---	20	ns
2N5116				---	35	ns
Turn-off delay time	3459	See figure 2	$t_{d(off)}$			
2N5114				---	6	ns
2N5115				---	8	ns
2N5116				---	20	ns

See footnotes at end of table


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 4 - Continued			t_f			
Fall time	3459	See figure 2				
2N5114				---	15	ns
2N5115				---	30	ns
2N5116				---	60	ns
Subgroups 5 and 6						
Not applicable						

1/ For sampling plan, see MIL-PRF-19500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

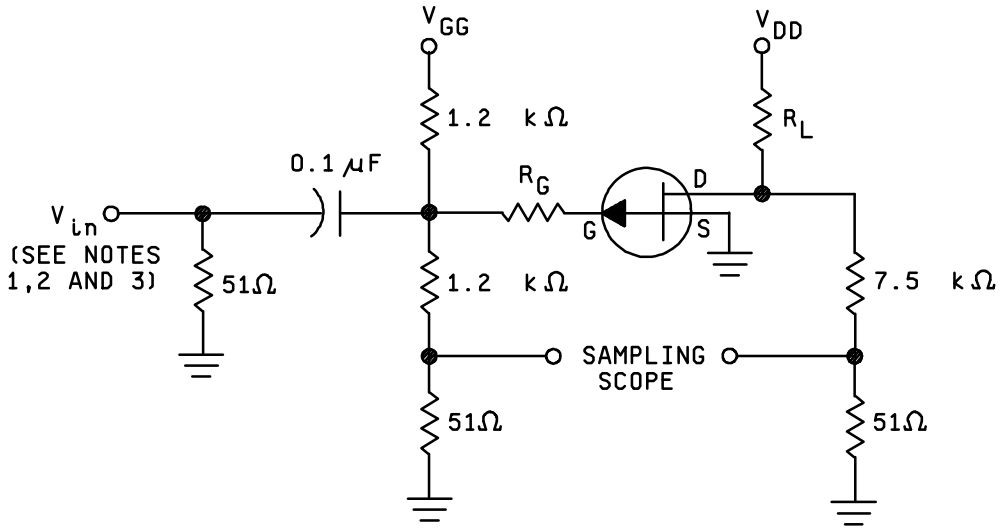

TEST CIRCUIT

Test conditions and component value					
Type	V_{DD}	V_{GG}	R_L	R_G	$I_{D(ON)}$ 1/
	V dc	V dc	ohms	ohms	μA dc
2N5114	-10	20	430	100	-15
2N5115	-6.0	12	910	220	-7.0
2N5116	-6.0	8.0	2,000	390	-3.0

1/ Nominal value; exact value varies slightly with transistor parameters.

NOTES:

1. The input waveform has the following characteristics: tp 100 ns; $t_r \leq 1$ ns; $t_f \leq 1$ ns; duty cycle ≈ 2 percent. It is supplied by a generator with Z_{out} = 50 ohms.
2. Resistor tolerance is ± 10 percent.
3. Voltage limits for the V_{in} voltage (input switching levels) are as follows:
   - 2N5114 V_{in}. = 11 V dc (from 0 v to -11 V dc signal level).
   - 2N5115 V_{in}. = 7 V dc (from 0 v to -7 V dc signal level).
   - 2N5116 V_{in}. = 5 V dc (from 0 v to -5 V dc signal level).

Figure 2. Switching time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.2.1).

b. Lead finish (see 3.3.1).

c. Type designation and product assurance level.

d. Packaging requirements (see 5.1).

6.3 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

6.4 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Manufacturers List QML-19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, DSCC-VQE, Columbus, OH 43216.

CONCLUDING MATERIAL

Custodians:
Air Force – 11
Army - CR
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

(Project 5961-2173)

Review activities:
Army - AV
Air Force - 13, 19

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/476A	**2. DOCUMENT DATE** 99/08/06

3. DOCUMENT TITLE SEMICONDUCTOR DEVICE, FIELD EFFECT TRANSISTORS, P-CHANNEL, SILICON TYPES 2N5114 THROUGH 2N5116, JAN, JANTX, AND JANTXV

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED

8. PREPARING ACTIVITY				
a. Point of Contact Alan Barone	b. TELEPHONE Commercial 614-692-0510	DSN 850-0510	FAX 614-692-6939	EMAIL alan_barone@dscc.dla.mil
c. ADDRESS Defense Supply Center Columbus ATTN: DSCC-VAC Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Standardization Program Office (DLSC -LM) 8725 John J. Kingman Road, Suite 2533 Fort Belvior, Virginia 22060-6221 Telephone (703) 767-6888 DSN 427-6888			

DD FORM 1426, FEB 99 (EG) PREVIOUS EDITIONS ARE OBSOLETE WHS/DIOR, Feb 99

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T02:20Z
Check the source to verify that this is the current version before use.