The documentation and process conversion measures necessary to comply with this revision shall be completed by 20 January 1999

INCH-POUND

MIL-PRF-19500/587A
20 October 1998
SUPERSEDING
MIL-S-19500/587
14 January 1993

PERFORMANCE SPECIFICATION SHEET

-

SEMICONDUCTOR DEVICE, DIODE, SILICON, RECTIFIER
TYPES 1N6661, 1N6662, 1N6663, 1N6661US, 1N6662US AND 1N6663US
JAN, JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

JANS1N645-1, JANS 1N647-1 and JANS 1N649-1 are nonpreferred part numbers and are inactive for new design. The preferred part numbers are JANS1N6661, JANS1N6662, JANS1N6663.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for silicon diodes. Four levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figures 1 (similar to DO - 41) and 2 (MO - 036A).

1.3 Maximum ratings.

Type	V_{RWM}	I_O 4/ T_A = +150°C	I_O 1/ 2/ 3/ 4/ T_A = +25°C	I_{FSM} t_p = 1/120s T_A = +25°C	T_{op} and T_{STG} (ambient temperature)	Barometric pressure reduced
	V(pk)	mA	mA	A	°C	mmHg
1N6661	225	150	500	5	-65 to +175	8
1N6662	400	150	500	5	-65 to +175	8
1N6663	600	150	500	5	-65 to +175	8

1/ T_{EC} = 110°C.
2/ Devices with leads. Derate 2.8 mA/°C between 25°C and 150°C. Derate 6 mA/°C between 150°C and 175°C.
3/ U suffix devices. Derate 6.3 mA/°C at T_{EC} between 110°C and 150°C. Derate 6 mA/°C at T_{EC} between 150°C and 175°C.
4/ No forced air or heat sinking shall be permitted for I_O ratings.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad Street, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5961
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

1.4 Unless otherwise indicated, primary electrical characteristics at T_A = +25°C.

Type	V_F at I_F = 400 mA dc 2 percent duty cycle, 8.3 ms max pulse width	I_R at T_A = +25°C		I_R at T_A = +150°C	
	V dc (max)	µA dc (max)	at V_R	µA dc (max)	at V_R
1N6661	1.0	.050	225 V dc	15	225 V dc
1N6662	1.0	.050	400 V dc	15	400 V dc
1N6663	1.0	.050	600 V dc	25	600 V dc

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.


3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.3).

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Interface requirements and physical dimensions. The interface requirements and physical dimensions shall be as specified in MIL-PRF-19500 and on figure 1 (MO-036AB) herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

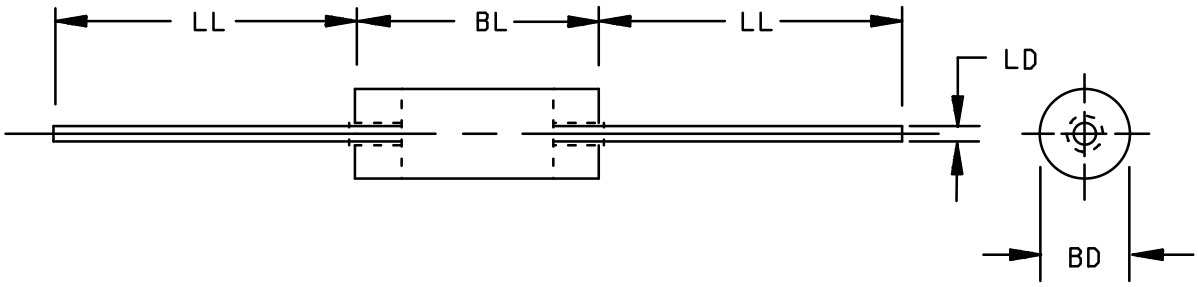


Symbol	Dimensions				Notes
	Inches		Millimeters		
	Min	Max	Min	Max	
BD	.060	.090	1.52	2.29	2
BL	.120	.200	3.05	5.08	
LD	.018	.022	0.46	0.56	3
LL	1.000	1.500	25.40	38.10	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The specified lead diameters apply in the zone between .050 inch (1.27 mm) from the diode body to the end of the lead. Outside of this zone the lead diameter shall not exceed the maximum of dimension BD.

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

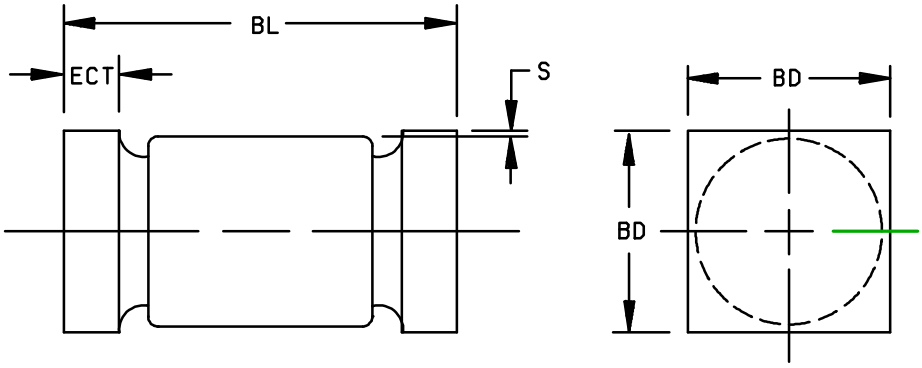

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	.070	.085	1.78	2.16
BL	.165	.195	4.19	4.95
ECT	.019	.028	0.48	0.71
S	.003		0.08	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 2. Physical dimensions of surface mount family.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

3.3.1 Lead finish. Lead finish shall be solderable as defined in MIL-STD-750, MIL-PRF-19500, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.2).

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.4.1 Marking of U-suffix devices. All marking except for cathode identification, may be omitted from the body part.

3.4.2 Polarity. The polarity shall be indicated with a contrasting color band to denote the cathode end. No color coding will be permitted. For U-suffix devices the cathode end may be identified by three evenly spaced dots of a contrasting color or a solid band.

3.5 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in 1.3, 1.4, and table I herein.

3.6 Electrical test requirements. The electrical test requirements shall be the subgroups specified in 4.4.2 and 4.4.3 herein.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.1 Group E inspection. Group E inspection shall be conducted in accordance with MIL-PRF-19500 and table II herein.

4.3 Screening (JANS, JANTX, and JANTXV levels only). Screening shall be in accordance with MIL-PRF-19500 (Appendix E, table IV), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see appendix E, table IV of MIL-PRF-19500	Measurement	
	JANS level	JANTX and JANTXV levels
3a	Temperature cycling	Temperature cycling
3c 1/	Thermal impedance (see 4.5.5)	Thermal impedance (see 4.5.5.)
9	Table III, test 1 and 2	Not applicable
11	Table III, test 1, 2, 5, and 6	Table III, test 1 and 2
12	See 4.3.1	See 4.3.1
13	Subgroups 2 and 3 of table I herein; table III, test 5 and 6 and reverse scope display (see 4.5.3) 2/	Subgroup 2 of table I herein; table III, test 5 and 6 and reverse scope display (see 4.5.3)

1/ Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with MIL-PRF-19500, screen 3 prior to this thermal test.

2/ $Z_{\theta JX}$ need not be repeated if performed prior to screen 13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

4.3.1 Power burn-in conditions (method 1038, condition B (a) of MIL-STD-750). All devices shall be operated under one of the following conditions (see 4.5.1).

Type	T_A = +125°C; f = 60 Hz	T_A = +25°C; f = 60 Hz	T_A = +25°C
1N6661	V_R = 225 V (pk); I_O = 200 mA	V_R = 225 V (pk); I_O = 400 mA	I_F (dc) = 400 mA
1N6662	V_R = 400 V (pk); I_O = 200 mA	V_R = 400 V (pk); I_O = 400 mA	I_F (dc) = 400 mA
1N6663	V_R = 600 V (pk); I_O = 200 mA	V_R = 600 V (pk); I_O = 400 mA	I_F (dc) = 400 mA

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. (End-point electrical measurements shall be in accordance with the applicable steps of table III herein.)

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table VIa (JANS) and table VIb (JANTX and JANTXV) of MIL-PRF-19500. Electrical measurements (end points) and delta requirements shall be in accordance with the applicable steps of table III herein.

4.4.2.1 Group B inspection, appendix E, table VIa (JANS) of MIL-PRF-19500.

a. Subgroup 4: Conditions for intermittent operation life (sampling plan) are as follows:

I_O = 400 mA; f = 60 Hz, T_A = +25°C ± 3°C; t_{ON} = t_{OFF} = 3 minutes (minimum) for 2,-000 cycles; mounting conditions in accordance with MIL-STD-750, test method 1026 (see 4.5.1).

1N6661 = V_{RM} = 225 V(pk)
1N6662 = V_{RM} = 400 V(pk)
1N6663 = V_{RM} = 600 V(pk)

b. Subgroup 5: Conditions for accelerated steady-state operation life (sampling plan) are as follows:

I_O = 400 mA dc; f = 60 Hz; T_A = +100°C; t = 96 hours (see 4.5.1).

1N6661 = V_{RM} = 225 V(pk)
1N6662 = V_{RM} = 400 V(pk)
1N6663 = V_{RM} = 600 V(pk)

c. Subgroup 6: Condition for thermal resistance is l = .375 inch (9.53 mm), $R_{\theta JL}$ = 160°C/W maximum (see 4.5.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

4.4.2.2 Group B inspection, appendix E, table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500.

a. Subgroup 2: Conditions for surge current are as follows:

MIL-STD-750, method 4066, T_A = +25°C, I_{FSM} = 5 A, ten 8.3 ms surges at 1 surge per minute. Mounting conditions in accordance with MIL-STD-750, method 1026.

b. Subgroup 3: Conditions for steady-state operation life (sampling plan) are as follows:

I_O = 150 mA dc; f = 60 Hz; T_A = +150°C (see 4.5.1).

1N6661 = V_{RM} = 225 V(pk)
1N6662 = V_{RM} = 400 V(pk)
1N6663 = V_{RM} = 600 V(pk)

c. Subgroup 6: Condition for high-temperature life (nonoperating) (sampling plan) is T_A = +200°C.

(Note: Leaded samples from the same lot may be used in lieu of U suffix samples for all subgroups.)

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table VII of MIL-PRF-19500. Electrical measurements (end points) and delta requirements shall be in accordance with the applicable steps of table III herein.

4.4.3.1 Group C inspection, appendix E, table VII of MIL-PRF-19500.

a. Subgroup 2: Condition for terminal strength are as follows:

Lead tension: Test condition A; weight = 2 pounds; t = 30 ± 3s.
Lead fatigue: Condition E.

NOTE: Not applicable to U-suffix devices.

b. Subgroup 6: Condition for steady-state operation life are as follows:

T_A = +150°C; f = 60 Hz; I_O = 150 mA (see 4.5.1).

1N6661 = V_{RM} = 225 V(pk)
1N6662 = V_{RM} = 400 V(pk)
1N6663 = V_{RM} = 600 V(pk)

NOTE: Leaded devices from the same lot may be used in lieu of U-suffix devices.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables as follows.

4.5.1 State-state operation life. A half-sine wave of the specified peak voltage shall be impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectified current. The forward conducted angle of the rectified current shall not be greater than 180° nor less than 150°.

4.5.2 Pulse measurements. Conditions of pulsed measurements shall be specified in section 4 of MIL-STD-750.

4.5.3 Scope display evaluation. The reverse breakdown characteristics shall be viewed on an oscilloscope with display calibration factors of 20 µA per division and 50 or 100 V per division as applicable. Reverse current over the knee shall be at least 100 µA and less than 200 µA. Any discontinuity or dynamic instability of the trace shall be cause for rejection of that device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

4.5.4 Thermal resistance. Thermal resistance shall be measured in accordance with method 3101 or 4081 of MIL-STD-750. On lead mounted devices the reference point shall be the lead temperature at .375 inch (9.53 mm) from the body of the device, and shall be held between 25°C and 85°C. For U-suffix devices, the reference point shall be the end cap, and shall be maintained at a temperature between 25°C and 110°C.

I_H = 75 mA to 300 mA.
t_H = 25 s minimum.
I_M = 1 mA to 10 mA.
t_{MD} = 100 µs maximum.

4.5.5 Thermal impedance. Thermal impedance $Z_{\theta JX}$ measurements shall be performed in accordance with MIL-STD-750, method 3101. The maximum limit for $Z_{\theta JX}$ is screening (appendix E, table IV of MIL-PRF-19500) shall be derived by each vendor by means of Process Control (PC). When three (minimum) successive sealing lots have exhibited control, the data from these three lots minimum will be used to establish a fixed screening limit, (not to exceed the group A, subgroup 2 limit). Once a fixed limit has been established, monitor all future sealing lots using a three piece sample from each production lot to be plotted on the applicable X, R chart.

4.5.5.1 Thermal impedance conditions for group A ($Z_{\theta JX}$).

I_H = 1 to 5 A; t_H = 10 ms; I_M = 1 mA; t_{MD} = 70 to 100 µs.

Type	$Z_{\theta JX(max)}$
1N6661 1N6662 1N6663	20°C/W 20°C/W 20°C/W

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance	3101	See 4.5.5	$Z_{\theta JX}$		20	°C /W
Forward voltage	4011	I_F = 400 mA dc; 2 percent duty cycle max, 8.3 ms max pulse width; (pulsed, see 4.5.2)	V_{F1}	0.8	1.0	V dc
Reverse current	4016	DC method	I_{R1}			
1N6661		V_R = 225 V dc			0.050	µA dc
1N6662		V_R = 400 V dc			0.050	µA dc
1N6663		V_R = 600 V dc			0.050	µA dc
Breakdown voltage	4021	I_R = 100 µA dc	V_{BR1}			
1N6661				225		V dc
1N6662				400		V dc
1N6663				600		V dc
Subgroup 3						
High temperature operation:		T_A = +150°C				
Forward voltage	4011	I_F = 400 mA dc; 2 percent duty cycle max, 8.3 ms max pulse width; (pulses, see 4.5.2)	V_{F2}	0.70	0.95	V dc
Reverse current	4016	DC method	I_{R2}			
1N6661		V_R = 225 V dc			25	µA dc
1N6662		V_R = 400 V dc			25	µA dc
1N6663		V_R = 600 V dc			25	µA dc
Low temperature operation:		T_A = -55°C				
Forward voltage	4011	I_F = 400 mA dc; 2 percent duty cycle max, 8.3 ms max pulse width; (pulsed; see 4.5.2)	V_{F3}		1.2	V dc

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 4						
Capacitance	4001	V_R = 4 V dc; f = 1 MHz; V_{sig} = 50 mVp-p maximum	C		20	pF
Subgroup 5						
Not applicable						
Subgroup 6 2/						
Surge current	4066	Mounting conditions in accordance with MIL-STD-750, test method 1026; T_A = 25°C; I_{FSM} = 5 A; ten 8.3 ms surges; 1 surge per minute				
Electrical measurements		See table III, steps 1, 2, and 4				

1/ For sampling plan, see MIL-PRF-19500.

2/ All devices required by the specified sampling plan shall be randomly selected from the devices subjected to subgroup 2, 3, and 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification only.

Inspection 1/	MIL-STD-750		Sampling plan
	Method	Conditions	
Subgroup 1			22 devices, c = 0
Temperature shock (glass strain)	1056	500 cycles	
Hermetic seal	1071		
Electrical measurements		See table III, steps 1 and 2	
Subgroup 2			22 devices, c = 0
Burn-in (blocking life)	1038	V_R = 80 percent of rated V_{RWM} (see 1.3) T_A = 150°C; t = 1,000 hours min.	
Electrical measurement		See table III, steps 1, 3, and 5	
Subgroup 3			
Not applicable			
Subgroup 4 2/			22 devices, c = 0
Thermal resistance, junction to lead	3101 or 4081	L = .375 inch (9.53 mm); $R_{\theta JL}$ = 160°C/W max. (see 4.5.4)	
Subgroup 5			15 devices, c = 0 each type
Barometric pressure, reduced (altitude operation)	1001	8 mmHg; t = 60 s	
Measurement during test:			
Reverse current	4016	DC method	
1N6661 1N6662 1N6663		V_R = 225 V dc; I_R = 0.050 µA dc maximum V_R = 400 V dc; I_R = 0.050 µA dc maximum V_R = 600 V dc; I_R = 0.100 µA dc maximum	

1/ For sampling plan, see MIL-S-19500.

2/ For U-suffix types thermal resistance, junction to end caps, $R_{\theta JL}$ = 35°C /W max.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

TABLE III. Groups A, B, C, and E electrical measurements. 1/ 2/ 3/ 4/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1.	Forward voltage	4011	I_F = 400 mA dc (pulsed) 2 percent duty cycle max; 8.3 ms max pulse width	V_{F1}	0.8 1/	1.0	V dc
2.	Reverse current	4016	DC method	I_{R1}			
	1N6661		V_R = 225 V dc			0.050	µA dc
	1N6662		V_R = 400 V dc			0.050	µA dc
	1N6663		V_R = 600 V dc			0.050	µA dc
3.	Reverse current	4016	DC method	I_{R3}			
	1N6661		V_R = 225 V dc			0.100	µA dc
	1N6662		V_R = 400 V dc			0.100	µA dc
	1N6663		V_R = 600 V dc			0.100	µA dc
4.	Breakdown voltage	4021	I_R = 100 µA dc	V_{BR1}			
	1N6661				270		V dc
	1N6662				480		V dc
	1N6663				720		V dc
5.	Reverse current	4016	DC method	ΔI_{R1} 4/	100 percent of initial value or ± .010 µA dc, whichever is greater.		
	1N6661		V_R = 225 V dc				
	1N6662		V_R = 400 V dc				
	1N6663		V_R = 600 V dc				
6.	Forward current	4011	I_F = 400 mA dc (pulsed) 2 percent duty cycle max; 8.3 ms max pulse width	ΔI_{R2} 4/	± 25 mV dc change from previously measured value.		

1/ The electrical measurements for appendix E, table VIa (JANS) of MIL-PRF-19500 are as follows:

a. Subgroup 3, see table III herein, steps 1, 2, and 4.

b. Subgroups 4 and 5, see table III herein, steps 1, 3, 4, 5, and 6.

2/ The electrical measurements for appendix E, table VIb (JANTX and JANTXV) of MIL-PRF-19500 are as follows:

a. Subgroup 2, see table III herein, steps 1, 2, and 4.

b. Subgroups 3 and 6, see table III herein, steps 1, 3, 4, 5, and 6.

3/ The electrical measurements for table VII of MIL-PRF-19500 are as follows:

Subgroups 2 and 3, see table III herein, steps 1, 2, and 4 for all levels.

4/ Devices which exceed the group A limits for this test shall not be accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall prevent mechanical damage of the devices during shipping and handling and shall not be detrimental to the device. When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

5.2 Marking. Unless otherwise specified (see 6.2), marking shall be in accordance with MIL-PRF-19500.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. See MIL- PRF-19500.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL 19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, ATTN: DSCC-VQE, 3990 East Broad Street, Columbus, OH 43216-5000.

6.4 Cross reference substitution list. JANS level will no longer be built to MIL-PRF-19500/240. Devices required for space flight applications are found herein.

6.5 Metric conversion. This item was designed using inch-pound units of measurement. In case of problems involving conflicts between the metric and inch-pound units, the inch-pound units shall rule.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - AR, AV, MI, SM
Navy - AS, CG. MC, SH
Air Force - 19, 85, 99

Preparing activity:
DLA - CC

(Project 5961-1976)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/587A	**2. DOCUMENT DATE (YYMMDD)** 981020

3. DOCUMENT TITLE
SEMICONDUCTOR DEVICE, DIODE, SILICON, RECTIFIER TYPES 1N6661, 1N6662, 1N6663, 1N6661US, 1N6662US AND 1N6663US JAN, JANTX, JANTXV AND JANS

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) Commercial DSN FAX EMAIL	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. Point of contact: Alan Barone	b. TELEPHONE Commercial 614-692-0510 DSN 850-0510 FAX 614-692-6939 EMAIL alan_barone@dscc.dla.mil
c. ADDRESS: Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad Street, Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T03:46Z
Check the source to verify that this is the current version before use.