The documentation process conversion measures necessary to comply with this revision shall be completed by 21 August 1997

METRIC

MIL-PRF-19500/609B
21 May 1997
SUPERSEDING
MIL-S-19500/609A
16 December 1994

PERFORMANCE SPECIFICATION

SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING
TYPES 1N6639, 1N6640, 1N6641, 1N6639US, 1N6640US, AND 1N6641US
JANTX, JANTXV, AND JANS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the performance requirements for controlled forward voltage switching diodes suitable for high stress applications where silver bump construction may be indicated (see 6.3). Three levels of product assurance are provided for each device type as specified in MIL-PRF-19500.

1.2 Physical dimensions. See figure 1 (similar to D0-35) and figure 2 (D-5D).

1.3 Maximum ratings. T_A = +25°C.


Types	V_{BRR}	V_{RWM}	I_O 1/ 2/	I_{FSM} t_p = 1/120s	T_{STG}	T_J	$R_{\theta JL}$ L = .375	$R_{\theta JEC}$ L = 0	$Z_{\theta JX}$
	V(pk)	V(pk)	mA	A (pk)	°C	°C	°C/W	°C/W	°C/W
1N6639, 1N6639US	100	75	300	2.5	-65 to +175	-65 to +175	160	50	25
1N6640, 1N6640US	75	50	300	2.5	-65 to +175	-65 to +175	160	50	25
1N6641, 1N6641US	75	50	300	2.5	-65 to +175	-65 to +175	160	50	25

1/ Derate at 3.0 mA/°C above T_L = +75°C for axial lead L = 9.53 mm (.375 inch).
2/ Derate at 4.6 mA/°C above T_{EC} = +110°C for US suffix devices.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad Street, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

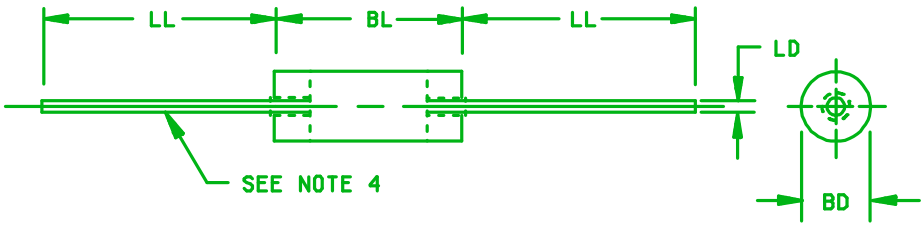


Symbol	Dimensions				Notes
	Millimeters		Inches		
	Min	Max	Min	Max	
BD	1.42	2.03	.056	.080	2,3
LD	0.46	0.56	.018	.022	4
BL	3.30	4.57	.130	.180	
LL	25.40	38.10	1.000	1.500	

TYPES 1N6639, 1N6640, AND 1N6641

NOTES:
1. Metric equivalents are given for general information only.
2. The maximum dimension of BD shall apply for dimension BL
3. The minimum dimension of BD shall apply over at least 1.65 mm (.065 inch) of dimension BL.
4. The specified lead diameter applies in the zone between 1.27 mm (.050 inch) from the diode body to the end of the lead. Outside of this zone lead shall not exceed BD.

FIGURE 1. Physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

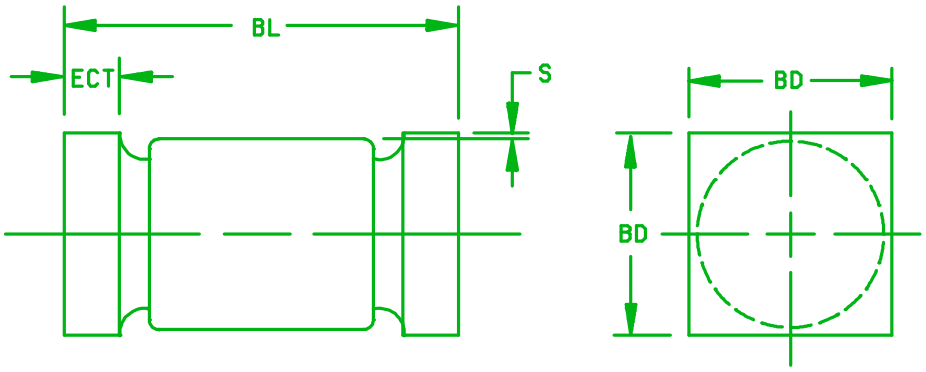

Symbol	Dimensions			
	Millimeters		Inches	
	Min	Max	Min	Max
BL	4.19	4.95	.165	.195
ECT	0.48	0.71	.019	.028
S	0.08	---	.003	---
BD	1.78	2.16	.070	.085

TYPES 1N6639US, 1N6640US, AND 1N6641US

FIGURE 2. Physical dimensions of surface mount family (D-5D).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

1.4 Primary electrical characteristics. Unless otherwise specified, primary electrical characteristics at T_A = +25°C.

Types	V_{FM4} I_{FM} = 200 mA (pulsed)	V_{FM5} I_{FM} = 500 mA (pulsed)	I_{R1} at T_A = +25°C $V_R = V_{RWM}$	I_{R2} at T_A = +150°C $V_R = V_{RWM}$	t_{fr} I_F = 200 mA	t_{rr} I_R = 10 mA I_F = 10 mA R_L = 100 Ω	C_T V_R = 0
	V dc	V dc	nA dc	µA dc	ns	ns	pF
1N6639, 1N6639US		1.2	100	100	10	4.0	2.5
1N6640, 1N6640US	1.0		100	100	10	4.0	2.5
1N6641, 1N6641US	1.1		100	100	10	5.0	3.0

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATION

DEPARTMENT OF DEFENSE

MIL-PRF-19500 - Semiconductor Devices, General Specification for.

STANDARD

MILITARY

MIL-STD-750 - Test Methods for Semiconductor Devices.

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated specifications or specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Qualification. Devices furnished under this specification shall be products that are authorized by the qualifying activity for listing on the applicable qualified products list before contract award (see 4.2 and 6.3).

3.1 Associated detail specification. The individual item requirements shall be in accordance with MIL-PRF-19500 and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

3.2 Abbreviations, symbols, and definitions. Abbreviations, symbols, and definitions used herein shall be as specified in MIL-PRF-19500.

3.3 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified on figure 1 and figure 2 herein.

3.3.1 Lead finish. Lead finish shall be solderable as defined in MIL-PRF-19500, MIL-STD-750, and herein. Where a choice of lead finish is desired, it shall be specified in the acquisition document (see 6.5).

3.3.2 Diode construction.

a. All devices shall be of metallurgically bonded, thermally matched, noncavity-double plug construction in accordance with the requirements of category I (see MIL-PRF-19500).

b. The 'US' version shall be structurally identical to the non-US versions except for lead attachment.

3.4 Marking. Marking shall be in accordance with MIL-PRF-19500.

3.4.1 Marking for 'US' devices. For 'US' version devices only, all marking may be omitted from the body (except for 3.5), but shall be retained on the initial container.

3.4.2 Part or Identifying Number (PIN) marking. Devices processed as 1N6640 to the requirements of this specification may alternately be marked as 1N4150-1 for a period of three years after the date of this specification. This allowance is for reacquisition only; 1N6640 remains the preferred PIN.

3.5 Polarity. Alternatively, the polarity of all types shall be indicated with a contrasting color band to denote the cathode end. For 'US' suffix devices a minimum of three contrasting color dots spaced around the cathode end of the device may be used.

4. QUALITY ASSURANCE PROVISIONS

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Qualification inspection (see 4.2).

b. Screening (see 4.3)

c. Conformance inspection (see 4.4).

4.2 Qualification inspection. Qualification inspection shall be in accordance with MIL-PRF-19500.

4.2.1 Group E inspection. Group E inspection shall be conducted in accordance with MIL-PRF-19500 and table II herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

4.3 Screening (JANS, JANTX and JANTXV levels only). Screening shall be in accordance with MIL-PRF-19500 (Appendix E, table IV), and as specified herein. The following measurements shall be made in accordance with table I herein. Devices that exceed the limits of table I herein shall not be acceptable.

Screen (see appendix E, table IV of MIL-PRF-19500	Measurement	
	JANS level	JANTX and JANTXV levels
3C 1/	Thermal impedance (see 4.4.1)	Thermal impedance (see 4.4.1)
9	I_{R1}, V_{F4} (1N6640,1N6641) or V_{F5} (1N6639), and $V_{(BR)}$	Not applicable
11	I_{R1}, V_{F4} (1N6640,1N6641), or V_{F5} (1N6639), $V_{(BR)}$; $\Delta I_{R1} \leq \pm 100$ percent of initial value or $\pm$ 15 nA, whichever is greater.	I_{R1}, V_{F4} (1N6640,1N6641) or V_{F5} (1N6639)
12	See 4.3.1	See 4.3.1
13 2/	Subgroups 2 and 3 of table I herein; $\Delta I_R \leq \pm 100$ percent of initial value or 15 nA, whichever is greater. $\Delta V_{BR} \leq \pm 15$ percent of initial reading. Reverse scope display, (see 4.5.3). $\Delta V_{F4} \leq \pm 0.03$ V dc for 1N6640 and $\Delta V_{F5} \leq \pm 0.03$ V dc for 1N6639.	Subgroup 2 of table I herein; $\Delta I_{R1} \leq \pm 100$ percent of initial value or 15 nA dc, whichever is greater. $\Delta V_{F4} \leq \pm 0.03$ V dc for 1N6640 and 1N6641. $\Delta V_{F5} \leq \pm 0.03$ V dc for 1N6639. Scope display evaluation (see 4.5.3).

1/ Thermal impedance shall be performed any time after sealing provided temperature cycling is performed in accordance with appendix E, table IV, screen 3 of MIL-PRF-19500, prior to this thermal test.

2/ When thermal impedance is performed prior to screen 13, it is not required to be repeated in screen 13.

4.3.1 Power burn-in conditions. Power burn-in conditions are as follows (see 4.5.3):

Method 1038, condition B, T_A = room ambient as defined in 4.5 of MIL-STD-750. V_R = rated V_{RWM}; f = 50-60 Hz; I_O = 300 mA. An alternative of I_F (dc) = 300 mA may be used at T_A = room ambient as defined in 4.5 of MIL-STD-750.

4.4 Conformance inspection. Conformance inspection shall be in accordance with MIL-PRF-19500.

4.4.1 Group A inspection. Group A inspection shall be conducted in accordance with MIL-PRF-19500, and table I herein. Thermal impedance $Z_{\theta JX}$ shall be performed in accordance with MIL-STD-750, method 3101. The following conditions shall apply:

I_H = 1.0 amps minimum.

t_H = 10 ms.

I_M = 1 mA to 10 mA.

t_{MD} = 100 µs maximum.

The maximum limit for $Z_{\theta JX}$ under these test conditions is $Z_{\theta JX(max)}$ = 25°C/W.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

4.4.2 Group B inspection. Group B inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table VIa (JANS) and table VIb (JAN, JANTX, and JANTXV) of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with the applicable steps and footnotes of table I, group A, subgroup 2 herein and as specified in table III herein.

4.4.2.1 Group B inspection, appendix E, table VIa (JANS) of MIL-PRF-19500.

Subgroup	Method	Condition
4	1037	V (pk) = rated V_{RWM}; T_A = room ambient as defined in 4.5 of MIL-STD-750; f = 50-60 Hz (see 4.5.1); ON time, OFF time, and I_O shall be adjusted to achieve a delta lead temperature at L = 1/16° from the body of +85°C, -5°C +15°C. Cycle time shall be a minimum of three minutes. I_O shall be a maximum of 300 mA; 2,000 cycles.
5	1027	I_O = 200 mA dc minimum; V_R = rated V_{RWM} (see 1.3); f = 50-60 Hz (see 4.5.1); T_A = +150°C minimum, adjust T_A or I_O as required by the corresponding chosen value of T_A or I_O to achieve junction temperature as specified in MIL-PRF-19500.

4.4.2.2 Group B inspection, appendix E, table VIb (JAN, JANTX and JANTXV of MIL-PRF-19500.

Subgroup	Method	Condition
3	1037	T_A = room ambient as defined in 4.5 of MIL-STD-750; V (pk) = rated V_{RWM}; f = 50-60 Hz (see 4.5.1); I_O = 0.8 rated (see 1.3). NOTE: Leaded samples from the same lot may be used in lieu of 'US' suffix sample for life test.
5	3101 or 4081	See 4.5.4.
6	1032	T_A = +175°C.

4.4.3 Group C inspection. Group C inspection shall be conducted in accordance with the conditions specified for subgroup testing in appendix E, table VII of MIL-PRF-19500. Electrical measurements (end-points) shall be in accordance with the applicable steps and footnotes of table I, group A, subgroup 2 herein.

4.4.3.1 Group C inspection, table V of MIL-S-19500.

Subgroup	Method	Condition
2	2036	Tension: Test condition A; weight 4 pounds, t = 15 seconds. Lead fatigue: Test condition E. NOTE: Not applicable for 'US' suffix types.
6	1026	1,000 hours +72, -24 at T_A = room ambient as defined in 4.5 of MIL-STD-750; V (pk) = rated V_{RWM}; f = 50-60 Hz (see 4.3.1); I_O = 80 percent rated (see 1.3). NOTE: Leaded samples from the same lot may be used in lieu of US suffix samples for life tests.

4.5 Methods of inspection. Methods of inspection shall be as specified in the appropriate tables and as follows.

4.5.1 Life test. These tests shall be conducted with a half-sine waveform of the specified peak voltage impressed across the diode in the reverse direction followed by a half-sine waveform of the specified average rectified current. The forward conduction angle of the rectified current shall be neither greater than 180 degrees, no less than 150 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

4.5.2 Forward-recovery voltage and time. Forward recovery shall be measured as the time interval between zero time and the point where the pulse has decreased to 110 percent of the steady-state value of V_F when I_F = 200 mA dc. The maximum rise time of the response detector shall be 1 ns.

4.5.3 Scope display. The reverse breakdown characteristics shall be viewed on an oscilloscope with display calibration factors of 20 µA per division and 20 V per division. Reverse current over the knee shall be at least 100 µA and less than 200 µA. Any discontinuity or dynamic instability of the trace shall be cause for rejection of that device.

4.5.4 Thermal resistance. Thermal resistance measurement shall be performed in accordance with MIL-STD-750, method 3101 or 4081. Forced moving air or draft shall not be permitted across the devices during test. The maximum limit for $R_{\theta JL}$ under these test condition shall be $R_{\theta JL(max)}$ = 160°C/W and $R_{\theta JEC(max)}$ = 100°C/W. The following conditions shall apply:

I_H = 75 mA to 300 mA.

t_H = 25 seconds minimum.

I_M = 1 mA to 10 mA.

t_{MD} = 100 µs maximum.

LS = Lead spacing = 9.53 mm (.375 inch) as defined on figure 3.
LS = 0 for 'US' versions.

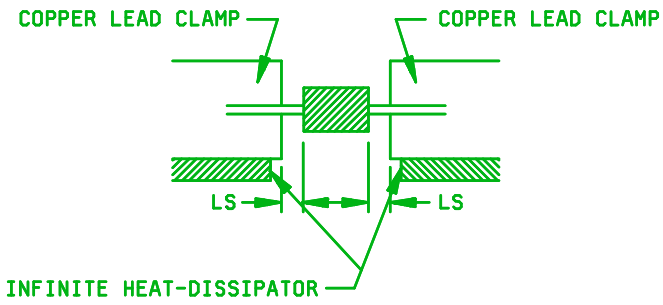


FIGURE 3. Mounting arrangement.

4.5.5 Pulse measurements. Conditions for pulse measurements shall be as specified in section 4 of MIL-STD-750.

4.5.6 Thermal impedance for initial qualification or requalification. Read and record data ($Z_{\theta JX}$) shall be supplied to the qualifying activity on 1 lot (random sample of 500 devices minimum). Twenty-two serialized devices shall be sent to the qualifying activity for test correlation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 1						
Visual and mechanical examination	2071					
Subgroup 2						
Thermal impedance	3101	See 4.4.1	$Z_{\theta JX}$		25	°C/W
Forward voltage (1N6640, 1N6640US only)	4011	I_F = 1 mA dc pulsed 2/	V_{F1}	0.540	0.620	V dc
Forward voltage (1N6640, 1N6640US only)	4011	I_F = 50 mA dc pulsed 2/	V_{F2}	0.760	0.860	V dc
Forward voltage (1N6640, 1N6640US only)	4011	I_F = 100 mA dc pulsed 2/	V_{F3}	0.820	0.920	V dc
Forward voltage	4011	I_F = 200 mA dc pulsed 2/	V_{F4}	0.870	1.00	V dc
1N6640, 1N6640US					1.10	
1N6641, 1N6641US						
Forward voltage (1N6639, 1N6639US only)	4011	I_F = 500 mA dc pulsed 2/	V_{F5}		1.20	V dc
Breakdown voltage	4021	$I_{(BR)}$ = 10 µA dc	V_{BR}			V dc
1N6639, 1N6639US				100		
1N6640, 1N6640US				75		
1N6641, 1N6641US				75		
Reverse current	4016	DC method	I_{R1}			nA dc
1N6639, 1N6639US		V_R = 75 V dc			100	
1N6640, 1N6640US		V_R = 50 V dc			100	
1N6641, 1N6641US		V_R = 50 V dc			100	
Subgroup 3						
High temperature operation:		T_A = +150°C				
Reverse current	4016	DC method	I_{R2}			µA dc
1N6639, 1N6639US		V_R = 75 V dc			100	
1N6640, 1N6640US		V_R = 50 V dc			100	
1N6641, 1N6641US		V_R = 50 V dc			100	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued.

Inspection 1/	MIL-STD-750		Symbol	Limits		Unit
	Method	Conditions		Min	Max	
Subgroup 3 - Continued						
Low-temperature operation:		T_A = -55°C				
Forward voltage	4011	Pulsed 2/	V_{F6}			V dc
1N6639, 1N6639US		I_F = 500 mA			1.3	
1N6640, 1N6640US		I_F = 200 mA			1.1	
1N6641, 1N6641US		I_F = 200 mA			1.2	
Subgroup 4						
Capacitance	4001	V_R = 0 V dc; V_{sig} = 50 mV(p-p) f = 1 MHz	C_{T1}			pF
1N6639, 1N6639US					2.5	
1N6640, 1N6640US					2.5	
1N6641, 1N6641US					3.0	
Reverse recovery time	4031	Condition A I_F = I_{RM} = 10 - 100 mA dc; $I_{R(REC)}$ = 10 percent I_{RM}	t_{rr}			ns
1N6639, 1N6639US					4.0	
1N6640, 1N6640US					4.0	
1N6641, 1N6641US					5.0	
Subgroup 5						
Not applicable						
Subgroup 6						
Surge current	4066	I_{FSM} = see 1.3; 10 surges at 1 per minute (maximum) surge; duration = 8.3 ms				
Electrical measurements		See table I, subgroup 2				
Subgroup 7						
Forward recovery voltage and time	4026	I_F = 200 mA dc (see 4.5.2)	V_{fr} t_{fr}		5.0 10.0	V(pk) ns

1/ For sampling plan, see MIL-S-19500.
2/ T_p = 300 µs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

TABLE II. Group E inspection (all quality levels) for qualification only.

Inspection	MIL-STD-750	
	Method	Conditions
Subgroup 1		
Thermal shock (glass strain)	1056	Condition A; 2,000 cycles
Hermetic seal	1071	Gross leak only
Electrical measurement		See table I, group A, subgroup 2
Subgroup 2		
Not applicable		
Subgroup 3		
Not applicable		
Subgroup 4		
Thermal resistance, junction to lead	3101 or 4081	L = 9.53 mm (.375 inch) $R_{\theta JL}$ = 160°C/W maximum; $R_{\theta JEC}$ = 100°C/W; (see 4.5.4)
Subgroup 5		
Potted environment test	1054	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

TABLE III. Groups A, B, C, and E electrical measurements. 1/ 2/ 3/

Step	Inspection	MIL-STD-750		Symbol	Limits		Unit
		Method	Conditions		Min	Max	
1	Forward voltage	4011	pulse width 5 ms maximum, duty cycle = 2 percent maximum, I_{FM} = 10 mA pk	ΔV_{F4} 3/		± 25 mV dc maximum change	
2	Reverse current	4016	DC method V_R = 20 V dc	ΔI_{R1} 3/		100 percent or 20 nA dc, which-ever is greater.	

1/ The electrical measurements for appendix E, table VIa (JANS) of MIL-PRF-19500 are as follows:

a. Subgroup 3, see table I herein, group A, subgroup 2.

b. Subgroup 4, see table III herein, step 1 and 2.

c. Subgroup 5, see table III herein, step 1 and 2.

2/ The electrical measurements for appendix E, table VIb (JANTX and JANTXV) of MIL-PRF-19500 are as follows:

a. Subgroup 3, see table III herein, steps 1 and 2.

b. Subgroup 6, see table III herein, steps 1 and 2.

3/ Devices which exceed the group A limits for this test shall not be accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall prevent mechanical damage of the devices during shipping and handling and shall not be detrimental to the device. When actual packaging of material is to be performed by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Points' packaging activity within the Military Department or Defense Agency, or within the Military Departments' System Command. Packaging data retrieval is available from the managing Military Departments' or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

5.2 Marking. Unless otherwise specified (see 6.2), marking shall be in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Notes. The notes specified in MIL-PRF-19500 are applicable to this specification.

6.2 Acquisition requirements. See MIL- PRF-19500.

6.3 Qualification. With respect to products requiring qualification, awards will be made only for products which are, at the time of award of contract, qualified for inclusion in Qualified Products List QPL No.19500 whether or not such products have actually been so listed by that date. The attention of the contractors is called to these requirements, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or purchase orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad Street, Columbus, OH 43216-5000.

6.4 Substitution information. The 1N6640 (MIL-PRF-19500/609) is preferred type in lieu of the 1N4150 and 1N4150-1 (MIL-PRF-19500/231).

6.4.1 Cross reference substitution list. JANS level will no longer be built to MIL-PRF-19500/231. Devices in stock are acceptable provided the date code does not exceed the date of implementation of MIL-S-19500/231. The devices on this specification are required for space flight applications. A PIN for PIN replacement table follows, and these devices are directly interchangeable.

Non-preferred PIN	Preferred PIN
1N4150-1	1N6640

6.5 Ordering data. Acquisition documentd may specify the material and finish (see 3.3.1).

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17
NASA - NA

Review activities:
Army - AR, MI, SM
Navy - AS, MC
Air Force - 19, 85, 99

Preparing activity:
DLA - CC

(Project 5961-1910-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	**1. DOCUMENT NUMBER** MIL-PRF-19500/609B	**2. DOCUMENT DATE (YYMMDD)** **970521**

3. DOCUMENT TITLE
SEMICONDUCTOR DEVICE, DIODE, SILICON, SWITCHING TYPES 1N6639, 1N6640, 1N6441, 1N6639US, 1N6640US, AND 1N6641US, JANTX, JANTXV, AND JANS

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Alan Barone	b. TELEPHONE (Include Area Code) (1) Commercial (614)692-0510 (2) AUTOVON 850-0510
c. ADDRESS (Include Zip Code) Defense Supply Center Columbus, ATTN: DSCC-VAT, 3990 East Broad Street, Columbus, OH 43216-5000	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T04:06Z
Check the source to verify that this is the current version before use.